



US008284129B2

(12) **United States Patent**
Shin et al.

(10) **Patent No.:** **US 8,284,129 B2**
(45) **Date of Patent:** ***Oct. 9, 2012**

(54) **LIGHT EMITTING PIXEL AND APPARATUS FOR DRIVING THE SAME**

(75) Inventors: **Yun Seung Shin**, Seoul (KR); **Jong Hak Baek**, Seoul (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**, Suwon-Si, Gyeonggi-Do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/174,008**

(22) Filed: **Jun. 30, 2011**

(65) **Prior Publication Data**

US 2011/0261044 A1 Oct. 27, 2011

Related U.S. Application Data

(63) Continuation of application No. 12/023,394, filed on Jan. 31, 2008, now Pat. No. 7,973,483.

(30) **Foreign Application Priority Data**

Mar. 26, 2007 (KR) 10-2007-0029453

(51) **Int. Cl.**

G09G 3/30 (2006.01)

G09G 3/10 (2006.01)

(52) **U.S. Cl.** **345/76; 345/77; 345/82; 315/169.3**

(58) **Field of Classification Search** 315/161, 315/167, 169.3; 345/36, 39, 45, 46, 55, 76-78, 345/82, 83, 92

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,583,775 B1 *	6/2003	Sekiya et al.	345/76
7,956,825 B2 *	6/2011	Kane	345/76
8,120,554 B2 *	2/2012	Kim	345/82
8,174,467 B2 *	5/2012	Kaneko et al.	345/76
2005/0068271 A1 *	3/2005	Lo	345/76

* cited by examiner

Primary Examiner — Tung X Le

(74) *Attorney, Agent, or Firm* — F. Chau & Associates, LLC

(57) **ABSTRACT**

A light emitting pixel includes a first organic light emitting diode (OLED) and a capacitor supplying to the first OLED current generated by an electric charge corresponding to a difference between a first voltage supplied to a first electrode of the capacitor and a second voltage supplied to a second electrode of the capacitor. The light emitting pixel further include a second OLED to supply the first voltage to the first electrode. The light emitting pixel further includes a voltage supply device to supply the first voltage to the first electrode in response to the second voltage.

15 Claims, 17 Drawing Sheets

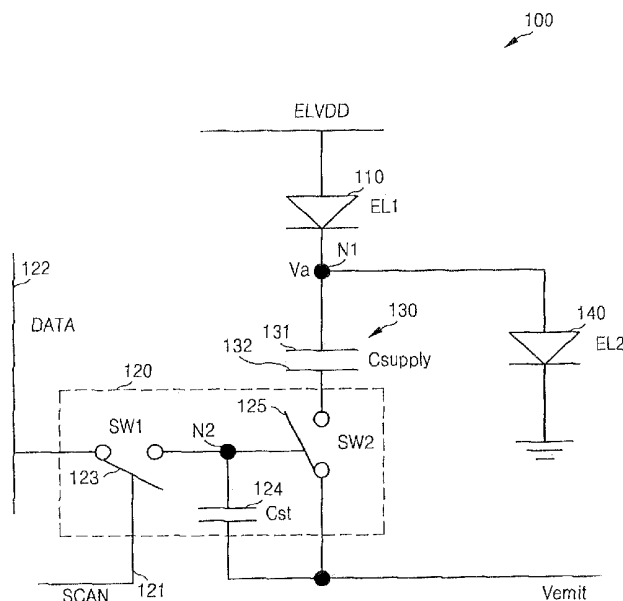


FIG. 1 (PRIOR ART)

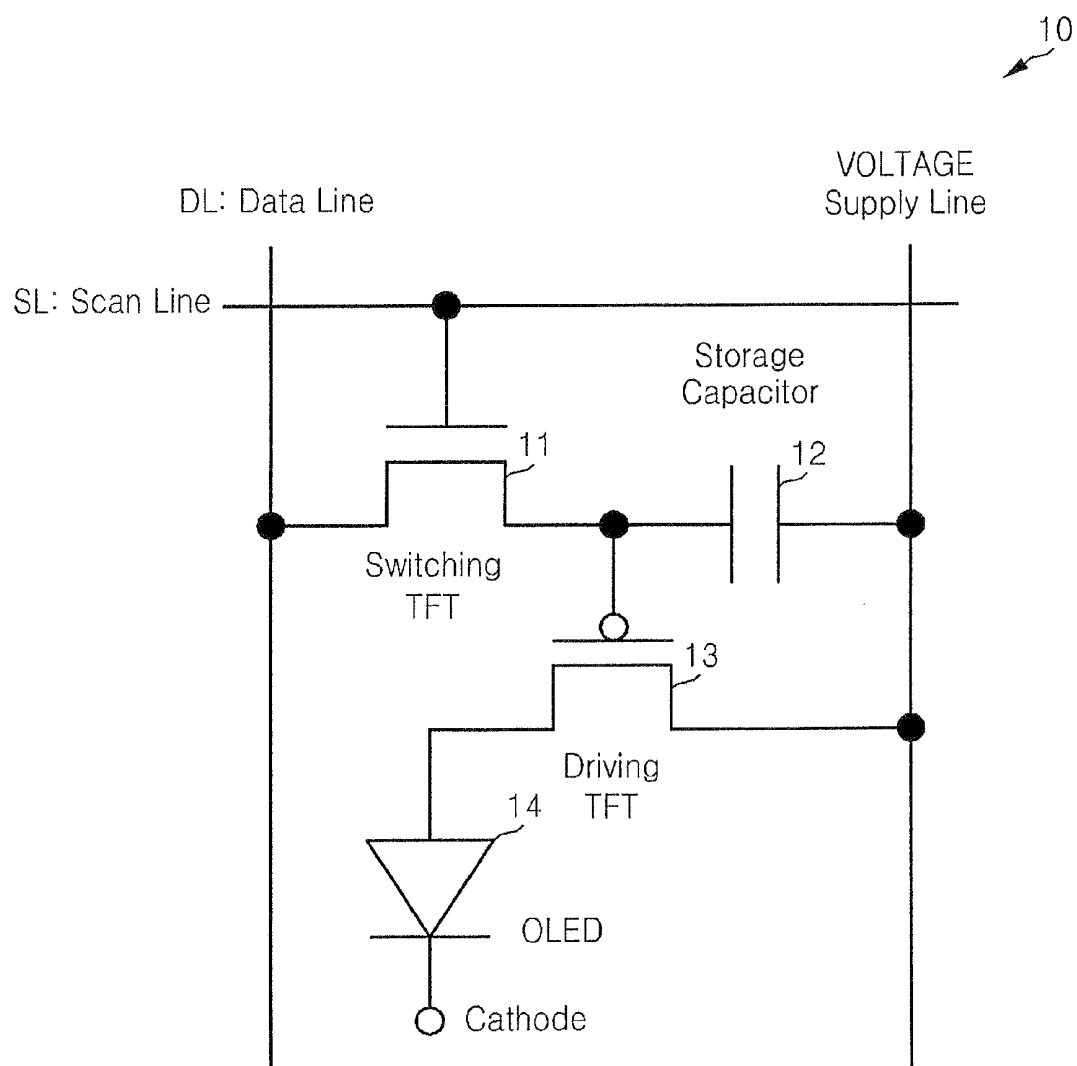


FIG. 2

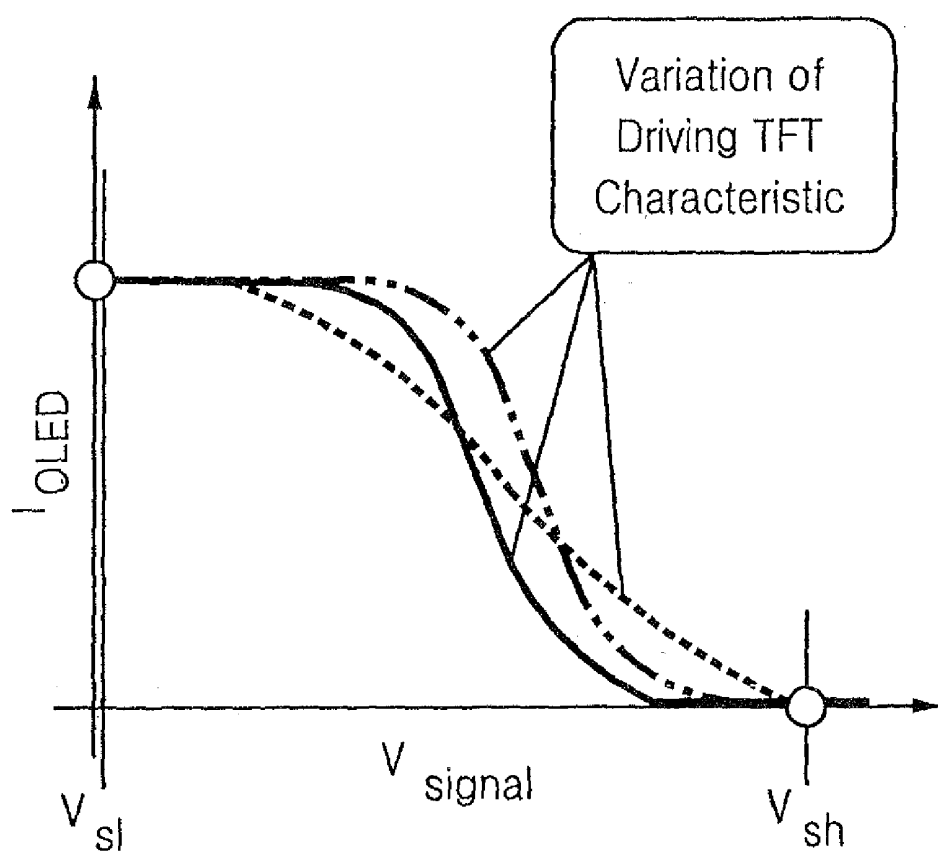


FIG. 3 (PRIOR ART)

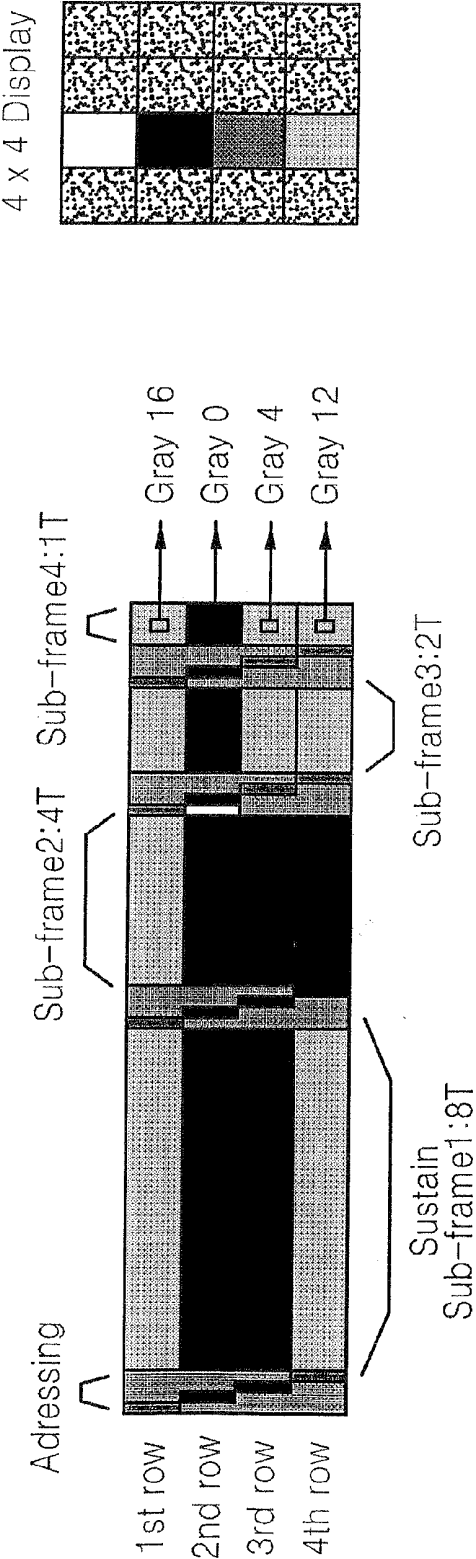
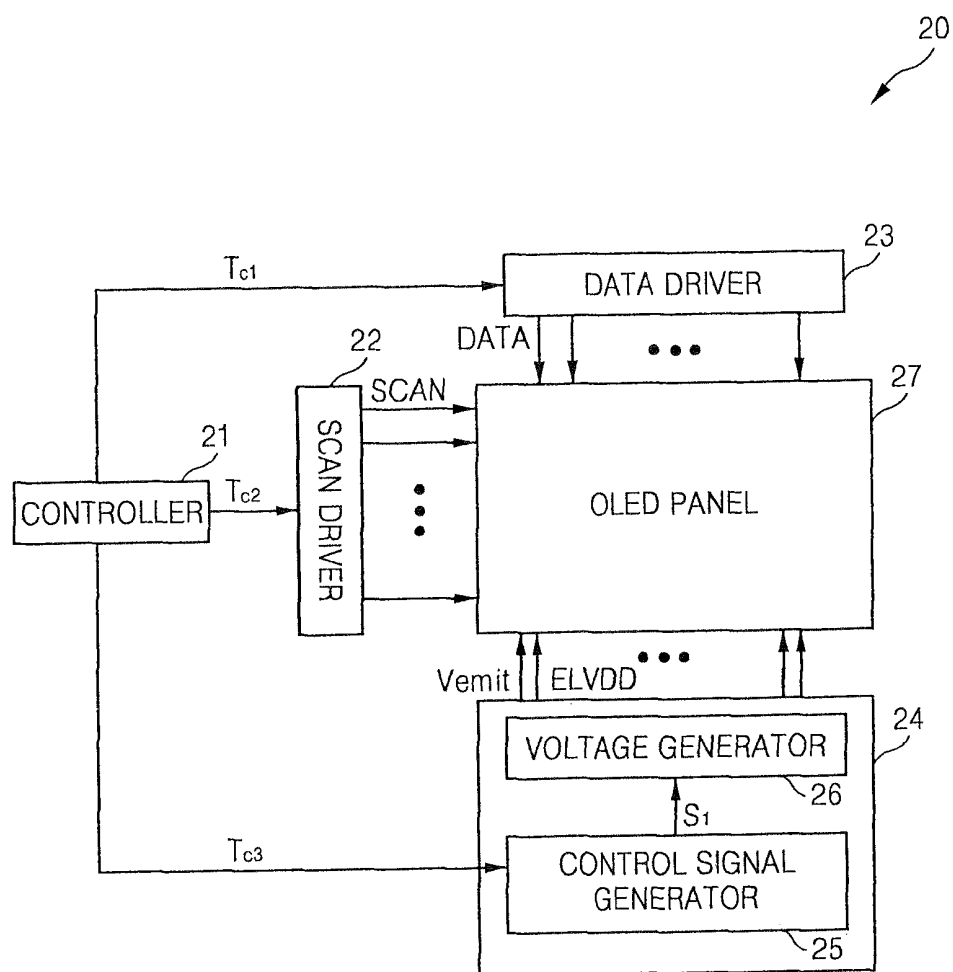


FIG. 4



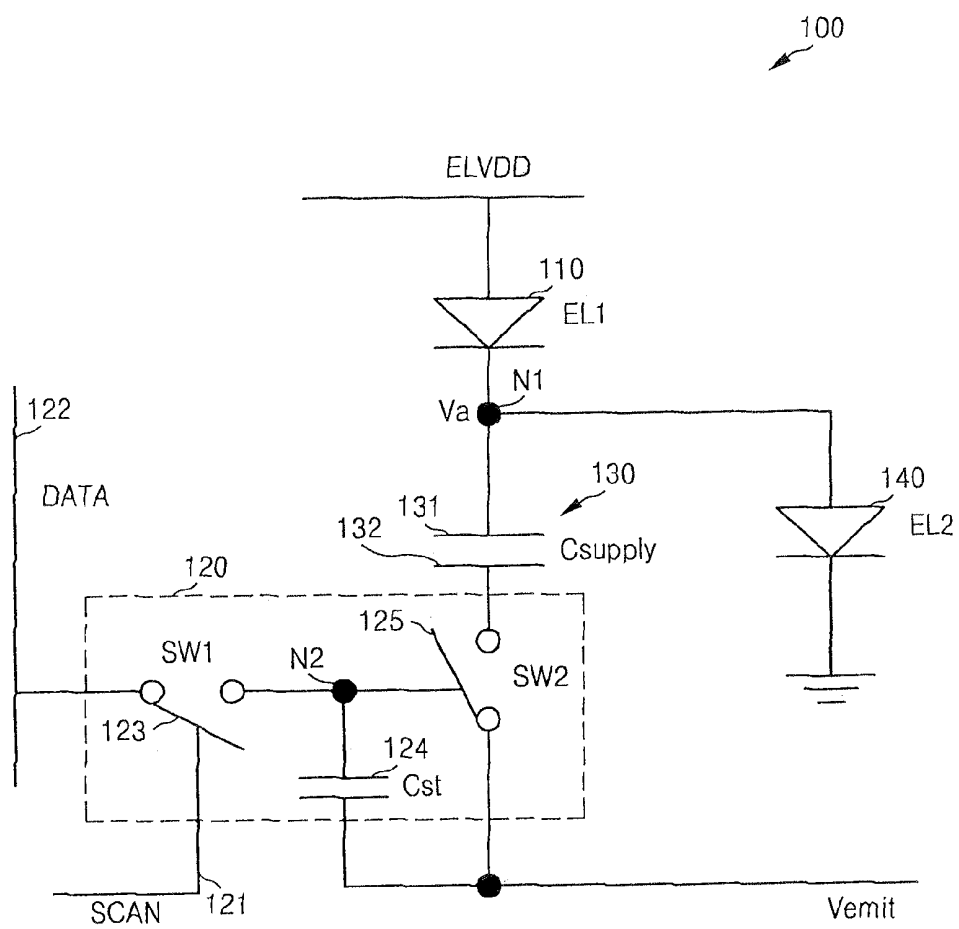


FIG. 6

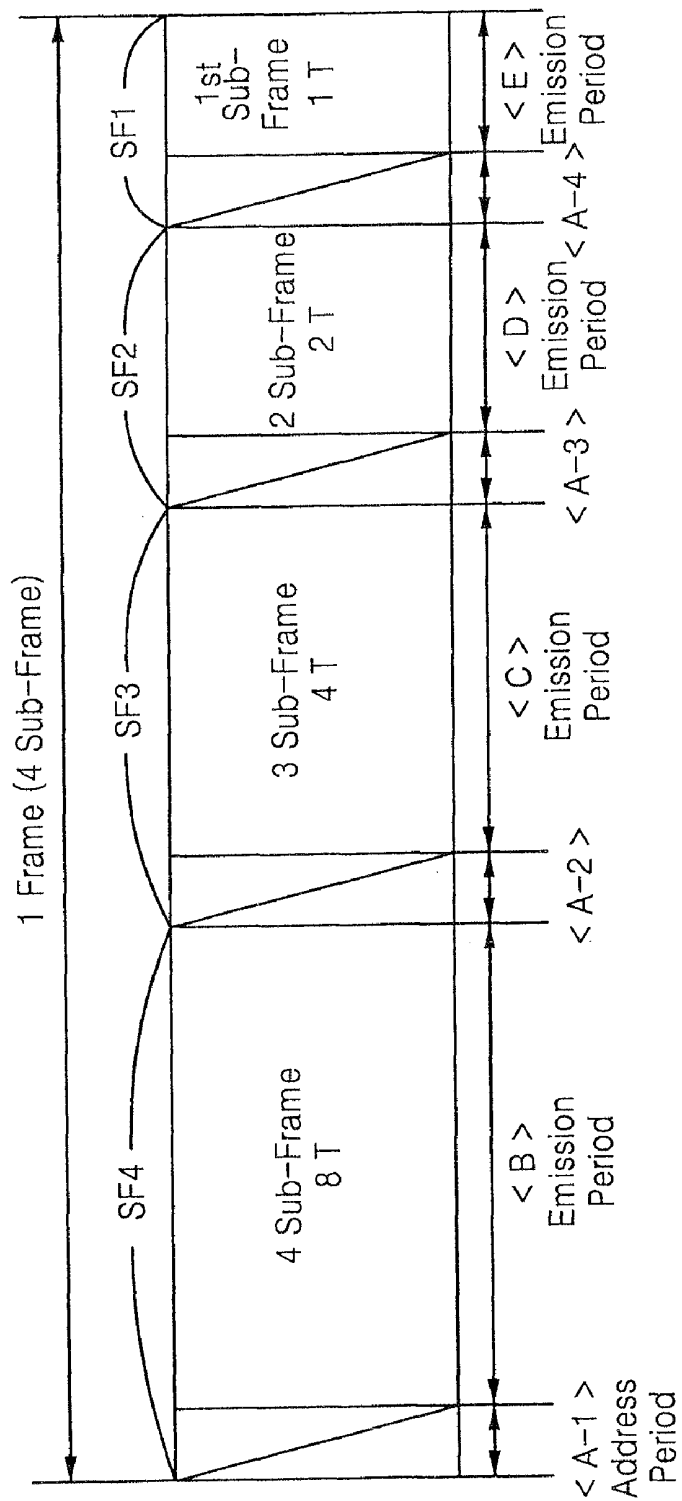


FIG. 7

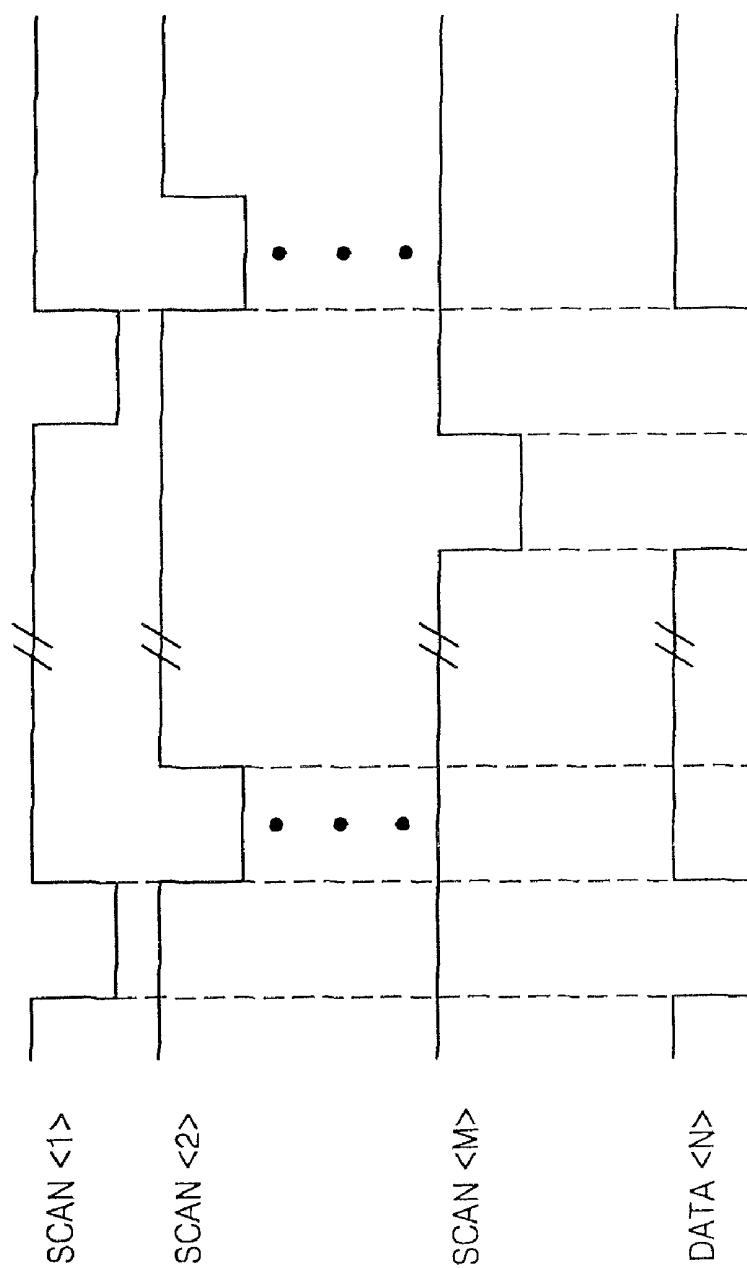


FIG. 8

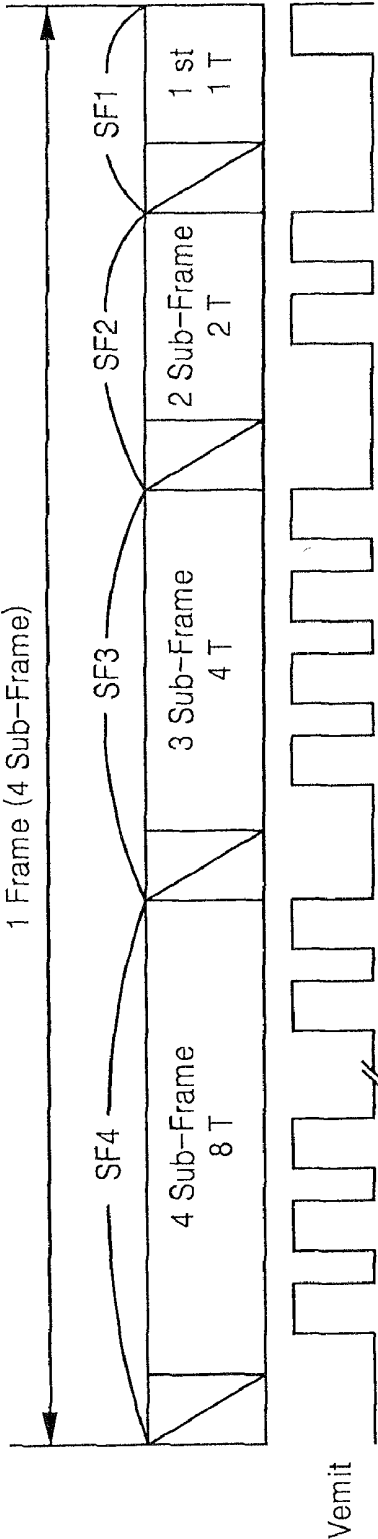


FIG. 9

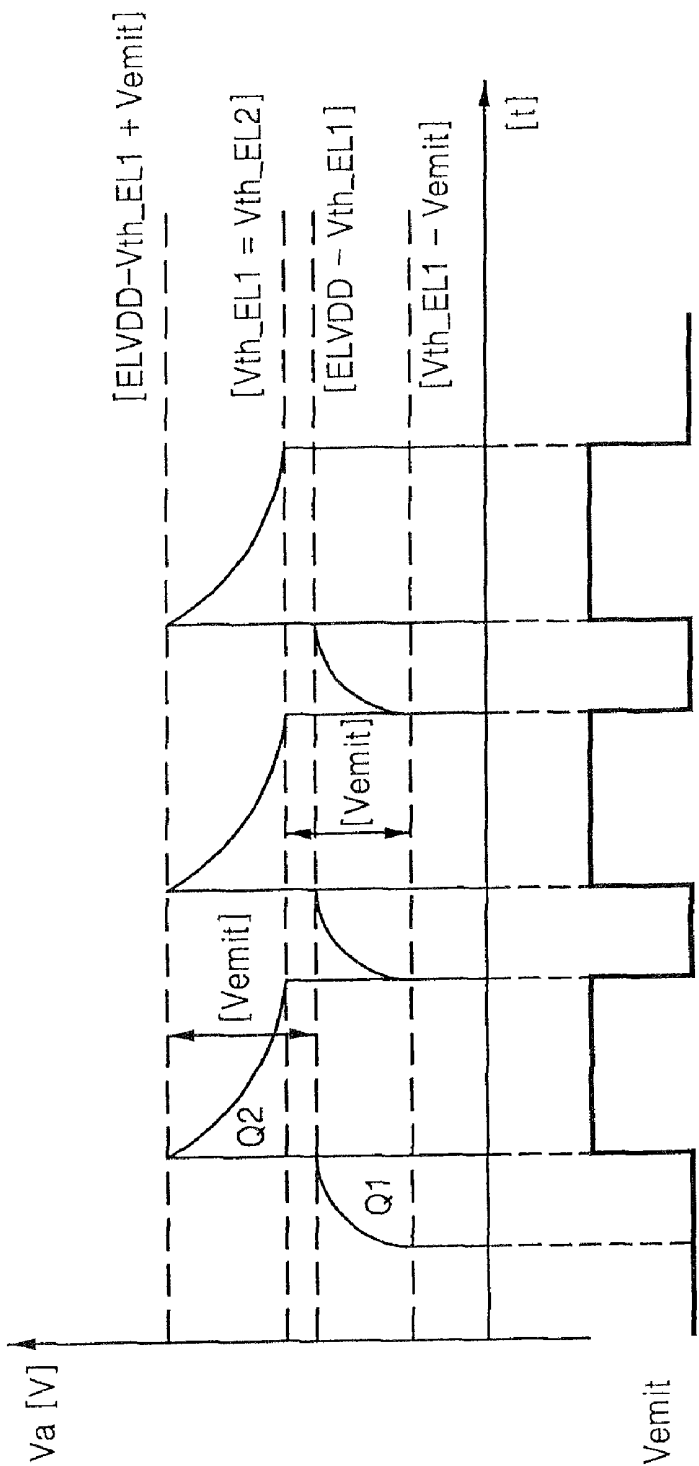


FIG. 10

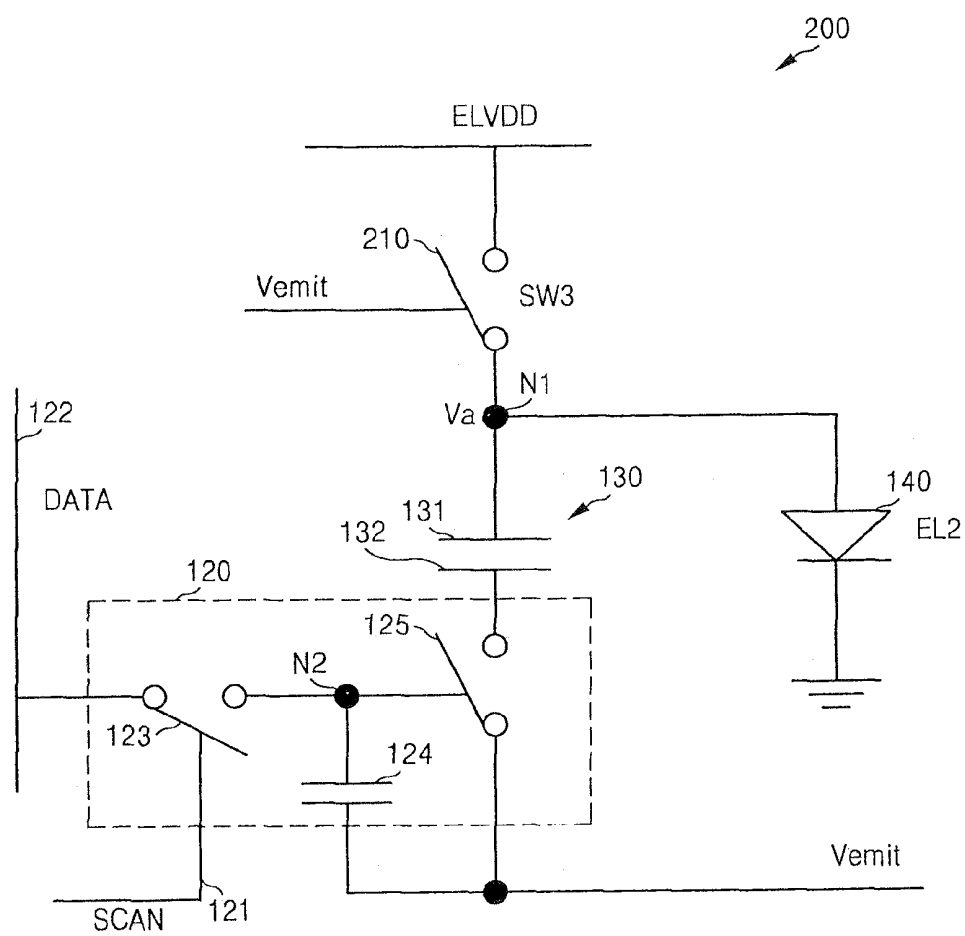


FIG. 11

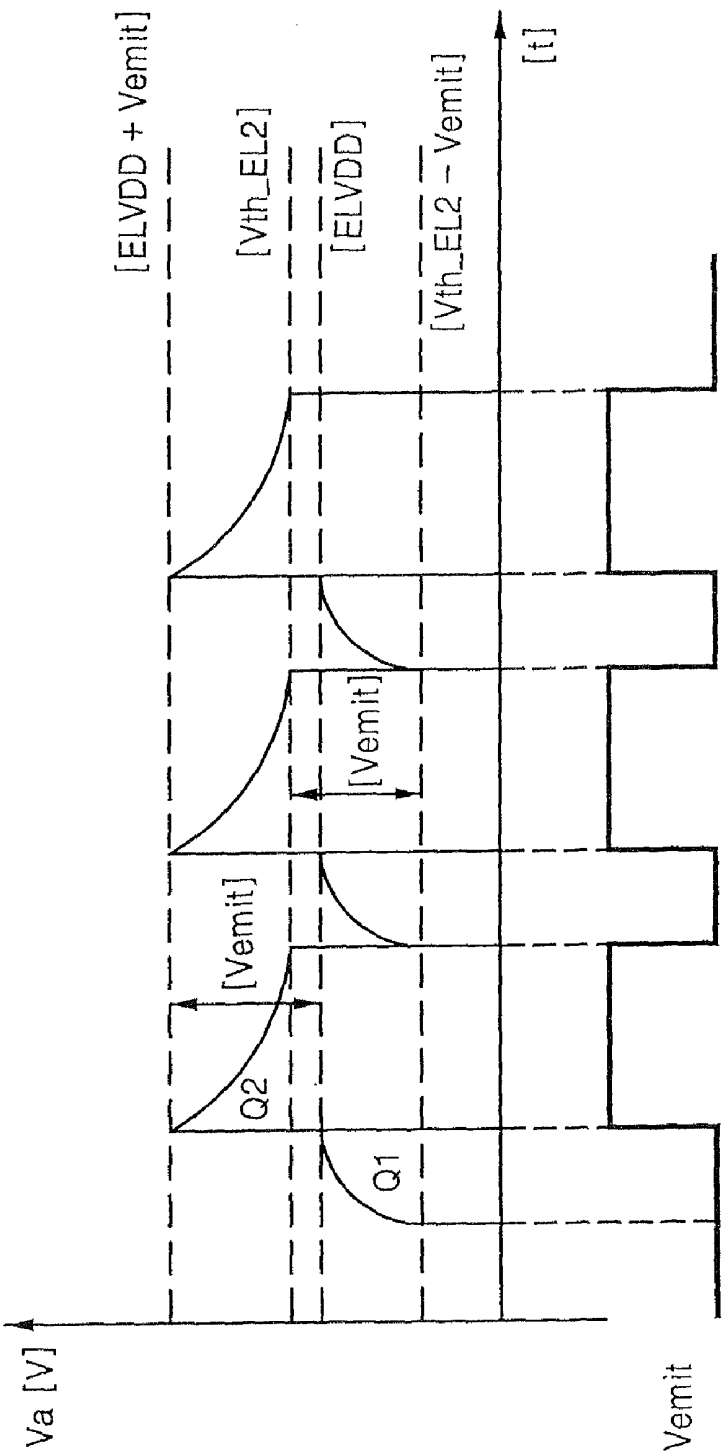


FIG. 12

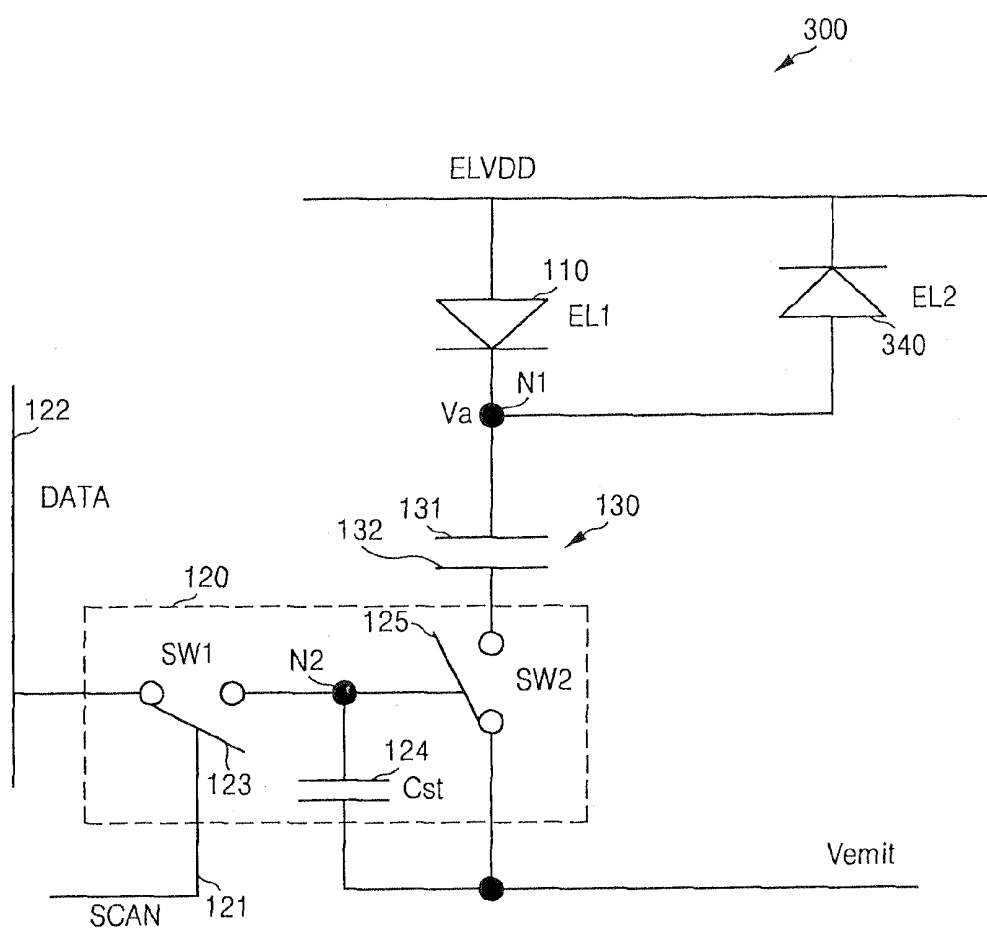


FIG. 13

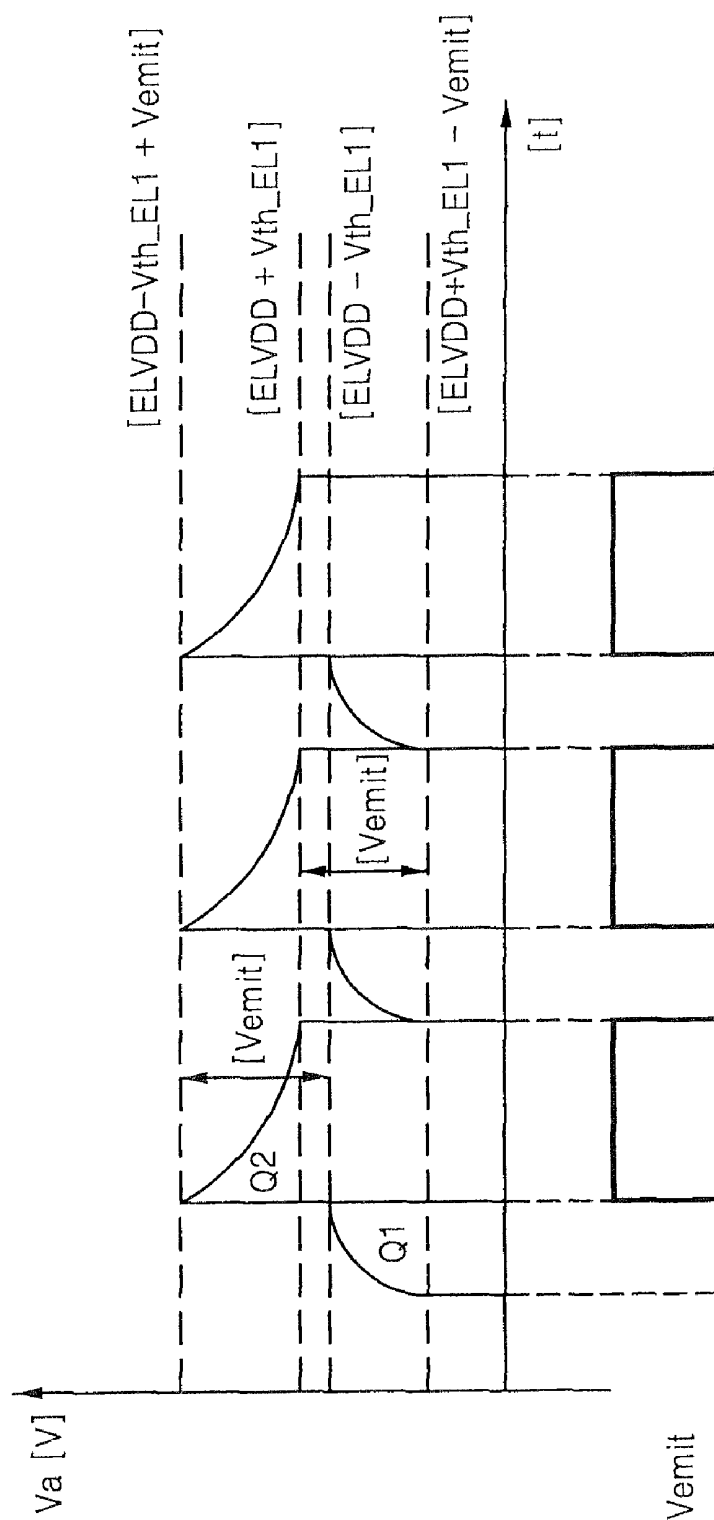
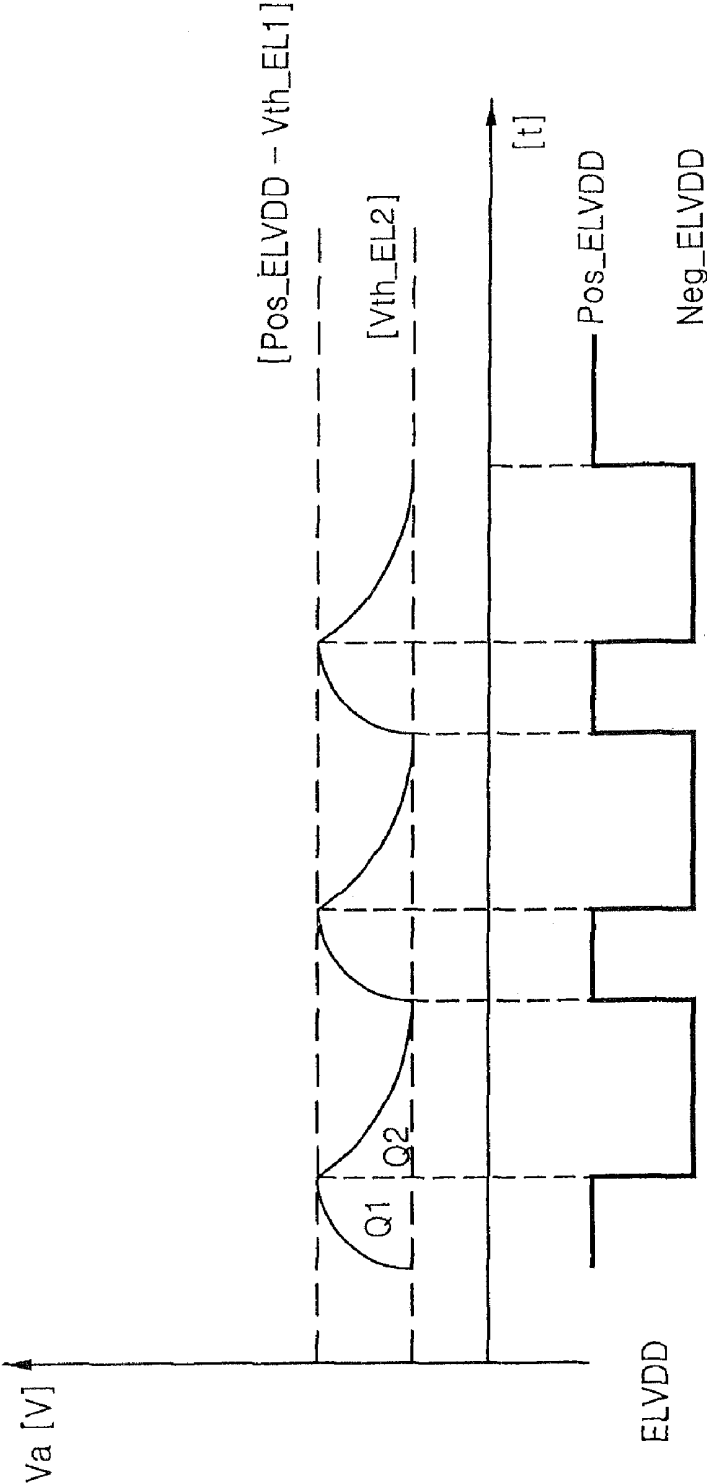


FIG. 14



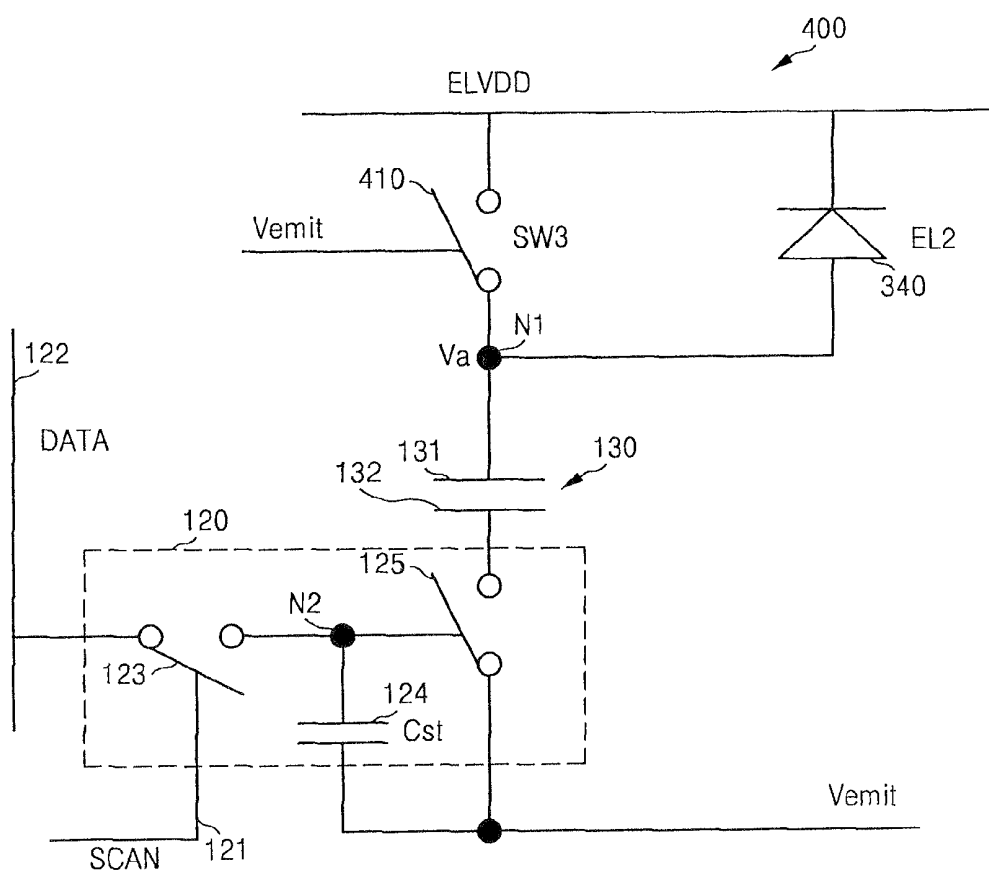


FIG. 16


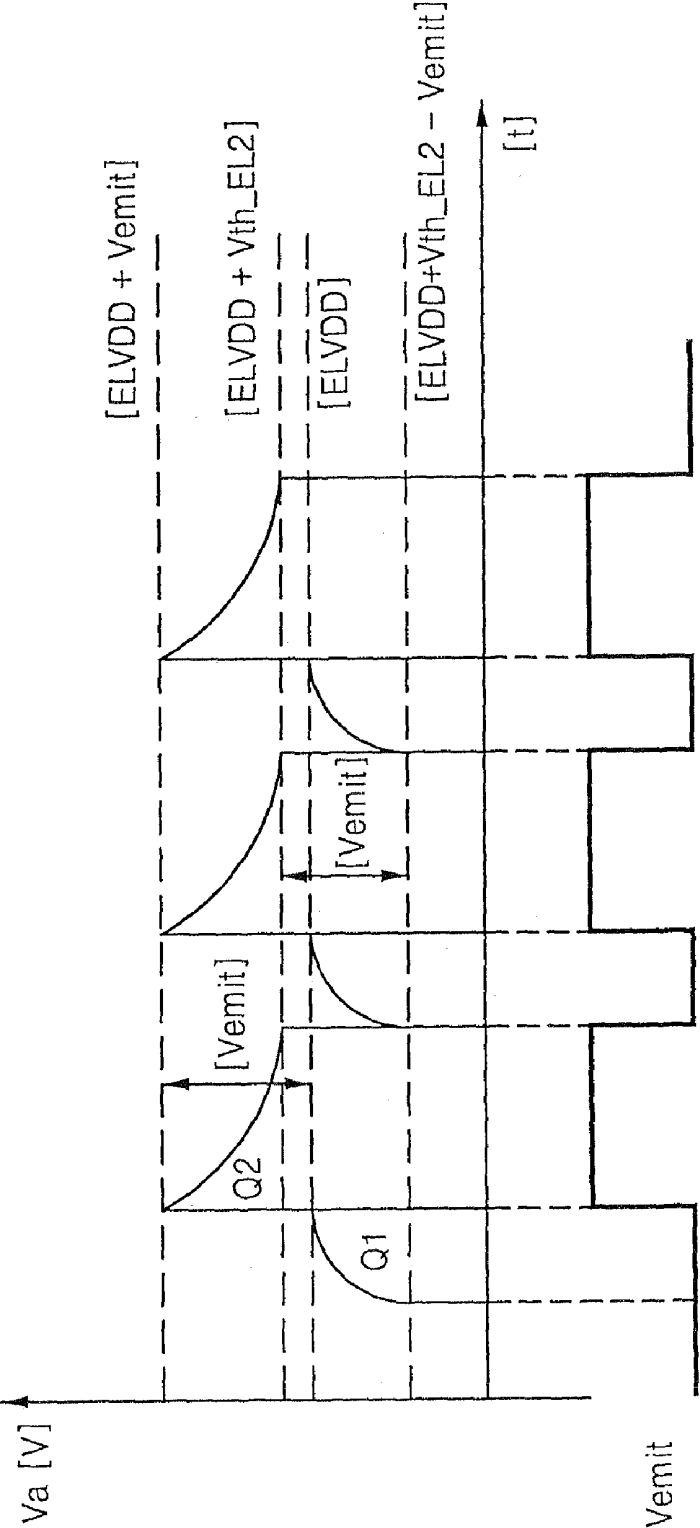


FIG. 17

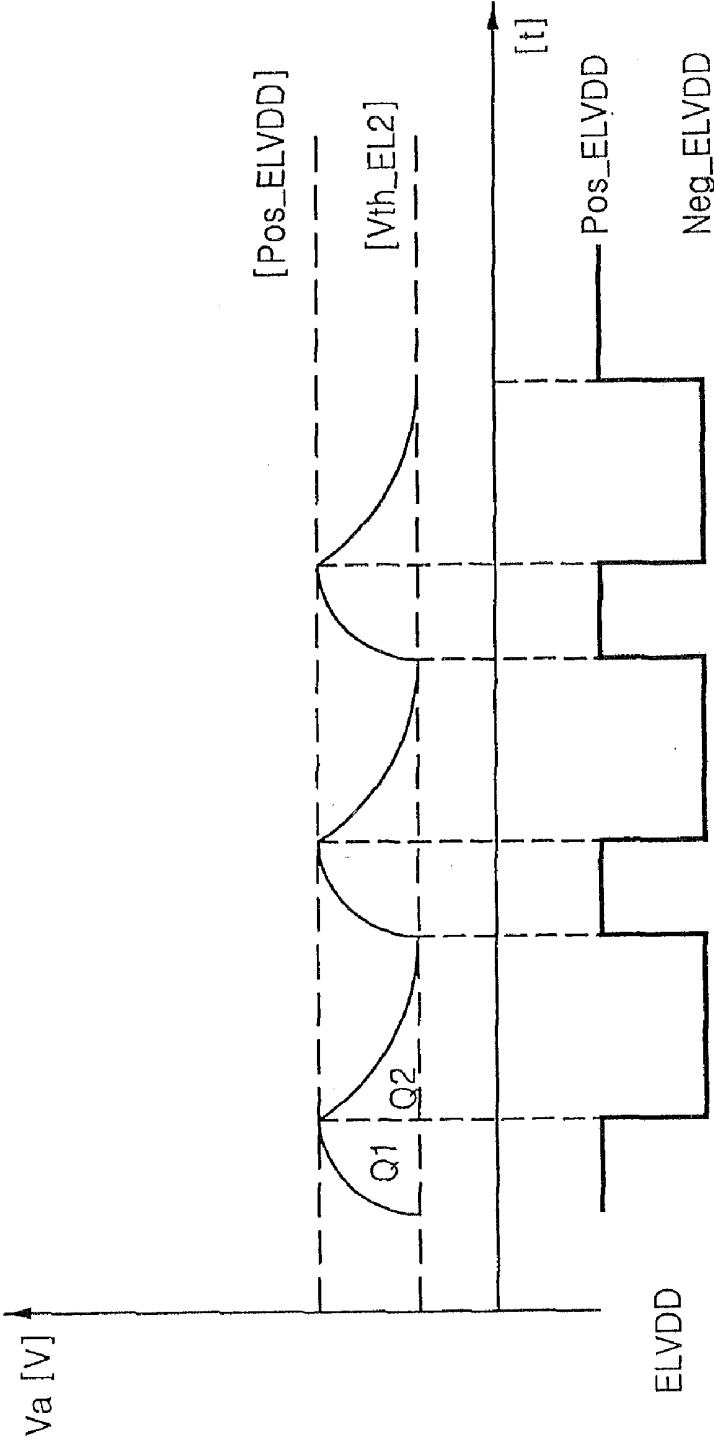

LIGHT EMITTING PIXEL AND APPARATUS FOR DRIVING THE SAME

CROSS-REFERENCE TO RELATED PATENT APPLICATION

This application is a Continuation Application of U.S. patent application Ser. No. 12/023,394, filed Jan. 31, 2008, now U.S. Pat. No. 7,973,483 which claims priority to and the benefit of Korean Patent Application No. 10-2007-0029453, filed on Mar. 26, 2007, the entire contents of both of which are incorporated by reference herein

BACKGROUND OF THE INVENTION

1. Technical Field

The present disclosure relates to a light emitting display and, more particularly, to the structure of a light emitting pixel and a driving method thereof, and an apparatus and method for driving the light emitting pixel.

2. Discussion of Related Art

Recently, amorphous-Silicon (a-Si) backplane technology or poly-Silicon (poly-Si) backplane technology has been used for an active matrix organic light emitting diode (AMOLED). In the AMOLEDs manufactured using the a-Si as a backplane, thin-film transistors (TFTs) embodied in an AMOLED panel have a problem with stability. Thus, a threshold voltage characteristic of each of the TFTs may vary as time passes. Also, in the AMOLEDs manufactured using the poly-Si or low temperature poly-Si (LTPS) as a backplane, TFTs embodied in an AMOLED panel have a problem with uniformity. Thus, a threshold voltage characteristic of each of the TFTs may change from one another according to the position where each TFT is located.

The change in the threshold voltage characteristic of each TFT embodied in the AMOLED is presented as dirt, referred to by the Japanese term mura, on the AMOLED panel. Thus, the change in the threshold voltage characteristic deteriorates the quality of an image displayed on the AMOLED panel and also shortens the life of the AMOLED panel.

To solve the above problems, the AMOLED is driven in accordance with a digital driving method that will be described hereinbelow. FIG. 1 illustrates the structure of a general organic light emitting pixel. FIG. 2 is a graph showing the characteristics of the voltage and current of the driving TFT of FIG. 1.

Referring to FIGS. 1 and 2, an organic light emitting pixel 10 includes a switching TFT 11, a storage capacitor 12, a driving TFT 13, and an organic light emitting diode (OLED) 14. The switching TFT 11 outputs a data signal input through a data line DL, or signal line, to the storage capacitor 12 in response to a scan signal input through a scan line SL. The storage capacitor 12 receives the data signal output from the switching TFT 11 and stores the received data signal.

The driving TFT 13 is turned on/off based on the voltage level of the data signal stored in the storage capacitor 12. When the driving TFT 13 is turned on, the driving TFT 13 supplies a voltage, or current, supplied from a voltage supply line to the OLED 14. Thus, the OLED 14 emits light in response to the supplied voltage or current.

As shown in FIG. 2, even when the characteristics of a voltage V_{signal} and current I_{OLED} of the driving TFT 13 vary according to position or time, if the AMOLED is driven in accordance with the digital driving method, the driving TFT 13 is simply used as a switch, so that there is not much change in the amount of current flowing to the OLED 14.

FIG. 3 illustrates a conventional digital driving method. For the convenience of explanation, FIG. 3 illustrates an example of the digital driving method to embody a total of sixteen gray values, in which a frame includes four sub-frames Sub-frame1 through Sub-frame4. In this example, the frame is referred to as a field and the sub-frame is referred to as a sub-field.

As shown in FIG. 3, a data signal used simply to turn on/off the driving TFT 13 at each sub-frame Sub-frame1 through Sub-frame4 is stored in the storage capacitor 12 shown in FIG. 1. Also, the gray value or gradation of the OLED 14 at each sub-frame Sub-frame1 through Sub-frame4 is presented as an integration value of the current supplied to the OLED 14 through the driving TFT 13 that is turned on.

For example, the OLED at a first row emits light for 8T during the first sub-frame Sub-frame1, for a time 4T during the second sub-frame Sub-frame2, for a time 2T during the third sub-frame Sub-frame3, and for a time 1T during the fourth sub-frame Sub-frame4. In this example, the time T indicates the time during which the driving TFT 13 is turned on. Thus, the OLED at the first row can present value Gray 16.

The OLED at the second row that does not emit light during the first through fourth sub-frames Sub-frame1 through Sub-frame4 can present value Gray 0. Also, the OLED at the third row that emits light only during the third and fourth sub-frames Sub-frame3 and Sub-frame4 can present value Gray 4. The OLED at the fourth row that emits light only during the first, third, and fourth sub-frames Sub-frame1, Sub-frame3, and Sub-frame4 can present value Gray 12.

As shown in FIG. 3, when one frame is formed of four sub-frames, due to the characteristic of a digital driving method, the driving TFT 13 needs to supply a large amount of current at a fast frequency to the OLED 14 during a single frame. For example, the driving TFT 13 at the first row supplies a large amount of current to the OLED 14 four times and the driving TFT 13 at the fourth row supplies a large amount of current to the OLED 14 three times.

When a single frame is formed of n number of sub-frames, where n is a natural number, the driving TFT 13 needs to supply a large amount of current to the OLED 14 a maximum n times due to the characteristic of the digital driving method. Thus, as lots of stress is applied to the OLED 14, the function of the OLED 14 is rapidly degraded and a change in the amount of current flowing in the OLED 14 occurs as time passes. Thus, the change in the amount of current reduces the brightness of the AMOLED panel including the organic light emitting pixel 10 and shortens the life of the AMOLED.

Therefore, the structure of a light emitting pixel that is completely independent of the deviation of each of the driving TFTs embodied in the AMOLED panel and that can supply a constant amount of current to the OLED regardless of the deterioration of the function of the OLED that is generated as time passes, and a method for driving the light emitting pixel, are needed.

SUMMARY OF THE INVENTION

To solve the above and/or other problems, exemplary embodiments of the present invention provide a structure of a light emitting pixel that has a uniform output regardless of a change in the characteristic of a driving TFT embodied in an AMOLED panel, and a method for presenting a gray value of the light emitting pixel.

Exemplary embodiments of the present invention provide an apparatus and method for driving the light emitting pixel. Also, exemplary embodiments of the present invention provide a display apparatus including the light emitting pixel.

According to an exemplary embodiment of the present invention, a light emitting pixel comprises a first OLED (organic light emitting diode) and a capacitor supplying to the first OLED a current generated by an electric charge corresponding to a difference between a first voltage supplied to a first electrode of the capacitor and a second voltage supplied to a second electrode of the capacitor.

The light emitting pixel further comprises a second OLED to supply the first voltage to the first electrode. The light emitting pixel further comprises a voltage supply device to supply the first voltage to the first electrode in response to the second voltage. The first voltage or the second voltage is toggled a predetermined number of times for each light emitting period.

The light emitting pixel further comprises a switching circuit to supply the second voltage to the second electrode by being switched based on a scan signal input through a scan line and a data signal input through a data line.

According to an exemplary embodiment of the present invention, a light emitting pixel comprises a capacitor including a first electrode receiving a first voltage and a second electrode receiving a second voltage and a first OLED (organic light emitting diode) having an anode connected to the first electrode. A cathode of the first OLED is connected to a first power supply supplying a third voltage higher than the first voltage or a second power supply supplying a fourth voltage lower than the third voltage.

The light emitting pixel further comprises a second OLED connected between the first power supply supplying the third voltage higher than the first voltage and the first electrode. The light emitting pixel further comprises a switching device to supply the first voltage to the first electrode in response to the second voltage.

The first voltage or the second voltage is toggled a predetermined number of times for each light emitting period. The light emitting pixel further comprises a switching circuit to supply the second voltage to the second electrode by being switched based on a scan signal input through a scan line and a data signal input through a data line.

According to an exemplary embodiment of the present invention, a voltage generating circuit comprises a control signal generator generating a control signal and a voltage generator generating a first voltage supplied to a first electrode of a capacitor to control the light emission of an OLED (organic light emitting diode) and a second voltage supplied to a second electrode of the capacitor, wherein, to represent a gradation using the OLED, the voltage generator generates a voltage to control the light emission of the OLED generating the first voltage or the second voltage that toggles a predetermined number of times for each light emitting period in response to the control signal.

According to an exemplary embodiment of the present invention, a driver to drive a light emitting pixel comprises an OLED (organic light emitting diode), a capacitor including a first electrode and a second electrode and supplying to the OLED current generated by an electric charge corresponding to a difference between a first voltage supplied to the first electrode and a second voltage supplied to the second electrode, a control signal generator generating a control signal, and a voltage generator generating the first voltage or the second voltage that toggles a predetermined number of times during a light emitting period in response to the control signal to represent a gradation using the OLED.

When the light emitting pixel further comprises a switching circuit to supply the second voltage to the second electrode based on a scan signal input through a scan line and a data signal input through a data line, the driver further com-

prises a signal generation circuit to generate the scan signal and the data signal in response to at least one timing control signal.

According to an exemplary embodiment of the present invention, a display apparatus comprises a panel including a plurality of data lines, a plurality of scan lines, and a plurality of light emitting pixels, and a driver including a voltage generator generating a second voltage and supplying data signal through the data lines and scan signals through the scan lines, wherein each of the light emitting pixels comprises a capacitor including a first electrode receiving a first voltage and a second electrode receiving the second voltage, a first OLED (organic light emitting diode) having an anode connected to the first electrode, and a switching circuit to supply the second voltage to the second electrode based on a scan signal input through a corresponding one of the scan lines and a data signal input through a corresponding one of the data lines.

Each of the light emitting pixels further comprises a second OLED connected between a power supply and the first electrode. Each of the light emitting pixels further comprises a switching device connected between a power supply and the first electrode and switched in response to the second voltage. A cathode of the first OLED is connected to a first power supply or a second power supply generating a voltage lower than that of the first power supply.

The driver comprises a data line driver including the voltage generator generating the second voltage and supplying the data signals through the data lines and a scan line driver to supply the scan signals through the scan lines.

According to an exemplary embodiment of the present invention, a method for representing a gradation of a light emitting pixel comprises charging an electric charge corresponding to a difference between a first voltage and a second voltage in a capacitor and representing a gradation in response to a current corresponding to the electric charge charged in the capacitor using a first OLED (organic light emitting diode).

The method further comprises supplying to the capacitor the first voltage or the second voltage that toggles a predetermined number of times for each light emitting period.

The method further comprises supplying to the capacitor the first voltage that toggles a predetermined number of times for each light emitting period using a second OLED. The method further comprises supplying to the capacitor the first voltage that toggles a predetermined number of times through a switching device that switches in response to the second voltage for each light emitting period.

The method further comprises supplying to the capacitor the second voltage that toggles a predetermined number of times based on a scan signal input through a scan line and a data signal input through a data line for each light emitting period.

According to an exemplary embodiment of the present invention, a method for driving a light emitting pixel comprises supplying a first voltage to a first electrode of a capacitor that is capable of controlling light emission of an OLED (organic light emission diode) and a second voltage to a second electrode of the capacitor and toggling the first voltage and the second voltage a predetermined number of times for each light emitting section.

According to an exemplary embodiment of the present invention, a light emitting pixel comprises a first OLED (organic light emitting diode) connected between a first power supply to supply a first voltage and a first electrode of a capacitor, a second OLED connected between the first electrode and a second power supply, and a switching circuit

5

switched based on a scan signal input through a scan line and a data signal input through a data line to supply a second voltage to a second electrode of the capacitor.

According to an exemplary embodiment of the present invention, a light emitting pixel comprises a switching device 5 connected between a first power supply to supply a first voltage and a first electrode of a capacitor and switched in response to a second voltage, a second OLED (organic light emitting diode) connected between the first electrode and a second power supply, and a switching circuit switched based on a scan signal input through a scan line and a data signal input through a data line to supply the second voltage to a second electrode of the capacitor. The second power supply supplies a voltage lower than the first voltage.

According to an exemplary embodiment of the present invention, a light emitting pixel comprises a first OLED (organic light emitting diode) connected between a first power supply to supply a first voltage and a first electrode of a capacitor, a second OLED connected between the first electrode and a second power supply, and a switching circuit switched based on a scan signal input through a scan line and a data signal input through a data line to supply a second voltage to a second electrode of the capacitor.

According to an exemplary embodiment of the present invention, a light emitting pixel comprises a switching device 25 connected between a first power supply to supply a first voltage and a first electrode of a capacitor and switched in response to a second voltage, a second OLED (organic light emitting diode) connected between the first power supply and the first electrode, and a switching circuit switched based on a scan signal input through a scan line and a data signal input through a data line to supply the second voltage to a second electrode of the capacitor. The first voltage or the second voltage is toggled a predetermined number of times for each light emitting period.

BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments of the present invention will be understood in more detail from the following descriptions taken in conjunction with the attached drawings, in which:

FIG. 1 illustrates the structure of a general, previously known, organic light emitting pixel;

FIG. 2 is a graph showing the characteristics of the voltage and current of the driving TFT of FIG. 1;

FIG. 3 illustrates a conventional, previously known, digital driving method;

FIG. 4 is a block diagram of a display apparatus according to an exemplary embodiment of the present invention;

FIG. 5 is the structure of a light emitting pixel according to an exemplary embodiment of the present invention;

FIG. 6 is a timing diagram showing an example of a frame to drive the light emitting pixel of FIG. 5;

FIG. 7 is a timing diagram showing an example of the address period of FIG. 6;

FIG. 8 is a timing diagram showing an example of driving the light emitting pixel of FIG. 6 in a light emitting period;

FIG. 9 is a voltage waveform diagram for explaining a method for driving the light emitting pixel of FIG. 5 in a light emitting period;

FIG. 10 illustrates the structure of a light emitting pixel according to an exemplary embodiment of the present invention;

FIG. 11 is a voltage waveform diagram for explaining a method for driving the light emitting pixel of FIG. 10 in a light emitting period;

6

FIG. 12 illustrates the structure of a light emitting pixel according to an exemplary embodiment of the present invention;

FIG. 13 is a voltage waveform diagram for explaining an exemplary embodiment of the present invention of a method for driving the light emitting pixel of FIG. 12 in a light emitting period;

FIG. 14 is a voltage waveform diagram for explaining an exemplary embodiment of the method for driving the light emitting pixel of FIG. 12 in a light emitting period;

FIG. 15 illustrates the structure of a light emitting pixel according to an exemplary embodiment of the present invention;

FIG. 16 is a voltage waveform diagram for explaining an exemplary embodiment of the present invention of a method for driving the light emitting pixel of FIG. 15 in a light emitting period; and

FIG. 17 is a voltage waveform diagram for explaining an exemplary embodiment of the present invention of the method for driving the light emitting pixel of FIG. 15 in a light emitting period.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

The attached drawings for illustrating exemplary embodiments of the present invention are referred to in order to gain a sufficient understanding of the present invention, the merits thereof, and the objectives accomplished by the implementation of the present invention. Hereinafter, the present invention will be described in detail by explaining exemplary embodiments of the invention with reference to the attached drawings. Like reference numerals in the drawings denote like elements.

FIG. 4 is a block diagram of a display apparatus according to an exemplary embodiment of the present invention. Referring to FIG. 4, a display apparatus 20 according to an exemplary embodiment of the present invention includes a controller 21, a scan driver 22, a data driver 23, a voltage generation circuit 24, and an AMOLED panel 27. Although in FIG. 4 the voltage generation circuit 24 is shown as a circuit separated from the data driver 23, the voltage generation circuit 24 can be embodied in the controller 21, the scan driver 22, or the data driver 23 according to a variety of exemplary embodiments of the present invention.

The AMOLED panel 27 includes a plurality of data lines, a plurality of scan lines, and a plurality of light emitting pixels. Each of the light emitting pixels can be embodied by each of light emitting pixels 100, 200, 300, and 400 respectively shown in FIGS. 5, 10, 12, and 15. The controller 21 outputs a corresponding one of first, second, and third timing control signals Tc1, Tc2, and Tc3 to control the operational timing of the display apparatus 20 to a corresponding one of the scan driver 22, the data driver 23, and a control signal generator 25.

The scan driver 22 in response to the second timing control signal Tc2 supplies a corresponding one of a plurality of scan signals SCAN through a corresponding one of the scan lines. The data driver 23 in response to the first timing control signal Tc1 supplies a corresponding data signal DATA of a plurality of data signals through a corresponding one of the data lines. At least one of the controller 21, the scan driver 22, and the data driver 23 can be embodied into a single chip.

The voltage generation circuit 24 includes the control signal generator 25 and a voltage generator 26. The control signal generator 25 in response to the third timing control signal Tc3 generates at least one control signal S1 to control the voltage generator 26.

The voltage generator **26** in response to the control signal **S1** generates at least one of a first voltage ELVDD and a second voltage Vemit. The first voltage ELVDD and the second voltage Vemit are toggled in different numbers for each light emitting period in response to the control signal **S1**.

The scan driver **22**, the data driver **23**, and the voltage generation circuit **24** can be embodied into a single circuit or chip. The AMOLED panel **27** is operated based on each of the scan signals SCAN and the data signals DATA and causes each light emitting pixel to emit light in a corresponding one of the gray values based on at least one of the first voltage ELVDD and the second voltage Vemit output from the voltage generation circuit **24**.

FIG. **5** is the structure of a light emitting pixel **100** according to an exemplary embodiment of the present invention. Referring to FIG. **5**, the light emitting pixel **100** includes a first OLED **110** (EL1), a switching circuit **120**, a first capacitor **130** (C supply) including a first electrode **131** and a second electrode **132**, and a second OLED **140** (EL2). The first capacitor **130** performs a function as a current source to supply current to the second OLED **140**.

The first OLED **110** is connected between a first power supply line ELVDD and a first electrode **131** of the first capacitor **130** and supplies a first voltage Va to the first electrode **131** through a first node N1. The voltage ELVDD of the first power line is higher than the first voltage Va.

The switching circuit **120** is switched based on the scan signal SCAN input through the scan line **121** and the data signal DATA input through the data line **122** and supplies the second voltage Vemit from a second power supply line to the second electrode **132** of the first capacitor **130**. In the operation of the switching circuit **120**, the switching circuit **120** includes a first switch **123** (SW1), a second capacitor **124** (Cst), and a second switch **125** (SW2). The first switch **123** in response to the scan signal SCAN controls the output of the data signal DATA to a second node N2.

The second capacitor **124** stores a predetermined amount of electric charges based on the data signal DATA output from the first switch **123**, for example, a high level (data "1") or a low level (data "0"). Thus, the second node N2 has a predetermined electric potential according to the electric charges stored in the second capacitor **124**.

The second switch **125** performs a switching operation based on the electric potential of the second node N2 and supplies the second voltage Vemit to the second electrode **132** of the first capacitor **130** according to the switching operation. For example, when the first switch **123** and the second switch **125** are embodied by PMOS transistors, if the first switch **123** supplies the data signal DATA having a low level to the second node N2 in response to the scan signal SCAN having a low level, the second switch **125** supplies the second voltage Vemit to the second electrode **132** of the first capacitor **130**. When the first switch **123** and the second switch **125** are embodied by NMOS transistors, however, if the first switch **123** supplies the data signal DATA having a high level to the second node N2 in response to the scan signal SCAN having a high level, the second switch **125** supplies the second voltage Vemit to the second electrode **132** of the first capacitor **130**.

Thus, the first capacitor **130** outputs to the second OLED **140** a current generated by an electric charge corresponding to a difference between the first voltage Va supplied to the first electrode **131** and the second voltage Vemit supplied to the second electrode **132**. The second OLED **140** is connected between the first electrode **131** of the first capacitor **130** and a second power supply and emits light by the current supplied by the first capacitor **130**. The second power supply supplies

a voltage lower than the voltage ELVDD of the first power line and supplies a ground voltage or a common voltage supplied to the AMOLED panel **27** shown in FIG. **4**.

Because the voltage ELVDD of the first power line and the second voltage Vemit are toggled in different numbers in a light emitting period of different sub-frames as shown in FIG. **8**, the light emitting pixel **100** emits light in response to the current supplied from the first capacitor **130** in the light emitting period, so that the light emitting pixel **100** represents a gradation.

FIG. **6** is a timing diagram showing an example of a frame used to drive the light emitting pixel of FIG. **5**. Referring to FIG. **6**, a single frame can be formed of a plurality of sub-frames. For the convenience of explanation, FIG. **6** illustrates a frame including four sub-frames SF1, SF2, SF3, and SF4 to represent a total of sixteen gray values. The four sub-frames SF1, SF2, SF3, and SF4 respectively include address periods A-4, A-3, A-2, and A-1 and light emitting periods E, D, C, and B.

FIG. **7** is a timing diagram showing an example of the address period as shown in FIG. **6**. Referring to FIGS. **5**, **6**, and **7**, during each of the address periods A-4, A-3, A-2, and A-1, the scan driver **22** in response to the second timing control signal Tc2 sequentially selects the scan lines and outputs corresponding scan signals SCAN<1>, SCAN<2>, . . . , SCAN<M>, and SCAN<N> having a low level to the sequentially selected scan line. In this exemplary embodiment, M and N are natural numbers and N>M.

Referring back to FIG. **5**, when the scan signal SCAN input through the selected scan line **121** has a low level, the first switch **123** (SW1) embodied by a PMOS transistor is turned on. Thus, the data signal DATA input through the data line **122** is stored in or written to the second capacitor **124**. The second node N2 has a particular electric potential according to the level of the data signal DATA stored in the second capacitor **124**.

The second switch **125** (SW2) embodied by the PMOS transistor is turned on or off according to a particular electric potential of the second node N2. When the data signal DATA has a low level or data "0", the second switch **125** turned on in response to the data signal DATA having a low level supplies the second voltage Vemit to the second electrode **132** of the first capacitor **130**.

During each of the address periods A-4, A-3, A-2, and A-1, corresponding data is written to the light emitting pixels forming the AMOLED panel **27**, and each of the light emitting pixels emits light during each of the light emitting periods E, D, C, and B based on the data written during each of the address periods A-4, A-3, A-2, and A-1. That is, each of the light emitting pixels forming the AMOLED panel **27** represents a gray value in response to the second voltage Vemit that toggles a predetermined number of times during each of the light emitting periods E, D, C, and B.

FIG. **8** is a timing diagram showing an example of driving the light emitting pixel of FIG. **6** in a light emitting period. Referring to FIGS. **5** through **8**, during each of the address periods A-4, A-3, A-2, and A-1 of the sub-frames SF1, SF2, SF3, and SF4, each of the data signals is input to each of the light emitting pixels included in the AMOLED panel **27** in response to each of the scan signals SCAN<1>, SCAN<2>, . . . , SCAN<M>, and SCAN<N>. Then, each of the light emitting pixels emits light during each of the light emitting periods E, D, C, and B in response to a corresponding one of the data signals and the second voltage Vemit toggled in a predetermined number of times. That is, each of the light emitting pixels represents a gray value based on the number of toggling of the second voltage Vemit.

Referring to FIGS. 5 and 8, when the second switch 125 (SW2) is turned on in response to the voltage of the second node N2, the second voltage Vemit is supplied to the second electrode 132 of the first capacitor 130. When the second voltage Vemit of a low level is supplied to the second electrode 132 of the first capacitor 130, the electric charges by the first power is supplied to the first electrode 131 of the first capacitor 130 through the first OLED 110. Accordingly, the voltage Va of the first node N1 increases up to a voltage ($V_a = ELVDD - V_{th_EL1}$) corresponding to the difference between the voltage ELVDD of the first power line and the threshold voltage V_{th_EL1} of the first OLED 110. The voltage ($V_a = ELVDD - V_{th_EL1}$) must be lower than the threshold voltage V_{th_EL2} of the second OLED 140.

When the second voltage Vemit having a high level is supplied to the second electrode 132 of the first capacitor 130, the voltage Va of the first node N1 increases in proportion to the amount of change in the second voltage Vemit. Because the difference in voltage or electric potential between both terminals of the second OLED 140 is generated by the changed voltage Va, the first capacitor 130 supplies current to an anode of the second OLED 140. Thus, the second OLED 140 of the light emitting pixel 100 emits light, and the AMOLED panel 27 including the light emitting pixel 100 emits light.

As described above, because the sum of the amount of current flowing in the second OLED 140 varies according to the number of toggling of the second voltage Vemit, the light emitting pixel 100 represents a gray value according to the toggling number of the second voltage Vemit during the light emitting period.

As shown in FIG. 8, the second voltage Vemit toggles once (1T) during the light emitting period of the first sub-frame SF1, twice (2T) during the light emitting period of the second sub-frame SF2, four times (4T) during the light emitting period of the third sub-frame SF3, and eight times (8T) during the light emitting period of the fourth sub-frame SF4. The toggling number of each of the sub-frames SF1-SF4 during the light emitting period described with reference to FIG. 8 is just an example presented for the convenience of explanation. The toggling number of the second voltage Vemit of each of the sub-frames SF1-SF4 during the light emitting period can be any arbitrary number.

The light emitting pixel 100 according to an exemplary embodiment of the present embodiment can represent a gray value during a frame based on a value obtained by integrating the amount or intensity of light emitted during the light emitting period of each of the sub-frames SF1, SF2, SF3, and SF4 at the frame.

FIG. 9 is a voltage waveform diagram for explaining a method for driving the light emitting pixel of FIG. 5 in a light emitting period. FIG. 9 shows the change in the voltage Va of the first node N1 and the change in the electric charge of the first capacitor 130 during the light emitting period, for example, light emitting period B, of FIG. 6.

As shown in FIG. 9, the amount of an electric charge Q1 charged in the first capacitor 130 through the first OLED 110 and the amount of an electric charge Q2 discharged from the first capacitor 130 through the second OLED 140 are the same. That is, $Q1 = Q2$.

In the present exemplary embodiment, the light emitting pixel 100 emits light using the electric charge Q1 charged in the first capacitor 130 by toggling the second voltage Vemit or the electric charge Q2 discharged from the second capacitor 130. Also, the light emitting pixel 100 according to the present exemplary embodiment represents a gray value with the sum of the amount of the current flowing in the second

OLED 140 according to the toggling number of the second voltage Vemit. Thus, there is an effect of constantly supplying the electric charge Q2 regardless of an external voltage change.

Referring to FIGS. 5 and 9, when the switching circuit 120 is turned on in response to the scan signal SCAN and the data signal DATA, the switching circuit 120 supplies the second voltage Vemit to the second electrode 132 of the first capacitor 130. As described above, the first capacitor 130 charges or discharges based on the level of the second voltage Vemit that toggles. When the second voltage Vemit having the low level is supplied to the second electrode 132 of the first capacitor 130, the electric charge Q1 input through the first OLED 110 is charged in the first capacitor 130.

When the electric charge Q1 is supplied to the first capacitor 130, the voltage Va of the first node N1 increases up to a first level $ELVDD - V_{th_EL1}$. Because the first level $ELVDD - V_{th_EL1}$ is lower than the threshold voltage V_{th_EL2} of the second OLED 140, current does not flow in the second OLED 140. Then, when the level of the second voltage Vemit is toggled or transited to a high level, the voltage Va of the first node N1 increases up to a second level $ELVDD - V_{th_EL1} + V_{emit}$.

Thus, because the first capacitor 130 supplies the electric charge Q2 to the second OLED 140 by the voltage Va of the first node N1 having the second level $ELVDD - V_{th_EL1} + V_{emit}$, the second OLED 140 emits light in response to the current generated by the electric charge Q2.

After the electric charge Q1 charged in the first capacitor 130 is sufficiently discharged, the second voltage Vemit having the high level is toggled or transited to the low level. The voltage Va of the first node N1 decreases down to the threshold voltage V_{th_EL1} of the first OLED 110 or the threshold voltage V_{th_EL2} of the second OLED 140 just before the second voltage Vemit is toggled from the high level to the low level.

FIG. 10 illustrates the structure of a light emitting pixel 200 according to an exemplary embodiment of the present invention. Referring to FIG. 10, the light emitting pixel 200 includes a switching device 210 (SW3), the switching circuit 120, the first capacitor 130 including the first electrode 131 and the second electrode 132, and the second OLED 140. The structure of the light emitting pixel 200 of FIG. 10 is substantially the same as that of the light emitting pixel 100 of FIG. 5, except for the first OLED 110 used in the exemplary embodiment shown in FIG. 5 that is not used in FIG. 10.

The switching device 210 is connected between the first power line ELVDD and the first electrode 131 of the first capacitor 130 and supplies the voltage ELVDD of the first power line to the first node N1 in response to the second voltage Vemit. The switching device 210 can be embodied by a PMOS transistor or an NMOS transistor.

FIG. 11 is a voltage waveform diagram for explaining a method for driving the light emitting pixel of FIG. 10 in a light emitting period. Referring to FIGS. 10 and 11, in the operation of the light emitting pixel 200 during the light emitting period, when the switching device 210 embodied by the PMOS transistor is turned on in response to the second voltage

Vemit having the low level, the first power line supplies the electric charge Q1 to the first capacitor 130. Thus, the first voltage Va of the first node N1 increases up to the first level ELVDD.

Then, the second voltage Vemit is toggled or transited from the low level to the high level. Thus, the switching device 210

embodied by the PMOS transistor is turned off and the first voltage V_a of the first node N1 increases up to the second level $ELVDD+V_{emit}$.

Thus, because the second level $ELVDD+V_{emit}$ is higher than the threshold voltage V_{th_EL2} of the second OLED 140, the first capacitor 130 supplies the electric charge Q2 to the second OLED 140, and the second OLED 140 emits light in response to the current generated by the electric charge Q2. Because the second voltage V_{emit} is transited between the low level and the high level a predetermined number of times during the light emitting period, the second OLED 140 can represent a gray value.

The time during which the electric charge Q1 charged in the first capacitor 130 discharges or the second voltage V_{emit} maintains the high level must be a sufficient time so that the charged electric charge Q1 can be completely discharged. In this case, $Q1=Q2$. As described above, the light emitting pixel 200 can represent a gray value in response to the second voltage V_{emit} toggled a predetermined number of times for each light emitting period of the sub-frame.

The principle of driving the light emitting pixel 200 according to the present exemplary embodiment described with reference to FIGS. 10 and 11 is the same as that according to the above-described exemplary embodiment with reference to FIGS. 5 through 8.

FIG. 12 illustrates the structure of a light emitting pixel 300 according to an exemplary embodiment of the present invention. The structure of the light emitting pixel 300 of FIG. 12 is the same as that of the light emitting pixel 100 of FIG. 5 except for the provision of a second OLED 340 (EL2). The second OLED 340 (EL2) is connected between the first node N1 and the first power line supplying the voltage $ELVDD$. That is, an anode of the second OLED 340 is connected to the first node N1 and a cathode of the second OLED 340 is connected to the first power line $ELVDD$. Because the light emitting pixel 300 can use the anode of the first OLED 110 and the cathode of the second OLED 340 as the same electrode, the wiring of the light emitting pixel 300 is simplified, so that a numerical aperture can be increased. The light emitting pixel 300 can represent a gray value in response to the second voltage V_{emit} that toggles a predetermined number of times during the light emitting period of each of the sub-frames of a frame.

FIG. 13 is a voltage waveform diagram for explaining an exemplary embodiment of a method for driving the light emitting pixel of FIG. 12 during a light emitting period. FIG. 13 shows the change in the level of the voltage V_a of the first node N1 and the movement of the electric charge when the voltage $ELVDD$ of the first power line has a constant level and the second voltage V_{emit} is toggled between the low level and the high level a predetermined number of times.

Referring to FIGS. 12 and 13, when the switching circuit 120 is turned on in response to the scan data SCAN and the data signal DATA, the switching circuit 120 supplies the second voltage V_{emit} to the second electrode 132 of the first capacitor 130.

When the second voltage V_{emit} having the low level is supplied to the second electrode 132 of the first capacitor 130, the electric charge Q1 supplied through the first OLED 310 is charged in the first capacitor 130. Thus, the voltage V_a of the first node N1 increases up to the first level $ELVDD-V_{th_EL1}$. Because the first level $ELVDD-V_{th_EL1}$ is lower than the threshold voltage V_{th_EL2} of the second OLED 340, current does not flow in the second OLED 340.

When the second voltage V_{emit} is toggled or transited from the low level to the high level, the voltage V_a of the first node N1 increases up to the second level $ELVDD-V_{th_EL1}+V_{emit}$.

mit. Thus, because the second level $ELVDD-V_{th_EL1}+V_{emit}$ increases higher than the threshold voltage of the second OLED 340, a difference in the electric potential between both terminals of the second OLED 340 is generated.

Thus, because the first capacitor 130 discharges the charged electric charge Q1 through the second OLED 340, the second OLED 340 emits light in response to the current generated based on the electric charge Q2 that is discharged.

FIG. 14 is a voltage waveform diagram for explaining an exemplary embodiment of the method for driving the light emitting pixel of FIG. 12 during a light emitting period. FIG. 14 shows the change in the level of the voltage V_a of the first node N1 and the movement of the electric charge when the second voltage V_{emit} has a constant low level, and the voltage $ELVDD$ of the first power swings between a third level Neg_ELVDD and a fourth level Pos_ELVDD a predetermined number of times. In this exemplary embodiment, the fourth level Pos_ELVDD is higher than the third level Neg_ELVDD .

As shown in FIG. 14, when the voltage $ELVDD$ of the first power line has the fourth level Pos_ELVDD , the first power line supplies the electric charge Q1 to the first capacitor 130 through the first OLED 110 until the voltage V_a of the first node N1 increases to a first level $Pos_ELVDD-V_{th_EL1}$.

Because the threshold voltage V_{th_EL1} of the first OLED 110 and the threshold voltage V_{th_EL2} of the second OLED 340 are the same and the voltage $ELVDD$ of the first power line to which the cathode of the second OLED 340 is connected is higher than the first level $Pos_ELVDD-V_{th_EL1}$, the second OLED 340 (EL2) does not emit light.

Then, when the voltage $ELVDD$ of the first power line is transited to the third level Neg_ELVDD , the voltage $ELVDD$ of the first power line to which the cathode of the second OLED 340 is connected is lower than the voltage V_a of the first node N1. As a result, a difference in the voltage between the anode and cathode of the second OLED 340 is generated so that the electric charge Q1 charged in the first capacitor 130 is discharged through the second OLED 340. Thus, the second OLED 340 emits light based on the electric charge Q2 discharged from the first capacitor 130. In this exemplary embodiment, the time for maintaining the third level Neg_ELVDD must be a long enough time for sufficiently discharging the electric charge Q1 charged in the first capacitor 130 and in this example $Q1=Q2$.

Because the voltage $ELVDD$ of the first power line is toggled or swings a predetermined number of times during the light emitting period of each of the sub-frames of a frame, the amount of current supplied to the second OLED 340 of the light emitting pixel 300 varies according to the toggling number of the voltage $ELVDD$ of the first power line. Thus, the light emitting pixel 300 can represent a gray value by integrating the amount of light emitted a predetermined number of times for each light emitting period. The first capacitor 130 is advantageous in always supplying a constant amount of electric charge to the second OLED 340 regardless of an external change.

FIG. 15 illustrates the structure of a light emitting pixel according to an exemplary embodiment of the present invention. The structure of the light emitting pixel 400 of FIG. 15 is substantially the same as that of the light emitting pixel 300 of FIG. 12 except for the provision of a switching device 410 in FIG. 15.

The switching device 410 (SW3) is connected between the first power line and the first electrode 131 of the first capacitor 130 and turns the first power $ELVDD$ and the first electrode

131 on/off in response to the second voltage V_{emit} . The switching device 410 can be embodied by a PMOS transistor or an NMOS transistor.

FIG. 16 is a voltage waveform diagram for explaining an exemplary embodiment of a method for driving the light emitting pixel of FIG. 15 during a light emitting period. FIG. 16 shows the change in the level of the voltage V_a of the first node N1 and the movement of the electric charge when the first voltage ELVDD has a constant level and the second voltage V_{emit} swings between the low level and the high level a predetermined number of times.

Referring to FIGS. 15 and 16, when the switching circuit 120 is turned on in response to the scan signal SCAN and the data signal DATA, the switching circuit 120 supplies the second voltage V_{emit} to the first electrode 132 of the first capacitor 130.

When the second voltage V_{emit} having the low level is supplied to the second electrode 132 of the first capacitor 130, the switching device 410, which may be embodied by the PMOS transistor (not shown), supplies the electric charge Q1 generated by the first power line to the first node N1. Thus, the voltage V_a of the first node n1 increases up to the voltage ELVDD of the first power line. Because the voltage of the anode of the second OLED 340 is the same as that of the cathode thereof, current does not flow in the second OLED 340. Thus, the second OLED 340 does not emit light.

When the second voltage V_{emit} is transitioned to the high level, the voltage V_a of the first node N1 increases up to the second level $ELVDD + V_{emit}$. As a result, a difference in the voltage between the anode and cathode of the second OLED 340 is generated. Thus, the electric charge Q1 charged in the first capacitor 130 is discharged toward the first power line through the second OLED 340 and in this example $Q1 = Q2$.

FIG. 17 is a voltage waveform diagram for explaining an exemplary embodiment of the method for driving the light emitting pixel of FIG. 15 during a light emitting period. FIG. 17 shows the change in the level of the voltage V_a of the first node N1 and the movement of the electric charge when the second voltage V_{emit} has a constant low level and the voltage ELVDD of the first power line swings between the third level Neg_ELVD and the fourth level Pos_ELVD a predetermined number of times. In this exemplary embodiment, the fourth level Pos_ELVD is higher than the third level Neg_ELVD.

As shown in FIG. 17, when the voltage ELVDD of the first power line has the fourth level Pos_ELVD, the switching device 410 (SW3) in response to the second voltage V_{emit} having the low level supplies the voltage ELVDD of the first power line having the fourth level Pos_ELVD to the first node N1. Thus, because the electric charge Q1 generated by the first power line is charged in the first capacitor 130, the first node N1 increases up to the fourth level Pos_ELVD.

Because the voltage Pos_ELVD of the anode and the voltage Pos_ELVD of the cathode of the second OLED 340 are the same, however, current does not flow in the second OLED 340. When the voltage ELVDD of the first power line is transitioned to the third level Neg_ELVD that is lower than the fourth level Pos_ELVD, because the voltage $ELVDD = Pos_ELVD$ of the cathode of the second OLED 340 is lower than the voltage $V_a = Pos_ELVD$ of the first node N1, there is a difference in the voltage between the anode and cathode of the second OLED 340. Thus, the electric charge Q1 charged in the first capacitor 130 is discharged through the second OLED 340. The second OLED 340 emits light in response to the current generated by the electric charge Q2 discharged from the first capacitor 130.

If the voltage ELVDD is toggled between the third level Neg_ELVD and the fourth level Pos_ELVD a plurality of times during the light emitting period of a sub-frame, because the amount of current flowing in the second OLED 340 varies according to the number of toggling or the number of light emission, the second OLED 340 can represent a gray value according to the integration value of the amount of light that is emitted.

Each of the light emitting pixels 100, 200, 300, and 400 according to the above-described exemplary embodiments of the present invention can represent a gray value in response to the voltage of the first power line or the voltage of the second power line that toggles a different number of times for each sub-frame. Although the OLED is explained as an example of a light emitting device in the present specification, because the OLED is only one example of an electric-to-optical conversion, the technical concept of the exemplary embodiments of the present invention can be adopted by any light emitting device including the electric-to-optical conversion.

As described above, because the light emitting pixel according to exemplary embodiments including the capacitor used as a current source and an OLED can always supply a constant current to the OLED regardless of the degradation of the characteristic of the light emitting pixel an effect of obtaining a constant brightness can be obtained after time passes.

Also, because the light emitting pixel can always supply a constant current to the OLED regardless of the degradation of the characteristic of the light emitting pixel, stress applied to the OLED can be reduced. Thus, the life of the light emitting pixel is improved.

Furthermore, because the driver to drive the light emitting pixel according to exemplary embodiments of the present invention can supply a voltage that toggles a predetermined number of times during the light emitting period to the light emitting pixel, the brightness of the light emitting pixel can be stabilized.

While this invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention, as defined by the appended claims.

What is claimed is:

1. A light emitting pixel comprising:

a capacitor including a first electrode and a second electrode;

a organic light emitting diode (OLED) including an anode connected to the first electrode and a cathode connected to a power supply; and

a switching circuit configured to supply a second voltage to the second electrode by being switched based upon a scan signal input through a scan line and a data signal input through a data line,

wherein the capacitor supplies to the OLED a current generated by an electric charge corresponding to a difference between a first voltage supplied to the first electrode of the capacitor and the second voltage supplied to the second electrode of the capacitor.

2. The light emitting pixel of claim 1, further comprising a second OLED configured to supply the first voltage to the first electrode of the capacitor, and wherein the power supply is a ground.

15

3. The light emitting pixel of claim 1,
further comprising a switching device configured to supply
the first voltage to the first electrode of the capacitor in
response to the second voltage, and
wherein the power supply is a ground.
4. The light emitting pixel of claim 1,
further comprising a second OLED configured to supply
the first voltage to the first electrode of the capacitor, and
wherein the power supply supplies the first voltage.
5. The light emitting pixel of claim 1,
further comprising a switching device configured to supply
the first voltage to the first electrode of the capacitor in
response to the second voltage, and
wherein the power supply supplies the first voltage.
6. A driver to drive a light emitting pixel, the driver comprising:
a capacitor including a first electrode and a second electrode;
an organic light emitting diode (OLED) including an anode
connected to the first electrode and a cathode connected
to a power supply;
a switching circuit configured to supply a second voltage to
the second electrode by being switched based upon a
scan signal input through a scan line and a data signal
input through a data line;
a control signal generator configured to generate a control
signal; and
a voltage generator configured to generate a first voltage or
the second voltage that toggles a predetermined number
of times during a light emitting period in response to the
control signal;
wherein the capacitor supplies to the OLED a current generated by an electric charge corresponding to a difference between the first voltage supplied to the first electrode of the capacitor and the second voltage supplied to the second electrode of the capacitor.
7. The driver of claim 6,
further comprising a second OLED configured to supply
the first voltage to the first electrode of the capacitor, and
wherein the power supply is a ground.
8. The driver of claim 6,
further comprising a switching device configured to supply
the first voltage to the first electrode of the capacitor in
response to the second voltage, and
wherein the power supply is a ground.

16

9. The driver of claim 6,
further comprising a second OLED configured to supply
the first voltage to the first electrode of the capacitor, and
wherein the power supply supplies the first voltage.
10. The driver of claim 6,
further comprising a switching device configured to supply
the first voltage to the first electrode of the capacitor in
response to the second voltage, and
wherein the power supply supplies the first voltage.
11. A display apparatus comprising:
a panel including a plurality of data lines, a plurality of scan
lines, and a plurality of light emitting pixels;
a driver including a voltage generator configured to generate a second voltage and to supply data signals through the data lines and scan signals through the scan lines,
wherein each of the light emitting pixels comprises:
a capacitor including a first electrode and a second electrode;
an organic light emitting diode (OLED) including an anode connected to the first electrode and a cathode connected to a power supply; and
a switching circuit configured to supply the second voltage to the second electrode by being switched based upon a scan signal input through a corresponding scan line and a data signal input through a corresponding data line,
wherein the capacitor supplies to the OLED a current generated by an electric charge corresponding to a difference between a first voltage supplied to the first electrode of the capacitor and the second voltage supplied to the second electrode of the capacitor.
12. The display apparatus of claim 11,
further comprising a second OLED configured to supply
the first voltage to the first electrode of the capacitor, and
wherein the power supply is a ground.
13. The display apparatus of claim 11,
further comprising a switching device configured to supply
the first voltage to the first electrode of the capacitor in
response to the second voltage, and
wherein the power supply is a ground.
14. The display apparatus of claim 11,
further comprising a second OLED to supply the first voltage to the first electrode of the capacitor, and
wherein the power supply supplies the first voltage.
15. The display apparatus of claim 11,
further comprising a switching device configured to supply
the first voltage to the first electrode of the capacitor in
response to the second voltage, and
wherein the power supply supplies the first voltage.

* * * * *

专利名称(译)	发光像素和用于驱动它的装置		
公开(公告)号	US8284129	公开(公告)日	2012-10-09
申请号	US13/174008	申请日	2011-06-30
[标]申请(专利权)人(译)	SHIN SEUNG YUN BAEK英学		
申请(专利权)人(译)	SHIN YUN-SEUNG BAEK英学		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	SHIN YUN SEUNG BAEK JONG HAK		
发明人	SHIN, YUN SEUNG BAEK, JONG HAK		
IPC分类号	G09G3/30 G09G3/10		
CPC分类号	G09G3/2022 G09G3/3258 G09G2300/0852 G09G2300/0866 G09G2310/0256 G09G2320/043 G09G2330/021		
优先权	1020070029453 2007-03-26 KR		
其他公开文献	US20110261044A1		
外部链接	Espacenet USPTO		

摘要(译)

发光像素包括第一有机发光二极管 (OLED) 和电容器, 该电容器提供给由电荷产生的第一OLED电流, 该电荷对应于提供给电容器的第一电极的第一电压和提供给第一电极的第二电压之间的差。电容器的第二电极。发光像素还包括第二OLED, 以将第一电压提供给第一电极。发光像素还包括电压供应装置, 用于响应于第二电压将第一电压提供给第一电极。

