


(10) **Patent No.:** US 10,411,074 B2
(45) **Date of Patent:** Sep. 10, 2019

- 12 Claims, 11 Drawing Sheets**

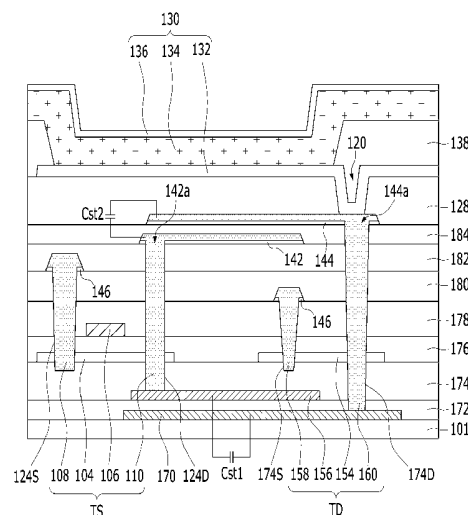

(52) **U.S. Cl.**

CPC *H01L 27/3265* (2013.01); *H01L 27/3276*
(2013.01); *H01L 51/5203* (2013.01); *G09G*
2310/0264 (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2016/0079335 A1* 3/2016 Sato G09G 3/3233
257/40
2016/0300954 A1* 10/2016 Sasaki H01L 21/32105

* cited by examiner

FIG. 1

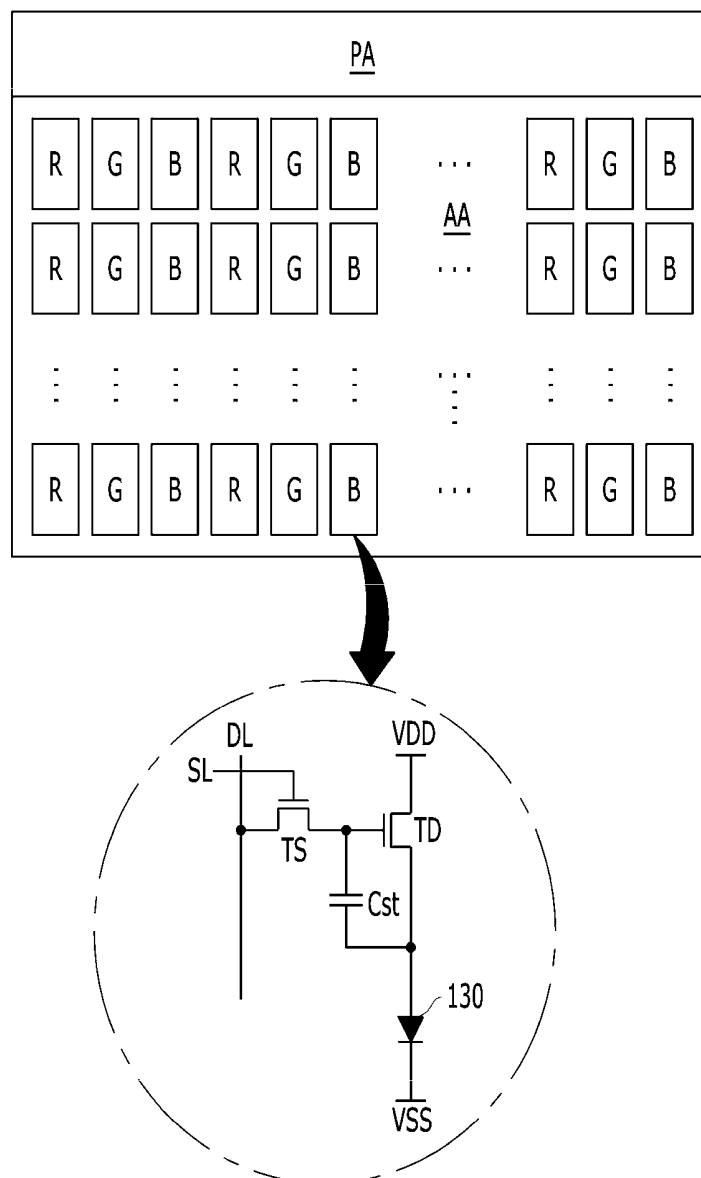


FIG. 2

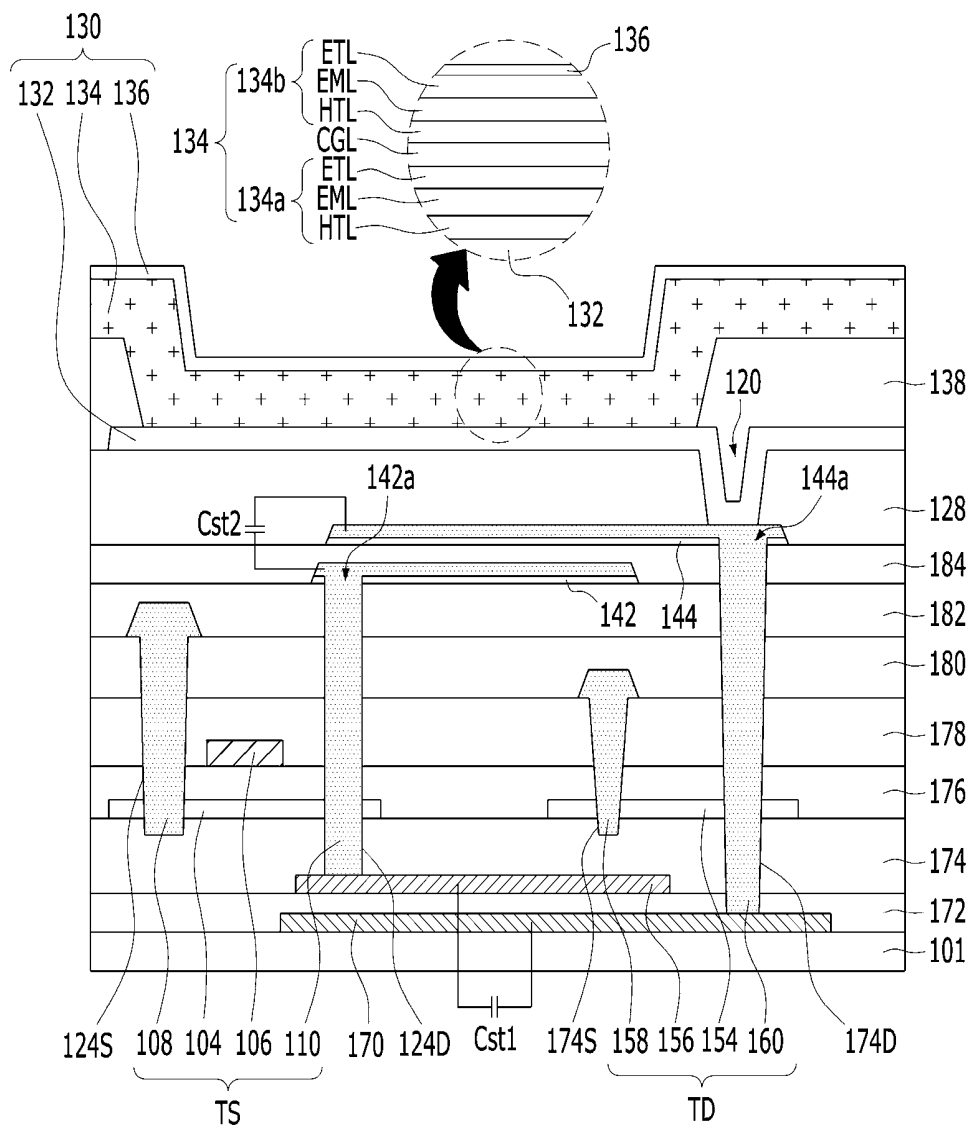


FIG.3

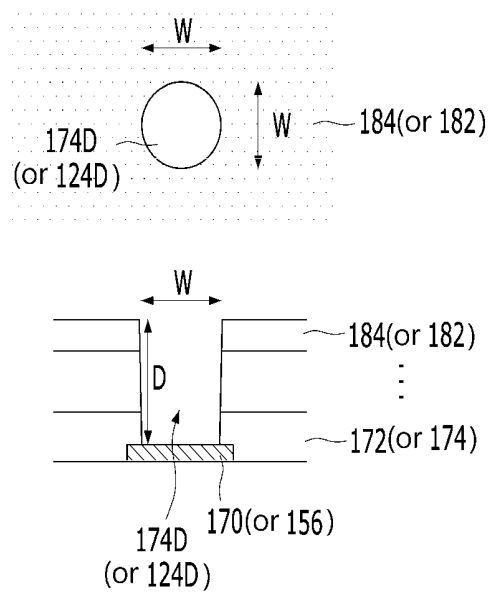


FIG.4

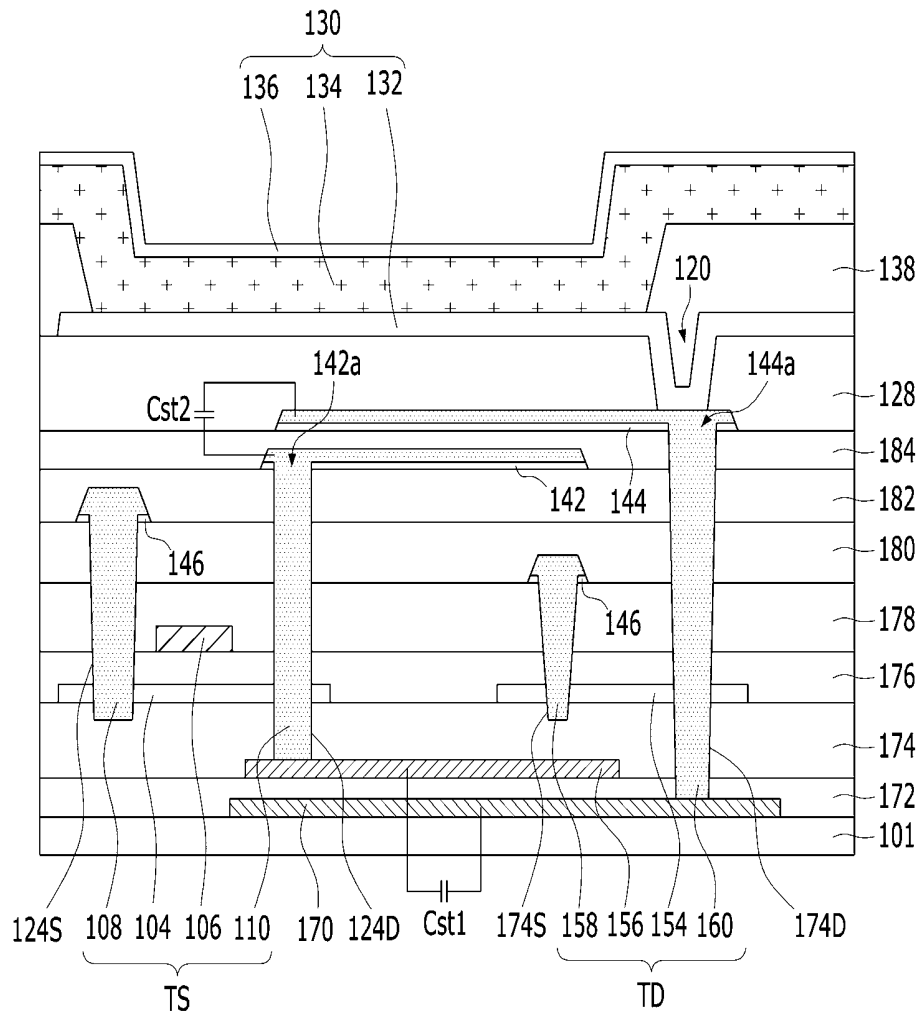


FIG.5A

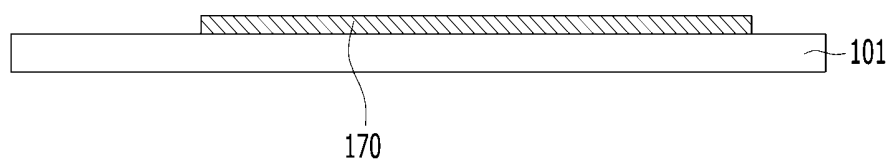


FIG.5B

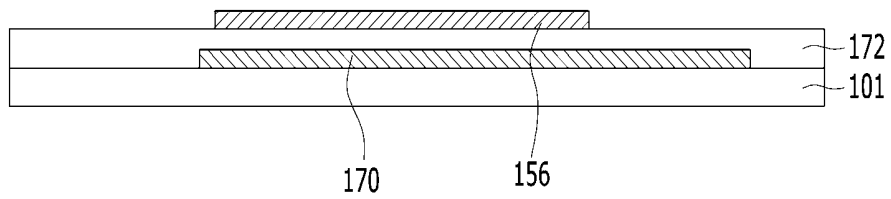


FIG.5C

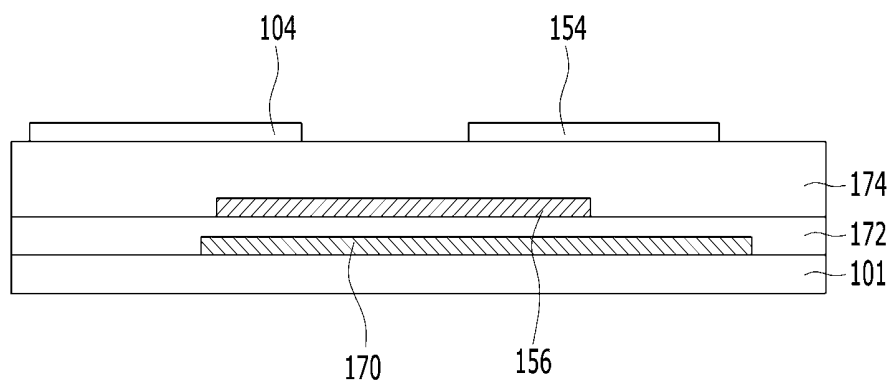


FIG.5D

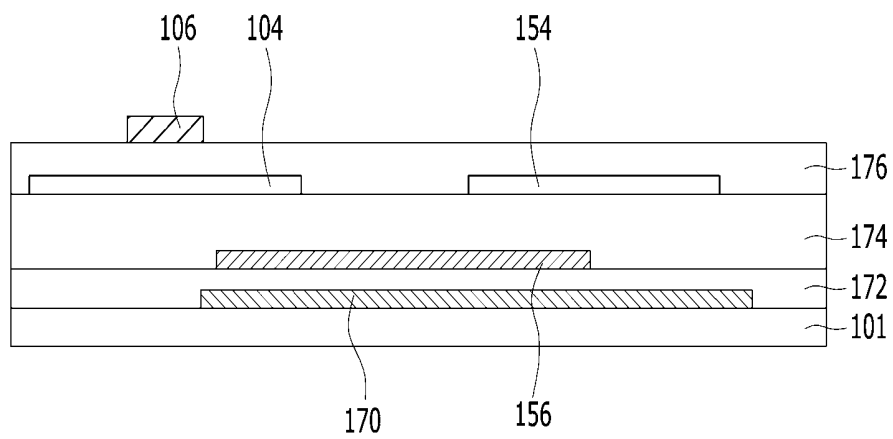


FIG.5E

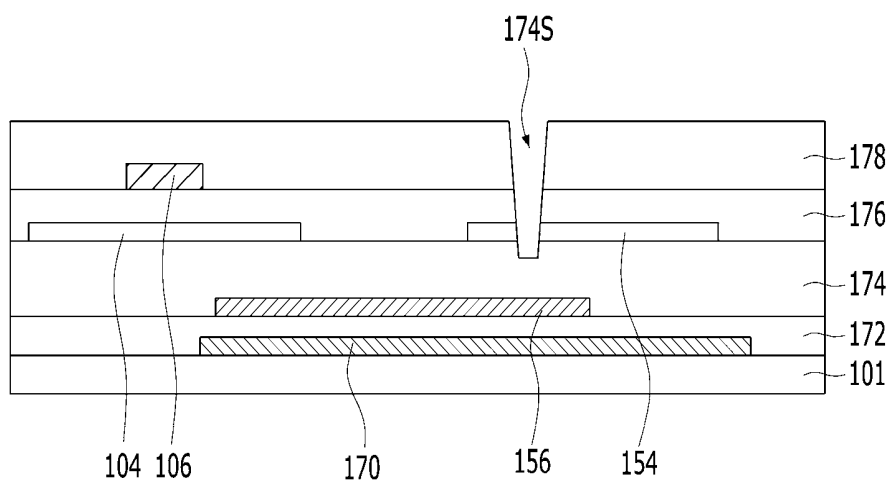


FIG.5F

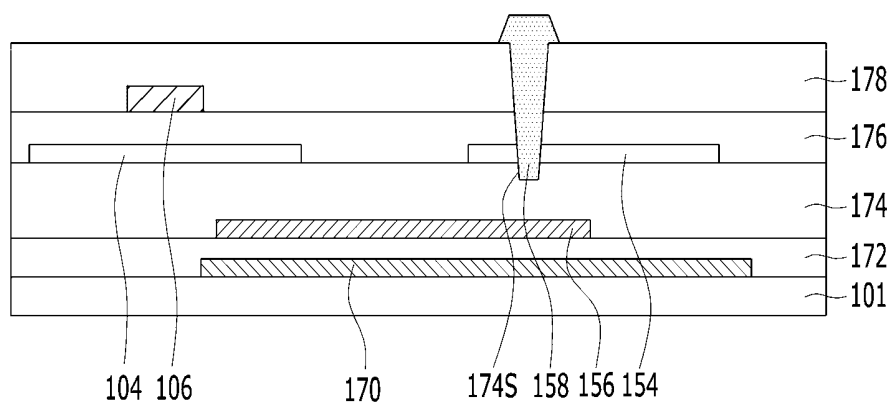


FIG.5G

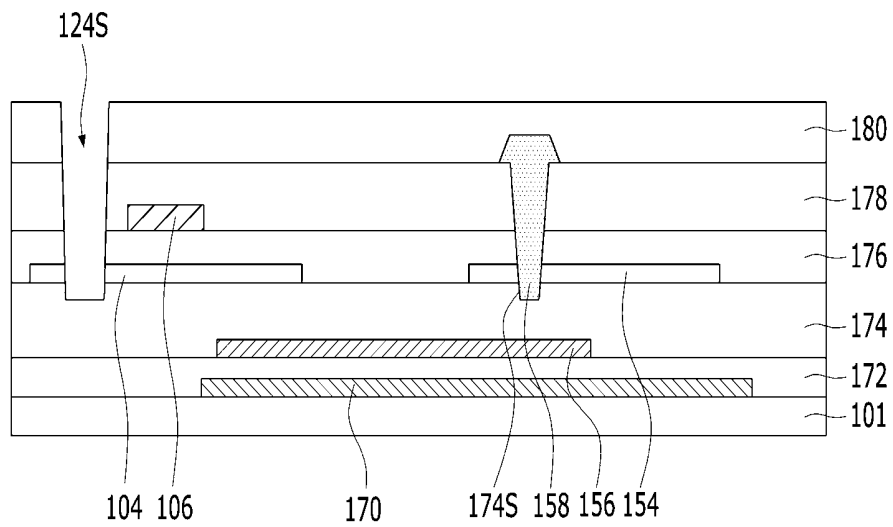


FIG.5H

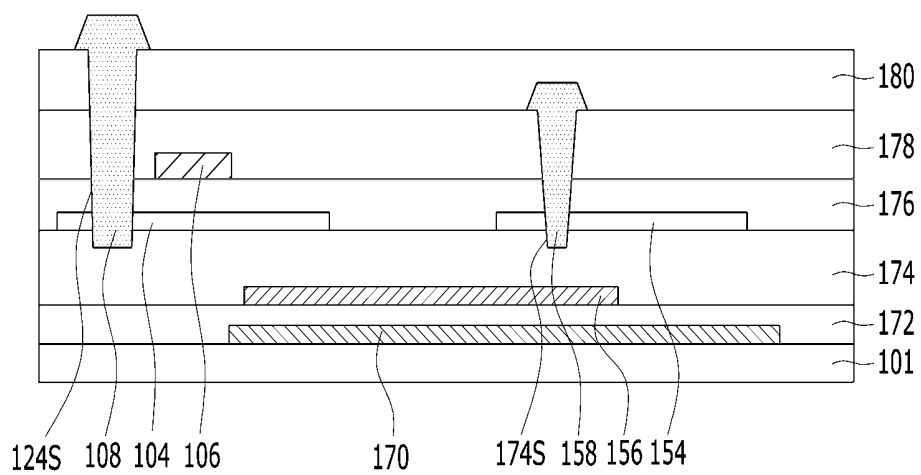


FIG.5M


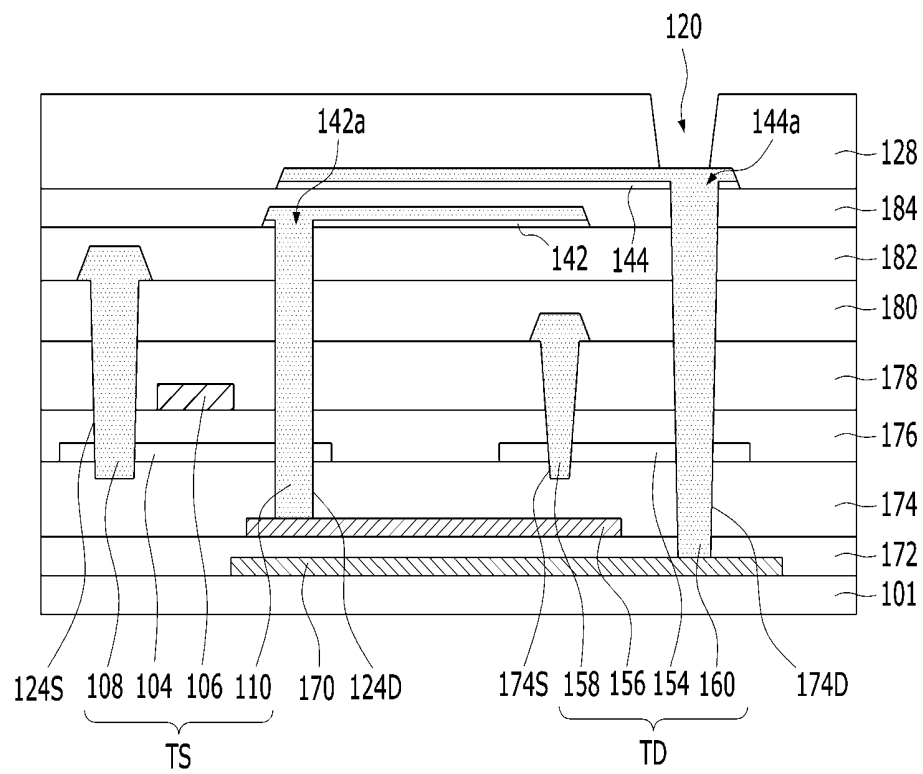


FIG. 5N

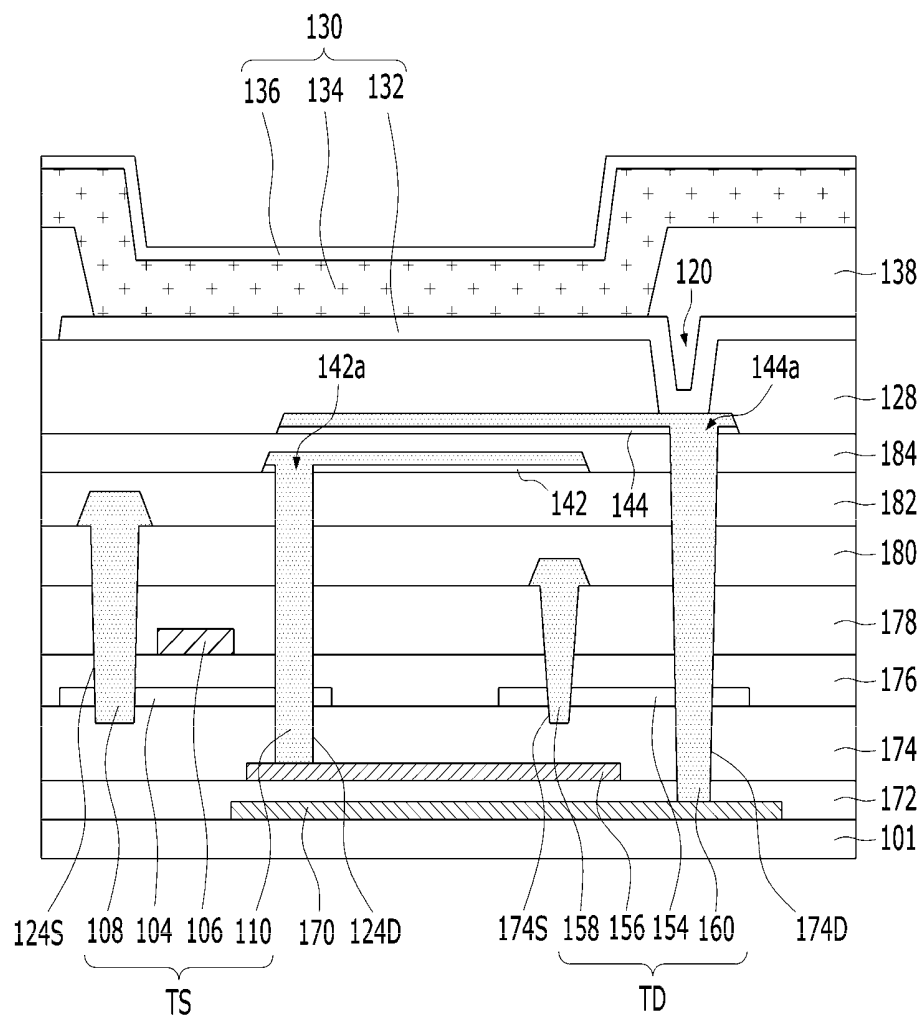

**DISPLAY DEVICE SUBSTRATE, ORGANIC
LIGHT-EMITTING DISPLAY DEVICE
INCLUDING THE SAME, AND METHOD OF
MANUFACTURING THE SAME**

This application claims the benefit of Korean Patent Application No. 10-2016-0162271, filed on Nov. 30, 2016, which is hereby incorporated by reference as if fully set forth herein.

BACKGROUND

Technical Field

The present disclosure relates to a display device substrate, an organic light-emitting display device including the same, and a method of manufacturing the same, and more particularly, to a display device substrate that realizes high resolution, an organic light-emitting display device including the same, and a method of manufacturing the same.

Discussion of the Related Art

An image display device, which realizes various pieces of information on a screen, is a core technology of the information and communication age, and is being developed in the direction of becoming thinner, lighter, more portable, and having higher performance. Representative display devices include, for example, a liquid crystal display (LCD) device and an organic light-emitting diode (OLED) display device.

As the resolution of a display device increases, the number of thin layers that are vertically stacked one above another increases due to the reduced design margin resulting from the reduced area of each sub-pixel. In this case, in order to interconnect an upper conductive layer and a lower conductive layer, which are vertically stacked one above another, a narrow contact hole may be required to penetrate a thick insulation layer disposed between the upper conductive layer and the lower conductive layer. Because the loss of a photoresist pattern occurs when such a narrow contact hole is formed by etching the thick insulation layer, the thickness of the photoresist pattern may need to be increased in proportion to the thickness of the insulation layer. However, the greater the thickness of the photoresist pattern, the lower the resolution of an exposure process. Therefore, because a contact hole larger than a contact hole size that is designed for an exposure mask is formed in a substrate, formation of a narrow contact hole may be difficult, and thus the realization of high resolution may be difficult.

SUMMARY

Accordingly, the present disclosure is directed to a display device substrate, an organic light-emitting display device including the same, and a method of manufacturing the same that substantially obviate one or more problems due to limitations and disadvantages of the related art.

An object of the present disclosure is to provide a display device substrate, which may enable the realization of high resolution, an organic light-emitting display device including the same, and a method of manufacturing the same.

Additional advantages, objects, and features of the disclosure will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the disclosure. The objectives and other advantages of the disclosure may be

realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve these objects and other advantages and in accordance with the purpose of the disclosure, as embodied and broadly described herein, a display device substrate, an organic light-emitting display device including the same, and a method of manufacturing the same according to the present disclosure include: a substrate; a switching thin-film transistor on the substrate; a driving thin-film transistor connected to the switching thin-film transistor; and a light-emitting element connected to the driving thin-film transistor, wherein the switching thin-film transistor and the driving thin-film transistor together include: a lower conductive layer on the substrate; an insulation layer having therein a contact hole configured to expose the lower conductive layer; an upper conductive layer connected to the lower conductive layer through the contact hole; and a mask conductive layer between an upper surface of the insulation layer and the upper conductive layer to overlap the upper conductive layer.

In another aspect, the display device substrate includes a base substrate; a lower conductive layer on the base substrate; an insulation layer having therein a contact hole configured to expose the lower conductive layer; an upper conductive layer connected to the lower conductive layer through the contact hole; and a mask conductive layer between an upper surface of the insulation layer and the upper conductive layer to overlap the upper conductive layer.

In another aspect, a method of manufacturing a display device substrate includes forming a lower conductive layer on a base substrate; forming an insulation layer, having therein a contact hole configured to expose the lower conductive layer, and a mask conductive layer; and forming an upper conductive layer connected to the lower conductive layer through the contact hole, wherein the mask conductive layer is disposed between an upper surface of the insulation layer and the upper conductive layer to overlap the upper conductive layer.

It is to be understood that both the foregoing general description and the following detailed description of the present disclosure are exemplary and explanatory and are intended to provide further explanation of the disclosure as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the disclosure and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the disclosure and together with the description serve to explain the principles of the disclosure. In the drawings:

FIG. 1 is a plan view illustrating an organic light-emitting display device according to an example embodiment of the present disclosure;

FIG. 2 is a cross-sectional view illustrating an example embodiment of the organic light-emitting display device illustrated in FIG. 1;

FIG. 3 is a plan view and a cross-sectional view illustrating an example embodiment of first and second drain contact holes illustrated in FIG. 2;

FIG. 4 is a cross-sectional view illustrating another example embodiment of the organic light-emitting display device illustrated in FIG. 1; and

FIGS. 5A to 5N are cross-sectional views for explaining an example method of manufacturing the organic light-emitting display device illustrated in FIG. 2.

DETAILED DESCRIPTION

Hereinafter, example embodiments of the present disclosure will be described with reference to the accompanying drawings.

FIG. 1 is a plan view illustrating an example embodiment of the organic light-emitting display device according to the present disclosure, and FIG. 2 is a cross-sectional view illustrating an example embodiment of the organic light-emitting display device illustrated in FIG. 1.

The organic light-emitting display device illustrated in FIGS. 1 and 2 includes an active area AA and a pad area PA.

In the pad area PA, a plurality of pads is formed to supply driving signals to each of a scan line SL, a data line DL, a high-voltage VDD supply line, and a low-voltage VSS supply line 160, which are arranged in the active area AA.

The active area AA displays an image via a unit pixel. The unit pixel includes red, green and blue sub-pixels R, G and B, or includes red, green, blue and white sub-pixels R, G, B and W. Each sub-pixel includes the light-emitting element 130 (e.g., an organic light-emitting diode) and a pixel drive circuit that independently drives the light-emitting element 130.

The pixel drive circuit includes a switching thin-film transistor TS, a driving thin-film transistor TD, and a storage capacitor Cst.

The switching thin-film transistor TS is turned on when a scan pulse signal is supplied to the scan line SL, thereby supplying a data signal supplied to the data line DL to the storage capacitor Cst and a second gate electrode 156 of the driving thin-film transistor TD.

To this end, the switching thin-film transistor TS, as illustrated in FIG. 2, includes a first gate electrode 106, a first source electrode 108, a first drain electrode 110, and a first active layer 104.

The first gate electrode 106 is formed on a gate insulation pattern 176 and is connected to the scan line SL. The first gate electrode 106 overlaps the first active layer 104 with the gate insulation pattern 176 interposed therebetween. Because the first gate electrode 106 is disposed above the first active layer 104, the switching thin-film transistor TS has a top-gate structure.

The first source electrode 108 is disposed on a second interlayer insulation layer 180 and is connected to the data line DL. The first source electrode 108 is connected to the first active layer 104 through a first source contact hole 124S, which penetrates the first active layer 104, the gate insulation layer 176, and first and second interlayer insulation layers 178 and 180. That is, the first source electrode 108 is connected to the side surface of the first active layer 104, which is exposed by the first source contact hole 124S.

The first drain electrode 110 is disposed on a first mask conductive layer 142 to face the first source electrode 108 and is connected to the second gate electrode 156 of the driving thin-film transistor TD. The first drain electrode 110 is connected to the first active layer 104 and the second gate electrode 156 of the driving thin-film transistor TD through a first drain contact hole 124D, which penetrates a second buffer layer 174, the first active layer 104, the gate insulation layer 176, the first and second interlayer insulation layers 178 and 180, and a first protective layer 182. That is, the first drain electrode 110 is connected to the side surface of the first active layer 104, which is exposed through the first

drain contact hole 124D, and is connected to the upper surface of the second gate electrode 156, which is exposed through the first drain contact hole 124D.

The first active layer 104 forms a channel portion between the first source electrode 108 and the first drain electrode 110. The first active layer 104 is formed on the second buffer layer 174 to be disposed under the first gate electrode 106. The first active layer 104 is formed of at least one of an amorphous semiconductor material, a polycrystalline semiconductor material, and an oxide semiconductor material.

The driving thin-film transistor TD adjusts the amount of light emitted from the light-emitting element 130 by controlling current I supplied from the high-voltage (VDD) supply line to the light-emitting element 130 in response to a data signal supplied to the second gate electrode 156 of the driving thin-film transistor TD. In addition, using the voltage charged in the storage capacitor Cst, even if the switching thin-film transistor TS is turned off, the driving thin-film transistor TD supplies a constant amount of current I until a data signal of a next frame is supplied, thereby maintaining continuous emission of light from the light-emitting element 130.

To this end, the driving thin-film transistor TD, as illustrated in FIG. 2, includes the second gate electrode 156, a second source electrode 158, a second drain electrode 160, and a second active layer 154.

The second gate electrode 156 is disposed on the first buffer layer 172 and is connected to the first drain electrode 110 of the switching thin-film transistor TS. The second gate electrode 156 overlaps the second active layer 154 with a second buffer layer 174 interposed therebetween. Because the second gate electrode 156 is disposed under the second active layer 154, the driving thin-film transistor TD has a bottom-gate structure.

The second source electrode 158 is disposed on the first interlayer insulation layer 178 and is connected to the high-voltage (VDD) supply line. The second source electrode 158 is connected to the second active layer 154 through a second source contact hole 174S, which penetrates the second active layer 154, the gate insulation layer 176, and the first interlayer insulation layer 178. That is, the second source electrode 158 is connected to the side surface of the second active layer 154, which is exposed through the second source contact hole 174S. Meanwhile, although a structure in which the second source electrode 158, as illustrated in FIG. 2, is disposed on the first interlayer insulation layer 178, unlike the first source electrode 108 by way of example, the second source electrode 158 may be formed on the second interlayer insulation layer 180, in the same manner as the first source electrode 108, using the same material as the first source electrode 108, in order to simplify the process. Alternatively, both the first source electrode 108 and the second source electrode 158 may be formed on the first interlayer insulation layer 178 using the same material.

The second drain electrode 160 is disposed on a second mask conductive layer 144 to face the second source electrode 158 and is connected to an anode electrode 132 of the light-emitting element 130 and a storage electrode 170.

The second drain electrode 160 is connected to the second active layer 154 and the storage electrode 170 through a second drain contact hole 174D, which penetrates the first and second buffer layers 172 and 174, the second active layer 154, the gate insulation layer 176, the first and second interlayer insulation layers 178 and 180, and the first and second protective layers 182 and 184. That is, the second drain electrode 160 is connected to the side surface of the

second active layer **154**, which is exposed through the second drain contact hole **174D**, and is connected to the upper surface of the storage electrode **170**, which is exposed through the second drain contact hole **174D**.

In addition, the second drain electrode **160** is exposed through a pixel contact hole **120**, which penetrates the planarization layer **128**, and is connected to the anode electrode **132**.

The second active layer **154** forms a channel portion between the second source electrode **158** and the second drain electrode **160**. The second active layer **154** is formed on the second buffer layer **174** to be disposed above the second gate electrode **156**. The second active layer **154** is formed of at least one of an amorphous semiconductor material, a polycrystalline semiconductor material, and an oxide semiconductor material, and is formed of a material, which is the same as or different from that of the first active layer **104**.

The storage capacitor Cst includes first and second storage capacitors Cst1 and Cst2, which are connected in parallel with each other. The first storage capacitor Cst1 is formed such that the storage electrode **170** and the second gate electrode **156** of the driving thin-film transistor TD overlap each other with the first buffer layer **172** interposed therebetween. The second storage capacitor Cst2 is formed such that the drain electrode **110** of the switching thin-film transistor TS and the second drain electrode **160** of the driving thin-film transistor TD overlap each other with the second protective layer **184** interposed therebetween.

Here, the first buffer layer **172** and the second protective layer **184** are formed of a material having a dielectric constant higher than that of any one of the second buffer layer **174**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first protective layer **182**. For example, the first buffer layer **172** and the second protective layer **184** are formed of SiNx, and at least one of the second buffer layer **174**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first protective layer **182** is formed of SiOx. Thus, the first and second storage capacitors Cst1 and Cst2 increase in capacity in proportion to a dielectric constant thereof.

Using the voltage charged in the first and second storage capacitors Cst1 and Cst2, even if the switching thin-film transistor TS is turned off, the driving thin-film transistor TD supplies a constant amount of current I until a data signal of a next frame is supplied, thereby maintaining continuous emission of light from the light-emitting element **130**.

The light-emitting element **130** includes the anode electrode **132** connected to the second drain electrode **160** of the driving transistor TD, at least one light-emitting stack **134** formed on the anode electrode **132**, and a cathode electrode **136** formed on the light-emitting stack **134**.

The anode electrode **132** is disposed on the planarization layer **128** and is exposed by a bank **138**. The anode electrode **132** is electrically connected to the second drain electrode **160** of the driving thin-film transistor TD, which is exposed through the pixel contact hole **120**. The anode electrode **132** is formed as a multilayered structure, which includes a transparent conductive layer and an opaque conductive layer having high reflection efficiency, or is formed as a single-layer structure including an opaque conductive layer having high reflection efficiency, when applied to a top-emission-type organic light-emitting display device. The transparent conductive layer is formed of a material having a relatively large work function value, such as indium-tin-oxide (ITO) or indium-zinc-oxide (IZO), and the opaque conductive layer is

formed as a single-layer or multi-layered structure including Al, Ag, Cu, Pb, Mo, Ti, or an alloy thereof. For example, the anode electrode **132** is formed such that a transparent conductive layer, an opaque conductive layer, and a transparent conductive layer are sequentially stacked one above another, or is formed such that a transparent conductive layer and an opaque conductive layer are sequentially stacked one above another. Because the anode electrode **132**, which includes the opaque conductive layer, overlaps the pixel drive circuit, an area in which the pixel drive circuit is disposed may also be used as a light-emitting area, which may increase an aperture ratio.

The light-emitting stack **134** is formed on the anode electrode **132** by stacking a hole transport layer HTL, an organic light-emitting layer EML, and an electron transport layer ETL in this sequence or in the inverse sequence. In addition, the light-emitting stack **134** may include first and second light-emitting stacks **134a** and **134b**, which face each other with a charge generation layer CGL interposed therebetween. In this case, the organic light-emitting layer EML of any one of the first and second light-emitting stacks **134a** and **134b** generates blue light and the organic light-emitting layer EML of the other one of the first and second light-emitting stacks **134a** and **134b** generates yellow-green light, whereby white light is generated by the first and second light-emitting stacks **134a** and **134b**. When the white light generated by the light-emitting stack **134** is introduced into a color filter (not illustrated), which is located above the light-emitting stack **134**, a color image may be realized. In addition, each light-emitting stack **134** may generate light of a color that corresponds to each sub-pixel to realize a color image without a separate color filter. That is, the light-emitting stack **134** of a red sub-pixel R may generate red light, the light-emitting stack **134** of a green sub-pixel G may generate green light, and the light-emitting stack **134** of a blue sub-pixel B may generate blue light.

The bank **138** is formed to expose the anode electrode **132** to provide a light-emitting area in each sub-pixel. The bank **138** may be formed of an opaque material (e.g., a black material) in order to prevent light interference between neighboring sub-pixels. In this case, the bank **138** includes a light-shielding material formed of at least one of a color pigment and organic carbon black.

The cathode electrode **136** is formed on the upper surface and the side surface of the light-emitting stack **134** and the bank **138** to face the anode electrode **132** with the light-emitting stack **134** interposed therebetween. The cathode electrode **136** is formed of a transparent conductive layer such as indium-tin-oxide (ITO) or indium-zinc-oxide (IZO) when applied to a top-emission-type organic light-emitting display device.

Meanwhile, in an example embodiment the present disclosure, the first mask conductive layer **142** is disposed between the first drain electrode **110** and the first protective layer **182** to overlap the first drain electrode **110**, and the second mask conductive layer **144** is disposed between the second drain electrode **160** and the second protective layer **184** to overlap the second drain electrode **160**.

The first mask conductive layer **142** has a first mask hole **142a**, which overlaps the first drain contact hole **124D**. The first mask hole **142a** has a width, which is similar to or the same as that of the drain contact hole **124D**. Opposite ends of the first mask conductive layer **142** correspond to opposite ends of the first drain electrode **110**. That is, opposite ends of the first mask conductive layer **142** and the first drain electrode **110** may coincide with each other, or opposite ends

of the first mask conductive layer **142** may be located inside or outside opposite ends of the first drain electrode **110**.

The second mask conductive layer **144** has a second mask hole **144a**, which overlaps the second drain contact hole **174D**. The second mask hole **144a** has a width, which is similar to or the same as that of the second drain contact hole **174D**. Opposite ends of the second mask conductive layer **144** correspond to opposite ends of the second drain electrode **160**. That is, opposite ends of the second mask conductive layer **144** and the second drain electrode **160** may coincide with each other, or opposite ends of the second mask conductive layer **144** may be located inside or outside opposite ends of the second drain electrode **160**.

The first and second mask conductive layers **142** and **144** are formed of a material that has resistance to an etching gas that is used to form the first and second drain contact holes **124D** and **174D**, rather than being etched thereby. For example, the first and second mask conductive layers **142** and **144** are formed as a single-layer structure or a multi-layered structure using any one of ITO, MoTi and Al, which reacts to an etchant for a wet etching process. The first and second mask conductive layers **142** and **144** are formed of the same material or different materials. At least one of the first and second buffer layers **172** and **174**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first and second protective layers **182** and **184** are formed of a material that has etching characteristics different from those of the first and second mask conductive layers **142** and **144**. That is, at least one of the first and second buffer layers **172** and **174**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first and second protective layers **182** and **184** are formed of an Si-based inorganic layer (e.g., SiNx or SiOx) that reacts to an etching gas for a dry etching process.

The first mask conductive layer **142** serves as a mask along with a photoresist pattern when the second buffer layer **174**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first protective layer **182** are dry-etched in order to form the first drain contact hole **124D**. In addition, the second mask conductive layer **144** serves as a mask along with a photoresist pattern when the first buffer layer **172**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first and second protective layers **182** and **184** are dry-etched in order to form the second drain contact hole **174D**.

Accordingly, through the provision of the first and second mask conductive layers **142** and **144**, which serve as a mask when the first and second drain contact holes **124D** and **174D** are formed, the thickness of the photoresist pattern may decrease. Because exposure resolution increases as the thickness of the photoresist pattern decreases, the first and second drain contact holes **124D** and **174D** may be formed to have a narrow line width of 2 μm or less and a depth of 1 μm or more. Specifically, as illustrated in FIG. 3, the inclination angle of the side surface of at least one of the buffer layers, the gate insulation layer, the interlayer insulation layers, and the protective layers, which are exposed through the first and second drain contact holes **124D** and **174D**, is an acute angle of 80 degrees or more. In this case, each of the first and second drain contact holes **124D** and **174D** is reduced in line width from the top (e.g., the protective layers **182** and **184**) to the bottom (e.g., the buffer layers **172** and **174**) thereof, but the difference is slight. Thus, the first and second drain contact holes **124D** and **174D**, which expose the side surface of the protective layers

182 and **184**, have the maximum line width. Here, the maximum line width W of the first and second drain contact holes **124D** and **174D** is 2 μm or less, for example, 1.5 μm , and the maximum depth D of the first and second drain contact holes **124D** and **174D** ranges from 1.2 μm to 1.4 μm .

Meanwhile, although the first and second drain contact holes **124D** and **174D** have been described as narrow holes in the present disclosure by way of example, as illustrated in FIG. 4, at least one of the first and second source contact holes **124S** and **174S** and the pixel contact hole **120** may be formed as a narrow hole. In this case, a third mask conductive layer **146** is disposed between the insulation layer and at least one of the first and second source electrodes **108** and **158** and the anode electrode **132**. The third mask conductive layer **146**, having the second source contact hole **174S** therein, is formed between the first interlayer insulation layer **178** and the second source electrode **158** to overlap the second source electrode **158** and is formed of a material having different characteristics from those of the first interlayer insulation layer **178**. In addition, the third mask conductive layer **146** having the first source contact hole **124S** therein is formed between the second interlayer insulation layer **180** and the first source electrode **108** to overlap the first source electrode **108** and is formed of a material having different characteristics from those of the second interlayer insulation layer **180**. For example, the first and second interlayer insulation layers **178** and **180** are formed of SiNx or SiOx, which reacts to an etching gas for a dry etching process, and the third mask conductive layer **146** is formed as a single-layer structure or a multilayered structure using any one of ITO, MoTi and Al, which reacts to an etchant for a wet etching process.

FIGS. 5A to 5N are cross-sectional views illustrating an example method of manufacturing the organic light-emitting display device illustrated in FIG. 2.

With reference to FIG. 5A, the storage electrode **170** is formed on a substrate **101**.

Specifically, after a first metal layer is stacked over the entire surface of the substrate **101**, which is formed of plastic, glass or a plurality of insulation layers, the first metal layer is patterned through a photolithography process and an etching process, whereby the storage electrode **170** is formed.

With reference to FIG. 5B, the first buffer layer **172** and the second gate electrode **156** are sequentially formed on the substrate **101** on which the storage electrode **170** has been formed.

Specifically, an inorganic insulation material such as, for example, SiOx or SiNx is stacked over the entire surface of the substrate **101** on which the storage electrode **170** has been formed, whereby the first buffer layer **172** is formed. Then, after a second metal layer is deposited over the entire surface of the first buffer layer **172**, the second metal layer is patterned through a photolithography process and an etching process, whereby the second gate electrode **156** is formed.

With reference to FIG. 5C, the second buffer layer **174** and the first and second active layers **104** and **154** are sequentially formed on the substrate **101** on which the second gate electrode **156** has been formed.

Specifically, an inorganic insulation material, such as SiOx or SiNx, is stacked over the entire surface of the substrate **101** on which the gate electrode **156** has been formed, whereby the second buffer layer **174** is formed. Then, after a semiconductor layer is deposited over the entire surface of the second buffer layer **174**, the semiconductor layer is patterned through a photolithography process

and an etching process, whereby the first and second active layers **104** and **154** are formed.

With reference to FIG. 5D, the gate insulation layer **176** and the first gate electrode **106** are sequentially formed on the substrate **101** on which the first and second active layers **104** and **154** have been formed.

Specifically, an inorganic insulation material such as, for example, SiOx or SiNx is stacked over the entire surface of the substrate **101** on which the first and second active layers **104** and **154** have been formed, whereby the gate insulation layer **176** is formed. Then, after a third metal layer is deposited over the entire surface of the gate insulation layer **176**, the third metal layer is patterned through a photolithography process and an etching process, whereby the first gate electrode **106** is formed.

With reference to FIG. 5E, the first interlayer insulation layer **178** having the second source contact hole **174S** therein is formed on the substrate **101** on which the first gate electrode **106** has been formed.

Specifically, an inorganic insulation material such as, for example, SiOx or SiNx is stacked over the entire surface of the substrate **101** on which the first gate electrode **106** has been formed, whereby the first interlayer insulation layer **178** is formed. Then, a portion of the second buffer layer **174**, the second active layer **154**, the gate insulation layer **176**, and the first interlayer insulation layer **178** are patterned through a photolithography process and an etching process, whereby the second source contact hole **174S** is formed. Here, the second source contact hole **174S** penetrates a portion of the second buffer layer **174**, the second active layer **154**, the gate insulation layer **176**, and the first interlayer insulation layer **178** to thereby be connected to the exposed side surface of the second active layer **154**.

With reference to FIG. 5F, the second source electrode **158** is formed in the substrate **101** on which the second source contact hole **174S** has been formed.

Specifically, after a fourth metal layer is deposited over the entire surface of the substrate **101** on which the second source contact hole **174S** has been formed, the fourth metal layer is patterned through a photolithography process and an etching process, whereby the second source electrode **158** is formed.

With reference to FIG. 5G, the second interlayer insulation layer **180** having the first source contact hole **124S** therein is formed on the substrate **101** on which the second source electrode **158** has been formed.

Specifically, an inorganic insulation material such as, for example, SiOx or SiNx is stacked over the entire surface of the substrate **101** on which the second source electrode **158** has been formed, whereby the second interlayer insulation layer **180** is formed. Then, a portion of the second buffer layer **174**, the first active layer **104**, the gate insulation layer **176**, and the first and second interlayer insulation layers **178** and **180** are patterned through a photolithography process and an etching process, whereby the first source contact hole **124S** is formed. Here, the first source contact hole **124S** penetrates a portion of the second buffer layer **174**, the first active layer **104**, the gate insulation layer **176**, and the first and second interlayer insulation layers **178** and **180** to thereby be connected to the exposed side surface of the first active layer **104**.

With reference to FIG. 5H, the first source electrode **108** is formed on the substrate **101** on which the first source contact hole **124S** is formed.

Specifically, after a fifth metal layer is deposited over the entire surface of the substrate **101** on which the first source contact hole **124S** has been formed, the fifth metal layer is

patterned through a photolithography process and an etching process, whereby the first source electrode **108** is formed.

With reference to FIG. 5I, the first protective layer **182** and the first mask conductive layer **142**, which have the first drain contact hole **124D** therein, are formed on the substrate **101** on which the first source electrode **108** has been formed.

Specifically, the first protective layer **182** is formed on the substrate **101** on which the first source contact hole **124S** has been formed, and a sixth metal layer is formed thereon via, for example, sputtering. The first protective layer **182** is formed of an inorganic insulation material such as, for example, SiOx or SiNx, and the sixth metal layer is formed of at least one of ITO, MoTi, and Al. Subsequently, the photoresist pattern **192** is formed on the sixth metal layer through exposure and developing processes. The sixth metal layer is patterned through a wet or dry etching process using the photoresist pattern **192** as a mask, whereby the first mask conductive layer **142** having the first mask hole **142a** is formed. Subsequently, the second buffer layer **174**, the first active layer **104**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first protective layer **182** are patterned through a dry etching process using, as a mask, the photoresist pattern **192** and the first mask conductive layer **142**, whereby the first drain contact hole **124D** is formed. Here, the first drain contact hole **124D** penetrates the second buffer layer **174**, the first active layer **104**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, and the first protective layer **182** to thereby be connected to the exposed side surface of the first active layer **104** and the exposed upper surface of the second gate electrode **156**. In addition, the first mask conductive layer **142** has the same pattern as the first protective layer **182**.

With reference to FIG. 5J, the first drain electrode **110** is formed on the substrate **101** on which the first protective layer **182** and the first mask conductive layer **142**, which have the first drain contact hole **124D** therein, have been formed.

Specifically, after a seventh metal layer is deposited over the entire surface of the substrate **101** on which the first protective layer **182** and the first mask conductive layer **142**, which have the first drain contact hole **124D** therein, have been formed, the seventh metal layer is patterned through a photolithography process and an etching process, whereby the first drain electrode **110** is formed. Meanwhile, in order to form the first drain electrode **110**, because the first mask conductive layer **142** is etched when the seventh metal layer is etched, the first mask conductive layer **142** that does not overlap the first drain electrode **110** is removed. Thereby, the first mask conductive layer **142** is disposed between the first drain electrode **110** and the upper surface of the first protective layer **182** to overlap the first drain electrode **110**.

With reference to FIG. 5K, the second protective layer **184** and the second mask conductive layer **144**, which have the second drain contact hole **174D** therein, are formed on the substrate **101** on which the first drain electrode **110** has been formed.

Specifically, the second protective layer **184** is formed on the substrate **101** on which the first drain electrode **110** has been formed, and an eighth metal layer is formed thereon via, for example, sputtering. The second protective layer **184** is formed of an inorganic insulation material such as, for example, SiOx or SiNx, and the eighth metal layer is formed of at least one of ITO, MoTi and Al. Subsequently, the photoresist pattern **194** is formed on the eighth metal layer through exposure and developing processes. The eighth metal layer is patterned through a wet or dry etching process

using the photoresist pattern **194** as a mask, whereby the second mask conductive layer **144** having the second mask hole **144a** is formed. Subsequently, the first buffer layer **172**, the second buffer layer **174**, the second active layer **154**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, the first protective layer **182**, and the second protective layer **184** are patterned through a dry etching process using, as a mask, the photoresist pattern **194** and the second mask conductive layer **144**, whereby the second drain contact hole **174D** is formed. Here, the second drain contact hole **174D** penetrates the first buffer layer **172**, the second buffer layer **174**, the second active layer **154**, the gate insulation layer **176**, the first and second interlayer insulation layers **178** and **180**, the first protective layer **182**, the second mask conductive layer **144**, and the second protective layer **184** to thereby be connected to the exposed side surface of the second active layer **154** and the exposed upper surface of the storage electrode **170**. In addition, the second mask conductive layer **144** has the same pattern as the second protective layer **184**.

With reference to FIG. 5L, the second drain electrode **160** is formed on the substrate **101** on which the second protective layer **184** and the second mask conductive layer **144**, which have the second drain contact hole **174D** therein, have been formed.

Specifically, after a ninth metal layer is deposited over the entire surface of the substrate **101** on which the second protective layer **184** and the second mask conductive layer **144**, which have the second drain contact hole **174D** therein, have been formed, the ninth metal layer is patterned through a photolithography process and an etching process, whereby the second drain electrode **160** is formed. Meanwhile, in order to form the second drain electrode **160**, because the second mask conductive layer **144** is etched when the ninth metal layer is etched, a portion of the second mask conductive layer **144** that does not overlap the second drain electrode **110** is removed. Thereby, the second mask conductive layer **144** is disposed between the second drain electrode **110** and the upper surface of the second protective layer **184** to overlap the second drain electrode **110**.

With reference to FIG. 5M, the planarization layer **128** having the pixel contact hole **120** therein is formed on the substrate **101** on which the second drain electrode **160** has been formed.

Specifically, the planarization layer **128** is formed by applying an organic layer over the entire surface of the substrate **101** on which the second drain electrode **160** has been formed. Then, the pixel contact hole **120** is formed to expose the second drain electrode **160** when the organic layer is patterned via a photolithography process.

With reference to FIG. 5N, the anode electrode **132**, the bank **138**, the light-emitting stack **134**, and the cathode electrode **136** are sequentially formed on the substrate **101** on which the planarization layer **128** has been formed.

Specifically, after a tenth metal layer is deposited over the entire surface of the substrate **101** on which the planarization layer **128** has been formed, the tenth metal layer is patterned through a photolithography process, whereby the anode electrode **132** is formed. Then, the bank **134** is formed by applying an organic layer over the entire surface of the substrate **101**, on which the anode electrode **132** has been formed, and patterning the organic layer through a photolithography process. Subsequently, the organic light-emitting layer **134** and the cathode electrode **136** are sequentially formed in an active area excluding a pad area through a deposition process using a shadow mask.

Accordingly, the narrow contact holes **124D** and **174D** may be formed to interconnect an upper conductive layer (e.g., the first drain electrode **110** or the second drain electrode **160**) and a lower conductive layer (e.g., the first gate electrode **106** or the storage electrode **170**). In particular, in an example embodiment of the present disclosure, even when at least one insulation layer disposed between the upper conductive layer and the lower conductive layer has a thickness of 10,000 Å or more, the narrow contact hole may be formed to have a line width of 2 μm or less by etching the insulation layer using, as a mask, the photoresist pattern and the mask conductive layers **142** and **144**. That is, the line width of the contact hole is reduced from the upper conductive layer to the lower conductive layer, and the maximum line width of the contact hole is 2 μm or less, for example, 1.5 μm, and the maximum depth D is 1 μm or more, for example, within a range from 1.2 μm to 1.4 μm. The contact hole may be applied to a high-resolution model, and thus example embodiments of the present disclosure may enable the realization of high resolution. In addition, when at least one insulation layer is etched, the insulation layer may be etched using the mask conductive layers **142** and **144** as a mask even if a photoresist pattern, which is thinner than the related art, is damaged, and therefore the contact holes **124D** and **174D** may be stably formed.

Meanwhile, although the pixel drive circuit has been described in example embodiments of the present disclosure as including the switching and driving thin-film transistors and one storage capacitor by way of example, the structure of the pixel drive circuit is given as an example, and is not limiting. For example, the pixel drive circuit may further include a sensing transistor. Here, the sensing transistor senses the threshold voltage of the driving thin-film transistor TD, and the data voltage is compensated in proportion to the sensed threshold voltage.

As is apparent from the above description, according to example embodiments of the present disclosure, even when at least one insulation layer disposed between an upper layer and a lower layer has a thickness of 10,000 Å, a narrow contact hole having a width of 2 μm or less may be formed by etching the insulation layer using a photoresist pattern and a mask conductive layer. In addition, even if the photoresist pattern, which has a smaller thickness compared to the related art, is damaged when the insulation layer is etched, the insulation layer may be etched using the mask conductive layer as a mask, which ensures the stabilized formation of the contact hole.

It will be apparent to those skilled in the art that various modifications and variations can be made in the display device substrate, an organic light-emitting display device including the same, and a method of manufacturing the same of the present disclosure without departing from the spirit or scope of the disclosure. Thus, it is intended that the present disclosure cover the modifications and variations of this disclosure provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An organic light-emitting display device, comprising:
 - a substrate;
 - a switching thin-film transistor on the substrate;
 - a driving thin-film transistor connected to the switching thin-film transistor; and
 - a light-emitting element connected to the driving thin-film transistor,
 wherein the switching thin-film transistor and the driving thin-film transistor together include:
 - a lower conductive layer on the substrate;

13

an insulation layer having therein a contact hole configured to expose the lower conductive layer;
 an upper conductive layer connected to the lower conductive layer through the contact hole; and
 a mask conductive layer between an upper surface of the insulation layer and the upper conductive layer to overlap the upper conductive layer.

2. The device according to claim 1, wherein the upper conductive layer is a drain electrode of the switching thin-film transistor; and

wherein the lower conductive layer is a gate electrode of the driving thin-film transistor.

3. The device according to claim 2, further comprising a storage capacitor connected to each of the switching thin-film transistor and the driving thin-film transistor,

wherein the upper conductive layer is a drain electrode of the driving thin-film transistor; and

wherein the lower conductive layer is a storage electrode of the storage capacitor.

4. The device according to claim 1, wherein the contact hole has a line width of 2 μm or less.

5. The device according to claim 1, wherein the insulation layer is of an inorganic insulation material, and

wherein the mask conductive layer is a single-layer structure or a multilayered structure of least one of ITO, MoTi, and Al.

6. The device according to claim 1, wherein the mask conductive layer has a mask hole configured to overlap the contact hole.

7. A display device substrate, comprising:

a base substrate;

a lower conductive layer on the base substrate;

an insulation layer having therein a contact hole configured to expose the lower conductive layer;

an upper conductive layer connected to the lower conductive layer through the contact hole; and

a mask conductive layer between an upper surface of the insulation layer and the upper conductive layer to overlap the upper conductive layer.

14

8. The display device substrate according to claim 7, wherein the insulation layer is of an inorganic insulation material, and

wherein the mask conductive layer is a single-layer structure or a multilayered structure of at least one of ITO, MoTi, and Al.

9. The display device substrate according to claim 7, wherein the mask conductive layer has a mask hole configured to overlap the contact hole.

10. A method of manufacturing a display device substrate, comprising:

forming a lower conductive layer on a base substrate;

forming an insulation layer, having therein a contact hole configured to expose the lower conductive layer, and a mask conductive layer; and

forming an upper conductive layer connected to the lower conductive layer through the contact hole,

wherein the mask conductive layer is disposed between an upper surface of the insulation layer and the upper conductive layer to overlap the upper conductive layer.

11. The method according to claim 10, wherein the forming the insulation layer and the mask conductive layer includes:

sequentially stacking the insulation layer and the mask conductive layer to cover the lower conductive layer;

wet-etching the mask conductive layer; and

dry-etching the insulation layer,

wherein the forming the upper conductive layer includes removing the mask conductive layer that does not overlap the upper conductive layer.

12. The method according to claim 10, wherein the insulation layer is formed of an inorganic insulation material, and

wherein the mask conductive layer is formed as a single-layer structure or a multilayered structure using at least one of ITO, MoTi, and Al.

* * * * *

专利名称(译)	显示装置基板，包括该显示装置基板的有机发光显示装置及其制造方法		
公开(公告)号	US10411074	公开(公告)日	2019-09-10
申请号	US15/814748	申请日	2017-11-16
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	WON SANG HYUK KIM MIN JOO KIM TAE HWAN KIM NAM YONG LIM GO EUN SON SEOK WOO		
发明人	WON, SANG-HYUK KIM, MIN-JOO KIM, TAE-HWAN KIM, NAM-YONG LIM, GO-EUN SON, SEOK-WOO		
IPC分类号	H01L27/32 H01L51/52		
CPC分类号	H01L27/3213 H01L27/3248 H01L27/3262 H01L27/3276 H01L51/5203 H01L27/3265 G09G2310/0264 H01L27/124 H01L27/1248 H01L27/1255 H01L27/1259 H01L27/1288 H01L27/3258		
优先权	1020160162271 2016-11-30 KR		
其他公开文献	US20180151633A1		
外部链接	Espacenet		

摘要(译)

一种有机发光显示装置，包括基板；基板上的开关薄膜晶体管；连接到开关薄膜晶体管的驱动薄膜晶体管；连接到驱动薄膜晶体管的发光元件，其中开关薄膜晶体管和驱动薄膜晶体管一起包括：基板上的下导电层；绝缘层，其中具有接触孔，该接触孔被配置为暴露下导电层；上导电层通过接触孔连接到下导电层；掩模导电层位于绝缘层的上表面和上导电层之间，以与上导电层重叠。

