



US 20150187854A1

(19) **United States**(12) **Patent Application Publication**
BEAK et al.(10) **Pub. No.: US 2015/0187854 A1**(43) **Pub. Date: Jul. 2, 2015**(54) **ORGANIC LIGHT EMITTING DISPLAY
DEVICE AND FABRICATING METHOD
THEREOF**(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)(72) Inventors: **Jung Sun BEAK**, Paju-si (KR); **Jeong
Oh KIM**, Goyang-si (KR); **Jeong Gi
YUN**, Paju-si (KR); **Yong Min KIM**,
Anyang-si (KR)(21) Appl. No.: **14/561,899**(22) Filed: **Dec. 5, 2014**(30) **Foreign Application Priority Data**

Dec. 31, 2013 (KR) 10-2013-0169090

Publication Classification(51) **Int. Cl.**
H01L 27/32 (2006.01)
H01L 51/56 (2006.01)
H01L 51/50 (2006.01)(52) **U.S. Cl.**
CPC **H01L 27/3262** (2013.01); **H01L 27/322**
(2013.01); **H01L 27/3265** (2013.01); **H01L**
51/504 (2013.01); **H01L 51/56** (2013.01);
H01L 2227/323 (2013.01); **H01L 2251/306**
(2013.01); **H01L 2251/308** (2013.01)(57) **ABSTRACT**

Disclosed is an organic light emitting display device. The organic light emitting display device includes: at least one transistor arranged in a transistor region of the substrate and configured to include a channel layer, an insulation film, a gate electrode, a source electrode and a drain electrode; a storage capacitor arranged in the storage capacitor region, the pixel region and the pad region of the substrate and configured to include a first storage electrode, an insulation film pattern and a second storage electrode; a color filter arranged over the storage capacitor opposite to the pixel region; and an organic light emitting diode arranged on the color filter and configured to include a first electrode, an organic emission layer and a second electrode.

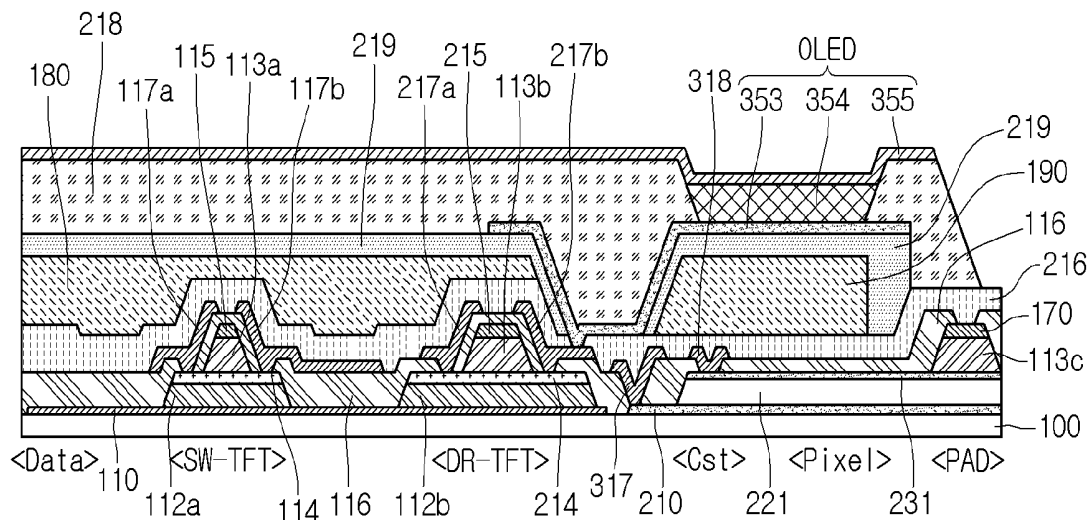


FIG. 1

(Related Art)

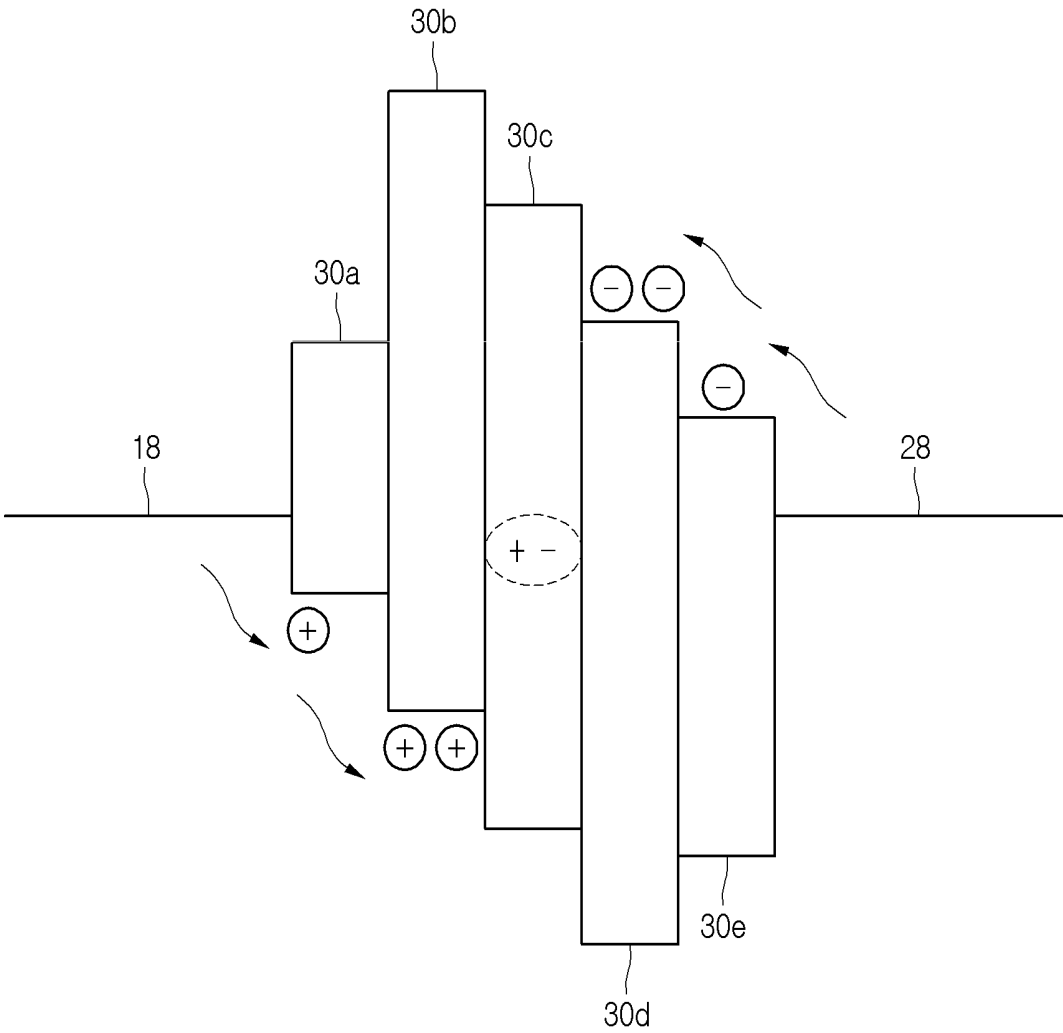


FIG. 2

(Related Art)

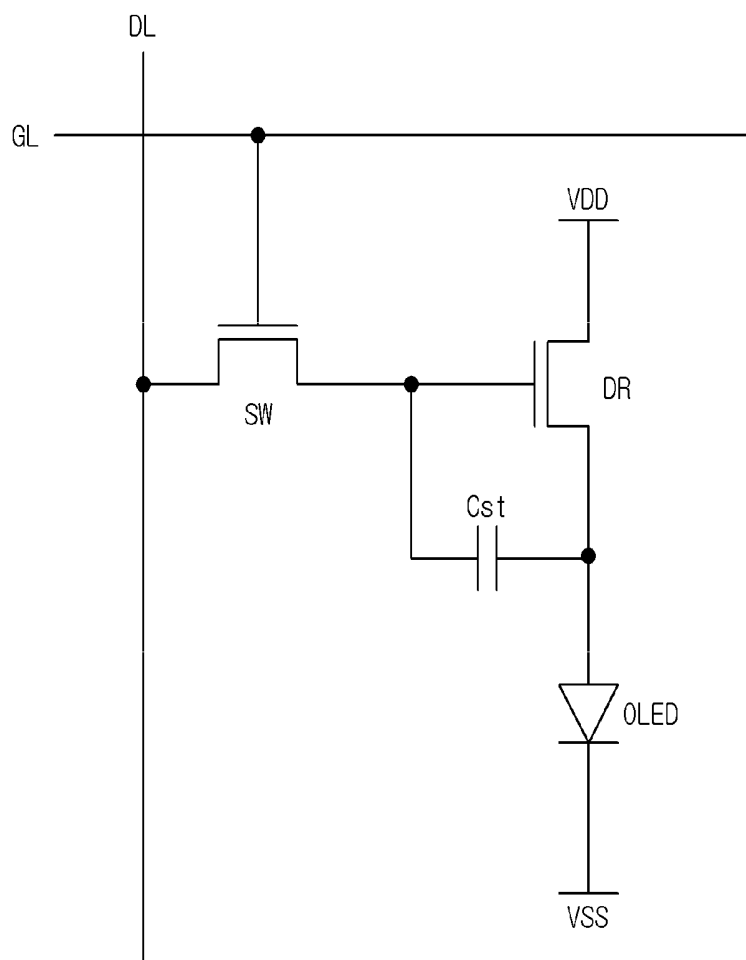


FIG. 3A



FIG. 3B

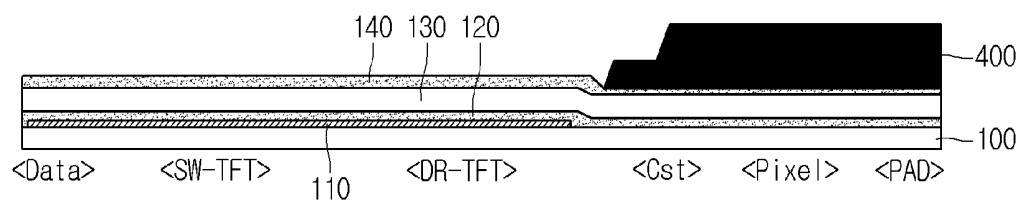


FIG. 3C

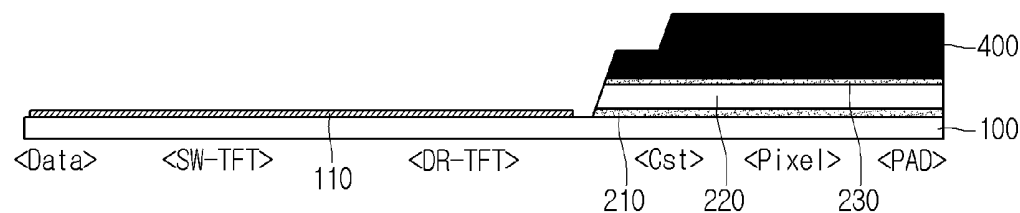


FIG. 3D

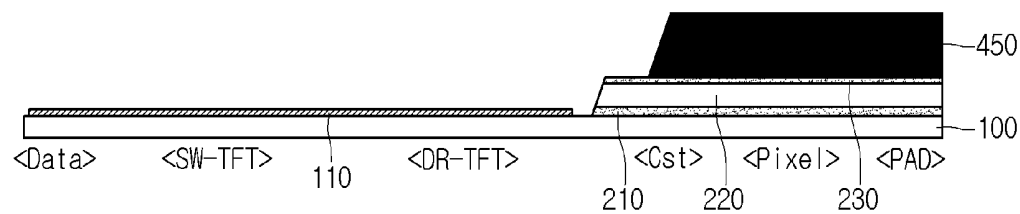


FIG. 3E

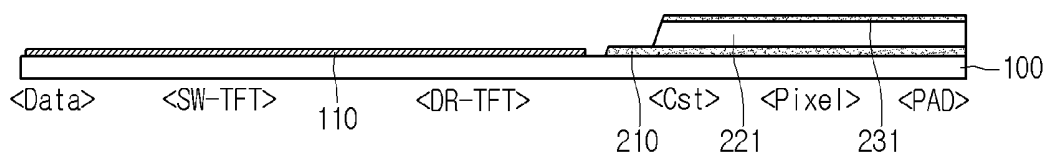


FIG. 3F

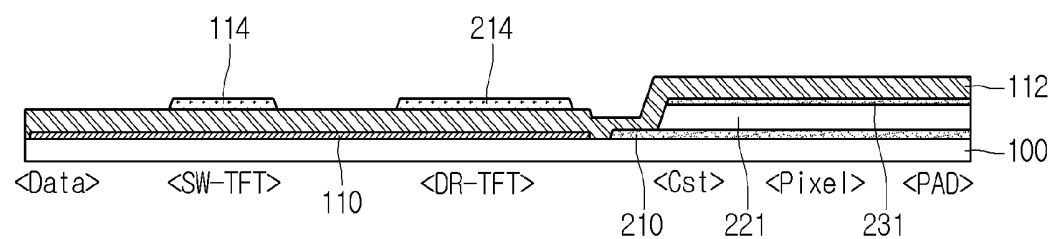


FIG. 3G

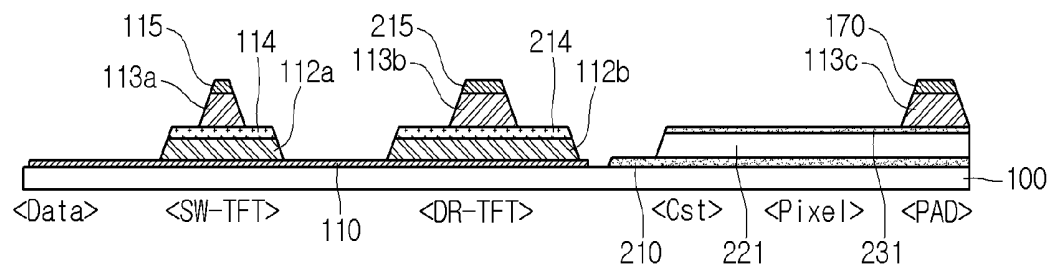


FIG. 3H

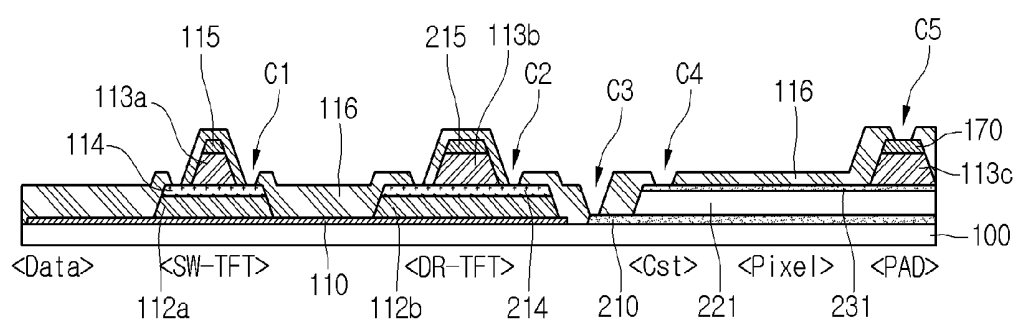


FIG. 3I

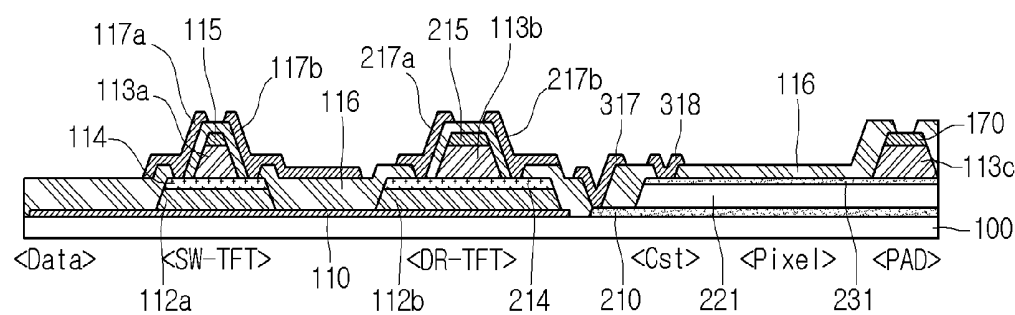


FIG. 3J

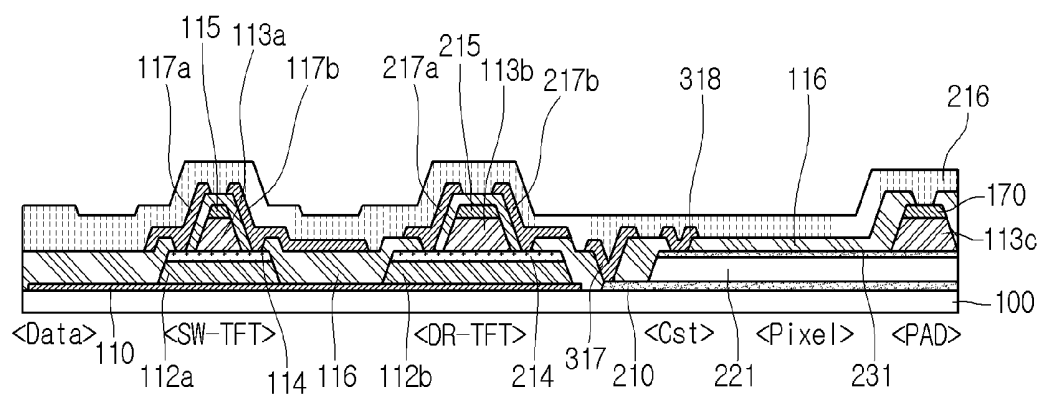


FIG. 3K

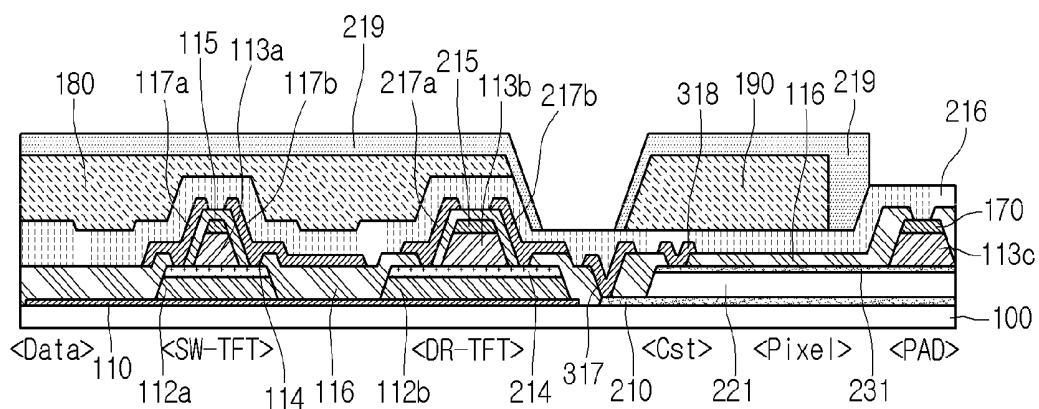


FIG. 3L


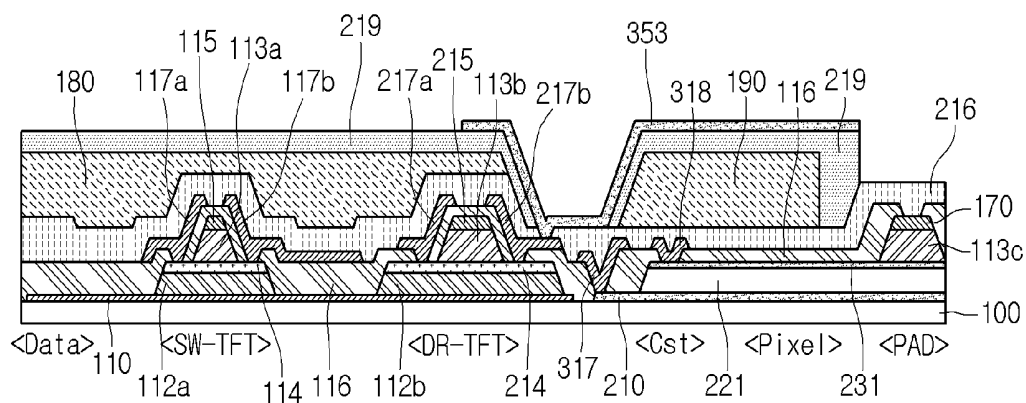


FIG. 3M

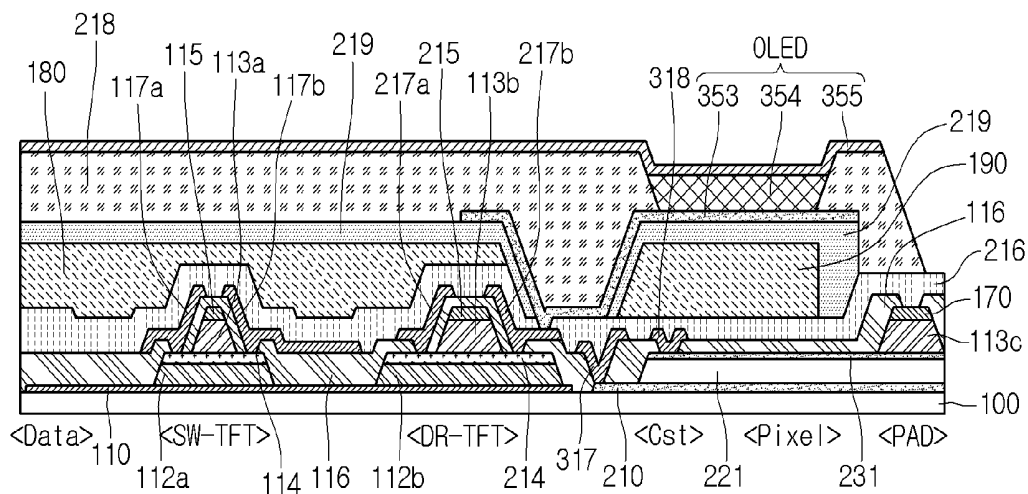

ORGANIC LIGHT EMITTING DISPLAY DEVICE AND FABRICATING METHOD THEREOF

[0001] The present application claims priority under 35 U.S.C. §119(a) of Korean Patent Application No. 10-2013-0169090 filed on Dec. 31, 2013 which is hereby incorporated by reference for all purposes in its entirety.

BACKGROUND

[0002] 1. Field of the Disclosure

[0003] The present application relates to an organic light emitting display device. More particularly, the present application relates to an organic light emitting display device adapted to enhance an aperture ratio by allowing a storage electrode in a pixel region to become a transparent electrode, and to a fabricating method thereof.

[0004] 2. Description of the Related Art

[0005] The general public has shown a keen interest in information display, and public demand for the use of portable information media is increasing. Flat panel display devices having features of thinness, lighter weight, and suitability to replace existing cathode ray tubes (CRTs) are being actively researched and commercialized.

[0006] In the flat panel display field, liquid crystal display (LCD) devices with features of light weight and low power consumption have been attracting public attention. However, the LCD devices have low brightness, a low contrast ratio and a narrow viewing angle because of being used as a light receiving element not a luminous element. As such, new display devices that are suitable to overcome the disadvantages of the LCD devices are actively being developed.

[0007] An organic light emitting display (OLED) device corresponding to one of the new display devices is a self-luminous device. In other words, the OLED device does not require any backlight. As such, the OLED device can provide advantages of a wider viewing angle, a superior contrast ratio, lower power consumption and so on, compared to the LCD device. Also, the OLED device can not only become thinner but also reduce weight. Moreover, the OLED device can be driven by a low DC (direct current) voltage, enhance the response time, and reduce the fabrication cost.

[0008] Such an OLED device can be fabricated using only deposition and encapsulation processes, unlike the LCD device and a plasma display panel (PDP). As such, the fabrication procedure of the OLED device is very simple. If pixels are driven in an active matrix mode which uses thin film transistors within each pixel as switching elements, the OLED device can obtain the same brightness as the LCD device even though it uses a small current. Therefore, the OLED device can reduce power consumption and be easy to realize high definition and a large-sized screen.

[0009] The basic structure and operation properties of an organic light emitting diode formed in each pixel region of the organic light emitting display device will now be described with reference to attached drawings.

[0010] FIG. 1 is a diagram illustrating an emission principle of an organic light emitting diode forming an ordinary organic light emitting display device.

[0011] The ordinary organic light emitting display device includes an organic light emitting diode shown in FIG. 1. The organic light emitting diode includes an organic compound layer 30a through 30e interposed between an anode electrode

18 corresponding to a pixel electrode and a cathode electrode 28 corresponding to a common electrode.

[0012] The organic compound layer 30a through 30e includes a hole injection layer 30a, a hole transport layer 30b, an emission layer 30c, an electron transport layer 30d and an electron injection layer 30e.

[0013] If a driving voltage is applied between the anode electrode 18 and the cathode electrode 28, holes passing through the hole transport layer 30b and electrons passing through the electron transport layer 30d are drifted into the emission layer 30c, thereby generating excitons. In accordance therewith, the emission layer 30c can emit visible light.

[0014] The organic light emitting display device includes pixels which each have the organic light emitting diode of the above-mentioned structure and are arranged in a matrix shape. Such an OLED device selectively controls the pixels using data voltages and scan voltages, in order to display an image.

[0015] FIG. 2 is an equivalent circuit diagram showing a pixel region of an ordinary organic light emitting display device.

[0016] Referring to the equivalent circuit of FIG. 2, an organic light emitting display device of an active matrix type includes a pixel of a 2T1C mode as an example. The pixel of the 2T1C mode includes two thin film transistors and a single capacitor.

[0017] Such a pixel of the active matrix type organic light emitting display device includes an organic light emitting diode OLED, a switching thin film transistor SW, a driving thin film transistor DR and a storage capacitor Cst within a pixel region which are defined by a data line DL and a gate line GL crossing each other.

[0018] The switching thin film transistor SW is turned-on in response to a scan pulse from the gate line GL and forms a current path between its source and drain electrodes. During the turned-on period of the switching thin film transistor SW, a data voltage is applied from the data line DL to the driving thin film transistor DR and the storage capacitor Cst via the source electrode and the drain electrode of the switching thin film transistor SW.

[0019] The driving thin film transistor DR controls the quantity of a current flowing through the organic light emitting diode OLED according to the data voltage applied to its gate electrode. The storage capacitor Cst stores a different voltage between the data voltage and a low power supply voltage VSS, and constantly maintains the different voltage for a single frame interval.

[0020] However, the storage capacitor Cst of the organic light emitting display device of the related art is prepared by forming a first storage electrode in a storage capacitor region at the formation of gate electrodes of the switching and driving thin film transistors SW and DR, and then forming a second storage electrode overlapping with the first storage electrode at the formation of the source/drain electrodes of the switching and driving thin film transistors. As such, all the storage electrodes must be formed from an opaque metal.

[0021] In other words, the storage electrodes positioned within the pixel region must be formed from an opaque metal. Due to this, the aperture ratio of the pixel must deteriorate. Also, it is difficult to increase the capacitance of the storage capacitor through the expansion of the storage electrodes.

BRIEF SUMMARY

[0022] Accordingly, embodiments of the present application are directed to an organic light emitting display device and a fabricating method thereof that substantially obviate one or more of problems due to the limitations and disadvantages of the related art.

[0023] The embodiments are to provide an organic light emitting display device and a fabricating method thereof which are adapted to enhance an aperture ratio of a pixel by forming storage electrodes of a storage capacitor in a pixel region using a transparent electrode material.

[0024] Also, the embodiments are to provide an organic light emitting display device and a fabricating method thereof which are adapted to enhance an aperture ratio of a pixel by forming transparent storage electrodes in a pixel region using a transparent electrode material without any additional process.

[0025] Moreover, the embodiments provide an organic light emitting display device and a fabricating method thereof increase the capacitance of a storage capacitor by forming storage electrodes of a storage capacitor in a pixel region using a transparent electrode material and expanding a formation region of the storage electrodes.

[0026] Additional features and advantages of the embodiments will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the embodiments. The advantages of the embodiments will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0027] In order to solve the above-mentioned problems of the related art, a manufacturing method of an OLED display device according to a general aspect of the present embodiment includes: sequentially forming a first metal film, an insulation film and a second metal film on a substrate; forming a photosensitive film pattern having different thickness portions on the second metal film through a mask procedure, wherein the photosensitive film pattern is formed opposite a storage capacitor region, a pixel region and a pad region; forming a first storage electrode, an insulation film pattern and a metal film pattern by sequentially etching the first metal film, the insulation film and the second metal film using the first photosensitive film pattern as a mask; forming a second photosensitive film pattern by performing an ashing process on the first photosensitive film pattern; forming a storage capacitor configured with the first storage electrode, a second insulation film pattern and a second storage electrode by etching the first insulation film pattern and the metal film pattern using the second photosensitive film pattern as a mask; forming a switching transistor and a driving transistor, each including with a channel layer, a gate electrode, a source electrode and a drain electrode, on the substrate provided with the storage capacitor; forming a color filter in the pixel region of the substrate provided with the switching and driving transistors and the storage capacitor; and forming an organic light emitting diode, which includes a first electrode, an organic emission layer and a second electrode, in the pixel region of the substrate provided with the color filter.

[0028] An organic light emitting display device according to another general aspect of the present embodiment includes: a substrate having a transistor region, a storage capacitor region, a pixel region and a pad region; at least one transistor arranged in the transistor region of the substrate and configured to include a channel layer, an insulation film, a gate

electrode, a source electrode and a drain electrode; a storage capacitor arranged in the storage capacitor region, the pixel region and the pad region of the substrate and configured to include a first storage electrode, an insulation film pattern and a second storage electrode; a color filter arranged over the storage capacitor opposite to the pixel region; and an organic light emitting diode arranged on the color filter and configured to include a first electrode, an organic emission layer and a second electrode.

[0029] Other systems, methods, features and advantages will be, or will become, apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the present disclosure, and be protected by the following claims. Nothing in this section should be taken as a limitation on those claims. Further aspects and advantages are discussed below in conjunction with the embodiments. It is to be understood that both the foregoing general description and the following detailed description of the present disclosure are exemplary and explanatory and are intended to provide further explanation of the disclosure as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] The accompanying drawings, which are included to provide a further understanding of the embodiments and are incorporated herein and constitute a part of this application, illustrate embodiment(s) of the present disclosure and together with the description serve to explain the disclosure. In the drawings:

[0031] FIG. 1 is a diagram illustrating an emission principle of an organic light emitting diode formed an ordinary OLED device;

[0032] FIG. 2 is an equivalent circuit diagram showing a pixel region of an ordinary OLED device; and

[0033] FIGS. 3A and 3M are cross-sectional views illustrating a fabricating method of an OLED device according to an embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0034] Reference will now be made in detail to the embodiments of the present disclosure, examples of which are illustrated in the accompanying drawings. These embodiments introduced hereinafter are provided as examples in order to convey their spirits to the ordinary skilled person in the art. Therefore, these embodiments might be embodied in a different shape, so are not limited to these embodiments described here. Also, the size and thickness of the device might be expressed to be exaggerated for the sake of convenience in the drawings. Wherever possible, the same reference numbers will be used throughout this disclosure including the drawings to refer to the same or like parts.

[0035] FIGS. 3A-3M are cross-sectional views illustrating a fabricating method of an OLED device according to an embodiment of the present disclosure.

[0036] Referring to FIGS. 3A through 3M, a method of fabricating an organic light emitting display device according to an embodiment of the present disclosure forms a metal film on a substrate **100** which is defined into a data line region Data, a switching transistor region SW-TFT, a driving transistor

sistor region DR-TFT, a storage capacitor region Cst, a pixel region Pixel and a pad region PAD.

[0037] The substrate **100** is formed from a transparent insulation material. The metal film is patterned through a first mask procedure and allows a light shield layer **110** to be formed in the data line region Data, the switching transistor region SW-TFT and the driving transistor region DR-TFT as shown in FIG. 3A.

[0038] Then, a first metal film **120**, an insulation film **130** and a second metal film **140** are sequentially formed on the entire surface of the substrate **100** provided with the light shield layer **110**. Also, a photosensitive film is formed on the entire surface of the second metal film **140**.

[0039] A light exposure process and a development process are performed for the substrate **100**, on which the photosensitive film is formed, using one of a diffractive mask and a halftone mask. In accordance therewith, a first photosensitive film pattern **400** is formed on the second metal film **140** corresponding to the storage capacitor region Cst, the pixel region Pixel and the pad region PAD, as shown in FIG. 3B.

[0040] The first photosensitive film pattern **400** is formed to regionally have different thicknesses from each other by one of the diffractive mask and the halftone mask. For example, the first photosensitive film pattern **400** is formed thinner in a part of the storage capacitor region Cst compared to the other regions (i.e., the other part of the storage capacitor region Cst, the pixel region Pixel and the pad region PAD).

[0041] The first metal film **120** and the second metal film **140** can be formed from a transparent conductive material. For example, the first metal film **120** and the second metal film **140** can be formed from one of indium-tin-oxide ITO, indium-zinc-oxide IZO and indium-tin-zinc-oxide ITZO.

[0042] The insulation film **130** interposed between the first and second metal films **120** and **140** can be formed in a single layer structure which is formed from one of a silicon oxide SiOx, such as SiO₂, and a silicon nitride SiNx. Alternatively, the insulation film **130** can be formed in a multi-layered structure by alternately depositing a silicon nitride SiNx and a silicon oxide SiOx on the first metal film **120**.

[0043] After the first photosensitive film pattern **400** is formed as described above, an etch process is performed for the above-mentioned substrate **100** using the first photosensitive film pattern **140** as a mask, as shown in FIG. 3C. The etch process can be a wet etch process. Alternatively, the etch process can be performed using a mixing method of a wet etch process and a dry etch process.

[0044] The above-mentioned etch process allows a first storage electrode **210**, a first insulation film pattern **220** and a metal film pattern **230** to be formed on the substrate **100** opposite to the first photosensitive film pattern **400** in a stacked structure.

[0045] Thereafter, an ashing process is performed for the first photosensitive film pattern **400**. In accordance therewith, a second photosensitive film pattern **450** is formed on the metal film pattern **230** as shown in FIG. 3D. The second photosensitive film pattern **450** can be a photosensitive film pattern not existing in a part of the storage capacitor region Cst but having a uniform thickness.

[0046] As such, parts of the metal film pattern **230**, the first insulation film pattern **220** and the first storage electrode **210** are exposed in a part of the storage capacitor region Cst.

[0047] Afterward, a second etch process is performed for the metal film pattern **230** and the insulation film pattern **220** of the substrate **100** using the second photosensitive film

pattern **450**. In accordance therewith, a second insulation film pattern **221** and a second storage electrode **231** are formed on the first storage electrode **210**, as shown in FIG. 3E.

[0048] In this way, the present disclosure allows all the first and second storage electrodes **210** and **231** to be formed from a transparent electrode material without any additional mask procedure. As such, an aperture ratio of the pixel is increased.

[0049] The first and second storage electrodes **210** and **231** formed from the transparent electrode material can expand from the storage capacitor region Cst up to the pixel region Pixel and the pad region PAD. As such, the capacitance of the storage capacitor can increase.

[0050] After the first and second storage electrodes **210** and **231** are formed on the substrate **100** as described above, a buffer layer **112** is formed on the entire surface of the above-mentioned substrate **100**. Also, a first channel layer **114** and a second channel layer **214** are formed on the buffer layer **112** corresponding to the switching transistor region SW-TFT and the driving transistor region DR-TFT by forming a semiconductor layer on the buffer layer **112** and patterning the semiconductor layer, as shown in FIG. 3F.

[0051] The first and second channel layers **114** and **214** can become a semiconductor layer including a crystalline silicon film and an ohmic contact layer. Alternatively, the first and second channel layers **114** and **214** can be an oxide semiconductor layer.

[0052] The oxide semiconductor layer can be formed from an amorphous oxide which includes at least one of indium In, zinc Zn, gallium Ga and hafnium Hf. For example, if the oxide semiconductor layer of Ga—In—Zn—O is formed through a sputtering process, either three targets formed from In₂O₃, Ga₂O₃ and ZnO can be used or a single target formed from a Ga—In—Zn oxide can be used. As another example, when the oxide semiconductor layer of Hf—In—Zn—O is formed through a sputtering process, either three targets formed from HfO₂, In₂O₃ and ZnO can be used or a single target formed from an Hf—In—Zn oxide can be used.

[0053] Subsequently, a gate insulation film and a gate metal film are sequentially formed on the entire surface of the substrate **100** provided with the first and second channel layers **114** and **214**, and a mask procedure is performed for the gate metal film and the gate insulation film. In accordance therewith, not only a first gate electrode **115** is formed over the first channel layer **114** but also a second gate electrode **215** is formed over the second channel layer **214**, as shown in FIG. 3G.

[0054] The gate insulation film can be formed in a single layer structure which is formed from one of a silicon oxide SiOx and a silicon nitride SiNx. Alternatively, the gate insulation film can be formed in a multi-layered structure by alternately depositing a silicon nitride SiNx and a silicon oxide SiOx.

[0055] A first gate insulation film pattern **113a** is formed between the first gate electrode **115** and the first channel layer **114**. A second gate insulation film pattern **113b** is formed between the second gate electrode **215** and the second channel layer **214**. A pad portion **170** and a third gate insulation film pattern **113c** are formed in a stacked structure on the second storage electrode **231** corresponding to the pad region PAD.

[0056] The gate metal film can be a single layer which is formed from one of opaque conductive materials with a low resistance, such as aluminum Al, an aluminum alloy, tungsten W, copper Cu, nickel Ni, chromium Cr, molybdenum Mo,

titanium Ti, platinum Pt, tantalum Ta and so on. Alternatively, the gate metal film can be formed in a double layered structure which includes a first layer formed from one of the above-mentioned opaque conductive materials and a second layer formed from an alloy of the above-mentioned opaque conductive materials. Also, the gate metal film can be formed in a multi-layered structure by stacking at least three metal films.

[0057] After the first and second gate electrodes **115** and **215** are formed on the substrate **100** as described above, an interlayer insulation film **116** is formed on the entire surface of the substrate **100** provided with the first and second gate electrodes **115** and **215**, as shown in FIG. 3H. Also, contact holes are formed in the interlayer insulation film **116** through a mask procedure.

[0058] The contact holes include first through fifth contact holes **C1** through **C5**. The first through fifth contact holes **C1** through **C5** expose a part of the first channel layer **114**, a part of the second channel layer **214**, a part of the first storage electrode **210**, a part of the second storage electrode **231** and a part of the pad portion **170**.

[0059] When the contact holes **C1** through **C5** are formed in the interlayer insulation film **116** as described above, a source/drain metal film is formed on the entire surface of the above-mentioned substrate **100** (i.e., on the interlayer insulation film **116**) and then a mask procedure is performed for the source/drain metal film. In accordance therewith, a first source electrode **117a**, a second source electrode **217a**, a first drain electrode **117b**, a second drain electrode **217b**, a first contact portion **317** and a second contact portion **318** are formed on the interlayer insulation film **116**, as shown in FIG. 3I.

[0060] The source/drain metal film can be formed from one of opaque conductive materials with a low resistance. The opaque conductive materials can include aluminum Al, an aluminum alloy, tungsten W, copper Cu, nickel Ni, chromium Cr, molybdenum Mo, titanium Ti, platinum Pt, tantalum Ta and so on. Alternatively, the source/drain metal film can be formed in a multi-layered structure including at least one transparent conductive material layer and at least one opaque conductive material layer. The transparent conductive material layer can be formed from one of indium-tin-oxide ITO, indium-zinc-oxide IZO and indium-tin-zinc-oxide ITZO.

[0061] The first gate electrode **115**, the first channel layer **114**, the first gate insulation film pattern **113a**, the first source electrode **117a** and the first drain electrode **117b** form a switching transistor. The second gate electrode **215**, the second channel layer **214**, the second gate insulation film pattern **113b**, the second source electrode **217a** and the second drain electrode **217b** form a driving transistor.

[0062] After the switching transistor and the driving transistor are completed as described above, a passivation film **216** is formed on the entire surface of the substrate **100** provided with the switching transistor and the driving transistor as shown in FIG. 3J. A color filter layer **190** is formed in a pixel region on the passivation film **216** as shown in FIG. 3K. Also, a color filter pattern **180** is formed in a non-display region on the passivation film **216** in which the switching transistor and the driving transistor are formed.

[0063] The color filter layer **190** can include red, green and blue color filter layers which are sequentially formed according to the pixel regions. The color filter pattern **180** can be formed from the same color filter material as the color filter layer of the respective pixel.

[0064] After the color filter layer **190** and the color filter pattern **180** are formed on the substrate **100** as described above, an overcoat layer **219** for surface planarization is formed on the entire surface of the above-mentioned substrate **100** as shown in FIG. 3K.

[0065] Subsequently, a transparent conductive material layer is formed on the entire surface of the substrate **100** provided with the overcoat layer **219**, and then a mask procedure is performed for the transparent conductive material layer. In accordance therewith, a first electrode **353** is formed on the overcoat layer **219** opposite to the color filter layer **190** as shown in FIG. 3L.

[0066] If the organic light emitting display device is a bottom emission mode, the first electrode **353** can be a cathode electrode of the organic light emitting diode.

[0067] After the first electrode **353** is formed in the pixel region Pixel as described above, a bank layer **218** is formed by forming an insulation layer on the above-mentioned substrate **100** and performing a mask procedure for the insulation layer, as shown in FIG. 3M. The bank layer **218** exposes the pixel region Pixel. As such, the first electrode **353** is exposed in the pixel region Pixel. Subsequently, an organic emission layer **354** is formed on the exposed first electrode **353**.

[0068] After the organic emission layer **354** is formed on the first electrode **353** as described above, a second electrode **355** is formed on the entire surface of the above-mentioned substrate **100**. In accordance therewith, an organic light emitting diode OLED configured with the first and second electrodes **353** and **355** and the organic emission layer **354** is completed.

[0069] The organic emission layer **354** can include a hole injection layer HIL, a hole transport layer HTL, an emission layer EML, an electron transport layer ETL and an electron injection layer EIL. The hole transport layer HTL can include an electron blocking layer EBL. The electron transport layer ETL can be formed from a low molecular material such as PBD, TAZ, Alq3, BAq, TPBI or Bepp2.

[0070] The emission layer EML of the organic emission layer **354** can emit color light in accordance with an organic material. As such, red, green and blue emission layers can be formed in the pixel regions Pixel, in order to realize full color. Alternatively, the emission layer can be become a white emission layer which is formed by stacking red, green and blue organic materials and emits white light, in order to realize full color.

[0071] The present disclosure allows color filters to be formed in the pixel regions of the substrate **100**. As such, it is preferable for the emission layer EML to emit white light.

[0072] The organic light emitting display device and the fabricating method thereof according to the present disclosure form the storage electrodes using a transparent electrode material, in order to implement a storage capacitor in the pixel region. As such, an aperture ratio of the pixel can be enhanced.

[0073] Also, the organic light emitting display device and the fabricating method thereof according to the present disclosure enhance an aperture ratio of the pixel by forming storage electrodes in a pixel region using a transparent electrode material without any additional process.

[0074] Moreover, the organic light emitting display device and the fabricating method thereof according to the present disclosure can form storage electrodes of a storage capacitor in a pixel region using a transparent electrode material and

expand the formation region of the storage electrodes. Therefore, the capacitance of a storage capacitor can increase.

[0075] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

What is claimed is:

1. A method of fabricating an organic light emitting diode display device, the method comprising:

sequentially forming a first metal film, an insulation film and a second metal film on a substrate;

forming a photosensitive film pattern having different thickness portions on the second metal film through a mask procedure, wherein the photosensitive film pattern is formed opposite a storage capacitor region, a pixel region and a pad region;

forming a first storage electrode, an insulation film pattern and a metal film pattern by sequentially etching the first metal film, the insulation film and the second metal film using the first photosensitive film pattern as a mask;

forming a second photosensitive film pattern by performing an ashing process on the first photosensitive film pattern;

forming a storage capacitor configured with the first storage electrode, a second insulation film pattern and a second storage electrode by etching the first insulation film pattern and the metal film pattern using the second photosensitive film pattern as a mask;

forming a switching transistor and a driving transistor, each including with a channel layer, a gate electrode, a source electrode and a drain electrode, on the substrate provided with the storage capacitor;

forming a color filter in the pixel region of the substrate provided with the switching and driving transistors and the storage capacitor; and

forming an organic light emitting diode, which includes a first electrode, an organic emission layer and a second electrode, in the pixel region of the substrate provided with the color filter.

2. The method of claim 1, wherein the first photosensitive film pattern is formed using one of a diffractive mask and a halftone mask.

3. The method of claim 1, wherein the first storage electrode, the second insulation film pattern and the second storage electrode included in the storage capacitor are expanded from the storage capacitor region up to the pixel region and the pad region.

4. The method of claim 1, wherein the first metal film and the second metal film are a transparent conductive material.

5. The method of claim 1, wherein the first metal film and the second metal film are one of indium-tin-oxide ITO, indium-zinc-oxide IZO and indium-tin-zinc-oxide ITZO.

6. The method of claim 1, wherein the second insulation film pattern of the storage capacitor is one of a silicon nitride SiN_x and silicon oxide SiO_x.

7. The method of claim 1, wherein the second insulation film pattern of the storage capacitor is a multi-layered structure formed by alternately depositing a silicon nitride SiN_x and a silicon oxide SiO_x.

8. The method of claim 1, wherein the organic emission layer includes a white emission layer that emits white light.

9. The method of claim 8, wherein the white emission layer is formed by stacking red, green and blue organic materials.

10. An organic light emitting display device, comprising:

a substrate having a transistor region, a storage capacitor region, a pixel region and a pad region;

at least one transistor arranged in the transistor region of the substrate and configured to include a channel layer, an insulation film, a gate electrode, a source electrode and a drain electrode;

a storage capacitor arranged in the storage capacitor region, the pixel region and the pad region of the substrate and configured to include a first storage electrode, an insulation film pattern and a second storage electrode;

a color filter arranged over the storage capacitor opposite to the pixel region; and

an organic light emitting diode arranged on the color filter and configured to include a first electrode, an organic emission layer and a second electrode.

11. The organic light emitting display device of claim 10, wherein the first storage electrode and the second storage electrode are formed from a transparent conductive material.

12. The organic light emitting display device of claim 10, wherein the first storage electrode and the second storage electrode are one of indium-tin-oxide ITO, indium-zinc-oxide IZO and indium-tin-zinc-oxide ITZO.

13. The organic light emitting display device of claim 10, wherein the insulation film pattern of the storage capacitor is one of a silicon nitride SiN_x and silicon oxide SiO_x.

14. The organic light emitting display device of claim 10, wherein the insulation film pattern of the storage capacitor is a multi-layered structure formed by alternately depositing a silicon nitride SiN_x and a silicon oxide SiO_x.

15. The organic light emitting display device of claim 10, wherein the organic emission layer includes a white emission layer that emits white light.

16. The organic light emitting display device of claim 15, wherein the white emission layer includes stacked red, green and blue organic materials.

* * * * *

专利名称(译)	有机发光显示装置及其制造方法		
公开(公告)号	US20150187854A1	公开(公告)日	2015-07-02
申请号	US14/561899	申请日	2014-12-05
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	BEAK JUNG SUN KIM JEONG OH YUN JEONG GI KIM YONG MIN		
发明人	BEAK, JUNG SUN KIM, JEONG OH YUN, JEONG GI KIM, YONG MIN		
IPC分类号	H01L27/32 H01L51/56 H01L51/50		
CPC分类号	H01L27/3262 H01L27/322 H01L27/3265 H01L2251/308 H01L51/56 H01L2227/323 H01L2251/306 H01L51/504 H01L21/0337		
优先权	1020130169090 2013-12-31 KR		
其他公开文献	US9401392		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种有机发光显示装置。所述有机发光显示装置包括：至少一个晶体管，布置在所述基板的晶体管区域中，并且被配置为包括沟道层，绝缘膜，栅电极，源电极和漏电极；存储电容器，设置在基板的存储电容器区域，像素区域和焊盘区域中，并且被配置为包括第一存储电极，绝缘膜图案和第二存储电极；滤色器，设置在与像素区域相对的存储电容器上方；有机发光二极管，设置在滤色器上，并配置为包括第一电极，有机发光层和第二电极。

