



US 20160359136A1

(19) **United States**(12) **Patent Application Publication**
SONG(10) **Pub. No.: US 2016/0359136 A1**(43) **Pub. Date: Dec. 8, 2016**(54) **ORGANIC LIGHT-EMITTING DIODE
DISPLAY SUBSTRATE, ITS
MANUFACTURING METHOD AND DISPLAY
DEVICE**(30) **Foreign Application Priority Data**


Nov. 28, 2014 (CN) 201410708390.8

Publication Classification(71) Applicant: **BOE TECHNOLOGY GROUP CO.,
LTD.**, Beijing (CN)(51) **Int. Cl.**
H01L 51/52 (2006.01)
H01L 27/32 (2006.01)(72) Inventor: **Youngsuk SONG**, Beijing (CN)(52) **U.S. Cl.**
CPC **H01L 51/5228** (2013.01); **H01L 27/3246**
(2013.01); **H01L 27/3258** (2013.01); **H01L**
2227/323 (2013.01)(73) Assignee: **BOE TECHNOLOGY GROUP CO.,
LTD.**, Beijing (CN)(57) **ABSTRACT**(21) Appl. No.: **14/892,883**

The present disclosure provides an OLED display substrate, its manufacturing method and a display device. The OLED display substrate includes a base substrate, and a TFT and an OLED driven by the TFT on the base substrate and. The OLED includes, in a direction away from the base substrate, an anode, an organic layer and a cathode in turn. The OLED display substrate further includes an auxiliary electrode connected in parallel to a part of the cathode.

(22) PCT Filed: **Mar. 25, 2015**(86) PCT No.: **PCT/CN2015/075048**

§ 371 (c)(1),

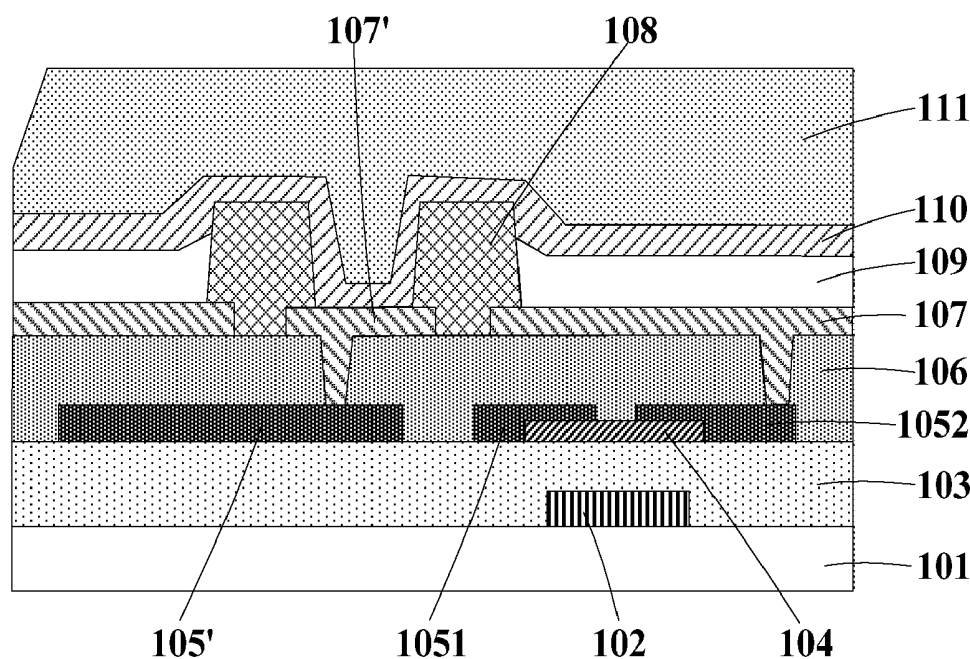(2) Date: **Nov. 20, 2015**

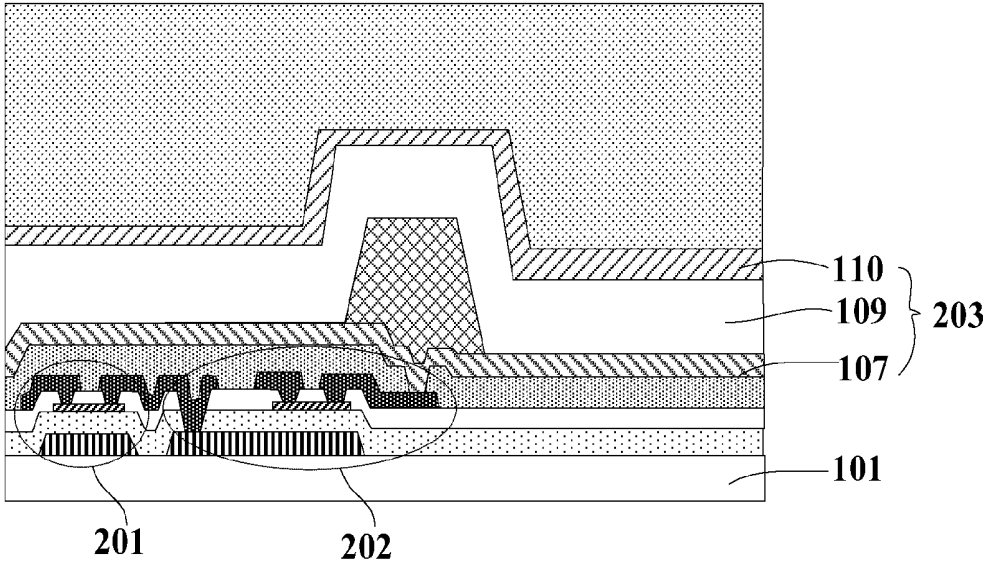


Fig. 1

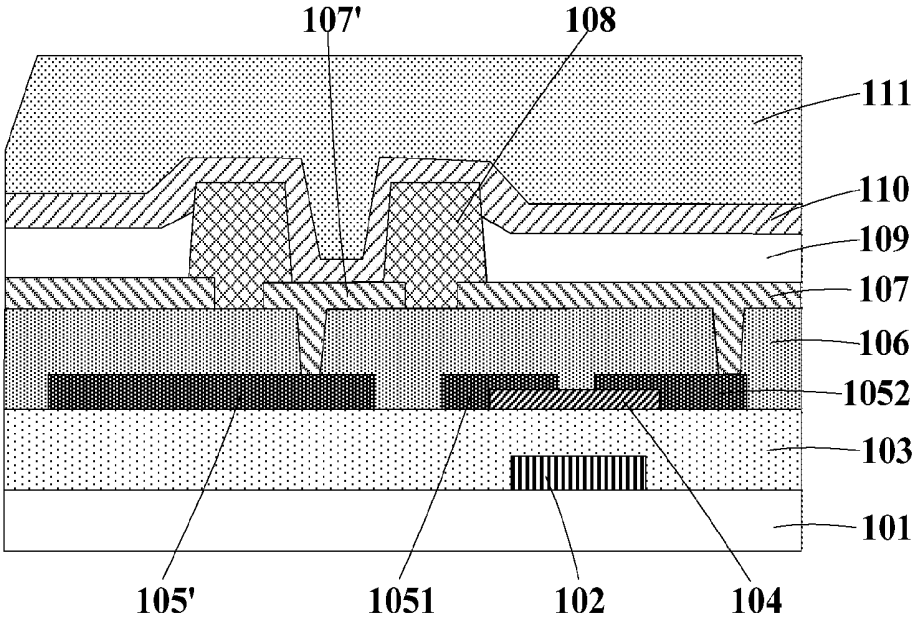


Fig. 2

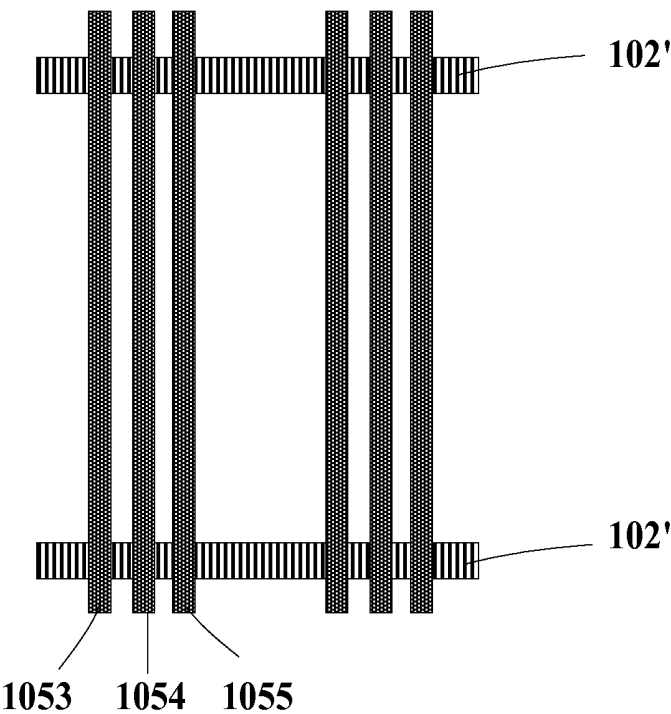


Fig. 3



Fig. 4-1

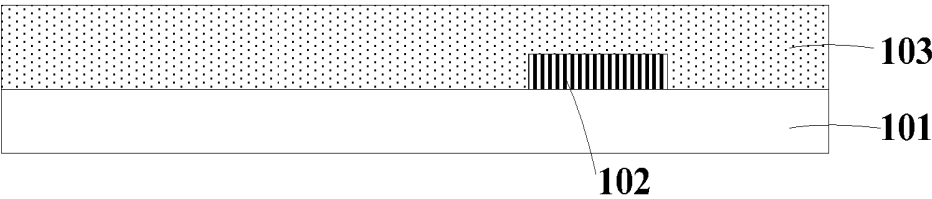


Fig. 4-2

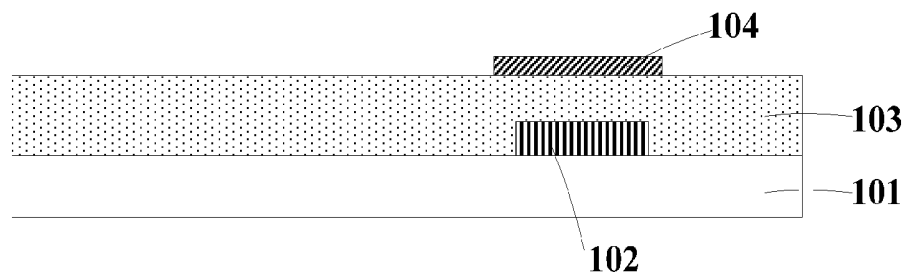


Fig. 4-3

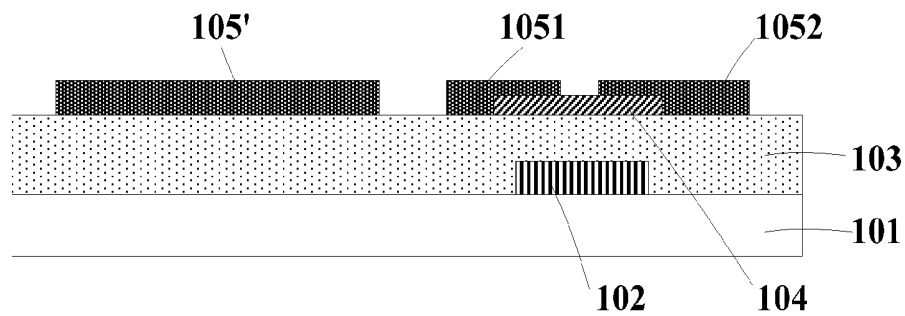


Fig. 4-4

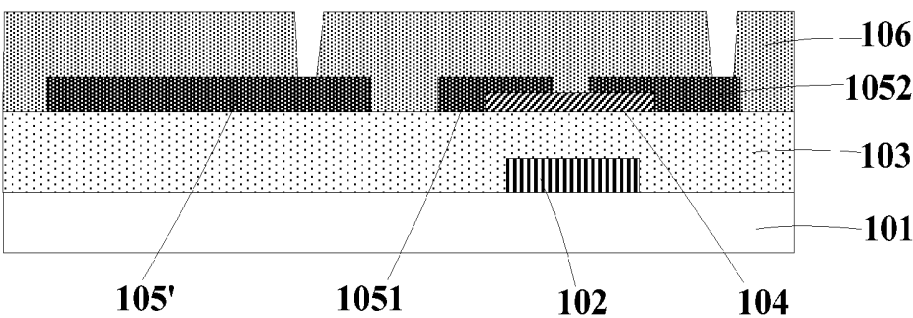


Fig. 4-5

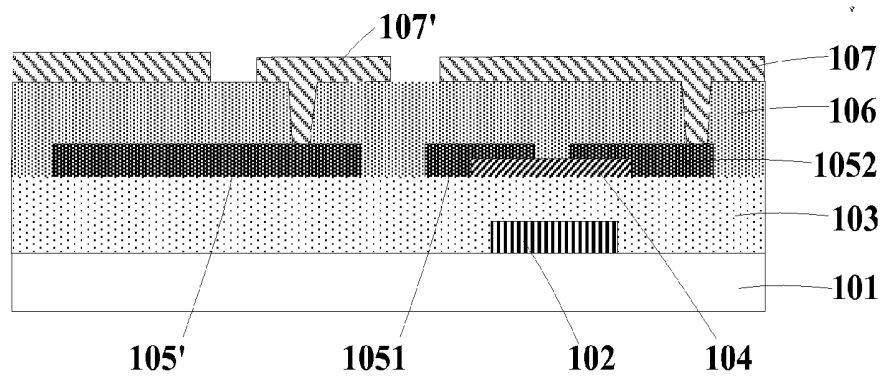


Fig. 4-6

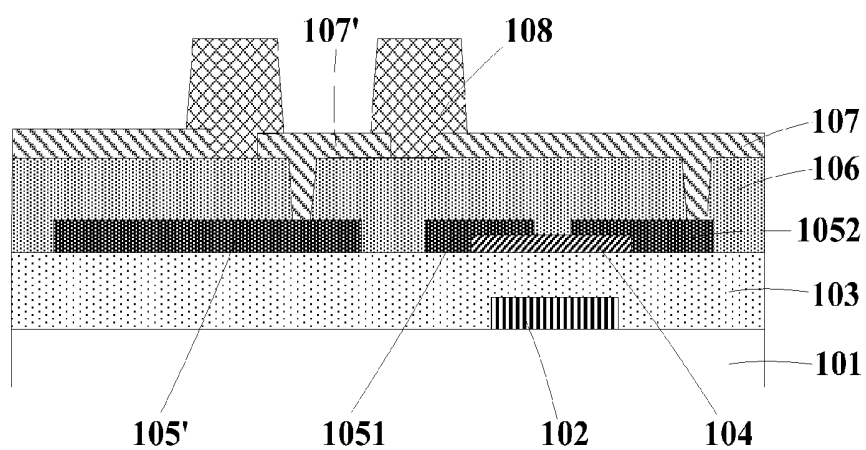


Fig. 4-7

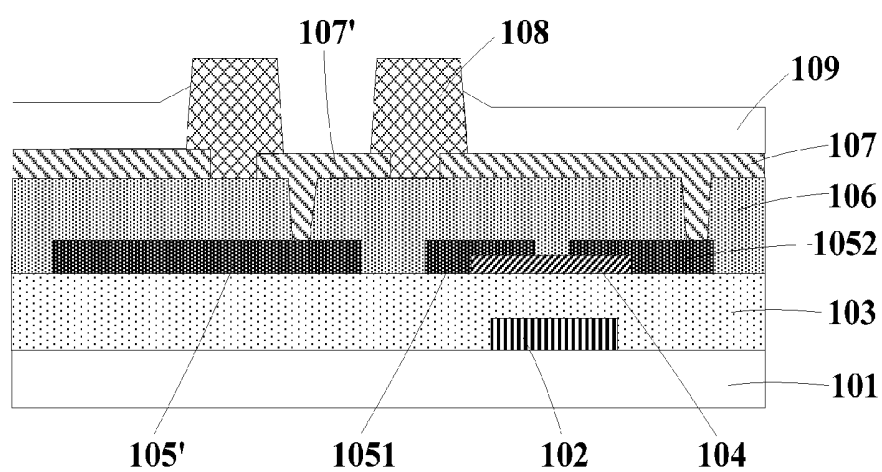


Fig. 4-8

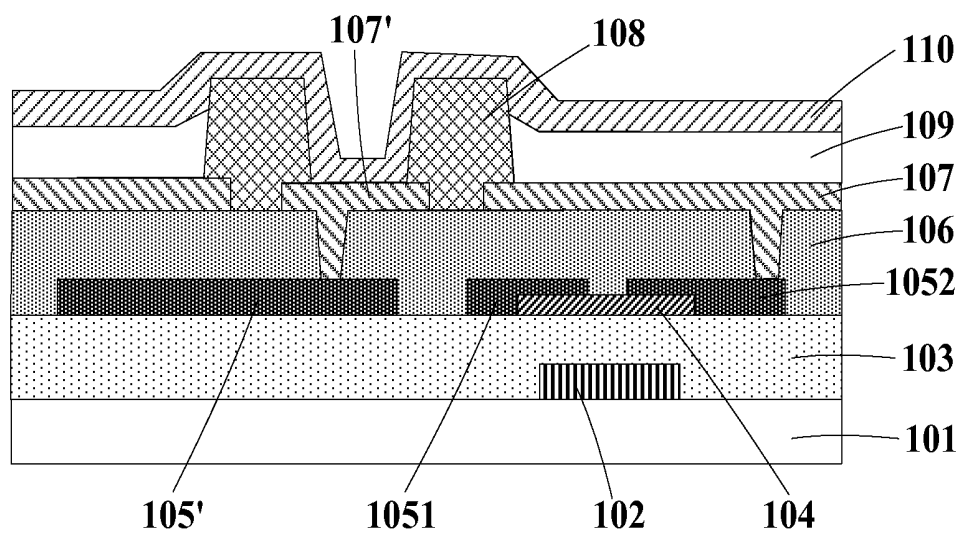


Fig. 4-9

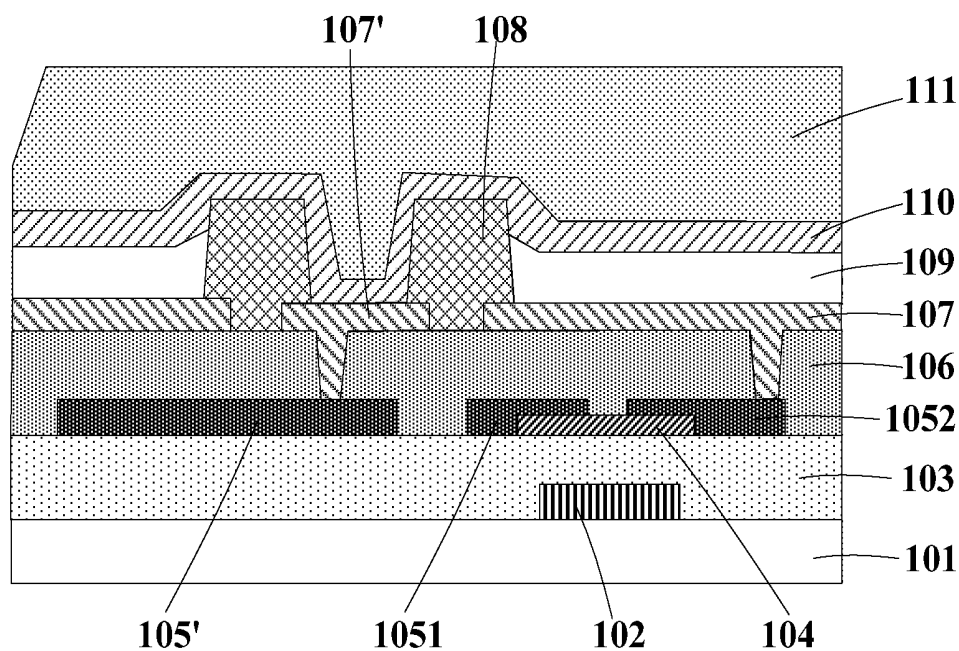


Fig. 4-10

**ORGANIC LIGHT-EMITTING DIODE
DISPLAY SUBSTRATE, ITS
MANUFACTURING METHOD AND DISPLAY
DEVICE**

**CROSS-REFERENCE TO RELATED
APPLICATION**

[0001] The present application claims a priority of the Chinese patent application No.201410708390.8 filed on Nov. 28, 2014, which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of display technology, in particular to an organic light-emitting diode (OLED) display substrate, its manufacturing method and a display device.

BACKGROUND

[0003] Referring to FIG. 1, which is a schematic view showing an existing top-emission OLED display substrate, the top-emission OLED display substrate includes a base substrate **101**, and thin film transistors (TFT) **201**, **202** and an OLED **203** arranged on the base substrate **101**. The OLED **203** includes, in a direction away from the base substrate **101**, an anode **107**, an organic layer **109** and a cathode **110**. Usually, the cathode **110** is made of a transparent or translucent conductive material by sputtering or depositing. The cathode **110** is thin and has a relatively large resistance, so an internal resistance (IR) drop may be induced when it is applied to a large-size OLED display device, resulting in deteriorated image quality of the OLED display device.

SUMMARY

[0004] An object of the present disclosure is to provide an OLED display substrate, its manufacturing method and a display device, so as to prevent the occurrence of an IR drop of the OLED display device due to a large resistance of a cathode.

[0005] In one aspect, the present disclosure provides in one embodiment an OLED display substrate, including a base substrate, and a TFT and an OLED driven by the TFT on the base substrate. The OLED includes, in a direction away from the base substrate, an anode, an organic layer and a cathode in turn. The OLED display substrate further includes an auxiliary electrode connected in parallel to the cathode.

[0006] Alternatively, the auxiliary electrode is arranged at a layer, and made of a material, identical to a source/drain electrode or a gate electrode of the TFT.

[0007] Alternatively, the auxiliary electrode is arranged at a layer, and made of a material, identical to the anode.

[0008] Alternatively, the auxiliary electrode includes a plurality of auxiliary sub-electrodes.

[0009] Alternatively, the plurality of auxiliary sub-electrodes is arranged at different layers.

[0010] Alternatively, the auxiliary electrode includes a first auxiliary sub-electrode and a second auxiliary sub-electrode connected to each other via a first connection hole, the first auxiliary sub-electrode is arranged at a layer, and made of a material, identical to the source/drain electrode or the gate electrode of the TFT or the anode, the second

auxiliary sub-electrode is arranged at a layer, and made of a material, identical to the source/drain electrode or the gate electrode of the TFT or the anode, and the first auxiliary sub-electrode is arranged at a layer different from the second auxiliary sub-electrode.

[0011] Alternatively, the OLED display substrate includes the base substrate; the gate electrode; a gate insulating layer; an active layer; the source/drain electrode and the first auxiliary sub-electrode arranged at an identical layer and made of an identical material; a planarization protection layer provided with the first connection hole penetrating therethrough; the anode and the second auxiliary sub-electrode arranged at an identical layer and made of an identical material, the second auxiliary sub-electrode being connected to the first auxiliary sub-electrode via the first connection hole; a pixel definition layer by which at least a portion of the anode and at least a portion of the second auxiliary sub-electrode are not covered; an organic layer; and the cathode connected to the second auxiliary sub-electrode.

[0012] Alternatively, the anode is connected to the drain electrode via a second connection hole penetrating through the planarization protection layer.

[0013] Alternatively, the OLED display substrate further includes a low level line arranged at a layer, and made of a material, identical to the first auxiliary sub-electrode, and the low level line is connected to the first auxiliary sub-electrode and the cathode.

[0014] Alternatively, the first auxiliary sub-electrode is connected to the cathode via a third connection hole.

[0015] In another aspect, the present disclosure provides in one embodiment a method for manufacturing an OLED display substrate, including steps of forming a TFT and an OLED driven by the TFT on a base substrate. The OLED includes, in a direction away from the base substrate, an anode, an organic layer and a cathode in turn. The method further includes a step of forming an auxiliary electrode connected in parallel to the cathode.

[0016] Alternatively, the auxiliary electrode is formed together with a source/drain electrode or a gate electrode of the TFT by a single patterning process.

[0017] Alternatively, the auxiliary electrode is formed together with the anode by a single patterning process.

[0018] Alternatively, the auxiliary electrode includes a plurality of auxiliary sub-electrodes.

[0019] Alternatively, the plurality of auxiliary sub-electrodes is arranged at different layers.

[0020] Alternatively, the step of forming the auxiliary electrode connected in parallel to the cathode includes forming a first auxiliary sub-electrode and a second auxiliary sub-electrode of the auxiliary electrode, respectively, the first auxiliary sub-electrode being connected to the second auxiliary sub-electrode via a first connection hole, the first auxiliary sub-electrode being formed together with the source/drain electrode or gate electrode of the TFT or the anode by a single patterning process, the second auxiliary sub-electrode being formed together with the source/drain electrode or gate electrode of the TFT or the anode by a single patterning process, and the first auxiliary sub-electrode being arranged at a layer different from the second auxiliary sub-electrode.

[0021] Alternatively, the method includes steps of: forming the gate electrode on the base substrate; forming a gate insulating layer; forming an active layer; forming the source/drain electrode and the first auxiliary sub-electrode by a

single patterning process; forming a planarization protection layer and forming the first connection hole penetrating through the planarization protection layer; forming the anode and the second auxiliary sub-electrode by a single patterning process, the second auxiliary sub-electrode being connected to the first auxiliary sub-electrode via the first connection hole; forming a pixel definition layer by which at least a portion of the anode and at least a portion of the second auxiliary sub-electrode are not covered; forming an organic layer; and forming the cathode connected to the second auxiliary sub-electrode.

[0022] Alternatively, the method further includes forming a second connection hole penetrating through the planarization protection layer, the anode being connected to the drain electrode via the second connection hole.

[0023] Alternatively, the method further includes forming a low level line while forming the source/drain electrode and the first auxiliary sub-electrode by a single patterning process, the low level line being connected to the first auxiliary sub-electrode and the cathode.

[0024] Alternatively, the method further includes forming a third connection hole, the first auxiliary sub-electrode being connected to the cathode via the third connection hole.

[0025] In yet another aspect, the present disclosure provides in one embodiment a display device including the above-mentioned OLED display substrate.

[0026] According to the embodiments of the present disclosure, through the auxiliary electrode connected in parallel to the cathode, it is able to reduce a resistance of the cathode, and prevent the occurrence of an IR drop of the OLED display device due to a large resistance of the cathode, thereby to improve the image quality of the OLED display device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] FIG. 1 is a schematic view showing an existing top-emission OLED display substrate;

[0028] FIG. 2 is a schematic view showing an OLED display substrate according to one embodiment of the present disclosure;

[0029] FIG. 3 is a schematic view showing the arrangement of lines of the OLED display substrate according to one embodiment of the present disclosure; and

[0030] FIGS. 4-1 to 4-10 are flow charts of a method for manufacturing the OLED display substrate according to one embodiment of the present disclosure.

DETAILED DESCRIPTION

[0031] In order to make the objects, the technical solutions and the advantages of the present disclosure more apparent, the present disclosure will be described hereinafter in conjunction with the drawings and embodiments.

[0032] The present disclosure provides in one embodiment an OLED display substrate, which includes a base substrate, and a TFT and an OLED driven by the TFT on the base substrate. The OLED includes, in a direction away from the base substrate, an anode, an organic layer and a cathode in turn. In order to reduce a resistance of the cathode, the OLED display substrate further includes an auxiliary electrode connected in parallel to the cathode.

[0033] Through the auxiliary electrode connected in parallel to the cathode, it is able to reduce the resistance of the cathode, and prevent the occurrence of an IR drop of an

OLED display device due to a large resistance of the cathode, thereby to improve the image quality of the OLED display device.

[0034] The auxiliary electrode may be of various structures, which will be illustrated hereinafter.

[0035] In the embodiment of the present disclosure, the auxiliary electrode may be manufactured by a separate patterning process, and it may be arranged above or below the cathode. Furthermore, the auxiliary electrode may be arranged on or under, and in contact with, the cathode. Alternatively, there may be some other layer(s) arranged between the auxiliary electrode and the cathode, and at this time, it is connected in parallel to the cathode via a connection hole or a low level line. The auxiliary electrode may be made of a metallic material with a low resistance, e.g., Al, Ag, Au, Ti, Mo, or an alloy thereof.

[0036] In order to reduce the process steps, in the embodiment of the present disclosure, the auxiliary electrode may also be formed together with one layer from among the OLED by a single patterning process.

[0037] Alternatively, the auxiliary electrode may be arranged at a layer, and made of a material, identical to a source/drain electrode or a gate electrode of the TFT or the anode.

[0038] In the embodiment of the present disclosure, the auxiliary electrode is arranged at one layer from among the OLED display substrate, and in the some other embodiments, the auxiliary electrode may also consist of auxiliary sub-electrodes arranged at least two layers.

[0039] Alternatively, the auxiliary electrode may include a first auxiliary sub-electrode and a second auxiliary sub-electrode connected to each other via a first connection hole. The first auxiliary sub-electrode may be arranged at a layer, and made of a material, identical to the source/drain electrode or the gate electrode of the TFT or the anode. The second auxiliary sub-electrode may be arranged at a layer, and made of a material, identical to the source/drain electrode or the gate electrode of the TFT or the anode. The first auxiliary sub-electrode is arranged at a layer different from the second auxiliary sub-electrode.

[0040] In the embodiment of the present disclosure, the auxiliary electrode includes two auxiliary sub-electrodes arranged at different layers, and in some other embodiments, the auxiliary electrode may also include three or more auxiliary sub-electrodes arranged at different layers.

[0041] The OLED display substrate may be a top-emission OLED display substrate. Usually, in the top-emission OLED display substrate, the cathode is made of a transparent or translucent conductive material.

[0042] Referring to FIG. 2, which is a schematic view of the OLED display substrate according to one embodiment of the present disclosure, the OLED display substrate specifically includes: the base substrate 101, the gate electrode 102, a gate insulating layer 103, an active layer 104, the source electrode 1051, the drain electrode 1052, the first auxiliary sub-electrode 105', a planarization protection layer 106, the anode 107, the second auxiliary sub-electrode 107', a pixel definition layer 108, an organic layer 109, the cathode 110, and a package protection layer 111. The source electrode 1051, the drain electrode 1052 and the first auxiliary sub-electrode 105' are arranged at an identical layer and made of an identical material, and the first auxiliary sub-electrode 105' is formed together with the source electrode 1051 and the drain electrode 1052 by a single patterning process so as

to reduce the process steps. The planarization protection layer **106** is provided with the first connection hole and second connection hole penetrating therethrough, and the planarization protection layer **106** may consist of a passivation layer and a planarization layer. The second connection hole is at a position corresponding to the drain electrode **1052** and the first connection hole is at a position corresponding to the first auxiliary sub-electrode **105'**. The anode **107** and the second auxiliary sub-electrode **107'** are arranged at an identical layer and made of an identical material. The second auxiliary sub-electrode **107'** is connected to the first auxiliary sub-electrode **105'** via the first connection hole, and it is formed together with the anode **107** by a single patterning process so as to reduce the process steps. The anode **107** is connected to the drain electrode **1052** via the second connection hole. The pixel definition layer **108** is configured to define different pixel units, and at least a portion of the anode **107** and at least a portion of the second auxiliary sub-electrode **107'** are not covered by the pixel definition layer **108**. The organic layer **109** covers the portion of the anode **107** that is not covered by the pixel definition layer **108**. Because at least a portion of the second auxiliary sub-electrode **107'** is not covered by the pixel definition layer **108**, the entire layer of the cathode **110** may be directly connected to the portion of the second auxiliary sub-electrode **107'** that is not covered by the pixel definition layer.

[0043] In the embodiment of the present disclosure, the gate electrode **102**, the gate insulating layer **103**, the active layer **104**, the source electrode **1051** and the drain electrode **1052** form the TFT, and the anode **107**, the organic layer **109** and the cathode **110** form the OLED.

[0044] Referring to FIG. 3, which is a schematic view showing the arrangement of lines of the OLED display substrate according to one embodiment of the present disclosure, **102'** represents a gate line arranged at a layer and made of a material identical to the gate electrode **102**, **1053** represents a data line, **1054** represents the low level line, and **1055** represents a high level line. The data line **1053**, the low level line **1054**, the high level line **1055**, the source electrode **1051**, the drain electrode **1052** and the first auxiliary sub-electrode **105'** are arranged at an identical layer and made of an identical material, and the low level line **1054** is connected to the first auxiliary sub-electrode **105'** and the cathode **110** (to be specific, the low level line **1054** is connected to the cathode via the connection hole), so as to provide a circuit where the first auxiliary sub-electrode **105'** is connected in parallel to the cathode **110**.

[0045] Of course, in the other embodiments of the present disclosure, the first auxiliary sub-electrode **105'** may not be connected to the low level line **1054**, and instead, it may be directly connected in parallel to the cathode **110** via the connection hole, so as to reduce the resistance of the cathode **110**.

[0046] In the embodiment of the present disclosure, the auxiliary electrode connected in parallel to the cathode includes two auxiliary sub-electrodes arranged at different layers. One of them is arranged at a layer and made of a material identical to the source electrode **1051** and the drain electrode **1052**, and the other is arranged at a layer and made of a material identical to the anode **107**. The two auxiliary sub-electrodes are connected in parallel to the cathode, so as to reduce the resistance of the cathode, thereby to prevent the occurrence of IR drop.

[0047] The present disclosure further provides in one embodiment a method for manufacturing an OLED display substrate, which includes steps of forming a TFT and an OLED driven by the TFT on a base substrate. The OLED includes, in a direction away from the base substrate, an anode, an organic layer and a cathode in turn. In order to reduce a resistance of the cathode, the method further includes a step of forming an auxiliary electrode connected in parallel to the cathode.

[0048] Through the auxiliary electrode connected in parallel to the cathode, it is able to reduce the resistance of the cathode, thereby to prevent the occurrence of IR drop of an OLED display device due to a large resistance of the cathode.

[0049] In the embodiment of the present disclosure, the auxiliary electrode may be manufactured by a separate patterning process. In order to reduce the process steps, the auxiliary electrode may also be formed together with one layer from among the OLED by a single patterning process.

[0050] Alternatively, the auxiliary electrode may be formed together with a source/drain electrode or a gate electrode of the TFT or the anode by a single patterning process.

[0051] In the embodiment of the present disclosure, the auxiliary electrode may be merely formed at one layer from among the OLED display substrate, and in some other embodiments, the auxiliary electrode may also consist of at least two auxiliary sub-electrodes arranged at different layers of the OLED display substrate.

[0052] Alternatively, the step of forming the auxiliary electrode connected in parallel to the cathode includes forming a first auxiliary sub-electrode and a second auxiliary sub-electrode of the auxiliary electrode, respectively, the first auxiliary sub-electrode being connected to the second auxiliary sub-electrode via a first connection hole, the first auxiliary sub-electrode being formed together with the source/drain electrode or gate electrode of the TFT or the anode by a single patterning process, the second auxiliary sub-electrode being formed together with the source/drain electrode or gate electrode of the TFT or the anode by a single patterning process, and the first auxiliary sub-electrode being arranged at a layer different from the second auxiliary sub-electrode.

[0053] In the embodiment of the present disclosure, the auxiliary electrode includes two auxiliary sub-electrodes arranged at different layers, and in some other embodiments, the auxiliary electrode may also include three or more auxiliary sub-electrodes arranged at different layers.

[0054] The present disclosure further provides in one embodiment a display device including the above-mentioned OLED display substrate.

[0055] Referring to FIGS. 4-1 to 4-10, which are flow charts of the method for manufacturing the OLED display substrate, the method specifically includes the following steps.

[0056] Step S41: referring to FIG. 4-1, forming the gate electrode **102** on the base substrate **101**.

[0057] Step S42: referring to FIG. 4-2, forming the gate insulating layer **103**.

[0058] Step S43: referring to FIG. 4-3, forming the active layer **104**.

[0059] Step S44: referring to FIG. 4-4, forming the source electrode **1051**, the drain electrode **1052** and the first auxiliary sub-electrode **105'** by a single patterning process.

[0060] Step S45: referring to FIG. 4-5, forming the planarization protection layer 106, and forming the first connection hole and the second connection hole penetrating through the planarization protection layer 106.

[0061] Step S46: referring to FIG. 4-6, forming the anode 107 and the second auxiliary sub-electrode 107' by a single patterning process. The second auxiliary sub-electrode 107' is connected to the first auxiliary sub-electrode 105' via the first connection hole, and the anode 107 is connected to the drain electrode 1052 via the second connection hole.

[0062] Step S47: referring FIG. 4-7, forming the pixel definition layer 108 by which at least a portion of the anode 107 and at least a portion of the second auxiliary sub-electrode 107' are not covered.

[0063] Step S48: referring to FIG. 4-8, forming the organic layer 109 covering the portion of the anode 107 that is not covered by the pixel definition layer 108. In the embodiment of the present disclosure, the organic layer 109 may be manufactured by fine metal mask (FMM) or semi-open mask.

[0064] Step S49: referring to FIG. 4-9, forming the cathode 110. Because at least a portion of the second auxiliary sub-electrode 107' is not covered by the pixel definition layer 108, the entire layer of the cathode 110 is directly connected to the second auxiliary sub-electrode 107' that is not covered by the pixel definition layer. In the embodiment of the present disclosure, a layer of conductive material is deposited by open mask, so as to form the cathode 110.

[0065] Step S410: referring to FIG. 4-10, forming the package protection layer 111.

[0066] In Step S44, the low level line (not shown) may also be formed while forming the source/drain electrode and the first auxiliary sub-electrode by a single patterning process. The low level line is connected to the first auxiliary sub-electrode and the cathode, so as to provide a circuit where the auxiliary electrode is connected in parallel to the cathode.

[0067] The above are merely the preferred embodiments of the present disclosure. It should be appreciated that, a person skilled in the art may make further modifications and improvements without departing from the principle of the present disclosure, and these modifications and improvements shall also fall within the scope of the present disclosure.

What is claimed is:

1. An organic light-emitting diode (OLED) display substrate, comprising a base substrate, and a thin film transistor (TFT) and an OLED driven by the TFT on the base substrate, the OLED comprising, in a direction away from the base substrate, an anode, an organic layer and a cathode in turn, wherein the OLED display substrate further comprises an auxiliary electrode connected in parallel to a part of the cathode.

2. The OLED display substrate according to claim 1, wherein the auxiliary electrode is arranged at a layer, and made of a material, identical to a source/drain electrode or a gate electrode of the TFT.

3. The OLED display substrate according to claim 1, wherein the auxiliary electrode is arranged at a layer, and made of a material, identical to the anode.

4. The OLED display substrate according to claim 1, wherein the auxiliary electrode comprises a plurality of auxiliary sub-electrodes.

5. The OLED display substrate according to claim 4, wherein the plurality of auxiliary sub-electrodes is arranged at different layers.

6. The OLED display substrate according to claim 1, wherein the auxiliary electrode comprises a first auxiliary sub-electrode and a second auxiliary sub-electrode connected to each other via a first connection hole, the first auxiliary sub-electrode is arranged at a layer, and made of a material, identical to the source/drain electrode or the gate electrode of the TFT or the anode, the second auxiliary sub-electrode is arranged at a layer, and made of a material, identical to the source/drain electrode or the gate electrode of the TFT or the anode, and the first auxiliary sub-electrode is arranged at a layer different from the second auxiliary sub-electrode.

7. The OLED display substrate according to claim 6, comprising:

- the base substrate;
- the gate electrode;
- a gate insulating layer;
- an active layer;
- the source/drain electrode and the first auxiliary sub-electrode arranged at an identical layer and made of an identical material;
- a planarization protection layer provided with the first connection hole penetrating therethrough;
- the anode and the second auxiliary sub-electrode arranged at an identical layer and made of an identical material, the second auxiliary sub-electrode being connected to the first auxiliary sub-electrode via the first connection hole;
- a pixel definition layer by which at least a portion of the anode and at least a portion of the second auxiliary sub-electrode are not covered;
- an organic layer; and
- the cathode connected to the second auxiliary sub-electrode.

8. The OLED display substrate according to claim 7, wherein the anode is connected to the drain electrode via a second connection hole penetrating through the planarization protection layer.

9. The OLED display substrate according to claim 7, further comprising:

- a low level line arranged at a layer, and made of a material, identical to the first auxiliary sub-electrode, wherein the low level line is connected to the first auxiliary sub-electrode and the cathode.

10. The OLED display substrate according to claim 7, wherein the first auxiliary sub-electrode is connected to the cathode via a third connection hole.

11. A method for manufacturing an organic light-emitting diode (OLED), comprising steps of forming a thin film transistor (TFT) and an OLED driven by the TFT on a base substrate, the OLED comprising, in a direction away from the base substrate, an anode, an organic layer and a cathode in turn, wherein the method further comprises a step of forming an auxiliary electrode connected in parallel to a part of the cathode.

12. The method according to claim 11, wherein the auxiliary electrode is formed together with a source/drain electrode or a gate electrode of the TFT by a single patterning process.

13. The method according to claim **11**, wherein the auxiliary electrode is formed together with the anode by a single patterning process.

14. The method according to claim **11**, wherein the auxiliary electrode comprises a plurality of auxiliary sub-electrodes, wherein the plurality of auxiliary sub-electrodes is arranged at different layers.

15. (canceled)

16. The method according to claim **11**, wherein the step of forming the auxiliary electrode connected in parallel to a part of the cathode includes forming a first auxiliary sub-electrode and a second auxiliary sub-electrode of the auxiliary electrode, respectively, the first auxiliary sub-electrode being connected to the second auxiliary sub-electrode via a first connection hole, the first auxiliary sub-electrode being formed together with the source/drain electrode or gate electrode of the TFT or the anode by a single patterning process, the second auxiliary sub-electrode being formed together with the source/drain electrode or gate electrode of the TFT or the anode by a single patterning process, and the first auxiliary sub-electrode being arranged at a layer different from the second auxiliary sub-electrode.

17. The method according to claim **17**, comprising steps of:

- forming the gate electrode on the base substrate;
- forming a gate insulating layer;
- forming an active layer;
- forming the source/drain electrode and the first auxiliary sub-electrode by a single patterning process;

- forming a planarization protection layer and forming the first connection hole penetrating through the planarization protection layer;

- forming the anode and the second auxiliary sub-electrode by a single patterning process, the second auxiliary sub-electrode being connected to the first auxiliary sub-electrode via the first connection hole;

- forming a pixel definition layer by which at least a portion of the anode and at least a portion of the second auxiliary sub-electrode are not covered;

- forming an organic layer; and

- forming the cathode connected to the second auxiliary sub-electrode.

18. The method according to claim **17**, further comprising forming a second connection hole penetrating through the planarization protection layer, wherein the anode is connected to the drain electrode via the second connection hole.

19. The method according to claim **17**, further comprising forming a low level line while forming the source/drain electrode and the first auxiliary sub-electrode by a single patterning process, wherein the low level line is connected to the first auxiliary sub-electrode and the cathode.

20. The method according to claim **17**, further comprising forming a third connection hole, wherein the first auxiliary sub-electrode is connected to the cathode via the third connection hole.

21. A display device, comprising the OLED display substrate according to claim **1**.

* * * * *

专利名称(译)	有机发光二极管显示基板，其制造方法和显示装置		
公开(公告)号	US20160359136A1	公开(公告)日	2016-12-08
申请号	US14/892883	申请日	2015-03-25
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	SONG YOUNGSUK		
发明人	SONG, YOUNGSUK		
IPC分类号	H01L51/52 H01L27/32		
CPC分类号	H01L51/5228 H01L2227/323 H01L27/3258 H01L27/3246 H01L27/3248		
优先权	201410708390.8 2014-11-28 CN		
其他公开文献	US10205117		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供了一种OLED显示基板及其制造方法和显示装置。OLED显示基板包括基底基板，以及由基底基板上的TFT驱动TFT和OLED。OLED在远离基底基板的方向上依次包括阳极，有机层和阴极。OLED显示基板还包括与阴极的一部分并联连接的辅助电极。

