




US 20150014647A1

(19) **United States**(12) **Patent Application Publication**
Cho et al.(10) **Pub. No.: US 2015/0014647 A1**(43) **Pub. Date: Jan. 15, 2015**(54) **ORGANIC LIGHT EMITTING DISPLAY
APPARATUS****Publication Classification**(71) Applicant: **Samsung Display Co., Ltd.,**
Yongin-City (KR)(72) Inventors: **Sung-Ho Cho,** Yongin-City (KR);
Yong-Je Jeon, Yongin-City (KR)(73) Assignee: **Samsung Display Co., Ltd.,**
Yongin-City (KR)(21) Appl. No.: **14/151,741**(22) Filed: **Jan. 9, 2014**(30) **Foreign Application Priority Data**

Jul. 12, 2013 (KR) 10-2013-0082449

(51) **Int. Cl.**
H01L 51/52 (2006.01)(52) **U.S. Cl.**
CPC **H01L 51/5237** (2013.01)
USPC **257/40**(57) **ABSTRACT**

An organic light emitting display apparatus having improved impact resistance includes a bottom substrate including a display area and a peripheral area surrounding the display area; a plurality of organic light emitting devices arranged in the display area of the bottom substrate; a top substrate corresponding to the bottom substrate; a sealing member, which is arranged in the peripheral area of the bottom substrate and attaches the bottom substrate to the top substrate; and an anti-impact member, which is arranged in the peripheral area of the bottom substrate, is apart from the sealing member, and protrudes from the bottom substrate toward the top substrate.

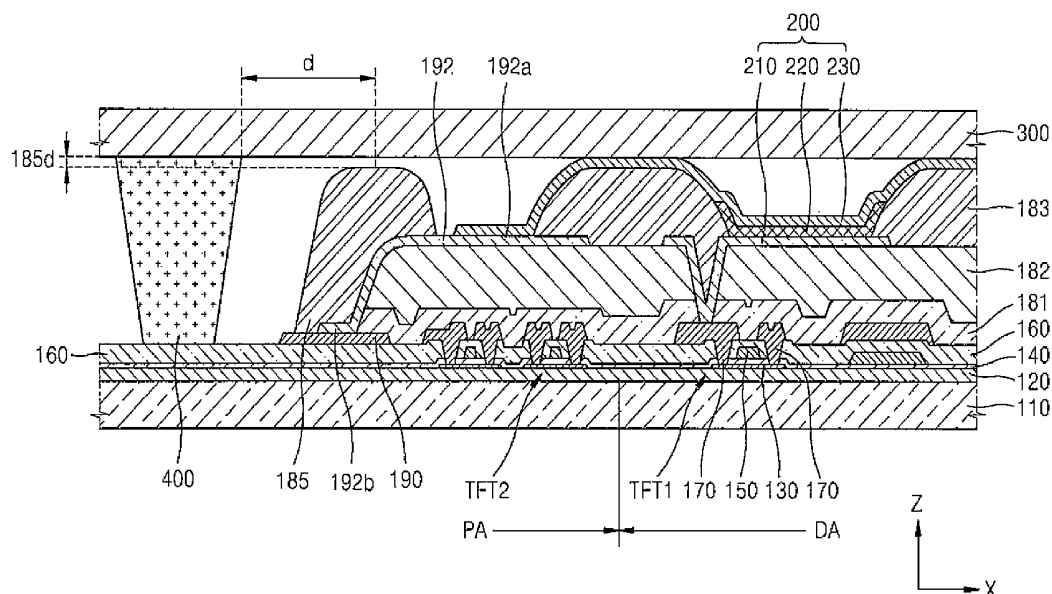

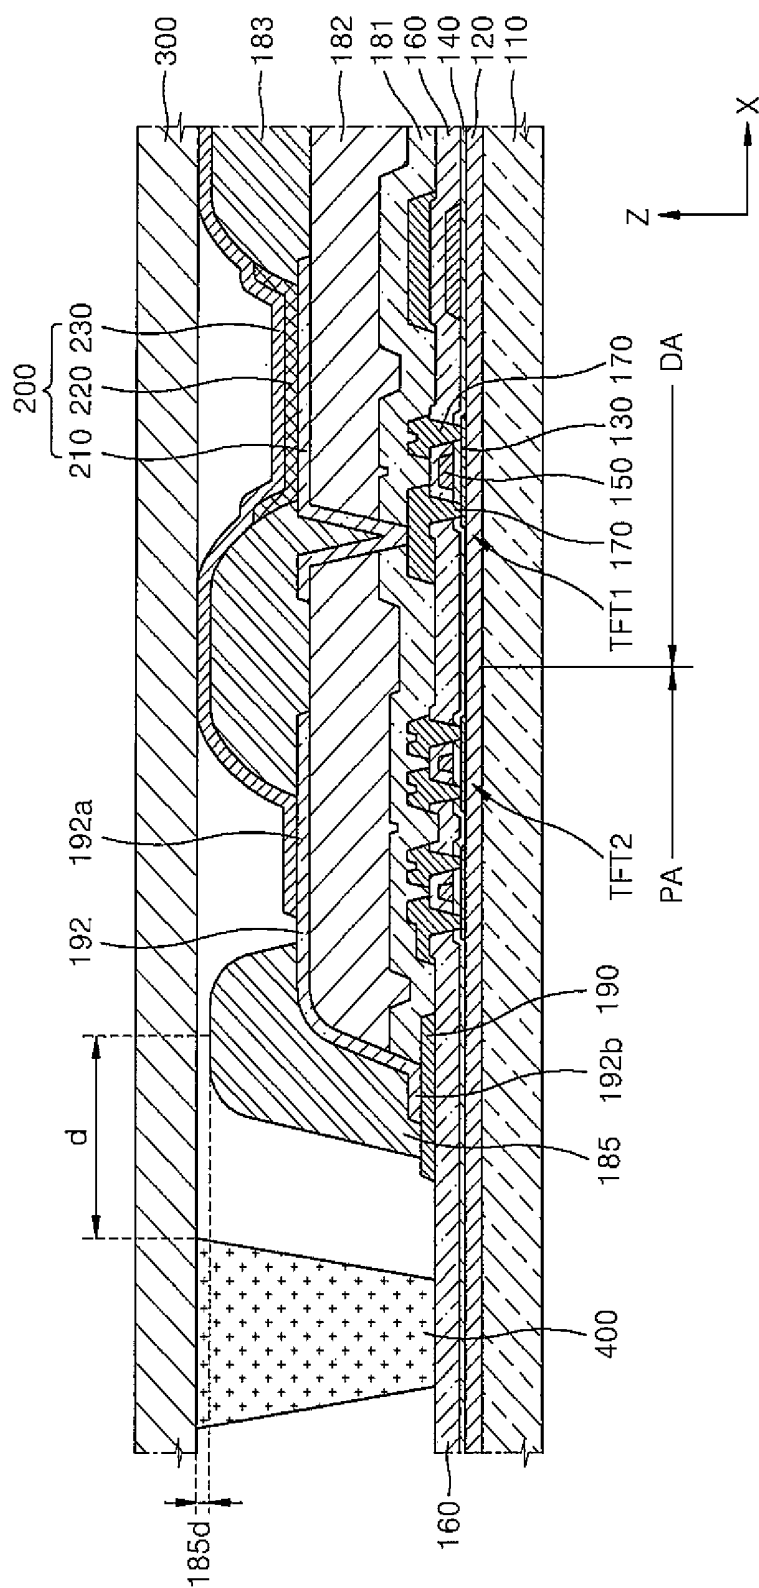


FIG. 1

FIG. 2

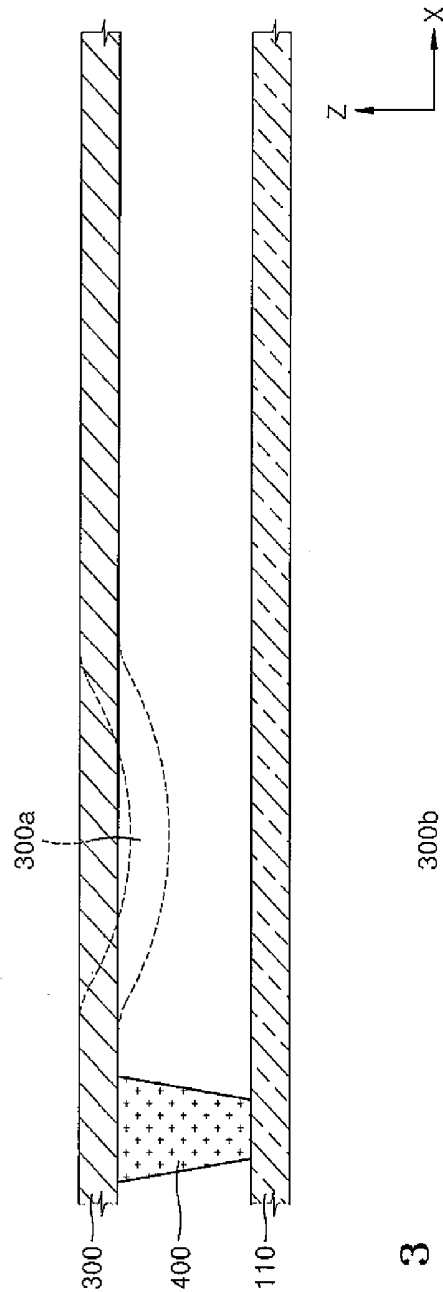


FIG. 3

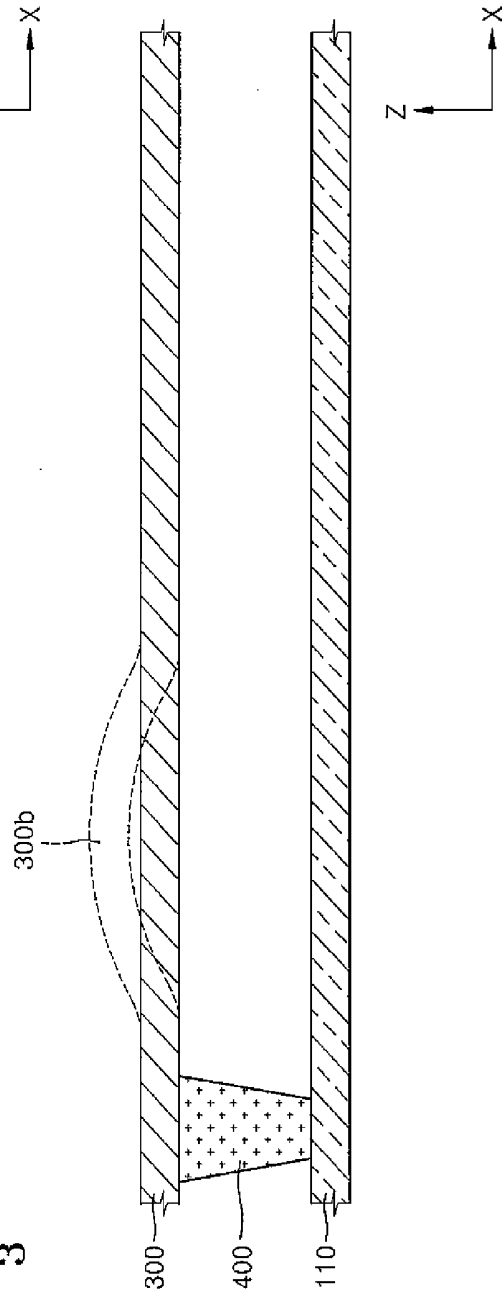


FIG. 4

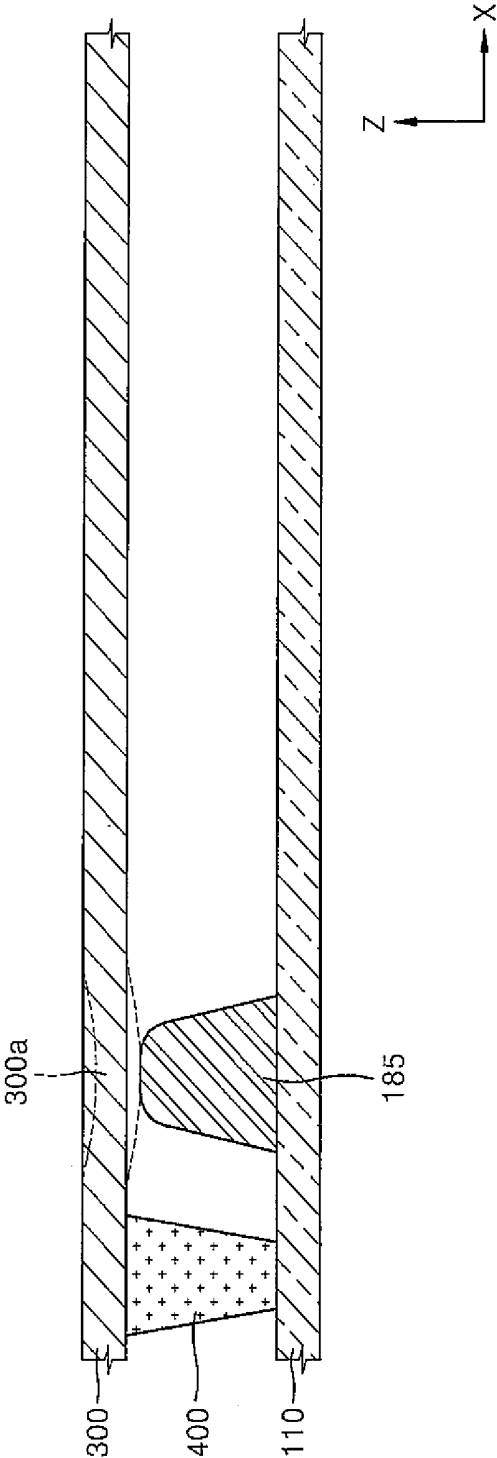


FIG. 7

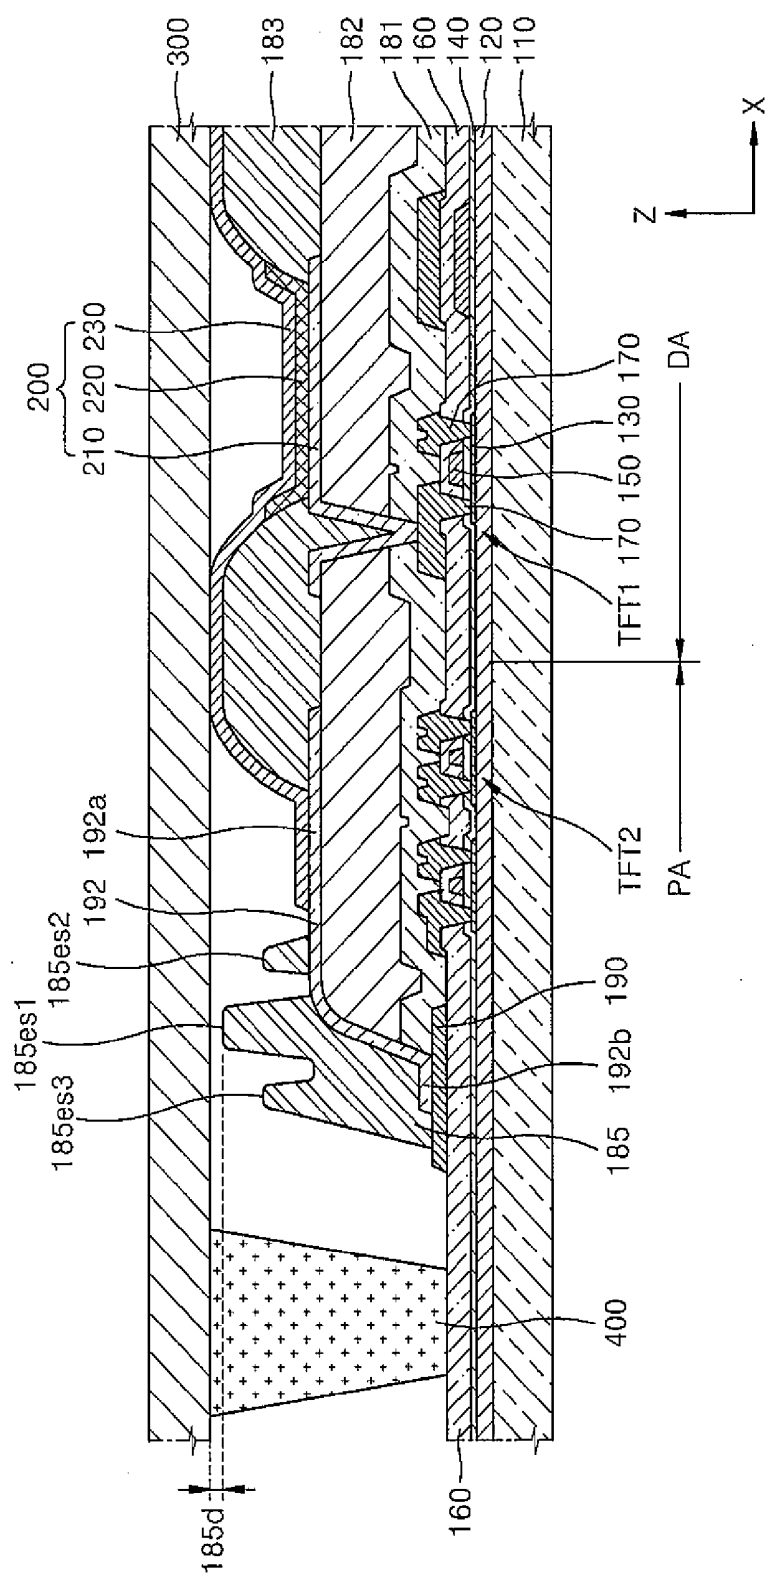


FIG. 10


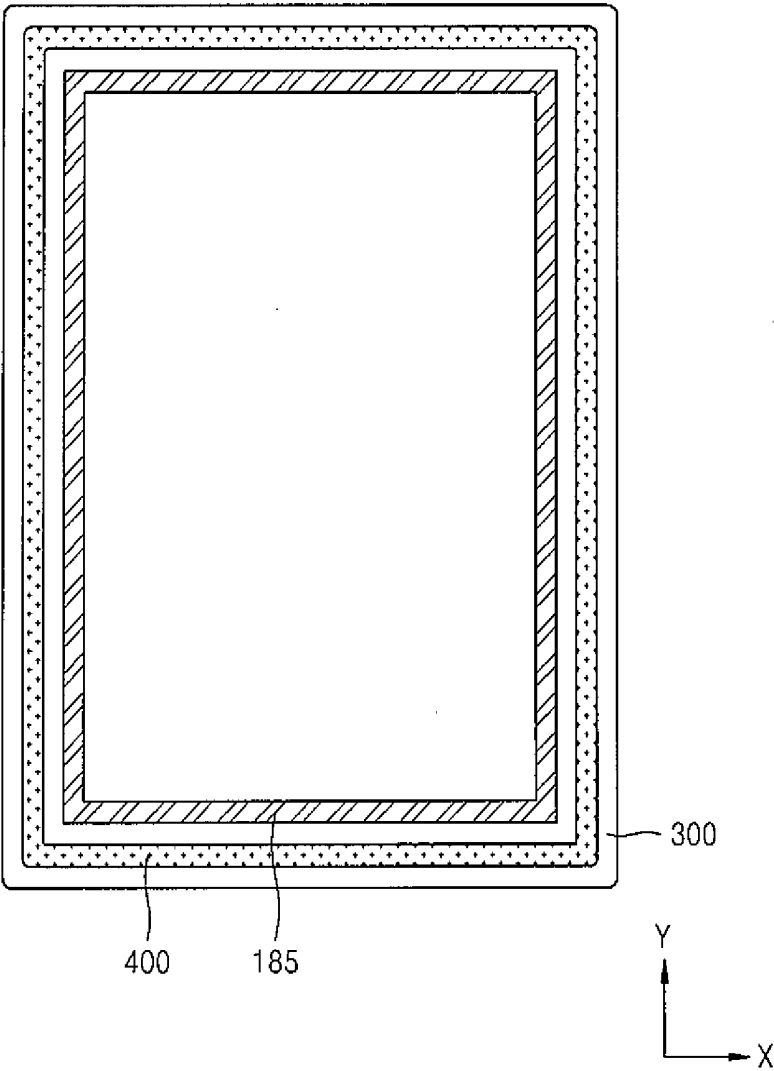


FIG. 11

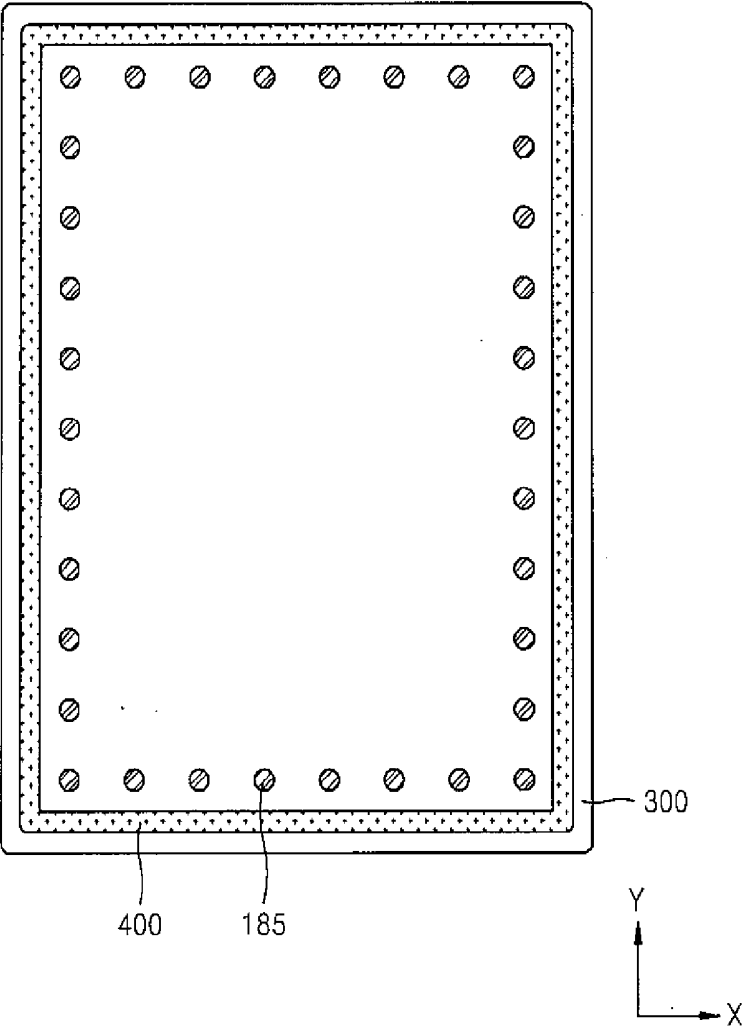

ORGANIC LIGHT EMITTING DISPLAY APPARATUS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2013-0082449, filed on Jul. 12, 2013, in the Korean Intellectual Property Office, the content of which is incorporated herein in its entirety by reference.

BACKGROUND

[0002] 1. Field

[0003] Aspects of the present invention are directed toward an organic light emitting display apparatus, and more particularly, to an organic light emitting display apparatus having improved impact resistance.

[0004] 2. Description of the Related Art

[0005] Generally, an organic light emitting display apparatus is fabricated by forming organic light emitting devices on a bottom substrate and attaching a top substrate to the bottom substrate, such that the organic light emitting devices are arranged therebetween. Such an organic light emitting display apparatus is used as a display unit of a small product (such as a mobile phone) or a display unit of a large product (such as a television).

[0006] In such an organic light emitting display apparatus, a bottom substrate is attached to a top substrate via a sealing member.

[0007] However, such an organic light emitting display apparatus in the related art is easily damaged by external impacts.

SUMMARY

[0008] Aspects of the present invention are directed toward an organic light emitting display apparatus having improved impact resistance.

[0009] According to an embodiment of the present invention, an organic light emitting display apparatus includes a bottom substrate having a display area and a peripheral area surrounding the display area; a plurality of organic light emitting devices in the display area of the bottom substrate; a top substrate corresponding to the bottom substrate; a sealing member in the peripheral area of the bottom substrate and configured to attach the bottom substrate to the top substrate; and an anti-impact member in the peripheral area of the bottom substrate and apart from the sealing member, the anti-impact member protruding from the bottom substrate toward the top substrate.

[0010] In one embodiment, the plurality of organic light emitting devices include a plurality of pixel electrodes, a counter electrode corresponding to the plurality of pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and includes an emission layer, and a space corresponding to a thickness of the counter electrode is formed between the top substrate and an end surface of the anti-impact member toward the top substrate.

[0011] In one embodiment, the plurality of organic light emitting devices include a plurality of pixel electrodes, a counter electrode corresponding to the plurality of pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and includes an

emission layer, the organic light emitting display apparatus further includes a pixel defining layer in the display area of the bottom substrate and configured to cover edge portions of the plurality of pixel electrodes to expose the center portions of the plurality of pixel electrodes, and a distance between the bottom substrate and an end surface of the anti-impact member toward the top substrate is identical to a distance between the bottom substrate and an end surface of the pixel defining layer toward the top substrate. The anti-impact member includes the same material as the pixel defining layer.

[0012] In one embodiment, the top substrate includes a trench at a position corresponding to the anti-impact member on a surface facing the bottom substrate, and a portion of the anti-impact member toward the top substrate is located inside the trench. The anti-impact member includes a first anti-impact unit and a second anti-impact unit, and the second anti-impact unit is located on the first anti-impact unit, and at least a portion of the second anti-impact unit is located inside the trench of the top substrate. The plurality of organic light emitting devices include a plurality of pixel electrodes, a counter electrode corresponding to the pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and includes an emission layer, the organic light emitting display apparatus further includes a pixel defining layer in the display area of the bottom substrate and configured to cover edge portions of the plurality of pixel electrodes to expose the center portions of the plurality of pixel electrodes, and a distance between the bottom substrate and an end surface of the first anti-impact member toward the top substrate is identical to a distance between the bottom substrate and an end surface of the pixel defining layer toward the top substrate. The first anti-impact unit includes the same material as the pixel defining layer.

[0013] In one embodiment, the plurality of organic light emitting devices include a plurality of pixel electrodes, a counter electrode corresponding to the pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and includes an emission layer, the organic light emitting display apparatus further includes a plurality of thin-film transistors in the display area of the bottom substrate and are electrically connected to the plurality of pixel electrodes, and an electrode power supply line on the same layer as one of the electrodes of the plurality of thin-film transistors, and a connecting unit between the anti-impact member and the bottom substrate, the connecting unit having a first end on the same layer as the plurality of pixel electrodes and contacting the counter electrode, and a second end contacting the electrode power supply line.

[0014] In one embodiment, the electrode power supply line is on the same layer as the source/drain electrodes of the plurality of thin-film transistors. The anti-impact member contacts the electrode power supply line or the connecting unit. The anti-impact member contacts at least one of the electrode power supply line, the connecting unit, and a layer below the electrode power supply line.

[0015] In one embodiment, the anti-impact member surrounds the display area of the bottom substrate. The anti-impact member is discretely located around the display area of the bottom substrate.

[0016] In one embodiment, the anti-impact member includes a first portion having a first width and a second portion having a second width smaller than the first width, and

the first portion is closer to the bottom substrate than the second portion is. The second width is from about 20 μm to about 100 μm .

[0017] In one embodiment, the anti-impact member has an “山”-like cross-sectional shape on a plane perpendicular to the bottom substrate.

[0018] In one embodiment, the anti-impact member includes a first end surface, a second end surface, and a third end surface, the first, second, and third end surfaces facing toward the top substrate and being apart from one another, and a first distance between the bottom substrate to the first end surface is longer than each of a second distance between the bottom substrate and the second end surface and a third distance between the bottom substrate and the third end surface. The second end surface is closer to the display area of the bottom substrate than the first end surface is, and the third end surface is closer to the sealing member than the first end surface is.

[0019] In one embodiment, a distance between an end portion toward the display area of a portion of the sealing member contacting the top substrate and the center of the anti-impact member is within 150 μm .

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The above and other features and enhancements of the present invention will become more apparent by describing in more detail example embodiments thereof with reference to the attached drawings in which:

[0021] FIG. 1 is a schematic sectional view of an organic light emitting display apparatus according to an embodiment of the present invention;

[0022] FIGS. 2 and 3 are schematic diagrams showing that a top substrate is moved by external impact when an anti-impact member does not exist;

[0023] FIG. 4 is a schematic diagram showing that the top electrode is moved by an external impact in the organic light emitting display apparatus of FIG. 1;

[0024] FIG. 5 is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention;

[0025] FIG. 6 is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention;

[0026] FIG. 7 is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention;

[0027] FIG. 8 is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention;

[0028] FIG. 9 is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention;

[0029] FIG. 10 is a schematic sectional plan view of an organic light emitting display apparatus according to another embodiment of the present invention; and

[0030] FIG. 11 is a schematic sectional plan view of an organic light emitting display apparatus according to another embodiment of the present invention.

DETAILED DESCRIPTION

[0031] As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items. Expressions such as “at least one of,” when preceding a list of

elements, modify the entire list of elements and do not modify the individual elements of the list. Further, the use of “may” when describing embodiments of the present invention refers to “one or more embodiments of the present invention.”

[0032] The present invention will now be described more fully with reference to the accompanying drawings, in which example embodiments of the invention are shown. The invention may, however, be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the concept of the invention to those skilled in the art. In the drawings, the thicknesses of layers and regions are exaggerated for clarity.

[0033] In the embodiments below, the x-axis, the y-axis, and the z-axis are not limited to the three axes in the orthogonal coordinates system and may have broader meaning. For example, the x-axis, the y-axis, and the z-axis may be orthogonal to one another or may indicate three directions that are not orthogonal to one another.

[0034] It will also be understood that when a layer is referred to as being “on” another layer or substrate, it can be directly on the other layer or substrate, or intervening layers may also be present.

[0035] FIG. 1 is a schematic sectional view of an organic light emitting display apparatus according to an embodiment of the present invention. As shown in FIG. 1, the organic light emitting display apparatus according to the present embodiment includes a bottom substrate 110, a plurality of organic light emitting devices 200 located on the bottom substrate 110, a top substrate 300, a sealing member 400, and an anti-impact member 185.

[0036] The bottom substrate 110 includes a display area DA and a peripheral area PA surrounding the display area DA. The bottom substrate 110 may be formed of any of various suitable materials including glass materials, metals, and plastic materials. A plurality of thin-film transistors TFT1 are located in the display area DA of the bottom substrate 110, where the organic light emitting devices 200 electrically connected to the plurality of thin-film transistors TFT1 may also be located. In other words, the plurality of organic light emitting devices 200 are located in the display area DA of the bottom substrate 110. Electric connection between the organic light emitting devices 200 and the plurality of thin-film transistors TFT1 may be understood as electric connection between a plurality of pixel electrodes 210 and the plurality of thin-film transistors TFT1. Here, a thin-film transistor TFT2 may be located in the peripheral area PA of the bottom substrate 110. The thin-film transistor TFT2 may be a portion of a circuit unit for controlling electric signals applied into the display area DA, for example.

[0037] The thin-film transistor TFT1 or the thin-film transistor TFT2 includes a semiconductor layer 130 which contains amorphous silicon, polycrystalline silicon, or an organic semiconductor material; a gate electrode 150; and source/drain electrodes 170. On the bottom substrate 110, a buffer layer 120 that is formed of silicon oxide or silicon nitride may be located on the bottom substrate 110 to planarize the top surface of the bottom substrate 110 or to prevent permeation of impurities into the semiconductor layer 130, and the semiconductor layer 130 may be located on the buffer layer 120.

[0038] The gate electrode 150 is located on the semiconductor layer 130. The source/drain electrodes 170 electrically communicate with the semiconductor layer 130 according to

signals applied to the gate electrode **150**. The gate electrode **150** may be formed as a single layer or a multi-layer containing at least one of aluminium (Al), platinum (Pt), palladium (Pd), silver (Ag), magnesium (Mg), gold (Au), nickel (Ni), neodymium (Nd), iridium (Ir), chrome (Cr), lithium (Li), calcium (Ca), molybdenum (Mo), titanium (Ti), tungsten (W), and copper (Cu), selected in consideration of adherence to an adjacent layer, surface planarity of a layer to be stacked thereon, and processability. Here, to secure the insulation between the semiconductor layer **130** and the gate electrode **150**, a gate insulation layer **140** formed of silicon oxide and/or silicon nitride may be interposed between the semiconductor layer **130** and the gate electrode **150**.

[0039] An interlayer insulation layer **160** may be located on the gate electrode **150**, where the interlayer insulation layer **160** may be formed as a single layer or a multi-layer containing silicon oxide or silicon nitride.

[0040] The source/drain electrodes **170** are located on the interlayer insulation layer **160**. The source/drain electrodes **170** are electrically connected to the semiconductor layer **130** via contact holes formed in the interlayer insulation layer **160** and the gate insulation layer **140**. The source/drain electrodes **170** may be formed as a single layer or a multi-layer containing at least one of aluminium (Al), platinum (Pt), palladium (Pd), silver (Ag), magnesium (Mg), gold (Au), nickel (Ni), neodymium (Nd), iridium (Ir), chrome (Cr), lithium (Li), calcium (Ca), molybdenum (Mo), titanium (Ti), tungsten (W), and copper (Cu), selected in consideration of conductivity.

[0041] To protect the thin-film transistor TFT1 and/or the thin-film transistor TFT2 having the structure as described above, a first insulation layer **181**, which is a protection layer covering the thin-film transistor TFT1 and/or the thin-film transistor TFT2, may be arranged. The first insulation layer **181** may be formed of an inorganic material, such as a silicon oxide, a silicon nitride, or a silicon oxynitride. Although FIG. 1 shows that the first insulation layer **181** has a single layer structure, various suitable modifications may be made therein, e.g., the first insulation layer **181** may have a multi-layer structure.

[0042] If necessary, a second insulation layer **182** may be located on the first insulation layer **181**. For example, as shown in FIG. 1, if the organic light emitting devices **200** are located on the thin-film transistors TFT1, the second insulation layer **182** may be arranged as a planarizing layer for substantially planarizing the top surface of the first insulation layer **181** covering the thin-film transistors TFT1. The second insulation layer **182** may be formed of an acrylic-based organic material or benzocyclobutene (BCB). Although FIG. 1 shows that the second insulation layer **182** has a single layer structure, various modifications may be made therein, e.g., the second insulation layer **182** may have a multi-layer structure.

[0043] In the display area DA of the bottom substrate **110**, the organic light emitting device **200** including the pixel electrode **210**, a counter electrode **230**, and an intermediate layer **220**, which is located between the pixel electrode **210** and the counter electrode **230** and includes an emission layer, is located on the second insulation layer **182**.

[0044] Openings that exposes at least one of the source/drain electrodes **170** of the thin-film transistor TFT1 are formed in the first insulation layer **181** and the second insulation layer **182**, and the pixel electrode **210**, which contacts one of the source/drain electrodes **170** and is electrically

connected to the thin-film transistor TFT1, is located on the second insulation layer **182**. The pixel electrode **210** may be formed as a (semi-) transparent electrode or a reflective electrode. When the pixel electrode **210** is formed as a (semi-) transparent electrode, the pixel electrode **210** may be formed of ITO, IZO, ZnO, In₂O₃, IGO, or AZO, for example. When the pixel electrode **210** is formed as a reflective electrode, the pixel electrode **210** may include a reflective layer formed of Ag, Mg, Al, Pt, Pd, Au, Ni, Nd, Ir, Cr, or a compound thereof and a layer formed of ITO, IZO, ZnO, In₂O₃, IGO, or AZO. However, the present invention is not limited thereto, and various modifications may be made therein. For example, the pixel electrode **210** may be formed of any of various other suitable materials and may have a single layer structure or a multi-layer structure.

[0045] A third insulation layer **183** may be located on the second insulation layer **182**. The third insulation layer **183** is a pixel defining layer and defines pixels by having openings corresponding to the respective sub-pixels, that is, openings exposing at least the center portions of the pixel electrodes **210**. Furthermore, in a case as shown in FIG. 1, the third insulation layer **183** prevents the formation of arc at an end portion of the pixel electrode **210** by increasing the distance between the end portion of the pixel electrode **210** and the counter electrode **230** above the pixel electrode **210**. The third insulation layer **183** may be formed of an organic material, e.g., polyimide.

[0046] The intermediate layer **220** of the organic light emitting devices **200** may contain a small molecule material or a polymer material. If the intermediate layer **220** contains a small molecule material, the intermediate layer **220** may be formed to include a hole injection layer (HIL), a hole transport layer (HTL), an emission layer (EML), an electron transport layer (ETL), and an electron injection layer (EIL) in a stacked structure, where the small molecule material may include any of various suitable materials including copper phthalocyanine (CuPc), N,N'-Di(naphthalene-1-yl)-N,N'-diphenyl-benzidine (NPB), and tris-8-hydroxyquinoline aluminium (Alq3). The layers may be formed via vacuum deposition, for example.

[0047] If the intermediate layer **220** contains a polymer material, the intermediate layer **220** may generally have a structure including a HTL and an EML. Here, the HTL may be formed of PEDOT, the EML may be formed of a polymer material, such as a poly-phenylenevinylene (PPV) based material or a polyfluorene-based material, via screen printing, inkjet printing, or laser induced thermal imaging (LITI).

[0048] However, the present invention is not limited thereto, and the intermediate layer **220** may have any of various other suitable structures.

[0049] The counter electrode **230** is located above the display area DA, where the counter electrode **230** may be arranged to cover the display area DA as shown in FIG. 1. In other words, the counter electrode **230** may be integrated with the plurality of organic light emitting devices **200** and may correspond to the plurality of pixel electrodes **210** (e.g., as a continuous layer), respectively. The counter electrode **230** may be formed as a (semi-) transparent electrode or a reflective electrode. If the counter electrode **230** is formed as a (semi-) transparent electrode, the counter electrode **230** may include a layer formed of a metal having a small work function, e.g., Li, Ca, LiF/Ca, LiF/Al, Al, Ag, Mg, or a compound thereof, and a (semi-) transparent layer formed of ITO, IZO, ZnO, or In₂O₃. If the counter electrode **230** is formed as a

reflective electrode, the counter electrode **230** may include a layer formed of Li, Ca, LiF/Ca, LiF/Al, Al, Ag, Mg, or a compound thereof. However, the present invention is not limited thereto, and various modifications may be made therein.

[0050] The top substrate **300** corresponds to the bottom substrate **110** and may be formed of any of various suitable materials including glass materials, metals, and plastic materials. The bottom substrate **110** and the top substrate **300** may be attached to each other via the sealing member **400**. The sealing member **400** may include frit or epoxy. However, the present invention is not limited thereto. The sealing member **400** is located in the peripheral area PA of the bottom substrate **110**.

[0051] Like the sealing member **400**, the anti-impact member **185** is located in the peripheral area PA of the bottom substrate **110** and protrudes from the bottom substrate **110** toward the top substrate **300**. However, the anti-impact member **185** is located apart from the sealing member **400**.

[0052] FIGS. 2 and 3 are schematic diagrams showing that the top substrate **300** is moved by external impact when the anti-impact member **185** does not exist. As shown in FIGS. 2 and 3, if the anti-impact member **185** does not exist, when an external impact is applied, the top substrate **300** of an organic light emitting display apparatus is oscillated as indicated by the reference numerals **300a** and **300b** in FIGS. 2 and 3. Since the oscillation is large, problems including formation of cracks at the top substrate **300** may occur. Particularly, since the third insulation layer **183**, which is a pixel defining layer, is located in the display area DA, no problem may occur in the display area DA. However, oscillation of the top substrate **300** due to an external impact may be large enough to form cracks in the peripheral area PA.

[0053] For example, when an organic light emitting display apparatus is arranged at a portable mobile device and the portable mobile device is dropped to the ground, impact is applied to a corner or an edge of the organic light emitting display apparatus. Such an impact may induce large oscillation of the top substrate **300** in the peripheral area PA, cracks may form at the top substrate **300**, and the cracks of the top substrate **300** may extend to the display area DA.

[0054] However, as shown in FIG. 4, which is a schematic diagram showing movement of the top substrate **300** due to an external impact in the organic light emitting display apparatus of FIG. 1, the anti-impact member **185** is located in the peripheral area PA in the organic light emitting display apparatus according to the present embodiment, and thus oscillation of the top substrate **300** due to an external impact may be effectively reduced. As a result, possible damages to the top substrate **300** due to external impacts may be significantly reduced. In other words, when the top substrate **300** oscillates in a direction toward the bottom substrate **110** due to an external impact, the top substrate **300** contacts the anti-impact member **185**, and thus oscillation of the top substrate **300** may be effectively reduced. As a result, oscillation of the top substrate **300** due to an external impact may be reduced, thereby significantly reducing possible damages to the top substrate **300**.

[0055] Also, an end portion of the anti-impact member **185** toward the top substrate **300** may contact the top substrate **300** or may not contact the top substrate **300** as shown in FIG. 1. In other words, a space **185d** may be formed between the end portion of the anti-impact member **185** toward the top substrate **300** and the top substrate **300**.

[0056] As described above, the third insulation layer **183**, which is a pixel defining layer, exists in the display area DA, and the anti-impact member **185** may have a shape similar to that of the third insulation layer **183**. In more detail, the anti-impact member **185** may be formed concurrently (e.g., simultaneously) when the third insulation layer **183** is formed. In this case, the anti-impact member **185** may contain the same material as the third insulation layer **183**.

[0057] At this point, a distance between the bottom substrate **110** and the end portion of the anti-impact member **185** toward the top substrate **300** may be identical to a distance between the bottom substrate **110** and an end portion of the third insulation layer **183**, which is a pixel defining layer, toward the top substrate **300**. In this case, the counter electrode **230** on the third insulation layer **183**, which is a pixel defining layer, contacts the top substrate **300**, the space **185d** corresponding to the thickness of the counter electrode **230** is formed between the top substrate **300** and the end portion of the anti-impact member **185** toward the top substrate **300**. Here, since the thickness of the counter electrode **230** is about 1000 Å (which is very small), the end portion of the anti-impact member **185** toward the top substrate **300** may be seen or regarded as (almost) contacting the top substrate **300**.

[0058] Also, as shown in FIG. 1, an electrode power supply line **190** and a connecting unit **192** may be interposed between the anti-impact member **185** and the bottom substrate **110**. The electrode power supply line **190** may be located on the same layer as any one of the electrodes included in the plurality of thin-film transistors TFT1 and TFT2. For example, the electrode power supply line **190** may be located on the same layer as the source/drain electrodes **170** included in the plurality of thin-film transistors TFT1 and TFT2. In this case, the electrode power supply line **190** may be formed concurrently (e.g., simultaneously) as the source/drain electrodes **170** are formed, where the electrode power supply line **190** and the source/drain electrodes **170** may be formed of the same material. A first end portion **192a** of the connecting unit **192** may be located on the same layer as the plurality of pixel electrodes **210** and may contact the counter electrode **230**, whereas a second end portion **192b** may contact the electrode power supply line **190**. The connecting unit **192** may be formed concurrently (e.g., simultaneously) as the plurality of pixel electrodes **210**, where the connecting unit **192** and the plurality of pixel electrodes **210** are formed of the same material.

[0059] As described above, the anti-impact member **185** is located in the peripheral area PA of the bottom substrate **110**. The peripheral area PA is a dead space in which image is not displayed. The smaller the dead space is, the larger the display area DA becomes, and thus a high-quality organic light emitting display apparatus having larger display area DA may be embodied.

[0060] If the anti-impact member **185** is located between the electrode power supply line **190** and the sealing member **400**, the peripheral area PA becomes larger inevitably. However, in the organic light emitting display apparatus according to the present embodiment, the anti-impact member **185** is located on the electrode power supply line **190** and/or the connecting unit **192**. In other words, the electrode power supply line **190** and the connecting unit **192** are interposed between the anti-impact member **185** and the bottom substrate **110**. As a result, a high-quality organic light emitting

display apparatus, in which the top substrate **300** is less likely damaged by external impacts and the dead space is small, may be embodied.

[0061] Although FIG. 1 shows that the anti-impact member **185** contacts the electrode power supply line **190** and the connecting unit **192**, the anti-impact member **185** may only contact either the electrode power supply line **190** or the connecting unit **192**. Furthermore, a portion of the anti-impact member **185** may contact a layer located below the electrode power supply line **190** (e.g., the interlayer insulation layer **160**). In other words, the anti-impact member **185** may contact one of the electrode power supply line **190**, the connecting unit **192**, and a layer located below the electrode power supply line **190**.

[0062] Also, a distance d between an end portion toward the display area DA of a portion of the sealing member **400** contacting the top substrate **300** and the center of the anti-impact member **185** may be within 150 μm . As described above with reference to FIGS. 2 through 4, if the top substrate **300** oscillates outside the display area DA due to an external impact, possible damages to the top substrate **300** is reduced by reducing oscillation of the top substrate **300**. If a distance between the sealing member **400** and the anti-impact member **185** is too far, oscillation of the top substrate **300** in an area between the sealing member **400** and the anti-impact member **185** may be large enough to damage the top substrate **300**. Therefore, it is necessary to limit the distance between the sealing member **400** and the anti-impact member **185**. Particularly, since it is necessary to reduce the oscillation of the top substrate **300**, it is necessary to limit the distance d between an end portion toward the display area DA of the portion of the sealing member **400** contacting the top substrate **300** and the center of the anti-impact member **185**.

[0063] After repeated experiments, if the distance d exceeds 150 μm , the possibility of damaging the top substrate **300** in an area between the sealing member **400** and the anti-impact member **185** rapidly increased, in consideration of the general thickness of the top substrate **300** used in an organic light emitting display apparatus. Therefore, in one embodiment, the distance d between an end portion toward the display area DA of the portion of the sealing member **400** contacting the top substrate **300** and the center of the anti-impact member **185** is within 150 μm (i.e., 150 μm or less).

[0064] FIG. 5 is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention. The organic light emitting display apparatus according to the present embodiment is identical to the organic light emitting display apparatus according to the previous embodiment described above with reference to FIG. 1 except for the shape of the anti-impact member **185**.

[0065] The anti-impact member **185** of the organic light emitting display apparatus according to the present embodiment includes a first portion **185a** having a first width W_a and a second portion **185b** having a second width W_b , which is smaller than the first width W_a . Here, the anti-impact member **185** has a structure in which the first portion **185a** is closer to the bottom substrate **110** than the second portion **185b**. Here, as shown in FIG. 5, the third insulation layer **183**, which is a pixel defining layer, may have a similar shape as the anti-impact member **185**.

[0066] As described above, the anti-impact member **185** may be concurrently (e.g., simultaneously) formed as the third insulation layer **183**, which is a pixel defining layer, is

formed, where the anti-impact member **185** and the third insulation layer **183**, which is a pixel defining layer, may be formed of the same material. If necessary, the third insulation layer **183**, which is a pixel defining layer, may have a shape in which the width of a portion toward the top substrate **300** is smaller than the width of a portion toward the bottom substrate **110**, so that a side surface of the third insulation layer has a bent or curved surface. Here, as the anti-impact member **185** is formed to have a similar structure as the third insulation layer **183**, which is a pixel defining layer, ease of fabrication thereof may be significantly improved.

[0067] Here, if at least a portion of the intermediate layer **220** is formed via LITI and a material from a donor film is attached to the top surface of the third insulation layer **183**, which is a pixel defining layer, the third insulation layer **183**, which is a pixel defining layer, may have a shape in which the width of a portion toward the top substrate **300** is smaller than the width of a portion toward the bottom substrate **110** so that a side surface of the third insulation layer has a bent or curved surface as shown in FIG. 5 to minimize or reduce the attachment of the material from the donor film.

[0068] Also, the second width W_b of the second portion **185b** of the anti-impact member **185**, that is, the second width W_b at an end portion of the second portion **185b** toward the first portion **185a** may be from about 20 μm to about 100 μm . If the second width W_b is smaller than 20 μm , the second width W_b of the second portion **185b** becomes too small to provide or maintain sufficient durability, and thus the second portion **185b** may become fragile. Furthermore, if the anti-impact member **185** is located above the electrode power supply line **190** to reduce the dead space, it is difficult to make the second width W_b greater than 100 μm .

[0069] FIG. 6 is a sectional view of an organic light emitting display apparatus according to another embodiment of the present invention. The organic light emitting display apparatus according to the present embodiment is identical to the organic light emitting display apparatus according to the previous embodiment described above with reference to FIG.

1 except that the anti-impact member **185** has a “山”-like cross-sectional shape on a plane (zx plane) perpendicular to the bottom substrate **110**.

[0070] In other words, the anti-impact member **185** includes a first end surface **185es1**, a second end surface **185es2**, and a third end surface **185es3** that face toward the top substrate **300** and are apart from one another. Here, a first distance between the bottom substrate **110** and the first end surface **185es1** is longer than each of a second distance between the bottom substrate **110** and the second end surface **185es2** and a third distance between the bottom substrate **110** and the third end surface **185es3**. Furthermore, the second end surface **185es2** is located closer to the display area DA than the first end surface **185es1** is, and the third end surface **185es3** is located closer to the sealing member **400** than the first end surface **185es1** is.

[0071] When an external impact is applied to the top substrate **300**, the anti-impact member **185** having a shape as described above may effectively absorb impact transmitted to the anti-impact member **185** via the top substrate **300**. In other words, an impact transmitted to the anti-impact member **185** via the first end surface **185es1** is transmitted to the second end surface **185es2** or the third end surface **185es3**, and, since portions nearby the second end surface **185es2** and the third end surface **185es3** are free ends, the corresponding end portions may oscillate without transmitting the impact to other

components and effectively absorb the impact. Here, although not shown in FIG. 6, a portion of the third insulation layer **183**, which is a pixel defining layer, toward the top substrate **300** may have the same shape or a similar shape as that of the portion of the anti-impact member **185** toward the top substrate **300**.

[0072] As shown in FIG. 7, which is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention, a portion of the anti-impact member **185** nearby and under the second end surface **185es2** may be apart from a portion nearby and under the first end surface **185es1** or a portion nearby and under the third end surface **185es3** and may also be located on the connecting unit **192**.

[0073] FIG. 8 is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention. The organic light emitting display apparatus according to the present embodiment is identical to the organic light emitting display apparatus according to the previous embodiment described above with reference to FIG. 1 except that the top substrate **300** has a trench **300c** at a position on a surface of the top substrate **300** facing the bottom substrate **110**, the position corresponding to the anti-impact member **185**, and a portion of the anti-impact member **185** toward the top substrate **300** is located inside the trench **300c** of the top substrate **300**. In this case, the anti-impact member **185** may contact the top substrate **300**.

[0074] When an external impact is applied to the top substrate **300**, the structure as described above may effectively prevent the top substrate **300** from oscillating via the anti-impact member **185**. Particularly, since the anti-impact member **185** is located inside the trench **300c** of the top substrate **300**, the anti-impact member **185** may not only prevent oscillation of the top substrate **300**, but also directly absorb an external impact applied to the top substrate **300**.

[0075] Here, a distance between the bottom substrate **110** and an end surface of the third insulation layer **183** toward the top substrate **300** is different from a distance between the bottom substrate **110** and an end surface of the anti-impact member **185** toward the top substrate **300**. However, if the anti-impact member **185** and the third insulation layer **183**, which is a pixel defining layer, are formed by using a two-tone mask, the anti-impact member **185** and the third insulation layer **183**, which is a pixel defining layer, may be concurrently (e.g., simultaneously) formed of the same material. Here, regardless of the formation of the third insulation layer **183**, the anti-impact member **185** may be formed in a different operation.

[0076] Furthermore, as shown in FIG. 9, which is a schematic sectional view of an organic light emitting display apparatus according to another embodiment of the present invention, when the third insulation layer **183**, which is a pixel defining layer, is formed, a first anti-impact unit **1851** may be concurrently (e.g., simultaneously) formed of the same material, and then a second anti-impact unit **1852** may be further formed on the first anti-impact unit **1851**, such that the anti-impact member **185** includes the first anti-impact unit **1851** and the second anti-impact unit **1852** and a portion of the second anti-impact unit **1852** is located inside the trench of the top substrate **300c** of the top substrate **300**. In this case, a distance between the bottom substrate **110** and an end surface of the first anti-impact unit **1851** toward the top substrate **300** may be identical to a distance between the bottom substrate **110** and an end surface of the third insulation layer **183**, which

is a pixel defining layer, toward the top substrate **300**. The second anti-impact unit **1852** may be formed of the same material or a different organic/inorganic material as the first anti-impact unit **1851**.

[0077] FIG. 10 is a schematic sectional plan view of an organic light emitting display apparatus according to another embodiment of the present invention. As shown in FIG. 10, the anti-impact member **185** may surround the display area DA of the bottom substrate **110**. Furthermore, as shown in FIG. 11, which is a schematic sectional plan view of an organic light emitting display apparatus according to another embodiment of the present invention, the anti-impact member **185** may be discretely located around the display area DA of the bottom substrate **110**. In this case, a material for forming the anti-impact member **185** may be saved.

[0078] The embodiments described above may be mixed (or combined) with one another. For example, as shown in FIG. 8 or FIG. 9, a portion of an end portion of the anti-impact member **185** toward the top substrate **300** is located inside the trench **300c** of the top substrate **300**, the end portion of the anti-impact member **185** toward the top substrate **300** may have a simple protruding shape as shown in FIG. 1, a bent-protruding shape as shown in FIG. 5, or an “山”-like shape as shown in FIG. 6 or FIG. 7.

[0079] According to the above embodiments of the present invention, an organic light emitting display apparatus with improved impact resistance may be embodied. However, the present invention is not limited thereto.

[0080] While the present invention has been particularly shown and described with reference to example embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims, and equivalents thereof.

What is claimed is:

1. An organic light emitting display apparatus comprising: a bottom substrate having a display area and a peripheral area surrounding the display area; a plurality of organic light emitting devices in the display area of the bottom substrate; a top substrate corresponding to the bottom substrate; a sealing member in the peripheral area of the bottom substrate and configured to attach the bottom substrate to the top substrate; and an anti-impact member in the peripheral area of the bottom substrate and apart from the sealing member, the anti-impact member protruding from the bottom substrate toward the top substrate.
2. The organic light emitting display apparatus of claim 1, wherein: the plurality of organic light emitting devices comprise a plurality of pixel electrodes, a counter electrode corresponding to the plurality of pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and comprises an emission layer, and a space corresponding to a thickness of the counter electrode is formed between the top substrate and an end surface of the anti-impact member toward the top substrate.
3. The organic light emitting display apparatus of claim 1, wherein:

the plurality of organic light emitting devices comprise a plurality of pixel electrodes, a counter electrode corresponding to the plurality of pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and comprises an emission layer,

the organic light emitting display apparatus further comprises a pixel defining layer in the display area of the bottom substrate and configured to cover edge portions of the plurality of pixel electrodes to expose center portions of the plurality of pixel electrodes, and

a distance between the bottom substrate and an end surface of the anti-impact member toward the top substrate is identical to a distance between the bottom substrate and an end surface of the pixel defining layer toward the top substrate.

4. The organic light emitting display apparatus of claim 3, wherein the anti-impact member comprises a same material as the pixel defining layer.

5. The organic light emitting display apparatus of claim 1, wherein:

the top substrate has a trench at a position corresponding to the anti-impact member on a surface facing the bottom substrate, and

a portion of the anti-impact member toward the top substrate is located inside the trench.

6. The organic light emitting display apparatus of claim 5, wherein:

the anti-impact member comprises a first anti-impact unit and a second anti-impact unit,

the second anti-impact unit is located on the first anti-impact unit, and

at least a portion of the second anti-impact unit is located inside the trench of the top substrate.

7. The organic light emitting display apparatus of claim 6, wherein:

the plurality of organic light emitting devices comprise a plurality of pixel electrodes, a counter electrode corresponding to the pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and comprises an emission layer,

the organic light emitting display apparatus further comprises a pixel defining layer in the display area of the bottom substrate and configured to cover edge portions of the plurality of pixel electrodes to expose center portions of the plurality of pixel electrodes, and

a distance between the bottom substrate and an end surface of the first anti-impact unit toward the top substrate is identical to a distance between the bottom substrate and an end surface of the pixel defining layer toward the top substrate.

8. The organic light emitting display apparatus of claim 7, wherein the first anti-impact unit comprises a same material as the pixel defining layer.

9. The organic light emitting display apparatus of claim 1, wherein:

the plurality of organic light emitting devices comprise a plurality of pixel electrodes, a counter electrode corresponding to the pixel electrodes, and an intermediate layer between the plurality of pixel electrodes and the counter electrode and comprises an emission layer, the organic light emitting display apparatus further comprises:

a plurality of thin-film transistors in the display area of the bottom substrate and are electrically connected to the plurality of pixel electrodes, and

an electrode power supply line on a same layer as one electrode of the plurality of thin-film transistors, and a connecting unit between the anti-impact member and the bottom substrate, the connecting unit having a first end on a same layer as the plurality of pixel electrodes and contacting the counter electrode and a second end contacting the electrode power supply line.

10. The organic light emitting display apparatus of claim 9, wherein the electrode power supply line is on a same layer as source/drain electrodes of the electrodes of the plurality of thin-film transistors.

11. The organic light emitting display apparatus of claim 9, wherein the anti-impact member contacts the electrode power supply line or the connecting unit.

12. The organic light emitting display apparatus of claim 9, wherein the anti-impact member contacts at least one of the electrode power supply line, the connecting unit, and a layer below the electrode power supply line.

13. The organic light emitting display apparatus of claim 1, wherein the anti-impact member surrounds the display area of the bottom substrate.

14. The organic light emitting display apparatus of claim 1, wherein the anti-impact member is discretely located around the display area of the bottom substrate.

15. The organic light emitting display apparatus of claim 1, wherein the anti-impact member comprises a first portion having a first width and a second portion having a second width smaller than the first width, and

the first portion is closer to the bottom substrate than the second portion is.

16. The organic light emitting display apparatus of claim 15, wherein the second width is from about 20 μm to about 100 μm .

17. The organic light emitting display apparatus of claim 1, wherein the anti-impact member has an “山”-like cross-sectional shape on a plane perpendicular to the bottom substrate.

18. The organic light emitting display apparatus of claim 1, wherein:

the anti-impact member comprises a first end surface, a second end surface, and a third end surface, the first, second, and third end surfaces facing toward the top substrate and being apart from one another, and

a first distance between the bottom substrate and the first end surface is longer than each of a second distance between the bottom substrate and the second end surface and a third distance between the bottom substrate and the third end surface.

19. The organic light emitting display apparatus of claim 18, wherein:

the second end surface is closer to the display area of the bottom substrate than the first end surface is, and the third end surface is closer to the sealing member than the first end surface is.

20. The organic light emitting display apparatus of claim 1, wherein a distance between an end portion toward the display area of a portion of the sealing member contacting the top substrate and a center of the anti-impact member is within 150 μm .

专利名称(译)	有机发光显示装置		
公开(公告)号	US20150014647A1	公开(公告)日	2015-01-15
申请号	US14/151741	申请日	2014-01-09
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	CHO SUNG HO JEON YONG JE		
发明人	CHO, SUNG-HO JEON, YONG-JE		
IPC分类号	H01L51/52		
CPC分类号	H01L51/5237 H01L51/525		
优先权	1020130082449 2013-07-12 KR		
其他公开文献	US9837632		
外部链接	USPTO		

摘要(译)

一种具有改善的抗冲击性的有机发光显示装置，包括：底部基板，包括显示区域和围绕显示区域的外围区域；多个有机发光器件设置在底部基板的显示区域中；顶部基板对应于底部基板；密封构件，设置在底部基板的周边区域中，并将底部基板附接到顶部基板；布置在底部基板的周边区域中的抗冲击构件远离密封构件，并且从底部基板朝向顶部基板突出。

