



US 20180158398A1

(19) **United States**(12) **Patent Application Publication**
XIANG et al.(10) **Pub. No.: US 2018/0158398 A1**(43) **Pub. Date: Jun. 7, 2018**(54) **ORGANIC LIGHT-EMITTING DISPLAY
PANEL, DRIVING METHOD AND DRIVING
DEVICE THEREFOR****Publication Classification**

(51) **Int. Cl.**
G09G 3/22 (2006.01)
H01L 27/32 (2006.01)

(52) **U.S. Cl.**
CPC **G09G 3/22** (2013.01); **G09G 2310/0264**
(2013.01); **G09G 2320/0626** (2013.01); **H01L**
27/3241 (2013.01)

(71) Applicant: **SHANGHAI TIANMA AM-OLED
CO., LTD., SHANGHAI (CN)**(72) Inventors: **Dongxu XIANG, SHANGHAI (CN);**
Yue LI, SHANGHAI (CN); Renyuan
ZHU, SHANGHAI (CN); Yana GAO,
SHANGHAI (CN); Zhonglan CAI,
SHANGHAI (CN)(73) Assignee: **SHANGHAI TIANMA AM-OLED
CO., LTD., SHANGHAI (CN)**(21) Appl. No.: **15/886,858**(22) Filed: **Feb. 2, 2018**(30) **Foreign Application Priority Data**

Aug. 14, 2017 (CN) 201710690526.0

(57) **ABSTRACT**

Provided are an organic light-emitting display panel, a driving method and a driving device therefor. The driving method includes: setting a plurality of brightness levels of the organic light-emitting display panel and a plurality of maximum gray scale brightnesses, and the plurality of maximum gray scale brightnesses include a first maximum gray scale brightness corresponding to a maximum brightness level of the organic light-emitting display panel, and an effective pulse duty cycle of a light-emitting control signal for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle; determining a target brightness level of the switched picture and a target maximum gray scale brightness corresponding to the target brightness level; adjusting the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture.

setting a plurality of brightness levels of the organic light-emitting display panel and a plurality of maximum gray scale brightnesses, wherein each of the plurality of brightness levels corresponds to a respective one of the plurality of maximum gray scale brightnesses, the plurality of maximum gray scale brightnesses include a first maximum gray scale brightness corresponding to a maximum brightness level of the organic light-emitting display panel, and an effective pulse duty cycle of a light-emitting control signal for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle

Step 110

when a picture in the organic light-emitting display panel is controlled to be switched, a target brightness level of the switched picture and a target maximum gray scale brightness corresponding to the target brightness level are determined

Step 120

based on the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and the first effective pulse duty cycle, the target effective pulse duty cycle of the EMIT for driving the switched picture is adjusted

Step 130

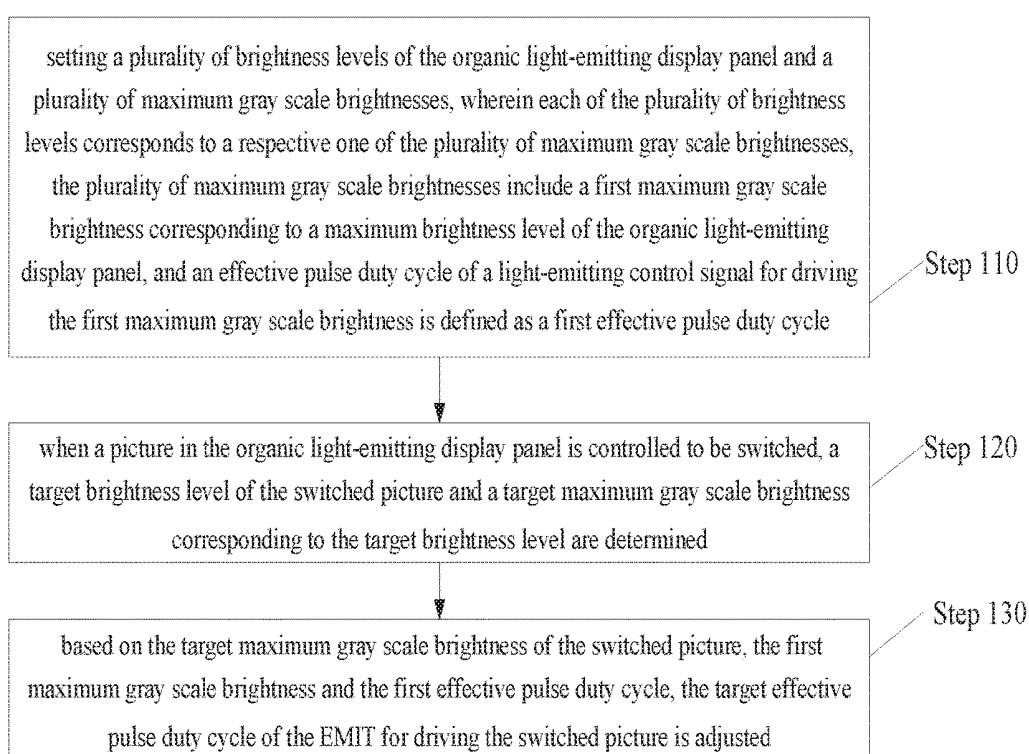
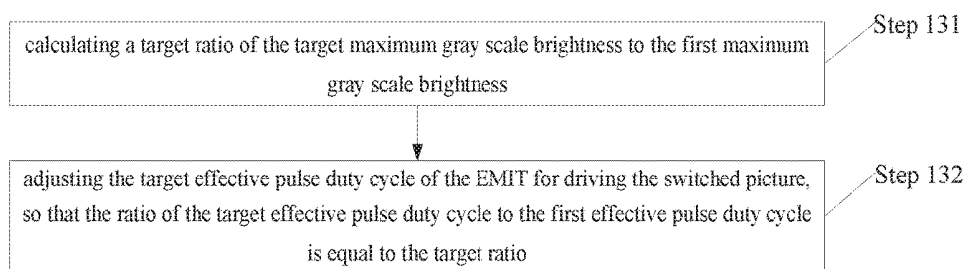


FIG. 1

**FIG. 2**

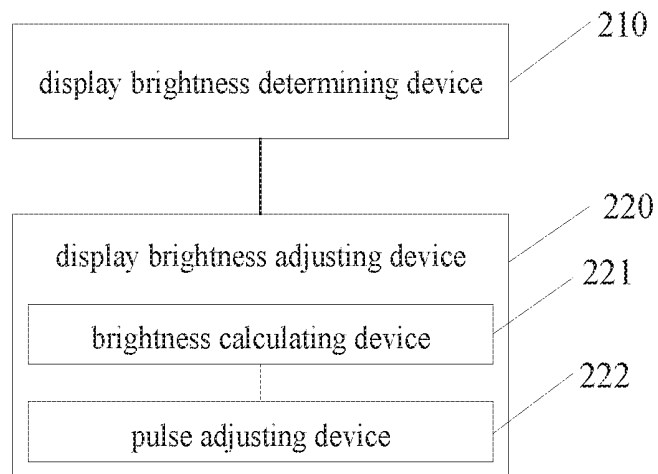


FIG. 3

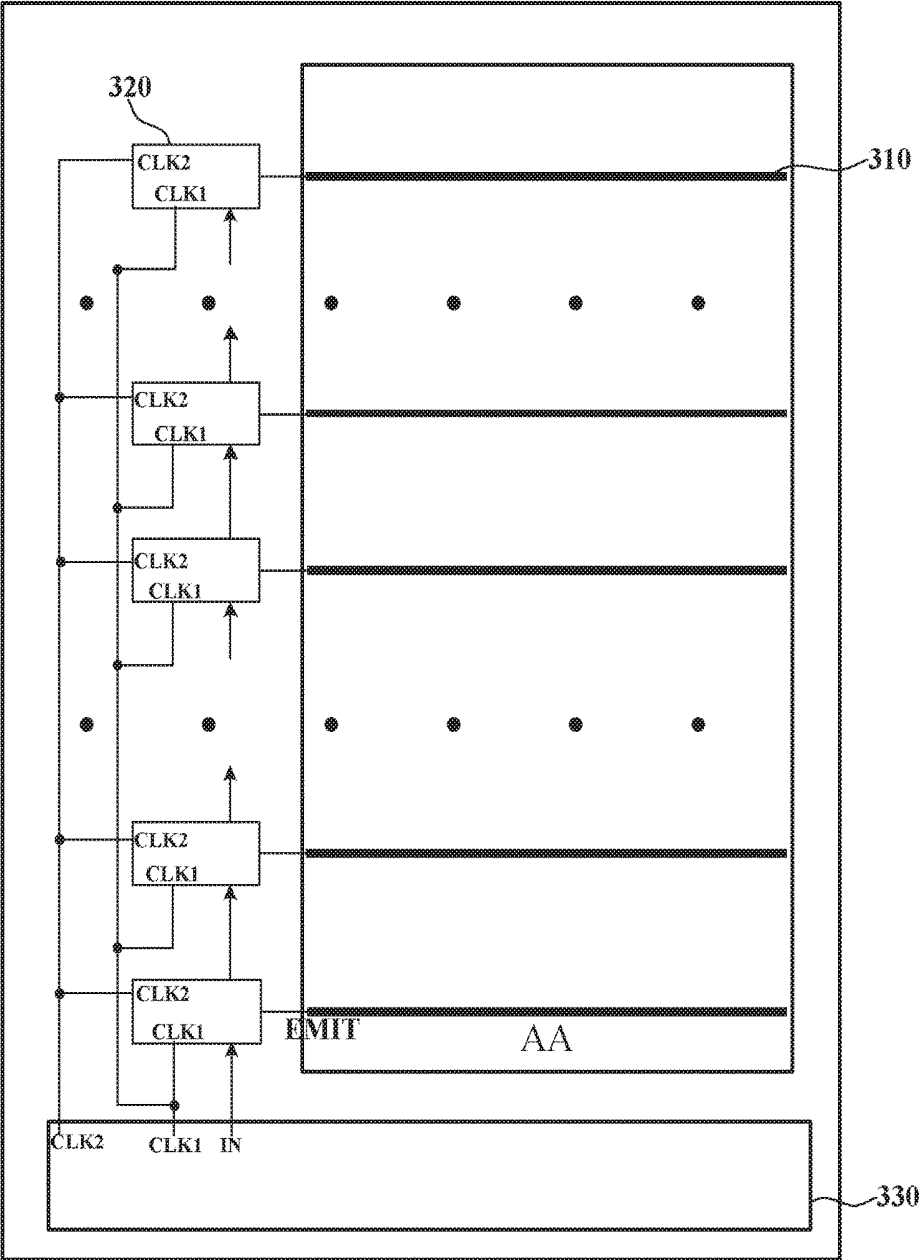


FIG. 4

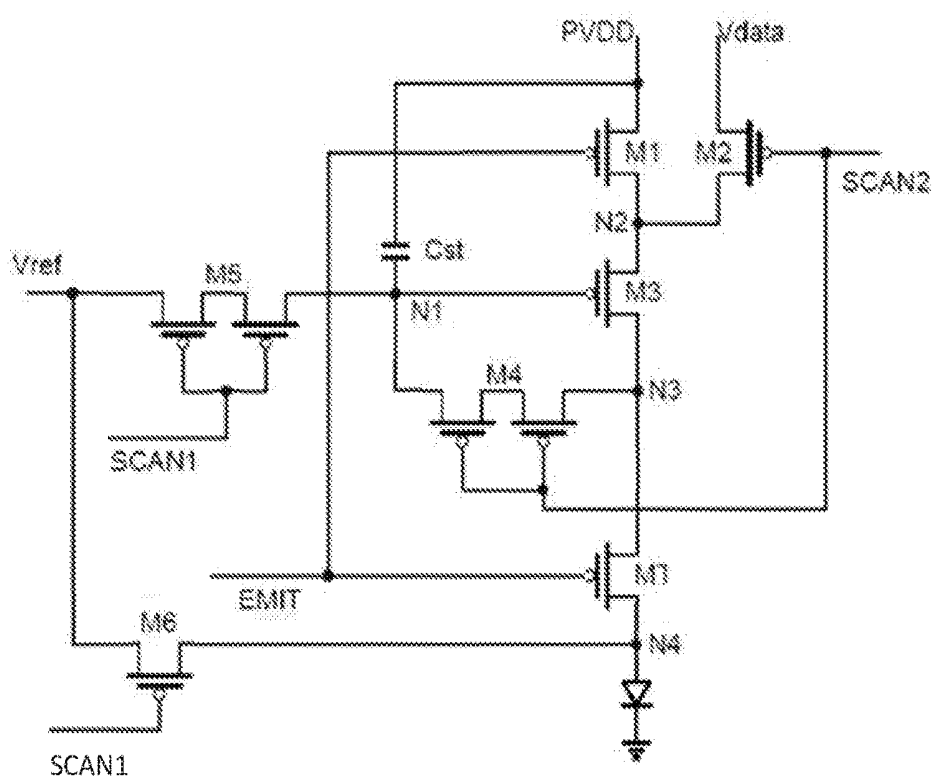


FIG. 5

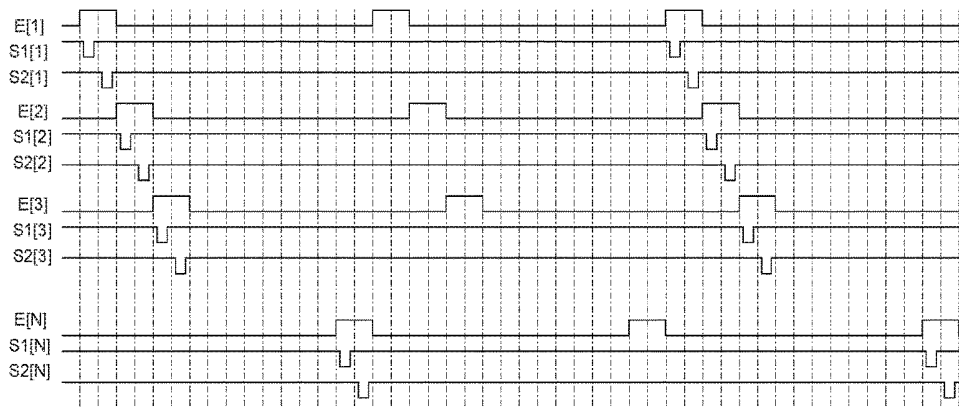


FIG. 6A

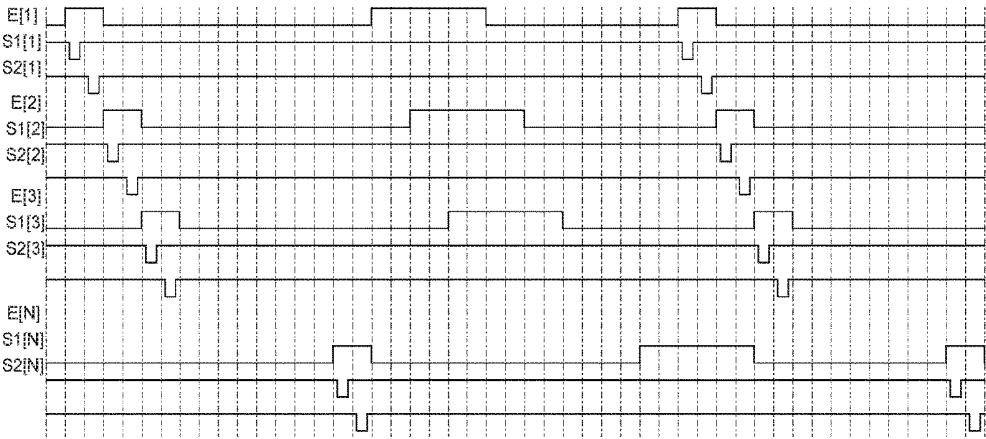


FIG. 6B

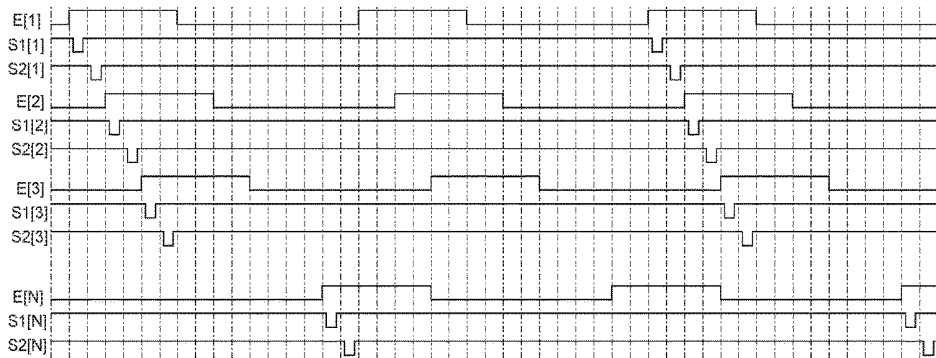


FIG. 6C

ORGANIC LIGHT-EMITTING DISPLAY PANEL, DRIVING METHOD AND DRIVING DEVICE THEREFOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to Chinese patent application No. 201710690526.0 filed on Aug. 14, 2017, the disclosure of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to display technologies, in particular to an organic light-emitting display panel, a driving method and a driving device therefor.

BACKGROUND

[0003] As the next generation display device, an organic light-emitting display device raises the wide concerns due to its characteristics such as self-luminance, fast response, wide viewing angle and the preparation for a flexible screen etc. An organic light-emitting diode (OLED) display device is a current-driven active light-emitting display device and may be divided as a passive-matrix organic light-emitting diode (PM-OLED) display device and an active-matrix organic light-emitting diode (AM-OLED) display device based on the driving manner.

[0004] At present, most of the OLED display devices employ a shift register device to control the generation of light-emitting signals (hereinafter, referred to as EMIT), and two rows of pixels may be driven by a cascade of the shift registers device. The conventional OLED display device commonly has 256-levels brightness (0-255), and the shift register device thereof commonly employs a light-emitting control timing with four pulses. In order to avoid the flickers, a time period of a frame is commonly divided into quarters, in order to enable each quarter of the time period to achieve a 256-levels brightness variation to avoid the flickers. However, for the conventional OLED display devices, a 256-levels brightness variation in each quarter of the time period may not be achieved, that is, a jumping occurs in the brightness variation of the display device, which leads to an unsmooth brightness variation of the display device, so that the display effect of the OLED display device is affected.

SUMMARY

[0005] The present disclosure provides an organic light-emitting display panel, a driving method and a driving device therefor.

[0006] In an first aspect, the present disclosure provides an driving method for the organic light-emitting display panel, and the driving method includes:

[0007] setting a plurality of brightness levels of the organic light-emitting display panel and a plurality of maximum gray scale brightnesses, each of the plurality of brightness levels corresponds to a respective one of the plurality of maximum gray scale brightnesses, the plurality of maximum gray scale brightnesses include a first maximum gray scale brightness corresponding to a maximum brightness level of the organic light-emitting display panel, and an effective pulse duty cycle of a

light-emitting control signal (EMIT) for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle;

[0008] determining, when a picture in the organic light-emitting display panel is controlled to be switched, a target brightness level of the switched picture and a target maximum gray scale brightness corresponding to the target brightness level;

[0009] adjusting, based on the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and the first effective pulse duty cycle, the target effective pulse duty cycle of the EMIT for driving the switched picture.

[0010] In a second aspect, the present disclosure provides a driving device for the organic light-emitting display panel, and the driving device includes:

[0011] a display brightness determining device, which is configured to determine, when controlling the picture switching of the organic light-emitting display panel, the target brightness level of the switched picture and the target maximum gray scale brightness corresponding to the target brightness level;

[0012] a display brightness adjusting device, which is configured to adjust the target effective pulse duty cycle of the EMIT for driving the switched picture on the basis of the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and a first duty cycle, the maximum gray scale brightness corresponding to the maximum brightness level of the organic light-emitting display panel is defined as a first maximum gray scale brightness, and the effective pulse duty cycle of the EMIT for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle.

[0013] Moreover, the present disclosure provides an organic light-emitting display panel, and the organic light-emitting display panel includes the above mentioned driving device.

BRIEF DESCRIPTION OF DRAWINGS

[0014] A simple description about the drawings employed in the embodiments of the present disclosure is given as below.

[0015] FIG. 1 is a flow diagram showing a driving method for an organic light-emitting display panel according to an embodiment of the present disclosure;

[0016] FIG. 2 is a flow diagram showing another driving method for an organic light-emitting display panel according to an embodiment of the present disclosure;

[0017] FIG. 3 is a diagram showing a driving device for an organic light-emitting display panel according to an embodiment of the present disclosure;

[0018] FIG. 4 is a diagram showing an organic light-emitting display panel according to an embodiment of the present disclosure;

[0019] FIG. 5 is a diagram showing a pixel circuit according to an embodiment of the present disclosure; and

[0020] FIG. 6A, FIG. 6B and FIG. 6C are the waveform graphs showing the light-emitting control signal with different brightness levels according to the embodiments of the present disclosure.

DETAILED DESCRIPTION

[0021] Referring to FIG. 1, FIG. 1 is a flow diagram showing a driving method for an organic light-emitting display panel according to an embodiment of the present disclosure. The driving method for the organic light-emitting display panel includes: Step 110, setting a plurality of brightness levels of the organic light-emitting display panel and a plurality of maximum gray scale brightnesses, wherein each of the plurality of brightness levels corresponds to a respective one of the plurality of maximum gray scale brightnesses, the plurality of maximum gray scale brightnesses include a first maximum gray scale brightness corresponding to a maximum brightness level of the organic light-emitting display panel, and an effective pulse duty cycle of a light-emitting control signal (hereinafter, referred to as EMIT) for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle.

[0022] In this embodiment, the brightness level of the organic light-emitting display panel and the maximum gray scale brightness corresponding to the brightness level may need be set before the organic light-emitting display panels leave the factory. Since the light-emitting organic display panels in the prior art generally employ an 8-bits shift register to control the pixels to emit light, the light-emitting organic display panel of this embodiment may have a 256-levels brightness (0-255), and each brightness level is configured to have a minimum gray scale brightness and a maximum gray scale brightness. The minimum gray scale brightness of each brightness level is zero, and different brightness levels have different maximum gray brightness thereof, so that the higher the brightness level is, the higher the maximum gray scale brightness corresponding to the brightness level is. Apparently, the maximum gray scale brightness corresponding to the maximum brightness level of the organic light-emitting display panel has a maximum brightness of the organic light-emitting display panel. Therefore, the maximum gray scale brightness corresponding to the maximum brightness level of the organic light-emitting display panel is defined as a first maximum gray scale brightness.

[0023] The brightness of each brightness level of the organic light-emitting display panel in this embodiment may be divided into a 256-levels gray scale (0-255). Therefore, for any of brightness levels of the organic light-emitting display panel, the 255-th-level gray scale brightness corresponding to the brightness level has the maximum gray scale brightness of the brightness level. For example, the maximum gray scale brightness corresponding to the 240-th-level brightness is 350 nit, and the maximum gray scale brightness corresponding to the 255-th-level brightness is 400 nit.

[0024] In this embodiment, a plurality of brightness levels of the organic light-emitting display panel and the maximum gray scale brightness corresponding to each of the brightness levels are set before the organic light-emitting display panels leaves the factory. It should be noted that, the inputted voltage potential of a gate electrode of a thin film transistor (TFT) for driving an organic light-emitting diode (OLED) may be adjusted by adjusting the data signal voltage, so that the gate-source voltage of the TFT is changed, thereby controlling the magnitude of the current flowing through the OLED, which in turn changes the luminous intensity of the OLED. Thereby, the data signal voltage corresponding to a gray scale level of the brightness level may be determined, that is, when the brightness level of the organic light-

emitting display panel is determined, the desired gray level of each pixel may be achieved by adjusting the data signal voltage.

[0025] In this embodiment, the effective pulse of the EMIT is configured to control the at least one row of corresponding sub-pixels to emit light, wherein the organic light-emitting display panel includes a plurality of light-emitting control lines, a light-emitting control line corresponds to and is electrically connected to at least one row of the corresponding sub-pixels, and hence the EMIT outputted by the light-emitting control line controls at least one row of corresponding sub-pixels to emit light.

[0026] In one embodiment, the EMIT is configured to control the turning on and off of each light-emitting control transistor for driving the OLED in the at least a row of pixel circuits corresponding thereto. When the EMIT turns on the light-emitting transistor, the OLED emits light. When the EMIT turns off the light-emitting transistor, the OLED does not emit light. Therefore, the EMIT can control the light-emitting time period of the OLED, the longer of the light-emitting time period is, the higher brightness of the OLED is.

[0027] Apparently, the EMIT may change the brightness level of the OLED by adjusting the length of the light-emitting time period. The pulse of the EMIT for controlling the turning on of the light-emitting control transistor is defined as an effective pulse. On the contrary, the pulse of the EMIT for controlling the turning off of the light-emitting control transistor is defined as an ineffective pulse. The ratio of the effective pulse duration of a light-emitting control cycle to the light-emitting control cycle is defined as an effective pulse duty cycle. In this embodiment, the effective pulse duty cycle of the EMIT for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle. The effective pulse duty cycle of the EMIT for driving other gray scale brightness is certainly less than the first effective pulse duty cycle.

[0028] In this embodiment, the effective pulse of the EMIT is configured to control the adjacent two rows of sub-pixels to emit light. That is, the organic light-emitting display panel includes a plurality of light-emitting control lines, and each of the light-emitting control lines is electrically connected to adjacent two rows of sub-pixels. In other embodiments, the effective pulse of the EMIT is also configured to control the adjacent four rows of sub-pixels to emit light.

[0029] In one embodiment, an output waveform of the EMIT includes a plurality of effective pulses and ineffective pulses. By employing the effective pulse and ineffective pulse to alternately control turning on and off of the light-emitting control transistor of the OLED for driving the pixel circuit, the power consumption of the organic light-emitting display panel is reduced.

[0030] In one embodiment, different organic light-emitting display panels may have different light-emitting control circuits, so that the number of brightness levels for different organic light-emitting display panels may be different. The number of brightness levels of the organic light-emitting display panel is not limited in the present disclosure.

[0031] Step 120, when a picture in the organic light-emitting display panel is controlled to be switched, a target brightness level of the switched picture and a target maximum gray scale brightness corresponding to the target brightness level are determined.

[0032] In this embodiment, when a picture in the organic light-emitting display panel is to be switched, a target brightness level of the switched picture may need be determined by the organic light-emitting display panel. It should be noted that, if the user does not adjust the brightness level of the organic light-emitting display panel, the target brightness level of the switched picture conforms with brightness level of the picture of current frame; if the user adjusts the brightness level of the organic light-emitting display panel, the adjusted brightness level is the target brightness level of the switched picture. When the maximum brightness level of organic light-emitting display panel corresponding to each of the brightness levels and the target brightness level of the switched picture are given, the target maximum gray scale brightness of the switched picture may be determined.

[0033] Step 130, based on the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and the first effective pulse duty cycle, the target effective pulse duty cycle of the EMIT for driving the switched picture is adjusted.

[0034] In this embodiment, since the EMIT may change the brightness level of the OLED by adjusting the length of the light-emitting time period of the OLED, and the first maximum gray scale brightness and the first effective pulse duty cycle are given, when the picture of the organic light-emitting display panel is switched, the target effective pulse duty cycle of the EMIT for driving the switched picture may be adjusted based on the determined target maximum gray scale brightness of the switched picture, thereby enabling the switch picture to reach a target maximum gray scale brightness. In one embodiment, the duty cycle ratio of the target effective pulse duty cycle to first effective pulse duty cycle is determined as the brightness ratio of the target maximum gray scale brightness to the first maximum gray scale brightness, thereby computing the target effective pulse duty cycle. As a driving timing of the EMIT for driving the switched picture is adjusted by the organic light-emitting display panel in order to conform to the driving timing of the target effective pulse duty cycle, the display brightness of the switched picture is just the target maximum gray scale brightness.

[0035] It should be noted that, the gray scales of different sub-pixels for the picture of a frame may be different. As target gray scale of display picture and target maximum gray scale brightness are determined, the data signal voltage outputted to each sub-pixel may be adjusted for the organic light-emitting display panel, thereby enabling each sub-pixel of the picture of a frame to display the corresponding gray scale. The organic light-emitting display panel provided in present disclosure may achieve a smooth adjustment of 0-255 gray scales within a brightness level by adjusting the data signal voltage.

[0036] In this embodiment, it is preset in the organic light-emitting display panel a plurality of brightness levels, the maximum gray scale brightness corresponding to each of the brightness level, the first maximum gray scale brightness corresponding to the maximum brightness level and the first effective pulse duty cycle of the EMIT for driving the first maximum gray scale brightness. By adjusting the target effective pulse duty cycle of the EMIT for driving the switched picture, a target brightness level is enabled to be adjusted in the organic light-emitting display panel. In this embodiment, the display time period of the organic light-emitting display panel can be adjusted by adjusting the

effective pulse duty cycle of the organic light-emitting display panel, thereby adjusting the total brightness of the organic light-emitting display panel. Furthermore, the driving method for the organic light-emitting display panel may also achieve the smooth adjustment of the brightness of the organic light-emitting display panel and improve the display effect of the organic light-emitting display panel.

[0037] In one embodiment, as shown in FIG. 2, adjusting the target effective pulse duty cycle of the EMIT for driving the switched picture in above mentioned step 130 includes: Step 131, calculating a target ratio of the target maximum gray scale brightness to the first maximum gray scale brightness; and Step 132, adjusting the target effective pulse duty cycle of the EMIT for driving the switched picture, so that the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

[0038] In this embodiment, since the EMIT may change the brightness level of the OLED by adjusting the time period of data signal voltage inputted to the OLED, and the first maximum gray scale brightness and the corresponding first effective pulse duty cycle are given, when controlling the switching of pictures of the organic light-emitting display panel, the target effective pulse duty cycle of the EMIT may be adjusted for driving the switched picture based on the determined target maximum gray scale brightness of the switched picture, thereby enabling the switch picture to reach a target maximum gray scale brightness.

[0039] In one embodiment, a target ratio is obtained by calculating a brightness ratio of the target maximum gray scale brightness to the first maximum gray scale brightness, and then the target effective pulse duty cycle of the EMIT for driving the switched picture is adjusted, thereby enabling the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle to be equal to a target ratio. The driving for the organic light-emitting display panel is controlled according to the adjusted EMIT, and thus the display brightness of the switched picture is just the target maximum gray scale brightness.

[0040] In one embodiment, adjusting the target effective pulse duty cycle of the EMIT for driving the switched picture in step 130 includes: decreasing gradually, when the target effective pulse duty cycle of the EMIT for driving the switched picture is less than the target effective pulse duty cycle of the EMIT for driving the preceding picture of the frame, the target effective pulse duty cycle until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

[0041] If the target effective pulse duty cycle of the EMIT after switched is less than that of the EMIT before switched, it indicates that the brightness of the switched picture is lower than that of the picture before switched. Based on the case that the brightness becomes lower before and after the picture switching, the target effective pulse duty cycle of the EMIT for driving the switched picture is decreased. That is, the width of each ineffective pulse is adjusted individually until the ratio of the target effective pulse duty cycle of the EMIT for driving the switched picture to the first effective pulse duty cycle is equal to the target ratio. Therefore, the display time period of the organic light-emitting display panel is reduced, so that the brightness is decreased.

[0042] In one embodiment, an output waveform of the EMIT includes a plurality of effective pulses and a plurality of ineffective pulses. If the effective pulse duty cycles of the EMIT before and after picture switching are almost same,

the target effective pulse duty cycle may be adjusted individually so as to achieve the fine-tuning on the brightness of the organic light-emitting display panel. If the effective pulse duty cycles of the EMIT before and after picture switching are largely different, the width of a plurality of ineffective pulse may be adjusted so as to achieve the fast-tuning on the brightness of the organic light-emitting display panel.

[0043] In one embodiment, adjusting the target effective pulse duty cycle of the EMIT for driving the switched picture in step 130 includes: increasing gradually, when the target effective pulse duty cycle of the EMIT for driving the switched picture is larger than the target effective pulse duty cycle of the EMIT for driving the preceding picture of the frame, the target effective pulse duty cycle until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

[0044] If the target effective pulse duty cycle of the EMIT after switched is larger than that of the EMIT before switched, it indicates that the brightness of the switched picture is higher than that of the picture before switched. In the case that the brightness becomes higher before and after the picture switching, the target effective pulse duty cycle of the EMIT for driving the switched picture is increased. That is, the width of each ineffective pulse is adjusted individually until the ratio of the target effective pulse duty cycle of the EMIT for driving the switched picture to the first effective pulse duty cycle is equal to the target ratio. Therefore, the display time period of the organic light-emitting display panel is increased and the brightness is improved. In one embodiment, the target effective pulse duty cycle may be adjusted so as to achieve the adjustment to the brightness of the organic light-emitting display panel.

[0045] Based on the same inventive concept, the present disclosure further provides a driving device of the organic light-emitting display panel. Since the principle of the driving device for solving the problems is similar to that of the driving method of the organic light-emitting display panel, the operations of the driving device may refer to that of the driving method and do not discuss again here.

[0046] As shown in FIG. 3, a driving device of the organic light-emitting display panel is provided in this embodiment, the driving device includes: a display brightness determining device 210 and a display brightness adjusting device 220.

[0047] The display brightness determining device 210 is configured to determine, when controlling the picture switching of the organic light-emitting display panel, the target brightness level of the switched picture and the target maximum gray scale brightness corresponding to the target brightness level. The display brightness adjusting device 220 is configured to adjust the target effective pulse duty cycle of the EMIT for driving the switched picture on the basis of the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and a first effective pulse duty cycle. The maximum gray scale brightness corresponding to the maximum brightness level of the organic light-emitting display panel is defined as a first maximum gray scale brightness, and the effective pulse duty cycle of the EMIT for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle.

[0048] In one embodiment, the effective pulse of the EMIT is configured to control at least one row of sub-pixels to emit light.

[0049] In one embodiment, the effective pulse of the EMIT is configured to control the adjacent four rows of sub-pixels to emit light.

[0050] In one embodiment, an output waveform of the EMIT includes a plurality of effective pulses and ineffective pulses.

[0051] In one embodiment, the display brightness adjusting device 220 includes: a brightness calculating device 221 and a pulse adjusting device 222.

[0052] The brightness calculating device 221 is configured to calculate a target ratio of the target maximum gray scale brightness to the first maximum gray scale brightness; the pulse adjusting device 222 is configured to adjust the target effective pulse duty cycle of the EMIT for driving the switched picture, thereby enabling the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle to be equal to a target ratio.

[0053] In one embodiment, the implementation process for the display brightness adjusting device 220 includes: decreasing gradually, when the target effective pulse duty cycle of the EMIT for driving the switched picture is less than the target effective pulse duty cycle of the EMIT for driving the preceding picture of the frame, the target effective pulse duty cycle of the EMIT until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

[0054] In one embodiment, the implementation process for the display brightness adjusting device 220 includes: increasing gradually, when the target effective pulse duty cycle of the EMIT for driving the switched picture is larger than the target effective pulse duty cycle of the EMIT for driving the preceding picture of the frame, the target effective pulse duty cycle of the EMIT until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle equal to the target ratio.

[0055] In this embodiment, the display time period of the organic light-emitting display panel is adjusted by adjusting the effective pulse duty cycle of the organic light-emitting display panel, thereby adjusting the total brightness of the organic light-emitting display panel. Furthermore, the driving method for the organic light-emitting display panel may also achieve the smooth adjustment of the brightness of the organic light-emitting display panel and improve the display effect of the organic light-emitting display panel.

[0056] Based on the same inventive concept, the present disclosure further provides a driving device of the organic light-emitting display panel and the driving device according to any above mentioned embodiments is integrated into the organic light-emitting display panel. The driving device is configured to solve the driving method according to any above mentioned embodiments and no repetitions here.

[0057] In this embodiment, the organic light-emitting display panel shown in FIG. 4 includes the driving device according to above embodiments. In one embodiment, the driving device includes: a plurality of light-emitting control lines 310, and a light-emitting control line 310 is correspond to and is electrically connected to at least a row of sub-pixels (not shown in drawings); multiple cascades of shift register devices 320, and the multiple cascaded of shift register devices 320 correspond to and are electrically connected to the plurality of light-emitting control lines, respectively, a cascade of the shift register devices 320 is configured to provide a EMIT to a corresponding light-emitting control line 310.

[0058] In this embodiment, the organic light-emitting display panel includes a display region AA, and sub-pixels with array distribution are disposed in the display region AA. The organic light-emitting display panel further includes a non-display region surround the display region AA, and a driving device is provided in the non-display region. Each sub-pixel is controlled by a corresponding pixel circuit, as shown in FIG. 5, the pixel circuit includes a light-emitting control transistor M1 and a light-emitting control transistor M7 for driving the OLED. A light-emitting control line 310 is configured to correspond to and is electrically connected to at least a row of sub-pixels, which indicates that a light-emitting control line 310 is connected to the gate electrode of the light-emitting control transistor in the pixel circuit of at least a row of sub-pixels, and an EMIT is transmitted to the gate electrode of the light-emitting control transistor via the light-emitting control line 310.

[0059] In this embodiment, the driving device further includes: multiple cascades of shift register devices 320, the multiple cascades of shift register devices 320 are configured to be correspond to and electrically connected to the plurality of light-emitting control lines 310. each of the cascades of the multiple cascades of shift register devices 320 is configured to provide a EMIT to a corresponding light-emitting control line 310. It should be noted that, the driving device of the organic light-emitting display panel further includes a light-emitting driving chip 330, the light-emitting driving chip 330 is configured to apply a shift trigger signal (IN) to the first cascade of shift register devices 320, and the light-emitting driving chip 330 is also configured to apply a clock signal to each of the cascades of shift register devices 320. The waveform of the IN outputted by the light-emitting driving chip 330 is same with that of the EMIT, with the merely difference in phases. The shift registers device 320 outputs the EMIT on basis of the shift trigger signal IN outputted by the driving chip 330. The brightness level of the organic light-emitting display panel may adjusted by adjusting the waveform of the shift trigger signal IN by the light-emitting driving chip 330.

[0060] When driving device controls the picture switching, the light-emitting driving chip 330 of the driving device may determine the brightness level of the switched picture and maximum gray scale brightness. Since the maximum brightness level, the first maximum gray scale brightness corresponding to the maximum brightness level and the first effective pulse duty cycle are known to the light-emitting driving chip 330, the effective pulse duty cycle of the EMIT of driving the switched picture may be calculated by the light-emitting driving chip 330, and the adjusted EMIT is outputted by adjusting the IN of the EMIT and the multiple cascades of shift register devices 320 based on the calculated effective pulse duty cycle of the EMIT of driving the switched picture.

[0061] The organic light-emitting display panel provided by this embodiment has a dimming mode and provides a driving timing for changing the brightness of the organic light-emitting display panel under the dimming mode, and the dimming mode may improve the problems of defective display in the organic light-emitting display panel. Under the dimming mode, the display time period of the organic light-emitting display panel can be adjusted by adjusting the width of the effective pulse duty cycle of the EMIT outputted by the shift registers device 320, thereby adjusting the brightness of the organic light-emitting display panel.

[0062] It should be noted that, the driving device may achieve a desired effective pulse duty cycle by adjusting the width of each pulse of the EMIT, in order to achieve the adjustment for the picture of a frame; and the driving device may also achieve the adjustment of the gray scales for different sub-pixels in the picture of a frame by adjusting the data signal voltage.

[0063] In order to describe the driving timing of the organic light-emitting display panel in detail, the driving timing for pictures of multiple frames is taken as an example to give descriptions here. It should be noted that, a display stage of the organic light-emitting display panel includes an initial stage, a data-writing stage and a light emission stage. In one embodiment, the operating timings of the initial stage and the data-writing stage in the organic light-emitting display panel are similar to the related technologies and no repetitions here.

[0064] In FIG. 6A, FIG. 6B and FIG. 6C, it should be noted that, the EMIT of the organic light-emitting display panel in the light emission stage includes two pulses; S1 is an initial control line, and the organic light-emitting display panel is in the initial stage when S1 outputs the low level pulses; S2 is a data-writing control line, and the organic light-emitting display panel is in the data-writing stage when S2 outputs the low level pulses. E[1] is the a first light-emitting control line, S1[1] is a first initial control line, and S2[1] is a first data-writing control line and the like.

[0065] FIG. 6A shows a waveform of the maximum gray scale brightness corresponding to the 255-th-level brightness of the organic light-emitting display panel, and a high level pulse is the ineffective pulse, and a low level pulse is the effective pulse.

[0066] As shown in FIG. 6B, when the brightness level of the organic light-emitting display panel may need to be decreased, the driving device of the organic light-emitting display panel may decrease the brightness level of the organic light-emitting display panel by decreasing the target effective pulse duty cycle of the EMIT. For example, if the brightness level of the organic light-emitting display panel may need to be decreased to the 254-th-level brightness, the brightness level of the organic light-emitting display panel may be decreased by increasing the width of the second ineffective pulse of the EMIT. The specific increased time period may be determined and adjusted according to the maximum gray scale brightness corresponding to the 254-th-level brightness.

[0067] As shown in FIG. 6C, when the brightness level of the organic light-emitting display panel may need to be further decreased, the driving device of the organic light-emitting display panel may decrease the brightness level of the organic light-emitting display panel by decreasing the target effective pulse duty cycle of the EMIT. For example, if the brightness level of the organic light-emitting display panel may need to be decreased to the 253-th-level brightness, the brightness level of the organic light-emitting display panel may be decreased by increasing the width of the second ineffective pulse of the EMIT. The specific increased time period may be determined and adjusted according to the maximum gray scale brightness corresponding to the 253-th-level brightness.

[0068] The driving device according to this embodiment provides a novel driving timing in the light emission stage of the organic light-emitting display panel, so that the adjustment to the display time period of the organic light-

emitting display panel is achieved, and hence adjusting the display brightness of the organic light-emitting display panel.

What is claimed is:

1. A driving method for an organic light-emitting display panel, comprising:

setting a plurality of brightness levels of the organic light-emitting display panel and a plurality of maximum gray scale brightnesses, wherein each of the plurality of brightness levels corresponds to a respective one of the plurality of maximum gray scale brightnesses, the plurality of maximum gray scale brightnesses comprise a first maximum gray scale brightness corresponding to a maximum brightness level of the organic light-emitting display panel, and an effective pulse duty cycle of a light-emitting control signal for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle;

determining, when a picture in the organic light-emitting display panel is controlled to be switched, a target brightness level of the switched picture and a target maximum gray scale brightness corresponding to the target brightness level; and

adjusting, based on the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and the first effective pulse duty cycle, a target effective pulse duty cycle of the light-emitting control signal for driving the switched picture.

2. The driving method according to claim 1, wherein an effective pulse of the light-emitting control signal is configured to control at least one row of corresponding sub-pixels to emit light.

3. The driving method according to claim 2, wherein the effective pulse of the light-emitting control signal is configured to control adjacent two rows of corresponding sub-pixels corresponding to emit light.

4. The driving method according to claim 1, wherein an output waveform of the light-emitting control signal comprises a plurality of effective pulses and a plurality of ineffective pulses.

5. The driving method according to claim 4, wherein adjusting the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture comprises:

calculating a target ratio of the target maximum gray scale brightness to the first maximum gray scale brightness; and

adjusting the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture in such a way that the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

6. The driving method according to claim 5, wherein adjusting the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture comprises:

decreasing gradually, when the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture is less than the effective pulse duty cycle of the light-emitting control signal for driving the preceding picture of the frame, the target effective pulse duty cycle of the light-emitting control signal until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

7. The driving method according to claim 5, wherein adjusting the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture comprises:

increasing gradually, when the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture is larger than the effective pulse duty cycle of the light-emitting control signal for driving the preceding picture of the frame, the target effective pulse duty cycle of the light-emitting control signal until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle equal to the target ratio.

8. A driving device of an organic light-emitting display panel, comprising:

display brightness determining device, which is configured for determining, when a picture in the organic light-emitting display panel is controlled to be switched, a target brightness level of the switched picture and a target maximum gray scale brightness corresponding to the target brightness level;

display brightness adjusting device, which is configured for adjusting the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture according to the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and a first effective pulse duty cycle, wherein the maximum gray scale brightness corresponding to the maximum brightness level of the organic light-emitting display panel is defined as a first maximum gray scale brightness, and the effective pulse duty cycle of the light-emitting control signal for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle.

9. The driving device according to claim 8, wherein an effective pulse of the light-emitting control signal is configured to control at least one row of corresponding sub-pixels to emit light.

10. The driving device according to claim 9, wherein the effective pulse of the light-emitting control signal is configured to control two adjacent rows of corresponding sub-pixels to emit light.

11. The driving device according to claim 8, wherein an output waveform of the light-emitting control signal comprises a plurality of effective pulses and a plurality of ineffective pulses.

12. The driving device according to claim 11, wherein the display brightness adjusting device comprises: brightness calculating device, which is configured to calculate the target ratio of the target maximum gray scale brightness to the first maximum gray scale brightness; and

pulse adjusting device, which is configured to adjust the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture in such a way that the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

13. The driving device according to claim 12, wherein an implementation process of the display brightness adjusting device comprises: decreasing gradually, when the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture is less than the effective pulse duty cycle of the light-emitting control signal for driving the preceding picture

of the frame, the target effective pulse duty cycle of light-emitting control signal until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

14. The driving device according to claim **12**, wherein the implementation process of the display brightness adjusting device comprises: increasing gradually, when the target effective pulse duty cycle of the light-emitting control signal for driving the switched picture is larger than the effective pulse duty cycle of the light-emitting control signal for driving the preceding picture of the frame, the target effective pulse duty cycle of light-emitting control signal until the ratio of the target effective pulse duty cycle to the first effective pulse duty cycle is equal to the target ratio.

15. An organic light-emitting display panel, comprising: a driving device, wherein

the driving device comprises:

display brightness determining device, which is configured for determining, when a picture in the organic light-emitting display panel is controlled to be switched, a target brightness level of the switched picture and a target maximum gray scale brightness corresponding to the target brightness level;

display brightness adjusting device, which is configured for adjusting the target effective pulse duty cycle of the

light-emitting control signal for driving the switched picture according to the target maximum gray scale brightness of the switched picture, the first maximum gray scale brightness and a first effective pulse duty cycle, wherein the maximum gray scale brightness corresponding to the maximum brightness level of the organic light-emitting display panel is defined as a first maximum gray scale brightness, and the effective pulse duty cycle of the light-emitting control signal for driving the first maximum gray scale brightness is defined as a first effective pulse duty cycle.

16. The organic light-emitting display panel according to claim **15**, wherein the driving device comprises:

a plurality of light-emitting control lines, wherein each of the light-emitting control lines is configured to correspond to and is electrically connected to at least one row of sub-pixels;

a multiple cascades of shift register devices, wherein the multiple cascades of shift register devices correspond to and are electrically connected to the plurality of light-emitting control lines, respectively, each of the cascades of the multiple cascades of shift register devices is configured to provide a light-emitting control signal to corresponding one of the light-emitting control lines.

* * * * *

专利名称(译)	有机发光显示面板，驱动方法及其驱动装置		
公开(公告)号	US20180158398A1	公开(公告)日	2018-06-07
申请号	US15/886858	申请日	2018-02-02
[标]申请(专利权)人(译)	上海天马AM OLED		
申请(专利权)人(译)	上海天马AM-OLED CO. , LTD.		
当前申请(专利权)人(译)	上海天马AM-OLED CO. , LTD.		
[标]发明人	XIANG DONGXU LI YUE ZHU RENYUAN GAO YANA CAI ZHONGLAN		
发明人	XIANG, DONGXU LI, YUE ZHU, RENYUAN GAO, YANA CAI, ZHONGLAN		
IPC分类号	G09G3/22 H01L27/32		
CPC分类号	G09G3/22 H01L27/3241 G09G2320/0626 G09G2310/0264 G09G3/3225 G09G3/3233 G09G3/3266 G09G2300/0819 G09G2300/0842 G09G2300/0861 G09G2300/0866 G09G2310/0262 G09G2310/0286		
优先权	201710690526.0 2017-08-14 CN		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种有机发光显示面板，驱动方法及其驱动装置。所述驱动方法包括：设置所述有机发光显示面板的多个亮度等级和多个最大灰阶亮度，所述多个最大灰阶亮度包括第一最大灰阶亮度，所述第一最大灰阶亮度对应于有机发光显示面板以及用于驱动第一最大灰阶亮度的发光控制信号的有效脉冲占空比被定义为第一有效脉冲占空比；确定切换后的图片的目标亮度等级和与目标亮度等级对应的目标最大灰度等级亮度；调整发光控制信号的目标有效脉冲占空比以驱动切换后的图像。

