



US009608053B2

(12) **United States Patent**  
**Tomida et al.**

(10) **Patent No.:** **US 9,608,053 B2**  
(45) **Date of Patent:** **\*Mar. 28, 2017**

(54) **EL DISPLAY PANEL, POWER SUPPLY LINE DRIVE APPARATUS, AND ELECTRONIC DEVICE**

(71) Applicant: **Sony Corporation**, Tokyo (JP)

(72) Inventors: **Masatsugu Tomida**, Aichi (JP);  
**Mitsuru Asano**, Kanagawa (JP)

(73) Assignee: **Sony Corporation**, Tokyo (JP)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 14 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/826,026**

(22) Filed: **Aug. 13, 2015**

(65) **Prior Publication Data**

US 2015/0349043 A1 Dec. 3, 2015

**Related U.S. Application Data**

(63) Continuation of application No. 14/535,962, filed on Nov. 7, 2014, now Pat. No. 9,135,856, which is a (Continued)

(30) **Foreign Application Priority Data**

Jun. 30, 2007 (JP) ..... 2007-173590

(51) **Int. Cl.**

**H01L 27/32** (2006.01)  
**G09G 3/3233** (2016.01)

(Continued)

(52) **U.S. Cl.**

CPC ..... **H01L 27/3276** (2013.01); **G09G 3/30** (2013.01); **G09G 3/3233** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC ..... G09G 3/3233; G09G 3/32; G09G 3/22; G09G 3/30; G09G 3/3208; G09G 3/3266; G09G 2300/0426; G09G 2300/0819; G09G 2300/0842; G09G 2300/0866; G09G 2310/0291; G09G 2310/0256; G09G 2320/043; G09G 2320/045; G09G 2330/02;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,028,580 A 2/2000 Kosegawa et al.  
6,489,689 B2 12/2002 Nojiri

(Continued)

FOREIGN PATENT DOCUMENTS

JP 02-051252 A 2/1990  
JP 11-338439 A 12/1999  
JP 2003-255856 A 9/2003  
JP 2003-271095 A 9/2003  
JP 2004-021219 A 1/2004  
JP 2004-029791 A 1/2004  
JP 2004-055529 A 2/2004

(Continued)

OTHER PUBLICATIONS

Japanese Office Action issued Feb. 28, 2012 for corresponding Japanese Application No. 2007-173590.


*Primary Examiner* — Stephen Sherman

(74) *Attorney, Agent, or Firm* — Michael Best & Friedrich LLP

(57) **ABSTRACT**

Disclosed herein is an electroluminescence display panel including a pixel circuit, a scan line, a drive power supply line, a common power supply line, a power supply line drive circuit, a high-potential power supply line, and a low-potential power supply line.

**19 Claims, 34 Drawing Sheets**

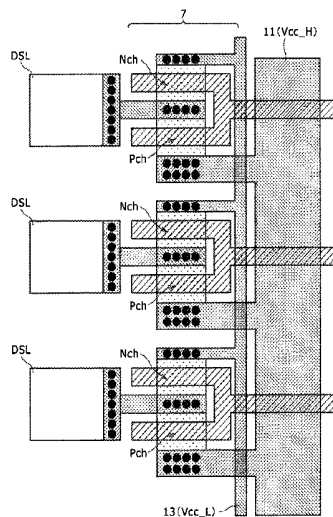

**Related U.S. Application Data**

continuation of application No. 14/269,644, filed on May 5, 2014, now Pat. No. 8,912,988, which is a continuation of application No. 13/589,609, filed on Aug. 20, 2012, now abandoned, which is a continuation of application No. 12/213,143, filed on Jun. 16, 2008, now Pat. No. 8,269,696.

- (51) **Int. Cl.**  
**G09G 3/30** (2006.01)  
*G09G 3/3266* (2016.01)

- (52) **U.S. Cl.**  
 CPC ... *G09G 3/3266* (2013.01); *G09G 2300/0426* (2013.01); *G09G 2300/0819* (2013.01); *G09G 2300/0842* (2013.01); *G09G 2300/0866* (2013.01); *G09G 2310/0256* (2013.01); *G09G 2320/043* (2013.01); *G09G 2320/045* (2013.01); *G09G 2330/02* (2013.01)

- (58) **Field of Classification Search**  
 CPC ..... G09G 2330/028; H01L 23/5283; H01L 23/5286; H01L 27/3244; H01L 27/3297  
 USPC ..... 345/76-83; 315/169.3  
 See application file for complete search history.

(56)

**References Cited**


U.S. PATENT DOCUMENTS

7,102,202 B2	9/2006	Kobayashi et al.
7,109,952 B2	9/2006	Kwon
7,256,774 B1	8/2007	Senda et al.
7,315,296 B2	1/2008	Koyama et al.
7,868,883 B2	1/2011	Mochizuki et al.
8,912,988 B2	12/2014	Tomida et al.
2005/0206590 A1	9/2005	Sasaki et al.
2005/0218946 A1	10/2005	Miyazawa
2005/0225518 A1	10/2005	Yamada et al.

FOREIGN PATENT DOCUMENTS


JP	2004-093682 A	3/2004
JP	2004-118015 A	4/2004
JP	2004-145300 A	5/2004
JP	2004-145301 A	5/2004
JP	2005-309003 A	11/2005
JP	2006-003889 A	1/2006
JP	2006-349753 A	12/2006
JP	2007-041346 A	2/2007
WO	WO-2008/038635 A1	4/2008

FIG. 1  
RELATED ART

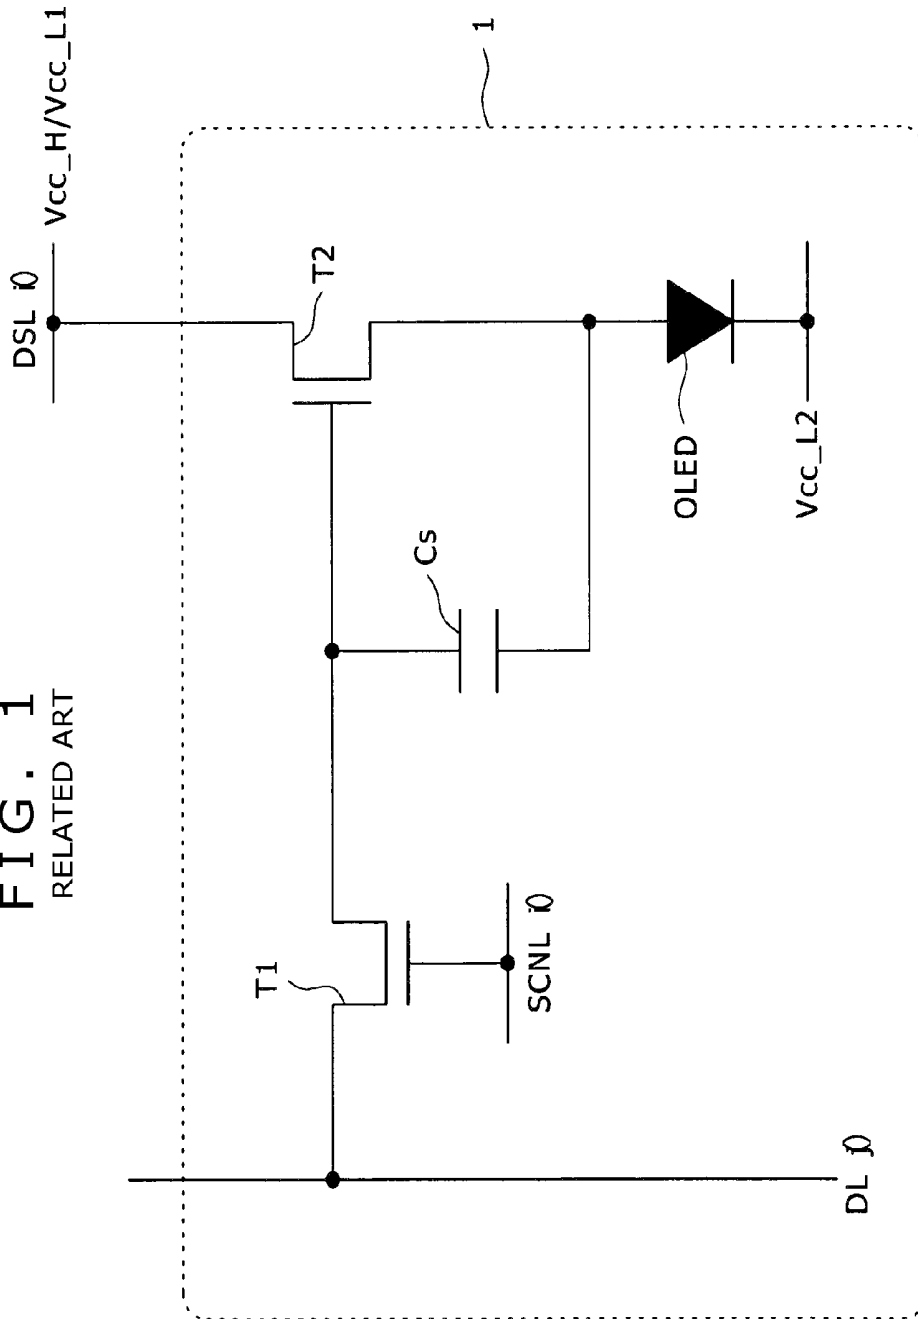

# FIG. 2

## RELATED ART

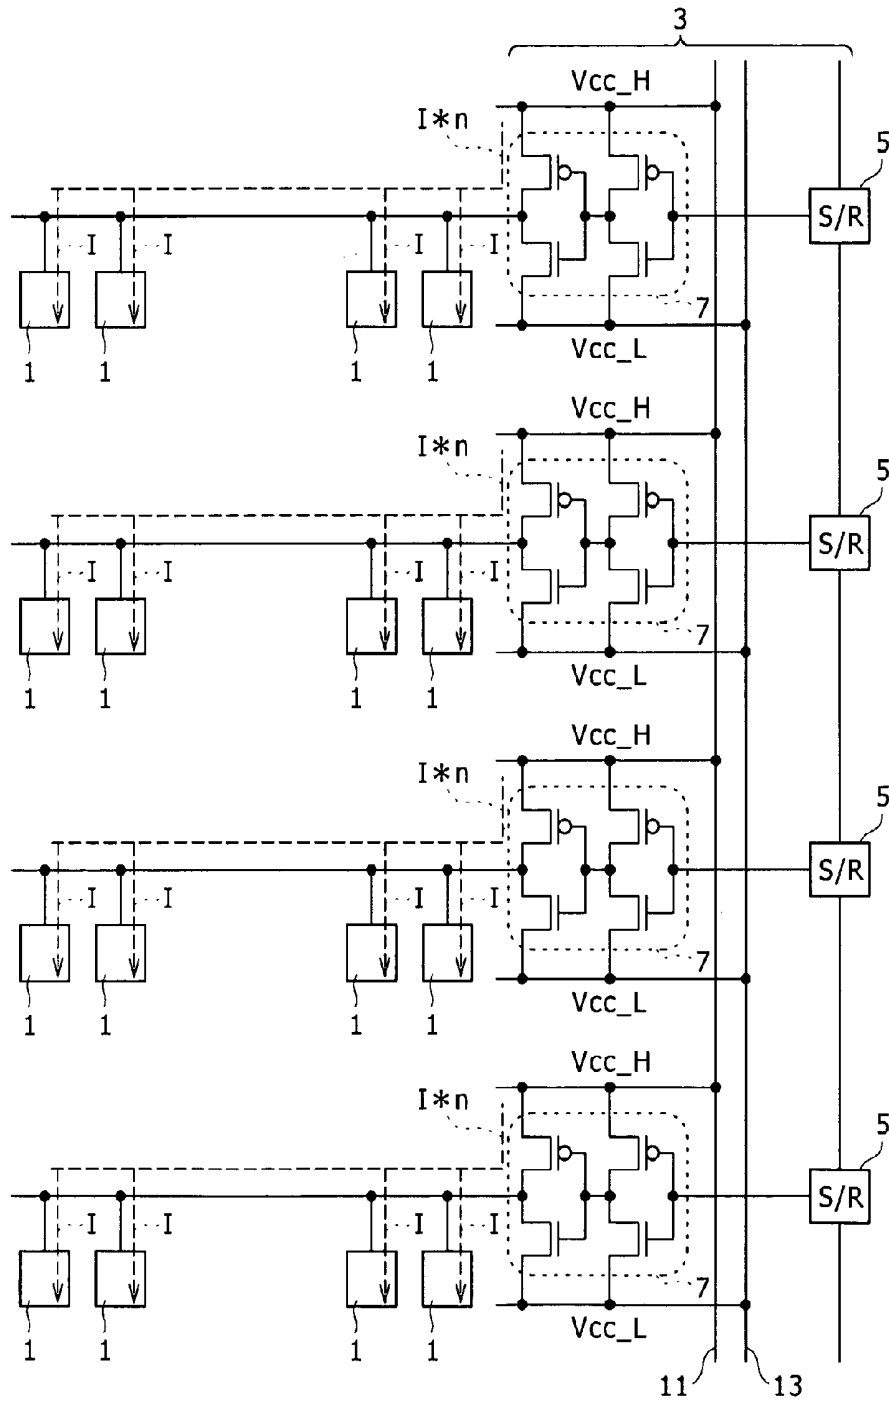

# FIG. 3

RELATED ART

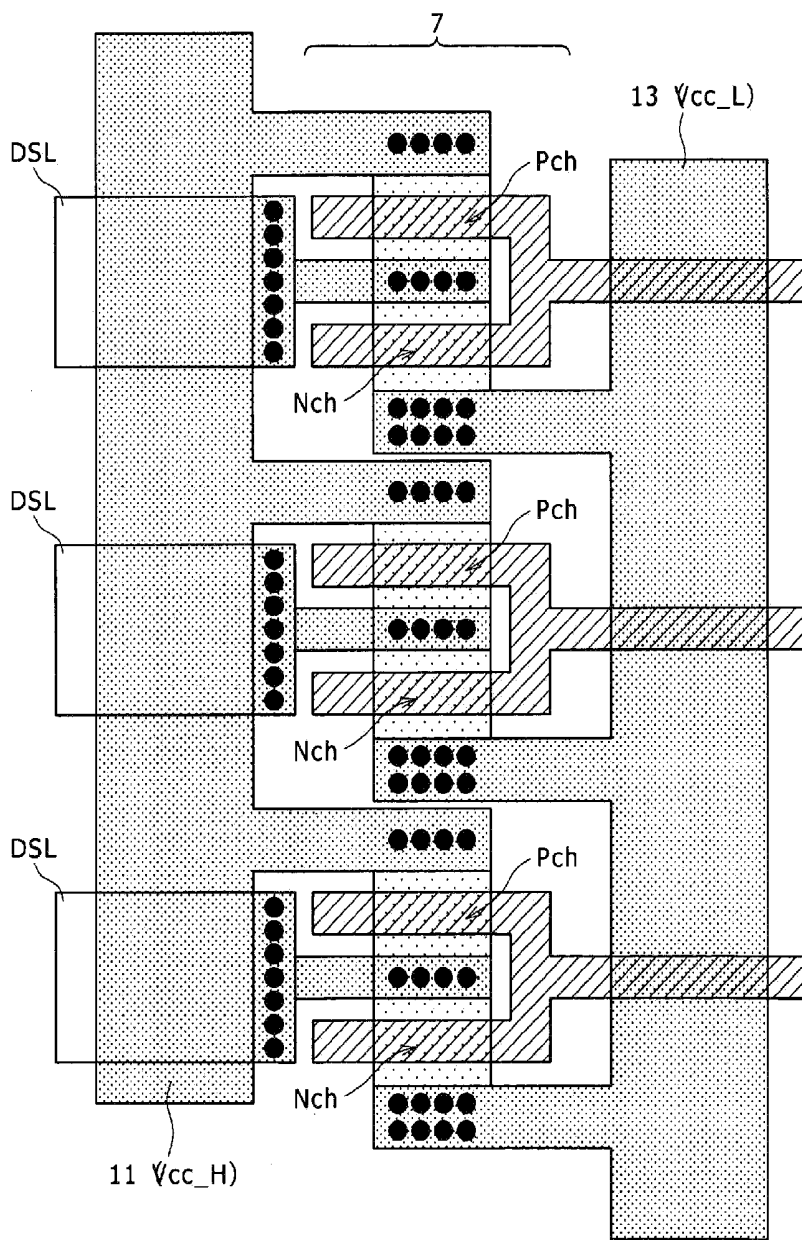


FIG. 4

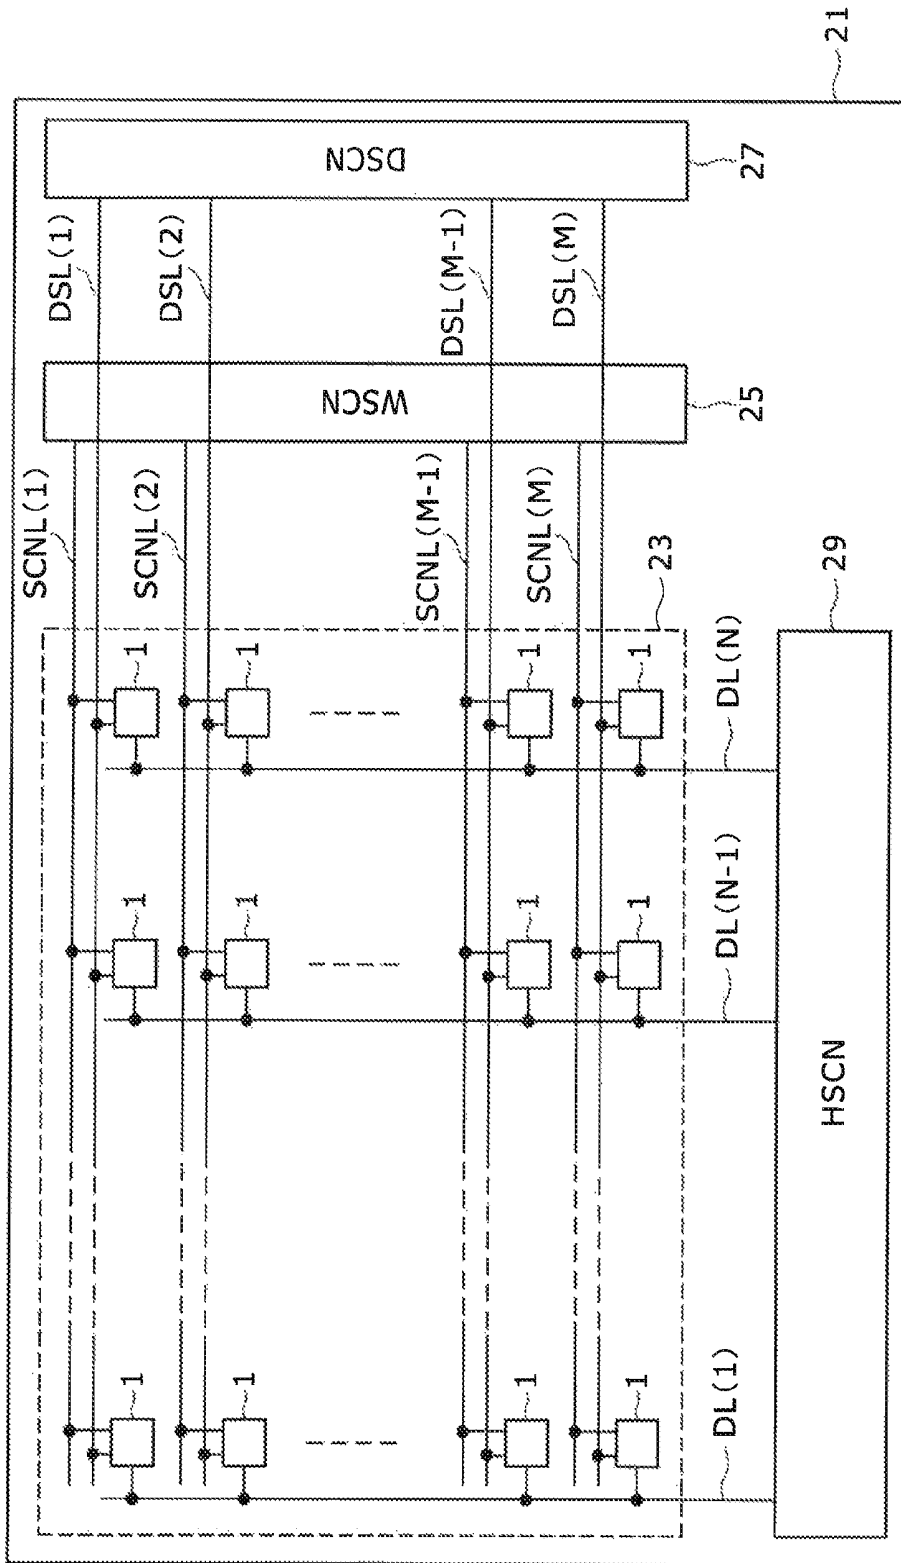




FIG. 6A

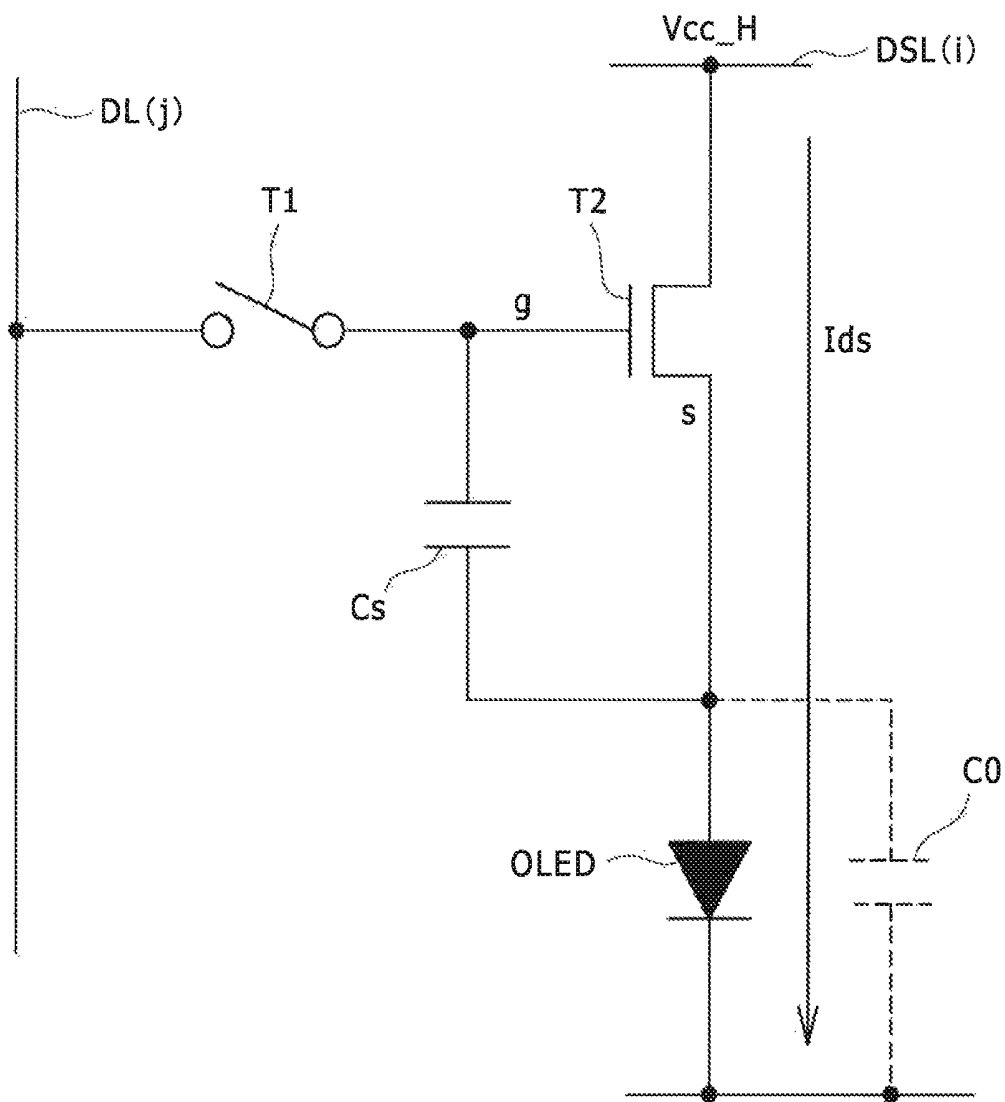


FIG. 6B

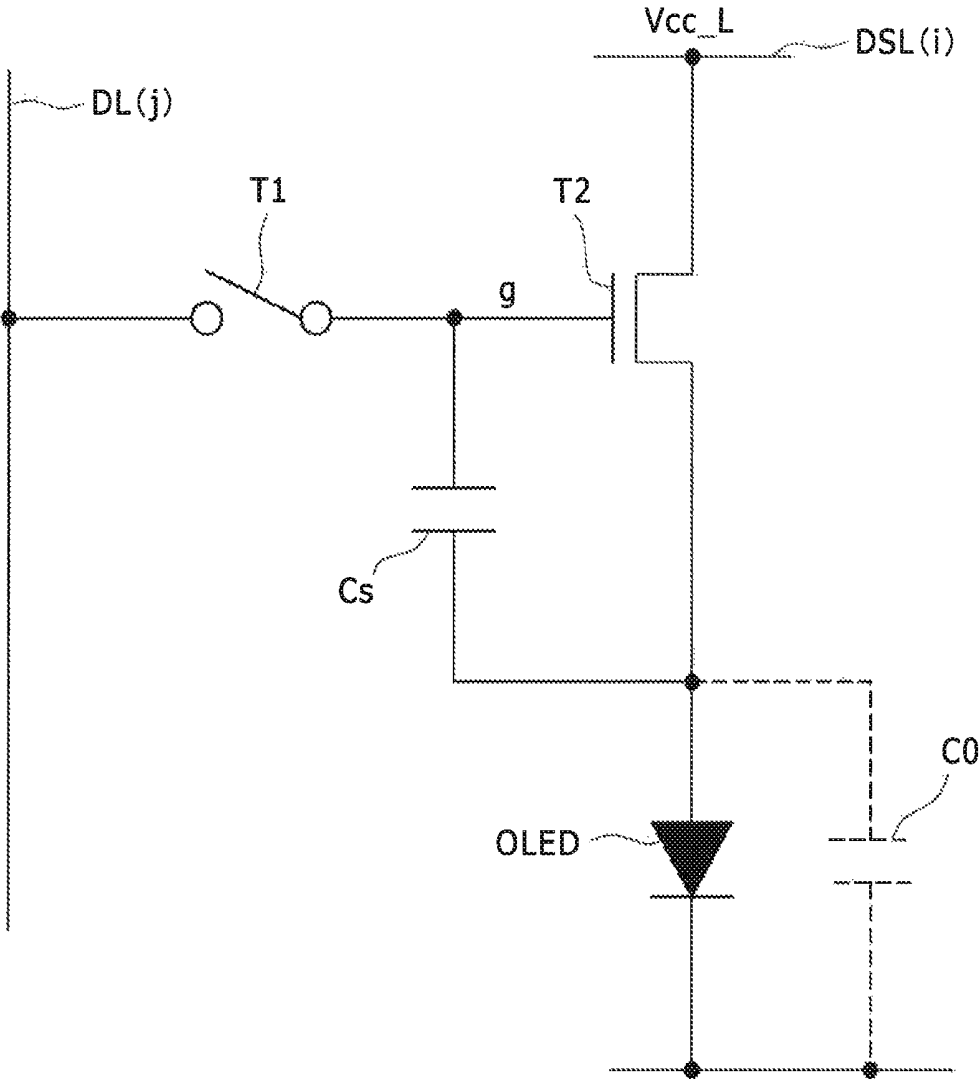


FIG. 6C

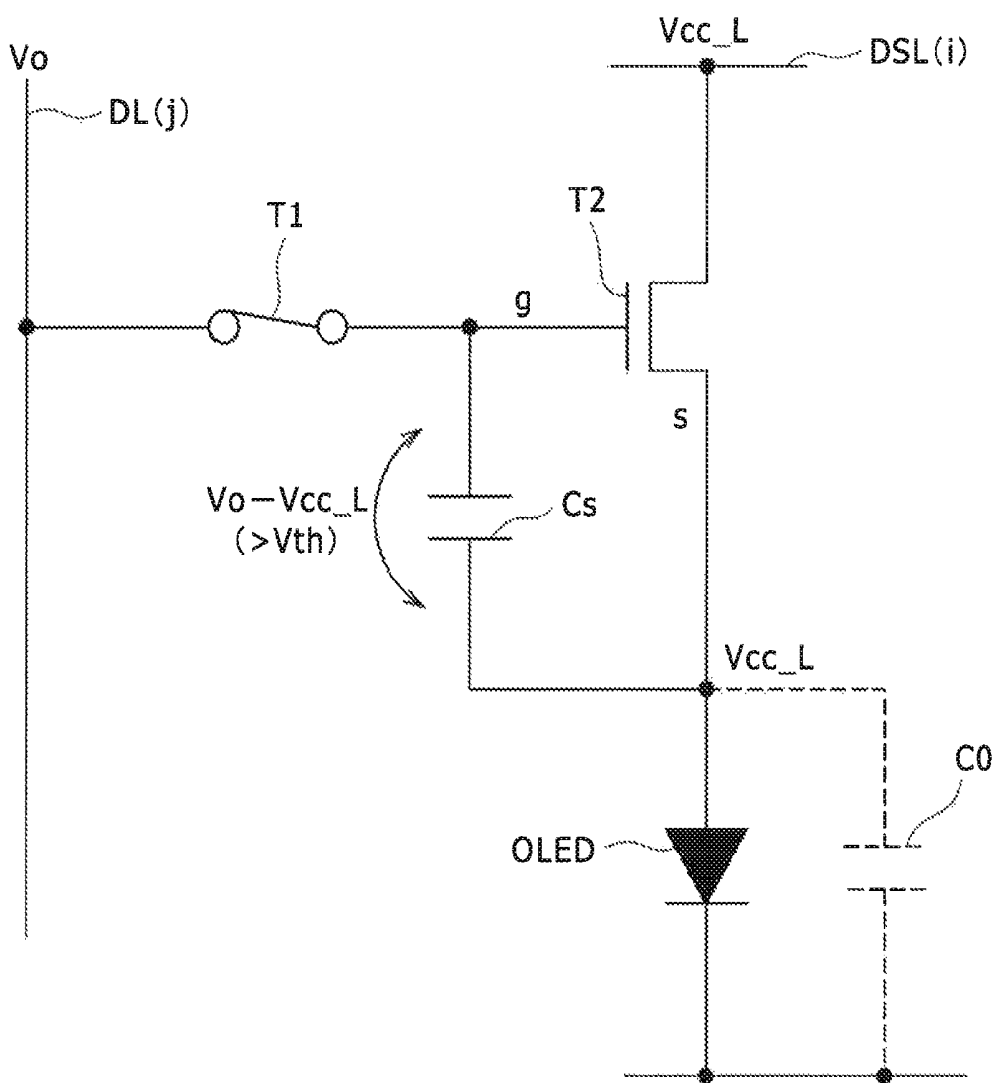


FIG. 6D

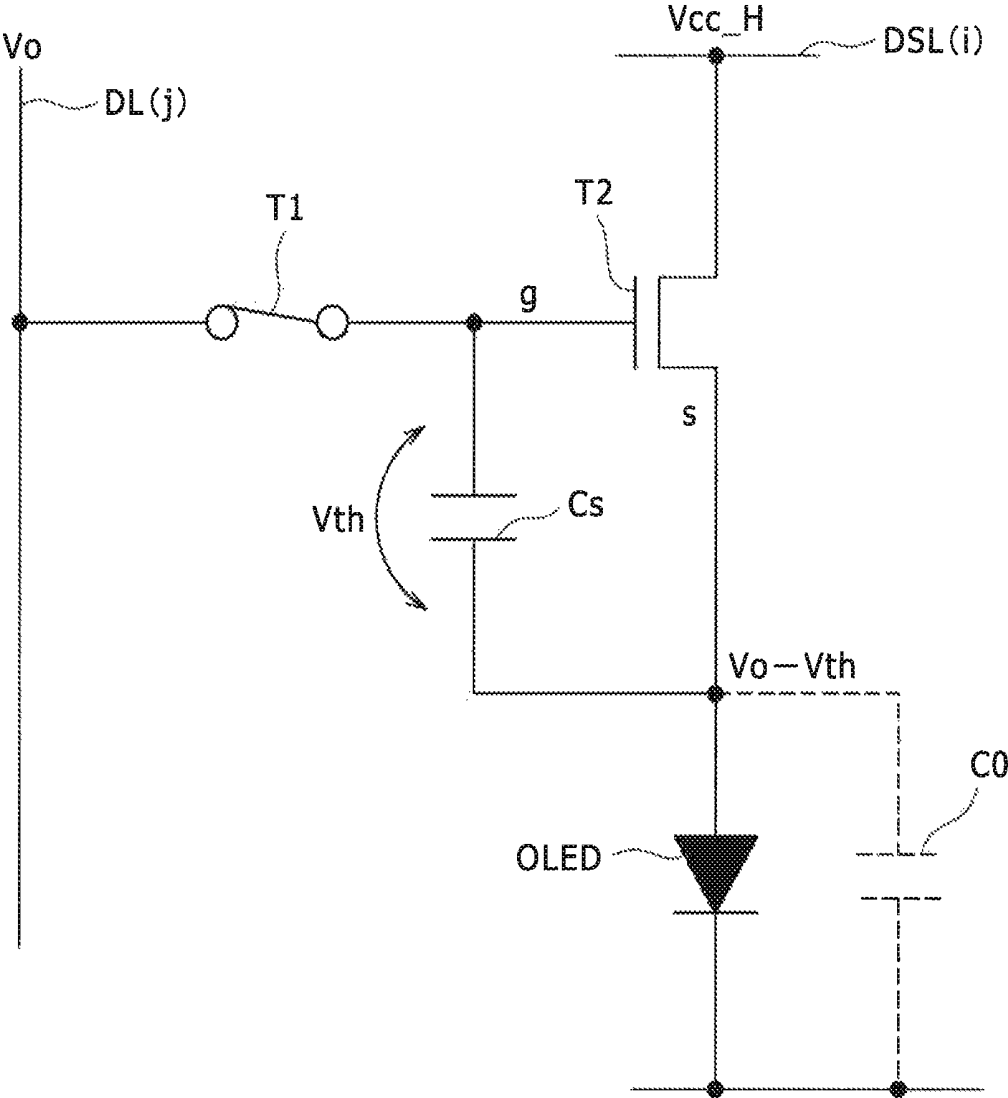


FIG. 6E

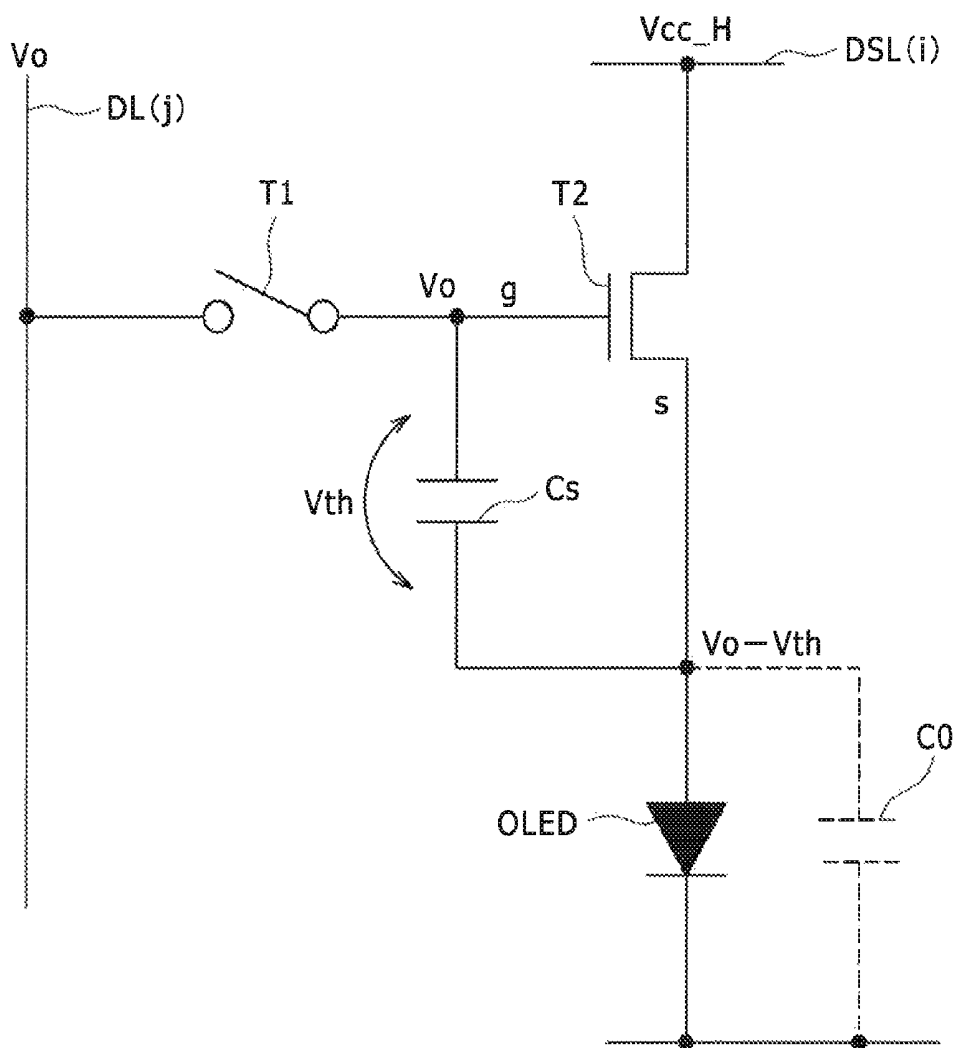


FIG. 6F

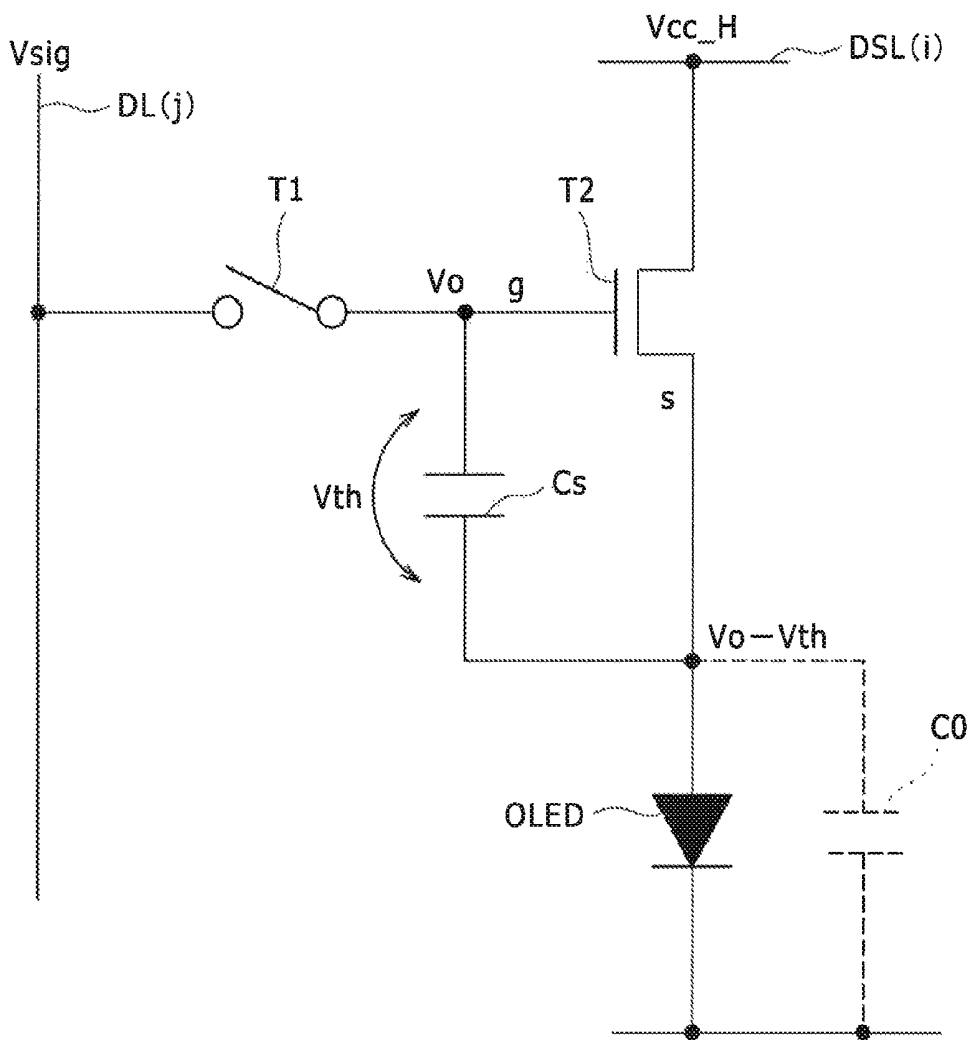


FIG. 6G

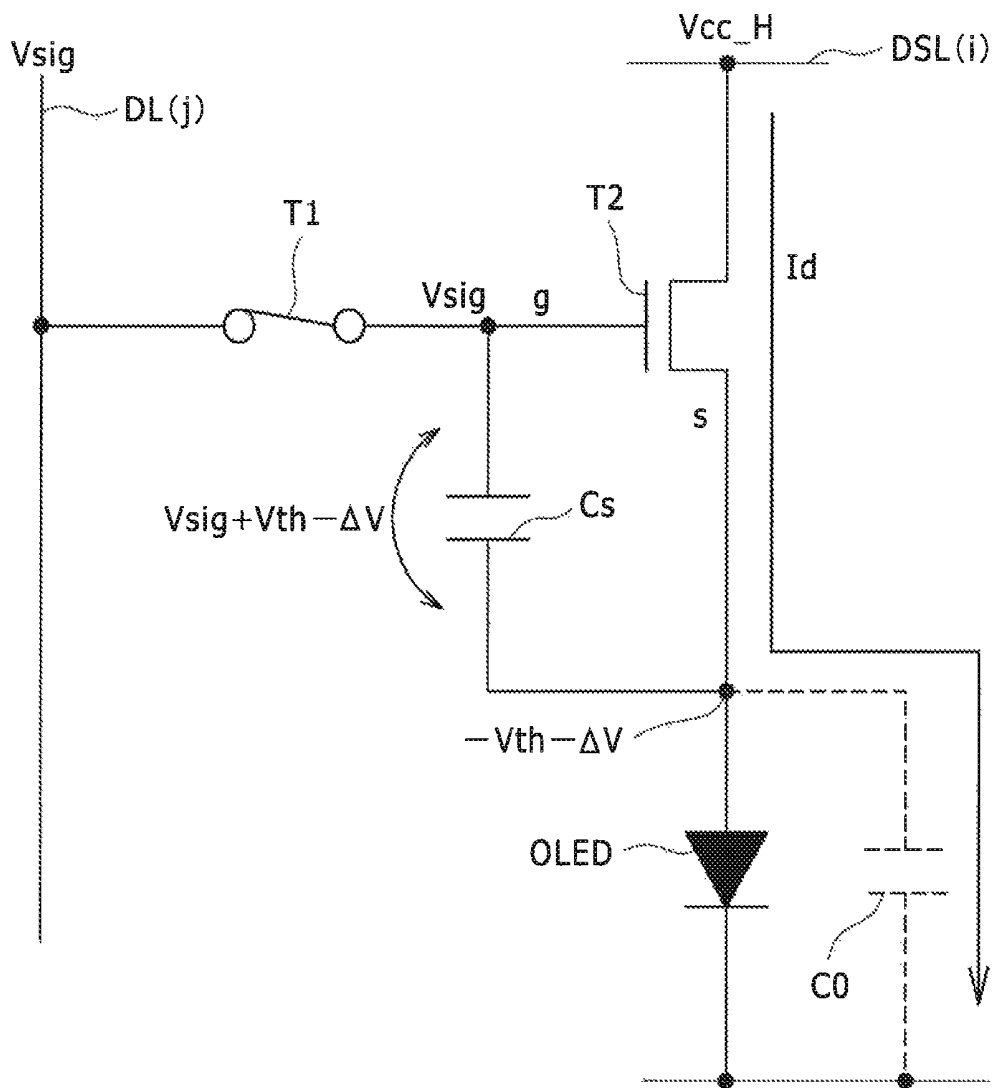


FIG. 6H


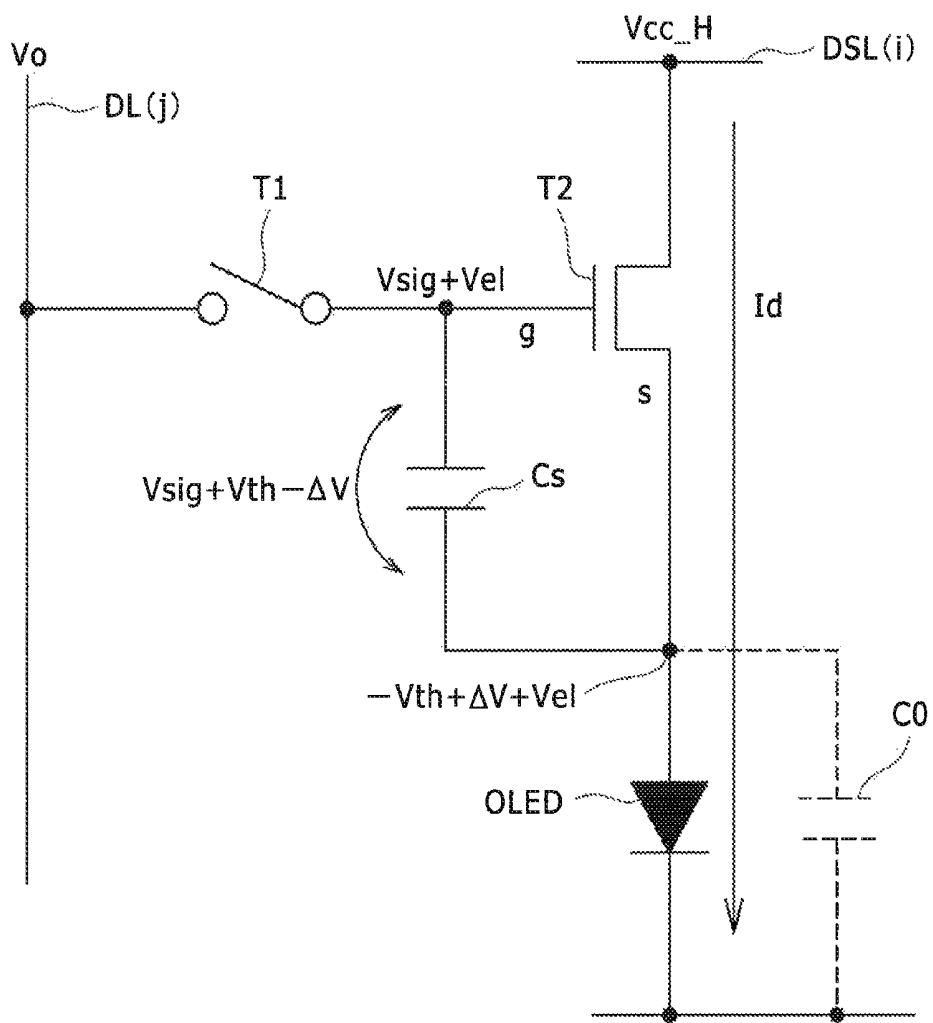


FIG. 7

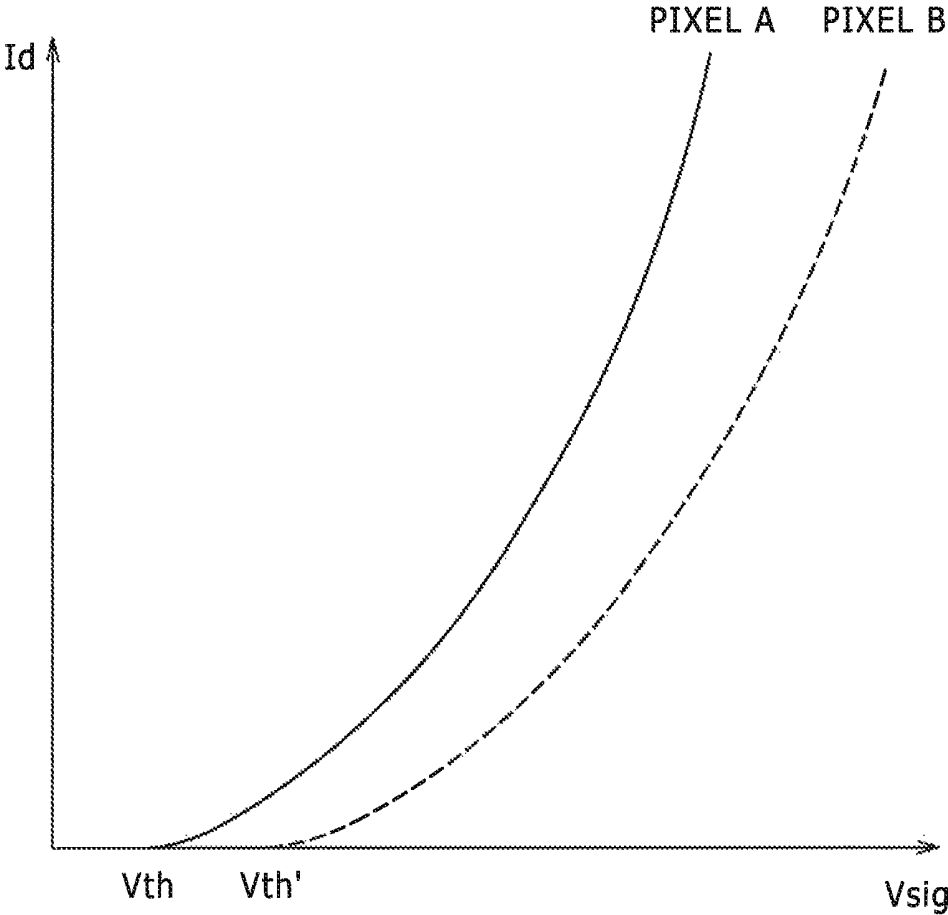

THRESHOLD NOT CORRECTED +  
MOBILITY  $\mu$  NOT CORRECTED

FIG. 8


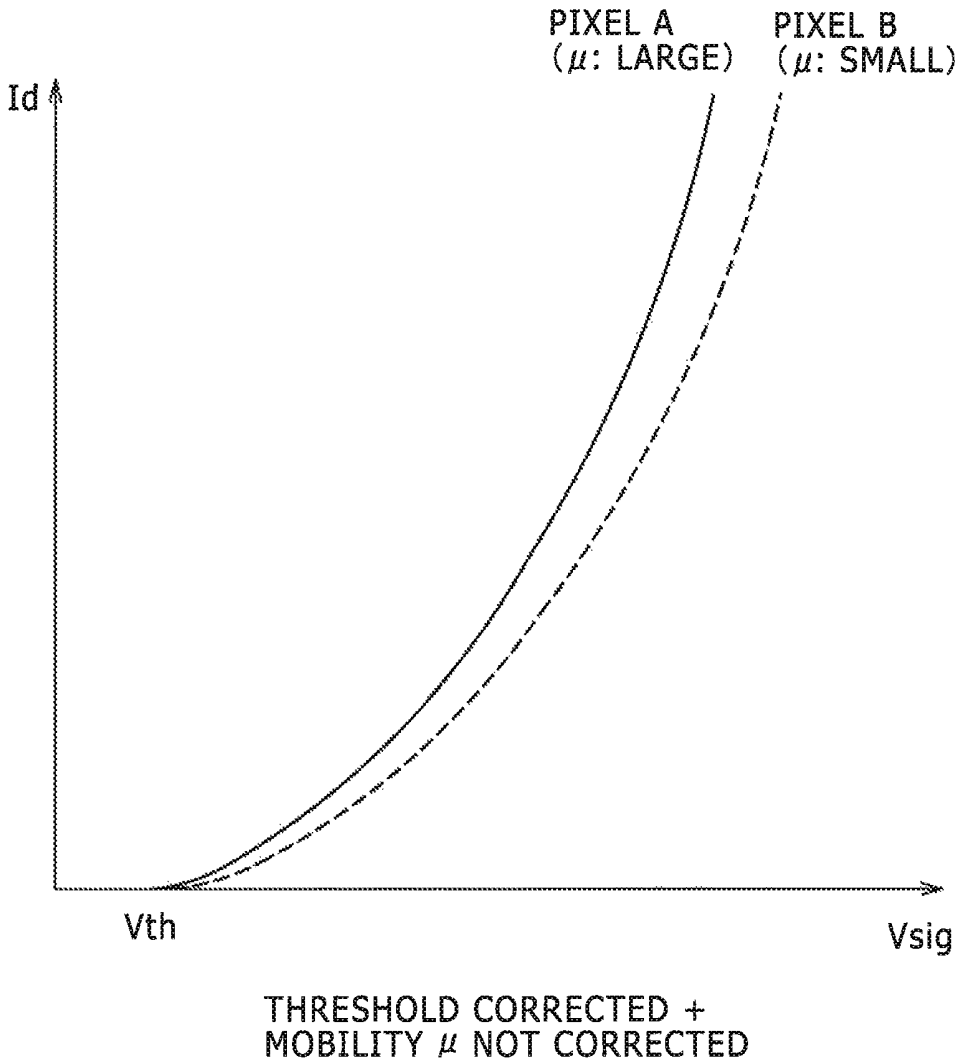


FIG. 9

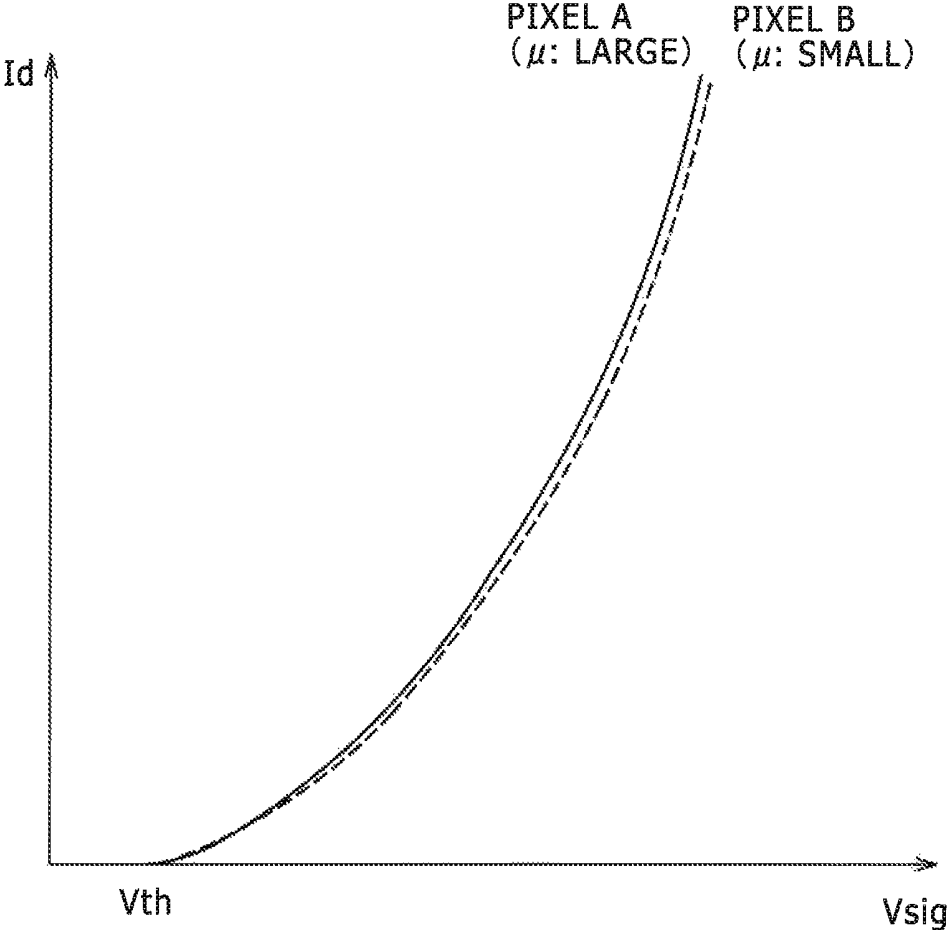

THRESHOLD CORRECTED + MOBILITY  $\mu$  CORRECTED

FIG. 10

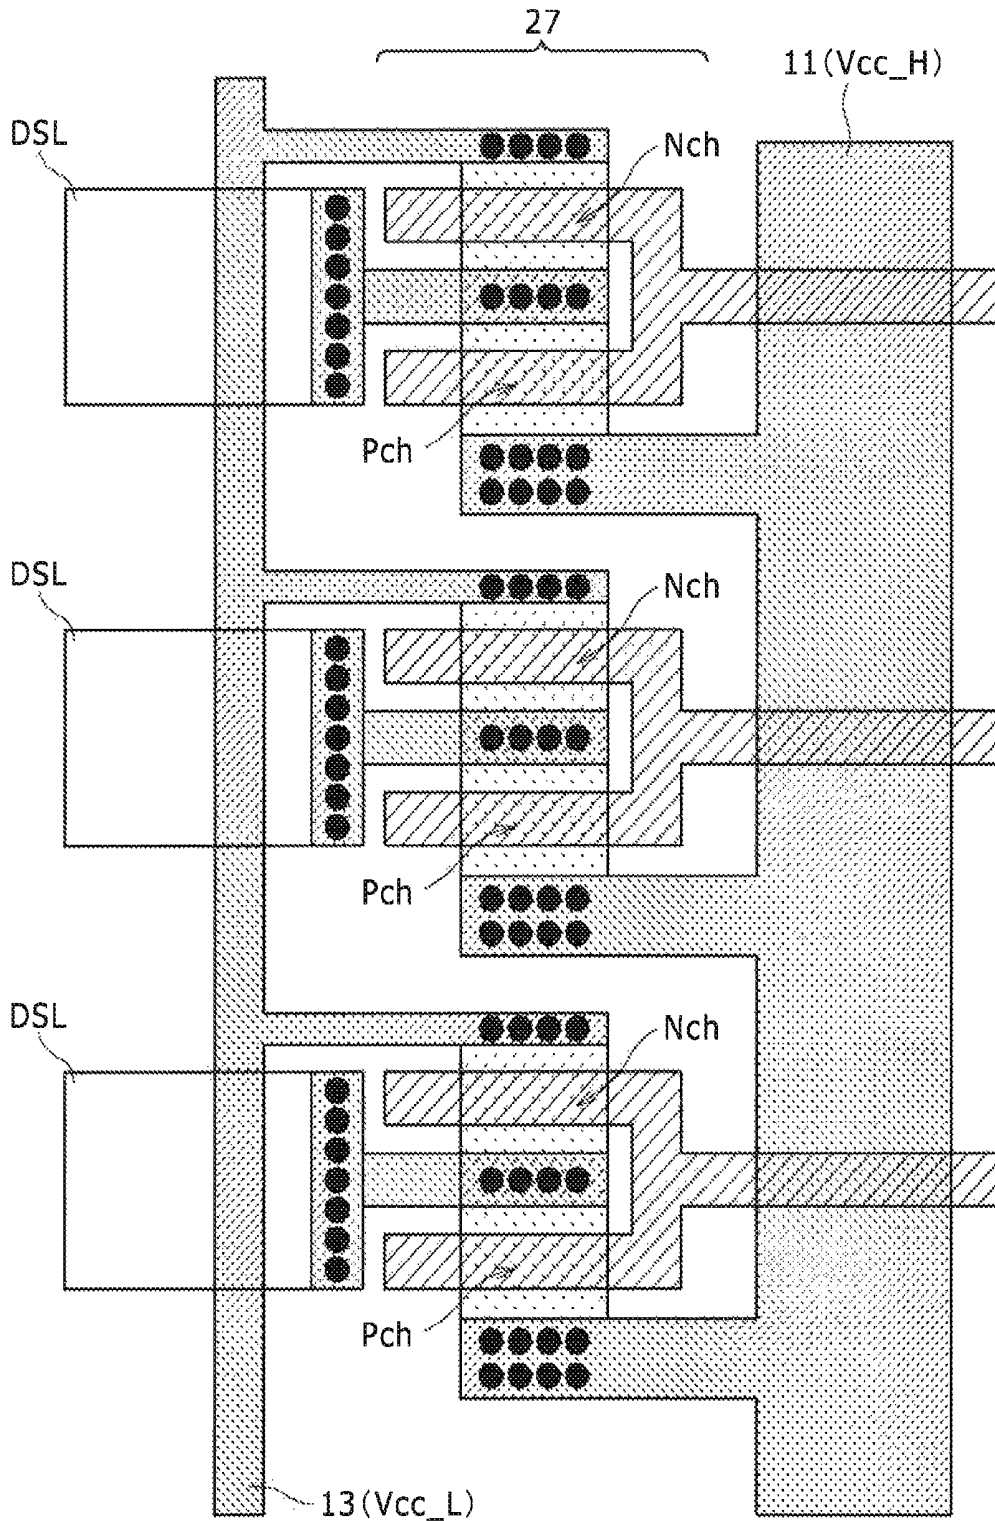


FIG. 11

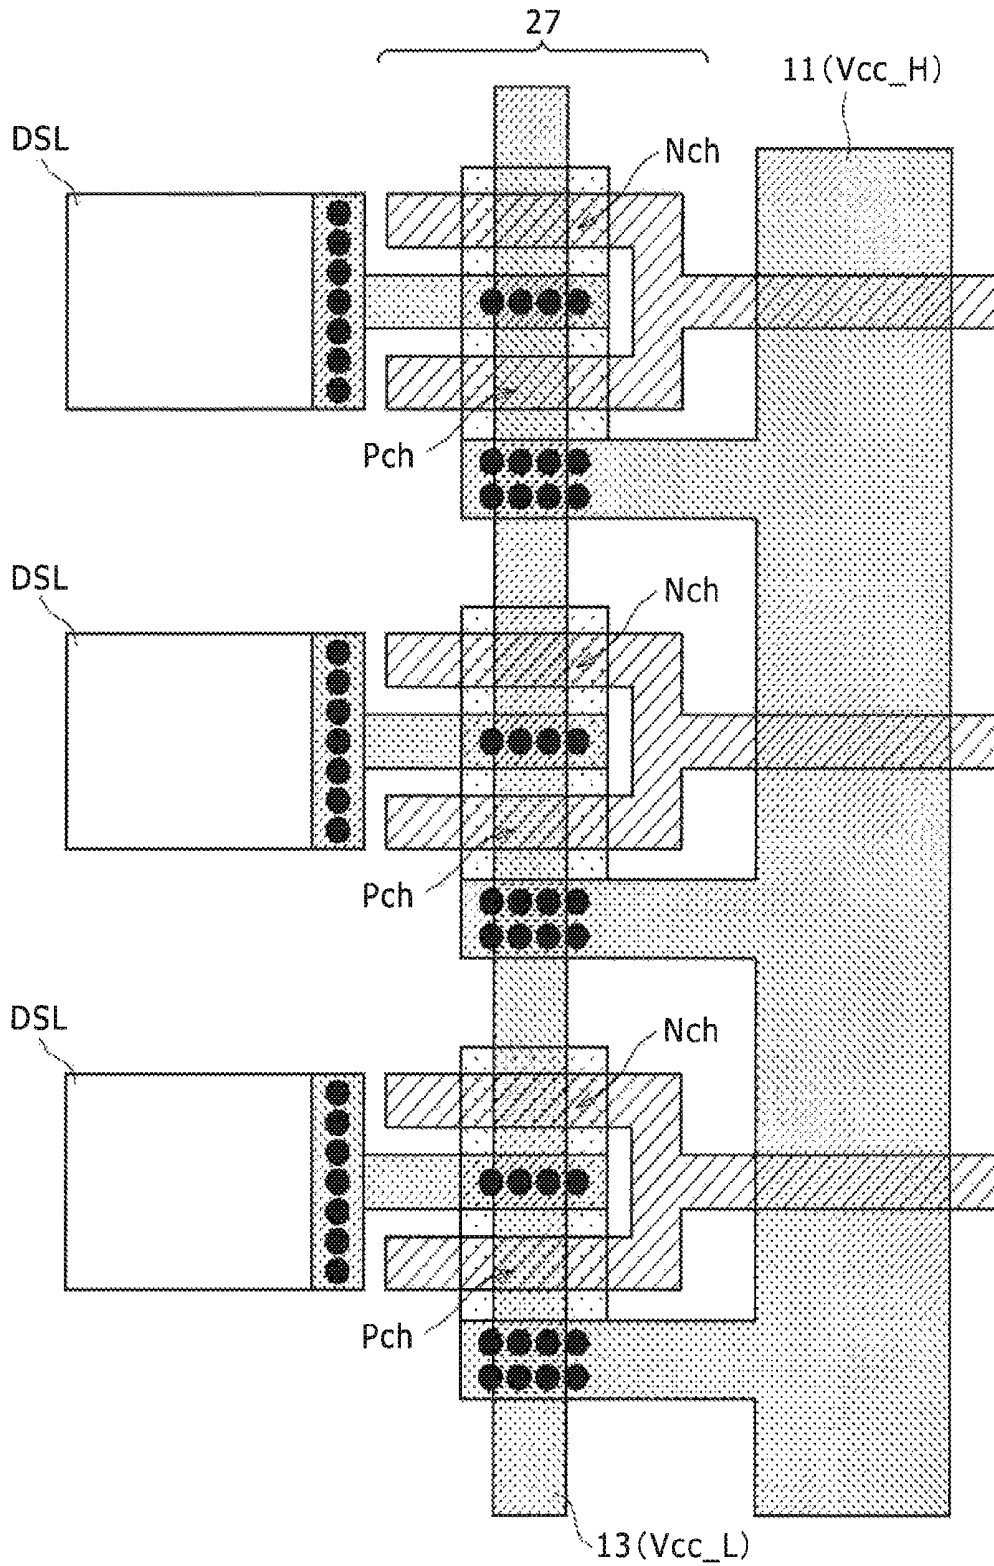


FIG. 12

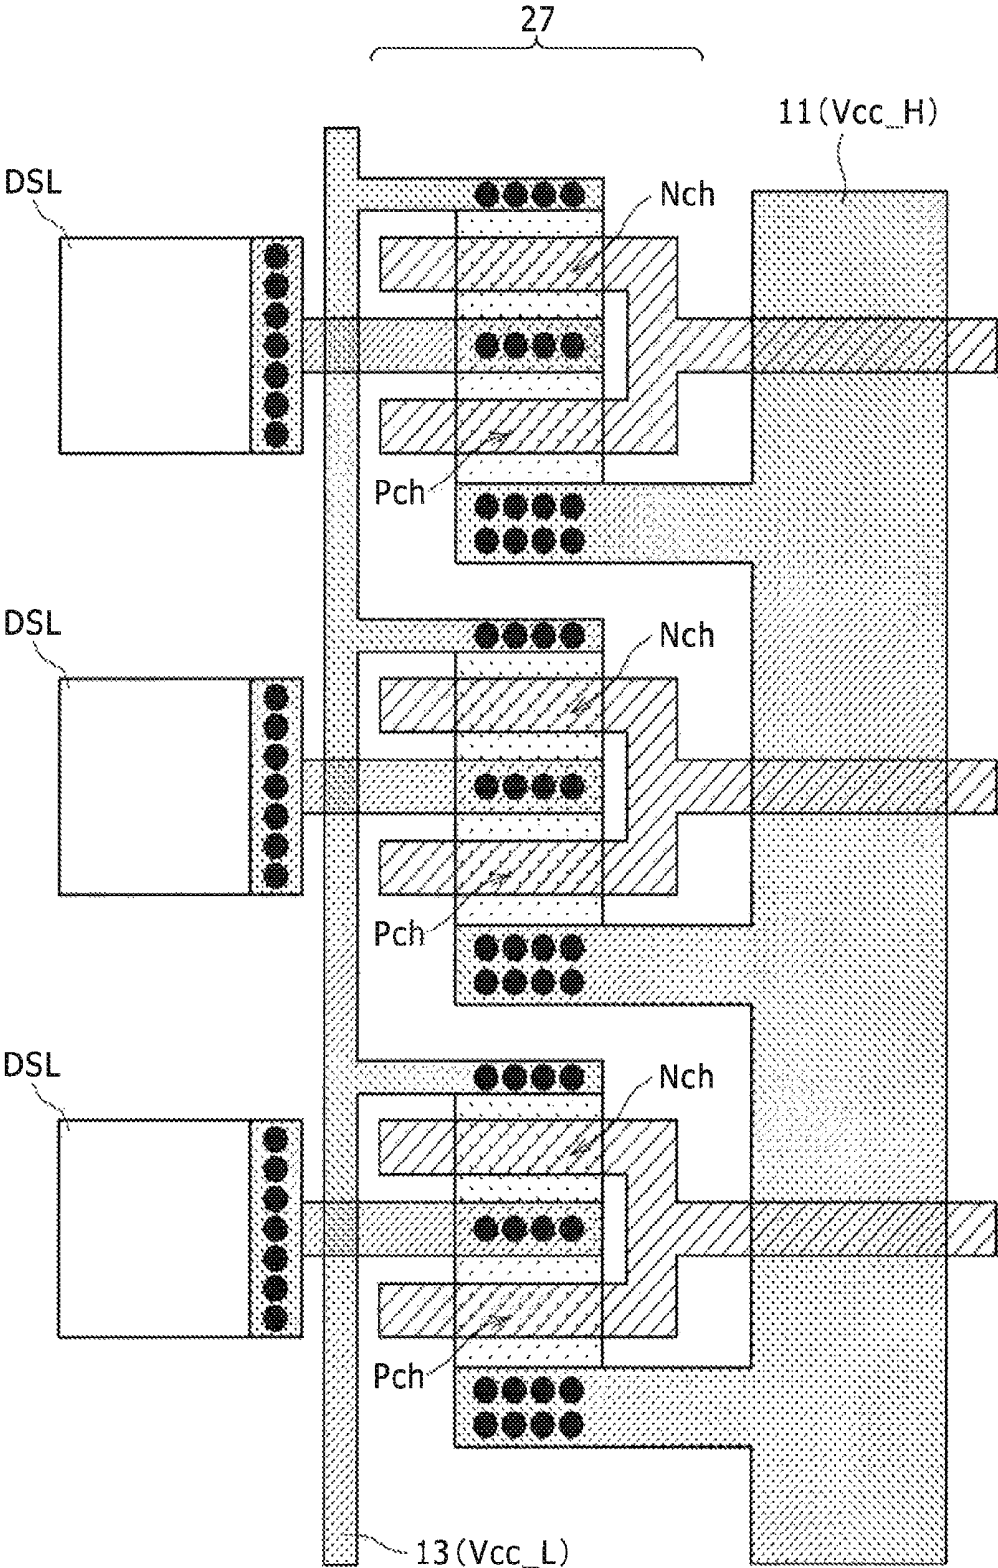


FIG. 13

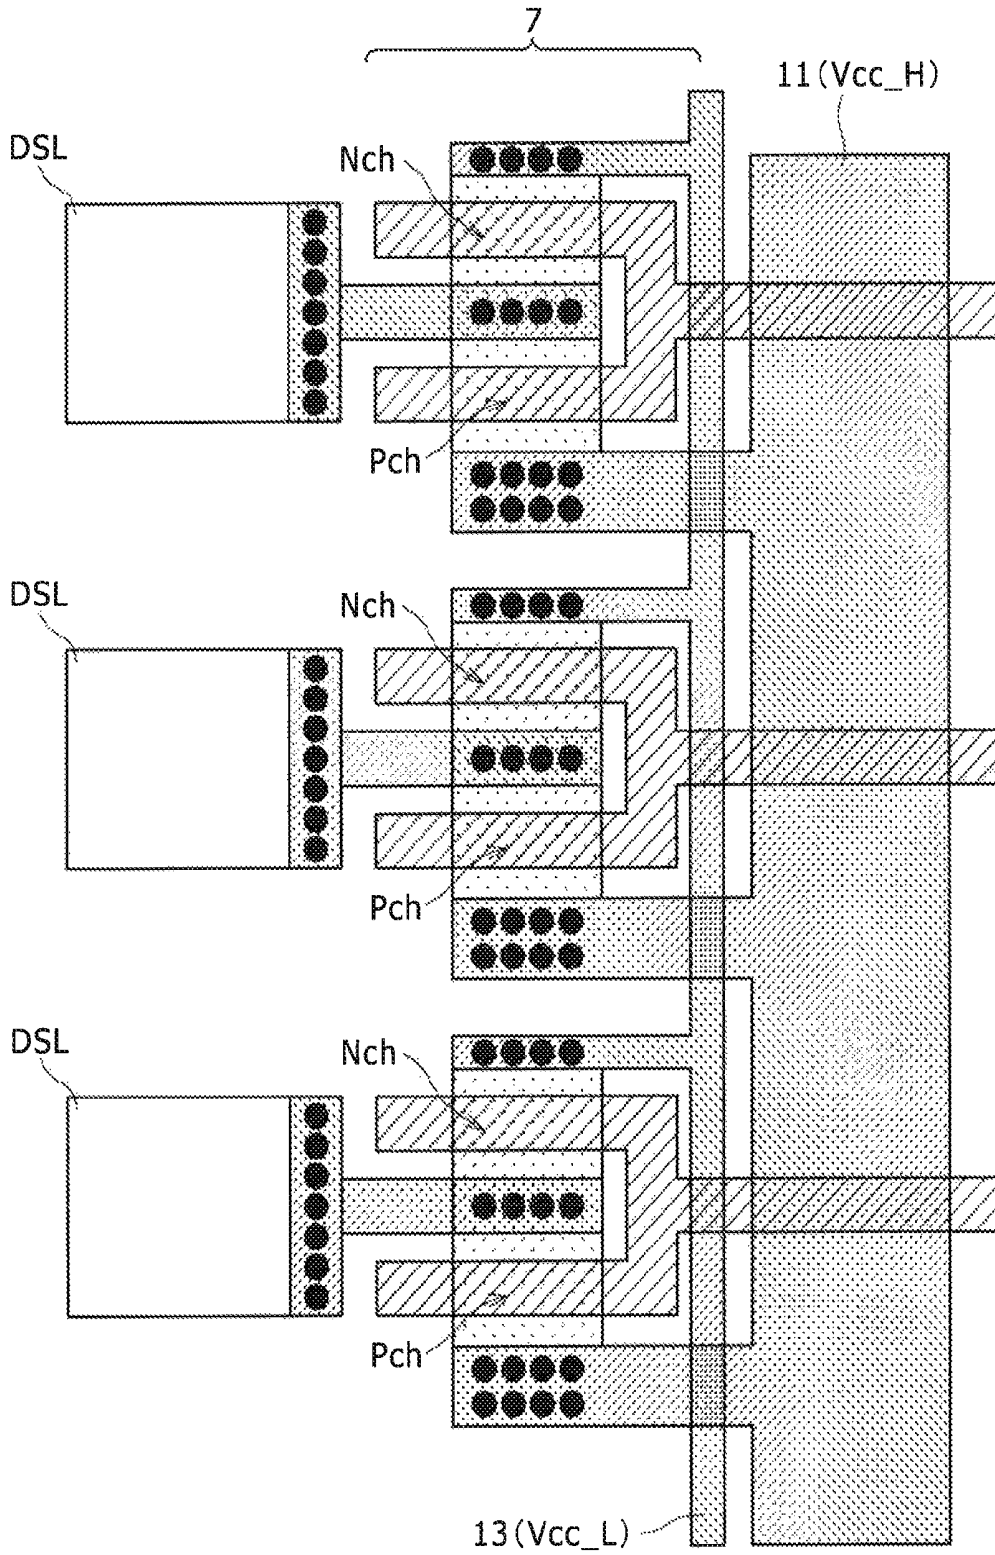


FIG. 14

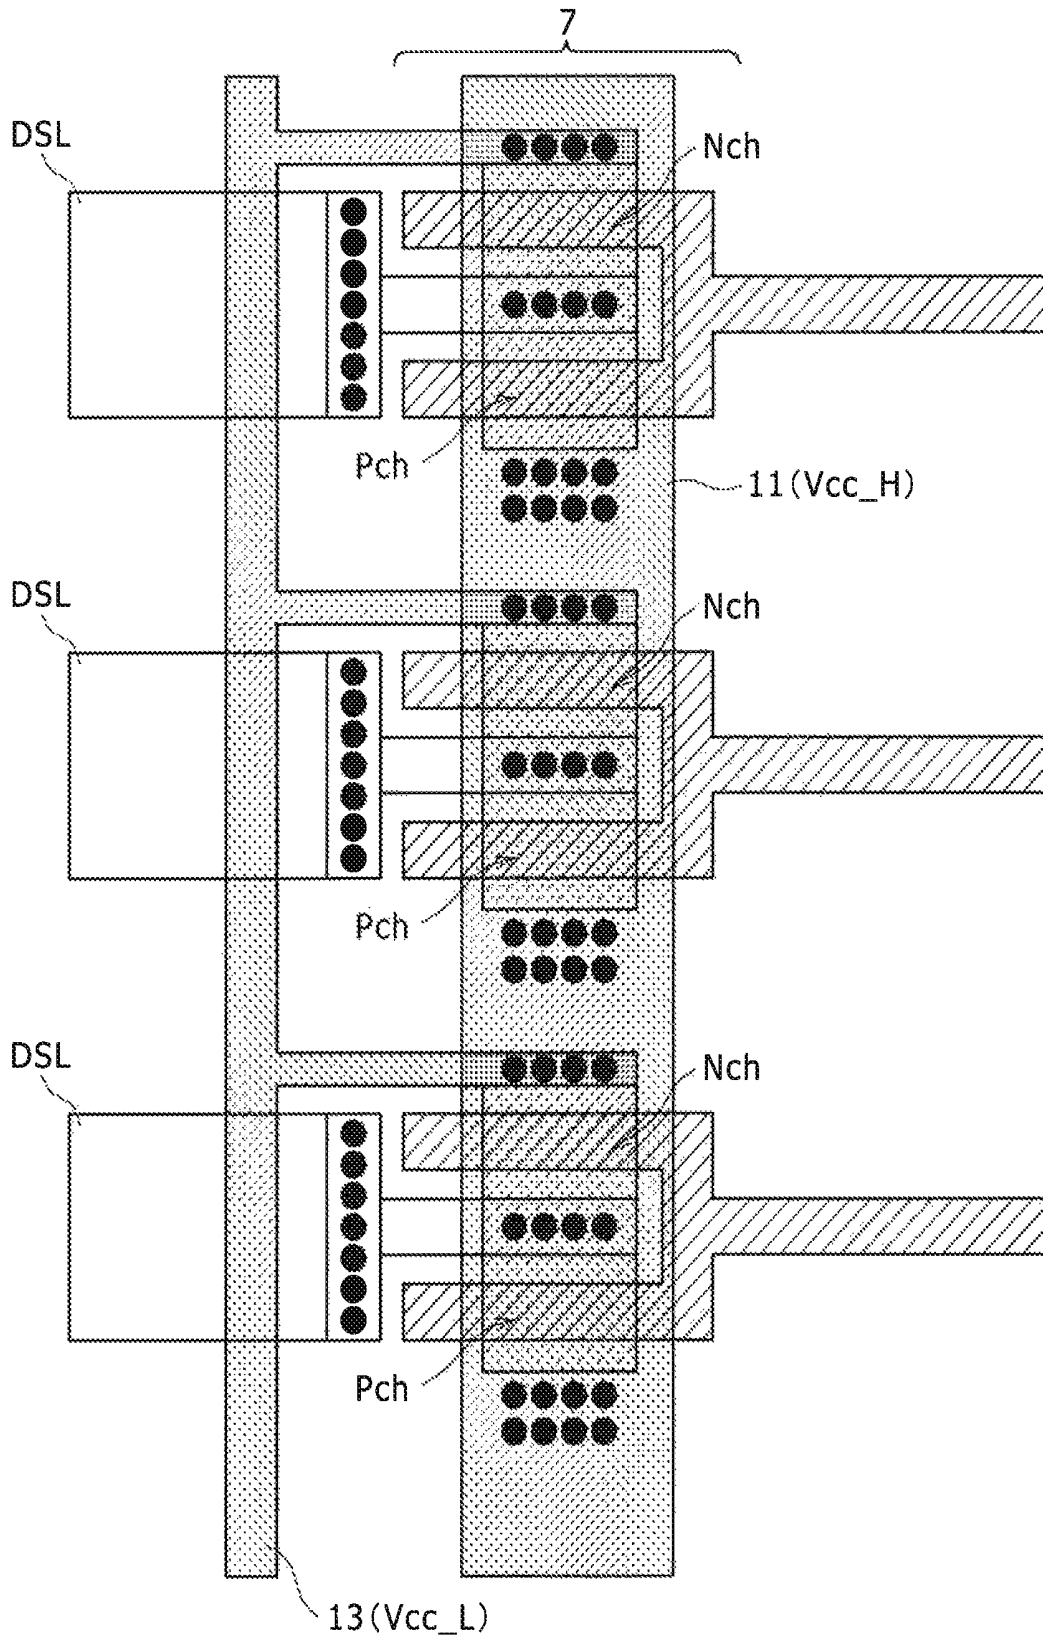


FIG. 15

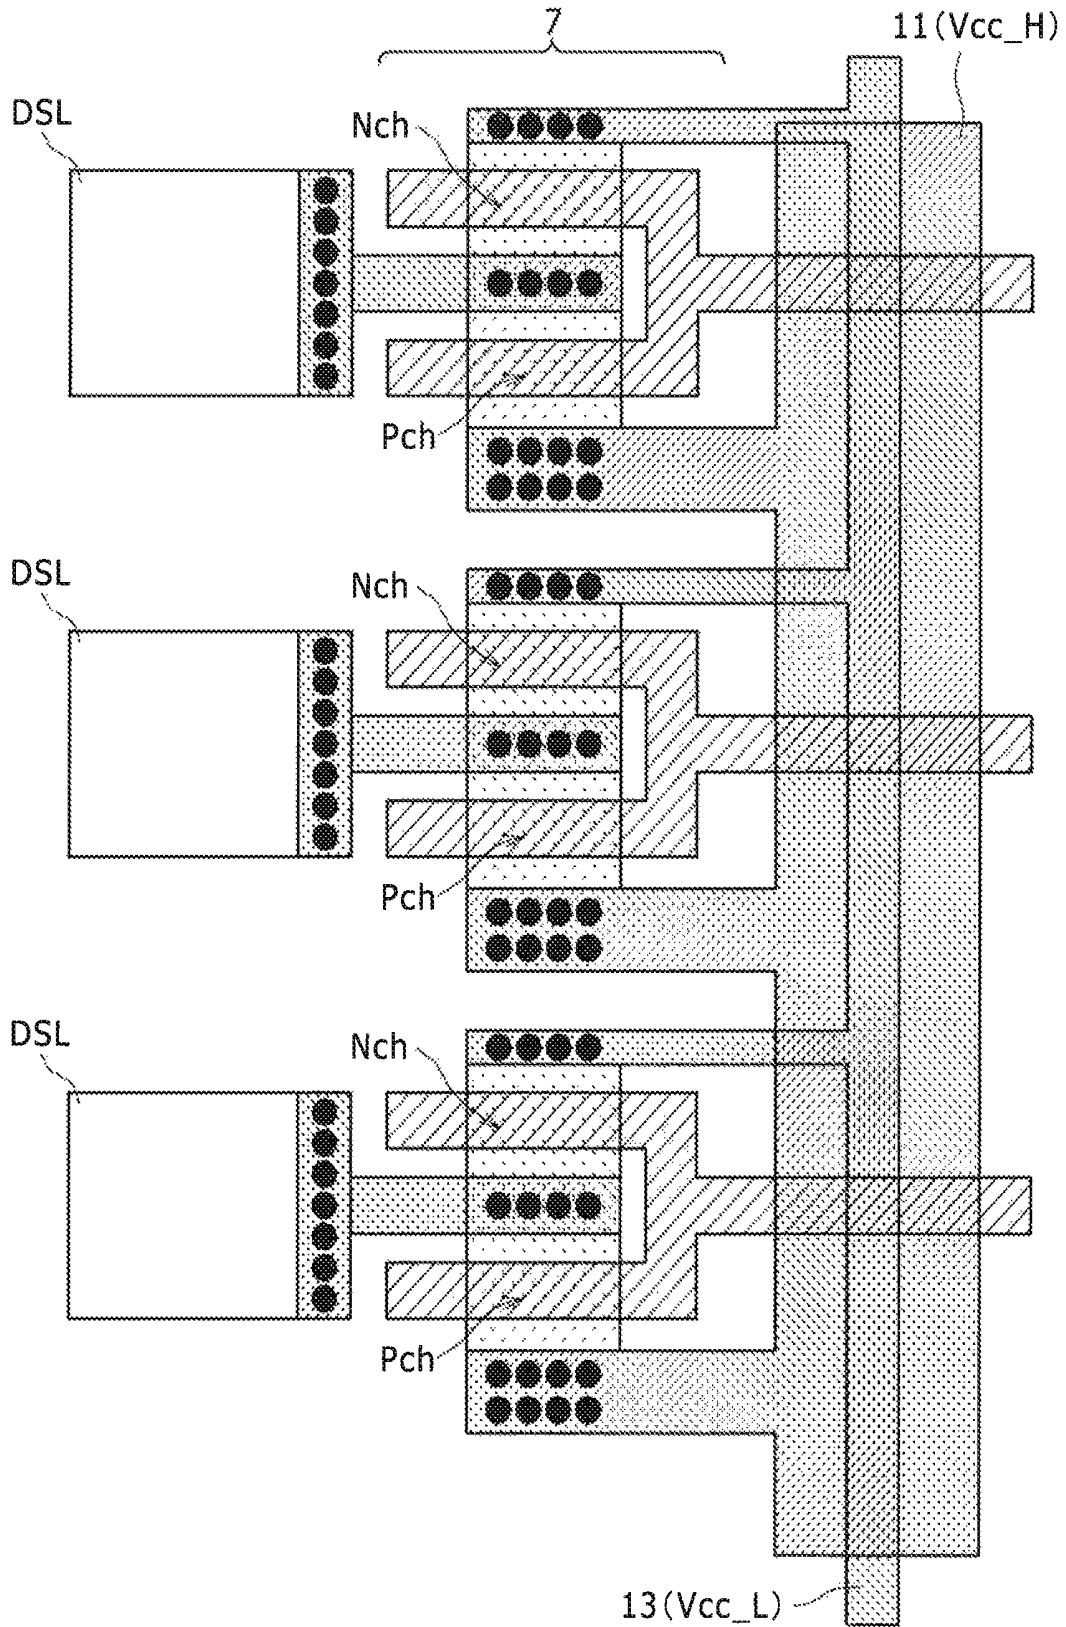


FIG. 16

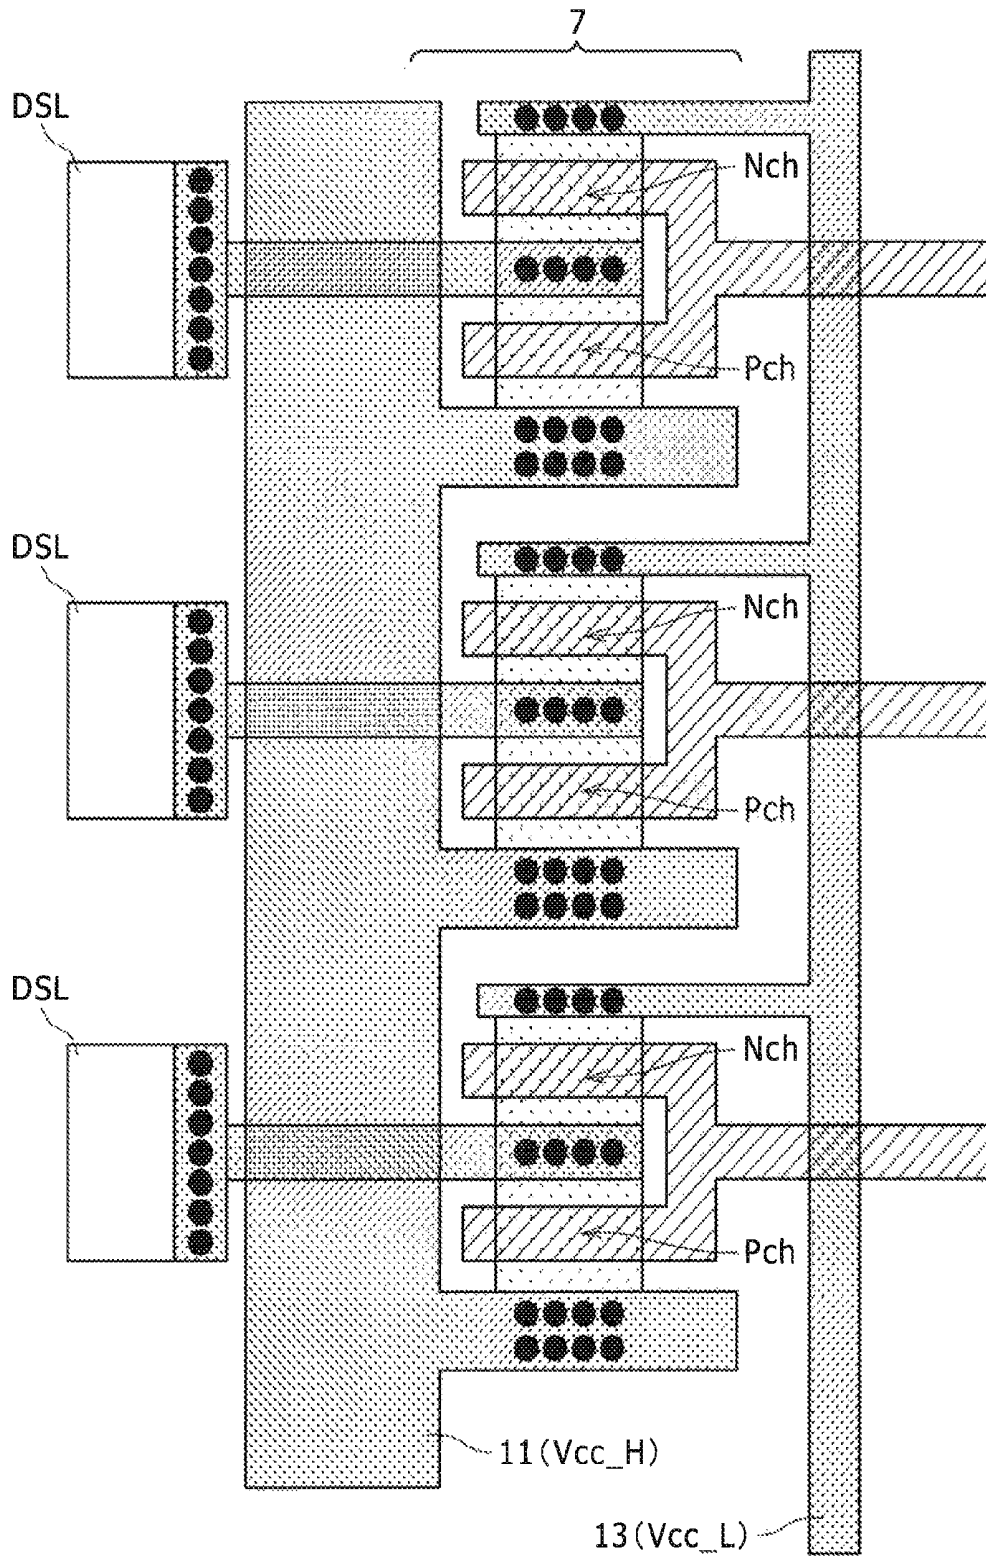


FIG. 17

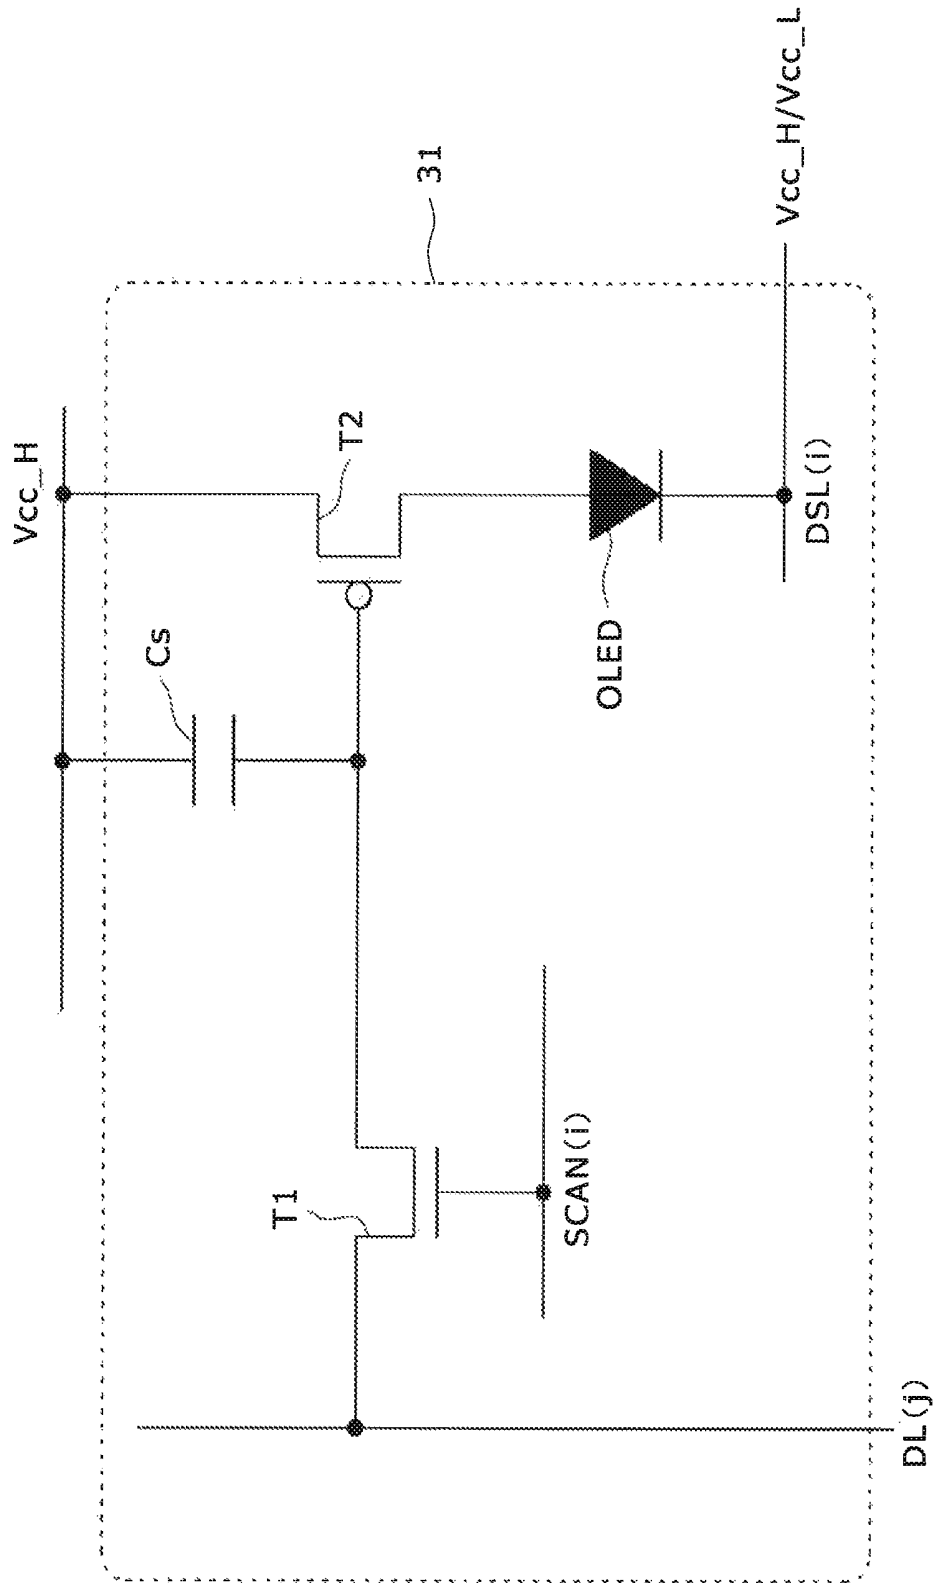


FIG. 18

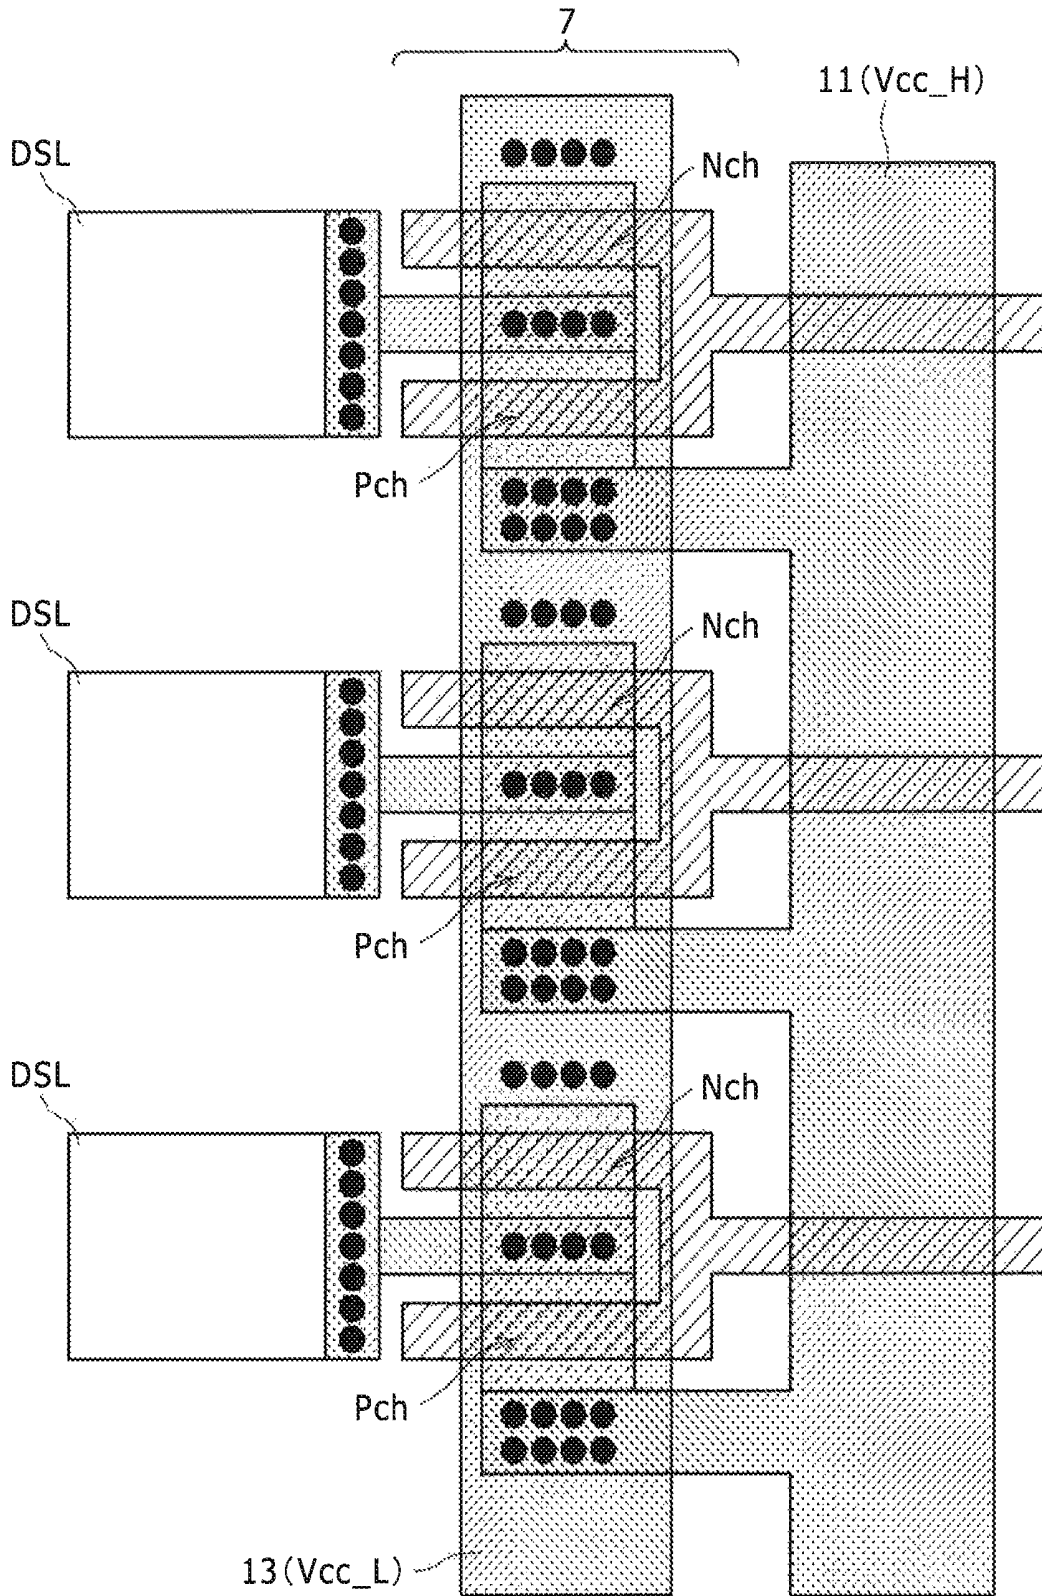


FIG. 19

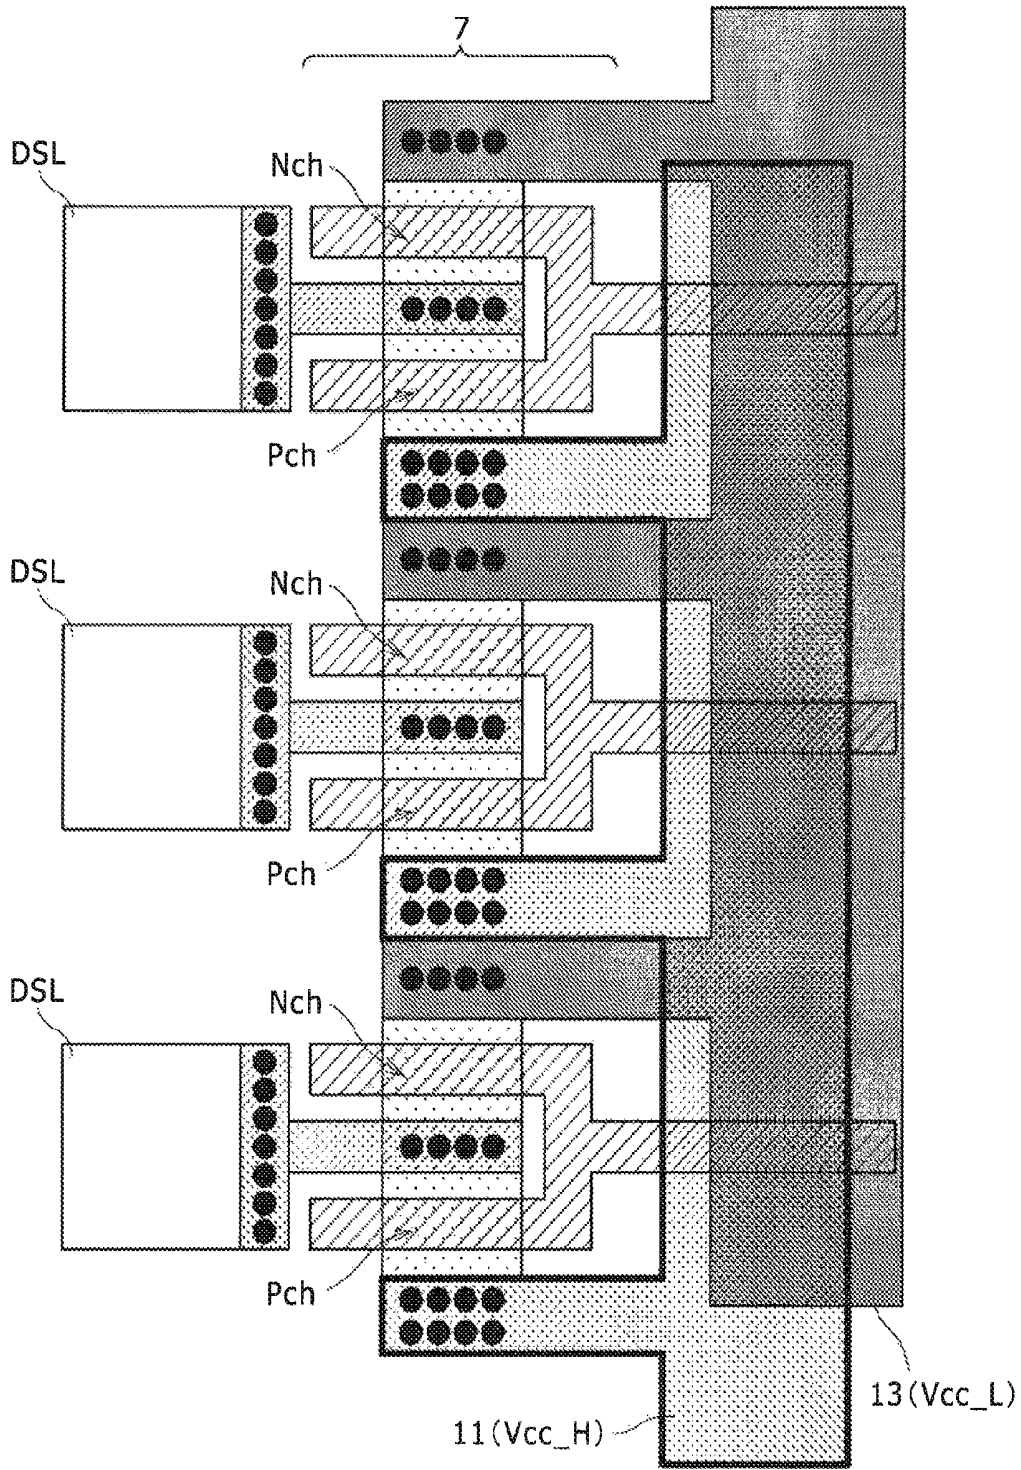


FIG. 20

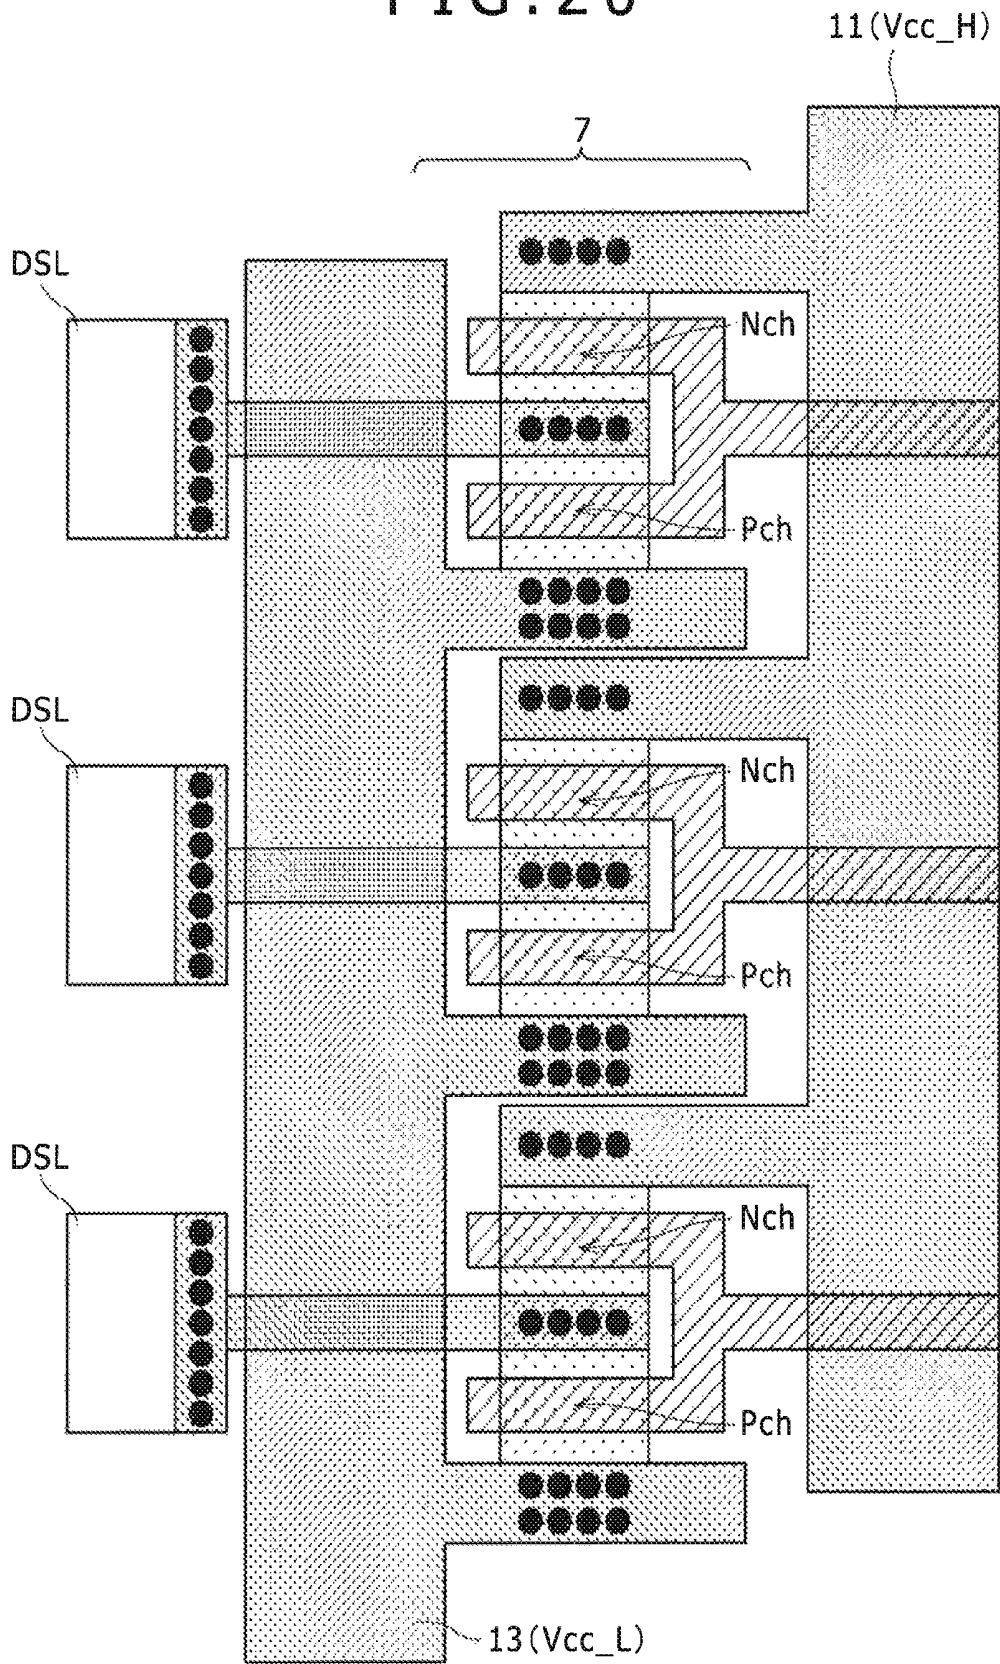


FIG. 21

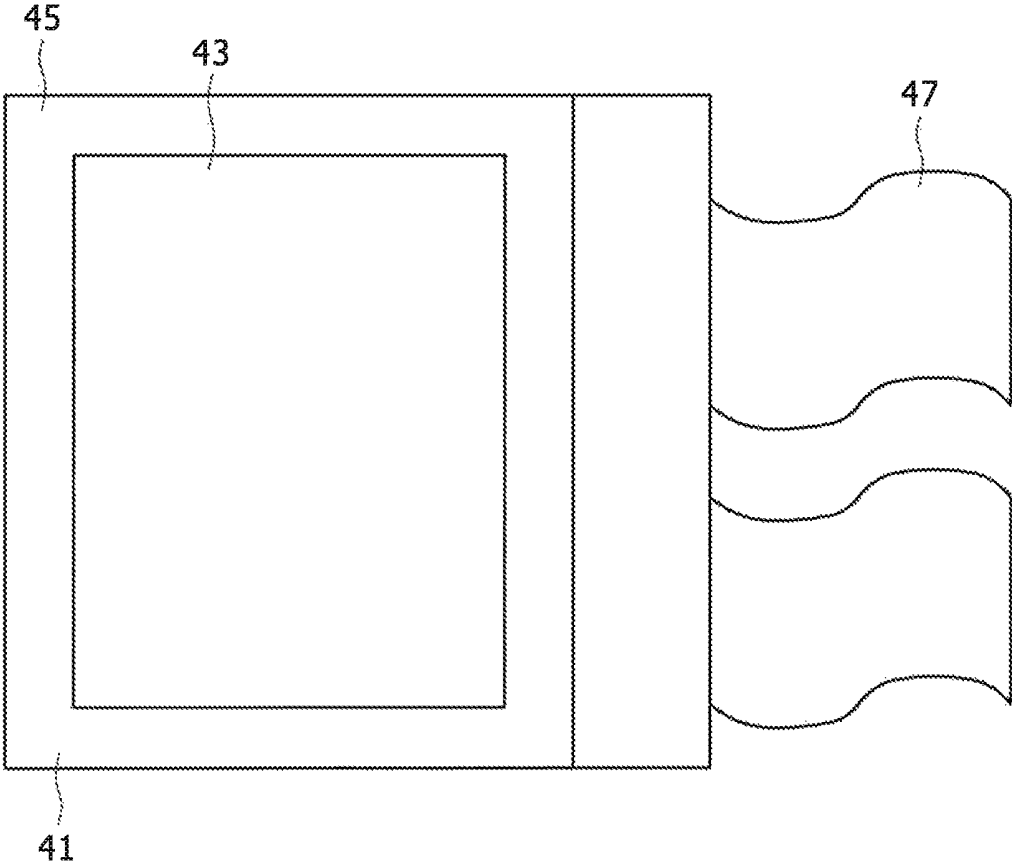


FIG. 22

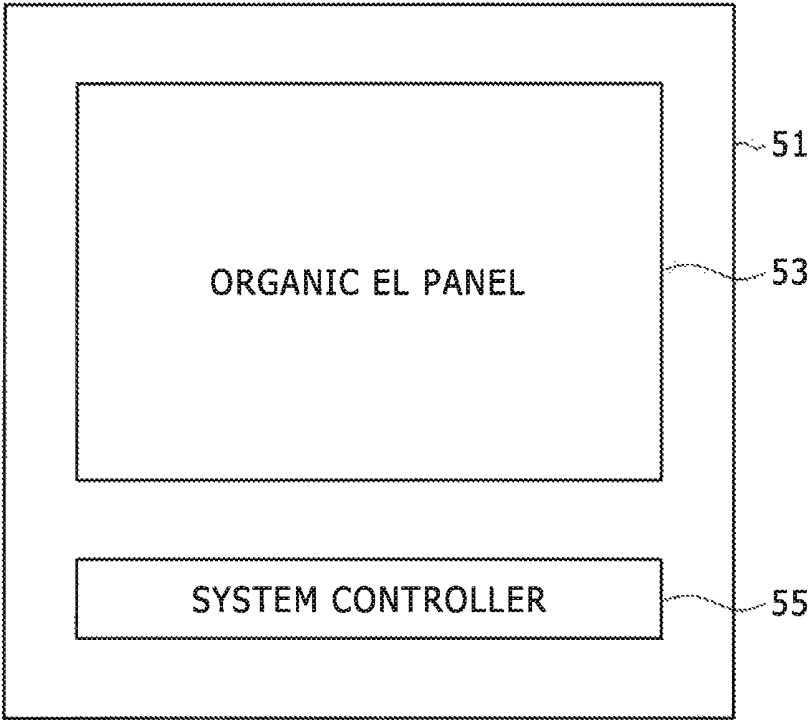


FIG. 23

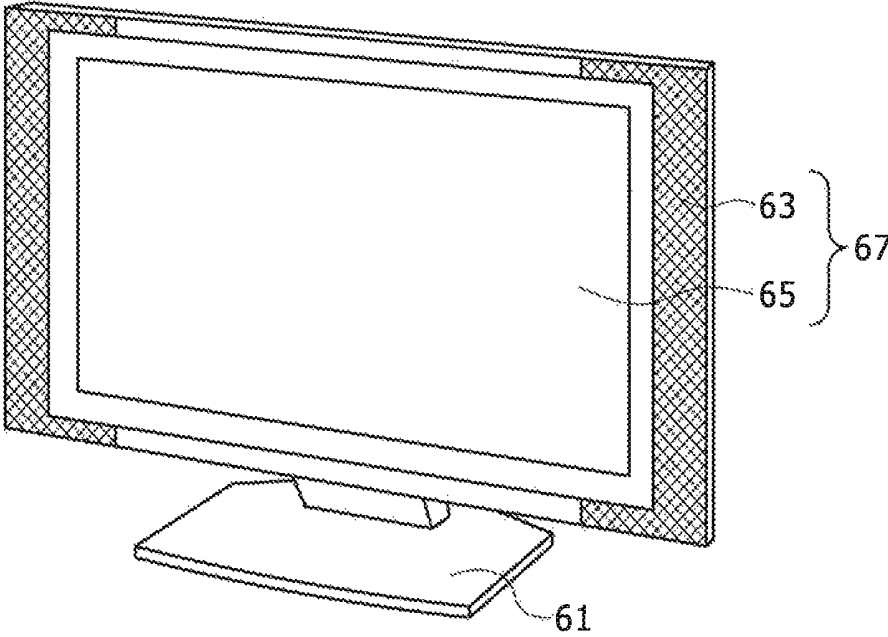


FIG. 24A

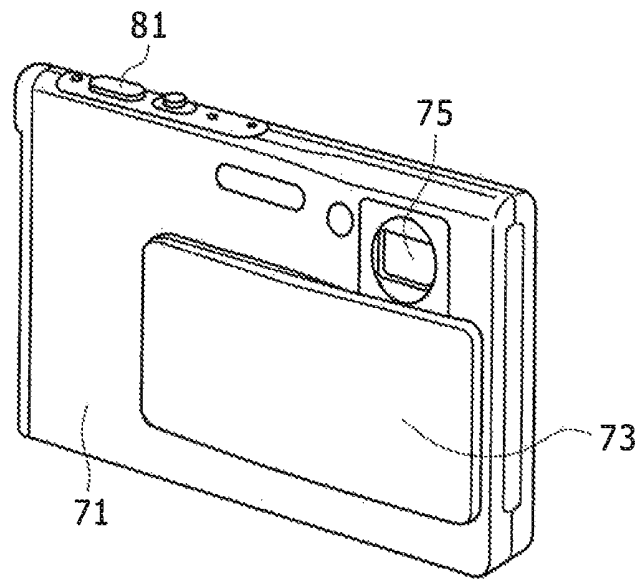


FIG. 24B

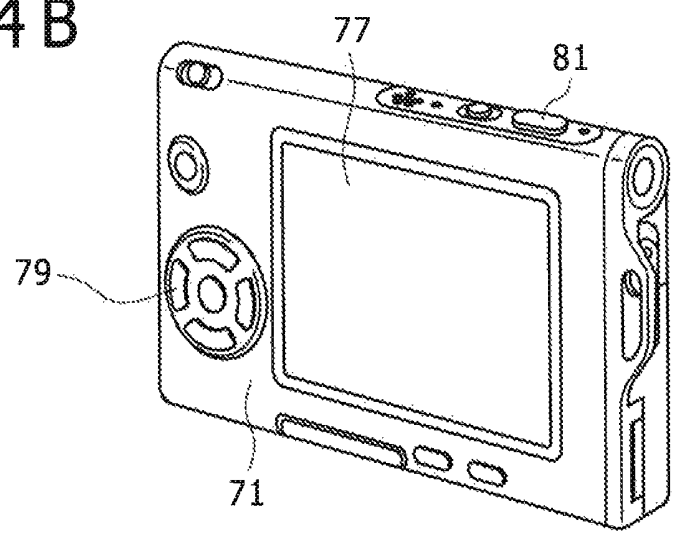


FIG. 25

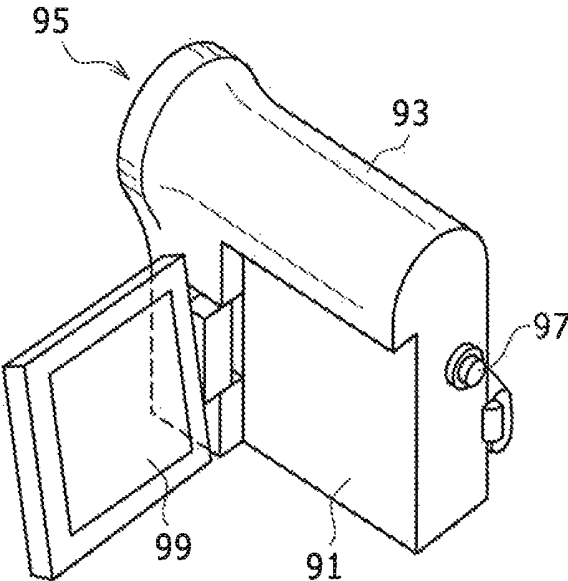


FIG. 26A

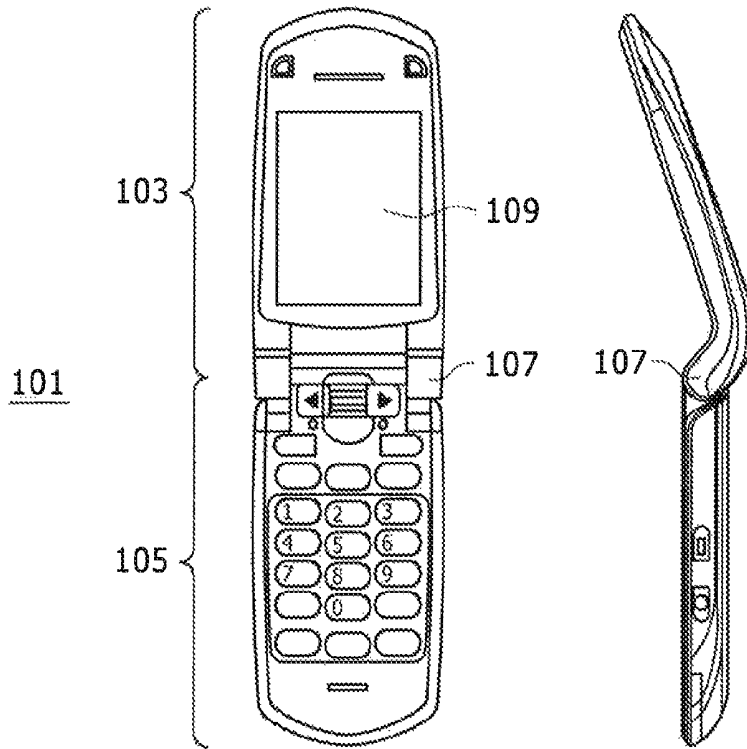


FIG. 26B


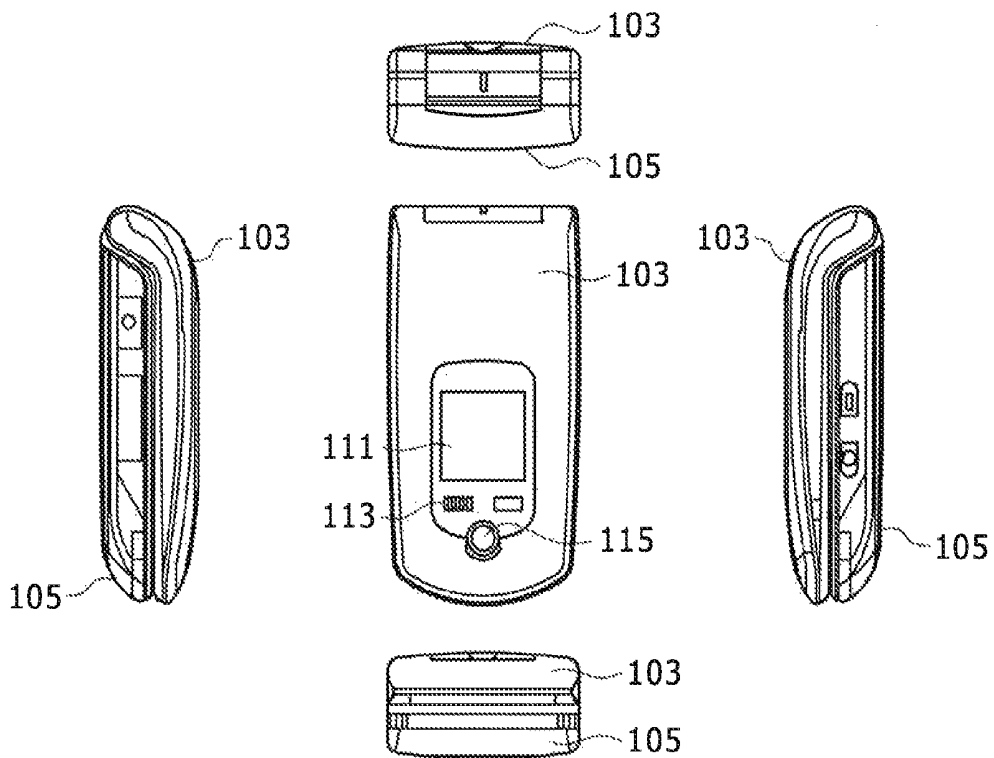


FIG. 27

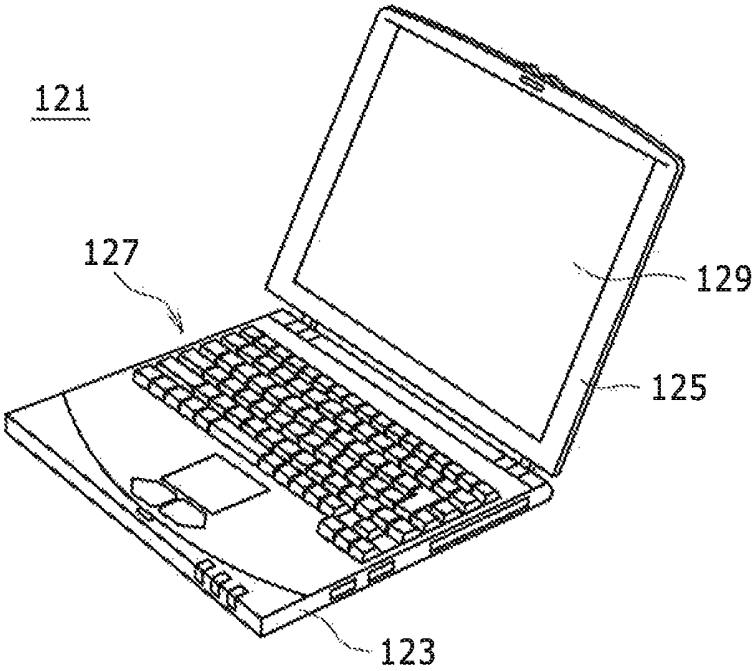

# EL DISPLAY PANEL, POWER SUPPLY LINE DRIVE APPARATUS, AND ELECTRONIC DEVICE

## CROSS REFERENCES TO RELATED APPLICATIONS

This is a Continuation Application of U.S. application Ser. No. 14/535,962, filed on Nov. 7, 2014, which is a Continuation Application of U.S. application Ser. No. 14/269,644, filed on May 5, 2014, now U.S. Pat. No. 8,912,988, issued on Dec. 16, 2014, which is a Continuation Application of U.S. application Ser. No. 13/589,609, filed on Aug. 20, 2012, now Abandoned, which is a Continuation Application of U.S. application Ser. No. 12/213,143, filed Jun. 16, 2008, now U.S. Pat. No. 8,269,696, issued on Sep. 18, 2012. The present invention contains subject matter related to Japanese Patent Application JP 2007-173590 filed in the Japan Patent Office on Jun. 30, 2007, the entire contents of which being incorporated herein by reference.

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates to a technology for enhancing the yield of EL (Electro Luminescence) display panels and has modes of as an EL display panel, a power supply line drive apparatus, and an electronic device. It should be noted that the EL display panel denotes a self-illuminant display apparatus with EL devices arranged in matrix on a substrate made of glass or other materials.

### 2. Description of the Related Art

Recently, organic EL panels on which organic EL devices are arranged in matrix have been drawing attention. This is because organic EL panels are excellent in moving picture display characteristics as well as easy in reducing apparatus weight and film thickness.

Currently, two organic EL panel driving schemes are available; passive matrix driving and active matrix driving. Especially, organic EL panels based on the active matrix driving in which an active element (a thin-film transistor) and a hold capacity are arranged for every pixel circuit are under brisk development.

The following shows documents associated with the active matrix driving, for example.

Patent Document 1: Japanese Patent Laid-Open No. 2003-255856

Patent Document 2: Japanese Patent Laid-Open No. 2003-271095

Patent Document 3: Japanese Patent Laid-Open No. 2004-029791

Patent Document 4: Japanese Patent Laid-Open No. 2004-093682

As shown in the above-mentioned Patent Documents, the active matrix driving is of various types. Described in what follows is one of these driving schemes that controls the on state and the off state of each organic EL device by digitally driving one of two power supply lines for supplying a power supply potential to each pixel circuit.

Now, referring to FIG. 1, there is shown an exemplary pixel circuit of the above-mentioned type. A pixel circuit 1 is made up of two N-type thin-film transistors T1 and T2. Of these two transistors, the thin-film transistor T1 is a switching transistor that controls writing of a signal line voltage  $V_{sig}$  to a storage capacity Cs.

On the other hand, the thin-film transistor T2 is a driving transistor that supplies drive current  $I_{ds}$  of a magnitude

corresponding to a hold voltage  $V_{gs}$  of a storage capacity Cs to an organic EL device D1. The thin-film transistors T1 and T2 are connected to a signal line as follows.

A gate electrode of the thin-film transistor T1 is connected to a scan line SCNL(i) (i being a serial number indicative of row position) that gives a signal line potential write timing. In FIG. 1, a write timing signal is indicated by SCNL(i).

One main electrode of the thin-film transistor T1 is connected to a signal line DL(j) (j being a serial number indicative of a column position) and the other main electrode is connected to a gate electrode of the thin-film transistor T2 and an electrode of the storage capacity Cs.

One main electrode of the thin-film transistor T2 is connected to a drive power supply line DSL(i) (i being a serial number indicative of row position) and the other main electrode is connected to a positive electrode (or an anode electrode) of an organic EL device OLED. In FIG. 1, power supply potential of a high potential (also referred to as a high power supply potential) to be applied to a drive power supply line DSL(i) is indicated by  $V_{cc\_H}$  and a power supply potential of low potential (also referred to as a low power supply potential) is indicated by  $V_{cc\_L1}$ .

It should be noted that a negative electrode (or a cathode electrode) of the organic EL device OLED is connected to a common power supply line (or a ground line). In FIG. 1, a power supply potential of low potential to be applied to the common power supply line is indicated by  $V_{cc\_L2}$ . Meanwhile, the organic EL device OLED is a current-driven element. Therefore, it is desired to flow a current ( $I \cdot n$ ) obtained by multiplying current I flowing through one pixel circuit by the number of pixels (or n times) to the drive power supply line DSL(i) that is emitting light.

Hence, a wiring resistance of the drive power supply line DSL(i) located on a route along which the power supply potential of high potential is supplied has to be relatively small. If the wiring resistance is large, a voltage drop difference occurs across the drive power supply line DSL(i) to cause problems of a luminance difference depending on the location of scan line and generating heat in the power supply line, for example.

If the number of stages of scan lines making up a valid display area is V, then it is desired to flow current ( $I \cdot n \cdot V$ ) obtained by multiplying the number of pixels (n times) of current I flowing to one pixel circuit by the number of stages (V times) to a high-potential power supply line that supplies high-potential power supply potential  $V_{cc\_H}$  to each drive power supply line DSL(i).

Consequently, it is technically necessary for both the drive power supply line DSL(i) and the high-potential power supply line to be relatively large in wiring width so as to lower the wiring resistance. The following describes these technological requirements with reference to FIGS. 2 and 3. FIG. 2 shows a connection relationship between the pixel circuit 1 and a power supply line drive circuit 3. FIG. 3 shows a wiring pattern of a connected portion between the drive power supply lines DSL and a power supply line drive circuit 7 (or an output stage buffer circuit).

The power supply line drive circuit 3 is made up of a shift register 5 that transfers a power supply line drive pulse to a next scan line for each horizontal scan interval and a buffer circuit 7 (2-stage configuration of input-stage buffer circuit and output-stage buffer circuit).

The two stages of buffer circuits making up the buffer circuit 7 are each configured by a CMOS inverter circuit. In the case of FIG. 2, each p-channel MOS transistor is

connected to a high-potential power supply line 11 and each n-channel MOS transistor is connected to a low-potential power supply line 13.

Consequently, if the power supply drive pulse is at H level, high-potential power supply potential  $V_{cc\_H}$  is supplied to the drive power supply line DSL(i); if the power supply line drive pulse is at L level, low-potential power supply potential  $V_{cc\_L}$  is supplied to the drive power supply line DSL(i).

Meanwhile, if the drive power supply line DSL(i) wide in wiring and the high-potential power supply line 11 are arranged in a crossed manner, a resultant cross area becomes wide. And, this cross appears for every drive power supply line DSL(i). Therefore, let one cross area be S, then a cross area of the entire organic EL panel becomes as large as  $S \cdot V$  (V being the number of scan lines or the number of vertical resolutions).

Thus, the wiring pattern shown in FIG. 3 that may not avoid the increase in cross area involves a problem of causing an inter-layer short circuit due to dust or the like. This, in turn, may raise the defect rate of organic EL panels. In addition, the above-mentioned wiring pattern causes an increased capacity that is parasitic to the cross portion, thereby increasing the distortion of a potential waveform of the drive power supply line DSL(i).

#### SUMMARY OF THE INVENTION

##### (1) Layout Pattern 1

In carrying out the invention and according to one mode thereof, there is provided an EL (Electro Luminescence) display panel having:

- (a) a pixel circuit, arranged on a pixel array block in matrix, configured to drivingly control an electroluminescence element by active matrix driving;
- (b) a signal line configured, connected to the pixel circuit of the pixel array block in unit of row, to supply pixel data corresponding to each pixel circuit to each pixel circuit in column unit, the signal line being provided in a number equal to the number of columns;
- (c) a scan line, connected to the pixel circuit of the pixel array block, configured to control a timing of writing pixel data to each pixel circuit in row unit, the scan line being provided in a number equal to the number of row;
- (d) a drive power supply line, connected to the pixel circuit of the pixel array block, configured to control a light-on state and a light-off of the pixel circuit in row unit by two types of power supply potentials, a high potential and a low potential, the drive power supply line being provided in a number equal to the number of row;
- (e) a common power supply line, commonly connected to all pixel circuits of the pixel array, configured to supply the high-potential power supply potential in a fixed manner;
- (f) a power supply line drive circuit configured to supply one of the high-potential power supply potential and the low-potential power supply potential to corresponding the drive power supply line on the basis of a power supply drive pulse;
- (g) a high-potential power supply line arranged at a position where the high-potential power supply line does not cross the drive power line, the high-potential power supply line being a high-potential power supply line supplying a high-potential power supply potential to the power supply line drive circuit; and

- (h) a low-potential power supply line configured to supply a low-potential power supply potential to the power supply line drive circuit.

##### (2) Layout Pattern 2

In carrying out the invention and according to another mode thereof, there is provided an EL display panel having:

- (a) a pixel circuit, arranged on a pixel array block in matrix, configured to drivingly control an electroluminescence element by active matrix driving;
- (b) a signal line, connected to the pixel circuit of the pixel array block in unit of row, configured to supply pixel data corresponding to each pixel circuit to each pixel circuit in column unit, the signal line being provided in a number equal to the number of columns;
- (c) a scan line, connected to the pixel circuit of the pixel array block, configured to control a timing of writing pixel data to each pixel circuit in row unit, the scan line being provided in a number equal to the number of row;
- (d) a drive power supply line, connected to the pixel circuit of the pixel array block, configured to control a light-on state and a light-off of the pixel circuit in row unit by two types of power supply potentials, a high potential and a low potential, the drive power supply line being provided in a number equal to the number of row;
- (e) a common power supply line, commonly connected to all pixel circuits of the pixel array, configured to supply the low-potential power supply potential in a fixed manner;
- (f) a power supply line drive circuit configured to supply one of the high-potential power supply potential and the low-potential power supply potential to corresponding the drive power supply line on the basis of a power supply drive pulse;
- (g) a low-potential power supply line configured to supply a low-potential power supply potential to the power supply line drive circuit, the low-potential power supply line being wired at a position where the low-potential power supply line does not cross the drive power supply line; and
- (h) a high-potential power supply line configured to supply a high-potential power supply potential to the power supply line drive circuit, the high-potential power supply line being wired at a position where the high-potential power supply line does not cross the drive power supply line.

As described and according to the invention, use of the layout patterns proposed herein can eliminate the cross between a drive power supply line that is drivingly controlled in a binary manner by a high-potential power supply and a low-potential power supply and a high-potential power supply line. This novel configuration minimizes the possibility of causing an inter-layer short circuit due to dust or the like, thereby significantly enhancing the yield of in manufacturing EL panels.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a circuit diagram illustrating an exemplary pixel circuit;

FIG. 2 is a circuit diagram illustrating a connection relationship of pixel circuit and drive power supply circuit;

FIG. 3 is a schematic diagram illustrating wiring patterns of connection portions between drive power supply line and power supply line drive circuit;

FIG. 4 is a circuit diagram illustrating an exemplary configuration of a display panel of active matrix drive type;

FIG. 5 is a timing chart indicative of an example of active matrix drive operation of a pixel circuit using a power supply line;

FIG. 6A is a circuit diagram illustrating a state in the pixel circuit corresponding to period (A) of FIG. 5;

FIG. 6B is a circuit diagram illustrating a state in the pixel circuit corresponding to period (B) of FIG. 5;

FIG. 6C is a circuit diagram illustrating a state in the pixel circuit corresponding to period (C) of FIG. 5;

FIG. 6D is a circuit diagram illustrating a state in the pixel circuit corresponding to period (D) of FIG. 5;

FIG. 6E is a circuit diagram illustrating a state in the pixel circuit corresponding to period (E) of FIG. 5;

FIG. 6F is a circuit diagram illustrating a state in the pixel circuit corresponding to period (F) of FIG. 5;

FIG. 6G is a circuit diagram illustrating a state in the pixel circuit corresponding to period (G) of FIG. 5;

FIG. 6H is a circuit diagram illustrating a state in the pixel circuit corresponding to period (H) of FIG. 5;

FIG. 7 is a graph indicative of a relationship of data voltage and drain current with none of threshold correction and mobility correction executed;

FIG. 8 is a graph indicative of a relationship of data voltage and drain current with merely threshold correction executed;

FIG. 9 is a graph indicative of a relationship of data voltage and drain current with both threshold correction and mobility correction executed;

FIG. 10 is a schematic diagram illustrating a layout pattern corresponding to pattern example 1;

FIG. 11 is a schematic diagram illustrating a layout pattern corresponding to pattern example 2;

FIG. 12 is a schematic diagram illustrating a layout pattern corresponding to pattern example 3;

FIG. 13 is a schematic diagram illustrating a layout pattern corresponding to pattern example 4;

FIG. 14 is a schematic diagram illustrating a layout pattern corresponding to pattern example 5;

FIG. 15 is a schematic diagram illustrating a layout pattern corresponding to pattern example 6;

FIG. 16 is a schematic diagram illustrating a layout pattern corresponding to pattern example 7;

FIG. 17 is a circuit diagram illustrating another exemplary pixel circuit;

FIG. 18 is a schematic diagram illustrating a layout pattern corresponding to pattern example 8;

FIG. 19 is a schematic diagram illustrating a layout pattern corresponding to pattern example 9;

FIG. 20 is a schematic diagram illustrating a layout pattern corresponding to pattern example 10;

FIG. 21 is a schematic diagram illustrating an exemplary configuration of a display module;

FIG. 22 is a schematic diagram illustrating an exemplary functional configuration of electronic equipment;

FIG. 23 is a schematic diagram illustrating an exemplary electronic equipment product;

FIGS. 24A and 24B are schematic diagrams illustrating an exemplary electronic equipment product;

FIG. 25 is a schematic diagram illustrating an exemplary electronic equipment product;

FIGS. 26A and 26B are schematic diagrams illustrating an exemplary electronic equipment product; and

FIG. 27 is a schematic diagram illustrating an exemplary electronic equipment product.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

This invention will be described in further detail by way of embodiments thereof, organic EL (Electro Luminescence) panels of active matrix type, with reference to the accompanying drawings. It should be noted that any portion that is not illustrated or written herein is applied with known technologies in the technical field concerned. It should also be noted that the embodiments described below are illustrative only and therefore not limited thereto.

### (A) Structure of the Organic EL Panel

Now, referring to FIG. 4, there is shown an exemplary structure of an organic EL panel for realizing active matrix driving of the pixel circuit 1 by driving, in a binary manner, one of two power supply lines for supplying a power supply potential to the pixel circuit 1.

An organic EL panel 21 is mainly made up of a pixel array block 23, a scan line drive circuit 25, a power supply line drive circuit 27 (corresponding to reference numeral 3 shown in FIG. 2), and a data line drive circuit 29. In the present embodiment, the pixel array block 23 with the pixel circuit 1 arranged in matrix in accordance with a screen resolution is for color display and arranged inside a valid screen accordance with the arrangement of luminescent color.

However, if an organic EL device having a structure in which organic luminescent layers of two or more colors are laminated makes up the pixel circuit 1, one pixel circuit 1 corresponds to two or more luminescent colors. The scan line drive circuit 25 is a circuit device configured to give, in a row unit (or a scan line unit) a write timing of a signal potential applied to signal line DL(j) to the pixel circuit 1.

It should be noted that a write timing signal is supplied to scan line SCNL(i) of a next stage for each horizontal scan interval.

The power supply line drive circuit 27 is a circuit device configured to drivingly control drive power supply line DSL(i). As described with reference to FIG. 2, the power supply line drive circuit 27 is made up of the shift register 5 corresponding to each scan line and a power supply line drive circuit 7.

It is possible for the power supply line drive circuit 27 to be formed not merely integrally on a same substrate as the pixel array block 23 but also as a device module discrete from the organic EL panel 21. A detail configuration of this power supply line drive circuit 27 will be described later.

The data line drive circuit 29 is a circuit device configured to drivingly control signal line DS(j). A signal voltage to be applied to signal line DL(j) is a threshold voltage  $V_0$  of corrective operation to be described later or a pixel position data voltage  $V_{sig}$  to be specified by a write timing signal.

### (B) Drive Operation of the Pixel Circuit

Referring to FIG. 5, there is shown an exemplary active matrix driving of the pixel circuit 1 by use of a power supply line. In the drive operation example shown in FIG. 5, a threshold correction operation and a mobility correction operation of the thin-film transistor T2 operating as a drive transistor are executed within one horizontal scan period (1H).

It should be noted that FIG. 5 shows potential changes of scan line SCNL(i), signal line DL(j), and drive power supply line DSL(j) along the same time axis. FIG. 5 also shows a change of gate potential Vg and a change of source potential Vs of the thin-film transistor T2 accompanying the potential changes of these lines. Besides, FIG. 5 shows a transition of potential changes, in 8 periods of (A) through (H) for the purpose of convenience.

(i) Light Emission Period

In period (A), the organic EL device OLED is in a light-emitting state. After this period, a new field of line sequential scan starts.

(ii) Threshold Correction Preparation Period

When a new field starts, a preparation for threshold correction is executed over periods (B) and (C). In period (B), drain current supply to the organic EL device OLED is stopped, upon which the organic EL device OLED stops emitting light. At this moment, the light-emitting voltage Vel of the organic EL device OLED undergoes a transition so as to draw toward zero.

In accordance with this drop of light-emitting voltage Vel, the source potential Vs of the thin-film transistor T2 makes a transition to almost the same potential as lower power supply potential Vcc\_L for initialization. It should be noted that the gate potential Vg of the thin-film transistor T2 is initialized to reference potential Vo that is applied along the signal line DL(j) in the following period (C).

Executing these two initializing operations complete the initialization setting of the hold voltage of the hold capacity Cs. Namely, the hold voltage of the hold capacity Cs is initialized to a voltage (Vo-Vcc\_L) larger than the threshold voltage Vth of the thin-film transistor T2. This is a threshold correction preparing operation.

(iii) Threshold Correcting Operation

Subsequently, a threshold correcting operation is executed for period (D). In this period (D) too, the reference potential Vo is given to the gate potential Vg. In this state, a high power supply potential Vcc\_H is applied to the drive power supply line DSL(i).

As a result, the drain current flows to the signal line DL(j) through the hold capacity Cs to lower hold voltage Vgs of the hold capacity Cs. Accordingly, the source potential Vs of the thin-film transistor T2 rises.

It should be noted that the drop of the hold voltage Vgs of the hold capacity Cs stops when the hold voltage Vgs reaches the threshold voltage Vth upon which the thin-film transistor T2 cuts off. Thus, the threshold correcting operation for setting the hold voltage Vgs of the hold capacity Cs to the threshold voltage Vth unique to the thin-film transistor T2 is completed.

(iv) Signal Potential Write and Mobility Correction Preparing Operation

When a threshold correcting operation has been completed, a preparation for signal write and mobility correction is executed over periods (E) and (F). It should be noted that this preparing operation may be omitted. In period (E), the drive potential of scan line SCNL(i) is switched to low to float the thin-film transistor T2.

In period (F), the data voltage Vsig corresponding to pixel data is applied to the signal line DL(j). This period (F) is provided in consideration of a delay in the rise of the signal line potential due to the effect of the capacity component parasitic to the signal line DL(j). The existence of this period allows a write operation to be started with the potential of the signal line DL(j) stabilized in the next period (G).

(v) Signal Potential Write and Mobility Correcting Operation

In period (G), a signal potential write operation and a mobility correcting operation are executed. Namely, the drive potential of the scan line SCNL(i) is switched to high, applying the data potential Vsig to the gate potential of the thin-film transistor T2. When the data potential Vsig is applied, the hold voltage Vgs held in the hold capacity Cs makes a transition to Vsig+Vth. Thus, because the hold voltage Vgs gets larger than the threshold voltage Vth, the thin-film transistor T2 is turned on.

When the thin-film transistor T2 has been turned on, the drain current starts flowing to the organic EL device OLED. However, in the stage where the drain current starts flowing, the organic EL device OLED is still in a cutoff state (or high impedance). Therefore, in proportion to the mobility of the thin-film transistor T2, the drain current flows so as to charge parasitic capacity C0 of the organic EL device OLED.

The anode potential of the organic EL device OLED (namely, the source potential Vs of the thin-film transistor T2) rises by the charge voltage ΔV of this parasitic capacity C0. By this charge voltage ΔV, the hold voltage Vgs of the hold capacity Cs lowers. Namely, the hold voltage Vgs changes to Vsig+Vth-ΔV. Thus, an operation in which the hold voltage Vgs is corrected by the charge voltage ΔV of the parasitic capacity C0 corresponds to the mobility correcting operation.

It should be noted that a bootstrap operation of the hold capacity Cs raises the gate potential Vg of the thin-film transistor T2 by the same rise as that of the source potential Vs. To be more precise, the gate potential Vg rises by a potential obtained by multiplying the rise of the source potential Vs by gain g (<1).

(vi) Light-Emitting Period

In period (H), the drive potential of the scan line SCNL(i) is changed to low to put the gate electrode of the thin-film transistor T2 into a floating state. At this moment, the thin-film transistor T2 supplies a drain current equivalent to hold voltage Vgs after mobility correction (=Vsig+Vth-ΔV) to the organic EL device OLED.

Consequently, the organic EL device OLED starts light emission. At this moment, the anode potential (the source potential Vs of the thin-film transistor T2) of the organic EL device OLED rises to the light-emitting voltage Vel in accordance with the magnitude of the drain current. At this moment, the gate potential Vg of the thin-film transistor T2 also rises by the light-emitting voltage Vel by the bootstrap operation of the hold capacity Cs. The gate potential Vg rises by a potential obtained by multiplying the rise of the source potential Vs by gain g (<1).

(C) Changes of Connection State and Potential in Pixel Circuit

The following schematically describes the potential state changes inside the pixel circuit 1 corresponding to the period

described with reference to FIG. 5. The following description is made by use of same reference numbers as the corresponding periods. Namely, the following description is made with reference to FIGS. 6A through 6H. It should be noted that, with FIGS. 6A through 6H, the thin-film transistor T1 that operates as a sampling transistor is indicated as a switch and the parasitic capacity of the organic EL device OLED is explicitly indicated as C0.

(i) Light-Emitting Period

FIG. 6A shows corresponds to an operation state of period (A) shown in FIG. 5. In period (A) that is a light-emitting period, high power supply potential  $V_{cc\_H}$  for light emitting is applied to the drive power supply line DSL (i). At this moment, the thin-film transistor T2 supplies drain current  $I_{ds}$  corresponding to the hold voltage  $V_{gs}$  ( $>V_{th}$ ) of the hold capacity  $C_s$  to the organic EL device OLED. The light-emitting state of the organic EL device OLED continues until the end of period (A).

(ii) Threshold Correction Preparing Period

FIG. 6B corresponds to an operation state of period (B) shown in FIG. 5. In period (B), the potential of the drive power supply line DSL(i) is switched from the light-emitting high power supply potential  $V_{cc\_H}$  to the low power supply potential  $V_{cc\_L}$ . This switching blocks the supplying of drain current  $I_{ds}$ .

As a result, the gate potential  $V_g$  and the source potential  $V_s$  of the thin-film transistor T2 lower in cooperation with the lowering of the light-emitting voltage  $V_{el}$  of the organic EL device OLED. Then, the source potential  $V_s$  lowers to nearly the same level as the low power supply potential  $V_{cc\_L}$  applied to the drive power supply line DSL(i). It should be noted that the low power supply potential  $V_{cc\_L}$  is sufficiently lower than the reference potential  $V_0$  for initialization to be applied to the signal line DL(j).

FIG. 6C corresponds to an operation state of period (C) shown in FIG. 5. In period (C), the potential of scan line CSNL(i) changes to high. Consequently, the thin-film transistor T1 is turned on, upon which the gate potential  $V_g$  of the thin-film transistor T2 is set to the reference potential  $V_0$  for initialization applied to the signal line DL(j).

When period (C) ends, the hold voltage  $V_{gs}$  of the hold capacity  $C_s$  is initialized to a voltage greater than the threshold voltage  $V_{th}$  of the thin-film transistor T2. At this moment, a high potential is applied to the common power supply line to which the cathode electrode of the organic EL device OLED is connected, thereby reversely biasing the organic EL device OLED. Consequently, the drain current  $I_{ds}$  flows to the signal line DL(j) through the hold capacity  $C_s$  and the thin-film transistor T1.

(iii) Threshold Correcting Operation

FIG. 6D corresponds to an operation state of period (D) shown in FIG. 5. In period (D), the potential of the drive power supply line DSL(i) is switched from the low power supply potential  $V_{cc\_L}$  for initialization to the high power supply potential  $V_{cc\_H}$  for light emitting. It should be noted that the thin-film transistor T1 for sampling is maintained in the on state.

As a result, merely the source potential  $V_s$  starts rising with the gate potential  $V_g$  of the thin-film transistor T2 kept at the initializing reference potential  $V_0$ . At any point of time up to the end of period (D), the hold voltage  $V_{gs}$  of the hold

capacity  $C_s$  reaches the threshold voltage  $V_{th}$ . Consequently, the thin-film transistor T2 turns off. The source potential  $V_s$  at this moment goes lower than the gate potential  $V_g$  ( $=V_0$ ) by the threshold voltage  $V_{th}$ .

(iv) Preparing Operation for Signal Potential Write and Mobility Correction

FIG. 6E corresponds to an operation state of period (E) shown in FIG. 5. In Period (E), the potential of the scan line SCNL(i) changes to low. Consequently, the thin-film transistor T2 is turned off to put the gate electrode of the thin-film transistor T2 as a drive transistor into a floating state.

However, the cutoff state of the thin-film transistor T2 is maintained. Therefore, the drain current  $I_{ds}$  does not flow. FIG. 6F corresponds to an operation state of period (F) shown in FIG. 5. In period (F), the potential of signal line DL(j) changes from the initialization reference potential  $V_0$  to the data potential  $V_{sig}$ . It should be noted however that the thin-film transistor T1 that functions as a sampling transistor remains in the off state.

(v) Signal Potential Write and Mobility Correction

FIG. 6G corresponds to an operation state of period (G). In period (G), the potential of scan line SCNL(i) changes to high. Consequently, the sampling transistor T1 is turned on, upon which the gate electrode of the thin-film transistor T2 goes to signal potential  $V_{sig}$ .

Also, in period (G), the power supply line DSL(i) changes to the light-emitting high power supply potential  $V_{cc\_H}$ . As a result, the thin-film transistor T2 is turned on, upon which the drain current  $I_{ds}$  flows. However, the organic EL device OLED is initially in the cutoff state (or the high impedance state). Hence, the drain current  $I_{ds}$  flows not into the organic EL device OLED but into the parasitic capacity  $C_s$  as shown in FIG. 6G.

As the parasitic capacity  $C_s$  is charged, the source potential  $V_s$  of the thin-film transistor T2 starts rising. Then, the hold voltage  $V_{gs}$  of the hold capacity  $C_s$  goes  $V_{sig}+V_{th}-\Delta V$ . Thus, the sampling of signal potential  $V_{sig}$  and the correction by charge voltage  $\Delta V$  are executed in parallel. It should be noted that, as the data potential  $V_{sig}$  is larger, the drain current  $I_{ds}$  gets larger, thereby making the absolute value of charge voltage  $\Delta V$  larger.

Consequently, the mobility correction in accordance with any light-emitting level is made practicable. It should be noted that, if the signal potential  $V_{sig}$  is constant, as mobility  $\mu$  of the thin-film transistor T2 is larger, the absolute value of charge voltage  $\Delta V$  gets larger, thereby making a feedback larger.

(vi) Signal Potential Write and Mobility Correction

FIG. 6H corresponds to an operation state of period (H) shown in FIG. 5. The potential of scan line SCNL(i) changes to low again. Consequently, the thin-film transistor T1 is turned off to put the gate electrode of the thin-film transistor T2 into a floating state.

It should be noted that the potential of the power supply line DSL(i) is maintained at the light-emitting high power supply potential  $V_{cc\_HH}$ , so that the drain current  $I_{ds}$  corresponding to the hold voltage  $V_{gs}$  ( $=V_{sig}+V_{th}-\Delta V$ ) of the hold capacity  $C_s$  is continuously supplied to the organic EL device OLED. This supply of the drain current causes the organic EL device OLED to start emitting light. At the same

time, light-emitting voltage  $V_{el}$  corresponding to the magnitude of the drain current  $I_{ds}$  occurs between both the electrodes of the organic EL device OLED.

Namely, the source voltage  $V_s$  of the thin-film transistor T2 rises. Also, a bootstrap operation of the hold capacity  $C_s$  causes the gate potential  $V_g$  to rise by the amount of rise of the source potential  $V_s$ . Consequently, the hold capacity  $C_s$  comes to hold the same hold voltage  $V_{gs}$  ( $=V_{sig}+V_{th}-\Delta V$ ) as that before the bootstrap operation. As a result, the light-emitting operation caused by the drain current  $I_{ds}$  with the mobility corrected is continued.

### (B-3) Correction Effect

Here, the effect of correction is confirmed. FIG. 7 shows the current-voltage characteristic of the thin-film transistor T2. Especially, the drain current  $I_{ds}$  at the time when the thin-film transistor T2 is operating in a saturation region is given by the following equation.

$$I_{ds}=(1/2)\mu(W/L)Cox(V_{gs}-V_{th})^2 \quad (1)$$

In the above-mentioned relation,  $\mu$  is representative of mobility.  $W$  is representative of gate width.  $L$  is representative of gate length.  $Cox$  is representative of gate oxide film capacitance per unit area. As seen from the above-mentioned transistor characteristics relation, when the threshold voltage  $V_{th}$  fluctuates, the drain current  $I_{ds}$  fluctuates if the hold voltage  $V_{gs}$  is constant. FIG. 7 shows a relationship between the data voltage  $V_{sig}$  and the drain current  $I_{ds}$  at a time when neither threshold correction nor mobility correction is executed.

In the case of the above-mentioned example of correcting operation, however, the hold voltage  $V_{gs}$  at the time of light emission is given by  $V_{sig}+V_{th}-\Delta V$ . Therefore, the equation (1) above can be represented as follows.

$$I_{ds}=(1/2)\mu(W/L)Cox(V_{sig}-\Delta V)^2 \quad (2)$$

As seen from equation (2), threshold voltage  $V_{th}$  is deleted from the equation. Namely, it is understood that the dependence on the threshold voltage  $V_{th}$  was removed by the above-mentioned correcting operation.

This denotes that, if there exist a variation in the threshold voltage  $V_{th}$  of the thin-film transistor T2 that constitutes the pixel circuit 1, such a variation will not affect the drain current  $I_{ds}$ . FIG. 8 shows a relation between the data voltage  $V_{sig}$  and the drain current  $I_{ds}$  at a time when merely the threshold correction is executed.

It should be noted that, with pixels having different mobilities  $\mu$ , the drain currents  $I_{ds}$  thereof will take different values if the data voltage  $V_{sig}$  is the same. In the case of FIG. 8, pixel A is greater in mobility  $\mu$  than pixel B. Hence, if the data voltage  $V_{sig}$  is the same, the drain current  $I_{ds}$  of pixel A is greater than the drain current  $I_{ds}$  of pixel B. However, the charge voltage  $\Delta V$  occurring in the parasitic capacity  $C_0$  in the same correction period depends on mobility  $\mu$ .

Namely, the charge voltage  $\Delta V$  of the pixel having greater mobility  $\mu$  is greater than the charge voltage  $\Delta V$  of the pixel having smaller mobility  $\mu$ . In equation (2) above, the charge voltage  $\Delta V$  acts on the direction in which the drain current  $I_{ds}$  lowers. As a result, the effect of the variation in the mobility  $\mu$  appearing in the drain current  $I_{ds}$  is suppressed. Namely, as shown in FIG. 9, the same drain current  $I_{ds}$  can flow to any data current  $V_{sig}$ .

## (D) Layout Pattern Examples

### (D-1) Pattern Example 1

The following describes a layout pattern of the high-potential power supply line 11 that is suitable when a pixel

array block is made up of the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 10 shows a layout pattern that is proposed as the pattern example 1. In this pattern example, the low-potential power supply line 13 that is not desired to increase the wiring width thereof is arranged on the valid pixel area side so as to cross the drive power supply line DSL(i). On the other hand, the high-potential power supply line 11 that is desired to increase the wiring width thereof is arranged so as to cross the output wiring of the preceding buffer circuit that constitutes the power supply line drive circuit 27.

In pattern example 1, the waveform of power supply drive pulse may also remain blunt due to the parasitic capacitance at the cross between the high-potential power supply line 11 thick in wiring width and the output wiring of the preceding buffer circuit. However, if the waveform of the supply line drive pulse is made blunt, the blunt waveform can be reshaped in the subsequent output buffer circuit. Therefore, the driving of the drive power supply line DSL(i) will not be affected.

Also, use of a positional relation in which there is no cross between the high-potential power supply line 11 and the drive power supply line DSL(i) can make smaller the cross area between wirings that may generate a large potential alternately. This configuration can minimize the possibility of causing a inter-layer short circuit due to dust or the like, thereby significantly improving the yield of the production of organic EL panels.

### (D-2) Pattern Example 2

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 11 shows a layout pattern proposed as the pattern example 2. The pattern example 2 is a variation of the pattern example 1. Namely, merely the positional arrangement of the low-potential power supply line 13 that need not be increased in wiring width is changed in the pattern example 2.

In the case of the pattern example 2, the low-potential power supply line 13 and the drive power supply line DSL(i) are arranged so as not to cross each other. To be more specific, the low-potential power supply line 13 is arranged so as to overlap the output buffer of the power supply line drive circuit 27.

In this wiring example, the number of layers increases from 2 to 3; however, the cross portion between the digitally driven power supply line DSL(i) and the low-potential power supply line 13 can be eliminated. As a result, this configuration can still decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still significantly improving the yield of the production of organic EL panels.

### (D-3) Pattern Example 3

The following also describes a layout pattern example of the high-potential power supply line 11 that is suitable when a pixel array block is made up by the pixel circuit 1 having the configuration shown in FIG. 1.

FIG. 12 shows a layout pattern proposed as the pattern example 3. The pattern example 3 is another variation of the pattern example 1. Namely, merely the positional arrangement of the low-potential power supply line 13 not desired to increase the wiring width thereof is changed.

## 13

In the case of pattern example 3, the low-potential power supply line **13** is arranged so as not to cross the drive power supply line DSL(i). To be more specific, the low-potential power supply line **13** is arranged at an intermediate position between the output buffer circuit of the power supply line drive circuit **27** and the drive power supply line DSL(i). Namely, the low-potential power supply line **13** is arranged so as to cross an extraction wire for connecting the output terminal of the output buffer circuit with the drive power supply line DSL(i).

In this wiring example, the low-potential power supply line **13** crosses the digitally driven wiring (the extraction wire); however, the cross area is also small because this extraction wire is small in wiring width. As a result, this configuration can still further decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still further significantly improving the yield of the production of organic EL panels.

## (D-4) Pattern Example 4

The following also describes a layout pattern example of the high-potential power supply line **11** that is suitable when a pixel array block is made up by the pixel circuit **1** having the configuration shown in FIG. **1**.

FIG. **13** shows a layout pattern proposed as the pattern example 4. The pattern example 4 is still another variation of the pattern example 1. Namely, merely the positional arrangement of the low-potential power supply line **13** not desired to increase the wiring width thereof is changed.

In the case of the pattern example 4, the low-potential power supply line **13** is arranged so as not to cross the drive power supply line DSL(i). To be more specific, the low-potential power supply line **13** is arranged at an intermediate position between the output buffer circuit of the power supply line drive circuit **27** and the high-potential power supply line **11**(i).

In this wiring example, like the case of the high-potential power supply line **11** thick in wiring width, the waveform of power supply drive pulse may also remain blunt due to the parasitic capacitance at the cross between the low-potential power supply line **13** and the output wiring of the preceding buffer circuit.

However, because the wiring width of the low-potential power supply line **13** is small and the parasitic capacity is low, and, if the waveform get blunt, the blunt waveform can be reshaped, thereby involving no problem in operation. Obviously, in this case can also improve the yield of the production of organic EL panels.

## (D-5) Pattern Example 5

The following also describes a layout pattern example of the high-potential power supply line **11** that is suitable when a pixel array block is made up by the pixel circuit **1** having the configuration shown in FIG. **1**.

FIG. **14** shows a layout pattern proposed as the pattern example 5. The pattern example 5 is yet another variation of the pattern example 1. Namely, merely the positional arrangement of the high-potential power supply line **11** is changed.

To be more specific, the high-potential power supply line **11** is arranged so as to overlap the output buffer circuit of the power supply line drive circuit **27**.

In this wiring example, the number of wiring layers increases from 2 to 3; however, the cross portion between the digitally driven power supply line DSL(i) and the

## 14

low-potential power supply line **13** can be eliminated. As a result, this configuration can still decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still significantly improving the yield of the production of organic EL panels.

## (D-6) Pattern Example 6

The following also describes a layout pattern example of the high-potential power supply line **11** that is suitable when a pixel array block is made up by the pixel circuit **1** having the configuration shown in FIG. **1**.

FIG. **15** shows a layout pattern proposed as the pattern example 6. The pattern example 6 is a different variation of the pattern example 1. To be more specific, the low-potential power supply line **13** is arranged so as to overlap the high-potential power supply line **11** arranged in front of the output buffer circuit of the power supply line drive circuit **27**.

In this wiring example, a high voltage is applied between the power supply lines; however, this high voltage is a static voltage, so that an effect of the waveform to the operation of the drive power supply line DSL(i) need not be considered. In addition, because the power supply line need not be offset-arranged on the plane, the area of the organic EL panel can be reduced if slightly.

## (D-7) Pattern Example 7

The following also describes a layout pattern example of the high-potential power supply line **11** that is suitable when a pixel array block is made up by the pixel circuit **1** having the configuration shown in FIG. **1**.

FIG. **16** shows a layout pattern proposed as the pattern example 7. In the pattern example 7, the high-potential power supply line **11** and the low-potential power supply line **13** are arranged in a manner opposite to the pattern example 1. However, if the high-potential power supply line **11** crosses the drive power supply line DSL(i), the above-mentioned technical problems may not be solved.

Therefore, the extraction wire connected the output terminal of the output buffer circuit of the power supply line drive circuit **27** to the drive power supply line DSL(i) is elongated so as to be crossed with the high-potential power supply line **11**.

In this wiring example, the high-potential power supply line **11** crosses the digitally driven wiring (namely, the extraction wire); however, the cross area is also small because this extraction wire is small in wiring width. As a result, this configuration can still further decrease the possibility of an inter-layer short circuit due to dust or the like, thereby still further significantly improving the yield of the production of organic EL panels.

## (D-8) Pattern Example 8

The following describes a layout pattern example of the high-potential power supply line **11** and the low-potential power supply line **13** that is suitable when the pixel array block is constituted by a pixel circuit **31** having the configuration shown in FIG. **17**. The pixel circuit **31** in this example is made up of the thin-film transistor T2 with the drive transistor is of p type. Accordingly, the other electrode of the hold capacity Cs is connected to the common power supply line that supplies high power supply potential Vcc\_H to all pixels.

## 15

It should be noted that, in the case of FIG. 17, the drive power supply line DSL(i) corresponds to a power supply line to which the cathode electrode of the organic EL device OLED is connected. Therefore, in the case of FIG. 17, the operation in the pixel circuit 31 is controlled by digitally driving the drive power supply line DSL(i) to which the cathode electrode is connected.

Obviously, in this case too, the common signal line to which high power supply potential Vcc\_H is applied is relatively large in wire width in preparation for the supply of a large current. Also, the signal width of the drive power supply line DSL(i) is large to cope with the drawing of a large current.

FIG. 18 shows a layout pattern proposed as the pattern example 8. In the pattern example 8, not merely the high-potential power supply line 11 but also the low-potential power supply line 13 have to have a relatively thick wiring width, so that these power supply lines have to be arranged so as not to cross the drive power supply line DSL(i).

Namely, in the case of FIG. 18, the high-potential power supply line 11 is arranged so as to be crossed with the output wiring of the preceding buffer circuit constituting of the power supply line drive circuit 27, while the low-potential power supply line 13 is arranged so as to be overlapped on the top layer of the preceding buffer circuit constituting the power supply line drive circuit 27. This arrangement minimizes the possibility of a short circuit due to dust or the like, thereby significantly improving the yield of the production of organic EL panels.

## (D-9) Pattern Example 9

The following describes a layout pattern example of the high-potential power supply line 11 and the low-potential power supply line 13 that is suitable when the pixel array block is constituted by the pixel circuit 31 having the configuration shown in FIG. 17.

FIG. 19 shows a layout pattern proposed as the pattern example 9. In the pattern example 9, the high-potential power supply line 11 and the low-potential power supply line 13 are arranged so as to be overlapped with each other at a preceding position of the output buffer of the power supply line drive circuit 27. Either of these power supply lines may be the other in overlapping. It should be noted that, in this case, a parasitic capacity is generated at the portion in which the power supply lines having thick wire width overlap with each other. However, this parasitic capacity will not affect the power supply drive pulse because these power supply lines supply fixed potentials.

## (D-10) Pattern Example 10

The following describes a layout pattern example of the high-potential power supply line 11 and the low-potential power supply line 13 that is suitable when the pixel array block is constituted by the pixel circuit 31 having the configuration shown in FIG. 17.

FIG. 20 shows a layout pattern proposed as the pattern example 10. In the pattern example 10, the high-potential power supply line 11 is arranged in front of the output buffer of the power supply line drive circuit 27 and the low-potential power supply line 13 is arranged so as to be crossed with the extraction wire connecting the output buffer of the power supply line drive circuit 27 to the drive power supply line DSL(i).

It should be noted that the positions of the high-potential power supply line 11 and the low-potential power supply

## 16

line 13 may be replaced with each other. In this wiring example too, the cross area between the drive power supply line DSL(i) and the power supply line can be made small. Therefore, this arrangement minimizes the possibility of short circuit due to dust or the like, thereby significantly improving the yield of the production of organic EL panels.

## (D-11) Others

It should be noted that the above-mentioned layout patterns are illustrative and therefore it is practicable to use other layouts.

## (E) Other Embodiments

## (E-1) Product Examples

## (a) Drive IC

In the above, embodiments in which the pixel array block and the drive circuit are formed on one panel. It is also practicable to manufacture the scan line drive circuits 25, the power supply line drive circuit 27, and the data line drive circuit 29 separately from the pixel array block 23 and separately distribute organic EL panels formed with the pixel array block 23. For example, these drive circuits may be manufactured as drive ICs (Integrated Circuits) to be mounted on each organic EL panel formed with the pixel array block 23.

## (b) Display Module

The organic EL panel 21 in the above-mentioned embodiments may also be distributed in the form of a display module 41 having an external view shown in FIG. 21.

The display module 41 has a construction in which an opposite block 43 is laminated on the surface of a support base 45. With the opposite block 43, a color filter, a protection film, and a light-resistant film are arranged on the surface of a base that is made of glass or another transparent material.

It should be noted that the display module 41 may have an FPC (Flexible Printed Circuit) 47 or the like for interfacing between the outside and the support base 45.

## (c) Electronic Devices

The organic EL panels in the above-mentioned embodiments may be distributed in the form of a product mounted on electronic devices. FIG. 22 shows a conceptual configuration example of an electronic device 51. The electronic device 51 is made up of an organic EL panel 53 and a system control block 55. Contents of processing to be executed by the system control block 55 depend on the product form of the electronic device 51.

It should be noted that the electronic device 51 is not limited to devices of a particular field as long as the electronic device 51 has capabilities of displaying images or video that generated inside the electronic device 51 or supplied from the outside. For the electronic device 51 of this type, a television receiver is assumed, for example. FIG. 23 shows an exemplary external view of a television receiver 61.

On the front side of a housing of the television receiver 61, a display screen 67 made up of a front panel 63 and a

filter glass **65** is arranged. The portion of the display screen **67** corresponds to the organic EL panel described above with reference to embodiments.

In addition, for the electronic device **51** of this type, a digital camera is assumed, for example. FIG. **24** show external views example of a digital camera **71**. FIG. **24A** shows the front side (the side of a subject to be taken). FIG. **24B** shows an external view example of the rear side (the side of photographer).

The digital camera **71** has a protection cover **73**, a taking lens block **75**, a display screen **77**, a control switch **79**, and a shutter button **81**. The portion of the display screen **77** corresponds to the organic EL panel described above with reference to embodiments.

Besides, for the electronic device **51** of this type, a video camera is assumed, for example. FIG. **25** shows an external view example of a video camera **91**. The video camera **91** has a taking lens **95** for taking a subject on the front side of a body **93**, a shooting start/stop switch **97**, and a display screen **99**. Of these components, the portion of the display screen **89** corresponds to the organic EL panel described above with reference to embodiments.

Moreover, for the electronic device **51** of this type, a portable terminal device is assumed, for example. FIG. **26** show external views example of a mobile phone **101**, for example, as a portable terminal device. The mobile phone **101** shown in FIG. **26** is of folding type. FIG. **26A** shows an external view example in which the mobile phone is in the opened state. FIG. **26B** shows an external view example in which the mobile phone is in the closed state.

The mobile phone **101** has an upper housing **103**, a lower housing **105**, a link block **107** (a hinge block in this example), a display screen **109**, an auxiliary display screen **111**, a picture light **113**, and a taking lens **115**. Of these components, the portions of the display screen **109** and the auxiliary display screen **111** correspond to the organic EL panel described above with reference to embodiments.

Also, for the electronic device **51** of this type, a computer is assumed, for example. FIG. **27** shows an external view example of a note-type computer **121**. The note-type computer **121** has a lower housing **123**, an upper housing **125**, a keyboard **127**, and a display screen **129**. Of these components, the portion of the display screen **129** corresponds to the organic EL panel described above with reference to embodiments.

In addition to the above-mentioned devices, audio players, game machines, electronic books, and electronic dictionaries, for example, are assumed for the electric device **51**.

#### (C-2) Other Display Device Examples

The above-mentioned driving method is also applicable to other than the organic EL panel. For example, the above-mentioned driving method is applicable to inorganic EL panels, LED-type display panels, and EL light-emitting type display panels with light-emitting elements having diode structure arranged on the screen.

#### (C-3) Others

While preferred embodiments of the present invention have been described using specific terms, such description is for illustrative purpose, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

It should be understood by those skilled in the art that various modifications, combinations, sub-combinations and alterations may occur depending on design requirements and other factor in so far as they are within the scope of the appended claims or the equivalents thereof.

What is claimed is:

**1.** An electroluminescence display device comprising:  
a first pixel circuit configured to drive a first electroluminescence element;  
a second pixel circuit configured to drive a second electroluminescence element; and  
a driving circuit including:

a first buffer circuit configured to supply a first output signal to the first pixel circuit via a first output line;  
a second buffer circuit configured to supply a second output signal to the second pixel circuit via a second output line;  
a first supply line configured to apply a first voltage to the first buffer circuit and the second buffer circuit; and  
a second supply line configured to apply a second voltage to the first buffer circuit and the second buffer circuit,

wherein the first buffer circuit is adjacent to the second buffer circuit in a first direction,

wherein the first supply line and the second supply line extend in the first direction,

wherein the first supply line is disposed on an input side of first buffer circuit,

wherein the second supply line is disposed between the first supply line and the first buffer circuit,

wherein the first output line is disposed on an output side of the first buffer circuit,

wherein the second output line is disposed on an output side of the second buffer circuit,

wherein each of the first supply line and the second supply line is not crossing the first output line and the second output line,

wherein the first output signal is configured to control between an ON-state and an OFF-state of the first electroluminescence element, and

wherein the second output signal is configured to control between an ON-state and an OFF-state of the second electroluminescence element.

**2.** The electroluminescence display device according to claim **1**, wherein a width of the first supply line is longer than a width of the second supply line.

**3.** The electroluminescence display device according to claim **1**, wherein the first buffer circuit includes a first transistor and a second transistor, and wherein the first transistor and the second transistor are configured to be switched complementally.

**4.** The electroluminescence display device according to claim **1**,

wherein the first buffer circuit includes a first transistor and a second transistor,

wherein the first transistor has a first terminal connected to the first supply line, and a second terminal connected to the first output line, and

wherein the second transistor has a first terminal connected to the second supply line, and a second terminal connected to the first output line.

**5.** The electroluminescence display device according to claim **1**, wherein each of the first output line and the second output line extends in a second direction perpendicular to the first direction.

6. The electroluminescence display device according to claim 1, wherein each of a gate of the first transistor and a gate of the second transistor extends in a second direction perpendicular to the first direction.

7. The electroluminescence display device according to claim 1, wherein the first pixel circuit includes:

a capacitor;

a sampling transistor configured to supply a data signal to the capacitor; and

a driving transistor configured to flow a current to the first electroluminescence according to the data signal.

8. The electroluminescence display device according to claim 7, wherein the first output signal is applied to a first terminal of the driving transistor.

9. An electronic device comprising:

the electroluminescence display device according to claim 1;

a system control block; and

an operation input block for said system control block.

10. An electroluminescence display device comprising:

a first pixel circuit configured to drive a first electroluminescence element;

a second pixel circuit configured to drive a second electroluminescence element; and

a driving circuit including:

a first buffer circuit configured to supply a first output signal to the first pixel circuit via a first output line;

a second buffer circuit configured to supply a second output signal to the second pixel circuit via a second output line;

a first supply line configured to apply a first voltage to the first buffer circuit and the second buffer circuit; and

a second supply line configured to apply a second voltage to the first buffer circuit and the second buffer circuit,

wherein the first supply line is disposed on an input side of first buffer circuit,

wherein the second supply line is disposed between the first supply line and the first buffer circuit,

wherein each of the first supply line and the second supply line is not crossing the first output line and the second output line,

wherein a first interconnect wiring connecting the first supply line to the first buffer circuit is crossing the second supply line,

wherein the first output signal is configured to control between an ON-state and an OFF-state of the first electroluminescence element, and

wherein the second output signal is configured to control between an ON-state and an OFF-state of the second electroluminescence element.

11. The electroluminescence display device according to claim 10, wherein a width of the first supply line is longer than a width of the second supply line.

12. The electroluminescence display device according to claim 10, wherein the first buffer circuit includes a first transistor and a second transistor, and wherein the first transistor and the second transistor are configured to be switched complementally.

13. The electroluminescence display device according to claim 10,

wherein the first buffer circuit includes a first transistor and a second transistor,

wherein the first transistor has a first terminal connected to the first supply line, and a second terminal connected to the first output line, and

wherein the second transistor has a first terminal connected to the second supply line, and a second terminal connected to the first output line.

14. The electroluminescence display device according to claim 10, wherein the first pixel circuit includes:

a capacitor;

a sampling transistor configured to supply a data signal to the capacitor; and

a driving transistor configured to flow a current to the first electroluminescence according to the data signal.

15. The electroluminescence display device according to claim 14, wherein the first output signal is applied to a first terminal of the driving transistor.

16. An electroluminescence display device comprising:

a pixel including:

an electroluminescence element;

a capacitor;

a sampling transistor configured to supply a data signal to the capacitor; and

a driving transistor configured to flow a current to the electroluminescence according to the data signal; and

a driving circuit including:

a switching circuit configured to supply an output signal to the pixel circuit via an output line;

a first supply line configured to apply a first voltage to a buffer circuit; and

a second supply line configured to apply a second voltage to the buffer circuit,

wherein the switching circuit includes a first transistor connected between the first supply line and the output line, and a second transistor connected between the second supply line and the output line,

wherein each of the first supply line and the second supply line is not crossing the output line, wherein a first interconnect wiring connecting the first supply line to the buffer circuit is crossing the second supply line, and

wherein the output signal is configured to control between an ON-state and an OFF-state of the electroluminescence element.

17. The electroluminescence display device according to claim 16, wherein a width of the first supply line is longer than a width of the second supply line.

18. The electroluminescence display device according to claim 16, wherein the first transistor and the second transistor are configured to be switched complementally.

19. The electroluminescence display device according to claim 16, wherein the output signal is applied to a first terminal of the driving transistor.

专利名称(译)	EL显示面板，电源线驱动装置和电子设备		
公开(公告)号	<a href="#">US9608053</a>	公开(公告)日	2017-03-28
申请号	US14/826026	申请日	2015-08-13
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	TOMIDA MASATSUGU ASANO MITSURU		
发明人	TOMIDA, MASATSUGU ASANO, MITSURU		
IPC分类号	H01L27/32 G09G3/3233 G09G3/30 G09G3/3266		
CPC分类号	H01L27/3276 G09G3/30 G09G3/3233 G09G3/3266 G09G2300/0426 G09G2300/0819 G09G2300/0842 G09G2300/0866 G09G2310/0256 G09G2320/043 G09G2320/045 G09G2330/02 G09G3/3275 G09G2310/0286 G09G2310/08 G09G2330/021		
审查员(译)	SHERMAN, STEPHEN		
优先权	2007173590 2007-06-30 JP 14/269644 2014-12-16 US 12/213143 2012-09-18 US		
其他公开文献	US20150349043A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

本发明公开了一种电致发光显示面板，包括像素电路，信号线，扫描线，驱动电源线，公共电源线，电源线驱动电路，高电位电源线，低电平 - 电位线。

