




US 20160351631A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2016/0351631 A1**
(43) **Pub. Date:** **Dec. 1, 2016**
LEE(54) **ORGANIC LIGHT EMITTING DISPLAY
DEVICE**(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)(72) Inventor: **SangKyu LEE**, Gyeonggi-do (KR)(73) Assignee: **LG Display Co., Ltd.**, Seoul (KR)(21) Appl. No.: **15/166,471**(22) Filed: **May 27, 2016**(30) **Foreign Application Priority Data**

May 29, 2015 (KR) 10-2015-0076227

Publication Classification(51) **Int. Cl.**
H01L 27/32 (2006.01)
G06F 3/041 (2006.01)
H01L 51/52 (2006.01)(52) **U.S. Cl.**
CPC **H01L 27/323** (2013.01); **H01L 51/5284**
(2013.01); **H01L 51/5246** (2013.01); **H01L**
51/5253 (2013.01); **G06F 3/0412** (2013.01);
G06F 2203/04102 (2013.01)(57) **ABSTRACT**

An organic light emitting display device is provided. The organic light emitting display device includes a first substrate including a black matrix on one surface, an overcoating layer formed of a semi-permeable material and configured to equalize a thickness of an area where the black matrix is present to a thickness of an area where the black matrix is not present, and a touch electrode layer on the overcoating layer; and a second substrate including an organic light emitting element on one surface and bonded to the first substrate to face each other.

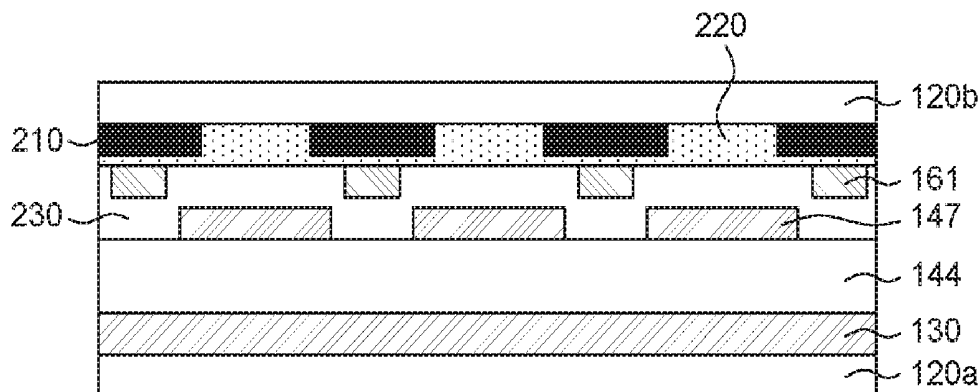

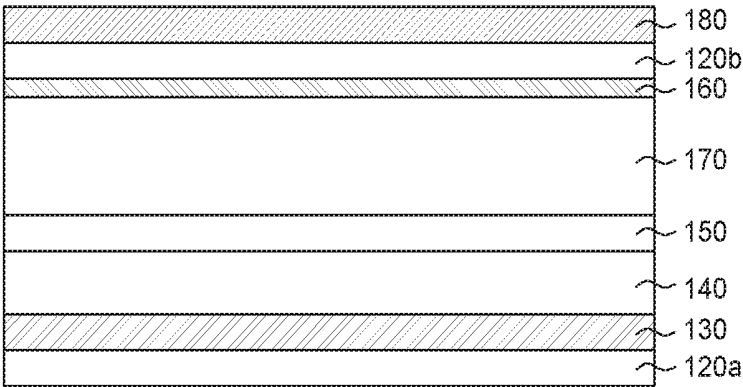


FIG. 1

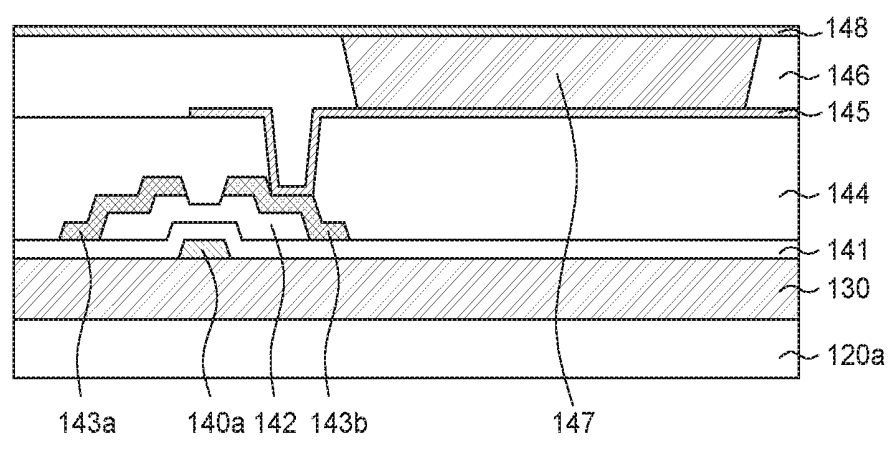


FIG. 2A

FIG. 2B

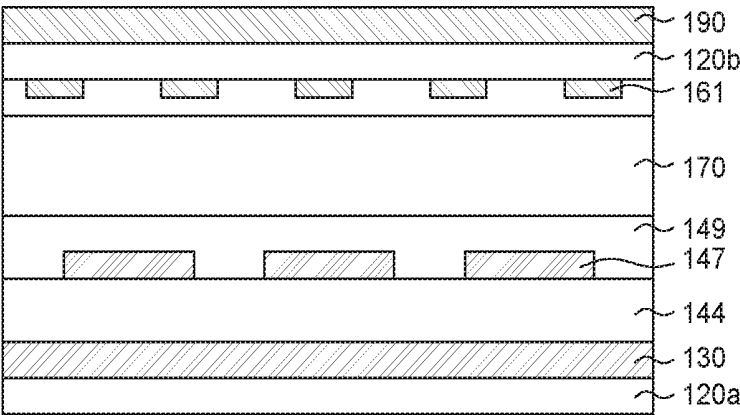


FIG. 3

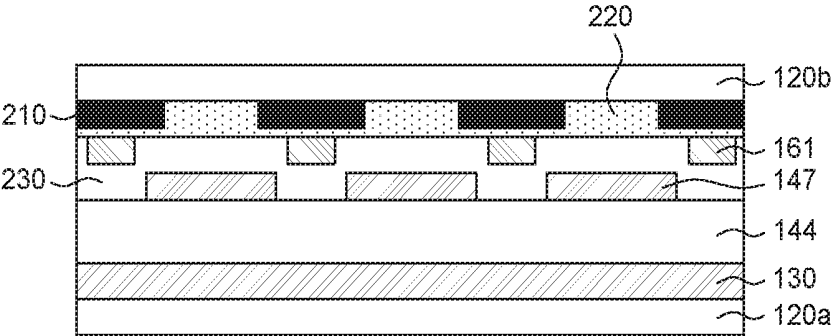


FIG. 4

ORGANIC LIGHT EMITTING DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the priority of Korean Patent Application No. 10-2015-0076227 filed on May 29, 2015, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference.

BACKGROUND

[0002] Field

[0003] The present disclosure relates to an organic light emitting display device and a structure thereof, and more particularly, to an organic light emitting display device which is thin enough to be foldable and to a structure thereof.

[0004] Description of the Related Art

[0005] Various types of display devices are being used in electronic products such as TVs, mobile phones, tablet PCs, notebook computers, etc. Examples of the display devices may include a liquid crystal display (LCD) device, an organic light emitting display (OLED) device, a plasma display panel (PDP) device, a quantum dot display device, a field emission display (FED) device, and an electrophoretic display (EPD) device. In recent years, the OLED device has attracted a lot of attention. The OLED device includes an organic light emitting diode which is a self-emitting element using a thin emission layer. Thus, the OLED device can be manufactured to be thin like paper. The organic light emitting diode includes an anode connected to a thin film transistor, an emission layer, and a cathode. Further, upon application of a voltage to the anode and the cathode, holes and electrons are recombined into excitons within the emission layer. As a result, the excitons transition to a ground state, to thus cause light to be emitted.

[0006] As a method for inputting a control signal or user inputs to an electronic device equipped with a display device, a method using a touch panel is being widely used. The touch panel is a device configured to detect a user's touch input such as a screen touch or a user's gesture with respect to a display device. The touch panel is being widely used in portable devices such as smart phones and tablet PCs. Also, it is used in a large-sized display device such as a display device in public facilities and smart TVs.

[0007] A touch panel may be installed in a display device as an add-on type, an on-cell type, or an integrated type or in-cell type. In the case of an add-on type touch panel, a display device and a touch panel including a touch sensor are separately manufactured and then, the touch panel is bonded to an upper plate of the display device. In the case of an on-cell type touch panel, a touch sensor is directly manufactured on the upper glass substrate surface of the display device. In the case of an integrated type or in-cell type touch panel, a touch sensor (or touch panel) is built in a display device, and, thus, it is possible to achieve slimming of the display device and also possible to improve the durability of the display device.

[0008] In a general display device, a touch screen is implemented by bonding a touch screen panel onto an upper substrate. In this display device, the touch screen panel is separately manufactured and then bonded to an outer surface of the display device. Therefore, the overall thickness of the

display device is increased. Further, the increased thickness may cause deterioration in visibility of an image.

[0009] In order to solve the above-described problem, recently, an in-cell type touch panel manufactured by integrating a touch panel with a display panel has attracted a lot of attention.

SUMMARY

[0010] Accordingly, the present invention is directed to an organic light emitting display device that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0011] An object of the present disclosure is to provide an organic light emitting display device.

[0012] Another object of the present disclosure is to provide an organic light emitting display device which is improved in transmissivity and thus improved in luminous efficiency.

[0013] Another object of the present disclosure is to provide a thin display device which is foldable.

[0014] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0015] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, an organic light emitting display device may comprise a first substrate including a black matrix disposed on one surface, an overcoating layer formed of a semipermeable material and configured to equalize a thickness of an area where the black matrix is present to a thickness of an area where the black matrix is not present, and a touch electrode layer disposed on the overcoating layer; and a second substrate including an organic light emitting element on one surface and bonded to the first substrate as facing each other.

[0016] In another aspect, a touch panel may comprise a flexible film; a black matrix disposed on a surface of the flexible film so as to correspond to a bank between sub-pixels; an overcoating layer configured to planarize the surface of the flexible film by covering an area where the black matrix is present and an area where the black matrix is not present in the surface of the flexible film; and a touch electrode and a line disposed on the overcoating layer.

[0017] In another aspect, a display device comprises a first plastic substrate in which a black matrix, a semipermeable overcoating layer, and a touch sensor are integrated; and a second plastic substrate in which pixels each including an organic emission layer are disposed. A bonding structure of the first plastic substrate and the second plastic substrate does not include a polarizer and is foldable.

[0018] According to exemplary embodiments of the present disclosure, a display device is improved in transmissivity as compared with a display device using a circular polarizer. Thus, the luminous efficiency of the display device can be improved. Therefore, the display device according to the exemplary embodiments of the present disclosure consumes less power.

[0019] Meanwhile, according to the exemplary embodiments of the present disclosure, the number of films used in

the organic light emitting display device is reduced. Thus, a thickness of the display device is reduced. Therefore, it is possible to implement a thin display device which is foldable. Further, according to the exemplary embodiments of the present disclosure, the number of films used in the organic light emitting display device is reduced. Thus, manufacturing costs of the display device are reduced.

[0020] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

[0022] FIG. 1 is a cross-sectional view of an organic light emitting display device according to an exemplary embodiment of the present disclosure;

[0023] FIG. 2A is a cross-sectional view of an organic light emitting element layer according to an exemplary embodiment of the present disclosure and FIG. 2B is a cross-sectional view of a touch layer according to an exemplary embodiment of the present disclosure;

[0024] FIG. 3 is a cross-sectional view of an in-cell type touch sensor integrated organic light emitting display device according to an exemplary embodiment of the present disclosure; and

[0025] FIG. 4 is a cross-sectional view of an in-cell type touch sensor integrated organic light emitting display device according to another exemplary embodiment of the present disclosure.

DETAILED DESCRIPTION

[0026] In describing components of the present disclosure, terms such as first, second, A, B, (a), (b), etc. can be used. These terms are used only to differentiate the components from other components. Therefore, the nature, order, sequence, or the number of the corresponding components is not limited by these terms. It is to be understood that when one element is referred to as being “connected to” or “coupled to” another element, it may be directly connected or coupled to another element or be connected or coupled to another element, having still another element “connected” or “coupled” therebetween. When an element or layer is referred to as being “on” another element or layer, it may be directly on the other element or layer, or intervening elements or layers may be present. Since size and thickness of each component illustrated in the drawings are represented for convenience in explanation, the present disclosure is not limited to the illustrated size and thickness of each component.

[0027] The term “organic light emitting display device” which may also be referred to as “display device” herein is used as a general term for organic light emitting diode panels and display devices employing the organic light emitting diode panels. Generally, organic light emitting display devices may be classified into two different types: white organic light emitting display devices; and RGB organic light emitting display devices. In a white organic light

emitting display device, each of sub-pixels in a pixel is configured to emit a white light and a set of color filters is used to filter a white light such that the corresponding sub-pixel generates a red light, a green light, and a blue light. Further, the white organic light emitting display device may include a sub-pixel without a color filter to form a sub-pixel for generating a white light. In an RGB organic light emitting display device, an organic emission layer in each sub-pixel is configured to emit a light of a predetermined color. For example, a pixel includes a red sub-pixel including an organic emission layer configured to emit a red light, a green sub-pixel including an organic emission layer configured to emit a green light, and a blue sub-pixel including an organic emission layer configured to emit a blue light.

[0028] The features of various embodiments of the present disclosure can be partially or entirely bonded to or combined with each other and can be interlocked and operated in technically various ways as can be fully understood by a person having ordinary skill in the art, and the embodiments can be carried out independently of or in association with each other.

[0029] Hereinafter, various exemplary embodiments of the present disclosure will be described in detail with reference to the accompanying drawings.

[0030] FIG. 1 is a cross-sectional view of an organic light emitting display device according to an exemplary embodiment of the present disclosure.

[0031] An organic light emitting display (OLED) device according to an exemplary embodiment of the present disclosure may be an in-cell type touch sensor integrated display device. The OLED device may include an upper substrate (e.g. encapsulation plate) 120b including a touch layer 160 and a lower substrate (e.g. array substrate) 120a including an organic light emitting element layer 140. The lower substrate 120a and the upper substrate 120b are bonded by an adhesive layer 170.

[0032] The lower substrate 120a and the upper substrate 120b are formed of insulation materials and configured to support or accommodate various components of the OLED device. The lower substrate 120a and the upper substrate 120b may be formed of materials having flexibility. For example, the lower substrate 120a and the upper substrate 120b may be plastic films formed of one or more organic materials selected from polyethylene naphthalate (PEN), polyethylene terephthalate (PET), polyethylene ether phthalate, poly carbonate, poly arylate, polyether imide, polyether sulfonate, polyimide, and polyacrylate.

[0033] If the lower substrate 120a is formed of a material having flexibility, a back plate (or similar element) configured to support the lower substrate 120a may be used.

[0034] A buffer layer 130 (or element of similar function) is provided between the lower substrate 120a and the organic light emitting element layer 140. The buffer layer 130 is configured to improve adhesion between the organic light emitting element layer 140 and the lower substrate 120a. Further, the buffer layer 130 is configured to suppress diffusion of moisture or impurities from the lower substrate 120a into the organic light emitting element layer 140. The buffer layer 130 may be formed into a single layer of an inorganic insulation material such as silicon oxide (SiO₂) or silicon nitride (SiNx), or may be formed into a double-layered structure of silicon oxide (SiO₂) and silicon nitride (SiNx).

[0035] The organic light emitting element layer **140** is formed on the lower substrate **120a** with the buffer layer **130** interposed therebetween. In the organic light emitting element layer **140**, a thin film transistor, an organic light emitting diode, and the like are disposed.

[0036] A protection (or passivation) film **150** is formed on the organic light emitting element layer **140**. The protection film **150** may be formed as a single layer of an inorganic insulation material such as aluminum oxide (AlOx), silicon oxynitride (SiON), silicon nitride (SiNx), or silicon oxide (SiOx), or an organic insulation material such as benzocyclobutene or photo acryl. Otherwise, the protection film **150** may be formed as a structure in which an inorganic insulation material and an organic insulation material are alternately laminated into two or more total layers.

[0037] Meanwhile, a drive IC (or other elements with similar functions) can be placed on one lateral surface of the lower substrate **120a**. The drive IC can be connected to a printed circuit board (PCB). The PCB can include a timing controller (or other means) that supplies various control signals for driving the organic light emitting element and a power supply unit that supplies a driving voltage. The signals from the PCB are applied to the organic light emitting element layer **140** through the drive IC. Particularly, in the PCB, a flexible printed circuit board (FPCB) including a touch controller for driving the touch layer **160** may be integrated. The FPCB is electrically connected to the touch layer **160** through anisotropic conductive paste (ACP) or an anisotropic conductive film (ACF).

[0038] The touch layer **160** formed on the upper substrate (encapsulation plate) **120b** is bonded onto the protection film **150** so as to face each other through the adhesive layer **170**.

[0039] The adhesive layer **170** is formed on the touch layer **160**. Further, the adhesive layer **170** is bonded onto the protection (or passivation) film **150**, and, thus, the upper substrate **120b** and the lower substrate **120a** are bonded so as to face each other.

[0040] The touch layer **160** may be electrically connected to the organic light emitting element layer **140** through anisotropic conductive paste (ACP). The ACP may have a structure in which conductive balls coated with metal such as gold (Au), silver (Ag), copper (Cu), and molybdenum (Mo) are dispersed in a sealant.

[0041] The ACP connects a pad of the touch layer **160** to the FPCB. Further, the pad is connected to routing lines of an X-electrode **161a** and a Y-electrode **161b** of the touch layer **160**.

[0042] Generally, the FPCB for driving the touch layer **160** is formed separately from the PCB for driving the organic light emitting element layer **140**. However, in the present disclosure, the FPCB for driving the touch layer **160** can be integrated with the PCB for driving the organic light emitting element layer **140**. Further, the FPCB and the touch layer **160** may be connected to each other using the ACP.

[0043] Therefore, in the in-cell type touch sensor integrated OLED device according to the present disclosure, the FPCB for driving the touch layer **160** is integrated with the PCB for driving the organic light emitting element layer **140**, thereby reducing manufacturing costs.

[0044] Further, a top cover **180** may be bonded to one surface of the upper substrate **120b** on which the touch layer **160** is formed. The top cover **180** may be formed of a particular material, such as polymethyl methacrylate (PMMA), polyurethane (PU), acryl, a cyclo olefin polymer

(COP), polyethylene terephthalate (PET), polyethylene naphthalate (PEN), or polyimide, having flexibility and a high transmissivity.

[0045] Further, a bottom cover formed of a material such as polymethyl methacrylate (PMMA), polyurethane (PU), acryl, a cyclo olefin polymer (COP), polyethylene terephthalate (PET), polyethylene naphthalate (PEN), or polyimide may be disposed on a rear surface of the lower substrate **120a**.

[0046] According to the present disclosure, the organic light emitting element layer **140** and the touch layer **160** are formed on the lower substrate **120a** and the upper substrate **120b**, respectively. Thus, the in-cell type touch sensor integrated OLED device has flexibility. Particularly, a flexible substrate has a smaller thickness than a general rigid substrate. Therefore, a display device can be manufactured to be thin.

[0047] Further, the FPCB including the touch controller for driving the touch layer **160** is formed on the PCB for driving the organic light emitting element layer **140** and the FPCB is electrically connected to the touch layer **160** through the ACP. Thus, the FPCB for driving the touch layer **160** can be integrated with the PCB for driving the organic light emitting element layer **140**, and manufacturing costs can be reduced.

[0048] FIG. 2A is a cross-sectional view of an organic light emitting element layer according to an exemplary embodiment of the present disclosure and FIG. 2B is a cross-sectional view of a touch layer according to an exemplary embodiment of the present disclosure.

[0049] Referring to FIG. 2A, the buffer layer **130** is provided between the lower substrate **120a** and the organic light emitting element layer **140**. The buffer layer **130** is configured to improve adhesion between the organic light emitting element layer **140** and the lower substrate **120a**. Further, the buffer layer **130** is configured to suppress diffusion of moisture or impurities from the lower substrate **120a** into the organic light emitting element layer **140**. The buffer layer **130** may be formed as a single layer of an inorganic insulation material such as silicon oxide (SiO₂) or silicon nitride (SiNx), or may be formed into a double or multi-layered structure of silicon oxide (SiO₂) and silicon nitride (SiNx).

[0050] The organic light emitting element layer **140** is formed on the lower substrate **120a** with the buffer layer **130** interposed therebetween. As illustrated in FIG. 2A, the organic light emitting element layer **140** includes a thin film transistor including a gate electrode **140a**, a gate insulation film **141**, a semiconductor layer **142**, a source electrode **143a**, and a drain electrode **143b**; and an organic light emitting element including a first electrode **145**, an organic emission layer **147**, and a second electrode **148**.

[0051] Specifically, the gate electrode **140a** is formed on the buffer layer **130**, and the gate insulation film **141** is formed so as to cover the gate electrode **140a**. The semiconductor layer **142** is formed on the gate insulation film **141** so as to be overlapped with the gate electrode **140a**. The source electrode **143a** and the drain electrode **143b** are formed as being spaced from each other on the semiconductor layer **142**.

[0052] A planarization film **144** may be formed of acryl-based resin so as to cover the thin film transistor. The planarization film **144** is configured to planarize (or flatten) the lower substrate **120a** on which the thin film transistor is

formed. An inorganic film may be formed of silicon oxide (SiOx) or silicon nitride (SiNx) between the gate insulation film **141** and the planarization film **144**. Thus, it is possible to improve interfacial stability of the planarization film **144** with respect to each of the gate insulation film **141** and the source and drain electrodes **143a** and **143b**.

[0053] Further, the first electrode **145** connected to the drain electrode **143b**, a bank insulation film **146** through which a partial area of the first electrode **145** is exposed, the organic emission layer **147** formed on the exposed first electrode **145**, and the second electrode **148** on the organic emission layer **147** are formed on the planarization film **144**. The bank insulation film **146** is configured to define an emission area of the organic light emitting element layer and suppress a light leakage from a non-emission area.

[0054] Referring to FIG. 2B, the touch layer **160** formed on the upper substrate **120b** is bonded onto the protection film **150** as facing each other through the adhesive layer **170**.

[0055] As shown in FIG. 2B, the touch layer **160** formed on the upper substrate **120b** includes a plurality of X-electrodes **161a** and Y-electrodes **161b** intersecting each other with a first insulation film **162a** interposed therebetween, and a second insulation film **162b** formed to cover the Y-electrodes **161b**.

[0056] The X-electrode **161a** and the Y-electrode **161b** of the touch layer **160** are connected to a pad (or connection terminal) through routing lines. Herein, the pad may be a voltage application pad or a voltage detection pad. The above-described touch layer **160** may be driven as a mutual capacitive type. In the mutual capacitive type, a driving voltage is applied to the X-electrodes **161a** and the Y-electrodes **161b** sense any voltage drop change depending on the presence or absence of a touch contact made thereto. In some cases, the touch layer **160** may include a bridge electrode formed on the upper substrate **120b**, a first insulation film formed to cover the bridge electrode, an X-electrode formed on the first insulation film and electrically connected through the bridge electrode, a Y-electrode formed on the same layer as the X-electrode, and a second insulation film formed to cover the Y-electrode.

[0057] FIG. 3 is a cross-sectional view of an in-cell type touch sensor integrated OLED device according to an exemplary embodiment of the present disclosure.

[0058] The OLED device may include the same components as described above with reference to FIG. 1 and FIG. 2. That is, the lower substrate **120a**, the organic emission layer **147**, the upper substrate **120b**, and the touch electrode **161** are substantially the same as those described above with reference to FIG. 1 and FIG. 2.

[0059] An encapsulation layer **149** is positioned on the organic emission layer **147**. Herein, the encapsulation layer **149** may be formed into an inorganic film of glass, metal, aluminum oxide (AlOx), or a silicon (Si)-based material, or may be formed into a structure in which an organic film and an inorganic film are alternately laminated. The encapsulation layer **149** is configured to block infiltration of oxygen and moisture in order to suppress oxidation of a light emitting material and/or an electrode material. If the organic light emitting element is exposed to moisture or oxygen, pixel shrinkage that reduces the emission area may occur or dark spots may be generated within the emission area.

[0060] The adhesive layer **170** may be positioned on the encapsulation layer **149**. The adhesive layer **170** may be a thermally curable or naturally curable adhesive. For

example, the adhesive layer **170** may be formed of a material such as barrier pressure sensitive adhesive (B-PSA).

[0061] A barrier film (or similar layer) may be positioned on the adhesive layer **170**. The barrier film is configured to encapsulate the entire substrate including the organic light emitting element. The barrier film may be a retardation film or an optically isotropic film. If the barrier film has an optically isotropic property, the barrier film transmits light incident into the barrier film without the retardation. Further, an organic film and/or an inorganic film may be further provided on an upper and/or lower surface of the barrier film. Herein, the inorganic film may include a silicon oxide (SiOx) film or a silicon nitride (SiNx) film. The organic film may include a polymer such as acryl-based resin, epoxy-based resin, polyimide or polyethylene. The organic film or inorganic film formed on the upper or lower surface of the barrier film functions to block infiltration of moisture or oxygen from the outside. The barrier film may be laminated by a roller lamination method or a vacuum lamination method.

[0062] The OLED device may further include a polarizing film **190** positioned on an upper surface of the upper substrate **120b**. The polarizing film **190** is used to remove reflections of external incident light and thus improves visibility of the display device. For example, the polarizing film **190** may include a linear polarizer and a $\lambda/4$ retardation film. In this case, external incident light is in a circularly polarized state while passing through the linear polarizer and the $\lambda/4$ retardation film. Further, light emitted from the display panel has a polarizer axis orthogonal to a polarizer axis of the external incident light so as to offset each other. Therefore, the external light is shielded, and visibility of the display device is improved. Meanwhile, the polarizing film **190** may be formed as a circular polarizer.

[0063] The OLED device illustrated in FIG. 3 may include the polarizing film **190**, the barrier film, and the film-shaped touch layer laminated by a lamination process. If three kinds of films are used as such, the sum of the thicknesses of the films may be 200 μm or more. Further, it is difficult to reduce a thickness of each of the films. Therefore, it may be difficult to apply a structure as illustrated in FIG. 3 to a foldable display device. This is because as the thickness of a display device is increased, a stress applied to the display device when being folded is increased. Therefore, in order to implement a foldable display device, a thin structure is needed. Further, the structure as illustrated in FIG. 3 needs to be modified to be thinner.

[0064] Besides, the transmissivity of the circular polarizer is 45% or less and thus becomes one of the causes of reducing the efficiency of the OLED device. Therefore, the transmissivity of the circular polarizer also needs to be improved.

[0065] FIG. 4 is a cross-sectional view of an in-cell type touch sensor integrated OLED device according to another exemplary embodiment of the present disclosure.

[0066] The in-cell type touch sensor integrated OLED device employs an overcoating layer formed of a semi-permeable material instead of the circular polarizer. Specifically, referring to FIG. 4, the OLED device includes a black matrix **210** positioned on one surface of an upper substrate (touch panel), an overcoating layer **220** formed on an area where the black matrix is present and an area where the black matrix is not present, and a touch electrode **161** disposed on the overcoating layer.

[0067] The upper substrate (first substrate) is formed of an insulation material, and may be formed of a material having flexibility. For example, the first substrate **120b** may be a plastic film formed of one or more organic materials selected from polyethylene naphthalate (PEN), polyethylene terephthalate (PET), polyethylene ether phthalate, polycarbonate, polyarylate, polyether imide, polyether sulfonate, polyimide, and polyacrylate. The first substrate **120b** may be a high heat-resistance transparent plastic film having a transmissivity of 85% or more.

[0068] The black matrix **210** is positioned corresponding to a boundary of each pixel region and configured to suppress a leakage of a light emitted from a specific pixel to its adjacent pixel region. That is, the black matrix **210** prevents color mixing at the boundary of each pixel region. The black matrix **210** may be formed of chromium (Cr) or other opaque metals, or may be formed of resin. The black matrix **210** may be positioned to face a bank on the organic light emitting element layer. Herein, the black matrix **210** may be formed to have a smaller width than the bank. The bank is a structure configured to separate sub-pixels.

[0069] The overcoating layer **220** is configured to planarize an upper part of the substrate **120b** and the black matrix **210**. The overcoating layer **220** is formed of a material (semi-permeable material) capable of reducing the transmissivity of a visible light at a certain ratio. The overcoating layer **220** is formed to have a higher transmissivity than the circular polarizer. For example, if the overcoating layer **220** has a transmissivity in the range of 45% to 80%, the luminous efficiency of the OLED device can be improved. The overcoating layer **220** may be formed to have transmissivity in the range of 60% to 70% according to characteristics of the display device. The overcoating layer **220** may be formed to have a uniform transmissivity in the entire visible light wavelength range. Otherwise, the overcoating layer **220** may be formed to have different transmissivities for respective wavelength ranges.

[0070] The overcoating layer **220** may be formed of a material in which an organic dye is homogeneously dissolved in a polymer such as acryl or polyimide (PI). The polymer may have a heat-resistance of 250° C. or more.

[0071] The organic dye may include one or more materials selected from black dye, Amidoschwarz, sodium 1-[1-hydroxynaphthylazo]-6-nitro-2-naphthol-4-sulfonate, and trisocyanato-(2,2';6',6''-terpyridyl-4,4',4''-tricarboxylato) ruthenium (II) tris(tetra-butylammonium). The black dye has a structure in which only one monoprotonated hydrogen atom of a polypyridyl ligand (tcterpy: 4,4',4''-tricarboxy-2,2':6',6''-terpyridine) can be adsorbed to a metal oxide. The black dye can be prepared by reducing hydrogen bonding between molecules so as to reduce aggregation of the dye on a surface of the metal oxide. The black dye has a smaller adsorption amount and a lower molar extinction coefficient in an MLCT region but has improved photoelectric conversion efficiency as compared with an N3 dye. Further, the black dye has an excellent red shift light absorption capacity.

[0072] The organic dye may be prepared by mixing a red dye, a blue dye, and a green dye at an appropriate ratio so as to uniformly absorb wavelengths in the visible light range. This method is similar to the method of forming the overcoating layer using the black dye except a kind of an organic dye.

[0073] An amount of the organic dye may vary depending on the kind of organic dye. This is because each organic dye

has a different extinction coefficient and the solubility of a material for preparing the overcoating layer varies depending on a kind of the organic dye. The amount of the organic dye is adjusted such that the overcoating layer has a transmissivity of 45% to 90% in the visible light range and also adjusted such that the organic dye is homogeneously dissolved.

[0074] Meanwhile, the overcoating layer **220** may be formed into a structure in which a particle-shaped material such as graphite, carbon nanoparticles, or carbon nanotubes is dispersed in a polymer such as acryl or polyimide (PI). This is because the above-described particles are not dissolved in the polymer. The particle-shaped material such as graphite, carbon nanoparticles, or carbon nanotubes applied to the overcoating layer may be uniformly dispersed. If not, defects such as spots or mura may occur after the panel is manufactured. The particles may maintain a uniform dispersity of 5 or less.

[0075] The touch electrode **161** and its relevant lines are disposed on the overcoating layer **220**. The touch electrode (driving electrode and/or sensing electrode) **161** may be a transparent electrode formed of ITO or the like. The touch electrode **161** is connected to the pad on the lower substrate through an anisotropic conductive film (ACF) or anisotropic conductive paste (ACP). A touch driver-IC for driving the touch electrode is mounted on a flexible printed circuit board (FPCB) and connected to the pad. The touch driver-IC and another driver-IC may be mounted on a single FPCB.

[0076] The first substrate **120b** including the black matrix **210**, the semi-permeable overcoating layer **220**, and the touch electrode **161** is bonded to the second substrate **120a** on which the organic light emitting element is disposed. Herein, an adhesive layer **230** configured to bond the first substrate to the second substrate may be used. The adhesive layer **230** is positioned between a touch electrode layer on the first substrate and an organic light emitting element layer (or an encapsulation layer) on the second substrate. The adhesive layer **230** may be formed of an adhesive. The adhesive may be a material capable of adhesion without a change in state. In this case, since there is no change in state, the adhesive is re-usable/re-adhesible. The first substrate **120b** and the adhesive layer **230** may function as an encapsulation layer.

[0077] The second substrate **120a** is formed of an insulation material, and may be formed of a material having flexibility. For example, the second substrate **120a** may be a plastic film formed of one or more organic materials selected from polyethylene naphthalate (PEN), polyethylene terephthalate (PET), polyethylene ether phthalate, polycarbonate, polyarylate, polyether imide, polyether sulfonate, polyimide, and polyacrylate.

[0078] The first substrate **120b** and the second substrate **120a** may be manufactured on a supporting substrate (e.g.: glass substrate). After the first substrate **120b** and the second substrate **120a** are bonded to each other and a circuit board is connected thereto, the supporting substrate can be released or removed.

[0079] The display device manufactured by bonding the first substrate **120b** and the second substrate **120a** is thinner than the display device illustrated in FIG. 3. That is, the OLED device illustrated in FIG. 4 does not include a polarizer and thus can have a thickness (i.e., the sum of the thicknesses of the first substrate, the second substrate, and the adhesive layer) of 100 μm or less. Further, the first

substrate **120b** and the overcoating layer **220** may be manufactured to have a total thickness of 15 μm or less. Accordingly, the OLED device may be foldable with a curvature of 2.5 R or less. Herein, “R” means a radius of curvature and a unit of “R” represents “millimeter (mm)”. The upper substrate **120b** of the display device may be directly bonded to an outer cover without a polarizer (polarizing film).

[0080] The above-described OLED device is improved in transmissivity and thus improved in luminous efficiency as compared with an OLED device using a circular polarizer, and also consumes less power. Further, according to the exemplary embodiments, the number of films (or layers) used in an OLED device is reduced, and, thus, a thickness of the display device is reduced. Accordingly, it is possible to implement a thin display device which is foldable. Meanwhile, according to the exemplary embodiments, the number of films used in an OLED device is reduced, and, thus, manufacturing costs of the display device are reduced. In addition, if a touch driver-IC and another driver-IC are integrated with an FPCB, price competitiveness of the display device can be enhanced.

[0081] The exemplary embodiments of the present disclosure can also be described as follows:

[0082] According to an embodiment of the present disclosure, an organic light emitting display device may include: a first substrate including a black matrix on one surface, an overcoating layer formed of a semipermeable material and configured to equalize a thickness of an area where the black matrix is present to a thickness of an area where the black matrix is not present, and a touch electrode layer on the overcoating layer; and a second substrate including an organic light emitting element on one surface and bonded to the first substrate as facing each other.

[0083] The organic light emitting display device may further include: an adhesive layer positioned between the touch electrode layer of the first substrate and an organic light emitting element layer of the second substrate and configured to bond the first substrate and the second substrate.

[0084] The overcoating layer may be formed of a material having a visible light transmissivity of 45% to 80%.

[0085] The overcoating layer may have a uniform transmissivity in the entire visible light wavelength range.

[0086] The overcoating layer may be formed of a material in which an organic dye is homogeneously dissolved in a polymer.

[0087] The organic dye may be a black dye.

[0088] The polymer may have a heat-resistance of 250° C. or more.

[0089] The overcoating layer may be formed of a material in which at least one particle-shaped material of graphite, carbon nanoparticles, and carbon nanotubes is dispersed in a polymer.

[0090] The first substrate and the second substrate may be films formed of at least one of polyethylene naphthalate, polyethylene terephthalate, polyethylene ether phthalate, poly carbonate, poly arylate, polyether imide, polyether sulfonate, polyimide, and polyacrylate.

[0091] The sum of thicknesses of the first substrate, the second substrate, and the adhesive layer may be 100 μm or less and the first substrate, the second substrate, and the adhesive layer are foldable with a radius of curvature of 2.5 mm or less.

[0092] According to another embodiment of the present disclosure, a touch panel may include: a flexible film; a black matrix on a surface of the flexible film so as to correspond to a bank between sub-pixels; an overcoating layer configured to planarize the surface of the flexible film by covering an area where the black matrix is present and an area where the black matrix is not present in the surface of the flexible film; and a touch electrode and a line on the overcoating layer.

[0093] In the flexible film, a surface opposite to the surface on which the black matrix is disposed may be directly bonded to an outer cover without a polarizing film.

[0094] The overcoating layer may be formed of a semi-permeable material having a visible light transmissivity of 45% to 80%.

[0095] The overcoating layer may be formed of a material in which an organic dye is dissolved in a polymer having a heat-resistance of 250° C. or more.

[0096] The sum of thicknesses of the flexible film and the overcoating layer may be 15 μm or less.

[0097] According to yet another embodiment of the present disclosure, a display device may include: a first plastic substrate in which a black matrix, a semipermeable overcoating layer, and a touch sensor are integrated; and a second plastic substrate in which pixels each including an organic emission layer are disposed. A bonding structure of the first plastic substrate and the second plastic substrate is foldable and does not include a polarizer.

[0098] The overcoating layer may be implemented to have a function to planarize a surface by covering an area where the black matrix is present and an area where the black matrix is not present.

[0099] The overcoating layer may be implemented to further have a function of reducing transmissivity of a visible light at an equal ratio.

[0100] The bonding structure of the first plastic substrate and the second plastic substrate may have a thickness of 100 μm or less and may be foldable with a radius of curvature of 2.5 mm or less.

[0101] The overcoating layer may be a semi-permeable material having a visible light transmissivity of 45% to 80%.

[0102] It will be apparent to those skilled in the art that various modifications and variations can be made in the organic light emitting display device of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An organic light emitting display device, comprising: a first substrate including a black matrix on one surface, an overcoating layer formed of a semi-permeable material and configured to equalize a thickness of an area where the black matrix is present to a thickness of an area where the black matrix is not present, and a touch electrode layer on the overcoating layer; and a second substrate including an organic light emitting element on one surface and bonded to the first substrate to face each other.
2. The organic light emitting display device according to claim 1, further comprising: an adhesive layer between the touch electrode layer of the first substrate and an organic light emitting element

layer of the second substrate, and configured to bond the first substrate with the second substrate.

3. The organic light emitting display device according to claim 1, wherein the overcoating layer is formed of a material having a visible light transmissivity of 45% to 80%.

4. The organic light emitting display device according to claim 3, wherein the overcoating layer has a uniform transmissivity in the entire visible light wavelength range.

5. The organic light emitting display device according to claim 3, wherein the overcoating layer is formed of a material in which an organic dye is homogeneously dissolved in a polymer.

6. The organic light emitting display device according to claim 5, wherein the organic dye is a black dye.

7. The organic light emitting display device according to claim 5, wherein the polymer has a heat-resistance of 250° C. or more.

8. The organic light emitting display device according to claim 3, wherein the overcoating layer is formed of a material in which at least one among particle-shaped graphite, carbon nanoparticles, and carbon nanotubes are dispersed in a polymer.

9. The organic light emitting display device according to claim 3, wherein the first substrate and the second substrate are films formed of at least one among polyethylene naphthalate, polyethylene terephthalate, polyethylene ether phthalate, poly carbonate, poly arylate, polyether imide, polyether sulfonate, polyimide, and polyacrylate.

10. The organic light emitting display device according to claim 9, wherein the sum of thicknesses of the first substrate, the second substrate, and the adhesive layer is 100 μm or less and the combined structure having the first substrate, the second substrate, and the adhesive layer is foldable with a radius of curvature of 2.5 mm or less.

11. A touch panel, comprising:

a flexible film;

a black matrix on a surface of the flexible film so as to correspond to bank portions between sub-pixels;

an overcoating layer configured to planarize the surface of the flexible film by covering an area where the black matrix is present and an area where the black matrix is not present on the surface of the flexible film; and

a touch electrode and its conductive lines on the overcoating layer.

12. The touch panel according to claim 11, wherein the flexible film has a surface, which is opposite to the surface on which the black matrix is disposed, that is directly bonded to an outer cover without a polarizing film.

13. The touch panel according to claim 11, wherein the overcoating layer is formed of a semi-permeable material having a visible light transmissivity of 45% to 80%.

14. The touch panel according to claim 13, wherein the overcoating layer is formed of a material in which an organic dye is dissolved in a polymer having a heat-resistance of 250° C. or more.

15. The touch panel according to claim 13, wherein the sum of thicknesses of the flexible film and the overcoating layer is 15 μm or less.

16. A display device, comprising:

a first plastic substrate on which a black matrix (BM), a semi-permeable overcoating layer, and a touch sensor are integrated; and

a second plastic substrate on which pixels including an organic emission layer are disposed,

wherein a bonding structure of the first plastic substrate and the second plastic substrate permits a foldable configuration and does not include a polarizer.

17. The display device according to claim 16, wherein the overcoating layer is implemented to have a function to planarize a surface by covering an area where the black matrix is present and an area where the black matrix is not present.

18. The display device according to claim 17, wherein the overcoating layer is implemented to further have a function of reducing transmissivity of a visible light at an equal ratio.

19. The display device according to claim 17, wherein the bonding structure of the first plastic substrate and the second plastic substrate has a thickness of 100 μm or less and permits the foldable configuration with a radius of curvature of 2.5 mm or less.

20. The display device according to claim 17, wherein the overcoating layer is a semi-permeable material having a visible light transmissivity of 45% to 80%.

* * * * *

专利名称(译)	有机发光显示装置		
公开(公告)号	US20160351631A1	公开(公告)日	2016-12-01
申请号	US15/166471	申请日	2016-05-27
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	LEE SANGKYU		
发明人	LEE, SANGKYU		
IPC分类号	H01L27/32 G06F3/041 H01L51/52		
CPC分类号	H01L27/323 H01L51/5284 G06F2203/04102 H01L51/5253 G06F3/0412 H01L51/5246 H01L51/0024		
优先权	1020150076227 2015-05-29 KR		
其他公开文献	US10381419		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种有机发光显示装置。有机发光显示装置包括：在一个表面上包括黑矩阵的第一基板，由半透性材料形成的覆盖层，并且被配置为使存在黑矩阵的区域的厚度等于其中存在黑矩阵的区域的厚度，不存在所述黑矩阵，以及在所述外涂层上的触摸电极层；以及第二基板，其在一个表面上包括有机发光元件并且与所述第一基板接合以彼此面对。

