



US 20180151642A1

(19) **United States**(12) **Patent Application Publication**
OH(10) **Pub. No.: US 2018/0151642 A1**(43) **Pub. Date: May 31, 2018**(54) **ENCAPSULATION UNIT AND ORGANIC
LIGHT EMITTING DISPLAY DEVICE
INCLUDING THE SAME**(52) **U.S. Cl.**
CPC *H01L 27/3241* (2013.01); *H01L 23/291*
(2013.01); *H01L 23/31* (2013.01)(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)(72) Inventor: **Jae-Young OH**, Goyang-si (KR)(21) Appl. No.: **15/815,282**(22) Filed: **Nov. 16, 2017**(30) **Foreign Application Priority Data**

Nov. 30, 2016 (KR) 10-2016-0161514

Publication Classification(51) **Int. Cl.**
H01L 27/32 (2006.01)
H01L 23/31 (2006.01)
H01L 23/29 (2006.01)(57) **ABSTRACT**

Disclosed are an encapsulation unit which may prevent deterioration of thin film transistors so as to improve reliability and an organic light emitting display device including the same. At least one transparent oxide film is disposed under at least one of a plurality of inorganic encapsulation films disposed on a light emitting element and, thus, oxygen in the at least one transparent oxide film combines with hydrogen introduced during formation of the inorganic encapsulation films to prevent hydrogen from diffusing into the thin film transistors.

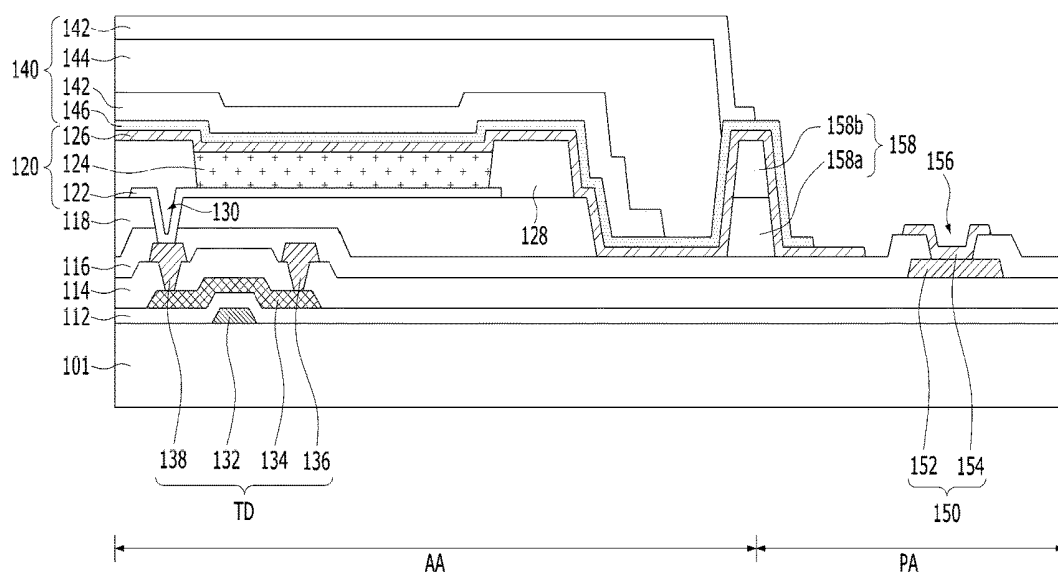


FIG. 1

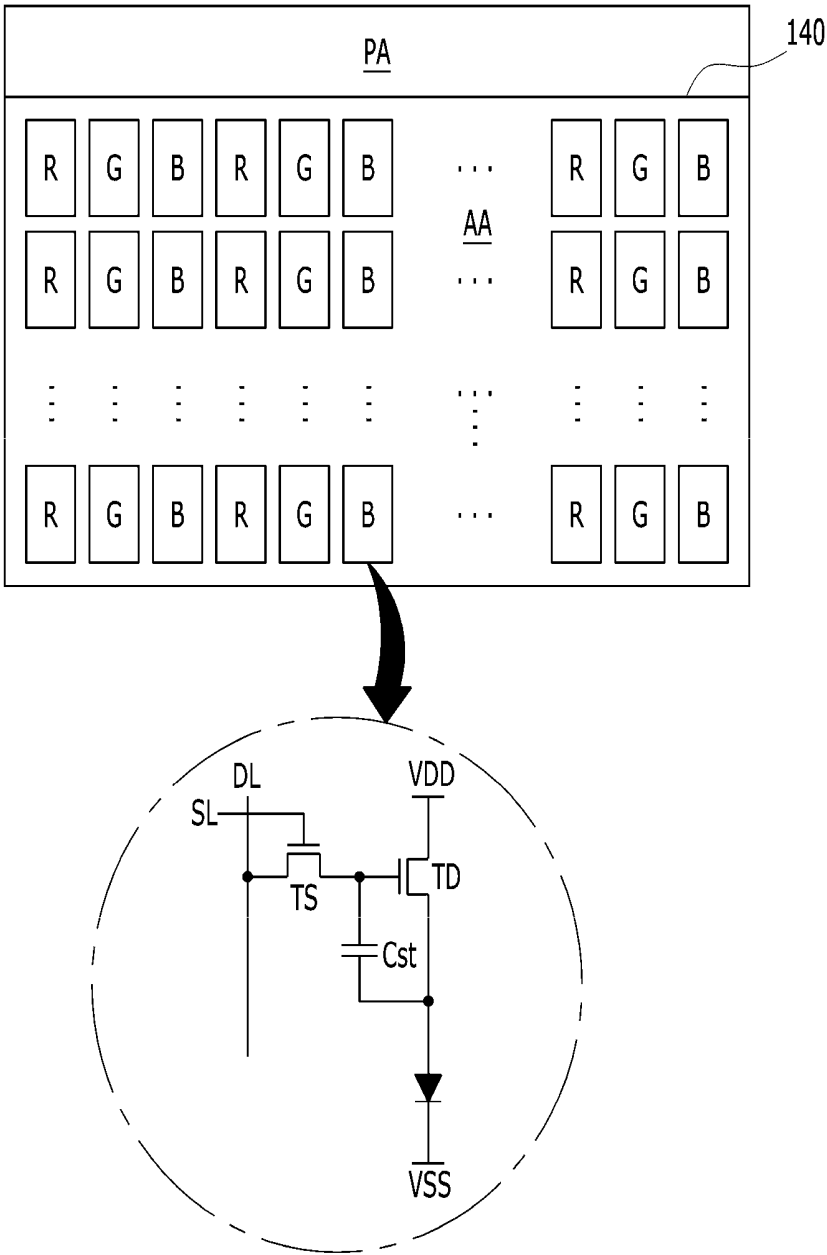


FIG. 2

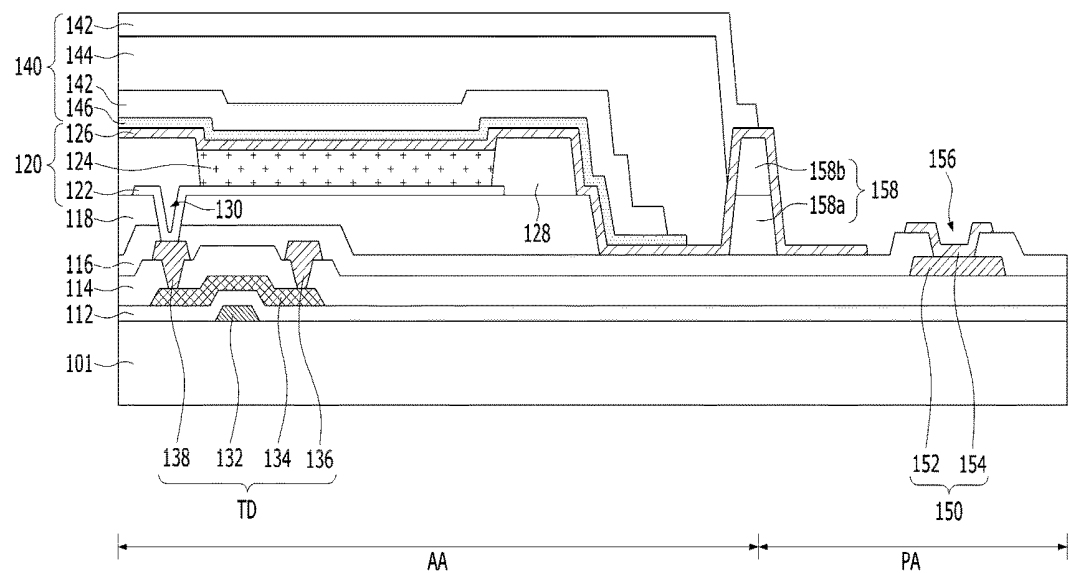


FIG. 3A

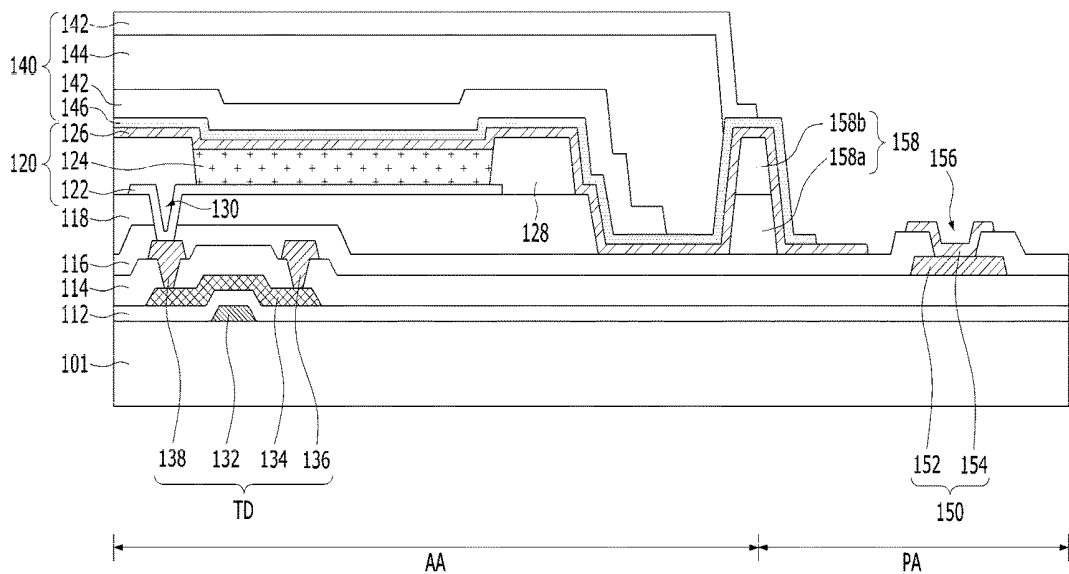


FIG. 3B

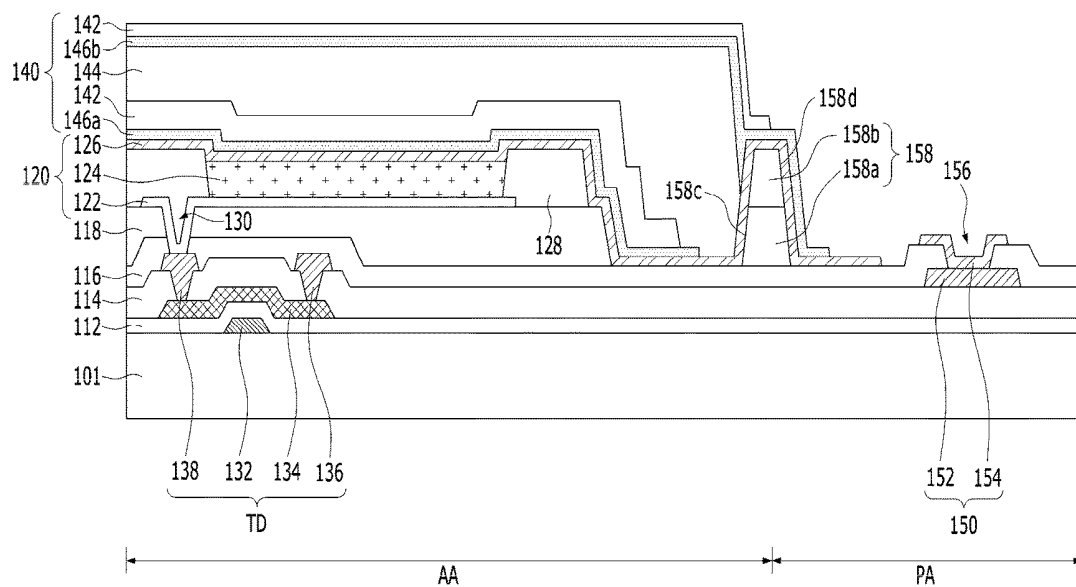


FIG. 4A

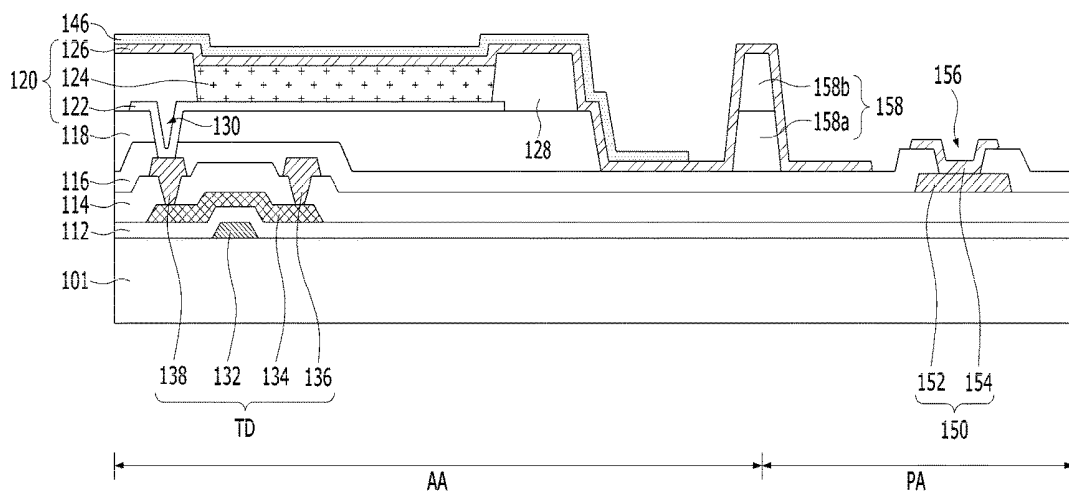


FIG. 4B


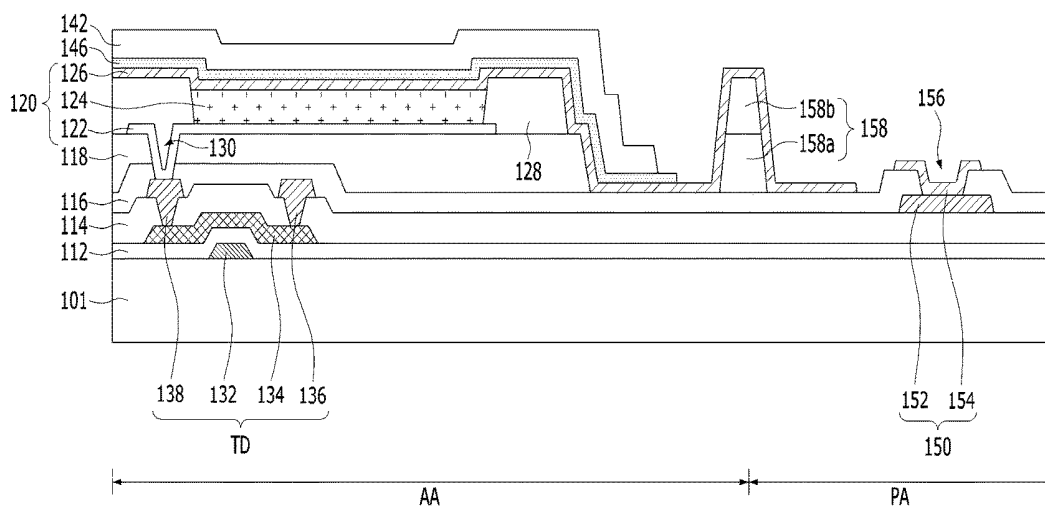


FIG. 4C

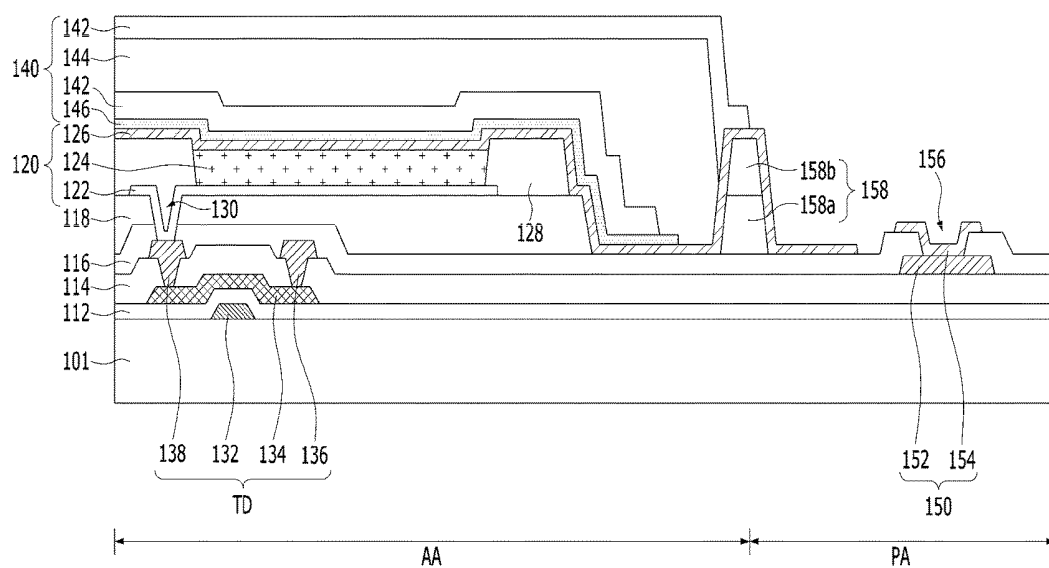

ENCAPSULATION UNIT AND ORGANIC LIGHT EMITTING DISPLAY DEVICE INCLUDING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from and the benefit of Korean Patent Application No. P2016-0161514, filed on Nov. 30, 2016, which is hereby incorporated by reference as if fully set forth herein.

BACKGROUND

Technical Field

[0002] The present disclosure relates to an encapsulation unit and an organic light emitting display device including the same, and more particularly, to an encapsulation unit which prevents deterioration of thin film transistors so as to improve reliability and an organic light emitting display device including the same.

Description of the Related Art

[0003] In a flat panel display device, thin film transistors (TFTs) are used as switching elements and/or driving elements. Thin film transistors include thin film transistors using amorphous silicon, thin film transistors using polycrystalline silicon, and thin film transistors using an oxide semiconductor according to materials used as an active layer. Among all those, thin film transistors using an oxide semiconductor have higher mobility than thin film transistors using amorphous silicon, remarkably lower leakage current than thin film transistors using amorphous silicon and thin film transistors using polycrystalline silicon, and relatively high reliability. Further, thin film transistors using an oxide semiconductor are advantageous in that threshold voltage (V_{th}) distribution is uniform, as compared to thin film transistors using polycrystalline silicon.

[0004] A plurality of inorganic films is formed on such thin film transistors using an oxide semiconductor. If these inorganic films are grown through a PECVD process, a hydrogen content in the inorganic films is about 15 to 30%. When hydrogen contained in the inorganic films is diffused into an active layer of the thin film transistor, diffused hydrogen reacts with oxygen contained in the oxide semiconductor and, thus, characteristics (for example, threshold voltage, etc.) of the thin film transistor are changed and reliability of the thin film transistor may be lowered.

BRIEF SUMMARY

[0005] Accordingly, the present disclosure is directed to an encapsulation unit and an organic light emitting display device including the same that, among others, substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0006] An object of the present disclosure is to provide an encapsulation unit which prevents deterioration of thin film transistors so as to improve reliability and an organic light emitting display device including the same.

[0007] Additional advantages, objects, and features of the disclosure will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the disclosure. The

objectives and other advantages of the disclosure may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0008] To achieve these objects and other advantages and in accordance with the purpose of the disclosure, as embodied and broadly described herein, an organic light emitting display device includes light emitting elements disposed on a substrate, and an encapsulation unit disposed on each of the light emitting elements, wherein the encapsulation unit includes a plurality of inorganic encapsulation films, at least one organic encapsulation film disposed between the inorganic encapsulation films, and at least one transparent oxide film disposed under at least one of the inorganic encapsulation films.

[0009] In another aspect of the present disclosure, an encapsulation unit includes a plurality of inorganic encapsulation films, at least one organic encapsulation film disposed between the inorganic encapsulation films, and at least one transparent oxide film disposed under at least one of the inorganic encapsulation films.

[0010] It is to be understood that both the foregoing general description and the following detailed description of the present disclosure are examples and explanatory and are intended to provide further explanation of the disclosure as claimed.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0011] The accompanying drawings, which are included to provide a further understanding of the disclosure and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the disclosure and together with the description serve to explain the principle of the disclosure. In the drawings:

[0012] FIG. 1 is a plan view of an organic light emitting display device in accordance with the present disclosure;

[0013] FIG. 2 is a cross-sectional view of the organic light emitting display device shown in FIG. 1;

[0014] FIGS. 3A and 3B are cross-sectional views of encapsulation units in accordance with various embodiments as shown in FIG. 2; and

[0015] FIGS. 4A to 4C are cross-sectional views illustrating a method of manufacturing the organic light emitting display device shown in FIG. 2.

DETAILED DESCRIPTION

[0016] Reference will now be made in detail to the preferred embodiments of the present disclosure, examples of which are illustrated in the accompanying drawings.

[0017] FIG. 1 is a plan view of an organic light emitting display device in accordance with the present disclosure and FIG. 2 is a cross-sectional view of the organic light emitting display device shown in FIG. 1.

[0018] The organic light emitting display device shown in FIGS. 1 and 2 is provided with a pixel array area (referred to herein as "array area") AA and a pad area PA.

[0019] In the pad area PA, a plurality of pads 150 to respectively supply driving signals to scan lines SL, data lines DL, a high voltage (VDD) supply line and a low voltage (VSS) supply line located in the array area AA is formed. The pads 150 are exposed by an encapsulation unit

140 formed to cover the array area AA. Each of the pads **150** includes a pad electrode **152** and a pad cover electrode **154**.

[0020] The pad electrode **152** is formed of the same material as at least one of a gate electrode **132** and a source electrode **136**. The pad electrodes **152** of the pads **150** are connected to signal lines including the scan lines SL, the data lines DL, the high voltage (VDD) supply line and the low voltage (VSS) supply line located in the array area AA.

[0021] The pad cover electrode **154** is conductively connected to the pad electrode **152** exposed through a pad contact hole **156** formed through a protective film **116**. Further, the pad cover electrode **154** is exposed to the outside and contacts a circuit transfer film connected to a driving circuit. Here, the pad cover electrode **154** is formed of a metal having high corrosion resistance and high acid resistance, on the protective film **116** and may thus be prevented from being corroded by external moisture even if it is exposed to the outside. For example, the pad cover electrode **154** is formed of the same material as one of an anode **122** and a cathode **126**, on the protective film **116**. That is, the pad cover electrode **154** is formed of a transparent conductive film having high corrosion resistance and high acid resistance, such as indium-tin-oxide (ITO) or indium-zinc-oxide (IZO).

[0022] The array area AA displays an image through unit pixels including light emitting elements **120**. The unit pixels include red (R) sub-pixels, green (G) sub-pixels and blue (B) sub-pixels, or include red (R) sub-pixels, green (G) sub-pixels, blue (B) sub-pixels and white (W) sub-pixels. Each sub-pixel generates color light using the light emitting element **120**, or generates color light using the light emitting element **120** emitting white light and a color filter (not shown).

[0023] Each of the sub-pixels includes a pixel driving circuit, and the light emitting element **120** connected to the pixel driving circuit.

[0024] The pixel driving circuit includes a switching thin film transistor TS, a driving thin film transistor TD and a storage capacitor Cst, or further includes a sensing transistor. The configuration of the pixel driving circuit shown in FIG. 1 is just one embodiment and the present disclosure is not limited thereto.

[0025] The switching thin film transistor TS is turned on when a scan pulse is supplied to the scan line, and supplies a data signal supplied to the data line to the storage capacitor Cst and the gate electrode **132** of the driving thin film transistor TD.

[0026] The driving thin film transistor TD controls current I supplied from the high voltage (VDD) supply line to the light emitting element **120** in response to the data signal supplied to the gate electrode **132** of the driving thin film transistor TD, thus adjusting an amount of light emitted from the light emitting element **120**. Further, even if the switching thin film transistor TS is turned off, the driving thin film transistor TD supplies constant current I due to voltage charged in the storage capacitor Cst until a data signal of a next frame is supplied, and thus maintains emission of light from the light emitting element **120**.

[0027] The driving thin film transistor TD includes the gate electrode **132**, an active layer **134**, the source electrode **136** and a drain electrode **138**.

[0028] The gate electrode **132** is formed on a substrate **101** and overlaps the active layer **134** with a gate insulating film **112** interposed therebetween. The gate electrode **132** may

have a single layer structure including one selected from the group of molybdenum (Mo), aluminum (Al), chrome (Cr), gold (Au), titanium (Ti), nickel (Ni), neodymium (Nd) and copper (Cu) or an alloy thereof or have a multilayer structure including the same, but the present disclosure is not limited thereto.

[0029] The active layer **134** is formed on the gate insulating film **112** so as to overlap the gate electrode **132**, thus forming a channel between the source and drain electrodes **136** and **138**. The active layer **134** is formed of an oxide semiconductor including at least one metal selected from the group consisting of Zn, Cd, Ga, In, Sn, Hf and Zr, or is formed of polycrystalline silicon or amorphous silicon.

[0030] The source and drain electrodes **136** and **138** are formed so as to be opposite each other across the channel **134** of the active layer **134**. The source and drain electrodes **136** and **138** are formed on an interlayer insulating film **114** so as to have a single layer structure or a multilayer structure including one selected from the group of molybdenum (Mo), aluminum (Al), chrome (Cr), gold (Au), titanium (Ti), nickel (Ni), neodymium (Nd) and copper (Cu) or an alloy thereof, but the present disclosure is not limited thereto. The interlayer insulating film **114** to cover the active layer **134** exposed between the source and drain electrodes **136** and **138** is formed on the gate insulating film **112**, and the interlayer insulating film **114** protects the active layer **134** from oxygen, moisture, etc. and thus prevents damage to the active layer **134**. Instead of the interlayer insulating film **114** formed on the gate insulating film **112**, an etch stopper to cover only a region of the active layer **134** exposed between the source and drain electrodes **136** and **138** may be provided.

[0031] The light emitting element **120** includes the anode **122**, at least one light emitting stack **124** formed on the anode **122**, and the cathode **126** formed on the light emitting stack **124**. If the anode **122** is a transmissive electrode and the cathode **126** is a reflective electrode, the organic light emitting display device is a rear emission type light emitting structure in which light is emitted from the rear surface of the substrate **101**. If the anode **122** is a reflective electrode and the cathode **126** is a transmissive electrode, the organic light emitting display device is a front emission type light emitting structure in which light is emitted from the front surface of an encapsulation unit **140**. In the present disclosure, the anode **122** formed as a reflective electrode and the cathode **126** formed as a transmissive electrode will be described as an illustrative example.

[0032] The anode **122** is conductively connected to the drain electrode **138** of the driving thin film transistor TD exposed through a pixel contact hole **130** formed through the protective film **116** and a planarization film **118**. If the anode **122** is applied to a front emission type light emitting structure, the anode **122** is formed to have a multilayer structure in which an opaque conductive film and a transparent conductive film formed of indium-tin-oxide (ITO) or indium-zinc-oxide (IZO) are stacked. The light emitting stack **124** is formed on the anode **122** in an emission area defined by a bank **128**. The at least one light emitting stack **124** is formed by stacking a hole related layer, an organic light emitting layer and an electron related layer on the anode **122** in regular order or in reverse order. For example, the light emitting stack **124** may include first and second light emitting stacks disposed opposite each other with a charge generation layer interposed therebetween. In this

case, an organic light emitting layer of one of the first and second light emitting stacks generates blue light, and an organic light emitting layer of the other of the first and second light emitting stacks generates yellowish green light, thus producing white light through the first and second light emitting stacks. The cathode 126 is formed to be opposite the anode 122 with the light emitting stack 124 interposed therebetween. If the cathode 126 is applied to a front emission type organic light emitting display device, the cathode 126 is formed of a metal, an inorganic material, a metal mixed layer or a mixture thereof. Here, the metal forming the cathode 126 may be Ag, Mg, Yb, Li or Ca, the inorganic material may be Li_2O , CaO , LiF or MgF_2 , and they assist movement of electrons so as to supply a large amount of electrons to the light emitting stack 124. For example, the cathode 126 is formed of MgAg .

[0033] The encapsulation unit 140 prevents external moisture or oxygen from permeating into the light emitting element 120, which is vulnerable to external moisture or oxygen. For this purpose, the encapsulation unit 140 includes at least one transparent oxide film 146, at least two inorganic encapsulation films 142, and at least one organic encapsulation film 144. In an embodiment, one inorganic encapsulation film 142 is disposed as the uppermost layer of the encapsulation unit 140, and the transparent oxide film 146 is disposed as the lowermost layer of the encapsulation unit 140. In the present disclosure, the encapsulation unit 140 having a structure in which a transparent oxide film 146, an inorganic encapsulation film 142, an organic encapsulation film 144 and an inorganic encapsulation film 142 are sequentially stacked will be described as an illustrative example.

[0034] The at least one organic encapsulation film 144 is disposed between the inorganic encapsulation films 142. The organic encapsulation film 144 is formed of an organic insulating material, such as an acrylic resin, an epoxy resin, polyimide, polyethylene or silicon oxycarbide (SiOC). The organic encapsulation film 144 formed of an organic insulating material serves a buffer to relieve stress between respective layers due to bending of the organic light emitting display device, and reinforces planarization performance of the organic light emitting display device. The organic encapsulation film 144 is formed to have a smaller line width than the organic encapsulation film 142 located on the organic encapsulation film 144. Therefore, the upper and side surfaces of the organic encapsulation film 144 are encapsulated by the inorganic encapsulation film 142.

[0035] If the organic encapsulation film 144 is formed through an ink jet method, at least one dam 158 forming the boundary with the organic encapsulation film 144 is formed between the pad area PA and the array area AA. The dam 158 prevents the organic encapsulation film 144 in a liquid phase from invading the pad area PA, when the organic encapsulation film 144 in the liquid phase is dropped onto the array area AA. The dam 158 is formed of the same material as at least one of the planarization layer 118, the bank 128 and a diaphragm (not shown) simultaneously with the at least one of the planarization layer 118, the bank 128 and the diaphragm so as to have a single layer structure or a multilayer structure. For example, the dam 158 includes a first dam layer 158a formed of the same material as the planarization layer 118 simultaneously with the planarization layer 118, and a second dam layer 158b formed of the same material as the bank 128 simultaneously with the bank 128, thus omit-

ting an additional mask process for formation of the dam 158 and preventing increase in costs.

[0036] The inorganic encapsulation films 142 minimize or prevent permeation of moisture and gases (hydrogen and/or oxygen) into the thin film transistors TS and TD and the organic light emitting element 120. The inorganic encapsulation films 142 are formed to cover the upper and side surfaces of the organic encapsulation film 144 disposed thereunder. These inorganic encapsulation films 142 are formed to have a single layer structure or a multilayer structure including an inorganic insulating material which may be deposited at a low temperature, such as silicon nitride (SiN_x), silicon oxide (SiO_x), silicon oxy-nitride (SiON) or aluminum oxide (Al_2O_3). Since the inorganic encapsulation films 142 are deposited at a low temperature, it is possible to prevent the light emitting stack 124, which is vulnerable to high temperature, from being damaged during the deposition process of the inorganic encapsulation films 142.

[0037] The transparent oxide film 146 is disposed under at least one of the inorganic encapsulation films 142. Oxygen contained in the transparent oxide film 146 combines with hydrogen introduced when the inorganic encapsulation films 142 are formed, and thus prevents hydrogen from diffusing into the active layer 134. Therefore, the transparent oxide film 146 may be disposed under the lowermost inorganic encapsulation film 142 out of the inorganic encapsulation films 142. That is, the transparent oxide film 146 may be disposed between the lowermost inorganic encapsulation film 142 which is closest to the light emitting element 120, and the cathode 126.

[0038] Although FIG. 2 shows that the transparent oxide film 146 is disposed under the lower inorganic encapsulation films 142 and is disposed as the lowermost layer of the encapsulation unit 140, the disclosure is not limited to this embodiment. It is possible that the transparent oxide film is disposed under the upper inorganic encapsulation films 142, which is also included in the disclosure.

[0039] The transparent oxide film 146 is formed of a transparent material, which transmits light emitted from the light emitting element 120 and includes oxygen combining with hydrogen. For example, the transparent oxide film 146 is formed to have a single layer structure or a multilayer structure using the same material as the active layer 134, i.e., at least one of IGZO, IZO, ITO and ZnO.

[0040] In this example, in the transparent oxide film 146, an oxygen rate is set to be equal to or higher than a metal rate. For example, a ratio of oxygen to metal in the transparent oxide film 146 is 1:1 or more. Due to the transparent oxide film 146 in which an oxygen rate is higher than a metal rate, transmissivity of light emitted from the light emitting element 120 is increased and a combination rate of hydrogen, introduced when the inorganic encapsulation films 142 are formed, with oxygen is increased.

[0041] When oxygen in the transparent oxide film 146 combines with hydrogen and thus the oxygen rate in the transparent oxide film 146 is decreased, the transparent oxide film 146 may become conductive. The conductive transparent oxide film 146 is conductively connected to the cathode 126 and thus conductivity of the cathode 126 is increased.

[0042] Further, the transparent oxide film 146 is formed to have a thickness of 10-5,000 Å, and may be formed to have a thickness of 400-600 Å in consideration of transmissivity

and deposition time. Here, if the thickness of the transparent oxide film 146 exceeds 5,000 Å, the increased thickness of the transparent oxide film 146 lowers transmissivity of light emitted from the light emitting element 120 and increases a deposition time and, thus, process efficiency is lowered. Further, if the thickness of the transparent oxide film 146 is less than 10 Å, the content of oxygen contained in the transparent oxide film 146 is lower than the content of hydrogen introduced when the inorganic encapsulation films 142 are formed and, thus, the transparent oxide film 146 does not remove hydrogen permeating into the active layer 134.

[0043] The transparent oxide film 146 is disposed under the lowermost inorganic encapsulation film 142 of the inorganic encapsulation films 142, as shown as an example in S2 and 3A, or is disposed under each of the inorganic encapsulation films 142, as shown as an example in FIG. 3B.

[0044] The transparent oxide film 146 shown in FIG. 2 is disposed to have a greater area than the lowermost inorganic encapsulation film 142 in the array area AA. Since the end of the transparent oxide film 146 protrudes toward the side surface of the dam 158 further or more than the end of the lowermost inorganic encapsulation film 142, a part of the transparent oxide film 146 is exposed by the lowermost inorganic encapsulation film 142. Oxygen contained in the part of the transparent oxide film 146 exposed by the lowermost inorganic encapsulation film 142 combines with hydrogen introduced from the outside. Therefore, the transparent oxide film 146 may prevent not only hydrogen introduced when the inorganic encapsulation films 142 are formed but also hydrogen introduced from the outside from diffusing into the active layer 134.

[0045] The transparent oxide film 146 shown in FIG. 3A is disposed not only in the array area AA but also in a part of the pad area PA so as to cover both side surfaces and the upper surface of the dam 158. The transparent oxide film 146 is formed to have a greater area than the uppermost inorganic encapsulation film 142 which is farthest from the light emitting element 120, out of the inorganic encapsulation films 142. Since the end of the transparent oxide film 146 protrudes toward the pads 150 further or more than the end of the uppermost inorganic encapsulation film 142, a part of the transparent oxide film 146 is exposed by the uppermost inorganic encapsulation film 142. Oxygen contained in the part of the transparent oxide film 146 exposed by the uppermost inorganic encapsulation film 142 combines with hydrogen introduced from the outside. Therefore, the transparent oxide film 146 may prevent not only hydrogen introduced when the inorganic encapsulation films 142 are formed but also hydrogen introduced from the outside from diffusing into the active layer 134.

[0046] The transparent oxide film 146 shown in FIG. 3B includes a first transparent oxide film 146a contacting the cathode 126, and a second transparent oxide film 146b contacting the organic encapsulation film 144 so as to be disposed above the first transparent oxide film 146a.

[0047] Since the end of the first transparent oxide film 146a protrudes toward the side surface of the dam 158 in the array area AA further or more than the end of the lowermost inorganic encapsulation film 142, a part of the first transparent oxide film 146a is exposed by the lowermost inorganic encapsulation film 142. The second transparent oxide film 146b is disposed not only in the array area AA but also in a part of the pad area PA so as to cover the outer side

surface 158d of dam 158. In an embodiment as shown in FIG. 2, second transparent oxide film 146b covers both side surfaces of the dam 158. Specifically, as shown in FIG. 2, second transparent oxide film 146b covers partially, the upper portion, of inner side surface 158c and covers fully the outer side surface 158d. The inner side surface 158c and outer side surface 158d are defined with respect to pad 156, 154. Namely, the outer side surface 158d is closer to pad 156, 154 than inner side surface 158c. It should be appreciated that it is not necessary that the second transparent oxide film 146b covers both side surfaces 158c and 158d of dam 158. It is possible that the second transparent oxide film 146b covers 158d without covering side surface 158c of dam 158, which is included in the disclosure. Since the end of the second transparent oxide film 146b protrudes toward the pads 150 further or more than the end of the uppermost inorganic encapsulation film 142, a part of the transparent oxide film 146b is exposed by the uppermost inorganic encapsulation film 142. Although FIG. 3B illustrates the first and second transparent oxide films 146a and 146b as not contacting each other, the first transparent oxide film 146a may be formed to cover both side surfaces of the dam 158 and thus the first and second transparent oxide films 146a and 146b may contact each other.

[0048] Beyond the examples shown herein, in FIGS. 2, 3A and 3B, other variants with respect to the relative positions of transparent oxide film 146 and inorganic encapsulation films 142 are also possible and included in the disclosure. For example, there may be multiple transparent oxide films 146 and multiple inorganic encapsulation films 142. Each of the multiple transparent oxide films 146 is disposed under a corresponding different one of the inorganic encapsulation films 142. Between a transparent oxide film 146 and the corresponding inorganic encapsulation film 142, there is no other transparent oxide film 142 and/or other inorganic encapsulation film 142. There might be some inorganic encapsulation film 142 that does not have a corresponding transparent oxide film 146 disposed therebelow.

[0049] Further each of the multiple transparent oxide film 146 may extend outward, with respect to the array area AA, beyond the corresponding one of the multiple inorganic encapsulation film 142. And, each of the multiple transparent oxide films 146 may cover an area larger than the corresponding one of the multiple inorganic encapsulation films.

[0050] As such, oxygen contained in the first and second transparent oxide films 146a and 146b exposed by the inorganic encapsulation films 142 combines with hydrogen introduced from the outside. Therefore, the first and second transparent oxide films 146a and 146b may prevent not only hydrogen introduced when the inorganic encapsulation films 142 are formed but also hydrogen introduced from the outside from diffusing into the active layer 134.

[0051] Hereinafter, test results of threshold voltage characteristics of a thin film transistor provided with no transparent oxide film 146 in accordance with a comparative example and a thin film transistor provided with a transparent oxide film 146 in accordance with a test example will be described as an illustrative example.

[0052] In the thin film transistor provided with no transparent oxide film 146 in accordance with the comparative example, threshold voltage is shifted by 5.1-7.3V from an initial state thereof due to hydrogen introduced when the inorganic encapsulation films 142 are formed. On the other

hand, in the thin film transistor provided with the transparent oxide film **146** in accordance with the test example, the transparent oxide film **146** blocks hydrogen introduced when the inorganic encapsulation films **142** are formed and thus threshold voltage is shifted only by 0-1.25V. As such, as compared to the thin film transistor of the comparative example, in the thin film transistor of the test example of the present disclosure, change in threshold voltage of the thin film transistor in the positive direction is minimized. Therefore, in the thin film transistor of the test example of the present disclosure, Positive Bias Temperature illumination Stress (PBTIS) characteristics may be improved, as compared to the thin film transistor of the comparative example.

[0053] FIGS. **4A** to **4C** are cross-sectional views illustrating a method of manufacturing the organic light emitting display device shown in FIG. **2**.

[0054] First, as shown in FIG. **4A**, as an example, thin film transistors **TS** and **TD** having an active layer **134**, a light emitting element **120**, a dam **158** and pads **150** are formed on a substrate **101** through a plurality of mask processes. Thereafter, a transparent oxide film **146** is formed on the substrate **101** provided with the light emitting element **120** through a deposition method, such as sputtering. Here, the transparent oxide film **146** is formed of IGZO, IZO, ITO or ZnO. As shown in FIG. **4B**, an inorganic encapsulation film **142** is formed on the substrate **101** provided with the transparent oxide film **146** through a deposition method, such as Chemical Vapor Deposition (CVD), Low Pressure Chemical Vapor Deposition (LPCVD) or Plasma Enhanced Chemical Vapor Deposition (PECVD). Here, the inorganic encapsulation film **142** is formed of SiO_x, SiN_x or SiON. Thereafter, as shown in FIG. **4C**, an organic encapsulation film **144** is formed by coating the substrate **101** provided with the inorganic encapsulation film **142** with an organic insulating material. Here, the organic encapsulation film **144** is formed of an organic insulating material, such as an acrylic resin, an epoxy resin, polyimide, polyethylene or silicon oxycarbide (SiOC). Thereafter, another inorganic encapsulation film **142** is formed on the substrate **101** provided with the organic encapsulation film **144** through the above-described deposition, thus forming an encapsulation unit **140** having a multilayer structures. Thereafter, a protective film (not shown) is attached to the upper and side surfaces of the encapsulation unit **140** by an adhesive layer.

[0055] Although the organic light emitting display device including pixel driving circuits, each of which includes a switching thin film transistor **TS** and a driving thin film transistor **TD**, is described as an example, each of the pixel driving circuits of the organic light emitting display device in accordance with the present disclosure may further include a sensing transistor to sense threshold voltage of the driving thin film transistor **TD**.

[0056] As apparent from the above description, an organic light emitting display device in accordance with the present disclosure includes a transparent oxide film disposed between a cathode of a light emitting element and the lowermost inorganic encapsulation film closest to the light emitting element out of inorganic encapsulation films of an encapsulation unit. Therefore, oxygen in the transparent oxide film combines with hydrogen introduced when the inorganic encapsulation films are formed and thus hydrogen is prevented from permeating into thin film transistors,

thereby preventing deterioration of the thin film transistors and improving reliability of the organic light emitting display device.

[0057] It will be apparent to those skilled in the art that various modifications and variations can be made in the present disclosure without departing from the spirit or scope of the disclosure. Thus, it is intended that the present disclosure cover the modifications and variations of this disclosure provided they come within the scope of the appended claims and their equivalents.

[0058] The various embodiments described above can be combined to provide further embodiments. All of the U.S. patents, U.S. patent application publications, U.S.

[0059] patent applications, foreign patents, foreign patent applications and non-patent publications referred to in this specification and/or listed in the Application Data Sheet are incorporated herein by reference, in their entirety. Aspects of the embodiments can be modified, if necessary to employ concepts of the various patents, applications and publications to provide yet further embodiments.

[0060] These and other changes can be made to the embodiments in light of the above-detailed description. In general, in the following claims, the terms used should not be construed to limit the claims to the specific embodiments disclosed in the specification and the claims, but should be construed to include all possible embodiments along with the full scope of equivalents to which such claims are entitled. Accordingly, the claims are not limited by the disclosure.

1. An organic light emitting display device comprising:
 - light emitting elements disposed on an array area of a substrate; and
 - an encapsulation unit disposed on each of the light emitting elements, the encapsulation unit including:
 - a plurality of inorganic encapsulation films;
 - at least one organic encapsulation film disposed between the inorganic encapsulation films; and
 - at least one transparent oxide film disposed under at least one of the inorganic encapsulation films.
2. The organic light emitting display device according to claim 1, wherein the at least one transparent oxide film is disposed between a cathode of each of the light emitting elements and a lowermost inorganic encapsulation film that is closest to the cathode, out of the inorganic encapsulation films.
3. The organic light emitting display device according to claim 1, wherein the at least one transparent oxide film includes multiple transparent oxide films each disposed under a corresponding different one of the inorganic encapsulation films.
4. The organic light emitting display device according to claim 1, further comprising:
 - a dam forming a boundary of the at least one organic encapsulation film,
 - wherein the at least one transparent oxide film protrudes toward the dam further than the lowermost inorganic encapsulation film that is closest to the light emitting element, out of the inorganic encapsulation films.
5. The organic light emitting display device according to claim 1, further comprising:
 - a pad disposed in a pad area of the substrate,
 - wherein the at least one transparent oxide film includes one transparent oxide film that protrudes toward the pad further than an uppermost inorganic encapsulation

film that is farthest from the light emitting element, out of the inorganic encapsulation films.

6. The organic light emitting display device according to claim 5, further comprising:

a dam forming a boundary of the at least one organic encapsulation film,

wherein the at least one transparent oxide film is disposed to cover the upper surface and an outer side surface of the dam with respect to the pad.

7. The organic light emitting display device according to claim 1, further comprising:

a dam forming a boundary of the at least one organic encapsulation film; and

a pad disposed in a pad area of the substrate,

wherein the at least one transparent oxide film includes:

a first transparent oxide film protruding toward the dam further than a lowermost inorganic encapsulation film that is closest to the light emitting element, out of the inorganic encapsulation films, within the array area of substrate; and

a second transparent oxide film disposed on the first transparent oxide film and protruding toward the pad further than an uppermost inorganic encapsulation film that is farthest from the light emitting element, out of the inorganic encapsulation films.

8. The organic light emitting display device according to claim 1, wherein the at least one transparent oxide film contacts a cathode of each of the light emitting elements.

9. The organic light emitting display device according to claim 1, further comprising:

a thin film transistor connected to each of the light emitting elements,

wherein the at least one transparent oxide film is composed of a same material as an active layer of the thin film transistor.

10. The organic light emitting display device according to claim 1, wherein the at least one transparent oxide film is formed of at least one of IGZO, IZO, ITO or ZnO.

11. The organic light emitting display device according to claim 1, wherein:

the at least one transparent oxide film includes metal elements and oxygen elements with an oxygen to metal ratio greater than 1:1.

12. The organic light emitting display device according to claim 1, wherein the at least one transparent oxide film each has a thickness of 10 Å-5,000 Å.

13. An encapsulation unit comprising:

a plurality of inorganic encapsulation films;

at least one organic encapsulation film disposed between the inorganic encapsulation films; and

at least one transparent oxide film disposed under at least one of the inorganic encapsulation films.

14. The encapsulation unit according to claim 13, wherein the at least one transparent oxide film is disposed under a lowermost inorganic encapsulation film of the inorganic encapsulation films.

15. The encapsulation unit according to claim 13, wherein the at least one transparent oxide film includes multiple transparent oxide films each disposed under a corresponding different one of each of the inorganic encapsulation films.

16. The encapsulation unit according to claim 13, wherein the at least one transparent oxide film is formed of IGZO, IZO, ITO or ZnO.

17. The encapsulation unit according to any claim 13, wherein:

the at least one transparent oxide film includes metal elements and oxygen elements with an oxygen to metal ratio greater than 1:1.

18. The encapsulation unit according to claim 13, wherein the at least one transparent oxide film has a thickness of 10 Å-5,000 Å.

19. The encapsulation unit according to claim 15, wherein each of the multiple transparent oxide films extends outward beyond the corresponding one of the plurality of inorganic encapsulation films.

20. The encapsulation unit according to claim 15, wherein each of the multiple transparent oxide films covers an area larger than the corresponding one of the plurality of inorganic encapsulation films.

* * * * *

专利名称(译)	封装单元和包括其的有机发光显示装置		
公开(公告)号	US20180151642A1	公开(公告)日	2018-05-31
申请号	US15/815282	申请日	2017-11-16
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	OH JAE YOUNG		
发明人	OH, JAE-YOUNG		
IPC分类号	H01L27/32 H01L23/31 H01L23/29		
CPC分类号	H01L27/3241 H01L23/31 H01L23/291 H01L27/3244 H01L51/5253 H01L51/5256 H01L51/5246		
优先权	1020160161514 2016-11-30 KR		
其他公开文献	US10553658		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种可以防止薄膜晶体管劣化从而提高可靠性的封装单元以及包括该封装单元的有机发光显示装置。至少一个透明氧化物膜设置在设置在发光元件上的多个无机封装膜中的至少一个之下，并且因此所述至少一个透明氧化物膜中的氧与在形成无机封装膜过程中引入的氢结合以防止氢扩散到薄膜晶体管中。

