



US010714550B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 10,714,550 B2**
(45) **Date of Patent:** **Jul. 14, 2020**

(54) **ORGANIC LIGHT-EMITTING DISPLAY APPARATUS HAVING PROTECTED EMISSION LAYER**

(71) Applicant: **SAMSUNG DISPLAY CO., LTD.**,
Yongin-si, Gyeonggi-Do (KR)

(72) Inventors: **Deukjong Kim**, Yongin-si (KR);
Donghyun Lee, Yongin-si (KR);
Sangki Kim, Yongin-si (KR)

(73) Assignee: **SAMSUNG DISPLAY CO., LTD.**,
Yongin-si, Gyeonggi-Do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/404,464**

(22) Filed: **May 6, 2019**

(65) **Prior Publication Data**
US 2019/0259820 A1 Aug. 22, 2019

Related U.S. Application Data
(62) Division of application No. 15/468,991, filed on Mar. 24, 2017, now Pat. No. 10,312,305.

(30) **Foreign Application Priority Data**
Mar. 24, 2016 (KR) 10-2016-0035546

(51) **Int. Cl.**
H01L 27/32 (2006.01)
H01L 51/52 (2006.01)

(52) **U.S. Cl.**
CPC **H01L 27/3246** (2013.01); **H01L 27/3262** (2013.01); **H01L 27/3276** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC H01L 27/3246; H01L 51/5237; H01L 51/5203; H01L 27/3262; H01L 27/3276;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,000,428 B2* 4/2015 Lee H01L 27/3272
257/40
2013/0009162 A1* 1/2013 Kang H01L 27/3246
257/72
(Continued)

FOREIGN PATENT DOCUMENTS

KR 10-2013-0107116 10/2013
KR 10-2014-0133053 11/2014
(Continued)


Primary Examiner — Yasser A Abdelaziez

(74) *Attorney, Agent, or Firm* — F.Chau & Associates, LLC

(57) **ABSTRACT**

An organic light-emitting display apparatus prevents the quality of an image being displayed thereon from being deteriorated as a result of contamination of an organic emission layer. The display apparatus includes a substrate with a display area and a periphery area. A first insulating layer, disposed over the substrate, has a first opening in the periphery area. A first electrode is disposed within the display area, over the first insulating layer. A first bank is disposed over the first insulating layer and has a second opening through which a center of the first electrode is exposed. A second bank is disposed over the first insulating layer and is separated from the first bank. The first opening is disposed between the first bank and the second bank. An intermediate layer is disposed over the first electrode. A second electrode is disposed over the intermediate layer and the first bank.

7 Claims, 7 Drawing Sheets

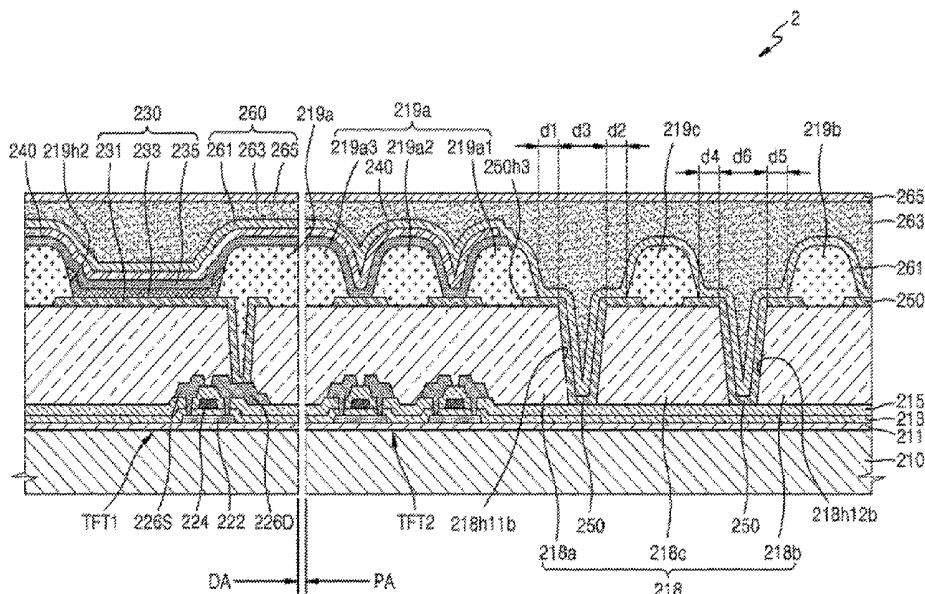

(52) **U.S. Cl.**

CPC *H01L 51/5203* (2013.01); *H01L 51/5237*
(2013.01); *H01L 51/5246* (2013.01); *H01L*
51/5253 (2013.01)

(58) **Field of Classification Search**

CPC H01L 51/5253; H01L 51/5246; H01L
27/3244

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2013/0248826	A1	9/2013	Kim et al.	
2015/0034921	A1	2/2015	Kim	
2015/0041772	A1	2/2015	Han	
2015/0115256	A1	4/2015	You	
2015/0228927	A1 *	8/2015	Kim	 H01L 51/5203 257/40
2016/0013253	A1	1/2016	Lee	
2017/0117502	A1 *	4/2017	Park	 H01L 27/3258
2017/0278912	A1	9/2017	Kim et al.	
2017/0287394	A1	10/2017	Kim et al.	
2017/0345881	A1	11/2017	Kim et al.	

FOREIGN PATENT DOCUMENTS

KR	10-2015-0094950	8/2015
KR	10-2016-0007968	1/2016

* cited by examiner

FIG. 1


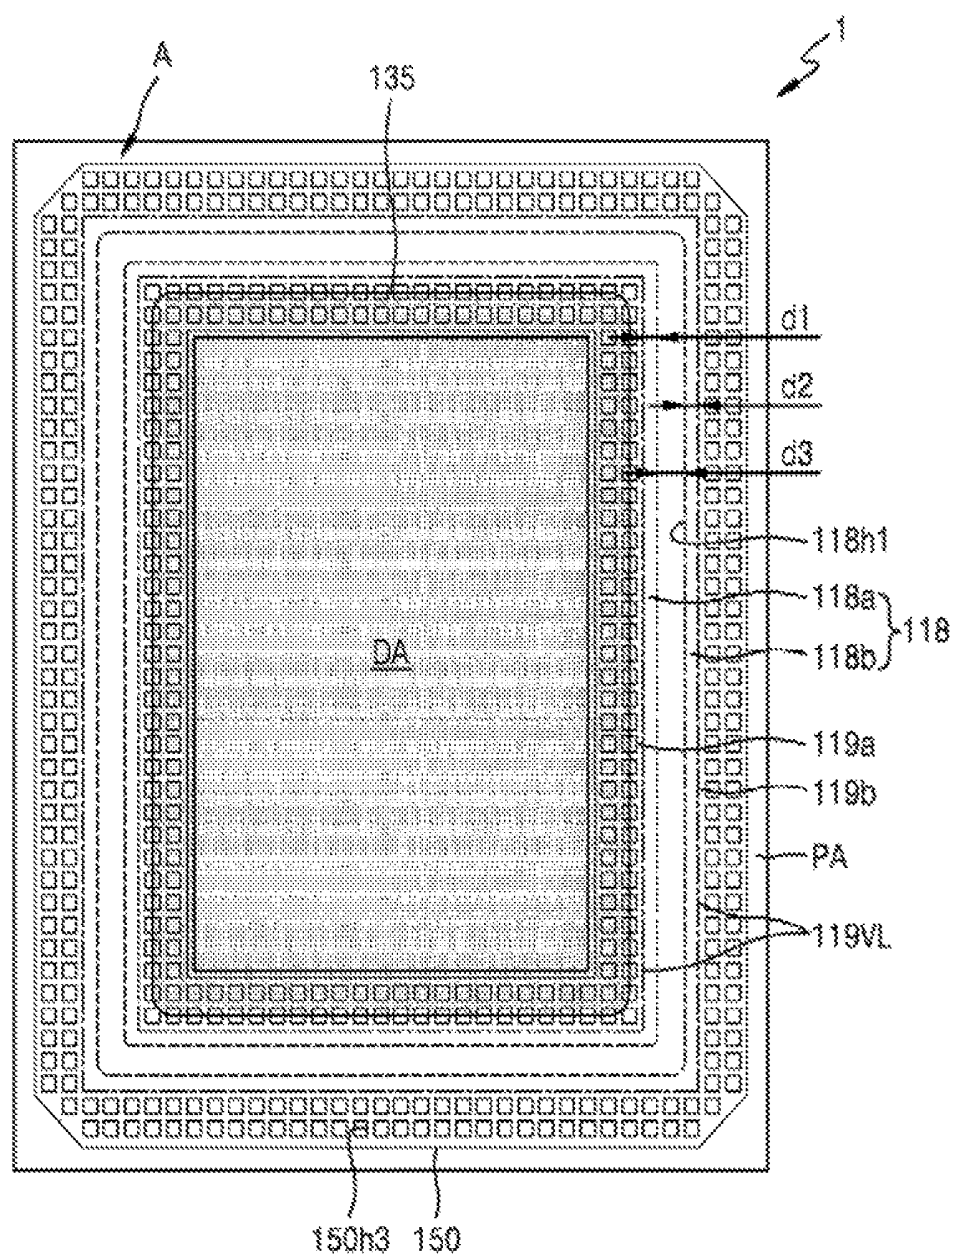


FIG. 2

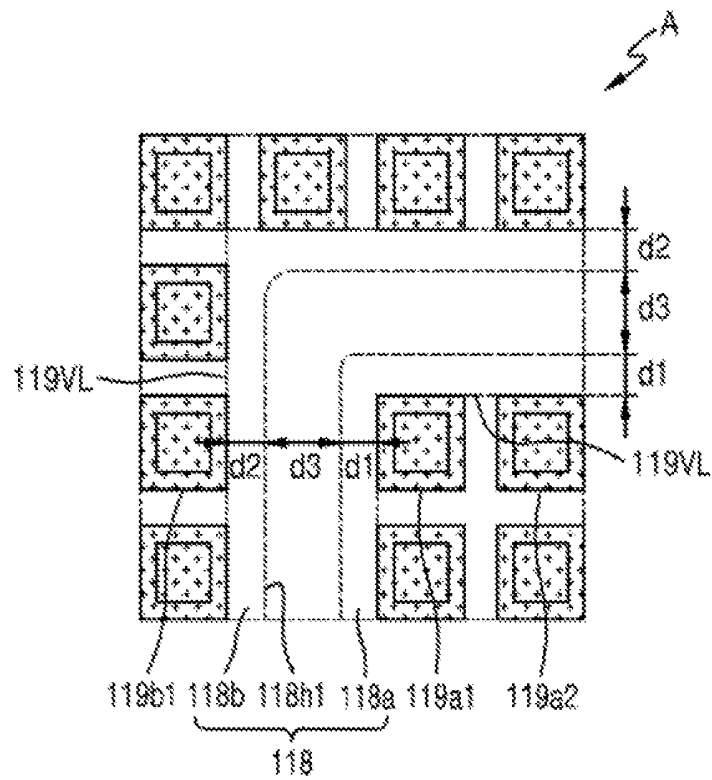

3
G
H
L

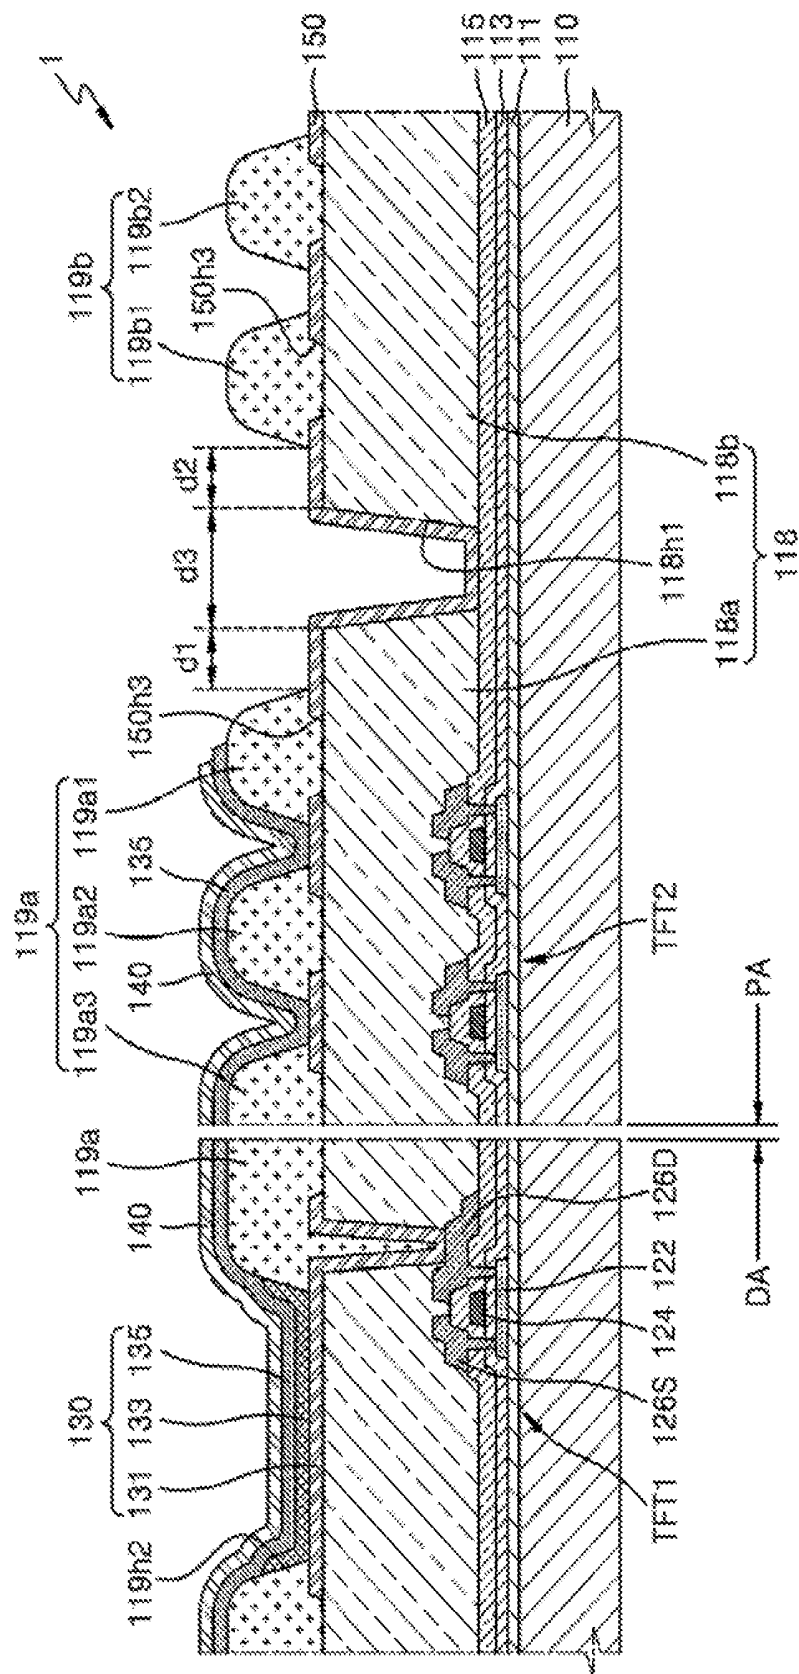


FIG. 4

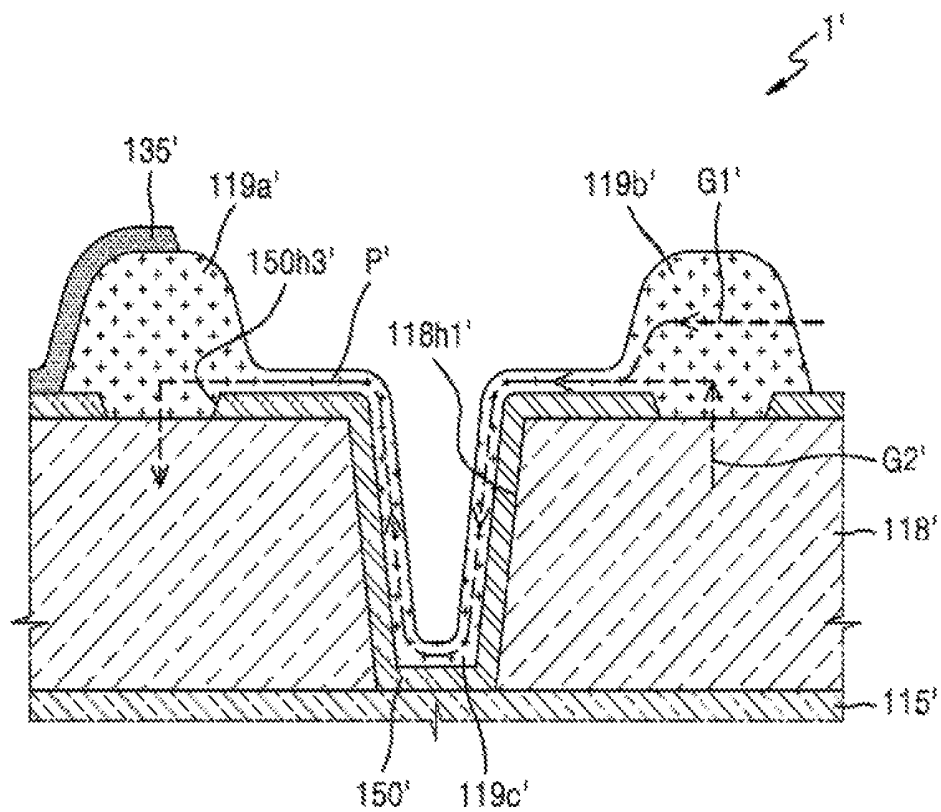


FIG. 5

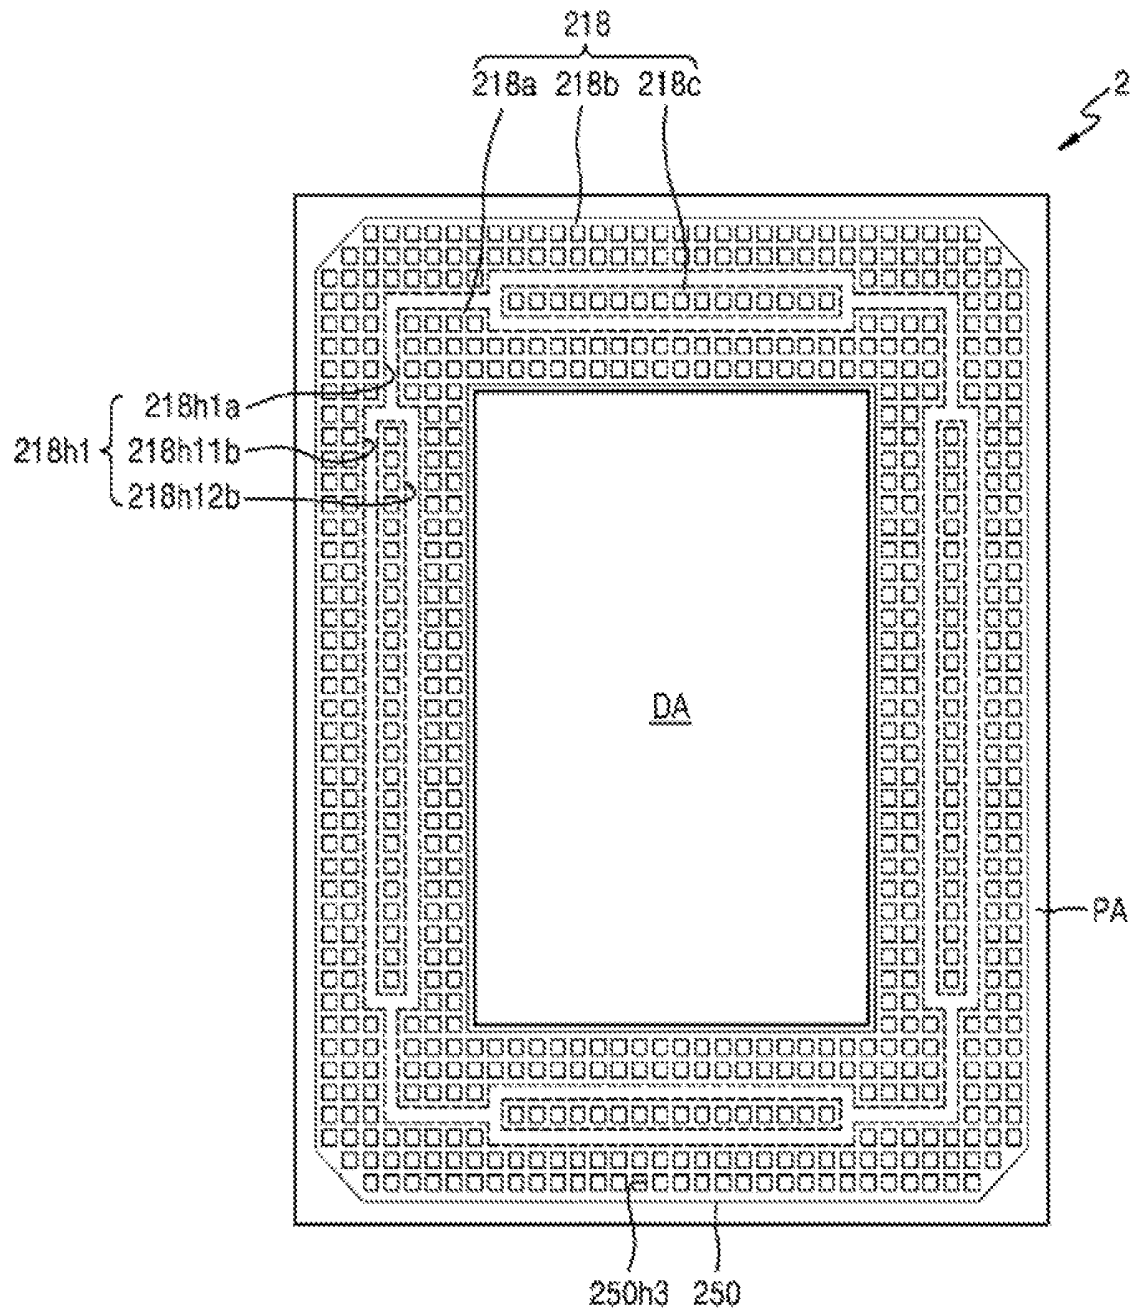


FIG. 6


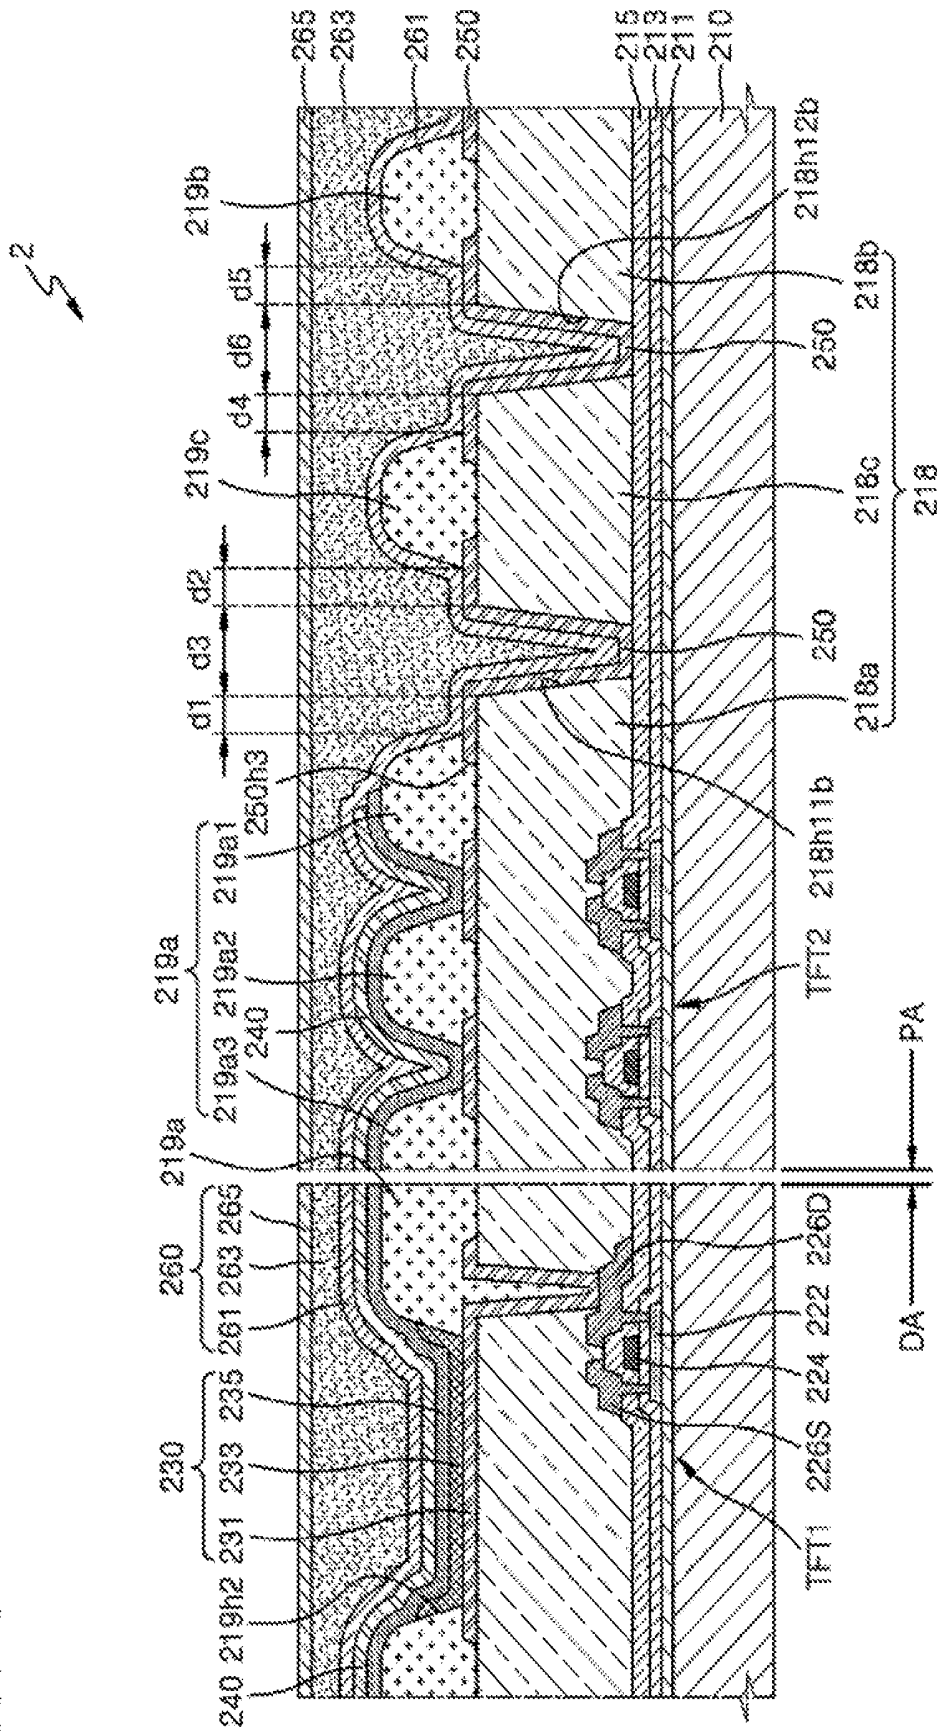


FIG. 7

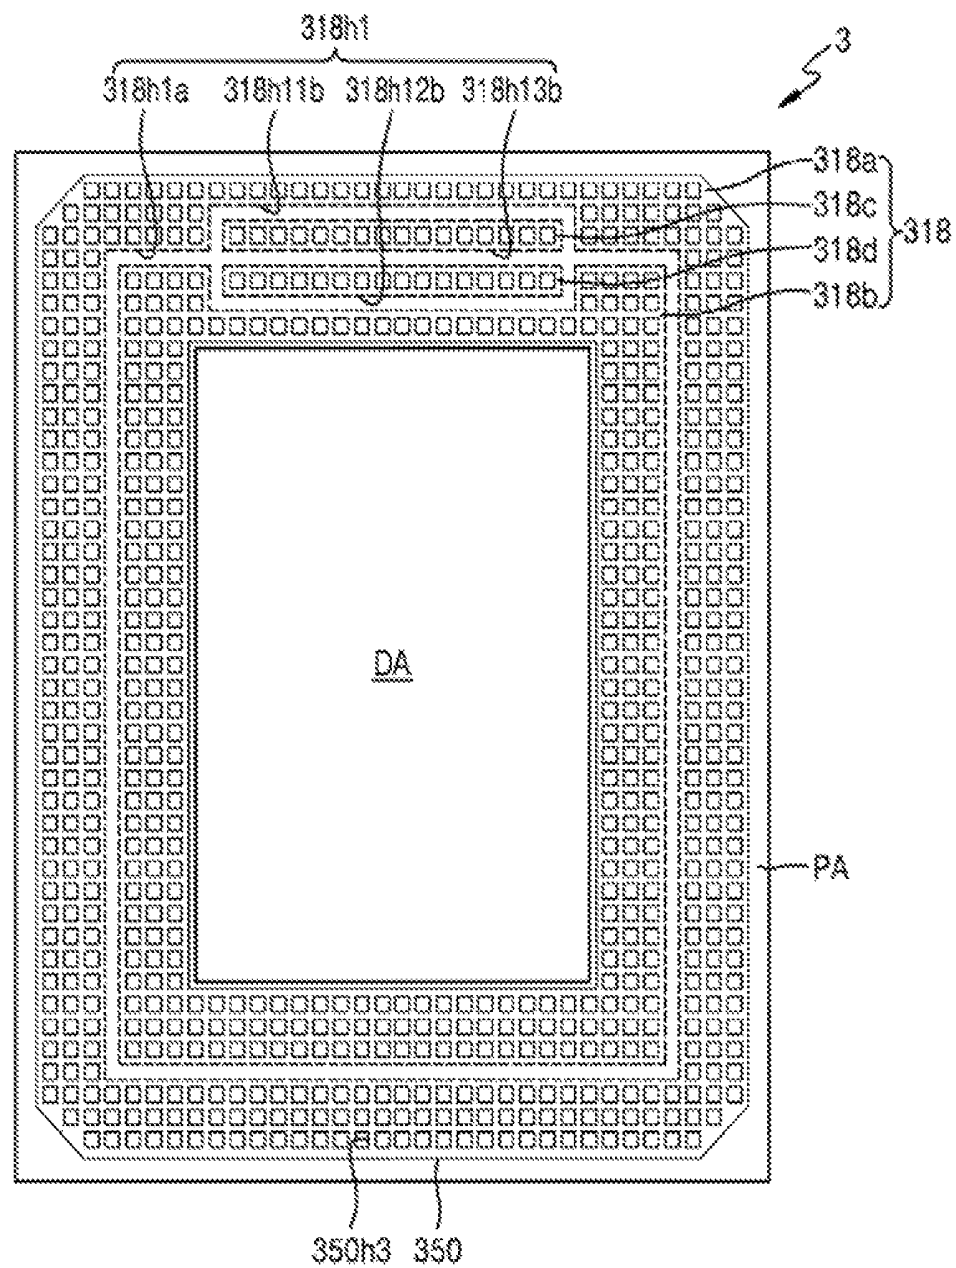

ORGANIC LIGHT-EMITTING DISPLAY APPARATUS HAVING PROTECTED EMISSION LAYER

CROSS-REFERENCE TO RELATED APPLICATION

This application is a Division of co-pending U.S. patent application Ser. No. 15/468,991, filed on Mar. 24, 2017, which claims priority to, and the benefit of Korean Patent Application No. 10-2016-0035546, filed on Mar. 24, 2016, in the Korean intellectual Property Office, the disclosures of which are incorporated by reference herein in their entirety.

TECHNICAL FIELD

One or more embodiments relate to an organic light-emitting display apparatus, and more particularly, to an organic light-emitting display apparatus that may prevent impurities from contaminating an emission layer thereof.

DISCUSSION OF THE RELATED ART

An organic light-emitting display apparatus includes an organic light-emitting device (OLED). An OLED includes a hole injection electrode, an electron injection electrode, and organic emission layer that is disposed between the hole injection electrode and the electron injection electrode. The electron injection electrode delivers electrons to the organic emission layer while the hole injection electrode delivers holes to the organic emission layer. As the holes and electrons combine within the organic emission layer, excitons are formed. As the excited state of the exciton decays, the energy levels of the electrons relax and photons are emitted. In this way, the OLED is capable of producing light and so OLED displays are able to be self-emission display apparatus that do not require the use of a backlight unit in order to display an image.

Because the organic light-emitting display apparatus is self-emissive, it can be driven with a low voltage and can be configured to have a light weight and a small size, as compared to display devices that require the use of backlights. Also, because the organic light-emitting display apparatus has a wide viewing angle, high contrast, and a fast response speed, this display technology is a popular choice various types of electronic devices, such as portable media players, mobile phones, and televisions.

Research into making flexible OLED display apparatuses, such as foldable OLED display apparatuses or rollable OLED display apparatuses has been carried out.

However, organic light-emitting display apparatuses, according to the related art, have a problem in that impurities, such as gas or moisture, may be introduced from the outside or may be generated in the organic material included in the display apparatus. These impurities may then penetrate into the OLED, either during manufacturing or in use. Penetration of impurities into the MED may then causes deterioration of the quality of an image that is displayed on the OLED display.

SUMMARY

The or more exemplary embodiments of the present invention include an organic light-emitting display apparatus having a structure in which the quality of an image to be formed may be prevented from being deteriorated or deterioration may be reduced.

According to one or more exemplary embodiments of the present invention, an organic light-emitting display apparatus includes a substrate having a display area and a periphery area that is outside of the display area. A first insulating layer is disposed within both the display area and the periphery area. The first insulating layer is disposed over the substrate and has a first opening in the periphery area. A first electrode is disposed within the display area and over the first insulating layer. A first bank is disposed over the first insulating layer in both the display area and the periphery area. The first bank has a second opening through which a center of the first electrode is exposed. A second bank is disposed over the first insulating layer and is separated from the first bank. The first opening is disposed between the first bank and the second bank. An intermediate layer is disposed over the first electrode. A second electrode is disposed over the intermediate layer and the first bank.

Each of a distance from an edge of the first bank facing the second bank to the first opening and a distance from an edge of the second bank facing the first bank to the first opening may be about 4 μm or more.

A distance between the first bank and the second bank may be about 15 μm or more.

The second electrode might not be disposed in the first opening and might not be disposed over the second bank.

The organic light-emitting display apparatus may further include a conductive layer disposed within the periphery area over the first insulating layer and disposed to cover the first opening.

The first bank may include a plurality of areas, each separated from one another so that at least a part of the conductive layer is exposed.

The second electrode may contact the conductive layer between the plurality of areas.

The conductive layer may include a plurality of third openings disposed within a periphery of the first opening.

The organic light-emitting display apparatus may further include a second insulating layer disposed under the first insulating layer and including an inorganic material. At least a part of the second insulating layer may be exposed through the first opening.

The organic light-emitting display apparatus may further include a capping layer disposed over the second electrode in the display area and the periphery area.

At least a part of the second electrode may be exposed by the capping layer.

Each of the first insulating layer, the first and second banks, and the capping layer may include an organic material.

The organic light-emitting display apparatus may further include an encapsulation layer. The encapsulation layer may include at least one inorganic layer and at least one inorganic layer, each disposed over the capping layer.

The first opening may encompass the display area.

The first insulating layer may include a first area and a second area separated from each other by the first opening.

The first opening may include a main opening and a plurality of branched openings branched from the main opening.

The display area may include four corners and four edges connecting the four corners.

The main opening may be located adjacent to each of the four corners, and the plurality of branched openings may be located in at least two of the four edges.

The main opening may be branched into at least three branched openings, and the at least three branched openings may be located in at least one of the four edges.

The first insulating layer may further include a third area surrounded by the branched openings.

The organic light-emitting display apparatus may further include a conductive layer in the first area, the second area, and the third area over the first insulating layer. The conductive layer may have a plurality of third openings located in each of the second area and the third area.

An organic light-emitting display apparatus includes a substrate including a display area in a center thereof and a non-display area surrounding the display area. A first bank is disposed on the substrate. The first bank includes an OLED and a plurality of openings that correspond to a plurality of sub-pixels. A second bank is separated from the first bank and is disposed entirely within the non-display area. An insulating layer covers the first bank and the second bank. The insulating layer has an opening disposed between the first bank and the second bank such that the opening separates the first bank from the second bank.

The first bank and the same bank may each include a same organic material as the insulating layer. The organic light-emitting display apparatus may further include a first electrode disposed within the display area and overlapping the insulation layer therein. A center of the first electrode may be exposed through an opening in the first bank. The organic light-emitting display apparatus may further include an intermediate layer disposed over the first electrode and a second electrode disposed over the intermediate layer and the first bank.

BRIEF DESCRIPTION OF THE DRAWINGS

These and/or other aspects will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings in which:

FIG. 1 is a plan view schematically illustrating an organic light-emitting display apparatus according to an exemplary embodiment of the present invention;

FIG. 2 is a plan view schematically illustrating region A of FIG. 1;

FIG. 3 is a cross-sectional view schematically illustrating a part of the organic light-emitting display apparatus of FIG. 1;

FIG. 4 is a cross-sectional view schematically illustrating a part of an organic light-emitting display apparatus;

FIG. 5 is a plan view schematically illustrating a part of an organic light-emitting display apparatus according to an exemplary embodiment of the present invention;

FIG. 6 is a cross-sectional view schematically illustrating a part of the organic light-emitting display apparatus of FIG. 5; and

FIG. 7 is a cross-sectional view schematically illustrating a part of an organic light-emitting display apparatus according to an exemplary embodiment of the present invention.

DETAILED DESCRIPTION

In describing exemplary embodiments of the present disclosure illustrated in the drawings, specific terminology is employed for sake of clarity. However, the present disclosure is not intended to be limited to the specific terminology so selected, and it is to be understood that each specific element includes all technical equivalents which operate in a similar manner.

Those components that are the same as or similar to other components may be referred to by the same reference

numerals throughout the figures, and redundant explanations of these components may be omitted.

Also, sizes and thicknesses of elements in the drawings may be exaggerated for clarity of illustration and convenience of explanation. Accordingly, exemplary embodiments of the present invention should not be viewed as necessarily being limited to the sizes and thicknesses of the elements, as they appear in the drawings.

FIG. 1 is a plan view schematically illustrating an organic light-emitting display apparatus according to an exemplary embodiment of the present invention. FIG. 2 is an enlarged plan view of region A of FIG. 1. FIG. 3 is a cross-sectional view schematically illustrating a part of the organic light-emitting display apparatus of FIG. 1, FIG. 4 is a cross-sectional view schematically illustrating a part of an organic light-emitting display apparatus according to an example.

Referring to FIGS. 1 through 3, an organic light-emitting display apparatus 1 according to an exemplary embodiment of the present invention includes a substrate 110 having a display area DA and a periphery area PA. The periphery area PA is a non-display area that is disposed outside of the display area DA. The substrate 110 may include various materials such as glass, metal, plastic, and the like. According to an exemplary embodiment of the present invention, the substrate 110 may be a flexible substrate. For example, the substrate 110 may include a polymer resin, such as polyethersulphone (PES), polyacrylate (PAR), polyetherimide (PEI), polyethylene naphthalate (PEN), polyethylene terephthalate (PET), polyphenylene sulfide (PPS), polyallylate, polyimide (PI), polycarbonate (PC), or cellulose acetate propionate (CAP).

The display area DA of the substrate 110 is an area in which an image is displayed. The display area DA may include a plurality of first thin film transistors TFT1 and organic light-emitting devices (OLEDs) 130, which are electrically connected to the plurality of first thin film transistors TFT1. The OLEDs 130 may be electrically connected to the plurality of first thin film transistors TFT1 by a plurality of first electrodes 131. A plurality of second thin film transistors TFT2 may be disposed in the periphery area PA of the substrate 110. The plurality of second thin film transistors TFT2 may be a part of a circuit unit that is configured, for example, for controlling electrical signals that are applied to the display area DA.

Each of the first thin film transistors TFT1 may include a semiconductor layer 122, a gate electrode 124, a source electrode 126S, and a drain electrode 126D. The semiconductor layer 122 may include amorphous silicon, polycrystalline silicon, or an organic semiconductor material. The gate electrode 124 is disposed above the semiconductor layer 122. The source electrode 126S and the drain electrode 126D are in electrical communication with each other, to an extent that is dictated by signals applied to the gate electrode 124. The gate electrode 124 may have a single layer structure or a multi-layered structure. The gate electrode 124 may include one or more of aluminum (Al), platinum (Pt), palladium (Pd), silver (Ag), magnesium (Mg), gold (Au), nickel (Ni), neodymium (Nd), (Ir), chromium (Cr), lithium (Li), calcium (Ca), molybdenum (Mo), titanium (Ti), tungsten (W), and copper (Cu). The precise composition of the gate electrode 124 may be determined, for example, by taking into account adhesion with an adjacent layer, surface flatness of a layer to be stacked, and processability.

In order to adequately insulate the semiconductor layer 122 from the gate electrode 124, a gate insulating layer 113 may be disposed between the semiconductor layer 122 and the gate electrode 124. The gate insulating layer 113 may

include an inorganic material, such as a silicon oxide, a silicon nitride and/or a silicon oxynitride. Furthermore, a second insulating layer **115** may be disposed at a top portion of the gate electrode **124**. The source electrode **126S** and the drain electrode **126D** may each be disposed over the second insulating layer **115**. The second insulating layer **115** may include an inorganic material, such as a silicon oxide, a silicon nitride and/or a silicon oxynitride. The source electrode **126S** and the drain electrode **126D** are electrically connected to the semiconductor layer **122** via contact holes that are formed through both the second insulating layer **115** and the gate insulating layer **113**.

The source electrode **126S** and the drain electrode **126D** may have a single layer structure or a multi-layered structure. The source electrode **126S** and the drain electrode **126D** may each include Al, Pt, Pd, Ag, Mg, Au, Ni, Nd, Ir, Cr, Li, Ca, Mo, Ti, W, and/or Cu. The precise composition of the source electrode **126S** and the gate electrode **126D** may be determined, for example, by taking into account conductivity, etc. An insulating layer including the inorganic material may be formed by chemical vapor deposition (CVD) or atomic layer deposition (ALD).

A buffer layer **111** may be disposed between the first thin film transistors TFT1 and the substrate **110**. The buffer layer **111** may include an inorganic material, such as a silicon oxide, a silicon nitride and/or a silicon oxynitride. The buffer layer **111** may be used to render a top surface of the substrate **110** more smooth, thereby minimizing or preventing an impurity from the substrate **110**, etc. from penetrating into the semiconductor layer **122** of each of the first thin film transistors TFT1.

A first insulating layer **118** may be disposed over each of the first thin film transistors TFT1. For example, when the OLEDs **130** are disposed above the first thin film transistors TFT1, the first insulating layer **118** may have a flat top surface on which a first electrode **131** may be flatly formed. The first insulating layer **118** may be formed of an organic material, such as acryl, benzocyclobutene (BCB), polyimide (PI), or hexamethyldisiloxane (HMDSO), for example. In FIG. 3, the first insulating layer **118** has a single layer structure. However, the first insulating layer **118** may alternatively have a multi-layer structure. The first insulating layer **118** may be disposed in the display area DA and the periphery area PA outside the display area DA of the substrate **110**. The first insulating layer **118** may have a first opening **118h1** through which the second insulating layer **115** in the periphery area PA is exposed. The first insulating layer **118** may be physically divided into at least two parts by the first opening **118h1**. This arrangement of the first insulating layer **118** may prevent an impurity, introduced from the outside, from penetrating into the display area DA through the first insulating layer **118**.

In the display area DA of the substrate **110**, the OLED **130** is disposed over the first insulating layer **118**. The OLED **130** includes the first electrode **131**, a second electrode **135**, and an intermediate layer **133** disposed between the first electrode **131** and the second electrode **135**. The OLED **110** may also include an emission layer.

An opening in the first insulating layer **118** exposes either the source electrode **126S** or the drain electrode **126D** of each of the first thin film transistors TFT1. The first electrode **131** contacts either the source electrode **126S** or the drain electrode **126D** through the opening and the first electrode **131** is electrically connected to each of the first thin film transistors TFT1.

The first electrode **131** may be formed as a semitransparent or fully-transparent electrode or as a reflective electrode.

When the first electrode **131** is formed as a semitransparent or fully-transparent electrode, the first electrode **131** may include a transparent conductive layer. The transparent conductive layer may be an indium tin oxide (ITO), an indium zinc oxide (IZO), a zinc oxide (ZnO), an indium oxide (In₂O₃), an indium gallium oxide (IGO), and/or an aluminum zinc oxide (AZO). For example, in addition to the transparent conductive layer, the first electrode **131** may further include a semi-transmissive layer for increasing light efficiency. The semi-transmissive layer may be a thin film having a thickness of several to several tens of nm and formed of Ag, Mg, Al, Pt, Pd, Au, Ni, Nd, Ir, Cr, Li, Ca, and/or Yb. When the first electrode **131** is formed as a reflective electrode, the first electrode **131** may include a reflective layer formed of Ag, Mg, Al, Pt, Pd, Au, Ni, Nd, Ir, Cr, and/or a compound thereof. A transparent conductive layer may be disposed at a top portion and/or a bottom portion of the reflective layer. The transparent conductive layer may include an ITO, an IZO, a ZnO, an indium oxide (In₂O₃), an IGO, and/or are AZO. However, embodiments of the present invention are not limited thereto, and the first electrode **131** may be formed of various materials, and various modifications are possible where the structure of the first electrode **131** may be a single layer structure or a multi-layered structure.

A first bank **119a** may be disposed over the first insulating layer **118** in the display area DA and the periphery area PA. The first bank **119a** has an opening that corresponds to sub-pixels. For example, at least a center of the first electrode **131** is exposed through a second opening **119h2**. Pixels are thereby defined by the openings. Also, the first bank **119a** may increase a distance between an edge of the first electrode **131** and the second electrode **135** above the first electrode **131**, thereby preventing arcing, and other related problems, from occurring in the edge of the first electrode **131**. The first bank **119a** may be formed of an organic material, such as PI or HMDSO. A second bank **119b** may be disposed over the first insulating layer **118** and may be separated from the first bank **119a**, in the periphery area PA by the first opening **118h1** of the first insulating layer **118**, which is located between the first bank **119a** and the second bank **119b**.

For example, the first bank **119a** and the second bank **119b** may be completely separated from each other at both sides of the first opening **118h1**. Because the first bank **119a** and the second bank **119b** are completely separated from each other, an impurity, such as gas or moisture, penetrating into the second bank **119b** is not introduced into the first bank **119a**, regardless of whether the impurity was introduced from the outside or generated within the second bank **119b**. Thus, the impurity may be prevented from penetrating into the display area. DA and the quality of an image displayed in the organic light-emitting display apparatus **1** may be prevented from being deteriorated or deterioration may be reduced. The second bank **119b** may be formed of the same material as a material for forming the first bank **119a**. The first and second banks **119a** and **119b** may be formed of the same organic material as that of the first insulating layer **118**. However, embodiments of the present invention are not limited thereto.

The intermediate layer **133** of the OLED **130** may include a low molecular weight material or a polymer material. When the intermediate layer **133** includes a low molecular weight material, the intermediate layer **133** may have a structure in which a hole injection layer (HIL), a hole transport layer (HTL), an emission layer (EML), an electron transport layer (ETL), and an electron injection layer (EIL)

are stacked on one another. The intermediate layer **133** may include organic materials, such as, copper phthalocyanine (CuPc), N,N'-Di(naphthalene-1-yl)-N,N'-diphenyl-benzidine (NPB), and/or tris-8-hydroxyquinoline aluminum (Alq3). These layers may be formed by a vacuum deposition method. When the intermediate layer **133** includes a polymer material, the intermediate layer **133** may have a structure including an HTL and an EML. In this case, the HTL may include poly 3,4-ethylenedioxythiophene (PEDOT), and the EML may include a poly-phenylenevinylene (PPV)-based polymer material and a polyfluorene-based polymer material. The intermediate layer **133** may be formed by a screen printing or inkjet printing method, a laser induced thermal imaging (LITI) method, or the like.

However, the intermediate layer **133** is not limited thereto and may have various alternative structures. The intermediate layer **133** may include a layer formed integrally with a plurality of first electrodes **131** and/or a patterned layer that corresponds to each of the plurality of first electrodes **131**.

The second electrode **135** may be disposed in the display area DA and the periphery area PA. In particular, the second electrode **135** may be disposed at top portions of the intermediate layer **133** and the first bank **119a**. For example, the second electrode **135** might not be disposed in the first opening **118h1** or over the second bank **119b**. The second electrode **135** may be formed as one body in the plurality of OLEDs **130** and may correspond to the plurality of first electrodes **131**.

The second electrode **135** may be formed as a semitransparent or fully transparent electrode or as a reflective electrode. When the second electrode **135** is formed as a semitransparent or fully transparent electrode, the second electrode **135** may include Ag, Al, Mg, Li, Ca, Cu, LiF/Ca, LiF/Al, MgAg, and/or CaAg and may include a thin layer having a thickness of between several nm to several tens of nm. When the second electrode **135** is formed as a reflective electrode, the second electrode **135** may be formed of Ag, Al, Mg, Li, Ca, LiF/Ca, LiF/Al, MgAg, and/or CaAg. However, the composition and material of the second electrode **135** are not limited thereto, and various modifications are possible.

As described above, the first insulating layer **118** and the first bank **119a** are disposed over the substrate **110** in the display area DA and the periphery area PA. The first insulating layer **118** includes the first opening **118h1** located in the periphery area PA. Also, the first bank **119a** is spaced apart from the first opening **118h1** by a predetermined distance d1. The second bank **119b** may be disposed in an opposite direction from which the first bank **119a** is disposed, with respect to the first opening **118h1**, and the second bank **119b** may be spaced apart from the first opening **118h1** by a predetermined distance d2. For example, the first bank **119a** and the second bank **119b** might not be disposed in the first opening **118h1** and may be completely separated from each other.

A conductive layer **150** may be disposed at a top portion of the first insulating layer **118** and in the first opening **118h1**, which are disposed in the periphery area PA. The conductive layer **150** may be disposed on the same layer as the first electrode **131**. At least a part of the conductive layer **150** may be disposed between the first insulating layer **118** and the first bank **119a** and between the first insulating layer **118** and the second bank **119b**. The conductive layer **150** may be formed of the same material as that of the first electrode **131** and the conductive layer **150** may completely cover the first opening **118h1**.

According to an exemplary embodiment of the present invention, the conductive layer **150** may include a plurality of third openings **150h3**, each disposed in the periphery of the first opening **118h1**. The first bank **119a** may include a plurality of areas **119a1**, **119a2**, and **119a3**, separated from one another, and disposed in the periphery area PA. The second bank **119b** may also include a plurality of areas **119b1** and **119b2**, separated from one another, and disposed in the periphery area PA. The plurality of areas **119a1**, **119a2**, **119a3**, **119b1** and **119b2** may be disposed to cover an edge of the conductive layer **150** including the plurality of third openings **150h3**. The conductive layer **150** including the third openings **150h3** may have a mesh shape. For example, the plurality of areas **119a1**, **119a2**, **119a3**, **119b1**, and **119b2** of the first and second banks **119a** and **119b** are separated from one another, whereas conductive layers **150** might not be completely separated from one another, and may make some contact with each other via the third openings **150h3**.

The third openings **150h3** in the conductive layer **150** may be disposed at a bottom portion of the conductive layer **150** and may serve as a path in which a gas generated from the first insulating layer **118**, formed of an organic material, is dissipated to the outside. Thus, the quality of an image formed by the organic light-emitting display apparatus **1** may be prevented from being deteriorated, or deterioration may be reduced, by preventing the gas that is generated from the first insulating layer **118** from penetrating into the display area DA.

The second electrode **135** may be disposed over the first bank **119a**. The second electrode **135** may contact the conductive layer **150** at spaces between the areas **119a1**, **119a2**, and **119a3** of the first bank **119a**. The conductive layer **150** may be a power line for supplying power to the second electrode **135** or a connection line for connecting the power line for supplying power to the second electrode **135**.

Referring to FIG. 1, the first opening **118h1** in the first insulating layer **118** may encompass the display area DA. For example, the first opening **118h1** may form a closed loop that completely surrounds the display area DA. Thus, the first insulating layer **118** may include a first area **118a** and a second area **118b** that are separated from each other by the first opening **118h1**. The first area **118a** and the first bank **119a** may be disposed in the same direction with respect to the first opening **118h1**, and the second area **118b** and the second bank **119b** may be disposed in the same direction with respect to the first opening **118h1**. The second electrode **135** might only be disposed over the first bank **119a** and might not be disposed in the first opening **118h1** or over the second bank **119b**.

A capping layer **140** for increasing light efficiency of the organic light-emitting display apparatus **1** may be disposed over the second electrode **135**. The capping layer **140** may be disposed within the display area DA and the periphery area PA and may be disposed only at a top portion of the second electrode **135**, and might not extend beyond the second electrode **135**. For example, at least a part of the second electrode **135** may be exposed by the capping layer **140**. The capping layer **140** may be formed of an organic material. Although not shown in FIG. 3 an encapsulation layer (**260** of FIG. 6) may be disposed over the capping layer **140**, the encapsulation layer including at least one inorganic layer and at least one organic layer.

As described above, the first bank **119a** and the second bank **119b** may be disposed at opposite sides of the first opening **118h1**. The distance d1, which extends from an edge of the first bank **119a** facing the second bank **119b** to

the first opening **118h1**, may be at least 4 μm . Similarly, the distance **d2**, which extends from an edge of the second bank **119b** facing the first bank **119a** to the first opening **118h1**, may be at least 4 μm . The distances **d1** and **d2** may either be the same as or different from each other. Reference numeral **119VL** of FIGS. **1** and **2** may represent a virtual line that connects edges of the plurality of areas **119a1**, **119a2**, and **119a3**, included in the first bank **119a**, and edges of the plurality of areas **119b1** and **119b2**, included in the second bank **119b**.

When each of the distances **d1** and **d2** is less than about 4 μm , the first bank **119a** and/or the second bank **119b** may flow into the first opening **118h1**.

A width **d3** of the first opening **118h1** may be 7 μm or more. For example, a distance between the first bank **119a** and the second bank **119b** may be about 15 μm or more. Through this configuration, the first bank **119a** and the second bank **119b** might not be connected to each other within the first opening **118h1**.

Referring to FIG. **4**, an organic light-emitting display apparatus **1'** according to an example includes a second insulating layer **115'** disposed within a periphery area and a first insulating layer **118'** disposed over the second insulating layer **115'**. The first insulating layer **118'** includes a first opening **118h1'**. A conductive layer **150'** may be disposed in the first opening **118h1'**. The conductive layer **150'** may include third openings **150h3'** formed in the periphery of the first opening **118h1'**.

A first bank **119a'** and a second bank **119b'**, which, together, cover at least a part of the conductive layer **150'**, may be disposed over the first insulating layer **118'**. The first bank **119a'** and the second bank **119b'** may be connected to each other within the first opening **118h1'**. A second electrode **135'** may be disposed over the first bank **119a'**. The second electrode **135'** may contact the conductive layer **150'**.

Because each of the first bank **119a'**, the second bank **119b'** and the first insulating layer **118'** are formed of organic materials, impurities **G1'** and **G2'** (which may include gas and/or moisture introduced into the second bank **119b'**) which may be disposed outside of the first opening **118h1'** or the first insulating layer **118'**, or may be generated from the second bank **119b'** or the first insulating layer **118'**, may be introduced into the first bank **119a'** via a connection part **119c'** disposed within the first opening **118h1'** along a path **P'** shown in FIG. **4**. The impurities **G1'** and **G2'** (which may include the gas and/or moisture) penetrating into the display area **DA** may penetrate into the intermediate layer **133** including the EML. Thus, the quality of an image formed in the organic light-emitting display apparatus **1'** may be deteriorated.

Referring back to FIG. **3**, the first bank **119a** and the second bank **119b** are separated from each other at opposing sides of the first opening **118h1**. The first bank **119a**, the first opening **118h1**, the second bank **119b**, and the first opening **118h1** may each be spaced apart from one another by the predetermined distance **d1** or **d2**. The distances **d1** and **d1** may each be, for example, about 4 μm or more. Thus, in spite of a problem related to a process or characteristics of organic materials for forming the first and second banks **119a** and **119b**, the first and second banks **119a** and **119b** might not flow into the first opening **118h1**.

Through this configuration, the impurity (e.g. gas and/or moisture) introduced into the second bank **119b** or generated in the second bank **119b** might not be introduced into the first bank **119a**. Thus, the quality of the image formed in the organic light-emitting display apparatus **1** may be prevented

from being deteriorated, or may reduce an extent of deterioration, by blocking the impurity from penetrating into the display area **DA**.

FIG. **5** is a plan view schematically illustrating a part of an organic light-emitting display apparatus according to an exemplary embodiment of the present invention, and FIG. **6** is a cross-sectional view schematically illustrating a part of the organic light-emitting display apparatus of FIG. **5**.

Hereinafter, the difference between the organic light-emitting display apparatus **1** of FIG. **3** and an organic light-emitting display apparatus **2** of FIG. **6** will be described. FIG. **6** is a cross-sectional view illustrating a periphery area **PA** corresponding to an edge in which branched openings **218h11b** and **218h12b** of FIG. **5** are disposed.

Referring to FIGS. **5** and **6**, the organic light-emitting display apparatus **2**, according to an exemplary embodiment of the present invention, includes a substrate **210** having a display area **DA** and a periphery area **PA** that is located outside of the display area **DA**. A first insulating layer **218** is disposed in both the display area **DA** and the periphery area **PA**. The first insulating layer **218** is disposed over the substrate **210** and has a first opening **218h1** located in the periphery area **PA**. A first electrode **231** is disposed in the display area **DA**, over the first insulating layer **218**. A first bank **219a** is disposed over the first insulating layer **218** in both the display area **DA** and the periphery area **PA**. The first bank **219a** includes a second opening **219h2**, through which the center of the first electrode **231** is exposed. A second bank **219b** is disposed over the first insulating layer **218** and is separated from the first bank **219a**. The first opening **218h1** is disposed between the first bank **219a** and the second bank **219b**. An intermediate layer **233** is disposed over the first electrode **231**. A second electrode **235** is disposed over the intermediate layer **233** and the first bank **219a**.

The display area **DA** may include four corners and four edges which may connect the four corners. For example, the display area **DA** may have a rectangular shape. However, exemplary embodiments of the present invention are not limited thereto, and the display area **DA** may have a triangular shape or a polygonal shape such as a pentagonal shape or different polygonal shape.

A buffer layer **211** may be disposed over the substrate **210** and thin film transistors **TFT1**. OLEDs **230** are electrically connected to the thin film transistors **TFT1**. Each of the OLEDs **230** include the first electrode **231**. The intermediate layer includes an EML. The second electrode **215** may be disposed in the display area **DA** over the buffer layer **211**.

Each of the thin film transistors **TFT1** may include a semiconductor layer **222**, a gate electrode **224**, a source electrode **226S**, and a drain electrode **226D**. A gate insulating layer **213** may be disposed between the semiconductor layer **222** and the gate electrode **224**, and a second insulating layer **215** may be disposed over the gate electrode **224**. The gate insulating layer **213** and the second insulating layer **215** may each include inorganic materials. The gate insulating layer **213** and the second insulating layer **215** may each be disposed within both the display area **DA** and the periphery area **PA**.

The first insulating layer **218** may be disposed over the thin film transistors **TFT1** in the display area **DA** and the periphery area **PA**. The first insulating layer **218** may include the first opening **218h1**, which is located in the periphery area **PA** and through which the second insulating layer **215** is exposed. The first opening **218h1** may encompass the display area **DA** and may form a closed loop.

The first opening **218h1** includes a main opening **218h1a** and a plurality of branched openings **218h11b** and **218h12b** branched from the main opening **218h1a**. The main opening **218h1a** may be disposed adjacent to each of the four corners. Each of the branched openings **218h11b** and **218h12b** may be disposed at the four edges. However, exemplary embodiments of the present invention are not limited thereto, and the branched openings **218h11b** and **218h12b** may be located in at least two of the four edges.

Because the dead space of the periphery area PA corresponding to the corners of the display area DA is narrow, it may be difficult to form a plurality of openings in the first insulating layer **218**. However, because the dead space of the periphery area PA corresponding to the edges of the display area DA is wide, a sufficiently large space in which a plurality of openings may be formed, may be secured. Thus, as illustrated in FIG. 5, one main opening **218h1a** may be formed in the corners, and the plurality of branched openings **218h11b** and **218h12b** branched from the main opening **218h1a** may be disposed in the edges so that an impurity may be prevented from being introduced into the display area DA.

The first insulating layer **218** may be divided by the first opening **218h1** into a first area **218a**, a second area **218b**, and a third area **218c**. The third area **218c** may be surrounded by the branched openings **218h11b** and **218h12b**. For example, the third area **218c** may have an island shape. The first electrode **231** may be disposed in the display area DA over the first insulating layer **218**, and a conductive layer **250** may be disposed in the periphery area PA. The conductive layer **250** may include a plurality of third openings **250h3**. The plurality of third openings **250h3** may be located in the first area **218a**, the second area **218b** and the third area **218c** of the first insulating layer **218**.

The first bank **219a** may be disposed over the first insulating layer **218** within both the display area DA and the periphery area PA. The second bank **219b** may be disposed over the first insulating layer **218** in the periphery area PA. The first bank **219a** includes a second opening **219h2** through which the center of the first electrode **231** is exposed. The first bank **219a** may be divided into a plurality of areas **219a1**, **219a2**, and **219a3** in the periphery area PA. The second bank **219b** may be separated from the first bank **219a**. The branched openings **218h11b** and **218h12b** are disposed between the first bank **219a** and the second bank **219b**. The third bank **219c** may be separated from both the first bank **219a** and the second bank **219b**, between the plurality of branched openings **218h11b** and **218h12b**. For example, the first bank **219a**, the second bank **219b**, and the third bank **219c** may each be disposed in a first area **218a**, a second area **218b**, and a third area **218c** of the first insulating layer **218**, respectively. Each of a distance d1 (from an edge of the first bank **219a** to the branched opening **218h11b**) and a distance d2 (from an edge of the third bank **219c** to the branched opening **218h11b**) may be about 4 μm or more so that the first through third banks **219a**, **219b** and **219c** may be completely separated from one another. A width d3 of the branched opening **218h11b** may be about 7 μm or more. For example, a distance between the first bank **219a** and the third bank **219c** may be about 15 μm or more.

Similarly, each of a distance d4 (from an edge of the third bank **219c** to the branched opening **218h12b**) and a distance d5 (from an edge of the second bank **219b** to the branched opening **218h12b**) may be about 4 μm or more. A width d6 of the branched opening **218h12b** may be about 7 μm or more. For example, a distance between the second bank **219b** and the third bank **219c** may be about 15 μm or more.

The first bank **219a**, the second bank **219b**, and the third bank **219c** may cover at least a part of the conductive layer **250** in the periphery area PA and might not be disposed in the branched openings **218h11b** and **218h12b**. The conductive layer **250** may include a plurality of third openings **250h3**.

The intermediate layer **233** including an EML may be disposed over the first electrode **231**. The second electrode **235** may be disposed over the intermediate layer **233**. The second electrode **235** may be disposed at a top portion of the intermediate layer **233** and a top portion of the first bank **219a**. The second electrode **235** might not be disposed in the first opening **218h1** and might not be disposed at a top portion of the second bank **219b** or a top portion of the third bank **219c**. The second electrode **235** may contact the conductive layer **250** in regions between the plurality of areas **219a1**, **219a2**, and **219a3** of the first bank **219a**. The conductive layer **250** may be a power line for supplying power to the second electrode **235** or a connection line for connecting the power line for supplying power to the second electrode **235**.

A capping layer **240** for increasing light efficiency of the organic light-emitting display apparatus **2** and including an organic material may be disposed over the second electrode **235**. An encapsulation layer **260** covers the OLED **230** and protects the OLED **230** from moisture or oxygen from the outside. The encapsulation layer **260** may be disposed over the capping layer **240**. The encapsulation layer **260** may cover the display area DA and may extend up to the periphery area PA. The encapsulation layer **260** may include a first inorganic layer **261**, an organic layer **263**, and a second inorganic layer **265**, as illustrated in FIG. 6.

The first inorganic layer **261** may cover the capping layer **240** and may include a silicon oxide, a silicon nitride and/or a silicon oxynitride. Other layers including an LiF layer may be disposed between the first inorganic layer **261** and the capping layer **240**, as needed. Because the first inorganic layer **261** is formed along a lower structure, a top surface of the first inorganic layer **261** might not be flat, as illustrated in FIG. 6. The organic layer **263** may cover the first inorganic layer **261**, and a top surface of the organic layer **263** may be substantially flat. The organic layer **263** may include polyethylene terephthalate (PET), polyethylene naphthalate (PEN), poly carbonite (PC), polyimide (PI), polyethylene sulfonate, polyoxymethylene, polyarylates (PAR), and hexamethyldisiloxane. The second inorganic layer **265** may cover the organic layer **263** and may include a silicon oxide, a silicon nitride and/or a silicon oxynitride. Although not shown, the second inorganic layer **265** may contact the first inorganic layer **261** in an edge region of the organic light-emitting display apparatus **2** so as to protect the organic layer **263** from exposure to the outside.

In this way, the encapsulation layer **260** includes the first inorganic layer **261**, the organic layer **263**, and the second inorganic layer **265**. Thus, through this multi-layered structure, even though cracks occur in the encapsulation layer **260**, these cracks might not be connected between the first inorganic layer **261** and the organic layer **263** or between the organic layer **263** and the second inorganic layer **265**. Thus, a path in which moisture or oxygen from the outside penetrates into the display area DA, may be prevented from being formed, or formation thereof may be reduced.

FIG. 7 is a cross-sectional view schematically illustrating a part of an organic light-emitting display apparatus **3** according to an exemplary embodiment of the present invention. Because the remaining configurations of the organic light-emitting display apparatus **3** of FIG. 7 except

13

for a first insulating layer **318** and a conductive layer **350** may be substantially the same as those of the organic light-emitting display apparatus **1** of FIG. **3** or the organic light-emitting display apparatus **2** of FIG. **6**, hereinafter, only the first insulating layer **318** and the conductive layer **350** will be described, and it is to be assumed that all other elements not described herein are substantially the same as corresponding elements described with reference to FIG. **3** or **6**.

Referring to FIG. **7**, the organic light-emitting display apparatus **3** according to an exemplary embodiment of the present invention includes the first insulating layer **318** disposed in the display area DA and the periphery area PA. The first insulating layer **318** may include a first opening **318h1** located in the periphery area PA. The first opening **318h1** may surround the display area DA and may include a main opening **318h1a** disposed in the periphery area PA corresponding to a corner of the display area DA and three branched openings **318h11b**, **318h12b**, and **318h13b** disposed in the periphery area PA corresponding to an edge of the display area DA and branched from the main opening **318h1a**.

In FIG. **7**, the three branched openings **318h11b**, **318h12b**, and **318h13b** are located in one edge of the display area DA. However, embodiments are not limited thereto. For example, the three branched openings **318h11b**, **318h12b**, and **318h13b** may be located in two or more edges. The first insulating layer **318** may be divided by the three branched openings **318h11b**, **318h12b**, and **318h13b** into a first area **318a**, a second area **318b**, a third area **318c**, and a fourth area **318d**, which are separated from one another. The third area **318c** and the fourth area **318d** may be surrounded by the branched openings **318h11b**, **318h12b**, and **318h13b**. For example, each of the third area **318c** and the fourth area **318d** may have an island shape.

In the organic light-emitting display apparatus **3** of FIG. **7**, the three branched openings **318h11b**, **318h12b**, and **318h13b** are disposed in one edge of the display area DA. Thus, gas or moisture introduced from the outside or generated from layers disposed outside the first opening **318h1** and formed of organic materials may be more effectively blocked so that the quality of an image formed in the organic light-emitting display apparatus **5** may be prevented from being deteriorated or deterioration may be reduced.

In the organic light-emitting display apparatuses **1**, **2**, and **3** according to the above-described embodiments, the first insulating layers **118**, **218**, and **318** including the first openings **118h1**, **218h1**, and **318h1** are disposed in the periphery area PA, and an introduction path of impurities that may be introduced into the first openings **118h1**, **218h1**, and **318h1** from outside of the first openings **118h1**, **218h1**, and **318h1** may be effectively blocked so that the quality of an image formed in each of the organic light-emitting display apparatuses **1**, **2**, and **3** may be prevented from being deteriorated or deterioration may be reduced.

As described above, according to the one or more exemplary embodiments of the present invention, an organic

14

light-emitting display apparatus may prevent the quality of an image from being deteriorated, or may reduce an extent to which quality is deteriorated, as a result of contamination that might occur during a manufacturing process or in subsequent use.

While exemplary embodiments of the present invention have been described above with reference to the figures, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention.

What is claimed is:

1. An organic light-emitting display apparatus, comprising:

a substrate including a display area and a non-display area surrounding the display area;

a first bank disposed on the substrate and having a plurality of openings that correspond to a plurality of sub-pixels;

a second bank separated from the first bank and disposed within the non-display area; and

an insulating layer disposed under the first bank and the second bank and having an opening disposed between the first bank and the second bank such that the opening of the insulating layer separates a first portion of the insulating layer that is disposed under the first bank from a second portion of the insulating layer that is disposed under the second bank,

wherein there are no openings disposed in the insulating layer between the sub-pixels of the plurality of sub-pixels.

2. The organic light-emitting display apparatus of claim **1**, further comprising a conductive layer disposed over the insulating layer and covering the opening that is disposed between the first bank and the second bank, the conductive layer being at least partially exposed within the non-display area.

3. The organic light-emitting display apparatus of claim **1**, wherein the first bank and the second bank include a same organic material as the insulating layer.

4. The organic light-emitting display apparatus of claim **1**, further including a first electrode disposed within the display area and overlapping the insulation layer therein.

5. The organic light-emitting display apparatus of claim **4**, wherein a center of the first electrode is exposed through an opening in the first bank.

6. The organic light-emitting display apparatus of claim **1**, further including an intermediate layer, disposed over the first electrode, and a second electrode, the second electrode disposed over the intermediate layer and the first bank.

7. The organic light-emitting display apparatus of claim **6**, further comprising a capping layer disposed over the second electrode within the display area and the non-display area, the capping layer not overlapping the opening that is disposed between the first bank and the second bank.

* * * * *

专利名称(译)	具有受保护的发射层的有机发光显示装置		
公开(公告)号	US10714550	公开(公告)日	2020-07-14
申请号	US16/404464	申请日	2019-05-06
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	KIM DEUKJONG LEE DONGHYUN KIM SANGKI		
发明人	KIM, DEUKJONG LEE, DONGHYUN KIM, SANGKI		
IPC分类号	H01L27/32 H01L51/52		
CPC分类号	H01L27/3246 H01L51/5253 H01L51/5237 H01L51/5203 H01L51/5246 H01L27/3276 H01L27/3262 H01L27/3244		
优先权	1020160035546 2016-03-24 KR		
其他公开文献	US20190259820A1		
外部链接	Espacenet		

摘要(译)

有机发光显示设备防止了由于有机发光层的污染而导致在其上显示的图像的质量下降。该显示设备包括具有显示区域和外围区域的基板。布置在基板上的第一绝缘层在外围区域中具有第一开口。第一电极设置在显示区域内,在第一绝缘层上方。第一堤岸布置在第一绝缘层上方并且具有第二开口,第一电极的中心通过第二开口暴露。第二堤岸布置在第一绝缘层上方并且与第一堤岸分开。第一开口设置在第一堤岸和第二堤岸之间。中间层设置在第一电极上方。第二电极设置在中间层和第一堤岸上方。

