




US 20120171787A1

(19) **United States**(12) **Patent Application Publication**
Sun(10) **Pub. No.: US 2012/0171787 A1**(43) **Pub. Date: Jul. 5, 2012**(54) **METHOD FOR FORMING A PIXEL OF AN
ELECTROLUMINESCENCE DEVICE
HAVING STORAGE CAPACITORS**(75) Inventor: **Wein-Town Sun, Hsinchu (TW)**(73) Assignee: **AU OPTRONICS
CORPORATION, Hsinchu (TW)**(21) Appl. No.: **13/420,225**(22) Filed: **Mar. 14, 2012****Related U.S. Application Data**

(62) Division of application No. 13/031,712, filed on Feb. 22, 2011, now Pat. No. 8,158,477, which is a division of application No. 11/616,943, filed on Dec. 28, 2006, now Pat. No. 7,915,117, which is a division of application No. 11/005,648, filed on Dec. 7, 2004, now Pat. No. 7,586,121.

Publication Classification(51) **Int. Cl.**
H01L 51/56 (2006.01)(52) **U.S. Cl.** **438/23; 257/E27.119**(57) **ABSTRACT**

A method is provided for forming a pixel of an electroluminescence device. The method provides a substrate; defines at least a first area for capacitors, a second area for a transistor on the substrate and a third area for an organic light-emitting diode (OLED) on the substrate; forms first conductive, first dielectric, second conductive, second dielectric, and third conductive layers over the first area; forming a third conductive layer over the second dielectric layer over the first area; wherein the first conductive layer over the first area is directly connected to a power supply voltage, wherein the second conductive layer is electrically connected to a fourth conductive layer and wherein the first conductive layer, the first dielectric layer, and the second conductive layer over the first area collectively form a first one of the capacitors over the first area, the second conductive layer, the second dielectric layer.

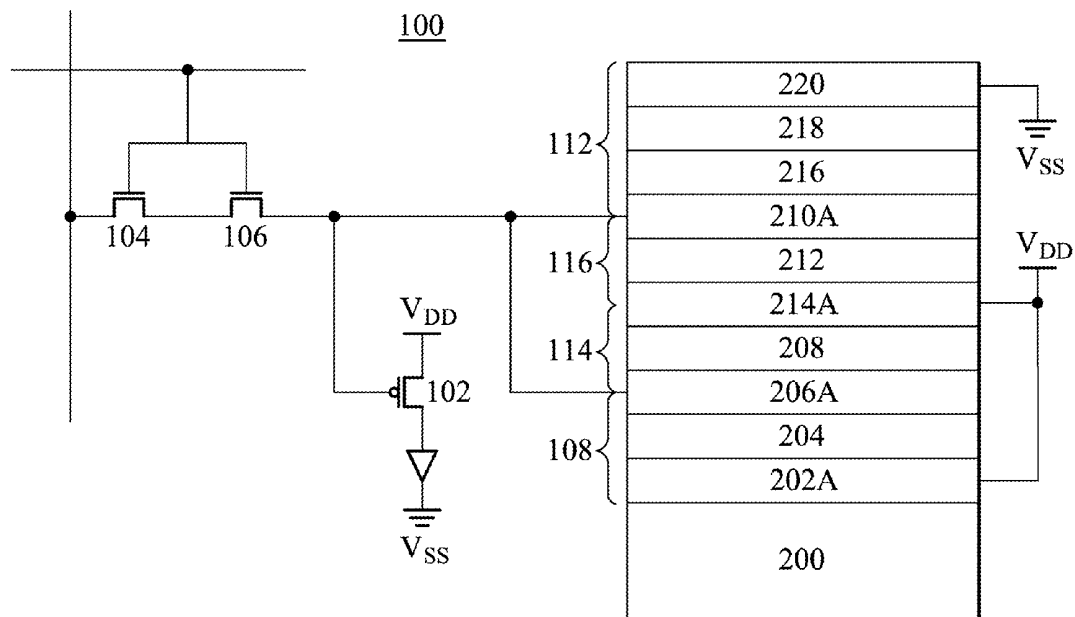

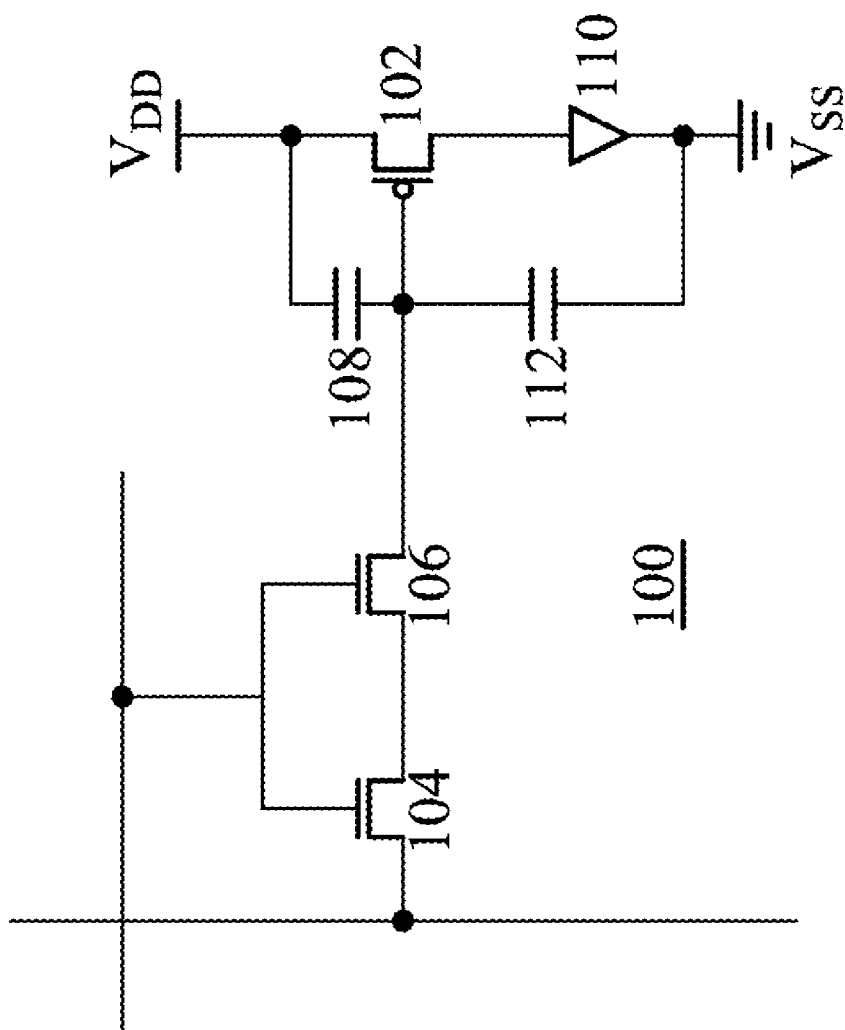


FIG. 1

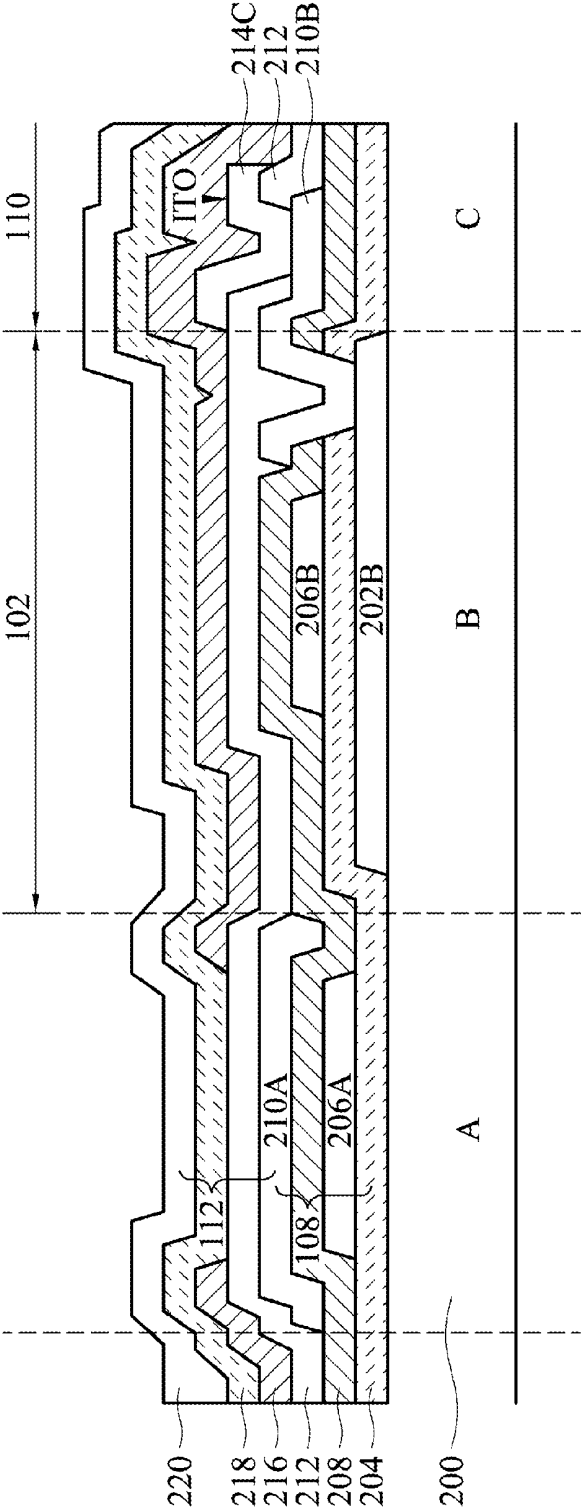


FIG. 2

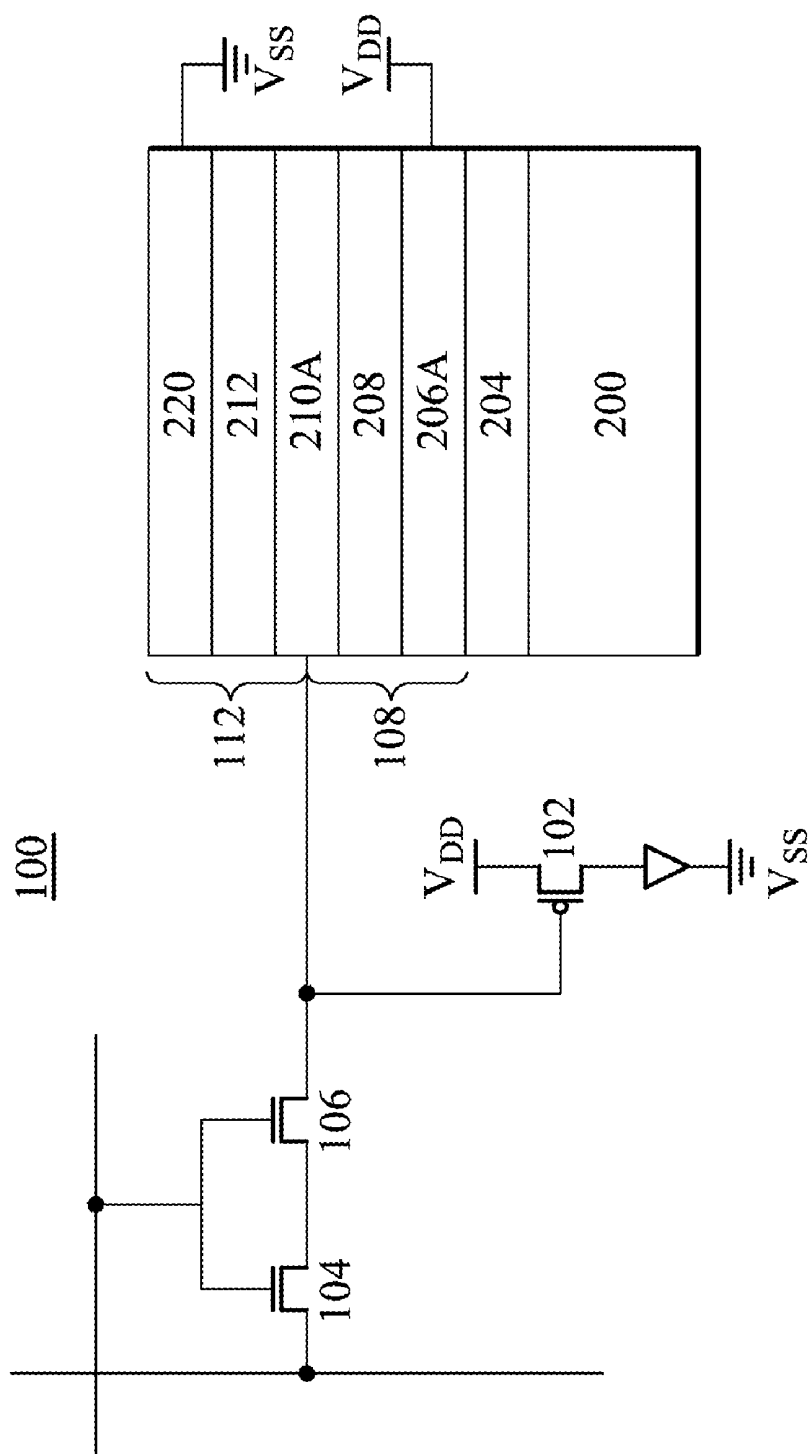


FIG. 3

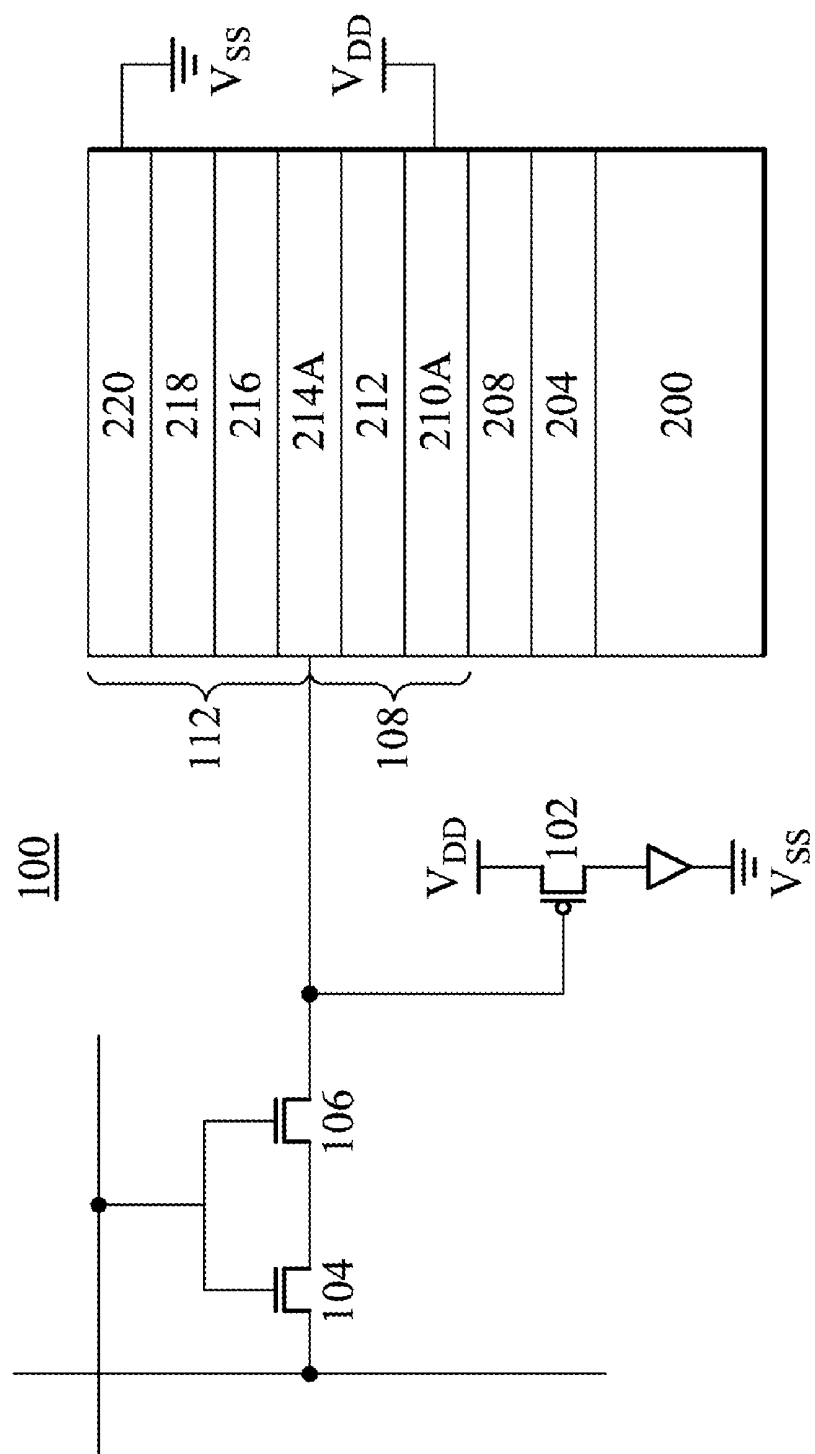


FIG. 4

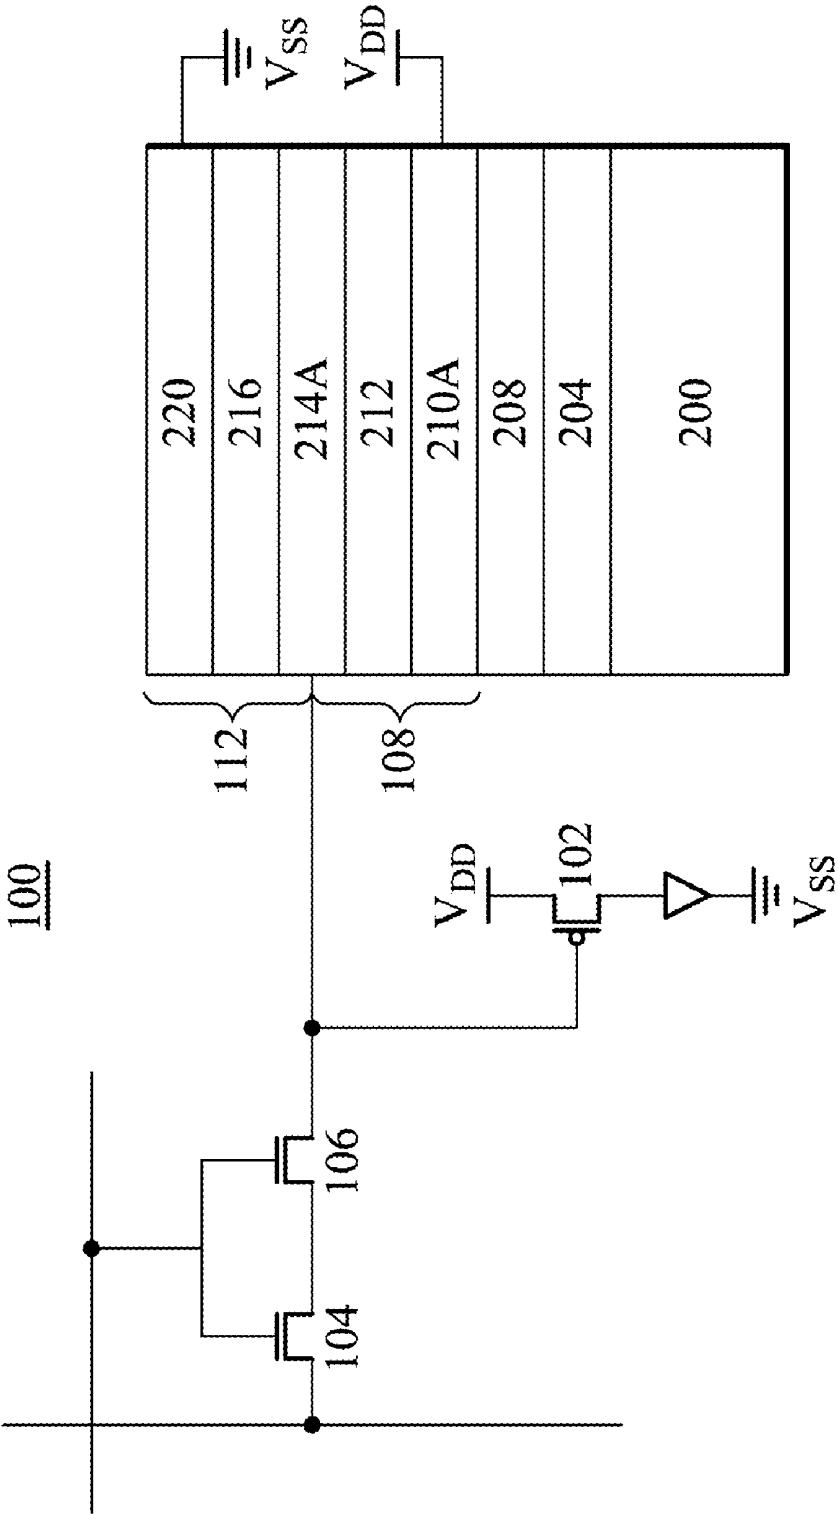


FIG. 5

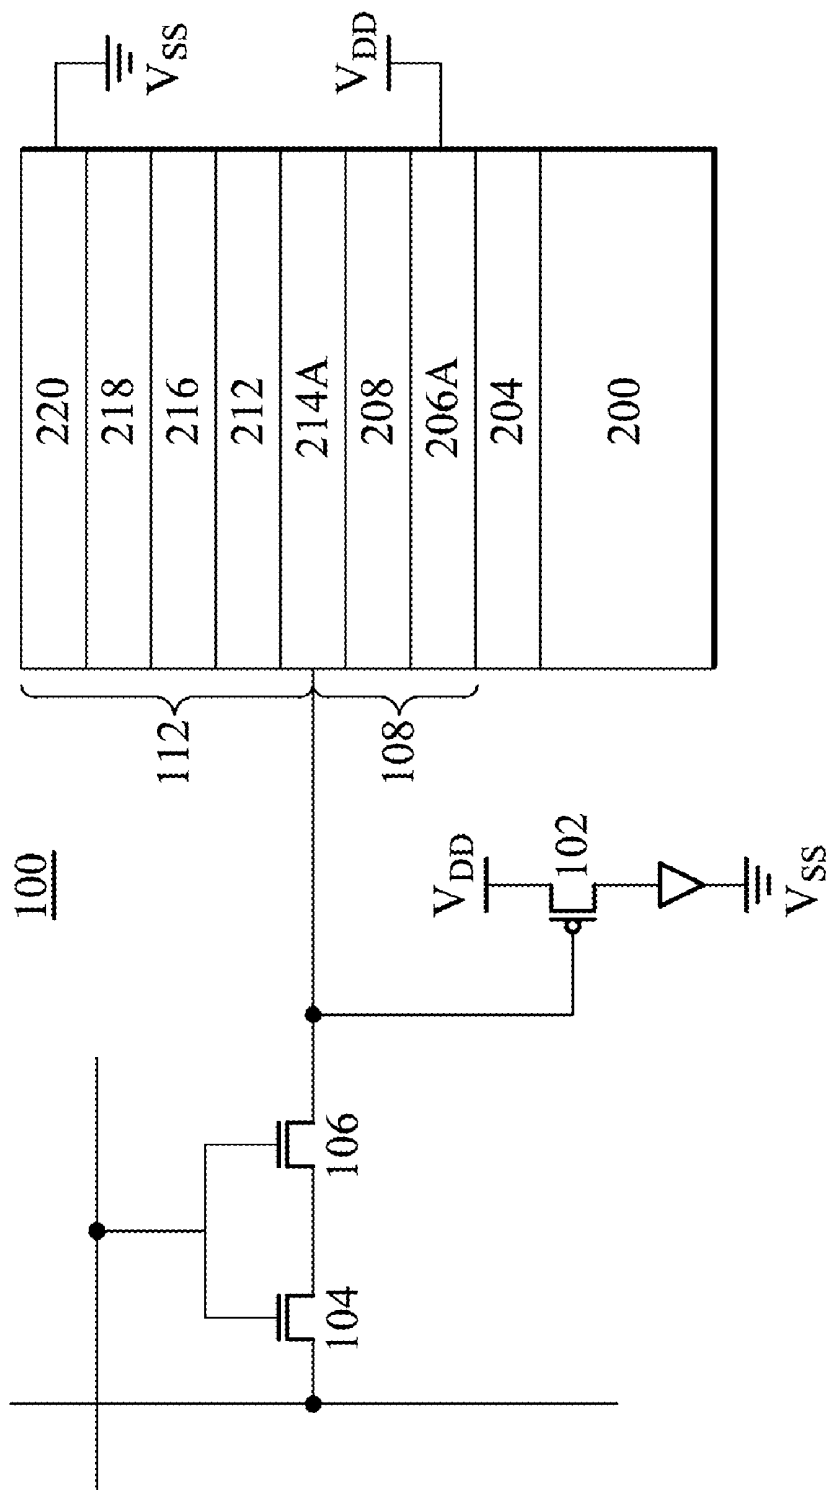


FIG. 6

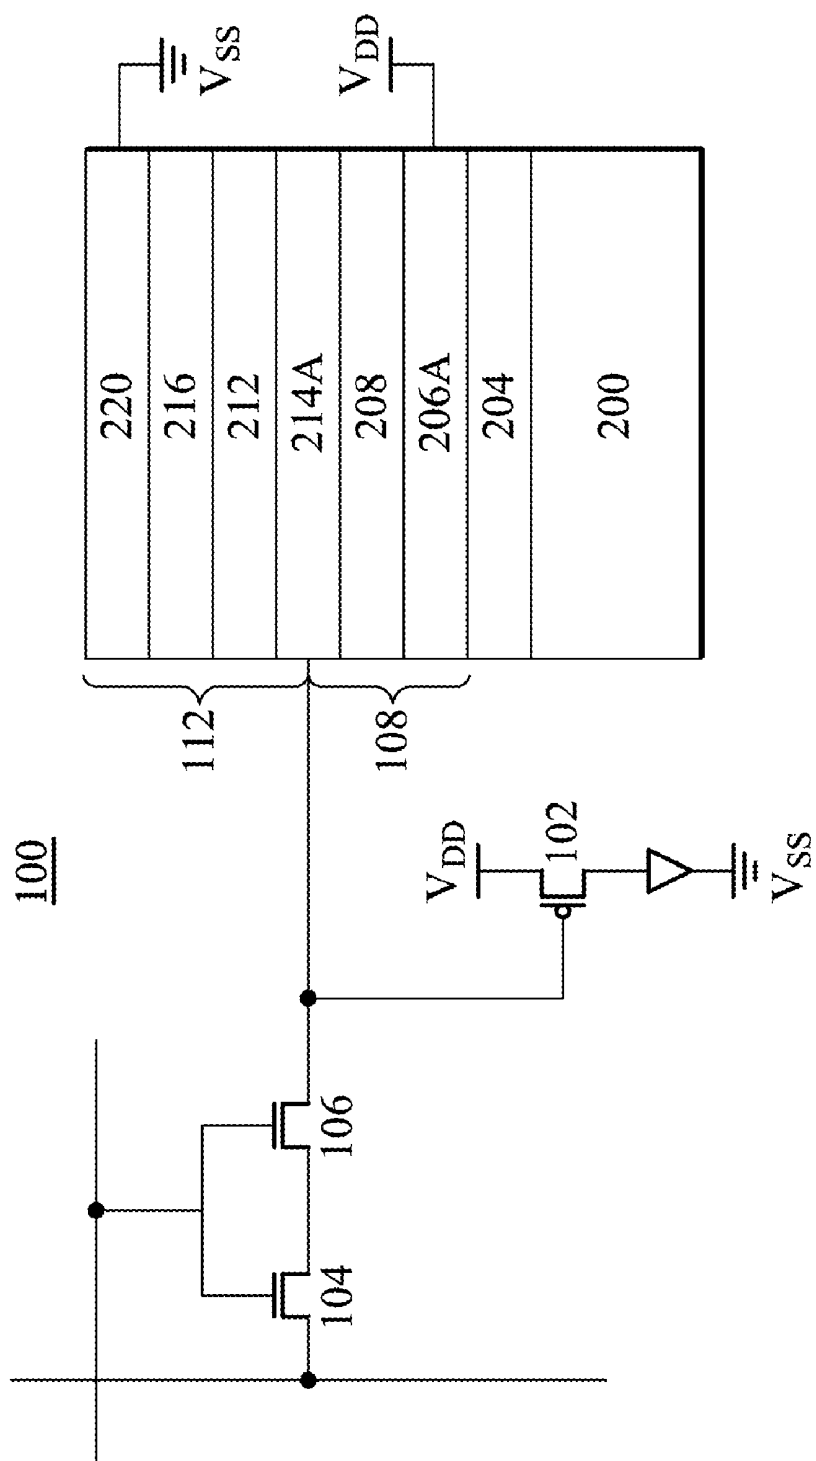


FIG. 7

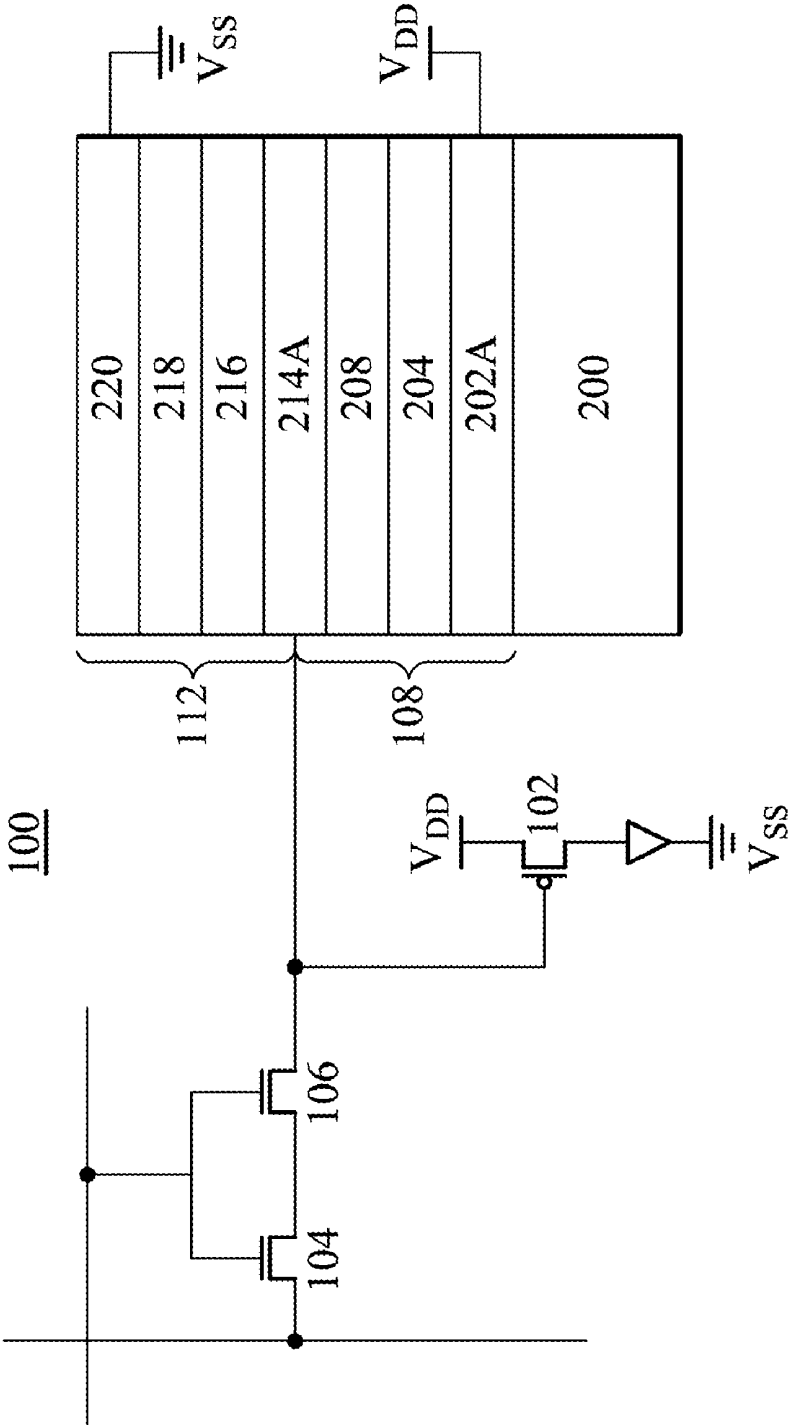


FIG. 8

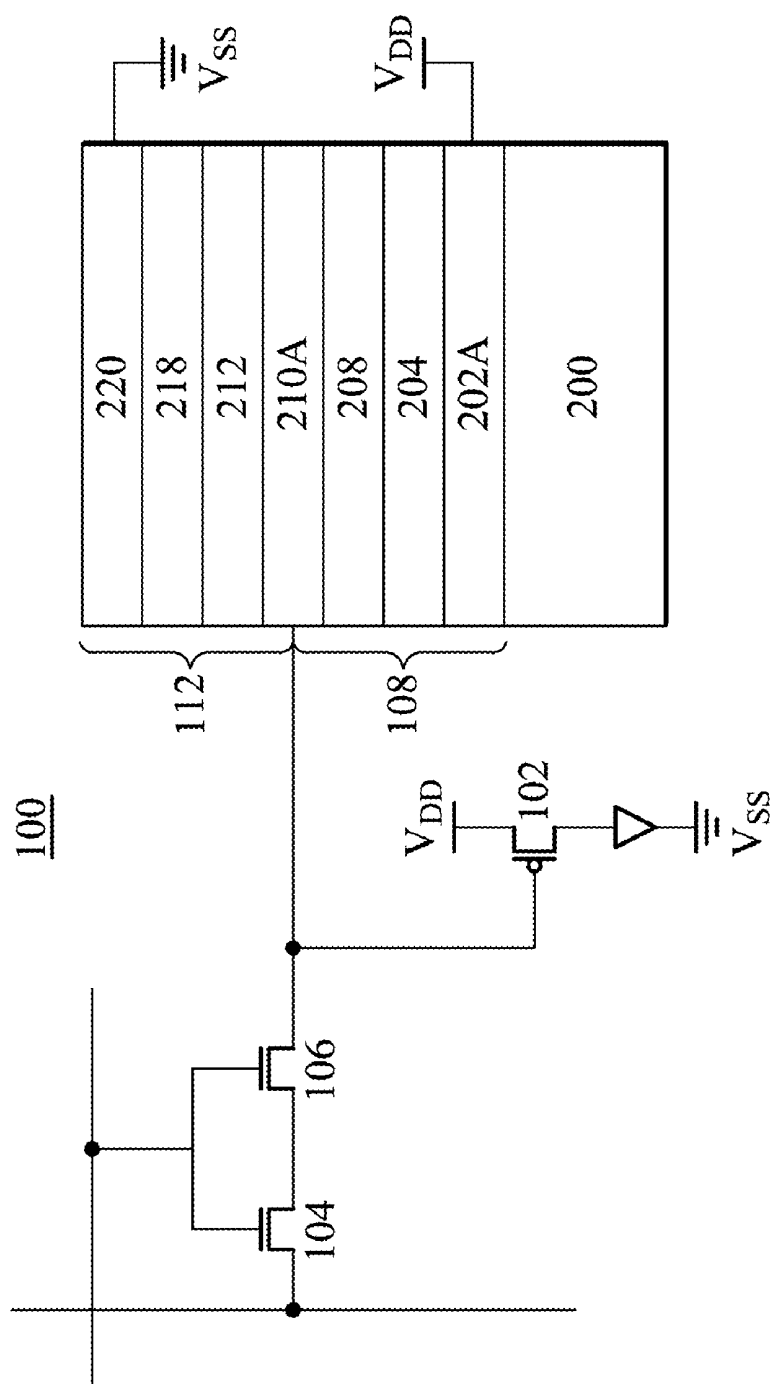


FIG. 9

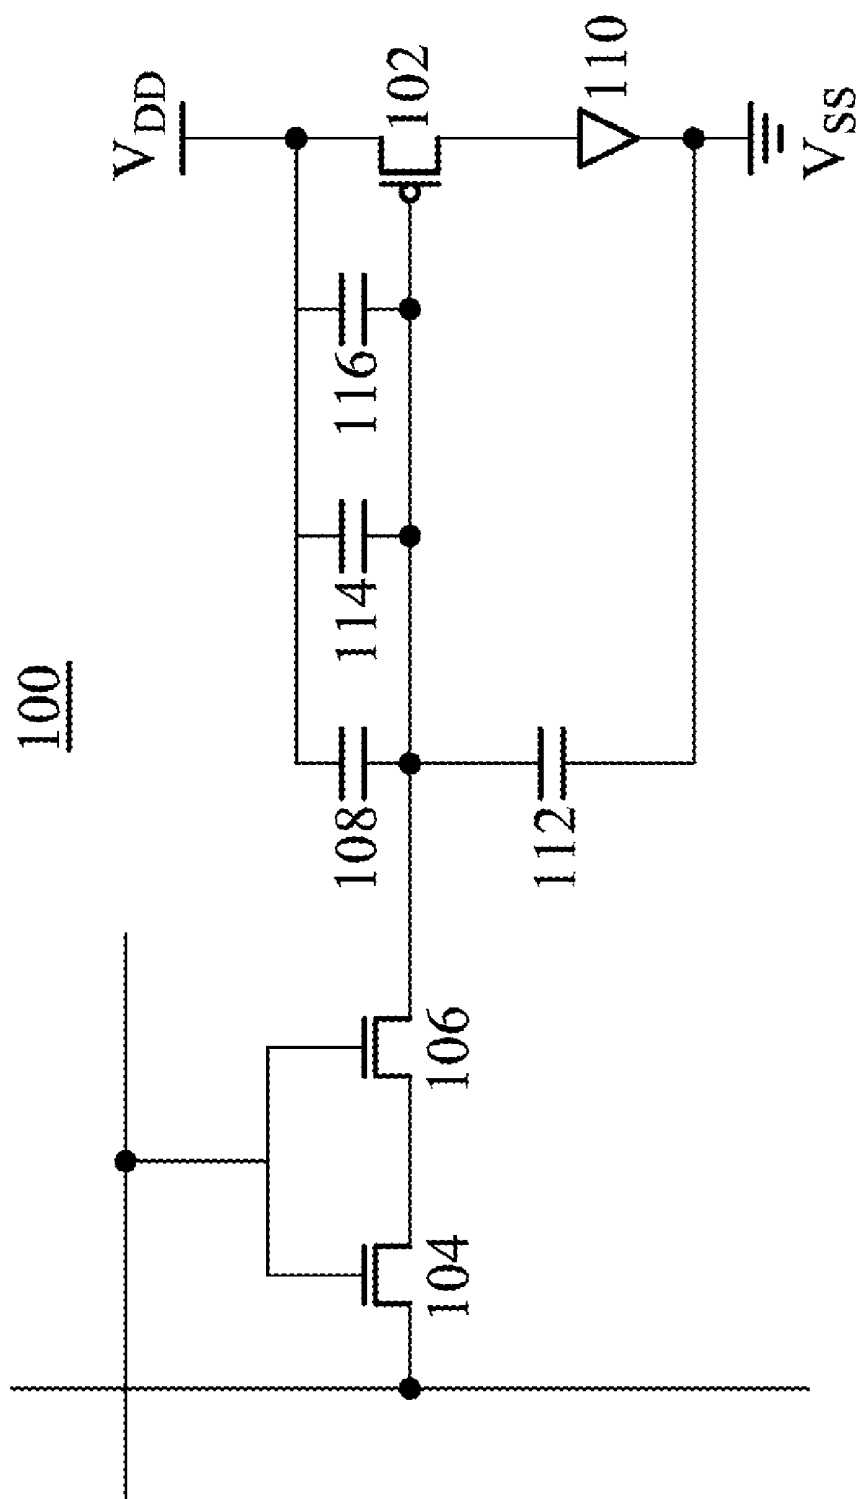


FIG. 10

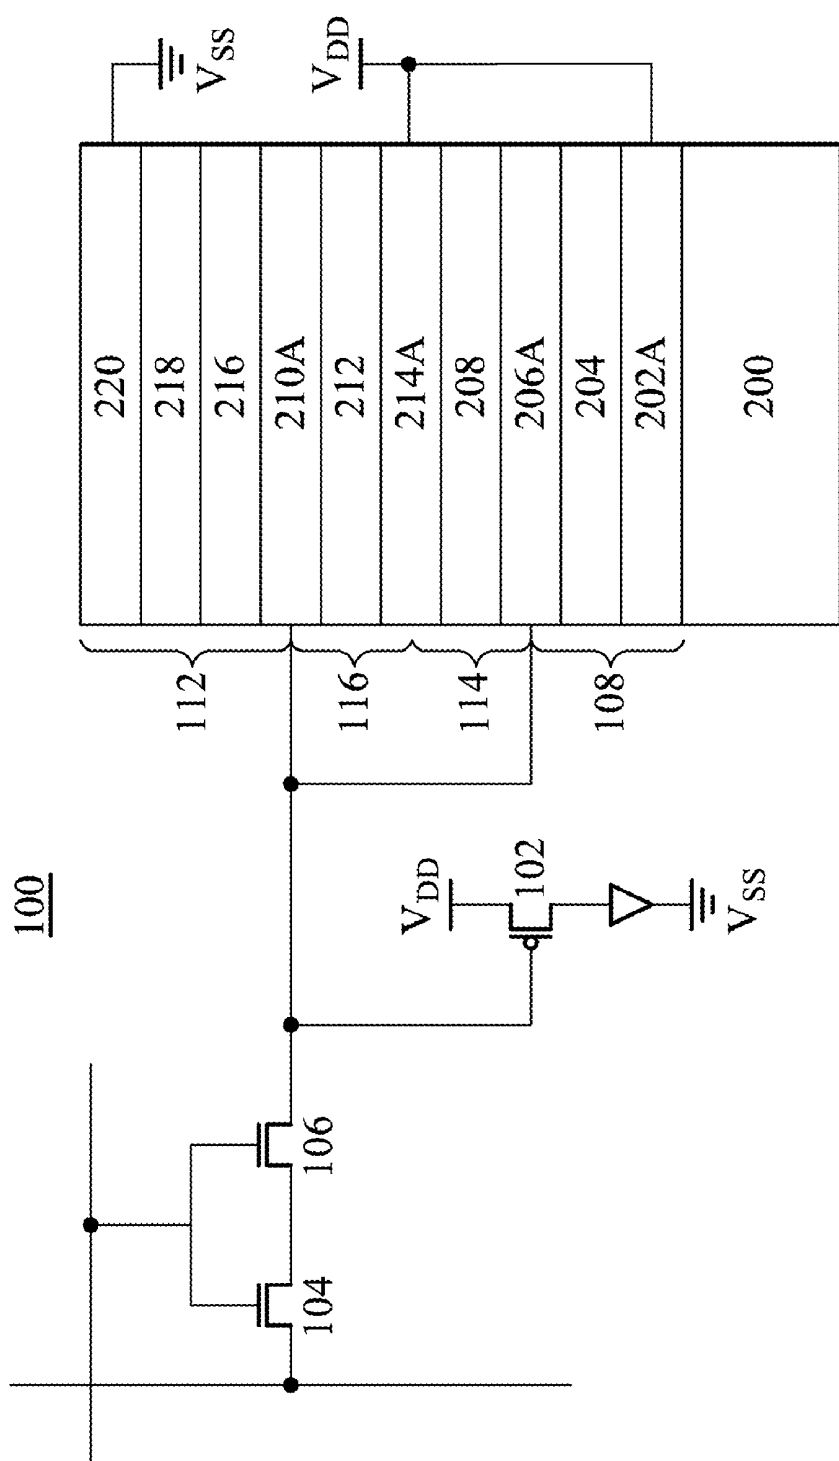


FIG. 11

METHOD FOR FORMING A PIXEL OF AN ELECTROLUMINESCENCE DEVICE HAVING STORAGE CAPACITORS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a divisional of U.S. patent application Ser. No. 13/031,712, filed Feb. 22, 2011, which is a divisional of U.S. patent application Ser. No. 11/616,943, filed Dec. 28, 2006 (now U.S. Pat. No. 7,915,117, issued on Mar. 29, 2011), which is a divisional of U.S. patent application Ser. No. 11/005,648, filed Dec. 7, 2004 (now U.S. Pat. No. 7,586,121, filed Sep. 8, 2009), the entirety of which is incorporated by reference herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] This invention relates in general to an electroluminescence device and, more particularly, to a storage capacitor of an electroluminescence device and a method for forming the storage capacitor.

[0004] 2. Description of the Related Art

[0005] An electroluminescence ("EL") device is a device which makes use of the phenomenon of electroluminescence to emit light. An EL device generally includes thin film transistors ("TFTs") and light-emitting diodes ("LEDs"). Each LED further includes a light-emitting layer. If the light-emitting layer contains organic light-emitting material, the device is referred to as an organic EL device. When a current passes between a cathode and an anode of the LED device, light is emitted from the light-emitting layer.

[0006] Generally, an active matrix organic light emitting diode ("OLED") device or a polymer light emitting diode ("PLED") device, either voltage-driven or current-driven, includes an array of pixels, where each pixel comprises a set of sub-pixels. Each sub-pixel further includes a switching transistor, a driving transistor and a storage capacitor. If charging conditions permit, it is desirable to design a storage capacitor with a large capacitance in order to avoid an issue of gray scale fading due to crosstalk or feed-through effect. For bottom-emission pixels, a storage capacitor having a greater capacitance may disadvantageously result in a smaller aperture ratio. In OLED pixels, thin film transistors, scan lines, data lines and power lines included therein may further reduce the aspect ratio. It is thus desirable to have a storage capacitor that includes improved capacitance in a limited area.

BRIEF SUMMARY OF INVENTION

[0007] Consistent with embodiments of the present invention, there is provided a method for forming a pixel of an electroluminescence device that includes providing a substrate; defining at least a first area for capacitors and a second area for a transistor on the substrate; forming a first conductive layer over the first area; forming a first dielectric layer over the first conductive layer over the first area; forming a second conductive layer over the first dielectric layer over the first area; forming a second dielectric layer over the second conductive layer over the first area; forming a third conductive layer over the second dielectric layer over the first area; forming a layer of capping silicon nitride between the second dielectric layer and the third conductive layer over the first area; forming a semiconductor layer over the second area;

forming a gate oxide layer over the second area; and forming a fourth conductive layer over the gate oxide layer over the second area; wherein the first conductive layer over the first area is connectable to a power supply voltage, and wherein the first conductive layer, the first dielectric layer, and the second conductive layer over the first area collectively form a first one of the capacitors over the first area, the second conductive layer, the second dielectric layer, and the third conductive layer over the first area collectively form a second one of the capacitors over the first area, and the semiconductor layer, the gate oxide layer, and the fourth conductive layer over the second area collectively form a transistor.

[0008] Consistent with embodiments of the present invention, there is also provided a method for forming a pixel of an electroluminescence device that includes providing a substrate; defining at least a first area for capacitors, a second area for a transistor on the substrate and a third area for an organic light-emitting diode (OLED) on the substrate; forming a first conductive layer over the first area; forming a first dielectric layer over the first conductive layer over the first area; forming a second conductive layer over the first dielectric layer over the first area; forming a second dielectric layer over the second conductive layer over the first area; forming a third conductive layer over the second dielectric layer over the first area; forming a semiconductor layer over the second area; forming a gate oxide layer over the second area; forming a fourth conductive layer over the gate oxide layer over the second area; forming the gate oxide over the first area; forming the first conductive layer over the gate oxide, wherein forming the first conductive layer and forming the fourth conductive layer comprise forming the first conductive layer and the fourth conductive layer using the same material, wherein forming the first dielectric layer comprises forming a layer of interlayer dielectric (ILD), and wherein forming the second dielectric layer comprises forming a layer of passivation silicon nitride; forming a fifth conductive layer over the third area; and forming an organic layer over the fifth conductive layer over the third area, wherein the third conductive layer is over the organic layer over the third area, and wherein the fifth conductive layer, the organic layer, and the third conductive layer over the third area collectively form the OLED, wherein the first conductive layer over the first area is connectable to a power supply voltage, and wherein the first conductive layer, the first dielectric layer, and the second conductive layer over the first area collectively form a first one of the capacitors over the first area, the second conductive layer, the second dielectric layer, and the third conductive layer over the first area collectively form a second one of the capacitors over the first area, and the semiconductor layer, the gate oxide layer, and the fourth conductive layer over the second area collectively form a transistor, and wherein forming the second conductive layer and forming the fifth conductive layer comprise forming the second conductive layer and the fifth conductive layer using the same material.

[0009] Consistent with embodiments of the present invention, there is also provided a method for forming a pixel of an electroluminescence device that includes providing a substrate; defining at least a first area for capacitors, a second area for a transistor on the substrate and a third area for an organic light-emitting diode (OLED) on the substrate; forming a first conductive layer over the first area; forming a first dielectric layer over the first conductive layer over the first area; forming a second conductive layer over the first dielectric layer over the first area; forming a second dielectric layer over the

second conductive layer over the first area; forming a third conductive layer over the second dielectric layer over the first area; forming a layer of capping silicon nitride between the second dielectric layer and the third conductive layer over the first area; forming a semiconductor layer over the second area; forming a gate oxide layer over the first area and the second area, wherein the first conductive layer is both over the gate oxide over the first area and over the second area, the first conductive layer providing contact to the semiconductor layer over the second area; forming a fourth conductive layer over the gate oxide layer over the second area; forming a fifth conductive layer over the third area; and forming an organic layer over the fifth conductive layer over the third area, wherein the third conductive layer over the organic layer over the third area, wherein the first conductive layer over the first area is connectable to a power supply voltage, and wherein the first conductive layer, the first dielectric layer, and the second conductive layer over the first area collectively form a first one of the capacitors over the first area, the second conductive layer, the second dielectric layer, and the third conductive layer over the first area collectively form a second one of the capacitors over the first area, and the semiconductor layer, the gate oxide layer, and the fourth conductive layer over the second area collectively form a transistor, and wherein forming the first dielectric layer comprises forming a layer of passivation silicon nitride, forming the second conductive layer and forming the fifth conductive layer comprise forming the second conductive layer and the fifth conductive layer using the same material, and forming the second dielectric layer comprises forming a layer of capping silicon nitride, and wherein the fifth conductive layer, the organic layer, and the third conductive layer over the third area collectively form the OLED.

[0010] Consistent with embodiments of the present invention, there is also provided a method for forming a pixel of an electroluminescence device that includes providing a substrate; defining at least a first area for capacitors, a second area for a transistor on the substrate and a third area for an organic light-emitting diode (OLED) on the substrate; forming a first conductive layer over the first area; forming a first dielectric layer over the first conductive layer over the first area; forming a second conductive layer over the first dielectric layer over the first area; forming a second dielectric layer over the second conductive layer over the first area; forming a third conductive layer over the second dielectric layer over the first area; forming a semiconductor layer over the second area; forming a gate oxide layer over the second area and over the first conductive layer over the first area, wherein forming the first dielectric layer comprises forming an interlayer dielectric over the gate oxide; and forming a fourth conductive layer over the gate oxide layer over the second area; forming a fifth conductive layer over the third area; forming an organic layer over the fifth conductive layer over the third area, wherein forming the second dielectric layer comprises forming the organic layer over the second conductive layer, wherein the third conductive layer is over the organic layer over the third area; wherein the first conductive layer over the first area is connectable to a power supply voltage, and wherein the first conductive layer, the first dielectric layer, and the second conductive layer over the first area collectively form a first one of the capacitors over the first area, the second conductive layer, the second dielectric layer, and the third conductive layer over the first area collectively form a second one of the capacitors over the first area, and the semiconductor layer, the

gate oxide layer, and the fourth conductive layer over the second area collectively form a transistor, and wherein forming the first conductive layer and forming the semiconductor layer comprise forming the first conductive layer and the semiconductor layer using the same semiconductor material which is provided as doped polysilicon, and wherein the fifth conductive layer, the organic layer, and the third conductive layer over the third area collectively form the OLED.

[0011] Additional features and advantages of the invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The features and advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims.

[0012] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as claimed.

BRIEF DESCRIPTION OF DRAWINGS

[0013] The invention can be more fully understood by reading the subsequent detailed description and examples with references made to the accompanying drawings, wherein:

[0014] FIG. 1 is a circuit diagram of a pixel of an electroluminescence device consistent with embodiments of the present invention;

[0015] FIG. 2 is a cross-sectional view of a part of the pixel of FIG. 1 and consistent with a first embodiment of the present invention;

[0016] FIG. 3 is a circuit diagram of a pixel of an electroluminescence device consistent with a second embodiment of the present invention;

[0017] FIG. 4 is a circuit diagram of a pixel of an electroluminescence device consistent with a third embodiment of the present invention;

[0018] FIG. 5 is a circuit diagram of a pixel of an electroluminescence device consistent with a fourth embodiment of the present invention;

[0019] FIG. 6 is a circuit diagram of a pixel of an electroluminescence device consistent with a fifth embodiment of the present invention;

[0020] FIG. 7 is a circuit diagram of a pixel of an electroluminescence device consistent with a sixth embodiment of the present invention;

[0021] FIG. 8 is a circuit diagram of a pixel of an electroluminescence device consistent with a seventh embodiment of the present invention;

[0022] FIG. 9 is a circuit diagram of a pixel of an electroluminescence device consistent with an eighth embodiment of the present invention;

[0023] FIG. 10 is a circuit diagram of a pixel of an electroluminescence device consistent with embodiments of the present invention; and

[0024] FIG. 11 is a circuit diagram of the pixel of FIG. 10, further showing a cross-sectional view of a part of the pixel and consistent with embodiments of the present invention.

DETAILED DESCRIPTION OF INVENTION

[0025] Reference will now be made in detail to embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the

same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0026] An electroluminescence (EL) device may include an array of pixels formed on a substrate such as glass and FIG. 1 shows a circuit diagram of an exemplary pixel **100** consistent with embodiments of the present invention. Pixel **100** includes three MOS transistors **102**, **104**, and **106**, a capacitor **108**, and an OLED **110**. In one aspect, transistor **102** is a p-type MOS transistor and transistors **104** and **106** are n-type MOS transistors. Each of transistors **102**, **104**, and **106** has a gate (not numbered), a source (not numbered), and a drain (not numbered). It is to be understood that an MOS structure is generally symmetrical and therefore the source and drain of the MOS transistors in the descriptions herein and in the following may be interchanged without affecting the functions thereof or the scope of the present invention.

[0027] The gate of transistor **102** is coupled to the source of transistor **106**. The source of transistor **102** is coupled to a power supply voltage V_{DD} . The drain of transistor **102** is coupled to drive OLED **110**. The gates of both transistors **104** and **106** are coupled to a scan line, the drain of transistor **106** is coupled to the source of transistor **104**, and the drain of transistor **104** is coupled to a data line to receive data. Capacitor **108** is coupled between the gate and source of transistor **102**. OLED **110** has an anode coupled to the drain of transistor **102** and a cathode coupled to a power supply voltage V_{SS} . In one aspect, V_{SS} is ground. In operation, capacitor **108** holds a charge when transistors **104** and **106** are turned off, to maintain a voltage between the gate and source of transistor **102** for driving OLED **110**.

[0028] Pixel **100** further includes a capacitor **112** coupled between the gate of transistor **102** and the cathode of OLED **110**. Thus, both capacitors **108** and **112** store charge when transistors **104** and **106** are turned off, to maintain the gate voltage of transistor **102**. In this sense, capacitors **108** and **112** are coupled to each other in parallel and may be collectively viewed as a storage capacitor of pixel **100** whose capacitance is equal to the sum of the capacitances of both capacitors **108** and **112**.

[0029] In one aspect, capacitor **112** is physically formed over the same area of a substrate where capacitor **108** is formed. Therefore, the storage capacitance of pixel **100** is increased without a chip area thereof being increased. In another aspect, capacitor **112** is formed at the same time OLED **110** and other parts of pixel **100** are formed, without requiring additional masks.

[0030] FIG. 2 shows a cross-sectional view of part of pixel **100** consistent with a first embodiment of the present invention. Only a portion of OLED **110**, a portion of transistor **102**, and capacitors **108** and **112** are shown. To simplify illustration, transistors **104** and **106** are not shown in FIG. 2.

[0031] Referring to FIG. 2, pixel **100** is formed on a glass substrate **200**. Capacitors **108** and **112** are shown to be formed over an area A of substrate **200**, transistor **102** is shown to be formed over an area B of substrate **200**, and part of OLED **110** is shown to be formed in an area C of substrate **200**.

[0032] Referring to FIG. 2, a layer of polysilicon is doped and patterned to form a doped polysilicon **202B** and intrinsic polysilicon **202** over area B of substrate **200**. A layer of gate oxide **204** is formed over all of areas A, B, and C. A layer of first metal is deposited over gate oxide **204** and patterned to form first metal patterns **206A** and **206B** over areas A and B, respectively. A layer of interlayer dielectric (ILD) **208** is formed over first metal patterns **206A** and **206B**. A layer of

second metal is deposited over ILD **208** and patterned to form second metal patterns **210A** over area A and **210B** over both areas B and C, wherein second metal pattern **210B** contacts polysilicon pattern **202B** through a via hole (not numbered) in ILD **208** and gate oxide **204**. A layer of passivation silicon nitride (SiN) **212** is formed over ILD **208** and second metal patterns **210A** and **210B**. A layer of indium tin oxide (ITO) is formed over passivation SiN **212** and patterned to form an ITO pattern **214C** over area C of substrate **200**, wherein ITO pattern **214C** contacts second metal pattern **210B** through a via hole (not numbered) in passivation SiN **212**. A layer of capping SiN **216** is deposited to cover passivation SiN **212** and ITO pattern **214C**. A layer of organics **218** is deposited over all of areas A, B, and C. Over area A, capping SiN **216** is also patterned to expose a portion of passivation SiN **212**. Thus, organic **218** is also formed on passivation SiN **212** over area A. A layer of third metal **220** is formed over organic **218**.

[0033] Over area A, first metal pattern **206A**, ILD **208**, and second metal pattern **210A** collectively form capacitor **108**; and second metal pattern **210A**, passivation SiN **212**, organic **218**, and third metal **220** collectively form capacitor **112** (更正). Over area B, polysilicon pattern **202B** provides the source and drain of transistor **102** and first metal pattern **206B** serves as the gate of transistor **102**. Over area C, ITO pattern **214C**, capping SiN **216**, organic **218**, and third metal **220** collectively form part of OLED **110**. Also, first metal pattern **206A** is coupled to power supply voltage V_{DD} , second metal pattern **210A** is coupled to the gate of transistor **102**, i.e., first metal pattern **206B**, and third metal **220** is coupled to V_{SS} .

[0034] As shown in FIG. 2, capacitors **108** and **112** are formed over the same area (area A) of substrate **200**. Therefore, the storage capacitance of pixel **100** is increased without increasing the area of the storage capacitor and, consequently, without decreasing an aperture ratio. Also, one skilled in the art should now appreciate that no additional masks are required to form capacitors **108** and **112**. For example, first metal pattern **206A** may be formed using an existing mask that is required for forming first metal pattern **206B** and second metal pattern **210A** may be formed using an existing mask that is required for forming second metal pattern **210B**.

[0035] In FIG. 2, ITO pattern **214C** is formed over second metal pattern **210B**. However, the layer of ITO may also be deposited and patterned prior to the deposition of the second metal and the formation of second metal patterns **210A** and **210B**. Similarly, passivation SiN **212** may also be deposited prior to the deposition of the second metal and the formation of second metal patterns **210A** and **210B**.

[0036] It is to be understood that the configuration of pixel **100** as shown in FIGS. 1 and 2 is exemplary only. The present invention may be applied to any suitable EL device. For example, a pixel consistent with an aspect of the present invention may include a plurality of capacitors such as capacitors **108** and **112** formed over the same area of a substrate and one or more transistors, but may include no OLED.

[0037] Further, in FIG. 2, capacitor **108** comprises first metal pattern **206A**, ILD **208**, and second metal pattern **210A**, and capacitor **112** comprises second metal pattern **210A**, passivation SiN **212**, organic **218**, and third metal **220**. However, it is to be understood that other layers of materials required for forming pixel **100** may also be used to form capacitors **108** and **112**.

[0038] For example, consistent with a second embodiment of the present invention, organic **218** may be removed from area A, as shown in FIG. 3, which shows a circuit diagram of

pixel 100 and a cross-sectional view of capacitors 108 and 112 consistent with the second embodiment of the present invention. Thus, capacitor 112 comprises second metal pattern 210A, passivation silicon nitride 212, and third metal 220, while capacitor 108 comprises first metal pattern 206A, ILD 208, and second metal pattern 210A. Also, first metal pattern 206A is coupled to power supply voltage V_{DD} , second metal pattern 210A is coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0039] As shown in FIG. 4, which shows a circuit diagram of pixel 100 and a cross-sectional view of capacitors 108 and 112 consistent with a third embodiment of the present invention, both capping SiN 216 and organic 218 may be formed over area A and the layer of ITO may be patterned to form an ITO pattern 214A over area A, while first metal pattern 206A is not formed during the deposition and patterning of the layer of first metal. Thus, capacitor 108 comprises second metal pattern 210A, passivation SiN 212, and ITO pattern 214A; and capacitor 112 comprises ITO pattern 214A, capping SiN 216, organic 218, and third metal 220. Also, second metal pattern 210A is coupled to power supply voltage V_{DD} , ITO pattern 214A is coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0040] FIG. 5 shows a circuit diagram of pixel 100 and a cross-sectional view of capacitors 108 and 112 consistent with a fourth embodiment of the present invention. As shown in FIG. 5, capacitor 108 comprises second metal pattern 210A, passivation silicon nitride 212, and ITO pattern 214A; and capacitor 112 comprises ITO pattern 214A, capping SiN 216, and third metal layer 220. Also, second metal pattern 210A is coupled to power supply voltage V_{DD} , ITO pattern 214A is coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0041] FIG. 6 shows a circuit diagram of pixel 100 and a cross-sectional view of capacitors 108 and 112 consistent with a fifth embodiment of the present invention, wherein the layer of ITO is deposited prior to the deposition of the layer of second metal. As shown in FIG. 6, capacitor 108 comprises first metal pattern 206A, ILD 208, and ITO pattern 214A; and capacitor 112 comprises ITO pattern 214A, passivation silicon nitride 212, capping silicon nitride 216, organic 218, and third metal layer 220. Also, first metal pattern 206A is coupled to power supply voltage V_{DD} , ITO pattern 214A is coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0042] FIG. 7 shows a circuit diagram of pixel 100 and a cross-sectional view of capacitors 108 and 112 consistent with a sixth embodiment of the present invention, wherein the layer of ITO is deposited prior to the deposition of the layer of second metal. As shown in FIG. 7, capacitor 108 comprises first metal 206A, ILD 208, and ITO pattern 214A; and capacitor 112 comprises ITO pattern 214A, passivation silicon nitride 212, capping silicon nitride 216, and third metal layer 220. Also, first metal pattern 206A is coupled to power supply voltage V_{DD} , ITO pattern 214A is coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0043] FIG. 8 shows a circuit diagram of pixel 100 and a cross-sectional view of capacitors 108 and 112 consistent with a seventh embodiment of the present invention. As shown in FIG. 8, the layer of doped polysilicon is also patterned to form a polysilicon pattern 202A over area A of substrate 200. Thus, capacitor 108 comprises polysilicon pat-

tern 202A, oxide 204, ILD 208, and ITO pattern 214A; and capacitor 112 comprises ITO pattern 214A, capping silicon nitride 216, organic 218, and third metal layer 220. Also, polysilicon pattern 202A is coupled to power supply voltage V_{DD} , ITO pattern 214A is coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0044] Further, FIG. 9 shows a circuit diagram of pixel 100 and a cross-sectional view of capacitors 108 and 112 consistent with an eighth embodiment of the present invention. As shown in FIG. 9, capacitor 108 comprises doped polysilicon pattern 202A, oxide 204, ILD 208, and second metal pattern 210A; and capacitor 112 comprises second metal pattern 210A, passivation silicon nitride 212, organic 218, and third metal layer 220. Polysilicon pattern 202A is coupled to power supply voltage V_{DD} , second metal pattern 210A is coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0045] In FIGS. 3-9, both the cross-sectional views of capacitors 108 and 112 and the circuit diagram of pixel 100 are shown and only the structures of capacitors 108 and 112 are discussed in the above. The rest of the circuit of pixel 100 was previously described with reference to FIG. 1 and is not further described herein.

[0046] Also consistent with embodiments of the present invention, more than two capacitors may be formed over the same area (area A) of substrate 200 and connected in parallel with one another. An example of four capacitors is shown in FIGS. 10 and 11, wherein FIG. 10 is a circuit schematic of pixel 100 with four capacitors and FIG. 11 further shows a cross-sectional view of those four capacitors formed over area A of substrate 200. As shown in FIG. 10, in addition to capacitors 108 and 112, two more capacitors 114 and 116 are also coupled between the gate and source of transistor 102. The rest of the circuit diagram is the same as that shown in FIG. 1 and therefore is not further described here. Thus, a storage capacitance of pixel 100 is equal to the sum of capacitors 108, 112, 114, and 116. Referring to FIG. 11, capacitor 108 comprises a doped polysilicon pattern 202A, oxide 204, and first metal pattern 206A; capacitor 114 comprises first metal pattern 206A, ILD 208, and ITO pattern 214A; capacitor 116 comprises ITO pattern 214A, passivation silicon nitride 212, and second metal pattern 210A; and capacitor 112 comprises second metal pattern 210A, capping silicon nitride layer 216, organic 218, and third metal layer 220. Polysilicon pattern 202A and ITO pattern 214A are coupled to V_{DD} , first metal pattern 206A and second metal pattern 210A are coupled to the gate of transistor 102, i.e., first metal pattern 206B, and third metal 220 is coupled to V_{SS} .

[0047] One skilled in the art should appreciate that the formation of capacitors 108, 112, 114, and 116 does not require more masks in addition to those already existing for the formation of pixel 100. For example, doped polysilicon pattern 202A may be formed at the same time doped polysilicon pattern 202B is formed, first metal pattern 206A may be formed at the same time first metal pattern 206B is formed, and ITO pattern 214A may be formed at the same time ITO pattern 214C is formed. Additionally, since all of capacitors 108, 112, 114, and 116 are formed over area A of substrate 200, the area of the storage capacitor of pixel 100 is not increased and, therefore, an aperture ratio is not decreased, while the storage capacitance is significantly increased.

[0048] Other embodiments of the invention will be apparent to those skilled in the art from consideration of the speci-

fication and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims.

[0049] While the invention has been described by way of example and in terms of the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:

1. A method for forming a pixel of an electroluminescence device, comprising:

providing a substrate;
 defining at least a first area for capacitors, a second area for a transistor on the substrate and a third area for an organic light-emitting diode (OLED) on the substrate;
 forming a first conductive layer over the first area;
 forming a first dielectric layer over the first conductive layer over the first area;
 forming a second conductive layer over the first dielectric layer over the first area;
 forming a second dielectric layer over the second conductive layer over the first area;
 forming a third conductive layer over the second dielectric layer over the first area;
 forming a layer of capping silicon nitride between the second dielectric layer and the third conductive layer over the first area;
 forming a semiconductor layer over the second area;
 forming a gate oxide layer over the first area and the second area, wherein the first conductive layer is both over the gate oxide over the first area and over the second area, the first conductive layer providing contact to the semiconductor layer over the second area;
 forming a fourth conductive layer over the gate oxide layer over the second area;
 forming a fifth conductive layer over the third area; and
 forming an organic layer over the fifth conductive layer over the third area, wherein the third conductive layer over the organic layer over the third area,
 wherein the first conductive layer over the first area is directly connected to a power supply voltage, wherein the second conductive layer is electrically connected to the fourth conductive layer and wherein the first conductive layer, the first dielectric layer, and the second conductive layer over the first area collectively form a first one of the capacitors over the first area, the second conductive layer, the second dielectric layer, and the third conductive layer over the first area collectively form a second one of the capacitors over the first area, and the semiconductor layer, the gate oxide layer, and the fourth conductive layer over the second area collectively form a transistor, and
 wherein forming the first dielectric layer comprises forming a layer of passivation silicon nitride, forming the second conductive layer and forming the fifth conductive layer comprise forming the second conductive layer and the fifth conductive layer using the same material, and forming the second dielectric layer comprises forming a layer of capping silicon nitride, and wherein the

fifth conductive layer, the organic layer, and the third conductive layer over the third area collectively form the OLED.

2. The method of claim 1, further comprising forming an interlayer dielectric layer over the gate oxide layer over the first area and forming the first conductive layer over the third dielectric layer.

3. The method of claim 1, further comprising forming the organic layer between the second dielectric and the third conductive layer over the first area.

4. A method for forming a pixel of an electroluminescence device, comprising:

providing a substrate;
 defining at least a first area for capacitors, a second area for a transistor on the substrate and a third area for an organic light-emitting diode (OLED) on the substrate;
 forming a first conductive layer over the first area;
 forming a first dielectric layer over the first conductive layer over the first area;
 forming a second conductive layer over the first dielectric layer over the first area;
 forming a second dielectric layer over the second conductive layer over the first area;
 forming a third conductive layer over the second dielectric layer over the first area;
 forming a semiconductor layer over the second area;
 forming a gate oxide layer over the second area and over the first conductive layer over the first area, wherein forming the first dielectric layer comprises forming an interlayer dielectric over the gate oxide; and
 forming a fourth conductive layer over the gate oxide layer over the second area;
 forming a fifth conductive layer over the third area;
 forming an organic layer over the fifth conductive layer over the third area, wherein forming the second dielectric layer comprises forming the organic layer over the second conductive layer, wherein the third conductive layer is over the organic layer over the third area;
 wherein the first conductive layer over the first area is directly connected to a power supply voltage, wherein the second conductive layer is electrically connected to the fourth conductive layer and wherein the first conductive layer, the first dielectric layer, and the second conductive layer over the first area collectively form a first one of the capacitors over the first area, the second conductive layer, the second dielectric layer, and the third conductive layer over the first area collectively form a second one of the capacitors over the first area, and the semiconductor layer, the gate oxide layer, and the fourth conductive layer over the second area collectively form a transistor, and
 wherein forming the first conductive layer and forming the semiconductor layer comprise forming the first conductive layer and the semiconductor layer using the same semiconductor material which is provided as doped polysilicon, and wherein the fifth conductive layer, the organic layer, and the third conductive layer over the third area collectively form the OLED.

5. The method of claim 4, further comprising forming the second conductive layer over the second area for providing contact to the semiconductor layer.

6. The method of claim 4, wherein forming the second conductive layer and forming the fifth conductive layer com-

prise forming the second conductive layer and the fifth conductive layer using the same material.

7. The method of claim 4, further comprising forming a third dielectric layer between the second conductive layer and the second dielectric layer, wherein the third

8. The method of claim 4, wherein forming the fifth conductive layer comprises forming a layer of indium tin oxide (ITO).

* * * * *

专利名称(译)	形成具有存储电容器的电致发光器件的像素的方法		
公开(公告)号	US20120171787A1	公开(公告)日	2012-07-05
申请号	US13/420225	申请日	2012-03-14
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	SUN WEIN TOWN		
发明人	SUN, WEIN-TOWN		
IPC分类号	H01L51/56		
CPC分类号	H01L27/12 H01L27/3265 H01L27/13		
其他公开文献	US8492222		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种用于形成电致发光器件的像素的方法。该方法提供了一种基板;至少限定电容器的第一区域,基板上的晶体管的第二区域和基板上的有机发光二极管(OLED)的第三区域;在第一区域上形成第一导电层,第一电介质层,第二导电层,第二电介质层和第三导电层;在第一区域上方的第二电介质层上形成第三导电层;其中,第一区域上的第一导电层直接连接到电源电压,其中第二导电层电连接到第四导电层,并且其中第一导电层,第一电介质层和第二导电层在第一区域共同形成第一区域,第二导电层,第二电介质层上的第一电容器。

