



US 20180061918A1

(19) **United States**(12) **Patent Application Publication**
PARK et al.(10) **Pub. No.: US 2018/0061918 A1**(43) **Pub. Date: Mar. 1, 2018**(54) **ORGANIC LIGHT EMITTING DISPLAY
DEVICE****Publication Classification**(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)(72) Inventors: **Jongchan PARK**, Paju-si (KR);
ChangJae JANG, Paju-si (KR);
JungChul KIM, Paju-si (KR); **JaeSik
HWANG**, Gunpo-si (KR); **Minji HAN**,
Iksan-si (KR)(51) **Int. Cl.****H01L 27/32** (2006.01)**H01L 51/52** (2006.01)(52) **U.S. Cl.**CPC **H01L 27/3258** (2013.01); **H01L 51/5253**
(2013.01); **H01L 2227/323** (2013.01); **H01L**
27/3216 (2013.01); **H01L 27/3248** (2013.01);
H01L 51/5206 (2013.01)(21) Appl. No.: **15/603,115**(22) Filed: **May 23, 2017**(30) **Foreign Application Priority Data**


Aug. 31, 2016 (KR) 10-2016-0112120

Dec. 27, 2016 (KR) 10-2016-0179662

(57)

ABSTRACT

An organic light emitting display device is provided according to the present disclosure. An organic light emitting display device comprising a first planarization layer configured to planarize an upper portion of a circuit element on a substrate, an inorganic layer comprising a first out-gassing pattern on the first planarization layer, a second planarization layer configured to planarize an upper portion of the inorganic layer and a metal layer comprising a second out-gassing pattern on the second planarization layer.

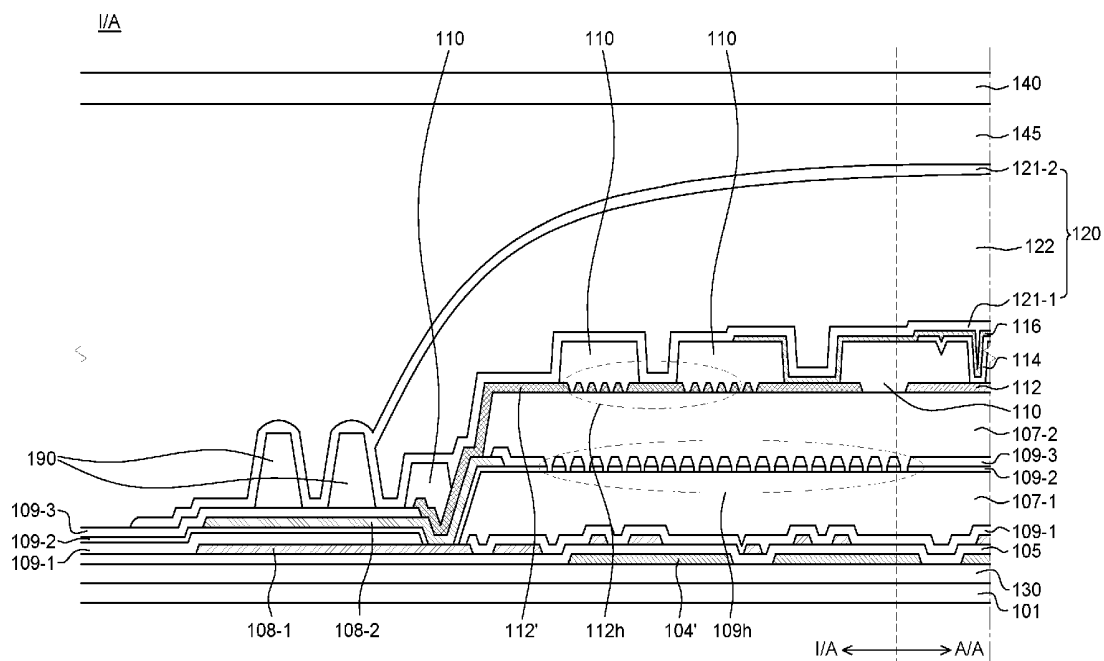

100

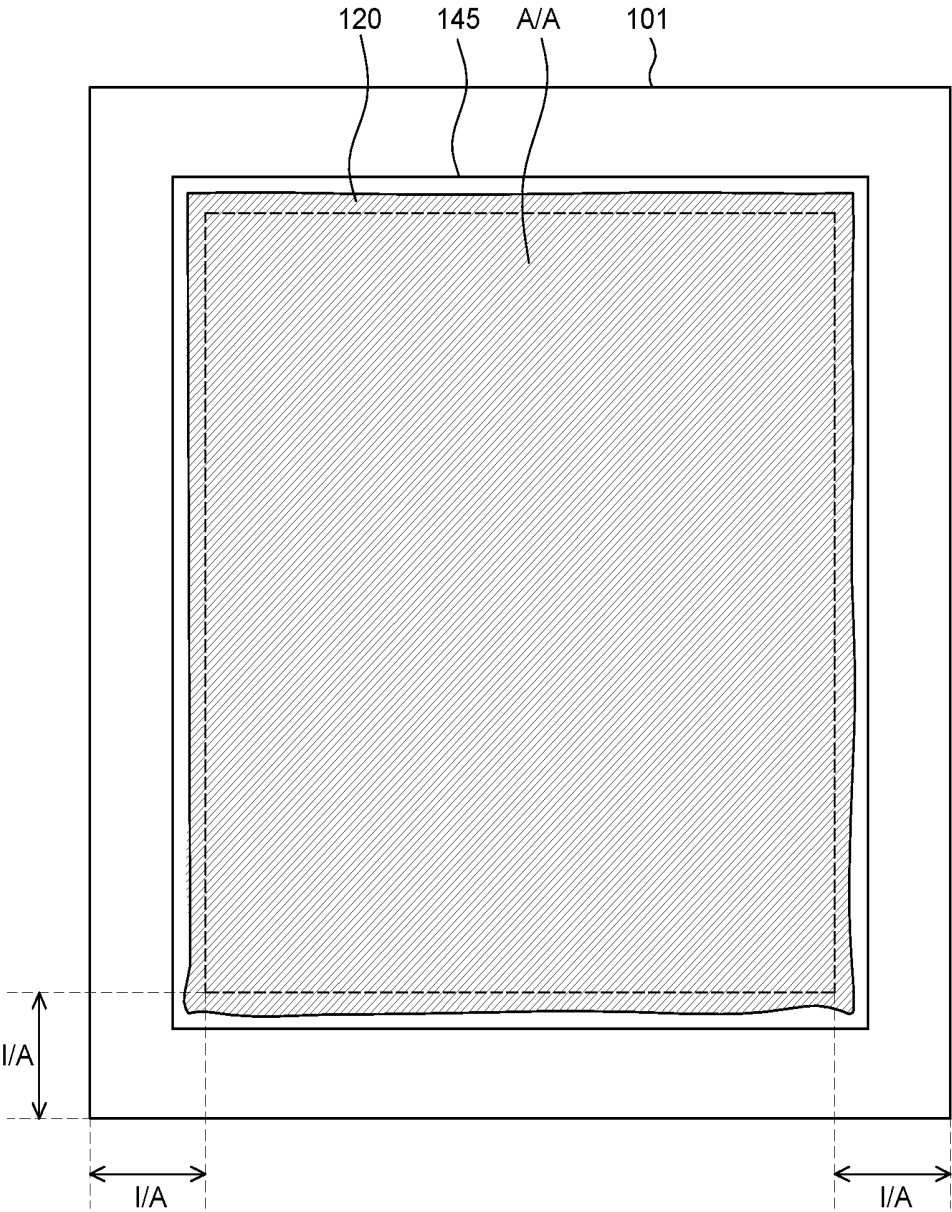


FIG. 1

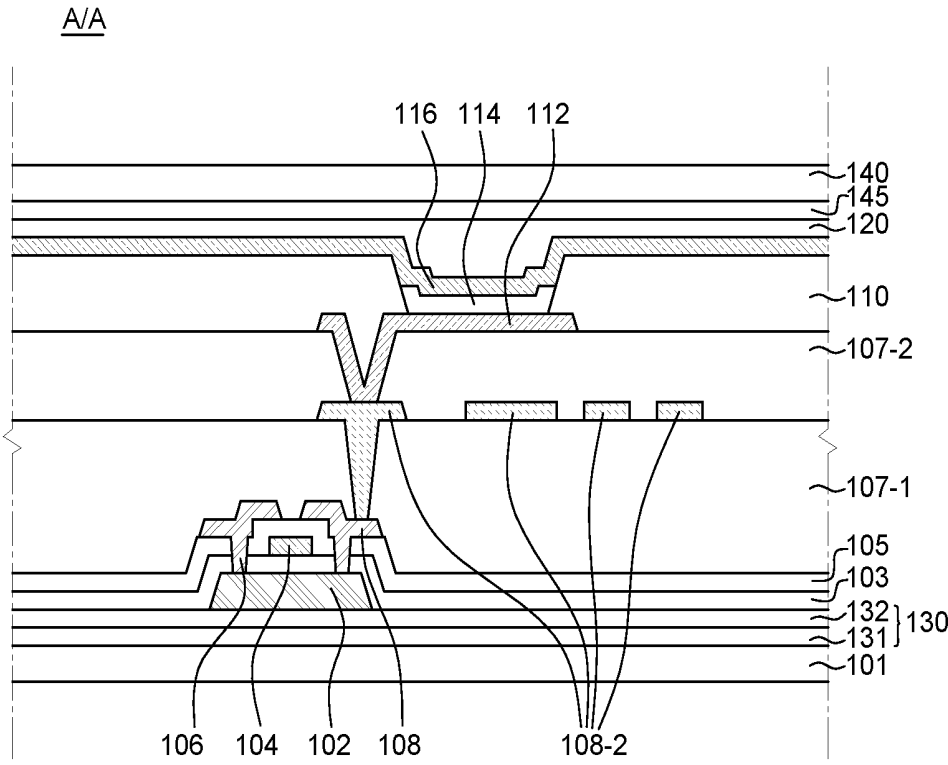


FIG. 2

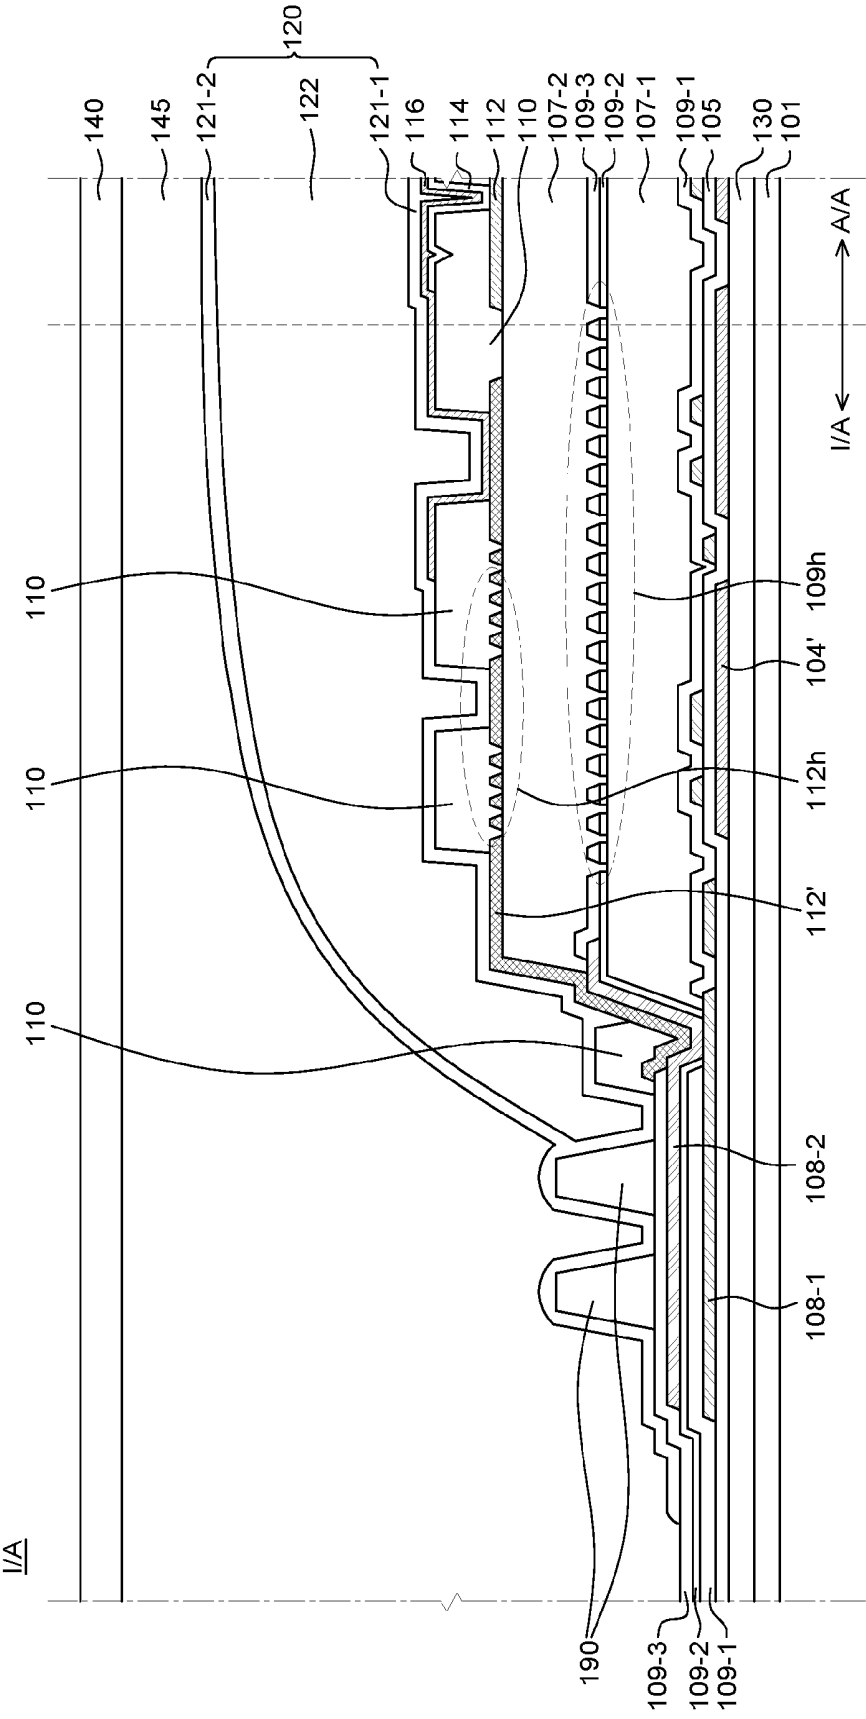


FIG. 3A

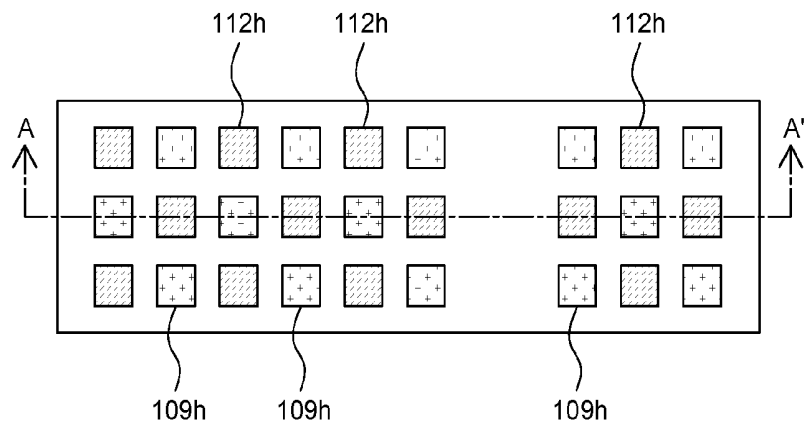


FIG. 3B

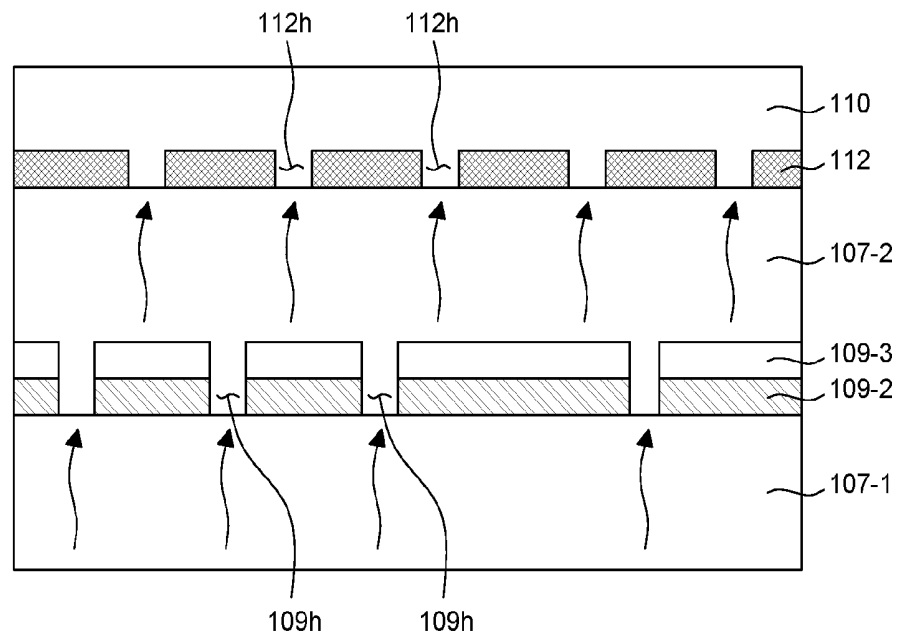


FIG. 3C

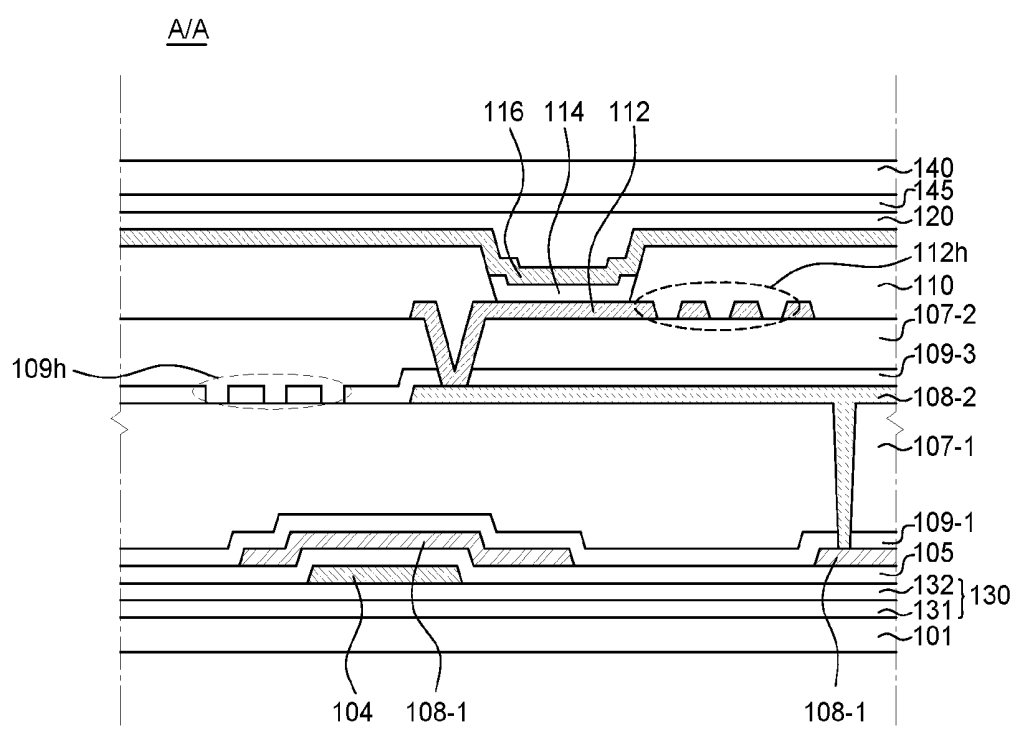


FIG. 4A

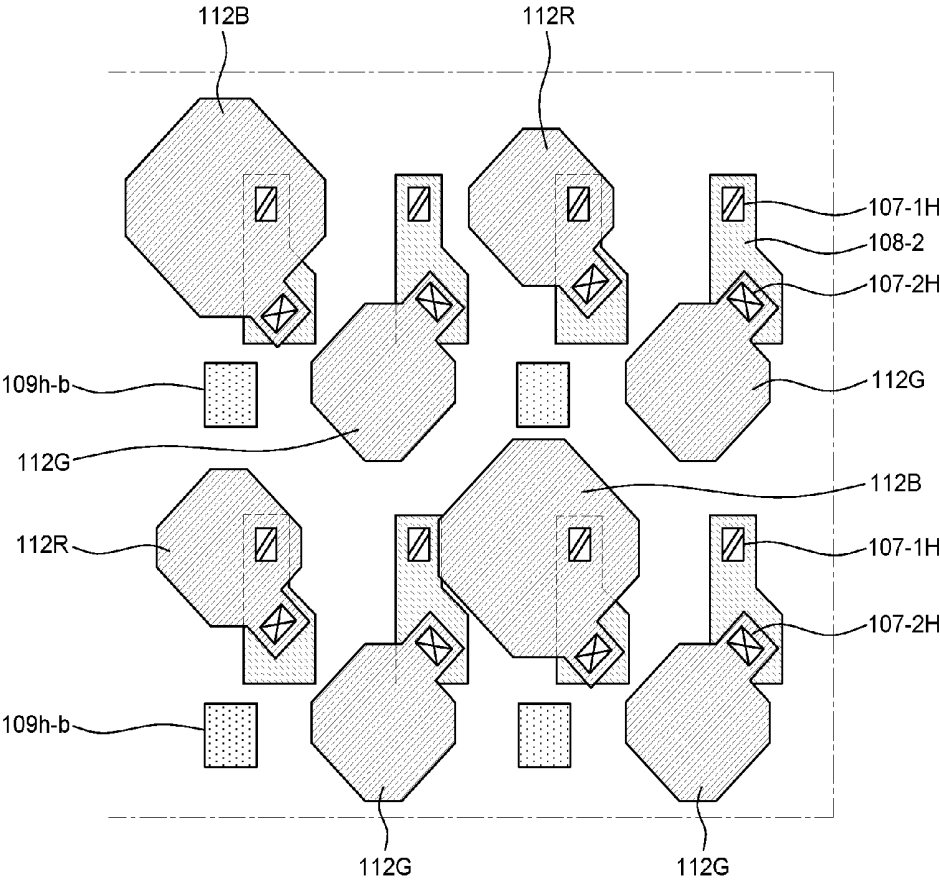


FIG. 4B

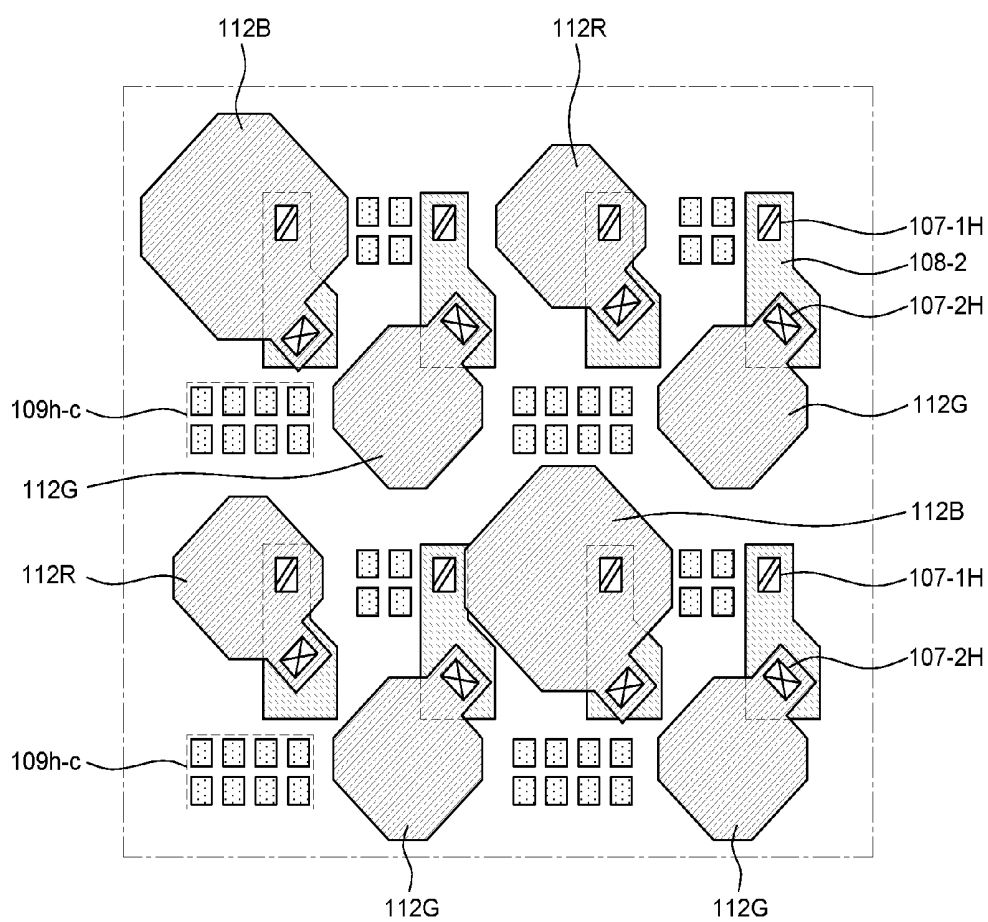


FIG. 4C

ORGANIC LIGHT EMITTING DISPLAY DEVICE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of the Korean Patent Application No. 10-2016-0112120 filed on Aug. 31, 2016 and the Korean Patent Application No. 10-2016-0179662 filed on Dec. 27, 2016, which are both hereby incorporated by reference as if fully set forth herein.

BACKGROUND

Technical Field

[0002] The present disclosure relates to an organic light emitting display device.

Related Technology

[0003] Image display devices that provide various information on the screen is regarded as a core technology of the information and communication age. Such display devices are becoming thinner, lighter, and more portable, while supporting higher performance characteristics. As one example, an organic light emitting display device for displaying an image by controlling the degree of emission of the organic light emitting element has attracted attention.

[0004] The organic light emitting display device is a self-emissive device implementing a thin light emitting layer disposed between electrodes and thus it is advantageous for manufacturing as a thin film. A general organic light emitting display has a structure in which a pixel driving circuit and an organic light emitting element are formed on a substrate, and light emitted from the organic light emitting element passes through the substrate or the barrier layer to display an image.

[0005] Since the organic light emitting display device is implemented without an additional light source, it can be easily implemented as a flexible display device. In such case, a flexible material such as plastic or metal foil can be used as a substrate of an organic light emitting display device.

[0006] Recently, the organic light emitting display device has been developed to support increased display resolution. Accordingly, the required number of signal lines has increased, but the space or footprint for arranging the signal lines has become insufficient. In such a situation, securing a sufficient space for arranging various elements such as signal lines has been regarded as an important goal. Furthermore, a method for solving various difficulties associated with a manufacturing process of the structure, while efficiently arranging various parts and elements, is being developed.

SUMMARY

[0007] An object of the present disclosure is to propose an organic light emitting diode display device and a stacked structure that can be applied to the organic light emitting diode display device. Moreover, another object of the present disclosure is to further apply a structure for effectively out-gassing to the said stacked structure. But the objects of the present disclosure are not limited to the above-men-

tioned objects, and the other objects not mentioned above may be clearly understood by those skilled in the art from the following description.

[0008] According to an embodiment of the present disclosure, an organic light emitting display is provided. The organic light emitting display may include: a first planarization layer configured to planarize an upper portion of a circuit element disposed on a substrate; an inorganic layer including a first out-gassing pattern on the first planarization layer; a second planarization layer configured to planarize an upper portion of the inorganic layer; and a metal layer including a second out-gassing pattern on the second planarization layer.

[0009] According to an embodiment of the present disclosure, a display device is provided. The display device includes a first planarization layer, a first layer on the planarization layer and in contact with the planarization layer, a first outgassing pattern in the first layer, the first outgassing pattern including one or more gas discharge holes, a second planarization layer covering the first layer, a second layer on the second planarization layer and in contact with the second planarization layer, and a second outgassing pattern in the second layer, the second outgassing pattern comprising one or more gas discharge holes. The first layer may comprise two or more layers including a buffer layer and a protective layer, the gas discharge holes extend through the buffer layer and the protective layer. The second layer may be a conductive material. The second layer may be in a same layer as a first electrode of an organic light emitting device. The display device may also include a metal layer on the first planarization layer, wherein the first out-gassing pattern does not overlap with the metal layer. In one aspect, first outgassing pattern does not overlap with any contact holes in the first planarization layer or any contact holes in the second planarization layer. In another aspect, the first outgassing pattern does not overlap with any organic light emitting diode anodes. At least one of the first outgassing pattern and the second outgassing pattern may be in an inactive area of the display device. At least one of the first outgassing pattern and the second outgassing pattern may be in an active area of the display device. In one aspect, the second outgassing pattern does not overlap with the first outgassing pattern.

[0010] The details of other embodiments are included in the detailed description and drawings.

[0011] An organic light emitting display, adopting a residual gas exhaust structure, thereby improving the image quality deterioration problem due to residual gas, can be provided according to the embodiments of the present disclosure. More particularly, an organic light emitting display, which mitigates display quality deterioration problems due to damaged organic light emitting layer by residual gas, is provided according to the embodiments of the present disclosure. Accordingly, the organic light emitting display according to the embodiments of the present disclosure can achieve high resolution with improved display quality. The effects according to the embodiments of the present disclosure are not limited by the contents described above, and more various effects are included in the detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The above and other aspects, features and other advantages of the present disclosure will be more clearly

understood from the following detailed description taken in conjunction with the accompanying drawings.

[0013] FIG. 1 is a plan view of an organic light emitting display according to an embodiment of the present disclosure.

[0014] FIG. 2 is a cross-sectional view illustrating a portion of an active area of an organic light emitting display device according to an embodiment of the present disclosure.

[0015] FIG. 3A to 3C are cross-sectional views illustrating an out-gassing structure applied to an inactive area of a display device according to an embodiment of the present disclosure.

[0016] FIG. 4A to 4C are cross-sectional views illustrating an out-gassing structure applied to an active area of a display device according to an embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE PRESENT DISCLOSURE

[0017] Advantages and features of the present disclosure and methods for accomplishing the same will be more clearly understood from exemplary embodiments described below with reference to the accompanying drawings. However, the present disclosure is not limited to the following exemplary embodiments but may be implemented in various different forms. The exemplary embodiments are provided only to complete disclosure of the present disclosure and to fully provide a person having ordinary skill in the art to which the present disclosure pertains with the category of the invention and the present invention will be defined by the appended claims.

[0018] The shapes, sizes, ratios, angles, numbers and the like illustrated in the accompanying drawings for describing the exemplary embodiments of the present disclosure are merely examples and the present disclosure is not limited thereto. Like reference numerals generally denote like elements throughout the present specification. Further, in the following description, a detailed explanation of certain related technologies may be omitted to avoid unnecessarily obscuring the subject matter of the present disclosure. The terms such as “including”, “having”, “comprising” and “consist of” used herein are generally intended to allow other components to be added unless the terms are used with the term “only”. Any references to singular may include plural unless expressly stated otherwise. Components are interpreted to include an ordinary error range or an ordinary tolerance range even if not expressly stated.

[0019] When the position relation between two parts is described using the terms such as “on”, “above”, “below” and “next”, one or more parts may be positioned between the two parts unless the terms are used with the term “immediately” or “directly”. When an element or layer is referred to as being “on” another element or layer, it may be directly on the other element or layer, or intervening elements or layers may be present. When an element is described as being “connected”, “coupled”, or “in contact with” to another element, the element may be directly connected or directly in contact with, however, it should be understood that other elements may be interposed between the elements, or each element may be “connected”, “coupled”, or “in contact with” by another element.

[0020] Although the terms “first”, “second” and the like are used for describing various components, these components

are not confined by these terms. These terms are merely used for distinguishing one component from the other components. Therefore, a first component to be mentioned below may be a second component in a technical concept of the present disclosure.

[0021] Since size and thickness of each element illustrated in the drawings are represented merely for convenience in explanation, and the present disclosure is not necessarily limited to the illustrated size and thickness of each element. Various exemplary embodiments of the present disclosure will be described in detail with reference to the accompanying drawings below.

[0022] FIG. 1 is a plan view of an organic light emitting display according to an embodiment of the present disclosure.

[0023] Referring to FIG. 1, the organic light emitting display device 100 includes at least one active area A/A, and an array of pixels is disposed in the active area. At least one inactive area I/A may be disposed adjacent to the active area. That is, the inactive area may be adjacent to at least one side of the active area. In FIG. 1, the inactive area surrounds the active area having a rectangular shape. However, the shape of the active area, the shape and the arrangement of the inactive area adjacent to the active area are not limited to the example as illustrated in FIG. 1. The active area and the inactive area may be designed suitable for an electronic device on which the display device 100 is implemented. The exemplary shapes of the active area may be pentagonal, hexagonal, circular, oval, and the like.

[0024] Each pixel in the active area A/A may be associated with a pixel driving circuit. The pixel driving circuit may include at least one switching transistor and at least one driving transistor. Each pixel driving circuit may be electrically connected to a signal line (e.g., a gate line, a data line, and the like) for communicating with a gate driver, a data driver, and the like located in the inactive area.

[0025] The gate driver and the data driver may be formed of a thin film transistor (TFT) in the inactive area I/A. Such drivers may be referred to as gate-in-panel (GIP). In addition, some components, such as a data driver IC, may be mounted on a separate printed circuit board. The components may be coupled to a connection interface (e.g., pads, bumps, pins, and the like) disposed in the inactive area by circuit films (e.g., flexible printed circuit boards (FPCB), chip-on-film (COF), tape-carrier-package (TCP), and the like). The printed circuit (e.g., COF, PCB, and the like) may be positioned on the rear side of the display device 100.

[0026] The organic light emitting display device 100 may include various additional elements for generating various signals or driving pixels in the active area. Additional elements for driving the pixel may include an inverter circuit, a multiplexer, an electrostatic discharge circuit (ESD), and the like. The organic light emitting display device 100 may also include additional elements associated with functions other than pixel driving function.

[0027] For example, the organic light emitting diode display 100 may include additional elements for providing touch sensing function, user authentication function (e.g., fingerprint recognition), multi-level pressure sensing function, tactile feedback function, and the like. The above-mentioned additional elements may be located in the inactive area and/or an external circuit connected to the connection interface.

[0028] The organic light emitting display according to the present disclosure may include a substrate **101** on which a thin film transistor and an organic light emitting element are arranged, an encapsulation layer **120**, a polarization layer **145**, and the like.

[0029] The substrate **101** supports various elements of the organic light emitting diode display device **100**. The substrate **101** may be formed of a transparent insulating material, for example, an insulating material such as glass, plastic, or the like. The concept of the substrate (i.e., an array substrate) may also be interpreted so as to include an element and a functional layer formed thereon, for example, a switching TFT, a driving TFT connected to the switching TFT, an organic light emitting element connected to the driving TFT, a protective layer and the like.

[0030] The organic light emitting element is disposed on the substrate **101**. The organic light emitting element includes an anode, an organic light emitting layer, and a cathode. The organic light emitting element may be configured as a single light emitting layer structure so as to emit red, green or blue light or may be configured as multiple light emitting layers so as to emit a white light. When the organic light emitting element emits the white light, a color filter may further be provided to filter the white light into red green or blue light. The organic light emitting element may be formed in the central portion of the substrate **101** to correspond to the active area.

[0031] The encapsulation layer **120** may cover the organic light emitting element. The encapsulation layer protects the organic light emitting element from external moisture or oxygen.

[0032] The organic light emitting display device **100** may be configured of a plurality of pixels, and one pixel may include a plurality of sub-pixels. In such case, the sub-pixel is the minimum unit for expressing one color.

[0033] One sub-pixel may include a plurality of transistors, a capacitor, and a plurality of lines. The sub-pixel may be configured of two transistors and one capacitor (i.e., 2T1C), but it is not limited thereto and may be implemented as a sub-pixel configured of 4T1C, 7T1C, 6T2C, and the like. In addition, the sub-pixel may be implemented to be suitable for the organic light emitting display device **100** of the top emission type.

[0034] FIG. **2** is a cross-sectional view illustrating a portion of an active area of an organic light emitting display device according to an embodiment of the present disclosure.

[0035] The organic light emitting diode display of FIG. **2** has an exemplary structure in which two planarization layers are configured. In the organic light emitting display device **100**, thin film transistor elements **102**, **104**, **106** and **108**, organic light emitting elements **112**, **114** and **116** and various functional layers are disposed on a substrate (or an array substrate).

[0036] The substrate **101** may be a glass or plastic substrate. In the case of a plastic substrate, a polyimide-based material or a polycarbonate-based material may be used to have flexibility. In particular, polyimide, can be applied to a high-temperature process, is a material that can be coated, and thus is widely used as a plastic substrate.

[0037] The buffer layer **130** is a functional layer for protecting the electrode/signal line from impurities such as alkali ions or the like flowing out from the substrate **101** or lower layers. The buffer layer may be formed of silicon

oxide (SiOx), silicon nitride (SiNx), or a multilayer thereof. The buffer layer **130** may include a multi-buffer **131** and/or an active buffer **132**. The multi-buffer **131** may be formed by alternately stacking silicon nitride (SiNx) and silicon oxide (SiOx), and may delay diffusion of moisture and/or oxygen impregnated into the substrate **101**. The active buffer **132** protects the semiconductor layer **102** of the transistor and functions to block various kinds of defects introduced from the substrate **101**. The active buffer **132** may be formed of amorphous silicon (a-Si) or the like.

[0038] The thin film transistor may be in the form in which the semiconductor layer **102**, the gate insulating film **103**, the gate electrode **104**, the interlayer insulating film **105**, and the source and drain electrodes **106** and **108** are sequentially stacked. The semiconductor layer **102** is on the buffer layer **130**. The semiconductor layer **102** may be made of polysilicon (p-Si), in such case, a predetermined area may be doped with an impurity. In addition, the semiconductor layer **102** may be made of amorphous silicon (a-Si), or may be made of various organic semiconductor materials such as pentacene. Further, the semiconductor layer **102** may be made of an oxide substance. The gate insulating film **103** may be formed of an insulating inorganic material such as silicon oxide (SiOx) or silicon nitride (SiNx), or may be formed of an insulating organic material or the like. The gate electrode **104** may be formed of various conductive materials such as magnesium (Mg), aluminum (Al), nickel (Ni), chrome (Cr), molybdenum (Mo), tungsten (W) or the like.

[0039] The interlayer insulating film **105** may be formed of an insulating material such as silicon oxide (SiOx) or silicon nitride (SiNx), or may be formed of an insulating organic material or the like. A contact hole, in which the source and drain areas are exposed, may be formed by selectively removing the interlayer insulating film **105** and the gate insulating film **103**.

[0040] The source and drain electrodes **106** and **108** are formed of an electrode material on the interlayer insulating film **105** as a single layer structure or a multi-layer structure. A passivation layer made of an inorganic insulating material may cover the source and drain electrodes **106** and **108** as needed.

[0041] The first planarization layer **107-1** may be on the thin film transistor. The first planarization layer **107-1** protects the thin film transistor and the like and flattens the upper portion thereof. The first planarization layer **107-1** may be formed in various shapes and may be formed of at least one material among the materials such as an acrylic resin, an epoxy resin, a phenol resin, a polyamide resin, a polyimide resin, an unsaturated polyester resin, a polyphenylene resin, and a polyphenylene sulfide-based resin, but the materials are not limited thereto. Various metal layers **108-2** serving as signal lines/electrodes may be disposed on the first planarization layer **107-1**.

[0042] The second planarization layer **107-2** is on the first planarization layer **107-1**. The reason why the embodiment of the present disclosure includes two planarization layers is that the number of various signal lines are increased as the display device evolves so as to realize a high resolution. Therefore, it becomes more difficult to ensure the minimum gap when arranging all the signal lines in one layer. Consequently, the additional layer is made. This additional layer (i.e., second planarization layer) may provide a sufficient margin for signal line arrangement, which makes it easier to design the layout of the signal lines/electrodes. Further, if a

dielectric material is used to form the planarization layers **107-1** and **107-2**, the planarization layers **107-1** and **107-2** may be configured to form a capacitance between the metal layers.

[0043] The organic light emitting element may have a structure in which the first electrode **112**, the organic light emitting layer **114**, and the second electrode **116** are sequentially stacked. That is, the organic light emitting element includes a first electrode **112** on the second planarization layer **107-2**, an organic light emitting layer **114** on the first electrode **112**, and a second electrode **116** on the organic light emitting layer **114**.

[0044] The first electrode **112** may be electrically connected to the drain electrode **108** of the driving TFT through the connection electrode **108-2**. When the organic light emitting display device **100** is a top emission type, the first electrode **112** may be made of an opaque conductive material having a high reflectivity. For example, the first electrode **112** may be formed of silver (Ag), aluminum (Al), gold (Au), molybdenum (Mo), tungsten (W), chromium (Cr), alloy thereof and the like.

[0045] The bank **110** may be formed in the remaining region except for the light emitting region. Accordingly, the bank **110** has a bank hole for exposing the first electrode **112** corresponding to the light emitting region. The bank **110** may be made of an inorganic insulating material such as a silicon nitride film (SiNx), a silicon oxide film (SiOx), or an organic insulating material such as BCB, acrylic-based resin or imide-based resin.

[0046] The organic light emitting layer **114** is on the first electrode **112** which is exposed by the bank **110**. The organic light emitting layer **114** may include a light emitting layer, an electron injection layer, an electron transport layer, a hole transport layer, a hole injection layer, and the like. One or more of these layers may be combined into a single layer. Alternatively, one or more functionalities may be combined into a particular layer.

[0047] The second electrode **116** is on the organic light emitting layer **114**. When the organic light emitting display device **100** is a top emission type, the second electrode **116** may be a transparent conductive layer such as indium tin oxide (ITO) or indium zinc oxide (IZO), thereby emitting the light generated from the organic light emitting layer **114** towards to the second electrode **116**.

[0048] The encapsulation layer **120** may be on the second electrode **116**. The encapsulation layer **120** is configured to prevent oxygen and moisture permeation in order to suppress oxidation of the light emitting element and the electrode. When the organic light emitting element is exposed to moisture or oxygen, a pixel shrinkage phenomenon may occur in which the light emitting region is shrunk, or a dark spot may be generated in the light emitting region. The encapsulation layer may be made of an inorganic layer made of glass, metal, aluminum oxide (AlOx) or silicon (Si) based material, or alternatively, an organic layer and an inorganic layer may be alternately stacked. The inorganic layer serves to block permeation of moisture and oxygen, and the organic film serves to provide the planarized surface for the inorganic layer. One of the reason why the encapsulation layer is formed of a plurality of thin film layers is that it makes the permeation path of water or oxygen longer and more complicated than the single layer, hence it makes penetration of moisture and oxygen into the organic light emitting element more difficult.

[0049] A touch panel (e.g., a touch film), a polarization layer **145**, a cover glass **140**, and the like may be further disposed on the encapsulation layer **120**.

[0050] FIG. 3A to 3C are cross-sectional views illustrating an out-gassing structure applied to an inactive area of a display device according to an embodiment of the present disclosure.

[0051] FIG. 3A to 3C and FIG. 1 and FIG. 2 denote the same reference numerals with respect to the substantially the same elements, and thus, redundant features may be omitted merely for the sake of brevity.

[0052] As illustrated in said figures, the inactive area I/A may be located outside the active area A/A and a driving circuit (e.g., GIP), a power supply line and the like may be disposed thereon. Further, the inactive area may include structures **109h** and **112h** that allow out-gassing of residual gas from certain materials or layers within the display device.

[0053] The electrode/line connected to the driving circuit disposed in the inactive area can be made by the gate metal **104'**, the source/drain metal **108-1** and **108-2**. The gate metal **104'** is formed in the same process with the same material as the gate electrode of the TFT, and the source/drain metals **108-1** and **108-2** are formed in the same process with the same material as the source/drain electrodes of the TFT.

[0054] On the other hand, electric power can be supplied to the cathode **116** through the connection with the source/drain metals **108-1** and **108-2** and the anode metal **112'**. Such connection structure is illustrated on the left side of FIG. 3A.

[0055] In an exemplary embodiment, the planarization layers are provided with two layers **107-1** and **107-2**. Such design is to accommodate the structure with a greater number of signal lines for achieving a high resolution display as described above.

[0056] The first planarization layer **107-1** flattens the upper surface of various circuit elements (e.g., thin film transistors, capacitors, conductors, etc.) on the substrate. A protective layer **109-1** made of an inorganic material may be disposed between the first planarization layer **107-1** and the circuit element. On the first planarization layer **107-1**, various functional metal layers may be disposed. In such case, inorganic layers **109-2** and **109-3** for passivation of the metal layers may be provided on the first planarization layer **107-1**. The inorganic layers **109-2** and **109-3** may be in contact with the first planarization layer **107-1**. For example, the inorganic layer may include a buffer layer **109-2** and a protective layer **109-3**. That is, the metal layer may be disposed on the buffer layer **109-2** and covered by the protective layer **109-3**.

[0057] The organic light emitting element **112**, **114**, and **116** may be disposed on the second planarization layer **107-2**. In such case, a metal layer **112'** connected to the organic light emitting element may be disposed on the second planarization layer **107-2**.

[0058] The encapsulation layer **120** covers the upper portion of the organic light emitting element. The encapsulation layer may be made of an inorganic layer made of glass, metal, aluminum oxide (AlOx) or silicon (Si) based material, or alternatively may have a structure in which an organic layer and an inorganic layer are alternately stacked. FIG. 3A illustrates an encapsulation layer **120** in which inorganic layers **121-1** and **121-2** and an organic layer **122** are alternately stacked. The inorganic layers **121-1** and **121-2** serve to suppress permeation of moisture and oxygen, and the organic layer **122** serves to planarize the surfaces of

the inorganic layers **121-1** and **121-2**. The reason why the encapsulation layer is formed of a plurality of thin film layers is that it makes the permeation path of water or oxygen longer and more complicated than the single layer, hence it makes penetration of moisture and oxygen into the organic light emitting element more difficult.

[0059] The organic layer **122** has a certain degree of flowability, thus, it may be dispersed up to an edge of the inactive area during its application in the manufacturing process. Thus, the blocking structure **190** is arranged to control the spreading of the organic layer **122** in the inactive area I/A. Although two blocking structures (e.g., dams) are illustrated in FIG. 3A, the number of dam **190** can be one or more. Also, the dam **190** may be arranged to substantially or completely surround the active area A/A or may be disposed in the active area A/A. The dam **190** may be formed in multiple layers using at least one material. For example, the dam **190** can be made of the same material as the material used to form the bank **110** and/or the spacer.

[0060] The planarization layer may be made of an acrylic resin or the like. After the baking process, a gas or gaseous element such as hydrogen may remain within the planarization layer. Such residual gas, which can be released over time, may affect the semiconductor layer of the thin film transistors (or other components), thereby undesirably causing the operating voltage of the thin film transistor to change. In addition, the residual gas may be permeated to the organic light emitting layer **114**, thereby defects such as the formation of visible dark spots on the screen may occur. Therefore, it is important to remove the residual gas contained within the planarization layer as much as possible in order to improve the reliability and stability of the display device. Accordingly, the inventors of the present disclosure have devised an out-gassing structure capable of effectively exhausting residual gas contained in the planarization layer.

[0061] The out-gassing structure may include at least one among a first out-gassing pattern **109h** on the first planarization layer **107-1** and a second out-gassing pattern **112h** on the second planarization layer **107-2**. That is, the structure may function as a gas discharge unit provided in the inorganic layer and/or the metal layer directly covering the planarization layer.

[0062] The first out-gassing pattern **109h** may be provided in the inorganic layer on the first planarization layer **107-1**, for example, such pattern may be provided in the buffer layer **109-2** and the protective layer **109-3**. As described above, the buffer layer **109-2** and the protective layer **109-3** are functional layers provided for the metal layer on the first planarization layer **107-1**. Although the inorganic material layers are illustrated as two layers in FIG. 3A, the inorganic material layer on the first planarization layer **107-1** may be configured as a single layer or at least three layers.

[0063] The second out-gassing pattern **112h** may be provided on the metal layer **112'** on the second planarization layer **107-2**. The metal layer **112'** may be in contact with the second planarization layer **107-2**. The metal layer **112'** may be a conductive material and may be in a same layer as a first electrode of an organic light emitting device. As described above, the metal layer **112'** is a functional layer provided for electrical connection between the organic light emitting element and a driving circuit (e.g., a VDDNSS supply circuit).

[0064] FIGS. 3B and 3C illustrate an example of a gas exhaust structure according to an embodiment of the present

disclosure. Firstly, FIG. 3B is a plan view of the out-gassing structure. Accordingly, when viewed from above, at the boundary between the active area and the inactive area, the first out-gassing pattern **109h** and the second out-gassing pattern **112h** are arranged as illustrated in FIG. 3B. The shapes, sizes, and densities of the illustrated out-gassing patterns **109h** and **112h** are merely illustrative and the present disclosure is not limited thereto. That is, the shape of the out-gassing pattern may be a circle, an oval shape, or any polygonal shapes, and the first out-gassing pattern and the second out-gassing pattern may have different shapes and sizes.

[0065] For example, since the second out-gassing pattern **112h** is provided in the metal layer, the out-gassing portion might be limited in consideration of its electrical resistance. On the other hand, since the first out-gassing pattern **109h** is provided in the inorganic layer, there is no such limitations with respect to its electrical resistance. Therefore, the aperture ratio of the first out-gassing pattern **109h** (e.g., the area of the gas exhausting hole) may be larger than the aperture ratio of the second out-gassing pattern **112h**. In another embodiment, the first out-gassing pattern **109h** and the second out-gassing pattern **112h** may be provided so as not to overlap each other in the vertical direction as illustrated in FIGS. 3B and 3C.

[0066] FIG. 3C is a cross-sectional view taken along the line A-A' in FIG. 3B. As described above, the residual gas contained in the planarization layer is exhausted through the first out-gassing pattern (e.g., discharging hole) and the second out-gassing pattern (e.g., discharge hole).

[0067] FIG. 3A to 3C illustrate that the out-gassing patterns **109h** and **112h** are provided in the inactive area, the out-gassing pattern may be provided in at least one among the active area and the inactive area. That is, the out-gassing pattern may also be provided in the active area. Accordingly, in FIG. 4A to 4C, the out-gassing pattern provided in the active area will be described.

[0068] FIG. 4A to 4C are cross-sectional views illustrating an out-gassing structure applied to an active area of a display device according to an embodiment of the present disclosure.

[0069] In FIG. 4A to 4C, substantially the same elements as illustrated in FIGS. 1 to 3 are denoted by the same reference numerals, and the redundant features may have been omitted merely for the sake of brevity. The display device according to an embodiment of the present disclosure may include out-gassing patterns **109h** and **112h** in the active area A/A as well as the inactive area I/A. The out-gassing pattern has gas discharging holes provided in the inorganic layer and/or the metal layer directly covering the planarization layer. As an example, the out-gassing pattern includes at least one hole or opening region through the inorganic layer and/or the metal layer on the planarization layer. The gas discharge holes in the inorganic layer may extend through a buffer layer and a protective layer.

[0070] The out-gassing pattern may include at least one among ① a first out-gassing pattern **109h** on the first planarization layer **107-1** and ② a second out-gassing pattern **112h** on the second planarization layer **107-2**.

[0071] The first out-gassing pattern **109h** may be provided on an inorganic layer (e.g., a buffer layer, a protective layer or the like) on the first planarization layer **107-1**. The first out-gassing pattern **109h** is provided to allow the residual gas to be effectively discharged from the first planarization

layer **107-1**. Although the inorganic layer **109-3** is illustrated as a single layer in FIG. 4A, the inorganic layer on the first planarization layer **107-1** may include at least two layers. The first out-gassing pattern **109h** may be provided on the inorganic layer **109-3** with a specific area ratio (e.g., 5 to 50%).

[0072] The planar shape of the opening region (i.e., a hole) included in the first out-gassing pattern **109h** may be formed of a circular shape, an oval shape, a triangular shape, a rectangular shape or other polygonal shape, and its size, density and the like may be designed according to the specification of the display device (e.g., desired performance, screen size, product usage environment, etc.). For example, the out-gassing pattern **109h-b** as illustrated in FIG. 4B has a rectangular opening shape with a larger planar area than the out-gassing pattern **109h-c** as illustrated in FIG. 4C. On the other hand, the out-gassing pattern **109h-c** as illustrated in FIG. 4C has relatively more rectangular openings than the openings of the out-gassing pattern **109h-b** as illustrated in FIG. 4B, but also the sum of areas of the openings of the out-gassing pattern **109h-c** is larger than the sum of areas of the openings of the out-gassing pattern **109h-b**. When the openings of the first out-gassing pattern **109h** is a square shape, the size may be $2 \times 2 \mu\text{m}$ to $15 \times 15 \mu\text{m}$.

[0073] The first out-gassing pattern **109h** may be disposed so as not to overlap with the metal layer **108-2** on the first planarization layer **107-1** in the horizontal and vertical directions. The metal layer **108-2** on the first planarization layer **107-1** may be a connection electrode, a signal line or the like.

[0074] The first out-gassing pattern **109h** may be disposed so as not to overlap with a contact hole **107-1H** passing through the first planarization layer **107-1** in the horizontal (row) and vertical (column) directions. The contact hole **107-1H** may be formed to interconnect an element (e.g., a thin film transistor or the like) disposed under the first planarization layer **107-1** with an element (e.g., a connection electrode or a signal line) disposed on the first planarization layer **107-1**, thereby a connection is provided.

[0075] The first out-gassing pattern **109h** may be disposed so as not to overlap with the contact hole **107-2H** passing through the second planarization layer in the horizontal and vertical directions. The contact hole **107-2H** may be formed to interconnect an element (e.g., a connection electrode or a signal line) disposed under the second planarization layer **107-2** with an element (e.g., an anode) disposed on the second planarization layer **107-2**, thereby a connection is provided. The first out-gassing pattern **109h** may be disposed to avoid the first electrodes **112R**, **112G**, and **112B** of the organic light emitting element.

[0076] The second out-gassing pattern **112h** may be provided on the metal layer **112** on the second planarization layer **107-2**. The metal layer **112** may be a first electrode (e.g., an anode). Since the second out-gassing pattern **112h** is provided in the metal layer, its electrical resistance should be considered that may limit its portion. On the other hand, since the first out-gassing pattern **109h** is provided in the inorganic layer, there is no such limitation. Therefore, the aperture ratio of the second out-gassing pattern **112h** (e.g., the area of the gas exhausting hole) can be smaller than the first out-gassing pattern **109h**. In addition, the second out-gassing pattern **112h** and the first out-gassing pattern **109h** may be provided so as not to overlap with each other in the

vertical direction. On the other hand, the second out-gassing pattern may have a different shape and/or size from the first out-gassing pattern.

[0077] The out-gassing through the out-gassing pattern of the active area and/or the inactive area can be performed through the one-stage or the two-stage heat treatment process. The one-stage heat treatment process is a process that proceeds after formation of the metal layer including the out-gassing pattern on the second planarization layer **107-2**. According to the two-stage heat treatment process, the first-stage is processed after formation of the inorganic layer including the out-gassing pattern on the first planarization layer **107-1**. After the completion of the first-stage, second-stage is processed after formation of the metal layer including the out-gassing pattern on the second planarization layer **107-2**.

[0078] That is, the residual gas can be effectively exhausted by providing the out-gassing pattern in the inactive area and/or the active area, when compared to a structure in which the upper part of the first planarization layer **107-1** and/or the second planarization layer **107-2** are completely sealed, thereby the diffusion of the residual gas to the organic light emitting element can be significantly reduced. Therefore, the damage of the organic light emitting layer due to the residual gas is also reduced, and the problem of deterioration of the display quality can be solved.

[0079] The exemplary embodiments of the present disclosure can also be described as follows:

[0080] According to an aspect of the present disclosure, an organic light emitting display device may include a first planarization layer configured to planarize an upper portion of a circuit element on a substrate, an inorganic layer having a first out-gassing pattern on the first planarization layer, a second planarization layer configured to planarize an upper portion of the inorganic layer and a metal layer having a second out-gassing pattern on the second planarization layer.

[0081] The first out-gassing pattern and the second out-gassing pattern may be out-gassing holes provided to exhaust residual gas in the first and second planarization layers.

[0082] An aperture ratio of the first out-gassing pattern and an aperture ratio of the second out-gassing pattern may be different from each other.

[0083] The aperture ratio of the first out-gassing pattern may be larger than the aperture ratio of the second out-gassing pattern.

[0084] The first out-gassing pattern and the second out-gassing pattern may be provided so as not to overlap each other in a vertical direction.

[0085] The first out-gassing pattern and the second out-gassing pattern may be arranged in an inactive area.

[0086] The first out-gassing pattern may be also arranged in an active area.

[0087] The first out-gassing pattern may include at least one opening region passing through the inorganic layer on the first planarization layer.

[0088] The first out-gassing pattern arranged in the active area may be arranged so as not to overlap with the metal layer on the first planarization layer in a horizontal and a vertical direction.

[0089] The first out-gassing pattern arranged in the active area may be arranged so as not to overlap with a contact hole passing through the first planarization layer in a horizontal and a vertical direction.

[0090] The first out-gassing pattern arranged in the active area may be arranged so as not to overlap with a contact hole passing through the second planarization layer in a horizontal and a vertical direction.

[0091] The second out-gassing pattern may be also arranged in the active area.

[0092] The inorganic layer on the first planarization layer may include a buffer layer and a passivation layer.

[0093] The metal layer may be provided on the buffer layer and the passivation layer covers the metal layer on the buffer layer.

[0094] The metal layer on the second planarization layer may be provided to electrically connect an organic light emitting element and a driving circuit.

[0095] Although the exemplary embodiments of the present disclosure have been described in detail with reference to the accompanying drawings, the present disclosure is not limited thereto and may be embodied in many different forms without departing from the technical concept of the present disclosure. Therefore, the exemplary embodiments of the present disclosure are provided for illustrative purpose only but not intended to limit the technical concept of the present disclosure. The features of various embodiments of the present disclosure can be partially or entirely bonded to or combined with each other and can be interlocked and operated in technically various ways as can be fully understood by a person having ordinary skill in the art and the embodiments can be carried out independently of or in association with each other.

[0096] The protective scope of the present disclosure should be construed based on the following claims and all the technical concepts in the equivalent scope thereof should be construed as falling within the scope of the present disclosure.

What is claimed is:

1. A display device comprising:
 - a first planarization layer;
 - a first layer on the planarization layer and in contact with the planarization layer;
 - a first outgassing pattern in the first layer, the first outgassing pattern comprising one or more gas discharge holes;
 - a second planarization layer covering the first layer;
 - a second layer on the second planarization layer and in contact with the second planarization layer; and
 - a second outgassing pattern in the second layer, the second outgassing pattern comprising one or more gas discharge holes.
2. The display device of claim 1, wherein the first layer comprises two or more layers including a buffer layer and a protective layer, the gas discharge holes extend through the buffer layer and the protective layer.
3. The display device of claim 1, wherein the second layer is a conductive material.
4. The display device of claim 1, wherein the second layer is in a same layer as a first electrode of an organic light emitting device.
5. The display device of claim 1, further comprising a metal layer on the first planarization layer, wherein the first outgassing pattern does not overlap with the metal layer.

6. The display device of claim 1, wherein the first outgassing pattern does not overlap with any contact holes in the first planarization layer or any contact holes in the second planarization layer.

7. The display device of claim 1, wherein the first outgassing pattern does not overlap with any organic light emitting diode anodes.

8. The display device of claim 1, wherein at least one of the first outgassing pattern and the second outgassing pattern is in an inactive area of the display device.

9. The display device of claim 1, wherein at least one of the first outgassing pattern and the second outgassing pattern is in an active area of the display device.

10. The display device of claim 1, wherein:

the second outgassing pattern does not overlap with the first outgassing pattern.

11. An organic light emitting display device comprising: a first planarization layer configured to planarize an upper portion of a circuit element on a substrate; an inorganic layer, having a first out-gassing pattern, on the first planarization layer; a second planarization layer configured to planarize an upper portion of the inorganic layer; and a metal layer, having a second out-gassing pattern, on the second planarization layer.

12. The organic light emitting display device of claim 11, wherein the first out-gassing pattern and the second out-gassing pattern are holes or openings provided to exhaust residual gas in the first and second planarization layers.

13. The organic light emitting display device of claim 11, wherein an aperture ratio of the first out-gassing pattern is larger than an aperture ratio of the second out-gassing pattern.

14. The organic light emitting display device of claim 11, wherein the first out-gassing pattern and the second out-gassing pattern are arranged in an inactive area and an active area.

15. The organic light emitting display device of claim 14, wherein the first out-gassing pattern includes at least one opening region extending through the inorganic layer on the first planarization layer.

16. The organic light emitting display device of claim 14, wherein the first out-gassing pattern arranged in the active area does not overlap with the metal layer on the first planarization layer in a horizontal and a vertical direction.

17. The organic light emitting display device of claim 14, wherein the first out-gassing pattern arranged in the active area does not overlap with a contact hole passing through the first planarization layer in a horizontal and a vertical direction.

18. The organic light emitting display device of claim 14, wherein the first out-gassing pattern arranged in the active area does not overlap with a contact hole passing through the second planarization layer in a horizontal and a vertical direction.

19. The organic light emitting display device of claim 11, wherein the inorganic layer on the first planarization layer includes a buffer layer and a passivation layer.

20. The organic light emitting display device of claim 11, wherein the metal layer on the second planarization layer electrically connects an organic light emitting element and a driving circuit.

* * * * *

专利名称(译)	有机发光显示装置		
公开(公告)号	US20180061918A1	公开(公告)日	2018-03-01
申请号	US15/603115	申请日	2017-05-23
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	PARK JONGCHAN JANG CHANGJAE KIM JUNGCHUL HWANG JAESIK HAN MINJI		
发明人	PARK, JONGCHAN JANG, CHANGJAE KIM, JUNGCHUL HWANG, JAESIK HAN, MINJI		
IPC分类号	H01L27/32 H01L51/52		
CPC分类号	H01L27/3258 H01L51/5253 H01L51/5206 H01L51/52 H01L27/3248 H01L2227/323 H01L27/3216 H01L51/5212		
优先权	1020160112120 2016-08-31 KR 1020160179662 2016-12-27 KR		
其他公开文献	US9991462		
外部链接	Espacenet USPTO		

摘要(译)

根据本公开提供了一种有机发光显示装置。一种有机发光显示装置，包括：第一平坦化层，被配置为平坦化衬底上的电路元件的上部；无机层，包括第一平坦化层上的第一除气图案；第二平坦化层，被构造为平坦化上部在第二平坦化层上形成无机层的一部分和包括第二排气图案的金属层。

