



US 20190067637A1

(19) **United States**(12) **Patent Application Publication**
Jin et al.(10) **Pub. No.: US 2019/0067637 A1**(43) **Pub. Date: Feb. 28, 2019**(54) **A FLEXIBLE ORGANIC LIGHT EMITTING
DIODE DISPLAY AND METHOD OF
MANUFACTURING THE SAME**(71) Applicant: **Wuhan China Star Optoelectronics
Technology Co., Ltd., Wuhan (CN)**(72) Inventors: **Jiangjiang Jin, Wuhan (CN);
Hsianglun Hsu, Wuhan (CN)**(21) Appl. No.: **15/570,344**(22) PCT Filed: **Jun. 22, 2017**(86) PCT No.: **PCT/CN2017/089613**

§ 371 (c)(1),

(2) Date: **Oct. 29, 2017**(30) **Foreign Application Priority Data**


May 16, 2016 (CN) 201710344087.8

Publication Classification(51) **Int. Cl.****H01L 51/52** (2006.01)**H01L 27/32** (2006.01)**H01L 51/00** (2006.01)**H01L 51/56** (2006.01)(52) **U.S. Cl.**CPC **H01L 51/5256** (2013.01); **H01L 27/3244**(2013.01); **H01L 51/0097** (2013.01); **H01L****2251/558** (2013.01); **H01L 2251/301**(2013.01); **H01L 2251/5338** (2013.01); **H01L****51/56** (2013.01)

(57)

ABSTRACT

A flexible organic light emitting diode display and a method for manufacturing the same are provided. The flexible organic light emitting diode display includes sequentially forming an organic light emitting display layer, a first inorganic layer, a first dative bond layer, a polymer organic layer, and a second inorganic layer on a flexible substrate; the first dative bond layer is configured to provide an electron-rich group; the polymer organic layer has an electron-deficient group, the electron-deficient group and the electron-rich group commonly form a dative bond.

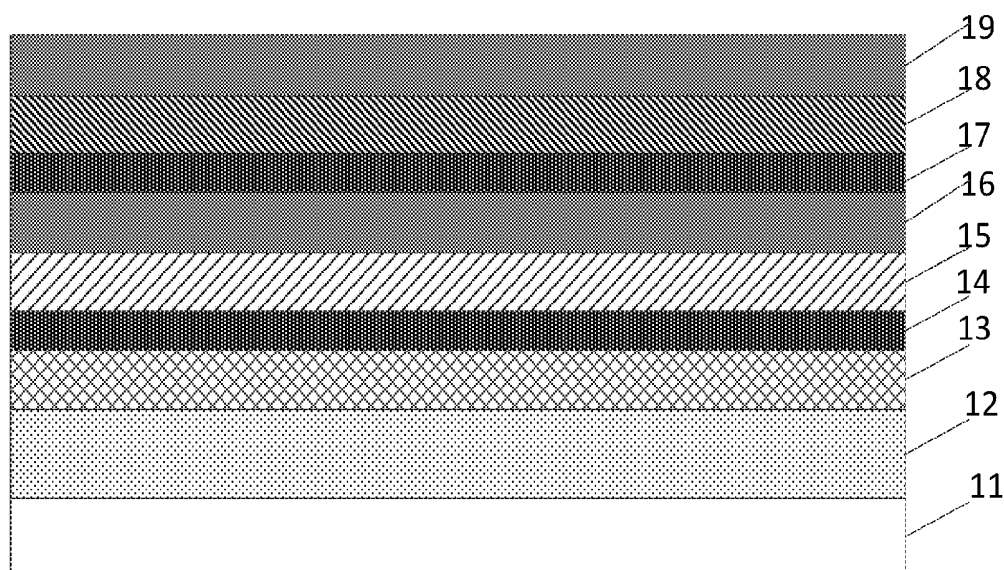

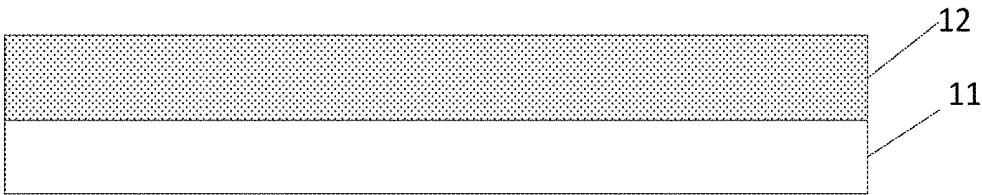


FIG. 1

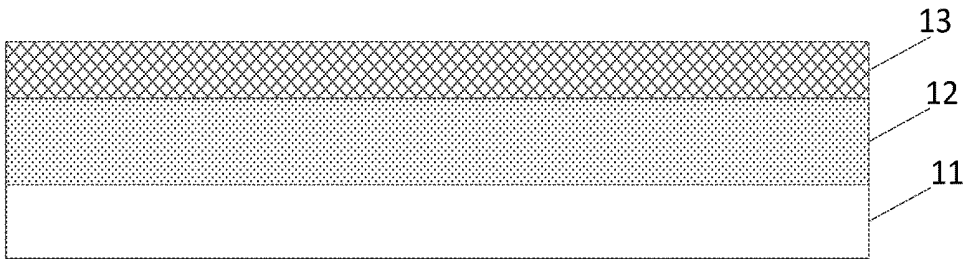


FIG. 2

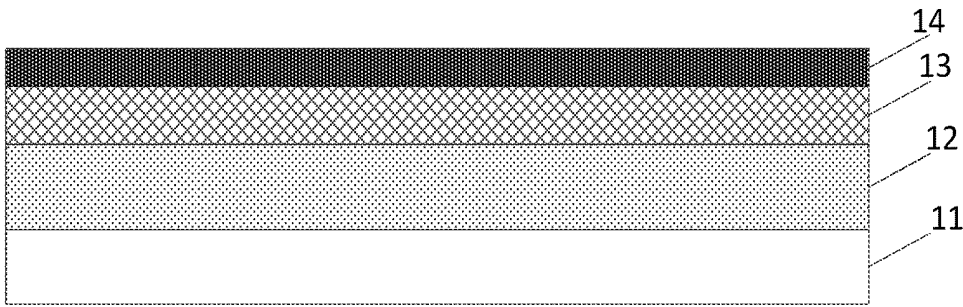


FIG. 3

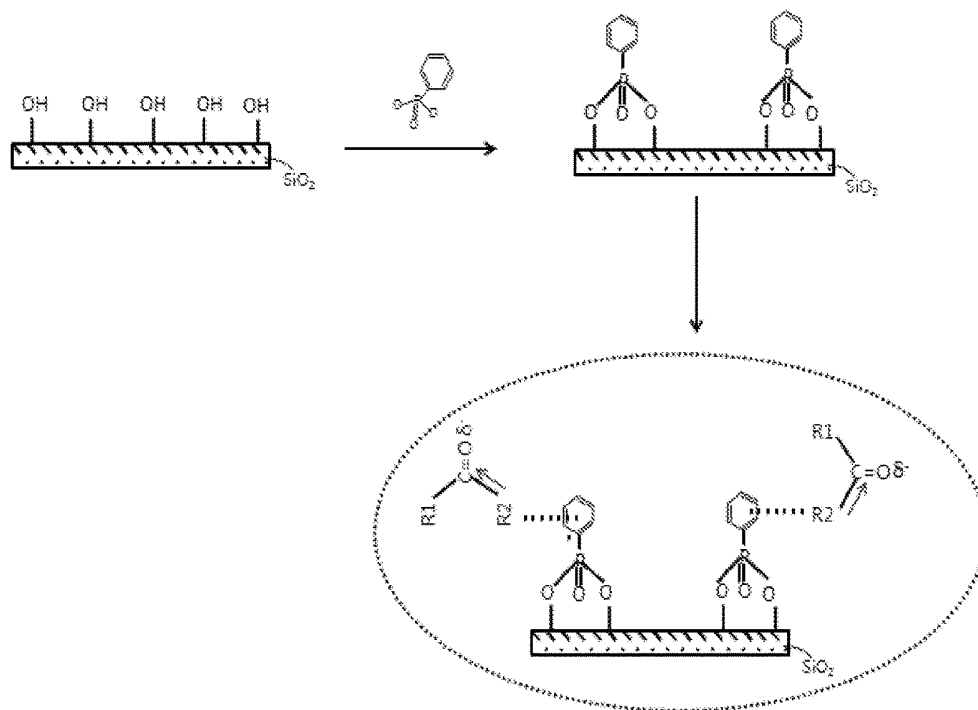


FIG. 4

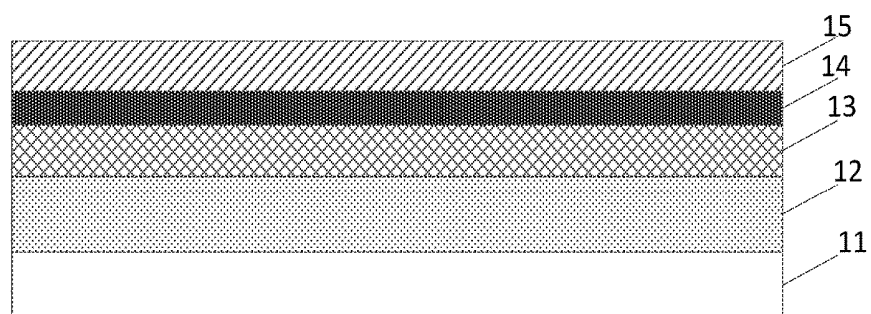


FIG. 5

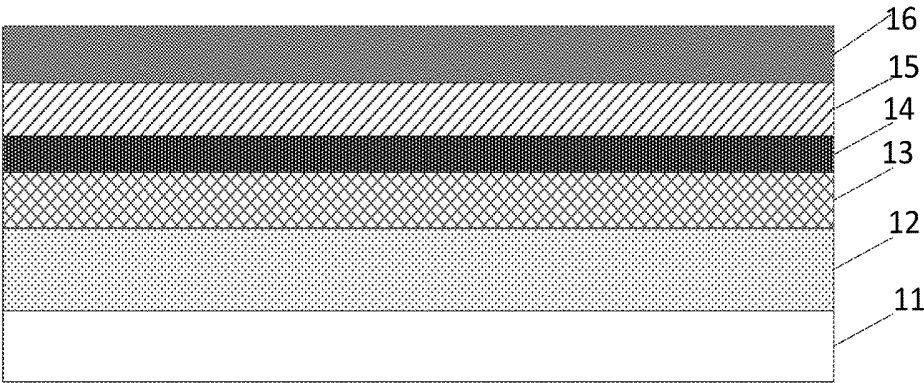


FIG. 6

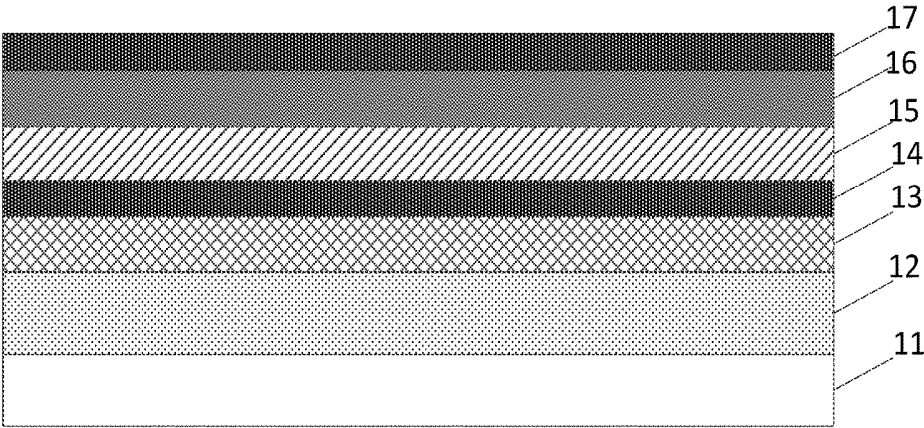


FIG. 7

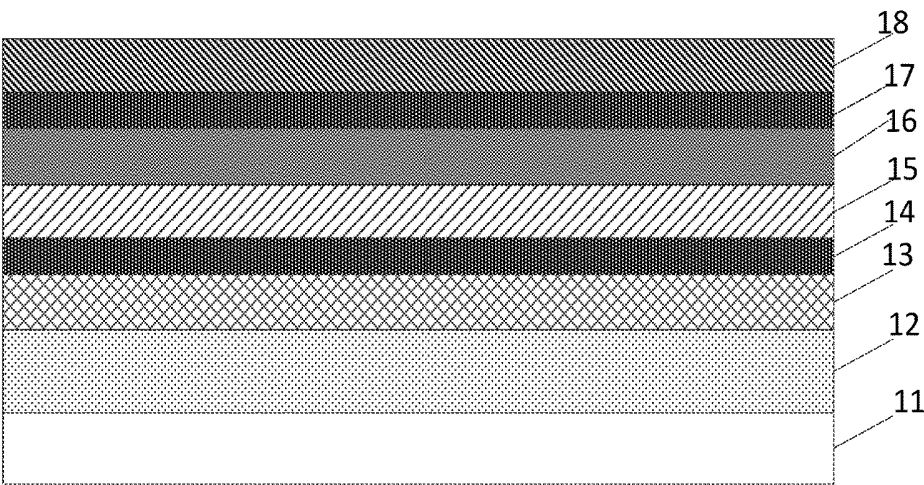


FIG. 8

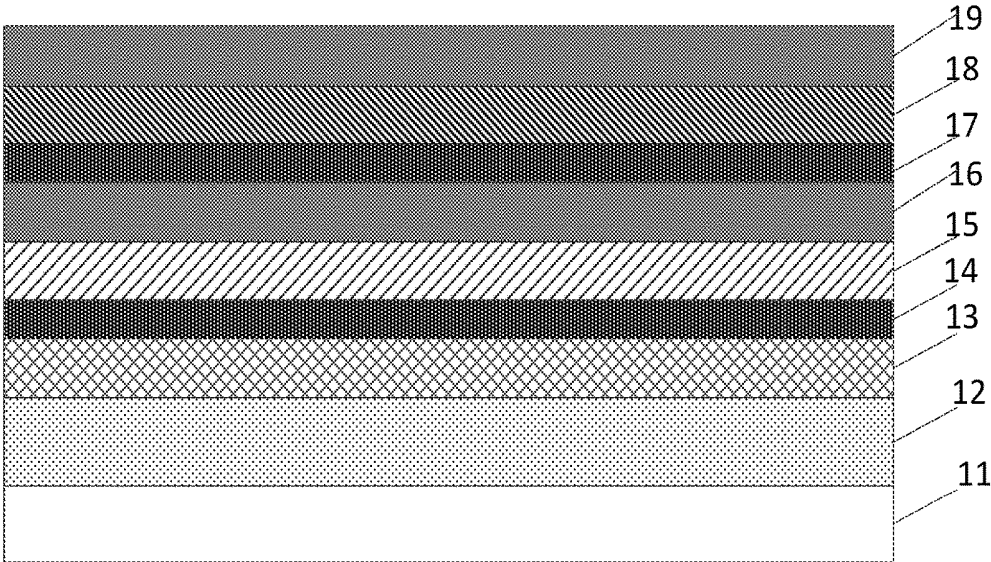


FIG. 9

A FLEXIBLE ORGANIC LIGHT EMITTING DIODE DISPLAY AND METHOD OF MANUFACTURING THE SAME

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a U.S. National Phase application submitted under 35 U.S.C. § 371 of Patent Cooperation Treaty Application serial No. PCT/CN2017/089613, filed on Jul. 22, 2017, which claims the priority of China Patent Application serial No. 201710344087.8, filed on May 16, 2017, the disclosures of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to display technologies, and more particularly to a flexible organic light emitting diode display and a method of manufacturing the same.

BACKGROUND OF THE INVENTION

[0003] Compared with liquid crystal displays, active matrix organic light-emitting diodes (AMOLEDs) have characteristics such as a higher contrast, a wider viewing angle, a faster response time, etc. Moreover, AMOLEDs have self-luminous characteristics without use of a backlight module, thus liquid crystal display panels are thinner, and since no backlight module is used, production costs can also be reduced.

[0004] However, water molecules can easily enter a flexible OLED display, and will affect performance of the OLED, and the flexible OLED is prone to breakage during bending. In order to block the moisture in the air and prevent breakage during bending, it is necessary to apply a passivation layer having a lower water vapor transmission rate (WVTR) on the flexible OLED, where the transmittance is generally required to be less than 10^{-6} g/m²d at 85° C. and 85RH. In order to obtain a passivation layer with a sufficiently low transmittance, in general, the passivation layer usually is made of an inorganic material such as silicon oxide (SiO_x), silicon nitride (SiN_x), alumina (Al₂O₃), and the like.

[0005] However, this kind of material made of an inorganic layer easily peels off from the organic layer during the bending.

[0006] Therefore, it is necessary to provide a flexible organic light emitting diode display and method of manufacturing the same to solve the problems of the present technology.

SUMMARY OF THE INVENTION

[0007] An object of the present invention is to provide a flexible organic light emitting diode display and a method of manufacturing the same, with which it is possible to prevent the inorganic layer from being peeled off from the organic layer during bending.

[0008] In order to solve the above technical problems, the present invention provides a manufacturing method of a flexible organic light emitting diode display, which comprises steps of:

[0009] forming an organic light emitting display layer on a flexible substrate;

[0010] forming a first inorganic layer on the organic light emitting display layer, wherein the first inorganic layer is made of metallic oxide or non-metallic oxide;

[0011] forming a first dative bond layer on the first inorganic layer, wherein the first dative bond layer is configured to provide an electron-rich group which is a π bond of a benzene ring;

[0012] forming a polymer organic layer on the first dative bond layer, wherein the polymer organic layer has an electron-deficient group, the electron-deficient group and the electron-rich group commonly form a dative bond, and the electron-deficient group includes a structure of R₁—CO—R₂, wherein each of the R₁ and R₂ is a heterocyclic carbon chain or a miscellaneous chain group, wherein miscellaneous elements thereof comprise at least one of B, O, S, Si, P, N, F, Cl, and Br; and

[0013] forming a second inorganic layer on the polymer organic layer.

[0014] In one embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, the step of forming the first dative bond layer on the first inorganic layer comprises: forming the first dative bond layer on the first inorganic layer by using polyphosphoric acid.

[0015] Moreover, the manufacturing method of the flexible organic light emitting diode display according to present invention, further comprises steps of:

[0016] forming a second dative bond layer on the second inorganic layer;

[0017] forming a first organic layer on the second dative bond layer; and

[0018] forming a third inorganic layer on the first organic layer.

[0019] In one embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, a thickness of the first inorganic layer ranges from 0.5 μ m to 1 μ m.

[0020] In another embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, a thickness of the polymer organic layer ranges from 1 μ m to 12 μ m.

[0021] In yet another embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, the second inorganic layer is made of at least one of zirconium aluminate, graphene, alumina, zirconium dioxide, zinc peroxide, silicon nitride, silicon carbonitride, SiO_x, titanium dioxide, and diamond-like carbon.

[0022] An object of the present invention is to provide a manufacturing method of flexible organic light emitting diode display, and the method comprises steps of:

[0023] forming an organic light emitting display layer on a flexible substrate;

[0024] forming a first inorganic layer on the organic light emitting display layer;

[0025] forming a first dative bond layer on the first inorganic layer, wherein the first dative bond layer is configured to provide an electron-rich group;

[0026] forming a polymer organic layer on the first dative bond layer, wherein the polymer organic layer has an electron-deficient group, and the electron-deficient group and the electron-rich group commonly form a dative bond; and

[0027] forming a second inorganic layer on the polymer organic layer.

[0028] In one embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, the electron-rich group is a π bond of a benzene ring, the electron-deficient group comprises a structure of R_1-CO-R_2 , wherein each of the R_1 and R_2 is a heterocyclic carbon chain or a miscellaneous chain group, wherein miscellaneous elements thereof comprise at least one of B, O, S, Si, P, N, F, Cl, and B.

[0029] In another embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, the step of forming the first dative bond layer on the first inorganic layer comprises: forming the first dative bond layer on the first inorganic layer by using polyphosphoric acid.

[0030] Furthermore, the manufacturing method of the flexible organic light emitting diode display according to present invention, further comprises steps of:

[0031] forming a second dative bond layer on the second inorganic layer;

[0032] forming a first organic layer on the second dative bond layer; and

[0033] forming a third inorganic layer on the first organic layer.

[0034] In one embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, the first inorganic layer is made of metallic oxide or non-metallic oxide.

[0035] In another embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, a thickness of the first inorganic layer ranges from 0.5 μm to 1 μm .

[0036] In yet another embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, a thickness of the polymer organic layer ranges from 1 μm to 12 μm .

[0037] In one embodiment, the manufacturing method of the flexible organic light emitting diode display according to present invention, the second inorganic layer is made of at least one of zirconium aluminate, graphene, alumina, zirconium dioxide, zinc peroxide, silicon nitride, silicon carbonitride, SiO_x , titanium dioxide, and diamond-like carbon.

[0038] An object of the present invention is to provide a flexible organic light emitting diode display, and comprises:

[0039] a flexible substrate;

[0040] an organic light emitting display layer formed on the flexible substrate;

[0041] a first inorganic layer formed on the organic light emitting display layer;

[0042] a first dative bond layer formed on the first inorganic layer, wherein the first dative bond layer is configured to provide an electron-rich group;

[0043] a polymer organic layer formed on the first dative bond layer, wherein the polymer organic layer has an electron-deficient group, and the electron-deficient group and the electron-rich group commonly form a dative bond; and

[0044] a second inorganic layer formed on the polymer organic layer.

[0045] In one embodiment, the flexible organic light emitting diode display according to present invention, the electron-rich group is a π bond of a benzene ring, the electron-deficient group includes a structure of R_1-CO-R_2 ,

wherein each of the R_1 and R_2 is a heterocyclic carbon chain or a miscellaneous chain group, wherein miscellaneous elements thereof comprise at least one of B, O, S, Si, P, N, F, Cl, and B.

[0046] Moreover, the flexible organic light emitting diode display according to present invention, further comprises:

[0047] a second dative bond layer formed on the second inorganic layer;

[0048] a first organic layer formed on the second dative bond layer; and

[0049] a third inorganic layer formed on the first organic layer.

[0050] In one embodiment, the flexible organic light emitting diode display according to present invention, the first inorganic layer is made of metallic oxide or non-metallic oxide.

[0051] In another embodiment, the flexible organic light emitting diode display according to present invention, a thickness the first inorganic layer ranges from 0.5 μm to 1 μm .

[0052] In yet another embodiment, the flexible organic light emitting diode display according to present invention, a thickness of the polymer organic layer ranges from 1 μm to 12 μm .

[0053] The flexible organic light emitting diode display and the method of manufacturing the same according to present invention add a dative bond layer between the inorganic layer and the organic layer, the electron-rich group of the dative bond layer and the electron-deficient layer of the organic layer form a reinforcing dative bond, thereby enhancing the adhesion between the inorganic layer and the organic layer, and improving the reliability of the flexible organic light emitting diode display.

DESCRIPTION OF THE DRAWINGS

[0054] FIG. 1 is a schematic diagram of a first step of a method of manufacturing a flexible organic light emitting diode display.

[0055] FIG. 2 is a schematic representation of a second step of the method of manufacturing the flexible organic light emitting diode display.

[0056] FIG. 3 is a schematic representation of a third step of the method of manufacturing the flexible organic light emitting diode display.

[0057] FIG. 4 shows function among the bonding layer and the SiO_2 and the polymer organic layer in the flexible organic light emitting diode display according to the present invention.

[0058] FIG. 5 is a schematic representation of a fourth step of the method of manufacturing the flexible organic light emitting diode display.

[0059] FIG. 6 is a schematic representation of a fifth step of the method of manufacturing the flexible organic light emitting diode display.

[0060] FIG. 7 is a schematic representation of a sixth step of the method of manufacturing the flexible organic light emitting diode display of present invention.

[0061] FIG. 8 is a schematic representation of a seventh step of the method of manufacturing the flexible organic light emitting diode display of present invention.

[0062] FIG. 9 is a schematic representation of an eighth step of the method of manufacturing the flexible organic light emitting diode display of present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0063] The structure and the technical means adopted by the present invention to achieve the above and other objects can be best understood by referring to the following detailed description of the preferred embodiments and the accompanying drawings. Furthermore, directional terms described by the present invention, such as upper, lower, front, back, left, right, inner, outer, side, longitudinal/vertical, transverse/horizontal, etc., are only directions by referring to the accompanying drawings, and thus the used directional terms are used to describe and understand the present invention, but the present invention is not limited thereto.

[0064] Refer now to FIG. 1, which is a schematic diagram of a first step of the method of manufacturing a flexible organic light emitting diode display.

[0065] The method of manufacturing a flexible organic light emitting diode display according to the present invention, comprises:

[0066] Step S101, forming an organic light emitting display layer on a flexible substrate.

[0067] As illustrated in FIG. 1, an organic light emitting display layer 12 is formed on a flexible substrate 11, and the organic light emitting display layer 12 has a plurality of organic light emitting units. The organic light emitting display layer 12 includes an anode, a hole transport layer, a hole injection layer, a light emitting layer, an electron transport layer, an electron injection layer, and a cathode.

[0068] Step S102, forming a first inorganic layer on the organic light emitting display layer.

[0069] As illustrated in FIG. 2, an inorganic material is deposited on the organic light emitting display layer 12 by using one of the methods such as atomic layer deposition (ALD), pulsed laser deposition (PLD), sputtering, and plasma enhanced chemical vapor deposition (PECVD), thereby forming the first inorganic layer 13. In this embodiment, the material of the first inorganic layer 13 is made of metal oxide or non-metal oxide. The first inorganic layer 13 is configured to block water and oxygen from an external environment.

[0070] Thickness of the first inorganic layer 13 ranges from 0.5 μm to 1 μm . When the thickness is within this range, the first inorganic layer 13 can better block water and oxygen from the external environment, and will not increase thickness of the display.

[0071] Step S103, forming a first dative bond layer on the first inorganic layer; the first dative bond layer is configured to provide an electron-rich group.

[0072] As illustrated in FIG. 3, a first bond layer 14 is formed on the first inorganic layer 13 using polyphosphoric acid (PPA). The first bonding layer 14 is configured to provide an electron-rich group; the electron-rich group is a π bond of a benzene ring.

[0073] In an exemplary example using SiO_2 , as illustrated in the upper part of FIG. 4, the upper surface of SiO_2 is modified by the polyphosphoric acid benzene ring, thereby $\text{SiO}_2\text{-Ph}$ is formed. Since the surface of SiO_2 contains OH groups, the molecules of OH will have a chemical reaction with PPA, then PPA will be connected to the SiO_2 by a chemical bond, and result in the formation of $\text{SiO}_2\text{-Ph}$ layer. The benzene ring in the $\text{SiO}_2\text{-Ph}$ will form a dative bond when the benzene ring is in contact with the polymer organic layer.

[0074] Step S104, forming a polymer organic layer on the first dative bond layer; the polymer organic layer has an electron-deficient group, the electron-deficient group and the electron-rich group commonly form a dative bond.

[0075] As illustrated in FIG. 5, a layer of polymer material is coated on the first bond layer 14 by using one of the methods such as inkjet printing (IJP), PECVD, spin-coating, slot coating, screen printing, and dispenser, thereby forming the polymer organic layer 15. Moreover, the polymer includes a structure of $\text{R}_1\text{-CO-R}_2$, wherein each of the R_1 and R_2 is a heterocyclic carbon chain or a miscellaneous chain group, wherein miscellaneous elements thereof comprise at least one of B, O, S, Si, P, N, F, Cl, and Br. That is, the electron-deficient group includes a structure of $\text{R}_1\text{-CO-R}_2$. As illustrated in the lower part of FIG. 4, the benzene ring which is provided on $\text{SiO}_2\text{-Ph}$ forms a dative bond with the polymer organic layer which it is in contact with, it also forms a stronger dative bond between the electron-deficient group on $\text{R}_1\text{-CO-R}_2$ and the π bond on the benzene ring, thereby enhancing the adhesion between the inorganic layer and the organic layer.

[0076] The polymer organic layer 15 is mainly used for buffering stress and blocking external particulate contaminants. The polymer organic layer 15 has a thickness ranging from 1 μm to 12 μm . Since the thickness is within this range, the organic light emitting display layer can be better protected and the thickness of the display is not increased.

[0077] Since the polymer organic layer 15 contains the $\text{R}_1\text{-CO-R}_2$ structure, the C=O bond has a stronger property of electron-withdrawing, which causes the R_1 or R_2 groups adjacent to C=O to exhibit a lack of electron properties, and the six π electrons on the benzene ring have a property of electron repelling, which will form a stronger dative bond between the R_1 or R_2 group and the benzene ring, thereby enhancing the interaction between the organic layer and the inorganic layer, and preventing the phenomenon of peeling during bending and folding.

[0078] Step S105, forming a second inorganic layer on the polymer organic layer.

[0079] As illustrated in FIG. 6, an inorganic material is deposited on the polymer organic layer 15 by using one of methods such as atomic layer deposition (ALD), pulsed laser deposition (PLD), sputter, and plasma enhanced chemical vapor deposition (PECVD), thereby forming the second inorganic layer 16. In this embodiment, the second inorganic layer 16 is made of at least one of zirconium aluminate (ZrAl_xO_y), graphene, alumina (Al_2O_3), zirconium dioxide (ZrO_2), zinc peroxide (ZnO_2), silicon nitride (SiN_x), silicon carbonitride (SiCN), SiO_x , titanium dioxide (TiO_2), and diamond-like carbon (DLC). Since these materials are insoluble in water and do not react with oxygen, the corrosion resistance is strong, thereby the second inorganic layer 16 has a characteristic of good barrier with water and oxygen, such that the organic light emitting unit can be better prevented from being corroded.

[0080] The thickness of the second inorganic layer 16 may be the same as the thickness of the first inorganic layer 13.

[0081] Furthermore, the method further comprises:

[0082] Step S106, forming a second dative bond layer on the second inorganic layer.

[0083] As illustrated in FIG. 7, a second dative bond layer 17 is fabricated on the second inorganic layer 16, and the fabrication process of the second dative bond layer 17 is the same as that of the first dative bond layer 14. Thickness of

the second dative bond layer **17** is the same as thickness of the first dative bond layer **14**.

[0084] Step **S107**, forming a first organic layer on the second dative bond layer.

[0085] As illustrated in FIG. **8**, an organic material is coated on the dative bond layer **17** by using one of methods such as PECVD, IJP, Slot coating, spin-coating, or dispenser, thereby obtaining a first organic layer **18**. Fabrication and thickness of the first organic layer **18** are the same as fabrication and thickness of the polymer organic layer **15**.

[0086] Step **S108**, forming a third inorganic layer on the first organic layer.

[0087] As illustrated in FIG. **9**, an inorganic material is coated on the first organic layer **18** by using one of methods such as PECVD, ALD, PLD, or sputter, thereby obtaining a third inorganic layer **19**. The fabrication process and the thickness of third inorganic layer **19** is the same as that of the second inorganic layer **16** and first inorganic layer **13**.

[0088] As illustrated in FIG. **9**, an embodiment of present invention of a flexible organic light emitting diode display is provided, which comprises a flexible substrate **11**, an organic light emitting display layer **12**, a first inorganic layer **13**, a first dative bond layer **14**, a polymer organic layer **15**, and a second inorganic layer **16**. The organic light emitting display layer **12** is formed on the flexible substrate **11**; the first inorganic layer **13** is formed on the organic light emitting display layer **12**; the first dative bond layer **14** is formed on the first inorganic layer **13**; the first dative bond layer **14** is configured to provide an electron-rich group; the polymer organic layer **15** is formed on the first dative bond layer **14**; the polymer organic layer has an electron-deficient group, and the electron-deficient group and the electron-rich group commonly form a dative bond. The second inorganic layer **16** is formed on the polymer organic layer **15**.

[0089] The flexible organic light emitting diode display further comprises a second dative bond layer **17**, a first organic layer **18**, and a third inorganic layer **19**. The second dative bond layer **17** is formed on the second inorganic layer **16**. The first organic layer **18** is formed on the second dative bond layer **17**. The third inorganic layer **19** is formed on the first organic layer **18**.

[0090] The flexible organic light emitting diode display and the method of manufacturing the same according to present invention add a dative bond layer between the inorganic layer and the organic layer, the electron-rich group of the dative bond layer and the electron-deficient layer of the organic layer form a reinforcing dative bond, thereby enhancing adhesion between the inorganic layer and the organic layer, and improving reliability of the flexible organic light emitting diode display.

[0091] In view of the above, although the present invention has been disclosed by way of preferred embodiments, the above-described preferred embodiments are not intended to limit the present invention, and one of ordinary skill in the art will, without departing from the spirit and scope of the invention, the scope of protection of the present invention is defined by the scope of the claims.

What is claimed is:

1. A manufacturing method of a flexible organic light emitting diode display, comprising steps of:

forming an organic light emitting display layer on a flexible substrate;

forming a first inorganic layer on the organic light emitting display layer, wherein the first inorganic layer is made of metallic oxide or non-metallic oxide;

forming a first dative bond layer on the first inorganic layer, wherein the first dative bond layer is configured to provide an electron-rich group which is a π bond of a benzene ring;

forming a polymer organic layer on the first dative bond layer, wherein the polymer organic layer has an electron-deficient group, the electron-deficient group and the electron-rich group commonly form a dative bond, and the electron-deficient group includes a structure of R_1-CO-R_2 , wherein each of the R_1 and R_2 is a heterocyclic carbon chain or a miscellaneous chain group, wherein miscellaneous elements thereof comprise at least one of B, O, S, Si, P, N, F, Cl, and Br; and forming a second inorganic layer on the polymer organic layer.

2. The manufacturing method of the flexible organic light emitting diode display according to claim **1**, wherein the step of forming the first dative bond layer on the first inorganic layer comprises: forming the first dative bond layer on the first inorganic layer by using polyphosphoric acid.

3. The manufacturing method of the flexible organic light emitting diode display according to claim **1**, further comprising steps of:

forming a second dative bond layer on the second inorganic layer;

forming a first organic layer on the second dative bond layer; and

forming a third inorganic layer on the first organic layer.

4. The manufacturing method of the flexible organic light emitting diode display according to claim **1**, wherein a thickness of the first inorganic layer ranges from 0.5 μm to 1 μm .

5. The manufacturing method of the flexible organic light emitting diode display according to claim **1**, wherein a thickness of the polymer organic layer ranges from 1 μm to 12 μm .

6. The manufacturing method of the flexible organic light emitting diode display according to claim **1**, wherein the second inorganic layer is made of at least one of zirconium aluminate, graphene, alumina, zirconium dioxide, zinc peroxide, silicon nitride, silicon carbonitride, SiO_x , titanium dioxide, and diamond-like carbon.

7. A manufacturing method of flexible organic light emitting diode display, comprising steps of:

forming an organic light emitting display layer on a flexible substrate;

forming a first inorganic layer on the organic light emitting display layer;

forming a first dative bond layer on the first inorganic layer, wherein the first dative bond layer is configured to provide an electron-rich group;

forming a polymer organic layer on the first dative bond layer, wherein the polymer organic layer has an electron-deficient group, and the electron-deficient group and the electron-rich group commonly form a dative bond; and

forming a second inorganic layer on the polymer organic layer.

8. The manufacturing method of the flexible organic light emitting diode display according to claim **7**, wherein the electron-rich group is a π bond of a benzene ring, the

electron-deficient group comprises a structure of R_1-CO-R_2 , wherein each of the R_1 and R_2 is a heterocyclic carbon chain or a miscellaneous chain group, wherein miscellaneous elements thereof comprise at least one of B, O, S, Si, P, N, F, Cl, and B.

9. The manufacturing method of the flexible organic light emitting diode display according to claim 7, wherein the step of forming the first dative bond layer on the first inorganic layer comprises: forming the first dative bond layer on the first inorganic layer by using polyphosphoric acid.

10. The manufacturing method of the flexible organic light emitting diode display according to claim 7, further comprising steps of:

forming a second dative bond layer on the second inorganic layer;

forming a first organic layer on the second dative bond layer; and

forming a third inorganic layer on the first organic layer.

11. The manufacturing method of the flexible organic light emitting diode display according to claim 7, wherein the first inorganic layer is made of metallic oxide or non-metallic oxide.

12. The manufacturing method of the flexible organic light emitting diode display according to claim 7, wherein a thickness of the first inorganic layer ranges from 0.5 μm to 1 μm .

13. The manufacturing method of the flexible organic light emitting diode display according to claim 7, wherein a thickness of the polymer organic layer ranges from 1 μm to 12 μm .

14. The manufacturing method of the flexible organic light emitting diode display according to claim 7, wherein the second inorganic layer is made of at least one of zirconium aluminate, graphene, alumina, zirconium dioxide, zinc peroxide, silicon nitride, silicon carbonitride, SiO_x , titanium dioxide, and diamond-like carbon.

15. A flexible organic light emitting diode display, comprising:

a flexible substrate;

an organic light emitting display layer formed on the flexible substrate;

a first inorganic layer formed on the organic light emitting display layer;

a first dative bond layer formed on the first inorganic layer, wherein the first dative bond layer is configured to provide an electron-rich group;

a polymer organic layer formed on the first dative bond layer, wherein the polymer organic layer has an electron-deficient group, and the electron-deficient group and the electron-rich group commonly form a dative bond; and

a second inorganic layer formed on the polymer organic layer.

16. The flexible organic light emitting diode display according to claim 15, wherein the electron-rich group is a π bond of a benzene ring, the electron-deficient group includes a structure of R_1-CO-R_2 , wherein each of the R_1 and R_2 is a heterocyclic carbon chain or a miscellaneous chain group, wherein miscellaneous elements thereof comprise at least one of B, O, S, Si, P, N, F, Cl, and B.

17. The flexible organic light emitting diode display according to claim 15, further comprising:

a second dative bond layer formed on the second inorganic layer;

a first organic layer formed on the second dative bond layer; and

a third inorganic layer formed on the first organic layer.

18. The flexible organic light emitting diode display according to claim 15, wherein the first inorganic layer is made of metallic oxide or non-metallic oxide.

19. The flexible organic light emitting diode display according to claim 15, wherein a thickness the first inorganic layer ranges from 0.5 μm to 1 μm .

20. The flexible organic light emitting diode display according to claim 15, wherein a thickness of the polymer organic layer ranges from 1 μm to 12 μm .

* * * * *

专利名称(译)	一种柔性有机发光二极管显示器及其制造方法		
公开(公告)号	US20190067637A1	公开(公告)日	2019-02-28
申请号	US15/570344	申请日	2017-06-22
[标]申请(专利权)人(译)	武汉华星光电技术有限公司		
申请(专利权)人(译)	中国武汉恒星光电科技有限公司.		
当前申请(专利权)人(译)	中国武汉恒星光电科技有限公司.		
[标]发明人	JIN JIANGJIANG HSU HSIANGLUN		
发明人	JIN, JIANGJIANG HSU, HSIANGLUN		
IPC分类号	H01L51/52 H01L27/32 H01L51/00 H01L51/56		
CPC分类号	H01L51/5256 H01L27/3244 H01L51/0097 H01L51/56 H01L2251/301 H01L2251/5338 H01L2251/558 H01L51/5253		
优先权	201710344087.8 2016-05-16 CN		
其他公开文献	US10361397		
外部链接	Espacenet USPTO		

摘要(译)

提供一种柔性有机发光二极管显示器及其制造方法。柔性有机发光二极管显示器包括在柔性基板上依次形成有机发光显示层，第一无机层，第一配对层，聚合物有机层和第二无机层;第一配价键层配置为提供富电子基团;聚合物有机层具有缺电子基团，缺电子基团和富电子基团通常形成配价键。

