



US 20130147386A1

(19) **United States**(12) **Patent Application Publication**
Tan et al.(10) **Pub. No.: US 2013/0147386 A1**(43) **Pub. Date: Jun. 13, 2013**(54) **AMOLED PIXEL UNIT DRIVING CIRCUIT
AND METHOD, AMOLED PIXEL UNIT AND
DISPLAY APPARATUS****Publication Classification**(51) **Int. Cl.**
H05B 33/08 (2006.01)
(52) **U.S. Cl.**
CPC **H05B 33/0842** (2013.01)
USPC **315/226**(75) Inventors: **Wen Tan**, Beijing (CN); **Xiaojing Qi**,
Beijing (CN)(73) Assignees: **CHENGDU BOE
OPTOELECTRONICS
TECHNOLOGY CO., LTD.**, Sichuan
(CN); **BOE TECHNOLOGY GROUP
CO., LTD.**, Beijing (CN)(21) Appl. No.: **13/805,732**(22) PCT Filed: **Aug. 23, 2012**(86) PCT No.: **PCT/CN2012/080515**


§ 371 (c)(1),

(2), (4) Date: **Dec. 20, 2012**(30) **Foreign Application Priority Data**

Aug. 25, 2011 (CN) 201110247334.5

(57) **ABSTRACT**

The present disclosure discloses an AMOLED pixel unit driving circuit and method, an AMOLED pixel unit and a display apparatus, the AMOLED pixel unit driving circuit includes: a switching unit with a first input terminal connected to a current source for supplying a charging current and a second input terminal connected to an OLED; a storage capacitor with a first terminal connected to an output terminal of the switching unit and a second terminal connected to a low level; a driving TFT with a gate electrode connected to the first terminal of the storage capacitor and a source electrode connected to the low level; and a current dividing unit with a first terminal connected to the low level. The embodiments of the present disclosure enable a relatively large scale to exist between the charging current I_{data} and the current I_{oled} flowing through the OLED.

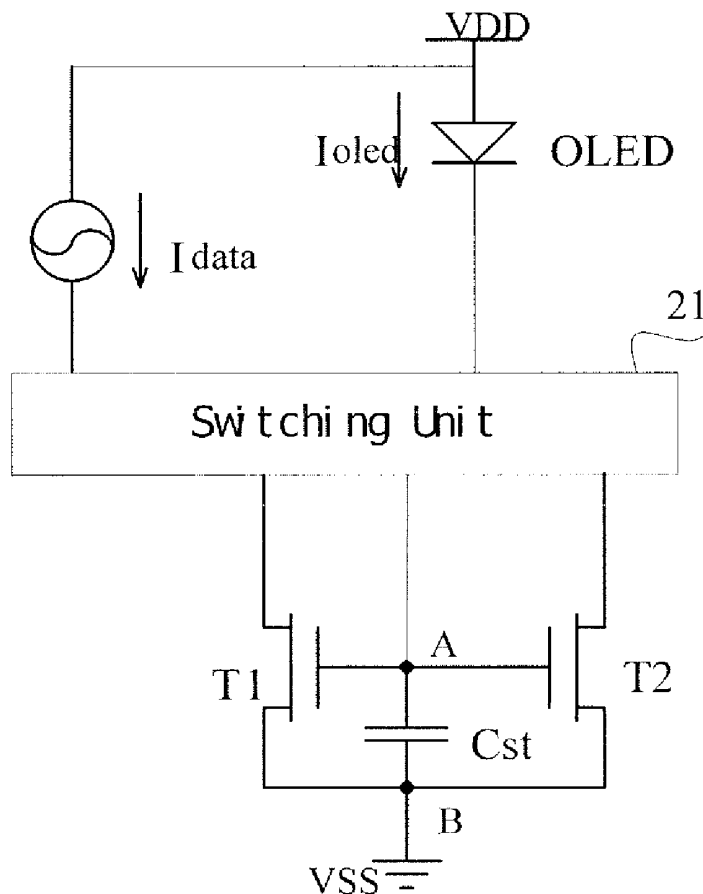

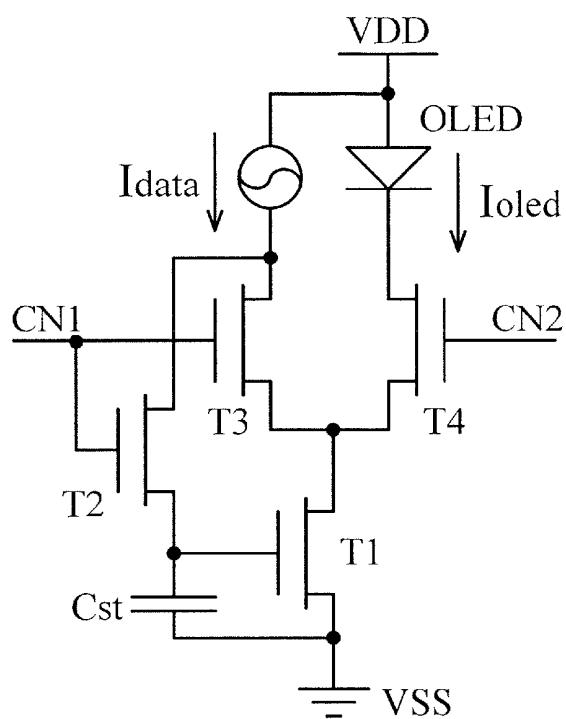


Fig.1

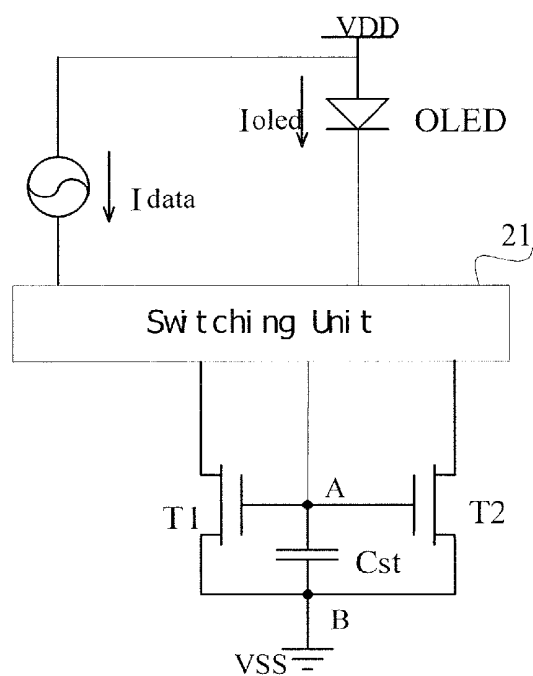


Fig.2

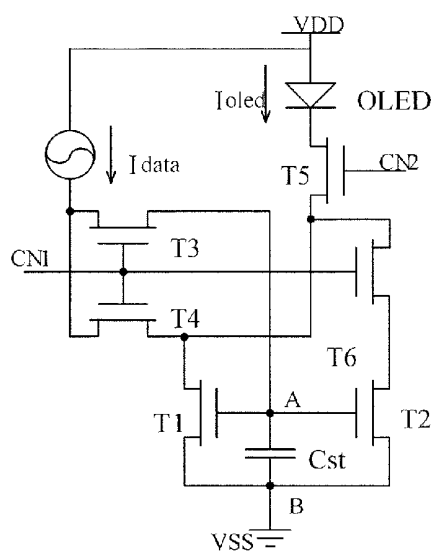


Fig.3

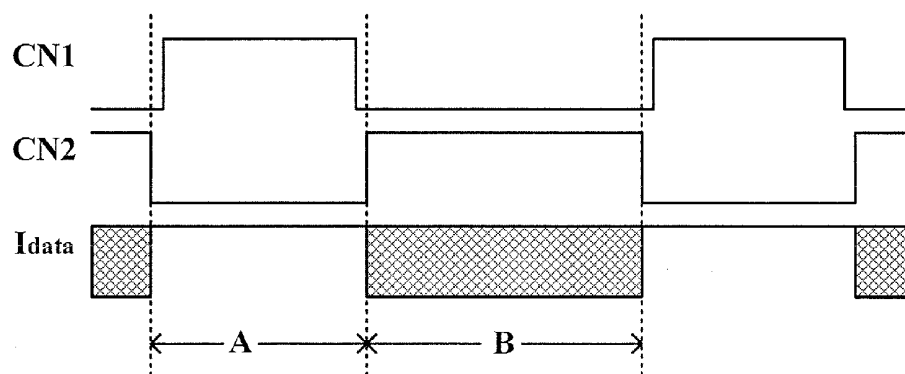


Fig.4

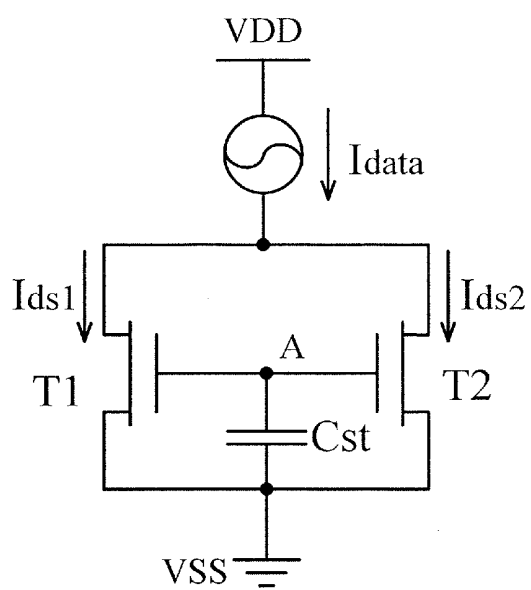


Fig.5

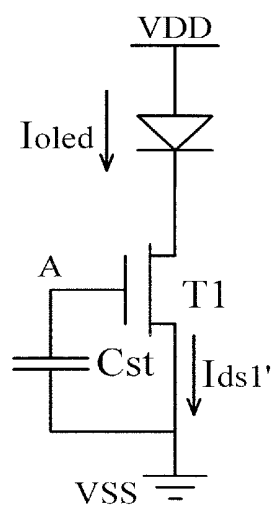


Fig.6

AMOLED PIXEL UNIT DRIVING CIRCUIT AND METHOD, AMOLED PIXEL UNIT AND DISPLAY APPARATUS

TECHNICAL FIELD OF THE DISCLOSURE

[0001] The present disclosure relates to displaying and driving technique, and particularly to an Active Matrix Organic Light Emitting Diode (AMOLED) pixel unit driving circuit and method, an AMOLED pixel unit and a display apparatus.

BACKGROUND

[0002] AMOLED can emit light when it is driven by a current generated by a driving Thin Film Transistor (TFT) in a saturated state, that is, AMOLED is driven to emit light by the current. FIG. 1 is a principal diagram showing an existing basic AMOLED pixel structure of current type. As shown in FIG. 1, the existing basic AMOLED pixel structure of current type includes an OLED, T1, T2, T3, T4 and a storage capacitor Cst, wherein T1 is a driving Thin Film Transistor, T2, T3 and T4 are controlling Thin Film Transistors, and a gate electrode of T2 and a gate electrode of T3 are connected to a control line for outputting a control signal CN1, a gate electrode of T4 is connected to a control line for outputting a control signal CN2. In the existing basic AMOLED pixel structure of current type, a driving current Idata is directly applied from the external to determine a voltage across the storage capacitor Cst, and then a driving current Ioled is generated for driving an Organic Light-Emitting Diode (OLED) to emit light. In the existing basic AMOLED pixel structure of current type, Ioled is equal to Idata, and Ioled is a small current since it has to be in the range of the operating current of the OLED, and thus Idata is also a small current. The storage capacitor Cst usually has a large capacitance so that the speed for charging is relatively slower, and the time for charging is substantially long especially under a low gray level, which is not suitable for an AMOLED display with high resolution and high refreshing frequency.

SUMMARY

[0003] In view of the above, the present disclosure provides an AMOLED pixel unit driving circuit and method, an AMOLED pixel unit and a display apparatus, capable of enabling a large scale to exist between a charging current Idata and a current Ioled flowing through the OLED, so that Idata can be a relatively large current and Ioled is guaranteed to be in the range of the operating current of the OLED, and thus expediting the speed for charging the storage capacitor Cst.

[0004] According to a first aspect of the present disclosure, embodiments of the present disclosure provide an AMOLED pixel unit driving circuit for driving OLED, the AMOLED pixel unit driving circuit includes:

[0005] a switching unit with a first input terminal connected to a current source for supplying a charging current and a second input terminal connected to the OLED;

[0006] a storage capacitor with a first terminal connected to an output terminal of the switching unit and a second terminal connected to a low level;

[0007] a driving TFT with a gate electrode connected to the first terminal of the storage capacitor and a source electrode connected to the low level; and

[0008] a current dividing unit with a first terminal connected to the low level,

[0009] wherein the switching unit, during a first time period, switches on paths from the first input terminal to a drain electrode of the driving TFT and a second terminal of the current dividing unit so as to charge the storage capacitor by means of the current source, and switches off paths from the second input terminal to the drain electrode of the driving TFT and the second terminal of the current dividing unit; and

[0010] the switching unit, during a second time period, switches on the path from the second input terminal to the drain electrode of the driving TFT, switches off the path from the second input terminal to the second terminal of the current dividing unit, and switches off the paths from the first input terminal to the drain electrode of the driving TFT and the second terminal of the current dividing unit.

[0011] In an embodiment, the current dividing unit is a current dividing TFT.

[0012] In an embodiment, the first terminal of the current dividing unit is a source electrode of the current dividing TFT, the second terminal of the current dividing unit is a drain electrode of the current dividing TFT, and a gate electrode of the current dividing TFT is connected to the first terminal of the storage capacitor.

[0013] In an embodiment, a threshold voltage of the driving TFT is equal to a threshold voltage of the current dividing TFT.

[0014] In an embodiment, the switching unit includes a third switching element, a fourth switching element, a fifth switching element and a sixth switching element, wherein

[0015] the gate electrode of the driving TFT and the gate electrode of the current dividing TFT are connected to the current source via the third switching element;

[0016] the drain electrode of the driving TFT is connected to the current source via the fourth switching element;

[0017] the drain electrode of the driving TFT is connected to the OLED via the fifth switching element;

[0018] the drain electrode of the current dividing TFT is connected to the drain electrode of the driving TFT via the sixth switching element;

[0019] the third switching element switches on connection among the gate electrode of the driving TFT, the gate electrode of the current dividing TFT and the current source during the first time period, and switches off the connection among the gate electrode of the driving TFT, the gate electrode of the current dividing TFT and the current source during the second time period;

[0020] the fourth switching element switches on connection between the drain electrode of the driving TFT and the current source during the first time period, and switches off the connection between the drain electrode of the driving TFT and the current source during the second time period;

[0021] the fifth switching element switches on connection between the drain electrode of the driving TFT and the OLED during the second time period; and

[0022] the sixth switching element switches on connection between the drain electrode of the current dividing TFT and the drain electrode of the driving TFT during the first time period, and switches off the connection between the drain electrode of the current dividing TFT and the drain electrode of the driving TFT during the second time period.

[0023] In an embodiment, the driving TFT, the current dividing TFT, the third switching element, the fourth switching element, the fifth switching element and the sixth switching element are n-type TFTs.

[0024] According to a second aspect of the present disclosure, embodiments of the present disclosure further provide an AMOLED pixel unit driving method based on the above-described AMOLED pixel unit driving circuit, and the AMOLED pixel unit driving method includes:

[0025] a step for charging pixel: switching on the paths from the current source for supplying the charging current to the drain electrode of the driving TFT and the second terminal of the current dividing unit, controlling the current source to charge the storage capacitor, and dividing the charging current supplied from the current source into two parts flowing through the driving TFT and the current dividing unit, respectively; and

[0026] a step for driving an OLED to emit light for displaying: driving the OLED to emit light by means of the driving TFT.

[0027] According to a third aspect of the present disclosure, embodiments of the present disclosure further provide an AMOLED pixel unit including an OLED and the above-described AMOLED pixel unit driving circuit, the AMOLED pixel unit driving circuit is connected to a cathode of the OLED, and an anode of the OLED is connected to a power line for outputting a voltage VDD.

[0028] According to a fourth aspect of the present disclosure, embodiments of the present disclosure further provide a display apparatus including a plurality of AMOLED pixel units as described above.

[0029] Compared to the prior art, the AMOLED pixel unit driving circuit and method, the AMOLED pixel unit and the display apparatus provided in the embodiments of the present disclosure enable a relatively large scale to exist between the current I_{data} for charging the storage capacitor C_{st} and the current I_{oled} flowing through the OLED so that I_{data} can be a relatively large current and I_{oled} is guaranteed to be in the range of the operating current of the OLED, thus expediting the speed for charging the storage capacitor C_{st} .

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] FIG. 1 is a principal diagram showing a existing basic AMOLED pixel structure of current type;

[0031] FIG. 2 is a circuit diagram showing a particular embodiment of an AMOLED pixel unit according to embodiments of the present disclosure;

[0032] FIG. 3 is a circuit diagram showing another particular embodiment of an AMOLED pixel unit according to embodiments of the present disclosure;

[0033] FIG. 4 is a timing sequence diagram showing a control signal CN1, a control signal CN2 and a charging current I_{data} ;

[0034] FIG. 5 is an equivalent circuit diagram of the particular embodiment of the AMOLED pixel unit according to embodiments of the present disclosure during a first time period; and

[0035] FIG. 6 is an equivalent circuit diagram of the particular embodiment of the AMOLED pixel unit according to embodiments of the present disclosure during a second time period.

DETAILED DESCRIPTION

[0036] Embodiments of the present disclosure provide an AMOLED pixel unit driving circuit for driving OLED, the AMOLED pixel unit driving circuit includes:

[0037] a switching unit with a first input terminal connected to a current source for supplying a charging current and a second input terminal connected to the OLED;

[0038] a storage capacitor with a first terminal connected to an output terminal of the switching unit and a second terminal connected to a low level;

[0039] a driving TFT with a gate electrode connected to a first terminal of a storage capacitor and a source electrode connected to the low level; and

[0040] a current dividing unit with a first terminal connected to the low level,

[0041] wherein the switching unit, during a first time period, switches on paths from the first input terminal thereof to a drain electrode of the driving TFT and a second terminal of the current dividing unit so as to charge the storage capacitor by means of the current source, and switches off paths from the second input terminal thereof to the drain electrode of the driving TFT and the second terminal of the current dividing unit; and

[0042] the switching unit, during a second time period, further switches on the path from the second input terminal to the drain electrode of the driving TFT, switches off the path from the second input terminal to the second terminal of the current dividing unit, and switches off the paths from the first input terminal to the drain electrode of the driving TFT and the second terminal of the current dividing unit.

[0043] In an embodiment, the current dividing unit is a current dividing TFT.

[0044] In an embodiment, the first terminal of the current dividing unit is a source electrode of the current dividing TFT, the second terminal of the current dividing unit is a drain electrode of the current dividing TFT, and a gate electrode of the current dividing TFT is connected to the first terminal of the storage capacitor.

[0045] As shown in FIG. 2, according to a particular implementation, embodiments of the present disclosure provide an AMOLED pixel unit driving circuit for driving OLED, the AMOLED pixel unit driving circuit includes:

[0046] a switching unit 21 with a first input terminal connected to a current source for supplying a charging current I_{data} and a second input terminal connected to the OLED;

[0047] a storage capacitor C_{st} with a first terminal connected to an output terminal of the switching unit 21 and a second terminal connected to a low level VSS; and

[0048] a driving TFT T1 and a current dividing TFT T2, gate electrodes of both being connected to the first terminal of the storage capacitor C_{st} and source electrodes of both connected to the low level VSS;

[0049] wherein the switching unit 21, during a first time period, switches on paths from the first input terminal to a drain electrode of the driving TFT T1 and a drain electrode of the current dividing TFT T2 so as to charge the storage capacitor C_{st} by means of the current source, and switches off paths from the second input terminal to the drain electrode of the driving TFT T1 and the drain electrode of the current dividing TFT T2; and

[0050] the switching unit 21, during a second time period, further switches on the path from the second input terminal to the drain electrode of the driving TFT T1, switches off the path from the second input terminal to the drain electrode of

the current dividing TFT T2, and switches off the paths from the first input terminal to the drain electrode of the driving TFT T1 and the drain electrode of the current dividing TFT T2.

[0051] In an embodiment, a threshold voltage of the driving TFT T1 is equal to a threshold voltage of the current dividing TFT T2.

[0052] In an embodiment, the switching unit 21 includes a third switching element, a fourth switching element, a fifth switching element and a sixth switching element, wherein

[0053] both the gate electrode of the driving TFT T1 and the gate electrode of the current dividing TFT T2 are connected to the current source via the third switching element;

[0054] the drain electrode of the driving TFT T1 is connected to the current source via the fourth switching element;

[0055] the drain electrode of the driving TFT T1 is connected to the OLED via the fifth switching element;

[0056] the drain electrode of the current dividing TFT T2 is connected to the drain electrode of the driving TFT T1 via the sixth switching element;

[0057] the third switching element switches on connection among the gate electrode of the driving TFT T1, the gate electrode of the current dividing TFT T2 and the current source during the first time period, and switches off the connection among the gate electrode of the driving TFT T1, the gate electrode of the current dividing TFT T2 and the current source during the second time period;

[0058] the fourth switching element switches on connection between the drain electrode of the driving TFT T1 and the current source during the first time period, and switches off the connection between the drain electrode of the driving TFT T1 and the current source during the second time period;

[0059] the fifth switching element switches on connection between the drain electrode of the driving TFT T1 and the OLED during the second time period; and

[0060] the sixth switching element switches on connection between the drain electrode of the current dividing TFT T2 and the drain electrode of the driving TFT T1 during the first time period, and switches off the connection between the drain electrode of the current dividing TFT T2 and the drain electrode of the driving TFT T1 during the second time period.

[0061] In an embodiment, the driving TFT T1, the current dividing TFT T2, the third switching element, the fourth switching element, the fifth switching element and the sixth switching element are n-type TFTs.

[0062] Embodiments of the present disclosure further provide an AMOLED pixel unit driving method based on the above-described AMOLED pixel unit driving circuit, and the AMOLED pixel unit driving method includes:

[0063] a step of charging a pixel: switching on the paths from the current source for supplying the charging current to the drain electrode of the driving TFT and to the second terminal of the current dividing unit, controlling the current source to charge the storage capacitor and dividing the charging current supplied from the current source into two parts flowing through the driving TFT and the current dividing unit, respectively; and

[0064] a step of driving the OLED to emit light for displaying: switching on the path from the second input terminal to the drain electrode of the driving TFT, and driving the OLED to emit light by means of the driving TFT.

[0065] Embodiments of the present disclosure further provide an AMOLED pixel unit including OLED and the above-

described AMOLED pixel unit driving circuit, wherein the AMOLED pixel unit driving circuit is connected to a cathode of the OLED, and an anode of the OLED is connected to a power line for outputting a voltage VDD.

[0066] Embodiments of the present disclosure further provide a display apparatus including a plurality of AMOLED pixel units described above.

[0067] FIG. 3 is a circuit diagram showing connection between OLED and a particular embodiment of the AMOLED pixel unit driving circuit according to embodiments of the present disclosure, that is, a circuit diagram showing a particular embodiment of the AMOLED pixel unit according to embodiments of the present disclosure. The AMOLED pixel unit driving circuit according to the embodiment adopts a 6T1C circuit and allows a relatively large scale to exist between the charging current I_{data} and the current I_{oled} flowing through the OLED in a manner of current dividing so that I_{data} can be a relatively large current and I_{oled} is guaranteed to be in the range of the operating current of the OLED, which solves the problem of a slow charging speed due to a small charging current in a traditional current type AMOLED pixel structure, thus expediting the speed for charging the storage capacitor C_{st} .

[0068] As shown in FIG. 3, T1, T2, T3, T4, T5 and T6 are all n-type TFTs, wherein T1 is a driving TFT, T2 is a current dividing TFT, T3, T4, T5 and T6 are control switching TFTs, C_{st} is a storage capacitor, and wherein a threshold voltage of T1 is equal to a threshold voltage of T2.

[0069] In FIG. 3, both a source electrode of T1 and a source electrode of T2 are connected to a second terminal of C_{st} and to a low level VSS;

[0070] both a gate electrode of T1 and a gate electrode of T2 are connected to a first terminal of C_{st} ;

[0071] both the gate electrode of T1 and the gate electrode of T2 are connected to a current output terminal of a current source for supplying a charging current I_{data} via T3;

[0072] a drain electrode of T1 is connected to the current output terminal of the current source for providing the charging current I_{data} via T4;

[0073] a drain electrode of T2 is connected to the drain electrode of T1 via T6;

[0074] a cathode of OLED is connected to the drain electrode of T1 via T5, and an anode of OLED is connected to a power line for outputting a voltage VDD;

[0075] T3, T4 and T6 control the charging current I_{data} to charge the storage capacitor C_{st} during the charging stage, and T2 controls the dividing of the charging current I_{data} ;

[0076] T5 controls a driving current to flow through the OLED to make the OLED emit light for displaying after the charging for the pixel is completed;

[0077] a gate electrode of T3, a gate electrode of T4 and a gate electrode of T6 are connected to a control signal CN1, both a drain electrode of T3 and a drain electrode of T4 are connected to the current output terminal of the current source for supplying the charging current I_{data} ; and a gate electrode of T5 is connected to a control signal CN2.

[0078] FIG. 4 is a timing sequence diagram showing the control signal CN1, the control signal CN2 and the charging current I_{data} .

[0079] As shown in FIG. 5, in the operation of the AMOLED pixel unit driving circuit according to the embodiment, during a first time period, that is, A stage, which is referred to as a pixel charging stage, CN1 is at a high level and CN2 is at a low level, T3, T4 and T6 are turned on, T5 is turned

off, and thus both the drain electrode of T1 and the drain electrode of T2 are connected to the current output terminal of the current source for supplying the charging current Idata;

[0080] After being charged by the charging current Idata, a voltage difference value between the first terminal and the second terminal of the storage capacitor Cst becomes VA-VSS, T1 and T2 are in a saturation state at this time, and a current flowing through T1 is Ids1 and a current flowing through T2 is Ids2, Idata=Ids1+Ids2, and both the gate-source voltage Vgs of T1 and that of T2 are VA-VSS;

$$\text{wherein } Ids1 = \frac{1}{2}k1(Vgs - Vth)^2;$$

$$Ids2 = \frac{1}{2}k2(Vgs - Vth)^2;$$

$$Idata = Ids1 + Ids2$$

$$\begin{aligned} &= \frac{1}{2}k1(Vgs - Vth)^2 + \frac{1}{2}k2(Vgs - Vth)^2 \\ &= \frac{1}{2}(k1 + k2)(Vgs - Vth)^2 \end{aligned}$$

[0081] so Ids1/Ids2=k1/k2, wherein T1 and T2 are n-type TFTs with different channel widths, k1 is a current coefficient of T1 and k2 is a current coefficient of T2;

$$k1 = \mu1 \times Cox \times \frac{W1}{L1};$$

$$k2 = \mu2 \times Cox \times \frac{W2}{L2};$$

[0082] wherein $\mu1$, Cox , W1 and L1 represent a field effect mobility, a gate insulating layer capacitance per unit area, a channel width and a channel length of T1, respectively, and $\mu2$, Cox , W2 and L2 represent a field effect mobility, a gate insulating layer capacitance per unit area, a channel width and a channel length of T2, respectively.

[0083] As shown in FIG. 6, in the operation of the AMOLED pixel unit driving circuit according to the embodiment, during a second time period, that is, B stage, which is referred to as an OLED emitting light stage, CN2 is at a high level and CN1 is at a low level, T3, T4 and T6 are turned off, T5 is turned on, the voltage across the storage capacitor Cst is maintained to be Vgs, and thus T2 is turned off and T1 operates in a saturation region, the OLED is driven by a driving current Ioled to emit light for displaying;

[0084] at this time, a current flowing through the drain electrode of T1 is represented as Ids1'=1/2k1(Vgs-Vth)², and a current flowing through the drain electrode of T2 is represented as Ids2'=0;

[0085] Ioled refers to a current flowing through the OLED, and thus Ioled=Ids1'+Ids2'=1/2k1(Vgs-Vth)².

[0086] Therefore, the ratio of a current value of Idata to that of Ioled is equal to (k1+k2)/k1, and thus Ioled has a current value in proportion to that of Idata, and it enables a relatively large current scale to exist between Idata and Ioled so that Idata can be a relatively large current and Ioled is guaranteed to be in the range of the operating current of the OLED, thus expediting the speed for charging the storage capacitor Cst.

[0087] The above descriptions are only for illustrating the embodiments of the present disclosure, and in no way limit the scope of the present disclosure. The embodiment of the

disclosure being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the disclosure, and all such modifications as would be obvious to those skilled in the art are intended to be included within the scope of the following claims.

What is claimed is:

1. An AMOLED pixel unit driving circuit for driving an OLED, the AMOLED pixel unit driving circuit including:

a switching unit with a first input terminal connected to a current source for supplying a charging current and a second input terminal connected to the OLED;

a storage capacitor with a first terminal connected to an output terminal of the switching unit and a second terminal connected to a low level;

a driving TFT (Thin Film Transistor) with a gate electrode connected to the first terminal of the storage capacitor and a source electrode connected to the low level; and a current dividing unit with a first terminal connected to the low level,

wherein the switching unit, during a first time period, switches on paths from the first input terminal to a drain electrode of the driving TFT and a second terminal of the current dividing unit so as to charge the storage capacitor by means of the current source, and switches off paths from the second input terminal to the drain electrode of the driving TFT and the second terminal of the current dividing unit; and

the switching unit, during a second time period, switches on the path from the second input terminal to the drain electrode of the driving TFT, switches off the path from the second input terminal to the second terminal of the current dividing unit, and switches off the paths from the first input terminal to the drain electrode of the driving TFT and the second terminal of the current dividing unit.

2. The AMOLED pixel unit driving circuit of claim 1, wherein the current dividing unit is a current dividing TFT, the first terminal of the current dividing unit is a source electrode of the current dividing TFT, the second terminal of the current dividing unit is a drain electrode of the current dividing TFT, and a gate electrode of the current dividing TFT is connected to the first terminal of the storage capacitor.

3. The AMOLED pixel unit driving circuit of claim 2, wherein a threshold voltage of the driving TFT is equal to a threshold voltage of the current dividing TFT.

4. The AMOLED pixel unit driving circuit of claim 2, wherein the switching unit includes a third switching element, a fourth switching element, a fifth switching element and a sixth switching element, wherein

the gate electrode of the driving TFT and the gate electrode of the current dividing TFT are connected to the current source via the third switching element;

the drain electrode of the driving TFT is connected to the current source via the fourth switching element;

the drain electrode of the driving TFT is connected to the OLED via the fifth switching element;

the drain electrode of the current dividing TFT is connected to the drain electrode of the driving TFT via the sixth switching element;

the third switching element switches on connection among the gate electrode of the driving TFT, the gate electrode of the current dividing TFT and the current source during the first time period, and switches off the connection

- among the gate electrode of the driving TFT, the gate electrode of the current dividing TFT and the current source during the second time period;
- the fourth switching element switches on connection between the drain electrode of the driving TFT and the current source during the first time period, and switches off the connection between the drain electrode of the driving TFT and the current source during the second time period;
- the fifth switching element switches on connection between the drain electrode of the driving TFT and the OLED during the second time period; and
- the sixth switching element switches on connection between the drain electrode of the current dividing TFT and the drain electrode of the driving TFT during the first time period, and switches off the connection between the drain electrode of the current dividing TFT and the drain electrode of the driving TFT during the second time period.
5. The AMOLED pixel unit driving circuit of claim 4, wherein the driving TFT, the current dividing TFT, the third switching element, the fourth switching element, the fifth switching element and the sixth switching element are n-type TFTs.
6. An AMOLED pixel unit driving method applied to the AMOLED pixel unit driving circuit of claim 1, and the AMOLED pixel unit driving method including:
- a step for charging the pixel: switching on the paths from the current source for supplying the charging current to the drain electrode of the driving TFT and the second terminal of the current dividing unit, controlling the current source to charge the storage capacitor, and dividing the charging current supplied from the current source into two parts flowing through the driving TFT and the current dividing unit, respectively; and
 - a step for driving the OLED to emit light for displaying: switching on the path from the second input terminal to the drain electrode of the driving TFT, and driving the OLED to emit light for displaying by means of the driving TFT.
7. An AMOLED pixel unit including an OLED and the AMOLED pixel unit driving circuit of claim 1, the AMOLED pixel unit driving circuit is connected to a cathode of the OLED, and an anode of the OLED is connected to a power line for outputting a voltage VDD.
8. The AMOLED pixel unit of claim 7, wherein the current dividing unit is a current dividing TFT,
- the first terminal of the current dividing unit is a source electrode of the current dividing TFT, the second termi-

nal of the current dividing unit is a drain electrode of the current dividing TFT, and a gate electrode of the current dividing TFT is connected to the first terminal of the storage capacitor.

9. The AMOLED pixel unit of claim 8, wherein a threshold voltage of the driving TFT is equal to a threshold voltage of the current dividing TFT.

10. The AMOLED pixel unit of claim 8, wherein the switching unit includes a third switching element, a fourth switching element, a fifth switching element and a sixth switching element, wherein

- the gate electrode of the driving TFT and the gate electrode of the current dividing TFT are connected to the current source via the third switching element;

- the drain electrode of the driving TFT is connected to the current source via the fourth switching element;

- the drain electrode of the driving TFT is connected to the OLED via the fifth switching element;

- the drain electrode of the current dividing TFT is connected to the drain electrode of the driving TFT via the sixth switching element;

- the third switching element switches on connection among the gate electrode of the driving TFT, the gate electrode of the current dividing TFT and the current source during the first time period, and switches off the connection among the gate electrode of the driving TFT, the gate electrode of the current dividing TFT and the current source during the second time period;

- the fourth switching element switches on connection between the drain electrode of the driving TFT and the current source during the first time period, and switches off the connection between the drain electrode of the driving TFT and the current source during the second time period;

- the fifth switching element switches on connection between the drain electrode of the driving TFT and the OLED during the second time period; and

- the sixth switching element switches on connection between the drain electrode of the current dividing TFT and the drain electrode of the driving TFT during the first time period, and switches off the connection between the drain electrode of the current dividing TFT and the drain electrode of the driving TFT during the second time period.

11. The AMOLED pixel unit of claim 10, wherein the driving TFT, the current dividing TFT, the third switching element, the fourth switching element, the fifth switching element and the sixth switching element are n-type TFTs.

* * * * *

专利名称(译)	Amoled像素单元驱动电路和方法， amoled像素单元和显示装置		
公开(公告)号	US20130147386A1	公开(公告)日	2013-06-13
申请号	US13/805732	申请日	2012-08-23
[标]申请(专利权)人(译)	齐晓静		
申请(专利权)人(译)	TAN，文 齐，晓静		
当前申请(专利权)人(译)	成都京东方光电科技有限公司. 京东方科技集团股份有限公司.		
[标]发明人	TAN WEN QI XIAOJING		
发明人	TAN, WEN QI, XIAOJING		
IPC分类号	H05B33/08		
CPC分类号	G09G3/325 H05B33/0842 H05B45/00		
优先权	201110247334.5 2011-08-25 CN		
其他公开文献	US9119259		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种AMOLED像素单元驱动电路和方法，AMOLED像素单元和显示装置，AMOLED像素单元驱动电路包括：开关单元，其第一输入端连接到用于提供充电电流的电流源，以及第二输入端连接到OLED；存储电容器，其第一端连接到开关单元的输出端，第二端连接到低电平；驱动TFT，其栅极连接到存储电容的第一端，源极连接到低电平；以及分流单元，其第一端连接到低电平。本公开的实施例使得能够在充电电流I_{data}和流过OLED的电流之间存在相对大的规模。

