



US009692010B2

(12) **United States Patent**
Ryu et al.

(10) **Patent No.:** **US 9,692,010 B2**
(45) **Date of Patent:** **Jun. 27, 2017**

(54) **ORGANIC LIGHT EMITTING DISPLAY DEVICE**

(71) Applicant: **SAMSUNG DISPLAY CO., LTD.**,
Yongin-si, Gyeonggi-do (KR)

(72) Inventors: **Ji-Hun Ryu**, Suwon-si (KR);
SeongMin Wang, Yongin-si (KR)

(73) Assignee: **Samsung Display Co., Ltd.**, Yongin-si
(KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/152,467**

(22) Filed: **May 11, 2016**

(65) **Prior Publication Data**

US 2016/0254490 A1 Sep. 1, 2016

Related U.S. Application Data

(63) Continuation-in-part of application No. 14/624,515,
filed on Feb. 17, 2015, now Pat. No. 9,349,988, which
(Continued)

(30) **Foreign Application Priority Data**

Nov. 20, 2012 (KR) 10-2012-0131458

(51) **Int. Cl.**

H01L 51/00 (2006.01)

H01L 51/52 (2006.01)

H01L 51/56 (2006.01)

(52) **U.S. Cl.**

CPC **H01L 51/5256** (2013.01); **H01L 51/56**
(2013.01)

(58) **Field of Classification Search**

CPC .. H01L 51/5237; H01L 51/5256; H01L 51/56
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2003/0209708 A1 11/2003 Kubota
2006/0040135 A1 2/2006 Morii

(Continued)

FOREIGN PATENT DOCUMENTS

KR 10-2009-0112387 A 10/2009
KR 10-2010-0085347 7/2010

(Continued)

OTHER PUBLICATIONS

KIPO Office action dated Dec. 16, 2013, for corresponding Korean
Patent application 10-2012-0131458, (6 pages).

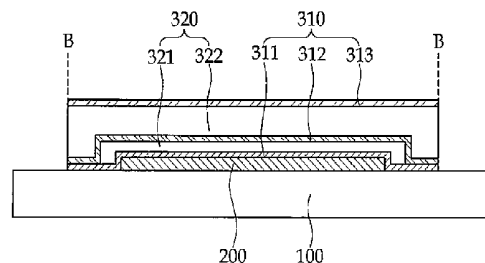
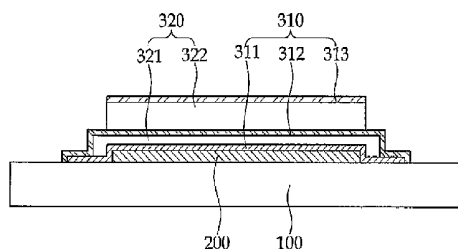
Primary Examiner — Tu-Tu Ho

(74) *Attorney, Agent, or Firm* — Lewis Roca Rothgerber
Christie LLP

(57) **ABSTRACT**

An organic light emitting display device comprising: a substrate; a display area on the substrate; and an encapsulation layer disposed on the display area and comprising a plurality of inorganic layers and a plurality of organic layers, wherein the plurality of inorganic layers and the plurality of organic layers are alternately laminated, the inorganic layer comprises at least first to third inorganic layers, the organic layer comprises at least first and second organic layers, the first inorganic layer is disposed on the display area, the first organic layer is disposed on the first inorganic layer, the second inorganic layer is disposed on the first organic layer and covers end portions of the first inorganic layer, the second organic layer is disposed on the second inorganic layer, and the third inorganic layer is disposed on the second organic layer and does not contact the second inorganic layer.

18 Claims, 6 Drawing Sheets



Related U.S. Application Data

is a continuation-in-part of application No. 14/015,828, filed on Aug. 30, 2013, now Pat. No. 9,000,427.

(58) Field of Classification Search

USPC 257/40, 59, 72
See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

2008/0309226	A1	12/2008	Kim et al.
2009/0021157	A1	1/2009	Kim et al.
2009/0267487	A1	10/2009	Kwack et al.
2010/0181903	A1	7/2010	Kim et al.
2011/0163330	A1	7/2011	Kim et al.
2012/0091477	A1	4/2012	Kim
2012/0133275	A1	5/2012	Lee et al.
2012/0168796	A1	7/2012	Moon et al.
2012/0248422	A1	10/2012	Mine et al.
2015/0021565	A1 *	1/2015	Min H01L 51/5256 257/40

FOREIGN PATENT DOCUMENTS

KR	10-2011-0048683	A	5/2011
KR	10-2012-0040480	A	4/2012
KR	10-2012-0057286	A	6/2012
KR	10-2012-0112056	A	10/2012

* cited by examiner

FIG. 1

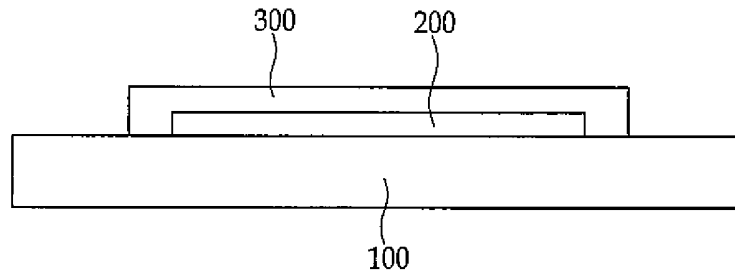


FIG. 2

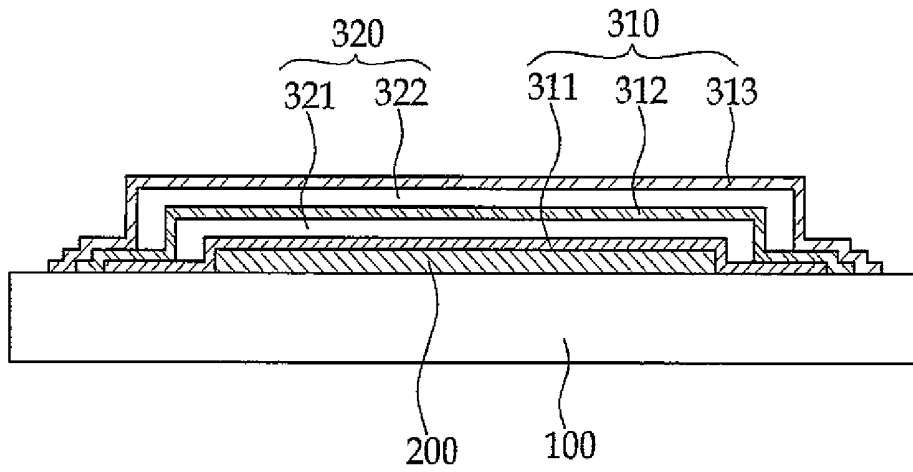


FIG. 3

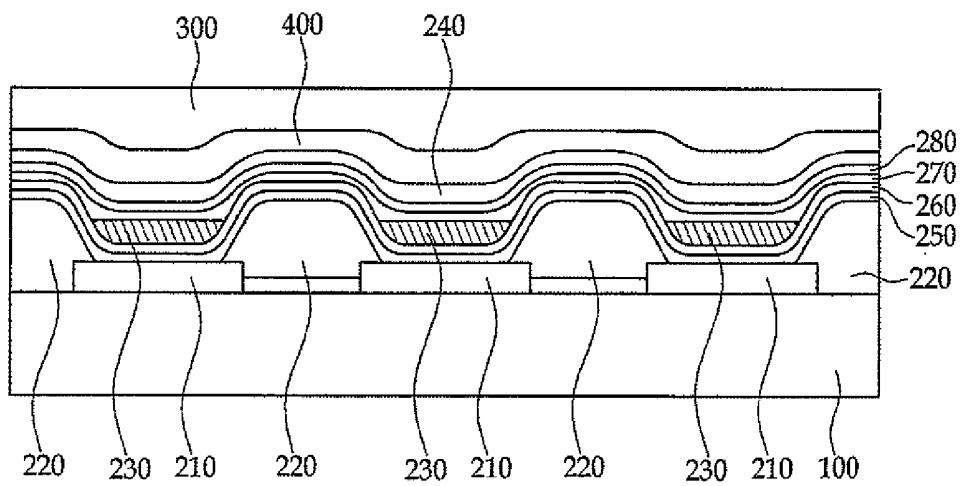


FIG. 4

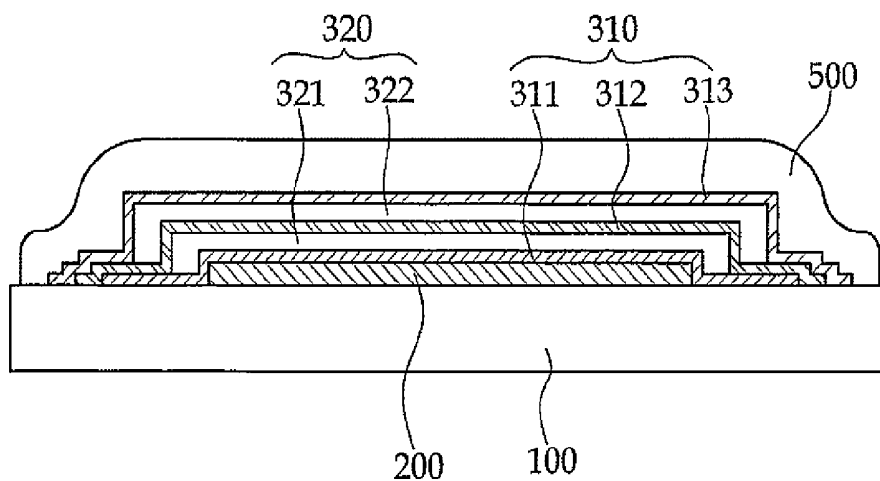


FIG. 5A

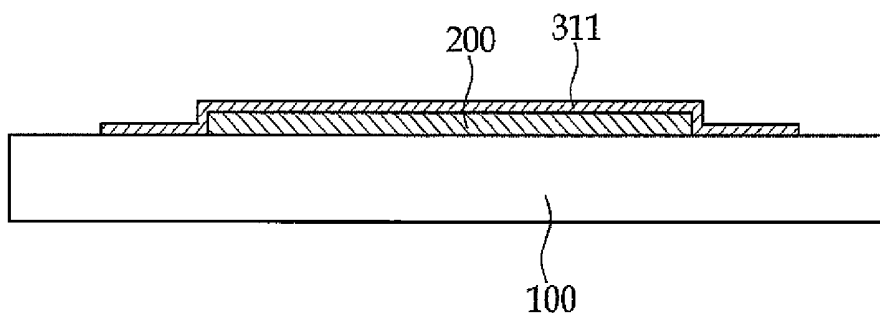


FIG. 5B

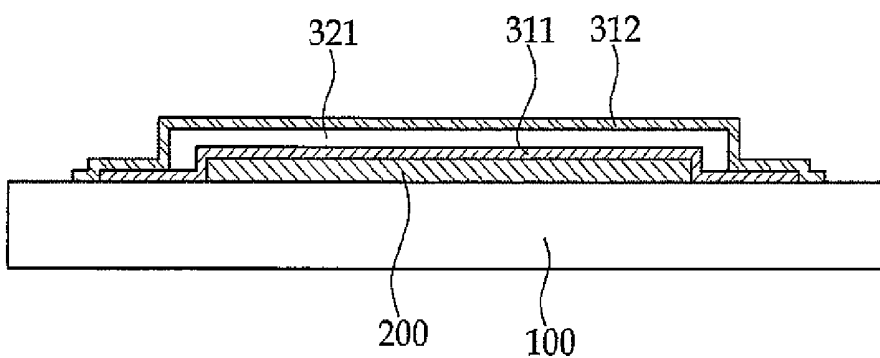


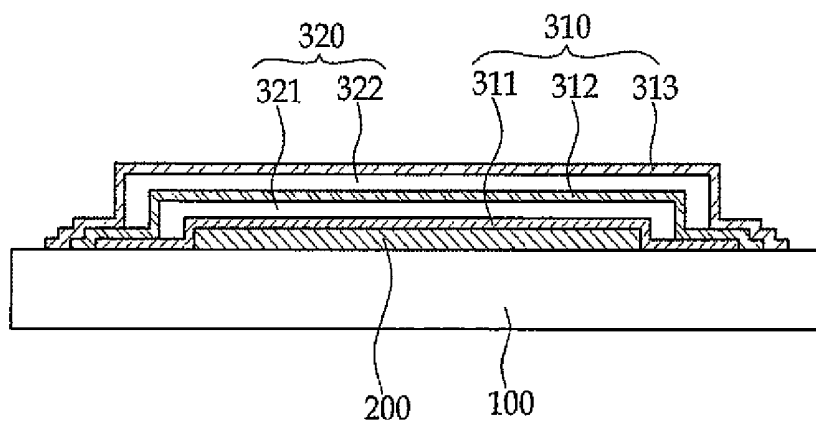
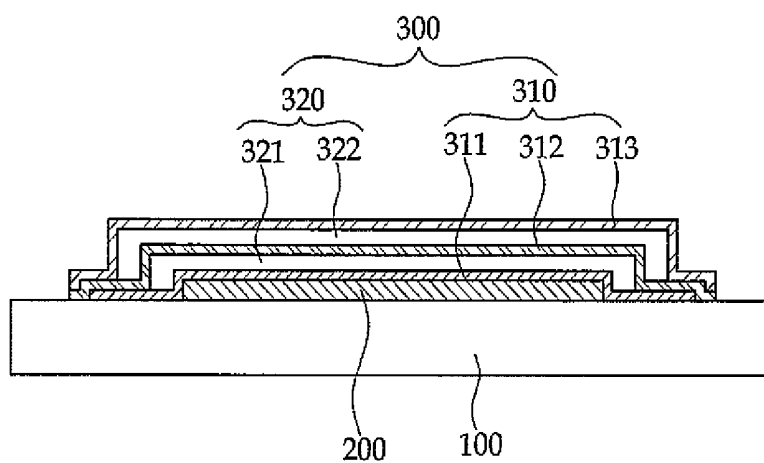
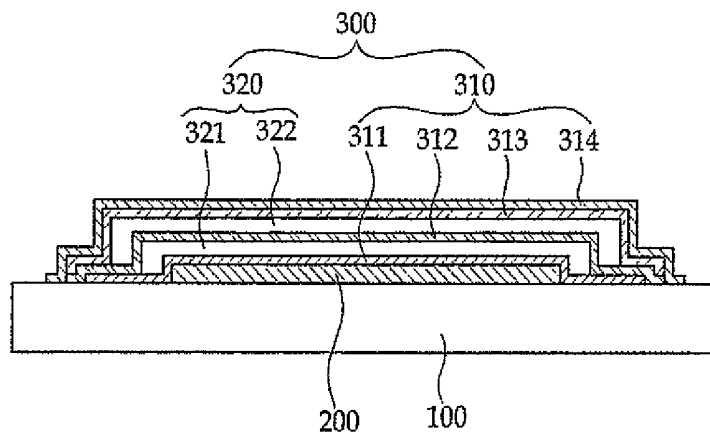
FIG. 5C**FIG. 6****FIG. 7**

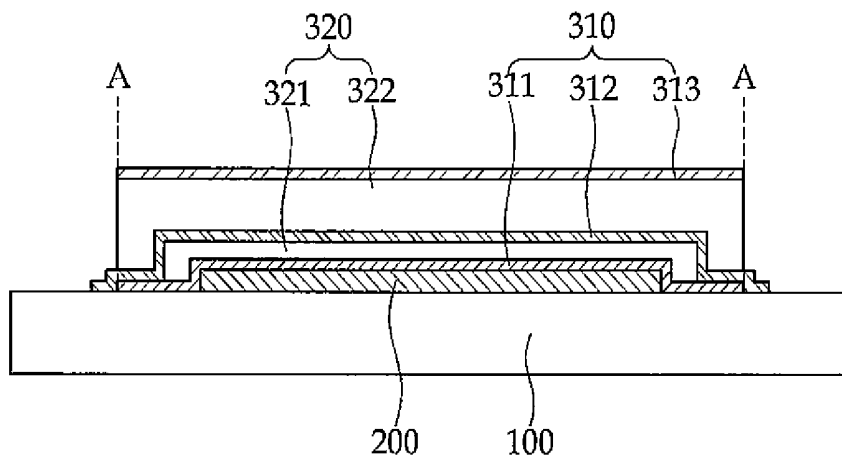
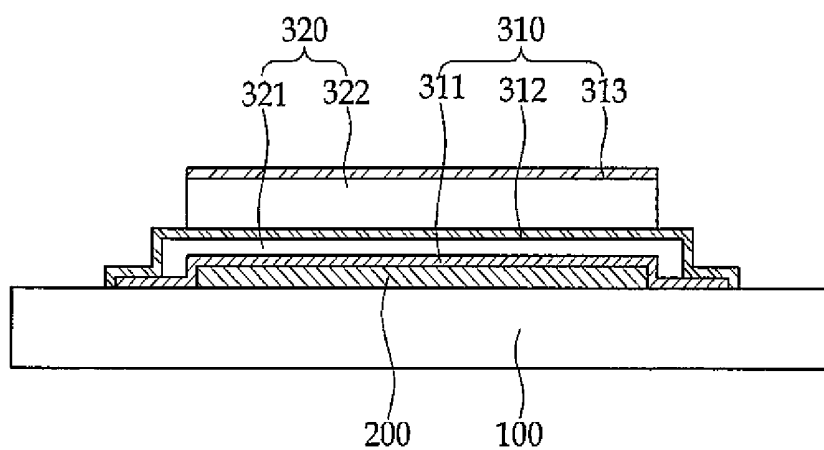
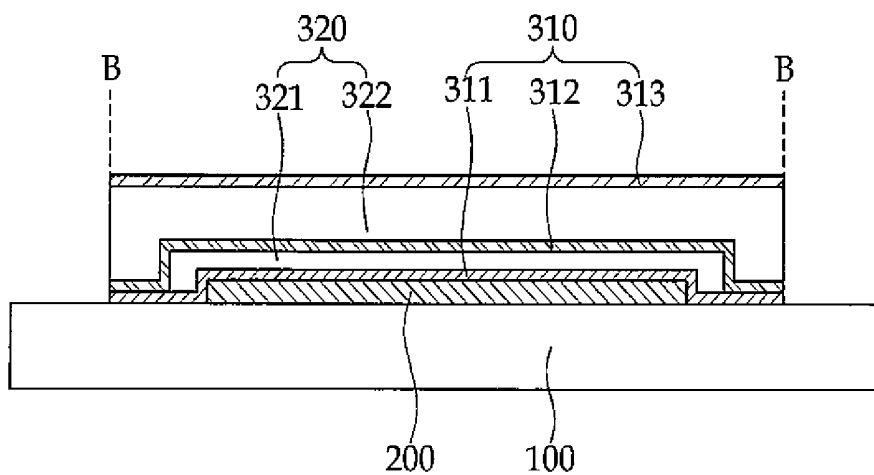
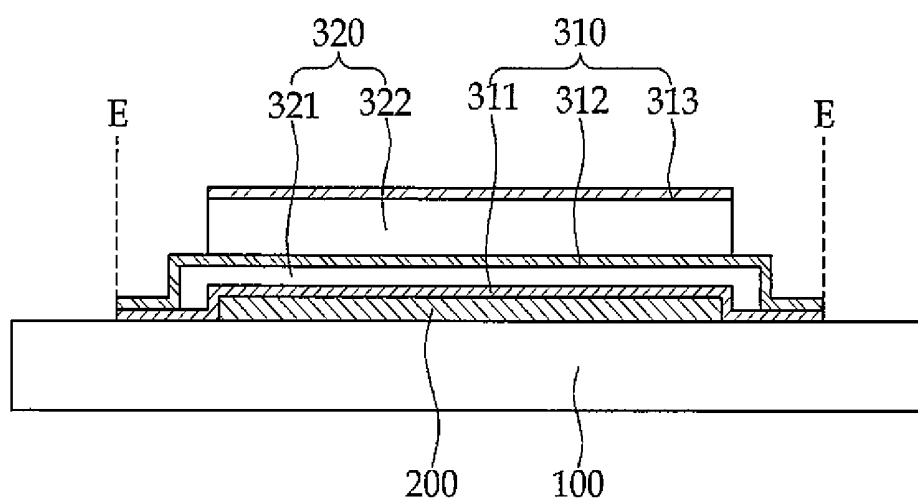
FIG. 8**FIG. 9****FIG. 10**

FIG. 14

ORGANIC LIGHT EMITTING DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of U.S. patent application Ser. No. 14/624,515, filed Feb. 17, 2015, which is a continuation-in-part of U.S. patent application Ser. No. 14/015,828, filed Aug. 30, 2013, now U.S. Pat. No. 9,000,427, which claims priority to and the benefit of Korean Patent Application No. 10-2012-0131458, filed on Nov. 20, 2012, with the Korean Intellectual Property Office, the entire contents of all of which are incorporated herein in their entirety by reference.

TECHNICAL FIELD

Embodiments of the present invention relate to an organic light emitting display device, and more particularly, to an organic light emitting display device that reduces (or prevents) penetration of moisture into ends of inorganic layers and a lifting phenomenon between inorganic layers, by increasing areas of a plurality of inorganic layers included in a thin film encapsulation layer in sequence.

BACKGROUND

An organic light emitting display device is a self-emission display device which has an organic light emitting diode that emits light to display an image. Since an organic light emitting display device generally does not require a separate light source unlike a liquid crystal display, it is possible to relatively reduce a thickness and weight thereof. In addition, an organic light emitting display device may exhibit characteristics such as low power consumption, high luminance, and a rapid response speed.

In an organic light emitting display device, a display unit may deteriorate due to penetration of oxygen or moisture. Accordingly, in order to reduce (or prevent) oxygen or moisture from penetrating from the outside, an encapsulation structure for sealing and protecting the display unit may be used.

For example, an encapsulation structure including a thin film encapsulation structure which covers the display unit by a multilayer, in which organic layers and inorganic layers are alternately laminated, has been adopted. That is, the display unit is sealed by alternately laminating the organic layers and the inorganic layers on the display unit of the substrate. Here, the organic layers may function to give flexibility to a flat panel display, and the inorganic layers may function to reduce (or prevent) penetration of oxygen or moisture.

SUMMARY

Aspects of embodiments of the present invention provide an organic light emitting display device for improving an encapsulation structure to more efficiently protect an organic light emitting diode unit. For example, some embodiments of the present invention provide an organic light emitting display device for reducing (or preventing) a lifting phenomenon of edges of inorganic layers and more efficiently blocking moisture and oxygen from penetrating.

An exemplary embodiment of the present invention provides An organic light emitting display device comprising: a substrate; a display area on the substrate; and an encapsulation layer disposed on the display area and comprising

a plurality of inorganic layers and a plurality of organic layers, wherein the plurality of inorganic layers and the plurality of organic layers are alternately laminated, the inorganic layer comprises at least first to third inorganic layers, the organic layer comprises at least first and second organic layers, the first inorganic layer is disposed on the display area, the first organic layer is disposed on the first inorganic layer, the second inorganic layer is disposed on the first organic layer and covers end portions of the first inorganic layer, the second organic layer is disposed on the second inorganic layer, and the third inorganic layer is disposed on the second organic layer and does not contact the second inorganic layer.

Ends of the third inorganic layer and ends of the first inorganic layer may be disposed in same positions, respectively.

Side surfaces of the third inorganic layer and side surfaces of the first inorganic layer may be disposed on same planar surfaces, respectively.

The third inorganic layer may have a less planar area than a planar area of the first inorganic layer.

An exemplary embodiment of the present invention provides An organic light emitting display device comprising: a substrate; a display area on the substrate; and an encapsulation layer disposed on the display area and comprising a plurality of inorganic layers and a plurality of organic layers, wherein the plurality of inorganic layers and the plurality of organic layers are alternately laminated, the inorganic layer comprises at least first to third inorganic layers, the organic layer comprises at least first and second organic layers, the first inorganic layer is disposed on the display area, the first organic layer is disposed on the first inorganic layer, the second inorganic layer is disposed on the first organic layer and contacts end portions of the first inorganic layer, the second organic layer is disposed on the second inorganic layer, and the third inorganic layer is disposed on the second organic layer and does not contact the second inorganic layer.

The second inorganic layer may not cover the end portions of the first inorganic layer.

Ends of the first inorganic layer, ends of the second inorganic layer, and ends of the third inorganic layer may be disposed in same positions, respectively.

Side surfaces of the first inorganic layer, side surfaces of the second inorganic layer, and side surfaces of the third inorganic layer may be disposed on same planar surfaces, respectively.

The ends of the third inorganic layer and the ends of the first inorganic layer may be disposed in same positions, respectively.

The side surfaces of the third inorganic layer and the side surfaces of the first inorganic layer may be disposed on same planar surfaces, respectively.

The second inorganic layer may have a less planar area than a planar area of the first inorganic layer and a planar area of the third inorganic layer.

The ends of the third inorganic layer and the ends of the second inorganic layer may be disposed in same positions, respectively.

The side surfaces of the third inorganic layer and the side surfaces of the second inorganic layer may be disposed on same planar surfaces, respectively.

The first inorganic layer may have a larger planar area than a planar area of the second inorganic layer and a planar area of the third inorganic layer.

The first inorganic layer may have a less planar area than a planar area of the second inorganic layer, and the second

inorganic layer may have a larger planar area than a planar area of the third inorganic layer.

Ends of the second inorganic layer and ends of the first inorganic layer may be disposed in same positions, respectively.

Side surfaces of the second inorganic layer and side surfaces of the first inorganic layer may be disposed on same planar surfaces, respectively.

The third inorganic layer may have a less planar area than a planar area of the first inorganic layer and a planar area of the second inorganic layer.

In the organic light emitting display device according to an exemplary embodiment of the present invention, it is possible to reduce (or prevent) a lifting phenomenon between inorganic layers which are in contact with each other and reduce (or block) penetration of oxygen or moisture into edges of the inorganic layers.

The foregoing summary is illustrative only and is not intended to be in any way limiting. In addition to the illustrative aspects, embodiments, and features described above, further aspects, embodiments, and features will become apparent by reference to the drawings and the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view schematically illustrating an organic light emitting display device according to an exemplary embodiment of the present invention.

FIG. 2 is a cross-sectional view enlarging an encapsulation layer in the organic light emitting display device of FIG. 1.

FIG. 3 is a diagram illustrating the organic light emitting display device illustrated in FIG. 1 in more detail.

FIG. 4 is a cross-sectional view illustrating an organic light emitting display device according to another exemplary embodiment of the present invention.

FIGS. 5A to 5C are diagrams schematically illustrating a manufacturing process of an organic light emitting display device according to an exemplary embodiment of the present invention.

FIG. 6 is a schematic cross-sectional view illustrating the organic light emitting display device according to the third exemplary embodiment.

FIG. 7 is a schematic cross-sectional view illustrating the organic light emitting display device according to the fourth exemplary embodiment.

FIG. 8 is a schematic cross-sectional view illustrating the organic light emitting display device according to the fifth exemplary embodiment.

FIG. 9 is a schematic cross-sectional view illustrating the organic light emitting display device according to the sixth exemplary embodiment.

FIG. 10 is a schematic cross-sectional view illustrating the organic light emitting display device according to the seventh exemplary embodiment.

FIG. 11 is a schematic cross-sectional view illustrating the organic light emitting display device according to the eighth exemplary embodiment.

FIG. 12 is a schematic cross-sectional view illustrating the organic light emitting display device according to the ninth exemplary embodiment.

FIG. 13 is a schematic cross-sectional view illustrating the organic light emitting display device according to the tenth exemplary embodiment.

FIG. 14 is a schematic cross-sectional view illustrating the organic light emitting display device according to the eleventh exemplary embodiment.

DETAILED DESCRIPTION

Hereinafter, exemplary embodiments of the present invention will be described in more detail with reference to the accompanying drawings. However, the scope of the present invention is not limited to the following examples and drawings. Exemplary embodiments to be described below and illustrated in the drawings may include various equivalences and modifications.

The terminology used in this specification is used in order to express exemplary embodiments of the present invention and may depend on the intention of users or operators or the custom in the art to which the present invention belongs. Accordingly, the terminology should be viewed in the context of the details described throughout this specification.

For reference, respective components and shapes thereof may be schematically drawn or exaggeratedly drawn in the accompanying drawings for ease of understanding. Like reference numerals designate like elements throughout the drawings.

Further, it will be understood that when a layer or an element is described as being "on" another layer or element, it may be directly disposed on another layer or element, or an intervening layer or element may also be present.

FIG. 1 is a cross-sectional view schematically illustrating an organic light emitting display device according to an exemplary embodiment of the present invention. Referring to FIG. 1, the organic light emitting display device according to an exemplary embodiment of the present invention includes a substrate **100**, a display unit **200** formed on the substrate **100**, and an encapsulation layer **300** formed on the display unit **200**.

The substrate **100** may be made of various materials such as a glass substrate, a quartz substrate, and a transparent resin substrate, and may be formed by using a flexible material. The transparent resin substrate which may be used as the substrate **100** may contain a polyimide resin, an acrylic resin, a polyacrylate resin, a polycarbonate resin, a polyether resin, a polyethylene terephthalate resin, a sulfonic acid resin, and the like.

In the case where the organic light emitting diode display is a rear emission type and an image is displayed toward the substrate **100** side, the substrate **100** may be made of a light transmitting material, but in the case of a front emission type where an image is displayed toward the encapsulation layer **300** side, the substrate **100** may not necessarily be made of a light transmitting material.

The display unit **200** is an element including an emission layer **230**. A detailed configuration according to an embodiment will be described below.

In one embodiment, the encapsulation layer **300** has a structure in which organic layers **320** and inorganic layers **310** are alternately laminated. In order to reduce (or prevent) oxygen or moisture from penetrating from the outside, the organic layers **320** may be positioned at the inner side of the encapsulation layer **300**, adjacent to the display unit, and the inorganic layers **310** may be positioned toward the outer side of encapsulation layer, away from the display unit.

The inorganic layers **310** may be laminated to have substantially the same size, and in this case, a space may be formed between ends of two inorganic layers **310** which are in contact with each other at edges of the inorganic layers **310**, and as a result, a lifting phenomenon between the

inorganic layers 310 occurs, and oxygen or moisture may penetrate between the ends of the inorganic layers 310.

FIG. 2 is a cross-sectional view enlarging an encapsulation layer in the organic light emitting display device of FIG. 1.

Referring to FIG. 2, the encapsulation layer 300 may include a plurality of inorganic layers 310 and a plurality of organic layers 320. The plurality of inorganic layers 310 and the plurality of organic layers 320 may be alternately laminated.

The outermost layer of the encapsulation layer 300 is constituted by the inorganic layer 310.

In FIG. 2, the plurality of inorganic layers 310 includes a first inorganic layer 311, a second inorganic layer 312, and a third inorganic layer 313. However, embodiments of the present invention are not limited thereto, and the inorganic layers 310 may be formed with four or more layers.

In FIG. 2, the plurality of organic layers 320 includes a first organic layer 321 and a second organic layer 322. However, embodiments of the present invention are not limited thereto, and the organic layers 320 may be formed with three or more layers.

The plurality of organic layers 320 may be formed in a region where the plurality of inorganic layers 310 is disposed.

For example, the first organic layer 321 may be formed in a region where the first inorganic layer 311 and the second inorganic layer 312 are disposed, and the second organic layer 322 may be formed in a region where the second inorganic layer 312 and the third inorganic layer 313 are disposed. That is, the organic layers 320 may be completely covered by the inorganic layers 310 formed on the organic layers 320.

For example, the first organic layer 321 may be formed on the first inorganic layer 311 and formed in the region of the first inorganic layer 311. The second inorganic layer 312 may be formed on the first organic layer 321, and the second inorganic layer 312 may completely cover the first organic layer 321 up to the first inorganic layer 311. The second organic layer 322 and the third inorganic layer 313 may be continuously formed by the method.

The plurality of inorganic layers 310 may cover the display unit 200 and may be laminated on the substrate 100 in sequence, and areas thereof may be increased moving in a direction away from the display unit 200.

For example, an area of the first inorganic layer 311 may be smaller than an area of the second inorganic layer 312, and an area of the second inorganic layer 312 may be smaller than an area of the third inorganic layer 313. An area of the plurality of inorganic layers 310 may be formed to cover all of the laminated inorganic layers 310 and organic layers 320 (e.g., the lower laminated inorganic layers 310 and organic layers 320).

According to an embodiment, since the areas of the plurality of organic layers 320 are smaller than the areas of the plurality of inorganic layers 310, the edge of the encapsulation layer 300 may have a structure in which the plurality of inorganic layers 310 is sequentially laminated on the substrate 100. That is, the plurality of inorganic layers 310 may have a structure in which the upper inorganic layer covers the end of the lower inorganic layer. The upper inorganic layer may mean that the inorganic layer is relatively far away from the substrate 100 in a vertical direction of the substrate 100, and the lower inorganic layer may mean that the inorganic layer is relatively close to the substrate 100 in the vertical direction of the substrate 100.

Accordingly, since the upper inorganic layer covers up to the lower inorganic layer, the organic light emitting display device according to an exemplary embodiment of the present invention may suppress the lifting phenomenon between the adjacent layers at the edge of the encapsulation layer 300 and may reduce (or block) penetration of oxygen or moisture.

Meanwhile, the areas of the plurality of organic layers 320 may be increased moving in a direction away from the display unit 200. Since the areas of the plurality of inorganic layers 310 are increased moving in a direction away from the display unit 200, the areas of the plurality of organic layers 320 included in the region where the plurality of inorganic layers 310 is disposed are increased in proportion to the degree that the areas of the plurality of inorganic layers 310 are increased.

Thin film materials which may be used as the inorganic layers 310 and the organic layers 320, and a laminating method of the inorganic layers 310 and the organic layers 320, are without specific limitation and may be any material or method known in the art.

For example, the thin film material which is used as the inorganic layers 310 may contain at least one selected from a group constituted by silicon nitride, aluminum nitride, zirconium nitride, titanium nitride, hafnium nitride, tantalum nitride, silicon oxide, aluminum oxide, and titanium oxide.

The thin film material which is used as the organic layers 320 may contain at least one selected from a group constituted by epoxy, acrylate, urethane acrylate, polyurea, polyacrylate, PTCDA, BPDA, and PMDA.

However, any inorganic thin film materials or organic thin film materials which are known in the art may be used as the materials of the inorganic layers 310 or the organic layers 320 of the present invention.

The inorganic layers 310 and the organic layers 320 may be formed by using a spin coating process, a printing process, a sputtering process, a chemical vapor deposition (CVD) process, an atomic layer deposition (ALD) process, a plasma enhanced chemical vapor deposition (PECVD) process, a high density plasma-chemical vapor deposition (HDP-CVD) process, a vacuum deposition process, and the like according to a material for forming the encapsulation layer 300.

A thickness of each inorganic layer 310 configuring the plurality of inorganic layers 310 may be in the range of 10 nm to 50 nm.

When the thickness of each inorganic layer 310 is less than 10 nm, the penetration of moisture and oxygen may not be sufficiently blocked, and when the thickness of each inorganic layer 310 is more than 50 nm, the thickness of the organic light emitting display device may be increased and thus the organic light emitting display device may be an obstacle to thinness.

Meanwhile, as the inorganic layers 310 become thicker, the stress of the inorganic layers may be increased and thus the lifting phenomenon of the inorganic layers 310 may occur.

A thickness of each organic layer 320 configuring the plurality of organic layers 320 may be in the range of 10 nm to 50 nm. When the thickness of each organic layer 320 is less than 10 nm, it may be difficult to ensure flexibility of the organic light emitting display device, and when the thickness of each organic layer 320 is more than 50 nm, there may be a problem in that the thickness of the organic light emitting display device is increased. However, the numeri-

cal ranges of the inorganic layers **310** and the organic layers **320** may be changed according to a use and a function of a thin film encapsulation layer.

FIG. **3** is a diagram illustrating the organic light emitting display device illustrated in FIG. **1** in more detail.

Referring to FIG. **3**, the display unit **200** may include a first electrode **210** formed on the substrate **100**, a pixel defining layer (PDL) **220** formed between the first electrodes **210**, an emission layer **230** formed on the first electrode **210**, and a second electrode **240** formed on the emission layer **230**.

In the case where an organic light emitting display device is a front emission type, the first electrode **210** may contain at least one of gold (Au), platinum (Pt), nickel (Ni), tungsten (W), chromium (Cr), molybdenum (Mo), iron (Fe), cobalt (Co), copper (Cu), palladium (Pd), titanium (Ti), and a compound thereof. In addition, the second electrode **240** may contain at least one of indium tin oxide (ITO) and indium zinc oxide (IZO), which are transparent conductive oxides.

In the case where the organic light emitting display device is a rear emission type, the first electrode **210** may contain at least one of indium tin oxide (ITO) and indium zinc oxide (IZO), which are transparent conductive oxides having a high work function. In addition, the second electrode **240** may be made of metal having a low work function, that is, alkali metals such as lithium (Li) and cesium (Cs), alkaline earth metals such as magnesium (Mg), calcium (Ca) and strontium (Sr), and a compound thereof.

The first electrode **210** and the second electrode **240** may contain any materials which are known in the art.

The pixel defining layer **220** may be made of a material having an insulation property to partition the first electrodes **210** into pixel units. For example, the pixel defining layer **220** may be disposed at an edge of the first electrode **210** to partition the first electrodes into pixel unit and define pixel areas. The pixel defining layer **220** may cover the edge of the first electrode **210**.

The emission layer **230** may include a red emission layer, a green emission layer, and a blue emission layer.

A hole injection layer (HIL) **250** and a hole transfer layer (HTL) **260** may be included between the first electrode **210** and the emission layer **230**, and an electron transport layer (ETL) **270** and an electron injection layer (EIL) **280** may be included between the emission layer **230** and the second electrode **240**.

A capping layer **400** may be disposed between the display unit **200** and the encapsulation layer **300**, and the capping layer **400** may be made of a transparent material having ultraviolet light absorbing capacity.

FIG. **4** is a cross-sectional view illustrating an organic light emitting display device according to another exemplary embodiment of the present invention. Referring to FIG. **4**, the organic light emitting display device according to another exemplary embodiment of the present invention may further include an encapsulation protecting layer **500** covering the encapsulation layer **300**.

The encapsulation protecting layer **500** may seal the edge of the encapsulation layer **300** once more. Accordingly, the encapsulation protecting layer **500** may reduce (or prevent) the lifting phenomenon between the inorganic layers **310**, increase an effect of reducing (or blocking) the penetration of oxygen or moisture, and better protect the organic light emitting display device from mechanical and physical damages applied from the outside.

The encapsulation protecting layer **500** may be made of an organic material, and the organic material may be the same as the material of the plurality of organic layers **320**.

A thickness of the encapsulation protecting layer **500** may be approximately 1 to 20 μm . When the thickness of the encapsulation protecting layer **500** is less than 1 μm , the organic light emitting display device may be damaged due to external factors, and when the thickness of the encapsulation protecting layer **500** is more than 20 μm , there may be a problem in that the thickness of the organic light emitting display device is increased.

FIGS. **5A** to **5C** are diagrams schematically illustrating a manufacturing process of the organic light emitting display device according to an exemplary embodiment of the present invention.

In step (a), the first inorganic layer **311** is formed on the substrate **100** having the display unit **200** (see FIG. **5A**). In step (b), the encapsulation layer **300** is formed on the display unit **200**.

Step (b) includes step (c) and step (d) (see FIG. **5B**).

In step (c), the first inorganic layer **311** covers the entire display unit **200** and a part of the substrate **100**.

After step (c), in step (d), the first organic layer **321** is formed on the first inorganic layer **311**, and the second inorganic layer **312** covers the first organic layer **321** and the first inorganic layer **311** (see FIG. **5B**).

After step (d), laminating the inorganic layers **310** and the organic layers **320** in sequence may be repeated one or more times.

For example, after forming the second inorganic layer **312**, the second organic layer **322** is formed on the second inorganic layer **312**, and the third inorganic layer **313** covers the second inorganic layer **312** and the second organic layer **322** (see FIG. **5C**). That is, in each step of forming the plurality of inorganic layers **310**, the areas of the plurality of inorganic layers **310** may be largely formed to cover up to the ends of the already formed inorganic layers **310**. The laminating of the plurality of organic layers **320** and the plurality of inorganic layers **310** in sequence may be performed 2 to 30 times.

Hereinafter, an organic light emitting display device according to a third exemplary embodiment of the present invention will be described with reference to FIG. **6**. Configurations identical to those described in the above exemplary embodiment will not be further described for ease of description.

FIG. **6** is a schematic cross-sectional view illustrating the organic light emitting display device according to the third exemplary embodiment.

Referring to FIG. **6**, an encapsulation layer **300** according to the third exemplary embodiment may be disposed on a display area **200** and may include a plurality of inorganic layers **310** and a plurality of organic layers **320**. The plurality of inorganic layers **310** and the plurality of organic layers **320** are alternately laminated. The inorganic layer **310** may include at least first, second, and third inorganic layers **311**, **312**, and **313**. The organic layer **320** may include at least first and second organic layers **321** and **322**.

In some embodiments, as illustrated in FIG. **6**, the first inorganic layer **311** may be disposed on the display area **200**. The first organic layer **321** may be disposed on the first inorganic layer **311**. The second inorganic layer **312** may be disposed on the first organic layer **321** and may cover end portions of the first inorganic layer **311**. The second organic layer **321** may be disposed on the second inorganic layer **312**. The third inorganic layer **313** may be disposed on the second organic layer **322** and the second inorganic layer **312**.

Further, the second inorganic layer **312** may cover the end portions of the first organic layer **321**. The third inorganic layer **313** may not cover end portions of the second inorganic layer **312** and may cover end portions of the second organic layer **322**. In other words, only the second inorganic layer **312** may cover the end portions of the first inorganic layer **311** and the third inorganic layer **313** may be disposed only on the second inorganic layer **312**. As the second inorganic layer **312** covers the end portions of the first inorganic layer **311**, infiltration of oxygen or moisture through edge portions of the inorganic layer **310** may be prevented or efficiently reduced.

The inorganic layer **310** may be formed as a single film or laminated film including a metal oxide or metal nitride. In more detail, the inorganic layer **310** may include at least one of the followings: SiNx, Al₂O₃, SiO₂, TiO₂, SiON, ITO, AZO, ZnO, and ZrO.

The inorganic layer **310** may be formed by a vacuum film formation method, such as sputtering, chemical vapor deposition (CVD), e-beam, thermal evaporation, or thermal ion beam assisted deposition (IBAD). Examples of the CVD may include ICP-CVD (Induced Coupled Plasma-Chemical Vapor Deposition), CCP (Capacitively Coupled Plasma)-CVD, SWP (Surface Wave Plasma)-CVD and so on, which is, however, provided only for illustration, and all possible methods that are currently developed and commercially available or can be realized in the future according to the technological development may be employed in forming the inorganic material layer according to the present invention, which is, however, provided only for illustration, and all possible methods that are currently developed and commercially available or can be realized in the future according to the technological development may be employed in forming the inorganic material layer according to the present invention.

The organic layer **320** may be formed as a single layer or stacked layer including at least one of the following polymers: polyethylene terephthalate, polyimide, polycarbonate, epoxy, polyethylene, and polyacrylate. More desirably, the organic layer may be formed of polyacrylates and may include, in more detail, high-molecularized monomer components including diacrylate-based monomers or triacrylate-based monomers. The monomer components may further include monoacrylate-based monomers.

The organic layer **320** may be laminated by spin coating, spray coating, screen printing, ink-jetting, dispensing, and the like, but not limited thereto. In addition, all possible methods that are currently developed and commercially available or can be realized in the future according to the technological development may be employed in forming the organic material layer according to the present invention, and examples thereof may include sputtering, chemical vapor deposition (CVD), plasma enhanced chemical vapor deposition (PECVD), thermal evaporation, thermal ion beam assisted deposition (IBAD), and atomic layer deposition (ALD).

A lamination structure of the organic layer **320** and the inorganic layer **310** is not limited thereto. In some embodiments, a plurality of organic layers **320** and a plurality of inorganic layers **310** may be alternately laminated on the third inorganic layer **313** additionally. In this case, the plurality of inorganic layer **310** disposed on the third inorganic layer **313** may not cover the end portions of the lower inorganic layer.

Hereinafter, an organic light emitting display device according to a fourth exemplary embodiment of the present invention will be described with reference to FIG. 7. The

fourth exemplary embodiment is a modified structure of the third exemplary embodiment according to an embodiment of the present invention, and thus repeated description will be omitted for brevity.

FIG. 7 is a schematic cross-sectional view illustrating the organic light emitting display device according to the fourth exemplary embodiment.

Referring to FIG. 7, an encapsulation layer **300** according to the fourth exemplary embodiment may further include a fourth inorganic layer **314**. In more detail, an inorganic layer **310** further includes the fourth inorganic layer **314**. The fourth inorganic layer **314** may be disposed on a third inorganic layer **313** and may cover end portions of the second and third inorganic layers **312** and **313**. In some embodiments, the fourth inorganic layer **314** may be a top layer of the encapsulation layer **300** exposed outwards.

Meanwhile, the plurality of organic layers **320** and the plurality of inorganic layers **310** may be alternately laminated between the third and fourth inorganic layers **313** and **314**.

According to the fourth exemplary embodiment, the fourth inorganic layer **314** may cover the end portions of the second and third inorganic layers **312** and **313**, thereby preventing or efficiently reducing infiltration of oxygen and moisture through edge portions of the inorganic layer **310**.

Hereinafter, an organic light emitting display device according to a fifth exemplary embodiment of the present invention will be described with reference to FIG. 8. Configurations identical to those described in the above exemplary embodiment will not be further described for ease of description.

FIG. 8 is a schematic cross-sectional view illustrating the organic light emitting display device according to the fifth exemplary embodiment.

Referring to FIG. 8, an encapsulation layer **300** according to the fifth exemplary embodiment may be disposed on a display area **200**, and may include a plurality of inorganic layers **310** and a plurality of organic layers **320**. The plurality of inorganic layers **310** and the plurality of organic layers **320** may be alternately laminated. The inorganic layer **310** may include at least a first inorganic layer **311**, a second inorganic layer **312**, and a third inorganic layer **313**. The organic layer **320** may include at least a first organic layer **321** and a second organic layer **322**. The end portion of the first inorganic layer **311** refers to a portion of the first inorganic layer **311** that is disposed on the substrate **100** and does not overlap the display area **200**.

In some embodiments, as illustrated in FIG. 8, the first inorganic layer **311** may be disposed on the display area **200**. The first organic layer **321** may be disposed on the first inorganic layer **311**. The second inorganic layer **312** may be disposed on the first organic layer **321** and may cover end portions of the first inorganic layer **311**. The second organic layer **322** may be disposed on the second inorganic layer **312**. The third inorganic layer **313** may be disposed on the second organic layer **322** and may not contact the second inorganic layer **312**.

Further, the second inorganic layer **312** may cover end portions of the first organic layer **321**. The third inorganic layer **313** may be spaced apart from the second inorganic layer **312** and disposed only on the second organic layer **322**. As the second inorganic layer **312** covers the end portions of the first inorganic layer **311**, infiltration of oxygen or moisture through edge portions of the inorganic layer **310** may be prevented or efficiently reduced.

In addition, ends of the third inorganic layer **313** and ends of the first inorganic layer **311** may be disposed in same

positions A, respectively. That is, side surfaces of the third inorganic layer 313 and side surfaces of the first inorganic layer 311 may be disposed on same planar surfaces, respectively. The second inorganic layer 312 may have a larger planar area than a planar area of the first inorganic layer 311 and a planar area of the third inorganic layer 313.

The inorganic layer 310 may be formed as a single film or stacked film including a metal oxide or metal nitride. In more detail, the inorganic layer 310 may include at least one of the followings: SiNx, Al2O3, SiO2, TiO2, SiON, ITO, AZO, ZnO, and ZrO.

The inorganic layer 310 may be formed by a vacuum film formation method, such as sputtering, chemical vapor deposition (CVD), e-beam, thermal evaporation, or thermal ion beam assisted deposition (IBAD). Examples of the CVD may include ICP-CVD (Induced Coupled Plasma-Chemical Vapor Deposition), CCP (Capacitively Coupled Plasma)-CVD, SWP (Surface Wave Plasma)-CVD and so on, which is, however, provided only for illustration, and all possible methods that are currently developed and commercially available or can be realized in the future according to the technological development may be employed in forming the inorganic material layer according to the present invention.

The organic layer 320 may be formed as a single film or stacked film including at least one of the following polymers: polyethylene terephthalate, polyimide, polycarbonate, epoxy, polyethylene, and polyacrylate. More desirably, the organic layer may be formed of polyacrylates and may include, in more detail, high-molecularized monomer components including diacrylate-based monomers or triacrylate-based monomers. The monomer components may further include monoacrylate-based monomers.

Further, the second organic layer 322 may include or be formed of an organic adhesive material. In the case that the second organic layer 322 is an organic adhesive, the third inorganic layer 313 may be a barrier layer that may prevent or significantly reduce external shocks and infiltration of external substances. The second organic layer 322 may have a greater thickness than that of the first organic layer 321. In the case that the second organic layer 322 is not the organic adhesive, the second organic layer 322 and the first organic layer 321 may have a same thickness.

The organic layer 320 may be laminated by spin coating, spray coating, screen printing, ink-jetting, dispensing, and the like, but not limited thereto. In addition, all possible methods that are currently developed and commercially available or can be realized in the future according to the technological development may be employed in forming the organic material layer according to the present invention, and examples thereof may include sputtering, chemical vapor deposition (CVD), plasma enhanced chemical vapor deposition (PECVD), thermal evaporation, thermal ion beam assisted deposition (IBAD), and atomic layer deposition (ALD).

A lamination structure of the organic layer 320 and the inorganic layer 310 is not limited thereto. In some embodiments, a plurality of organic layers 320 and a plurality of inorganic layers 310 may be alternately laminated on the third inorganic layer 313 additionally.

Hereinafter, an organic light emitting display device according to a sixth exemplary embodiment of the present invention will be described with reference to FIG. 9. The sixth exemplary embodiment is a modified structure of the fifth exemplary embodiment according to an embodiment of the present invention, and thus repeated description will be omitted for brevity.

FIG. 9 is a schematic cross-sectional view illustrating the organic light emitting display device according to the sixth exemplary embodiment.

Referring to FIG. 9, a first inorganic layer 311 may be disposed on a display area 200. A first organic layer 321 may be disposed on the first inorganic layer 311. A second inorganic layer 312 may be disposed on the first organic layer 321 and may cover end portions of the first inorganic layer 311. A second organic layer 322 may be disposed on the second inorganic layer 312. A third inorganic layer 313 may be disposed on the second organic layer 322 and may not contact the second inorganic layer 312.

Further, the second inorganic layer 312 may cover end portions of the first organic layer 321. The third inorganic layer 313 may be spaced apart from the second inorganic layer 312 and may only be disposed on the second organic layer 322. As the second inorganic layer 312 covers the end portions of the first inorganic layer 311, infiltration of oxygen or moisture through edge portions of an inorganic layer 310 may be prevented or efficiently reduced.

In addition, the second inorganic layer 312 may have a larger planar area than a planar area of the first inorganic layer 311. The third inorganic layer 313 may have a less planar area than the planar area of the first inorganic layer 311.

Hereinafter, an organic light emitting display device according to a seventh exemplary embodiment of the present invention will be described with reference to FIG. 10. The seventh exemplary embodiment is a modified structure of the fifth exemplary embodiment according to an embodiment of the present invention, and thus repeated description will be omitted for brevity.

FIG. 10 is a schematic cross-sectional view illustrating the organic light emitting display device according to the seventh exemplary embodiment.

Referring to FIG. 10, a first inorganic layer 311 may be disposed on a display area 200. A first organic layer 321 may be disposed on the first inorganic layer 311. A second inorganic layer 312 may be disposed on the first organic layer 321 and may contact end portions of the first inorganic layer 311. A second organic layer 322 may be disposed on the second inorganic layer 312. A third inorganic layer 313 may be disposed on the second organic layer 322 and may not contact the second inorganic layer 312.

Further, the second inorganic layer 312 may cover end portions of the first organic layer 321 and may not cover the end portions of the first inorganic layer 311. The third inorganic layer 313 may be spaced apart from the second inorganic layer 312 and disposed only on the second organic layer 322. As the second inorganic layer 312 contacts the end portions of the first inorganic layer 311, infiltration of oxygen or moisture through edge portions of an inorganic layer 310 may be prevented or efficiently reduced.

Further, ends of the first inorganic layer 311, ends of the second inorganic layer 312, and ends of the third inorganic layer 313 may be disposed in same positions B, respectively. That is, side surfaces of the first inorganic layer 311, side surfaces of the second inorganic layer 312, and side surfaces of the third inorganic layer 313 may be disposed on same planar surfaces, respectively.

Hereinafter, an organic light emitting display device according to an eighth exemplary embodiment of the present invention will be described with reference to FIG. 11. The eighth exemplary embodiment is a modified structure of the fifth exemplary embodiment according to an embodiment of the present invention, and thus repeated description will be omitted for brevity.

13

FIG. 11 is a schematic cross-sectional view illustrating the organic light emitting display device according to the eighth exemplary embodiment.

Referring to FIG. 11, a first inorganic layer 311 may be disposed on a display area 200. A first organic layer 321 may be disposed on the first inorganic layer 311. A second inorganic layer 312 may be disposed on the first organic layer 321 and may contact end portions of the first inorganic layer 311. A second organic layer 322 may be disposed on the second inorganic layer 312. Further, the second organic layer 322 may also be disposed on a portion of the first inorganic layer 311 to contact the first inorganic layer 311. A third inorganic layer 313 may be disposed on the second organic layer 322 and may not contact the second inorganic layer 312.

Further, the second inorganic layer 312 may cover end portions of the first organic layer 321 and may not cover the end portions of the first inorganic layer 311. The third inorganic layer 313 may be spaced apart from the second inorganic layer 312 and disposed only on the second organic layer 322. As the second inorganic layer 312 contacts the end portions of the first inorganic layer 311, infiltration of oxygen or moisture through edge portions of an inorganic layer 310 may be prevented or efficiently reduced.

Further, ends of the first inorganic layer 311 and ends of the third inorganic layer 313 may be disposed in same positions C, respectively. That is, side surfaces of the first inorganic layer 311 and side surfaces of the third inorganic layer 313 may be disposed on same planar surfaces, respectively. The second inorganic layer 312 may have a less planar area than a planar area of the first inorganic layer 311 and a planar area of the third inorganic layer 313.

Hereinafter, an organic light emitting display device according to a ninth exemplary embodiment of the present invention will be described with reference to FIG. 12. The ninth exemplary embodiment is a modified structure of the fifth exemplary embodiment according to an embodiment of the present invention, and thus repeated description will be omitted for brevity.

FIG. 12 is a schematic cross-sectional view illustrating the organic light emitting display device according to the ninth exemplary embodiment.

Referring to FIG. 12, a first inorganic layer 311 may be disposed on a display area 200. A first organic layer 321 may be disposed on the first inorganic layer 311. A second inorganic layer 312 may be disposed on the first organic layer 321 and may contact end portions of the first inorganic layer 311. A second organic layer 322 may be disposed on the second inorganic layer 312. A third inorganic layer 313 may be disposed on the second organic layer 322 and may not contact the second inorganic layer 312.

Further, the second inorganic layer 312 may cover end portions of the first organic layer 321 and may not cover the end portions of the first inorganic layer 311. The third inorganic layer 313 may be spaced apart from the second inorganic layer 312 and disposed only on the second organic layer 322. As the second inorganic layer 312 contacts the end portions of the first inorganic layer 311, infiltration of oxygen or moisture through edge portions of an inorganic layer 310 may be prevented or efficiently reduced.

Further, ends of the second inorganic layer 312 and ends of the third inorganic layer 313 may be disposed in same positions D, respectively. That is, side surfaces of the second inorganic layer 312 and side surfaces of the third inorganic layer 313 may be disposed on same planar surfaces, respectively. The first inorganic layer 311 may have a larger planar

14

area than a planar area of the second inorganic layer 312 and a planar area of the third inorganic layer 313.

Hereinafter, an organic light emitting display device according to a tenth exemplary embodiment of the present invention will be described with reference to FIG. 13. The tenth exemplary embodiment is a modified structure of the fifth exemplary embodiment according to an embodiment of the present invention, and thus repeated description will be omitted for brevity.

FIG. 13 is a schematic cross-sectional view illustrating the organic light emitting display device according to the tenth exemplary embodiment.

Referring to FIG. 13, a first inorganic layer 311 may be disposed on a display area 200. A first organic layer 321 may be disposed on the first inorganic layer 311. A second inorganic layer 312 may be disposed on the first organic layer 321 and may contact end portions of the first inorganic layer 311. A second organic layer 322 may be disposed on the second inorganic layer 312. A third inorganic layer 313 may be disposed on the second organic layer 322 and may not contact the second inorganic layer 312.

Further, the second inorganic layer 312 may cover end portions of the first organic layer 321 and may not cover the end portions of the first inorganic layer 311. The third inorganic layer 313 may be spaced apart from the second inorganic layer 312 and disposed only on the second organic layer 322. As the second inorganic layer 312 contacts the end portions of the first inorganic layer 311, infiltration of oxygen or moisture through edge portions of an inorganic layer 310 may be prevented or efficiently reduced.

Further, the first inorganic layer 311 may have a larger planar area than a planar area of the second inorganic layer 312, and the second inorganic layer 312 may have a larger planar area than a planar area of the third inorganic layer 313.

Hereinafter, an organic light emitting display device according to an eleventh exemplary embodiment of the present invention will be described with reference to FIG. 14. The eleventh exemplary embodiment is a modified structure of the fifth exemplary embodiment according to an embodiment of the present invention, and thus repeated description will be omitted for brevity.

FIG. 14 is a schematic cross-sectional view illustrating the organic light emitting display device according to the eleventh exemplary embodiment.

Referring to FIG. 14, a first inorganic layer 311 may be disposed on a display area 200. A first organic layer 321 may be disposed on the first inorganic layer 311. A second inorganic layer 312 may be disposed on the first organic layer 321 and may contact end portions of the first inorganic layer 311. A second organic layer 322 may be disposed on the second inorganic layer 312. A third inorganic layer 313 may be disposed on the second organic layer 322 and may not contact the second inorganic layer 312.

Further, the second inorganic layer 312 may cover end portions of the first organic layer 321 and may not cover the end portions of the first inorganic layer 311. The third inorganic layer 313 may be spaced apart from the second inorganic layer 312 and disposed only on the second organic layer 322. As the second inorganic layer 312 contacts the end portions of the first inorganic layer 311, infiltration of oxygen or moisture through edge portions of an inorganic layer 310 may be prevented or efficiently reduced.

Further, ends of the second inorganic layer 312 and ends of the first inorganic layer 311 may be disposed in same positions E, respectively. That is, side surfaces of the second inorganic layer 312 and side surfaces of the first inorganic

15

layer **311** may be disposed on same planar surfaces, respectively. The third inorganic layer **312** may have a less planar area than a planar area of the second inorganic layer **312** and a planar area of the first inorganic layer **311**.

From the foregoing, it will be appreciated that various 5 embodiments of the present invention have been described herein for purposes of illustration, and that various modifications may be made without departing from the scope and spirit of the present invention. Accordingly, the various embodiments disclosed herein are not intended to be limiting, with the true scope and spirit being indicated by the 10 following claims and their equivalents.

What is claimed is:

1. An organic light emitting display device comprising: 15
a substrate;
a display area on the substrate; and
an encapsulation layer disposed on the display area and comprising a plurality of inorganic layers and a plurality of organic layers, 20
wherein the plurality of inorganic layers and the plurality of organic layers are alternately laminated,
the plurality of inorganic layers comprises at least first to third inorganic layers,
the plurality of organic layers comprises at least first and 25 second organic layers,
the first inorganic layer is disposed on the display area,
the first organic layer is disposed on the first inorganic layer,
the second inorganic layer is disposed on the first organic 30 layer and covers end portions of the first inorganic layer,
the second organic layer is disposed on the second inorganic layer, and
the third inorganic layer is disposed on the second organic 35 layer, does not contact the second inorganic layer, and covers a same or smaller surface area of the substrate than at least one of the first and second inorganic layers.
2. The organic light emitting display device of claim 1, wherein ends of the third inorganic layer and ends of the 40 first inorganic layer are disposed in same positions, respectively.
3. The organic light emitting display device of claim 2, wherein side surfaces of the third inorganic layer and side surfaces of the first inorganic layer are disposed on 45 same planar surfaces, respectively.
4. The organic light emitting display device of claim 1, wherein the third inorganic layer has a smaller planar area than a planar area of the first inorganic layer.
5. An organic light emitting display device comprising: 50
a substrate;
a display area on a surface of the substrate; and
an encapsulation layer disposed on the display area and comprising a plurality of inorganic layers and a plurality 55 of organic layers,
wherein the plurality of inorganic layers and the plurality of organic layers are alternately laminated,
the plurality of inorganic layers comprises at least first to third inorganic layers,
the plurality of organic layers comprises at least first and 60 second organic layers,
the first inorganic layer is disposed on the display area,
the first organic layer is disposed on the first inorganic layer,
the second inorganic layer is disposed on the first organic 65 layer and contacts end portions of the first inorganic layer,

16

the second organic layer is disposed on the second inorganic layer,

the third inorganic layer is disposed on the second organic layer and does not contact the second inorganic layer, and

ends of the third inorganic layer and ends of at least one of the first and second inorganic layers are on a same imaginary line extending normal to the surface of the substrate.

6. An organic light emitting display device comprising:
a substrate;
a display area on the substrate; and
an encapsulation layer disposed on the display area and comprising a plurality of inorganic layers and a plurality of organic layers,
wherein the plurality of inorganic layers and the plurality of organic layers are alternately laminated,
the plurality of inorganic layers comprises at least first to third inorganic layers,
the plurality of organic layers comprises at least first and second organic layers,
the first inorganic layer is disposed on the display area,
the first organic layer is disposed on the first inorganic layer,
the second inorganic layer is disposed on the first organic layer and contacts end portions of the first inorganic layer,
the second organic layer is disposed on the second inorganic layer, and
the third inorganic layer is disposed on the second organic layer and does not contact the second inorganic layer, and
wherein the second inorganic layer does not cover the end portions of the first inorganic layer.
7. The organic light emitting display device of claim 6, wherein ends of the first inorganic layer, ends of the second inorganic layer, and ends of the third inorganic layer are disposed in same positions, respectively.
8. The organic light emitting display device of claim 7, wherein side surfaces of the first inorganic layer, side surfaces of the second inorganic layer, and side surfaces of the third inorganic layer are disposed on same planar surfaces, respectively.
9. The organic light emitting display device of claim 6, wherein ends of the third inorganic layer and ends of the first inorganic layer are disposed in same positions, respectively.
10. The organic light emitting display device of claim 9, wherein side surfaces of the third inorganic layer and side surfaces of the first inorganic layer are disposed on same planar surfaces, respectively.
11. The organic light emitting display device of claim 9, wherein the second inorganic layer has a smaller planar area than a planar area of the first inorganic layer and a planar area of the third inorganic layer.
12. The organic light emitting display device of claim 6, wherein ends of the third inorganic layer and ends of the second inorganic layer are disposed in same positions, respectively.
13. The organic light emitting display device of claim 12, wherein side surfaces of the third inorganic layer and side surfaces of the second inorganic layer are disposed on same planar surfaces, respectively.
14. The organic light emitting display device of claim 12, wherein the first inorganic layer has a larger planar area than a planar area of the second inorganic layer and a planar area of the third inorganic layer.

17

15. The organic light emitting display device of claim 6, wherein the first inorganic layer has a smaller planar area than a planar area of the second inorganic layer, and the second inorganic layer has a larger planar area than a planar area of the third inorganic layer. 5

16. The organic light emitting display device of claim 6, wherein ends of the second inorganic layer and ends of the first inorganic layer are disposed in same positions, respectively.

17. The organic light emitting display device of claim 16, 10 wherein side surfaces of the second inorganic layer and side surfaces of the first inorganic layer are disposed on same planar surfaces, respectively.

18. The organic light emitting display device of claim 16, wherein the third inorganic layer has a smaller planar area 15 than a planar area of the first inorganic layer and a planar area of the second inorganic layer.

* * * * *

18

专利名称(译)	有机发光显示装置		
公开(公告)号	US9692010	公开(公告)日	2017-06-27
申请号	US15/152467	申请日	2016-05-11
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	RYU JI HUN WANG SEONGMIN		
发明人	RYU, JI-HUN WANG, SEONGMIN		
IPC分类号	H01L51/00 H01L51/52 H01L51/56		
CPC分类号	H01L51/5256 H01L51/56		
优先权	1020120131458 2012-11-20 KR 14/015828 2015-04-07 US		
其他公开文献	US20160254490A1		
外部链接	Espacenet USPTO		

摘要(译)

一种有机发光显示装置，包括：基板;基板上的显示区域;封装层，设置在显示区域上，包括多个无机层和多个有机层，其中，所述多个无机层和所述多个有机层交替层叠，所述无机层包括至少第一至第三无机层所述有机层包括至少第一和第二有机层，所述第一无机层设置在所述显示区域上，所述第一有机层设置在所述第一无机层上，所述第二无机层设置在所述第一有机层上并且覆盖端部第一无机层的一部分，第二有机层设置在第二无机层上，第三无机层设置在第二有机层上，不接触第二无机层。

