



US009351368B2

(12) **United States Patent**
Azizi et al.

(10) **Patent No.:** **US 9,351,368 B2**
(45) **Date of Patent:** **May 24, 2016**

(54) **PIXEL CIRCUITS FOR AMOLED DISPLAYS**

(71) Applicant: **Ignis Innovation Inc.**, Waterloo (CA)

(72) Inventors: **Yaser Azizi**, Waterloo (CA);
Gholamreza Chaji, Waterloo (CA)

(73) Assignee: **Ignis Innovation Inc.**, Waterloo (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 468 days.

5,153,420 A 10/1992 Hack et al.
5,170,158 A 12/1992 Shinya
5,204,661 A 4/1993 Hack et al.
5,266,515 A 11/1993 Robb et al.
5,278,542 A 1/1994 Smith et al.
5,408,267 A 4/1995 Main
5,498,880 A 3/1996 Lee et al.
5,572,444 A 11/1996 Lentz et al.
5,589,847 A 12/1996 Lewis
5,619,033 A 4/1997 Weisfield
5,648,276 A 7/1997 Hara et al.
5,670,973 A 9/1997 Bassetti et al.

(Continued)

(21) Appl. No.: **13/789,978**

(22) Filed: **Mar. 8, 2013**

(65) **Prior Publication Data**

US 2014/0252988 A1 Sep. 11, 2014

(51) **Int. Cl.**
G09G 3/32 (2006.01)
H05B 33/08 (2006.01)

(52) **U.S. Cl.**
CPC **H05B 33/0848** (2013.01); **G09G 3/3233**
(2013.01); **G09G 2300/0842** (2013.01); **G09G**
2320/0295 (2013.01); **G09G 2320/045**
(2013.01); **G09G 2320/0693** (2013.01)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,506,851 A 4/1970 Polkinghorn et al.
3,750,987 A 8/1973 Gobel
3,774,055 A 11/1973 Bapat et al.
4,090,096 A 5/1978 Nagami
4,354,162 A 10/1982 Wright
4,996,523 A 2/1991 Bell et al.
5,134,387 A 7/1992 Smith et al.

FOREIGN PATENT DOCUMENTS

AU 729652 6/1997
AU 764896 12/2001

(Continued)

OTHER PUBLICATIONS

Ahnood et al.: "Effect of threshold voltage instability on field effect mobility in thin film transistors deduced from constant current measurements"; dated Aug. 2009.


(Continued)

Primary Examiner — Antonio Xavier
(74) *Attorney, Agent, or Firm* — Nixon Peabody LLP

(57) **ABSTRACT**

The OLED voltage of a selected pixel is extracted from the pixel produced when the pixel is programmed so that the pixel current is a function of the OLED voltage. One method for extracting the OLED voltage is to first program the pixel in a way that the current is not a function of OLED voltage, and then in a way that the current is a function of OLED voltage. During the latter stage, the programming voltage is changed so that the pixel current is the same as the pixel current when the pixel was programmed in a way that the current was not a function of OLED voltage. The difference in the two programming voltages is then used to extract the OLED voltage.

14 Claims, 5 Drawing Sheets

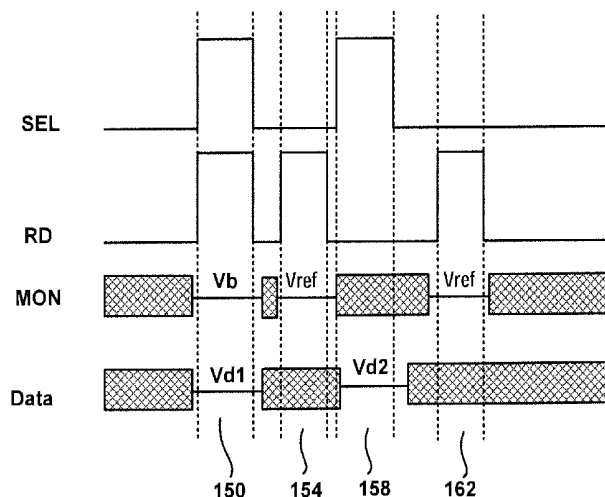

(56)

References Cited

U.S. PATENT DOCUMENTS

5,691,783	A	11/1997	Numao et al.	6,919,871	B2	7/2005	Kwon
5,701,505	A	12/1997	Yamashita et al.	6,924,602	B2	8/2005	Komiya
5,714,968	A	2/1998	Ikeda	6,937,220	B2	8/2005	Kitaura et al.
5,744,824	A	4/1998	Kousai et al.	6,940,214	B1	9/2005	Komiya et al.
5,745,660	A	4/1998	Kolpatzik et al.	6,954,194	B2	10/2005	Matsumoto et al.
5,748,160	A	5/1998	Shieh et al.	6,970,149	B2	11/2005	Chung et al.
5,758,129	A	5/1998	Gray et al.	6,975,142	B2	12/2005	Azami et al.
5,835,376	A	11/1998	Smith et al.	6,975,332	B2	12/2005	Arnold et al.
5,870,071	A	2/1999	Kawahata	6,995,519	B2	2/2006	Arnold et al.
5,874,803	A	2/1999	Garbuzov et al.	7,027,015	B2	4/2006	Booth, Jr. et al.
5,880,582	A	3/1999	Sawada	7,034,793	B2	4/2006	Sekiya et al.
5,903,248	A	5/1999	Irwin	7,038,392	B2	5/2006	Libsch et al.
5,917,280	A	6/1999	Burrows et al.	7,057,588	B2	6/2006	Asano et al.
5,949,398	A	9/1999	Kim	7,061,451	B2	6/2006	Kimura
5,952,789	A	9/1999	Stewart et al.	7,071,932	B2	7/2006	Libsch et al.
5,990,629	A	11/1999	Yamada et al.	7,106,285	B2	9/2006	Naugler
6,023,259	A	2/2000	Howard et al.	7,112,820	B2	9/2006	Chang et al.
6,069,365	A	5/2000	Chow et al.	7,113,864	B2	9/2006	Smith et al.
6,091,203	A	7/2000	Kawashima et al.	7,122,835	B1	10/2006	Ikeda et al.
6,097,360	A	8/2000	Holloman	7,129,914	B2	10/2006	Knapp et al.
6,100,868	A	8/2000	Lee et al.	7,164,417	B2	1/2007	Cok
6,144,222	A	11/2000	Ho	7,224,332	B2	5/2007	Cok
6,229,506	B1	5/2001	Dawson et al.	7,248,236	B2	7/2007	Nathan et al.
6,229,508	B1	5/2001	Kane	7,259,737	B2	8/2007	Ono et al.
6,246,180	B1	6/2001	Nishigaki	7,262,753	B2	8/2007	Tanghe et al.
6,252,248	B1	6/2001	Sano et al.	7,274,363	B2	9/2007	Ishizuka et al.
6,268,841	B1	7/2001	Cairns et al.	7,310,092	B2	12/2007	Imamura
6,288,696	B1	9/2001	Holloman	7,315,295	B2	1/2008	Kimura
6,307,322	B1	10/2001	Dawson et al.	7,317,434	B2	1/2008	Lan et al.
6,310,962	B1	10/2001	Chung et al.	7,321,348	B2	1/2008	Cok et al.
6,323,631	B1	11/2001	Juang	7,327,357	B2	2/2008	Jeong
6,333,729	B1	12/2001	Ha	7,333,077	B2	2/2008	Koyama et al.
6,388,653	B1	5/2002	Goto et al.	7,343,243	B2	3/2008	Smith et al.
6,392,617	B1	5/2002	Gleason	7,414,600	B2	8/2008	Nathan et al.
6,396,469	B1	5/2002	Miwa et al.	7,466,166	B2	12/2008	Date et al.
6,414,661	B1	7/2002	Shen et al.	7,495,501	B2	2/2009	Iwabuchi et al.
6,417,825	B1	7/2002	Stewart et al.	7,502,000	B2	3/2009	Yuki et al.
6,430,496	B1	8/2002	Smith et al.	7,515,124	B2	4/2009	Yaguma et al.
6,433,488	B1	8/2002	Bu	7,535,449	B2	5/2009	Miyazawa
6,473,065	B1	10/2002	Fan	7,554,512	B2	6/2009	Steer
6,475,845	B2	11/2002	Kimura	7,569,849	B2	8/2009	Nathan et al.
6,501,098	B2	12/2002	Yamazaki	7,595,776	B2	9/2009	Hashimoto et al.
6,501,466	B1	12/2002	Yamagashi et al.	7,604,718	B2	10/2009	Zhang et al.
6,522,315	B2	2/2003	Ozawa et al.	7,609,239	B2	10/2009	Chang
6,535,185	B2	3/2003	Kim et al.	7,612,745	B2	11/2009	Yumoto et al.
6,542,138	B1	4/2003	Shannon et al.	7,619,594	B2	11/2009	Hu
6,559,839	B1	5/2003	Ueno et al.	7,619,597	B2	11/2009	Nathan et al.
6,580,408	B1	6/2003	Bae et al.	7,639,211	B2	12/2009	Miyazawa
6,583,398	B2	6/2003	Harkin	7,683,899	B2	3/2010	Hirakata et al.
6,618,030	B2	9/2003	Kane et al.	7,688,289	B2	3/2010	Abe et al.
6,639,244	B1	10/2003	Yamazaki et al.	7,760,162	B2	7/2010	Miyazawa
6,680,580	B1	1/2004	Sung	7,808,008	B2	10/2010	Miyake
6,686,699	B2	2/2004	Yumoto	7,859,520	B2	12/2010	Kimura
6,690,000	B1	2/2004	Muramatsu et al.	7,889,159	B2	2/2011	Nathan et al.
6,693,610	B2	2/2004	Shannon et al.	7,903,127	B2	3/2011	Kwon
6,694,248	B2	2/2004	Smith et al.	7,920,116	B2	4/2011	Woo et al.
6,697,057	B2	2/2004	Koyama et al.	7,944,414	B2	5/2011	Shirasaki et al.
6,724,151	B2	4/2004	Yoo	7,978,170	B2	7/2011	Park et al.
6,734,636	B2	5/2004	Sanford et al.	7,989,392	B2	8/2011	Crockett et al.
6,753,655	B2	6/2004	Shih et al.	7,995,008	B2	8/2011	Miwa
6,753,834	B2	6/2004	Mikami et al.	8,063,852	B2	11/2011	Kwak et al.
6,756,741	B2	6/2004	Li	8,102,343	B2	1/2012	Yatabe
6,777,888	B2	8/2004	Kondo	8,144,081	B2	3/2012	Miyazawa
6,781,567	B2	8/2004	Kimura	8,159,007	B2	4/2012	Barna et al.
6,788,231	B1	9/2004	Hsueh	8,242,979	B2	8/2012	Anzai et al.
6,809,706	B2	10/2004	Shimoda	8,253,665	B2	8/2012	Nathan et al.
6,828,950	B2	12/2004	Koyama	8,319,712	B2	11/2012	Nathan et al.
6,858,991	B2	2/2005	Miyazawa	8,405,582	B2	3/2013	Kim
6,859,193	B1	2/2005	Yumoto	8,816,946	B2	8/2014	Nathan et al.
6,876,346	B2	4/2005	Anzai et al.	2001/0002703	A1	6/2001	Koyama
6,900,485	B2	5/2005	Lee	2001/0009283	A1	7/2001	Arao et al.
6,903,734	B2	6/2005	Eu	2001/0026257	A1	10/2001	Kimura
6,911,960	B1	6/2005	Yokoyama	2001/0030323	A1	10/2001	Ikeda
6,911,964	B2	6/2005	Lee et al.	2001/0040541	A1	11/2001	Yoneda et al.
6,914,448	B2	7/2005	Jinno	2001/0043173	A1	11/2001	Troutman
				2001/0045929	A1	11/2001	Prache
				2001/0052940	A1	12/2001	Hagihara et al.
				2002/0000576	A1	1/2002	Inukai
				2002/0011796	A1	1/2002	Koyama

(56)

References Cited

U.S. PATENT DOCUMENTS

2002/0011799	A1	1/2002	Kimura	2005/0007357	A1	1/2005	Yamashita et al.	
2002/0012057	A1	1/2002	Kimura	2005/0052379	A1	3/2005	Waterman	
2002/0030190	A1	3/2002	Ohtani et al.	2005/0057459	A1	3/2005	Miyazawa	
2002/0047565	A1	4/2002	Nara et al.	2005/0067970	A1	3/2005	Libsch et al.	
2002/0052086	A1	5/2002	Maeda	2005/0067971	A1	3/2005	Kane	
2002/0080108	A1	6/2002	Wang	2005/0083270	A1	4/2005	Miyazawa	
2002/0084463	A1	7/2002	Sanford et al.	2005/0110420	A1	5/2005	Arnold et al.	
2002/0101172	A1	8/2002	Bu	2005/0110727	A1	5/2005	Shin	
2002/0117722	A1	8/2002	Osada et al.	2005/0123193	A1	6/2005	Lamberg et al.	
2002/0140712	A1	10/2002	Ouchi et al.	2005/0140610	A1	6/2005	Smith et al.	
2002/0158587	A1	10/2002	Komiya	2005/0145891	A1	7/2005	Abe	
2002/0158666	A1	10/2002	Azami et al.	2005/0156831	A1	7/2005	Yamazaki et al.	
2002/0158823	A1	10/2002	Zavracky et al.	2005/0168416	A1	8/2005	Hashimoto et al.	
2002/0171613	A1	11/2002	Goto et al.	2005/0206590	A1	9/2005	Sasaki et al.	
2002/0186214	A1	12/2002	Siwinski	2005/0219188	A1	10/2005	Kawabe et al.	
2002/0190971	A1	12/2002	Nakamura et al.	2005/0243037	A1	11/2005	Eom et al.	
2002/0195967	A1	12/2002	Kim et al.	2005/0248515	A1	11/2005	Naugler et al.	
2002/0195968	A1	12/2002	Sanford et al.	2005/0258867	A1	11/2005	Miyazawa	
2003/0001828	A1	1/2003	Asano	2005/0285825	A1	12/2005	Eom et al.	
2003/0020413	A1	1/2003	Oomura	2006/0012311	A1	1/2006	Ogawa	
2003/0030603	A1	2/2003	Shimoda	2006/0038750	A1	2/2006	Inoue et al.	
2003/0062524	A1	4/2003	Kimura	2006/0038758	A1	2/2006	Routley et al.	
2003/0062844	A1	4/2003	Miyazawa	2006/0038762	A1	2/2006	Chou	
2003/0076048	A1	4/2003	Rutherford	2006/0066533	A1	3/2006	Sato et al.	
2003/0090445	A1	5/2003	Chen et al.	2006/0077077	A1	4/2006	Kwon	
2003/0090447	A1	5/2003	Kimura	2006/0092185	A1	5/2006	Jo et al.	
2003/0090481	A1	5/2003	Kimura	2006/0125408	A1	6/2006	Nathan et al.	
2003/0095087	A1	5/2003	Libsch	2006/0139253	A1	6/2006	Choi et al.	
2003/0098829	A1	5/2003	Chen et al.	2006/0145964	A1	7/2006	Park et al.	
2003/0107560	A1	6/2003	Yumoto et al.	2006/0158402	A1*	7/2006	Nathan et al. 345/82	
2003/0107561	A1	6/2003	Uchino et al.	2006/0191178	A1	8/2006	Sempel et al.	
2003/0111966	A1	6/2003	Mikami et al.	2006/0209012	A1	9/2006	Hagood, IV	
2003/0112205	A1	6/2003	Yamada	2006/0214888	A1	9/2006	Schneider et al.	
2003/0112208	A1	6/2003	Okabe et al.	2006/0221009	A1	10/2006	Miwa	
2003/0117348	A1	6/2003	Knapp et al.	2006/0227082	A1	10/2006	Ogata et al.	
2003/0122474	A1	7/2003	Lee	2006/0232522	A1	10/2006	Roy et al.	
2003/0122747	A1	7/2003	Shannon et al.	2006/0244391	A1	11/2006	Shishido et al.	
2003/0128199	A1	7/2003	Kimura	2006/0244697	A1	11/2006	Lee et al.	
2003/0151569	A1	8/2003	Lee et al.	2006/0261841	A1	11/2006	Fish	
2003/0156104	A1	8/2003	Morita	2006/0290614	A1	12/2006	Nathan et al.	
2003/0169241	A1	9/2003	LeChevalier	2007/0001939	A1	1/2007	Hashimoto et al.	
2003/0169247	A1	9/2003	Kawabe et al.	2007/0001945	A1	1/2007	Yoshida et al.	
2003/0179626	A1	9/2003	Sanford et al.	2007/0008251	A1	1/2007	Kohno et al.	
2003/0189535	A1	10/2003	Matsumoto et al.	2007/0008297	A1	1/2007	Bassetti	
2003/0197663	A1	10/2003	Lee et al.	2007/0035489	A1	2/2007	Lee	
2003/0214465	A1	11/2003	Kimura	2007/0035707	A1	2/2007	Margulis	
2003/0227262	A1	12/2003	Kwon	2007/0040773	A1	2/2007	Lee et al.	
2003/0230141	A1	12/2003	Gilmour et al.	2007/0040782	A1	2/2007	Woo et al.	
2003/0230980	A1	12/2003	Forrest et al.	2007/0063932	A1	3/2007	Nathan et al.	
2004/0004589	A1	1/2004	Shih	2007/0080908	A1	4/2007	Nathan et al.	
2004/0032382	A1	2/2004	Cok et al.	2007/0085801	A1	4/2007	Park et al.	
2004/0041750	A1	3/2004	Abe	2007/0109232	A1	5/2007	Yamamoto et al.	
2004/0066357	A1	4/2004	Kawasaki	2007/0128583	A1	6/2007	Miyazawa	
2004/0070557	A1	4/2004	Asano et al.	2007/0164941	A1	7/2007	Park et al.	
2004/0129933	A1	7/2004	Nathan et al.	2007/0182671	A1	8/2007	Nathan et al.	
2004/0135749	A1	7/2004	Kondakov et al.	2007/0236430	A1	10/2007	Fish	
2004/0145547	A1	7/2004	Oh	2007/0241999	A1	10/2007	Lin	
2004/0150595	A1	8/2004	Kasai	2007/0242008	A1	10/2007	Cummings	
2004/0155841	A1	8/2004	Kasai	2008/0001544	A1	1/2008	Murakami et al.	
2004/0160516	A1	8/2004	Ford	2008/0043044	A1	2/2008	Woo et al.	
2004/0171619	A1	9/2004	Barkoczy et al.	2008/0048951	A1	2/2008	Naugler et al.	
2004/0174349	A1	9/2004	Libsch	2008/0055134	A1	3/2008	Li et al.	
2004/0174354	A1	9/2004	Ono	2008/0074360	A1	3/2008	Lu et al.	
2004/0183759	A1	9/2004	Stevenson et al.	2008/0088549	A1*	4/2008	Nathan et al. 345/80	
2004/0189627	A1	9/2004	Shirasaki et al.	2008/0094426	A1	4/2008	Kimpe	
2004/0196275	A1	10/2004	Hattori	2008/0122819	A1	5/2008	Cho et al.	
2004/0227697	A1	11/2004	Mori	2008/0129906	A1	6/2008	Lin et al.	
2004/0239696	A1	12/2004	Okabe	2008/0228562	A1	9/2008	Smith et al.	
2004/0251844	A1	12/2004	Hashido et al.	2008/0231641	A1	9/2008	Miyashita	
2004/0252085	A1	12/2004	Miyagawa	2008/0265786	A1	10/2008	Koyama	
2004/0252089	A1	12/2004	Ono et al.	2008/0290805	A1	11/2008	Yamada et al.	
2004/0256617	A1	12/2004	Yamada et al.	2008/0315788	A1	12/2008	Levey	
2004/0257353	A1	12/2004	Imamura et al.	2009/0009459	A1	1/2009	Miyashita	
2004/0257355	A1	12/2004	Naugler	2009/0015532	A1	1/2009	Katayama et al.	
2004/0263437	A1	12/2004	Hattori	2009/0058789	A1	3/2009	Hung et al.	
				2009/0121988	A1	5/2009	Amo et al.	
				2009/0146926	A1	6/2009	Sung et al.	
				2009/0153448	A1	6/2009	Tomida et al.	
				2009/0153459	A9	6/2009	Han et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0174628	A1	7/2009	Wang et al.	
2009/0201230	A1	8/2009	Smith	
2009/0201281	A1	8/2009	Routley et al.	
2009/0251486	A1	10/2009	Sakakibara et al.	
2009/0278777	A1	11/2009	Wang et al.	
2009/0289964	A1	11/2009	Miyachi	
2009/0295423	A1*	12/2009	Levey	324/769
2010/0039451	A1	2/2010	Jung	
2010/0039453	A1	2/2010	Nathan et al.	
2010/0045646	A1*	2/2010	Kishi	345/211
2010/0103082	A1	4/2010	Levey	
2010/0103159	A1	4/2010	Leon	
2010/0134475	A1*	6/2010	Ogura et al.	345/213
2010/0207920	A1	8/2010	Chaji et al.	
2010/0225634	A1	9/2010	Levey et al.	
2010/0251295	A1	9/2010	Amento et al.	
2010/0269889	A1	10/2010	Reinhold et al.	
2010/0277400	A1	11/2010	Jeong	
2010/0315319	A1	12/2010	Cok et al.	
2010/0315449	A1*	12/2010	Chaji	G09G 3/3208 345/690
2011/0050741	A1	3/2011	Jeong	
2011/0069089	A1	3/2011	Kopf et al.	
2011/0074762	A1*	3/2011	Shirasaki et al.	345/211
2011/0191042	A1*	8/2011	Chaji et al.	702/64
2011/0205221	A1*	8/2011	Lin et al.	345/213
2011/0205250	A1	8/2011	Yoo et al.	
2012/0169793	A1*	7/2012	Nathan et al.	345/690
2012/0299976	A1	11/2012	Chen et al.	
2012/0299978	A1*	11/2012	Chaji	345/690
2014/0252988	A1	9/2014	Azizi et al.	
2014/0267215	A1*	9/2014	Soni et al.	345/212

FOREIGN PATENT DOCUMENTS

CA	1 294 034	1/1992
CA	2 249 592	7/1998
CA	2 303 302	3/1999
CA	2 368 386	9/1999
CA	2 242 720	1/2000
CA	2 354 018	6/2000
CA	2 432 530	7/2002
CA	2 436 451	8/2002
CA	2 507 276	8/2002
CA	2 463 653	1/2004
CA	2 498 136	3/2004
CA	2 522 396	11/2004
CA	2 438 363	2/2005
CA	2 443 206	3/2005
CA	2 519 097	3/2005
CA	2 472 671	12/2005
CA	2 523 841	1/2006
CA	2 567 076	1/2006
CA	2 495 726	7/2006
CA	2 557 713	11/2006
CA	2 526 782	8/2007
CA	2 651 893	11/2007
CA	2 672 590	10/2009
CN	1601594	3/2005
CN	1886774	12/2006
CN	104036719	9/2014
DE	202006007613	9/2006
EP	0 478 186	4/1992
EP	1 028 471	8/2000
EP	1 130 565	9/2001
EP	1 194 013	4/2002
EP	1 321 922	6/2003
EP	1 335 430	8/2003
EP	1 381 019	1/2004
EP	1 429 312	6/2004
EP	1 439 520	7/2004
EP	1 465 143	10/2004
EP	1 473 689	11/2004
EP	1 517 290	3/2005

EP	1 521 203	A2	4/2005
EP	2 133 860	A1	12/2009
EP	2 383 720	A2	11/2011
GB	2 399 935		9/2004
GB	2 460 018		11/2009
JP	09 090405		4/1997
JP	10-254410		9/1998
JP	11 231805		8/1999
JP	2002-278513		9/2002
JP	2003-076331		3/2003
JP	2003-099000		4/2003
JP	2003-173165		6/2003
JP	2003-186439		7/2003
JP	2003-195809		7/2003
JP	2003-271095		9/2003
JP	2003-308046		10/2003
JP	2004-054188		2/2004
JP	2004-226960		8/2004
JP	2005-004147		1/2005
JP	2005-099715		4/2005
JP	2005-258326		9/2005
JP	2005-338819		12/2005
TW	569173		1/2004
TW	200526065		8/2005
TW	1239501		9/2005
WO	WO 98/11554		3/1998
WO	WO 99/48079		9/1999
WO	WO 01/27910	A1	4/2001
WO	WO 02/067327	A	8/2002
WO	WO 03/034389		4/2003
WO	WO 03/063124		7/2003
WO	WO 03/075256		9/2003
WO	WO 2004/003877		1/2004
WO	WO 2004/015668	A1	2/2004
WO	WO 2004/034364		4/2004
WO	WO 2005/022498		3/2005
WO	WO 2005/055185		6/2005
WO	WO 2005/055186	A1	6/2005
WO	WO 2005/069267		7/2005
WO	WO 2005/122121		12/2005
WO	WO 2006/063448		6/2006
WO	WO 2006/128069		11/2006
WO	WO 2008/057369		5/2008
WO	WO 2008/0290805		11/2008
WO	WO 2009/059028		5/2009
WO	WO 2009/127065		10/2009
WO	WO 2010/066030		6/2010
WO	WO 2010/120733		10/2010

OTHER PUBLICATIONS

Alexander et al.: "Pixel circuits and drive schemes for glass and elastic AMOLED displays"; dated Jul. 2005 (9 pages).

Alexander et al.: "Unique Electrical Measurement Technology for Compensation Inspection and Process Diagnostics of AMOLED HDTV"; dated May 2010 (4 pages).

Ashtiani et al.: "AMOLED Pixel Circuit With Electronic Compensation of Luminance Degradation"; dated Mar. 2007 (4 pages).

Chaji et al.: "A Current-Mode Comparator for Digital Calibration of Amorphous Silicon AMOLED Displays"; dated Jul. 2008 (5 pages).

Chaji et al.: "A fast settling current driver based on the CCII for AMOLED displays"; dated Dec. 2009 (6 pages).

Chaji et al.: "A Low-Cost Stable Amorphous Silicon AMOLED Display with Full V~T- and V~O~L~E~D Shift Compensation"; dated May 2007 (4 pages).

Chaji et al.: "A low-power driving scheme for a-Si:H active-matrix organic light-emitting diode displays"; dated Jun. 2005 (4 pages).

Chaji et al.: "A low-power high-performance digital circuit for deep submicron technologies"; dated Jun. 2005 (4 pages).

Chaji et al.: "A novel a-Si:H AMOLED pixel circuit based on short-term stress stability of a-Si:H TFTs"; dated Oct. 2005 (3 pages).

Chaji et al.: "A Novel Driving Scheme and Pixel Circuit for AMOLED Displays"; dated Jun. 2006 (4 pages).

Chaji et al.: "A novel driving scheme for high-resolution large-area a-Si:H AMOLED displays"; dated Aug. 2005 (4 pages).

Chaji et al.: "A Stable Voltage-Programmed Pixel Circuit for a-Si:H AMOLED Displays"; dated Dec. 2006 (12 pages).

(56)

References Cited

OTHER PUBLICATIONS

- Chaji et al.: "A Sub- μ A fast-settling current-programmed pixel circuit for AMOLED displays"; dated Sep. 2007.
- Chaji et al.: "An Enhanced and Simplified Optical Feedback Pixel Circuit for AMOLED Displays"; dated Oct. 2006.
- Chaji et al.: "Compensation technique for DC and transient instability of thin film transistor circuits for large-area devices"; dated Aug. 2008.
- Chaji et al.: "Driving scheme for stable operation of 2-TFT a-Si AMOLED pixel"; dated Apr. 2005 (2 pages).
- Chaji et al.: "Dynamic-effect compensating technique for stable a-Si:H AMOLED displays"; dated Aug. 2005 (4 pages).
- Chaji et al.: "Electrical Compensation of OLED Luminance Degradation"; dated Dec. 2007 (3 pages).
- Chaji et al.: "eUTDSP: a design study of a new VLIW-based DSP architecture"; dated May 2003 (4 pages).
- Chaji et al.: "Fast and Offset-Leakage Insensitive Current-Mode Line Driver for Active Matrix Displays and Sensors"; dated Feb. 2009 (8 pages).
- Chaji et al.: "High Speed Low Power Adder Design With a New Logic Style: Pseudo Dynamic Logic (SDL)"; dated Oct. 2001 (4 pages).
- Chaji et al.: "High-precision fast current source for large-area current-programmed a-Si flat panels"; dated Sep. 2006 (4 pages).
- Chaji et al.: "Low-Cost AMOLED Television with IGNIS Compensating Technology"; dated May 2008 (4 pages).
- Chaji et al.: "Low-Cost Stable a-Si:H AMOLED Display for Portable Applications"; dated Jun. 2006 (4 pages).
- Chaji et al.: "Low-Power Low-Cost Voltage-Programmed a-Si:H AMOLED Display"; dated Jun. 2008 (5 pages).
- Chaji et al.: "Merged phototransistor pixel with enhanced near infrared response and flicker noise reduction for biomolecular imaging"; dated Nov. 2008 (3 pages).
- Chaji et al.: "Parallel Addressing Scheme for Voltage-Programmed Active-Matrix OLED Displays"; dated May 2007 (6 pages).
- Chaji et al.: "Pseudo dynamic logic (SDL): a high-speed and low-power dynamic logic family"; dated 2002 (4 pages).
- Chaji et al.: "Stable a-Si:H circuits based on short-term stress stability of amorphous silicon thin film transistors"; dated May 2006 (4 pages).
- Chaji et al.: "Stable Pixel Circuit for Small-Area High-Resolution a-Si:H AMOLED Displays"; dated Oct. 2008 (6 pages).
- Chaji et al.: "Stable RGBW AMOLED display with OLED degradation compensation using electrical feedback"; dated Feb. 2010 (2 pages).
- Chaji et al.: "Thin-Film Transistor Integration for Biomedical Imaging and AMOLED Displays"; dated May 2008 (177 pages).
- Chapter 3: Color Spaces "Keith Jack." Video Demystified: "A Handbook for the Digital Engineer" 2001 Referex ORD-0000-00-00 USA EP040425529 ISBN: 1-878707-56-6 pp. 32-33.
- Chapter 8: Alternative Flat Panel Display 1-25 Technologies; Willem den Boer: "Active Matrix Liquid Crystal Display: Fundamentals and Applications" 2005 Referex ORD-0000-00-00 U.K.; XP040426102 ISBN: 0-7506-7813-5 pp. 206-209 p. 208.
- European Partial Search Report Application No. 12 15 6251.6 European Patent Office dated May 30, 2012 (7 pages).
- European Patent Office Communication Application No. 05 82 1114 dated Jan. 11, 2013 (9 pages).
- European Patent Office Communication with Supplemental European Search Report for EP Application No. 07 70 1644.2, dated Aug. 18, 2009 (12 pages).
- European Search Report Application No. 10 83 4294.0-1903 dated Apr. 8, 2013 (9 pages).
- European Search Report Application No. EP 05 80 7905 dated Mar. 18, 2009 (5 pages).
- European Search Report Application No. EP 05 82 1114 dated Mar. 27, 2009 (2 pages).
- European Search Report Application No. EP 07 70 1644 dated Aug. 5, 2009 (5 pages).
- European Search Report Application No. EP 10 17 5764—dated Oct. 18 2010 (11 pages).
- European Search Report Application No. EP 10 82 9593.2—European Patent Office dated May 17, 2013 (7 pages).
- European Search Report Application No. EP 12 15 6251.6 European Patent Office dated Oct. 12, 2012 (18 pages).
- European Search Report Application No. EP. 11 175 225.9 dated Nov. 4, 2011 (10 pages).
- European Supplementary Search Report Application No. EP 09 80 2309 dated May 8, 2011 (14 pages).
- European Supplementary Search Report Application No. EP 09 83 1339.8 dated Mar. 26, 2012 (11 pages).
- Extended European Search Report Application No. EP 06 75 2777.0 dated Dec. 3, 2010 (21 pages).
- Extended European Search Report Application No. EP 09 73 2338.0 dated May 24, 2011 (9 pages).
- Extended European Search Report Application No. EP 11 17 5223., 4 mailed Nov. 8, 2011 (8 pages).
- Extended European Search Report Application No. EP 12 17 4465.0 European Patent Office dated Sep. 7, 2012 (9 pages).
- Fan et al.: "LTIPS_ TFT Pixel Circuit Compensation for TFT Threshold Voltage Shift and IR-Drop on the Power Line for Amoled Displays" 5 pages copyright 2012.
- Goh et al.: "A New a-Si:H Thin-Film Transistor Pixel Circuit for Active-Matrix Organic Light-Emitting Diodes" IEEE Electron Device Letters vol. 24 No. 9 Sep. 2003 pp. 583-585.
- International Search Report Application No. PCT/CA2005/001844 dated Mar. 28, 2006 (2 pages).
- International Search Report Application No. PCT/CA2006/000941 dated Oct. 3, 2006 (2 pages).
- International Search Report Application No. PCT/CA2007/000013 dated May 7, 2007 (2 pages).
- International Search Report Application No. PCT/CA2009/001049 mailed Dec. 7, 2009 (4 pages).
- International Search Report Application No. PCT/CA2009/001769 dated Apr. 8, 2010 (8 pages).
- International Search Report Application No. PCT/IB2010/002898 Canadian Intellectual Property Office dated Mar. 30, 2011 (5 pages).
- International Search Report Application No. PCT/IB2010/055481 dated Apr. 7, 2011 (3 pages).
- International Search Report Application No. PCT/IB2011/051103 dated Jul. 8, 2011 2 pages.
- International Search Report Application No. PCT/IB2012/052651 5 pages dated Sep. 11, 2012.
- International Searching Authority Written Opinion Application No. PCT/IB2010/055481 dated Apr. 7, 2011 (6 pages).
- International Searching Authority Written Opinion Application No. PCT/IB2012/052651 6 pages dated Sep. 11, 2012.
- International Searching Authority Written Opinion Application No. PCT/IB2011/051103 dated Jul. 8, 2011 6 pages.
- International Searching Authority Written Opinion Application No. PCT/IB2010/002898 Canadian Intellectual Property Office dated Mar. 30, 2011 (8 pages).
- International Searching Authority Written Opinion Application No. PCT/CA2009/001769 dated Apr. 8, 2010 (8 pages).
- Jafarabadiashiani et al.: "A New Driving Method for a-Si AMOLED Displays Based on Voltage Feedback"; dated May 2005 (4 pages).
- Lee et al.: "Ambipolar Thin-Film Transistors Fabricated by PECVD Nanocrystalline Silicon"; dated May 2006 (6 pages).
- Ma e y et al.: "Organic Light-Emitting Diode/Thin Film Transistor Integration for foldable Displays" Conference record of the 1997 International display research conference and international workshops on LCD technology and emissive technology. Toronto Sep. 15-19, 1997 (6 pages).
- Matsueda y et al.: "35.1: 2.5-in. AMOLED with Integrated 6-bit Gamma Compensated Digital Data Driver"; dated May 2004 (4 pages).
- Nathan et al.: "Amorphous Silicon Thin Film Transistor Circuit Integration for Organic LED Displays on Glass and Plastic" IEEE Journal of Solid-State Circuits vol. 39 No. 9 Sep. 2004 pp. 1477-1486.
- Nathan et al.: "Backplane Requirements for Active Matrix Organic Light Emitting Diode Displays"; dated Sep. 2006 (16 pages).

(56)

References Cited

OTHER PUBLICATIONS

Nathan et al.: "Call for papers second international workshop on compact thin-film transistor (TFT) modeling for circuit simulation"; dated Sep. 2009 (1 page).

Nathan et al.: "Driving schemes for a-Si and LTPS AMOLED displays"; dated Dec. 2005 (11 pages).

Nathan et al.: "Invited Paper: a -Si for AMOLED—Meeting the Performance and Cost Demands of Display Applications (Cell Phone to HDTV)"; dated Jun. 2006 (4 pages).

Nathan et al.: "Thin film imaging technology on glass and plastic"; dated Oct. 31-Nov. 2, 2000 (4 pages).

Ono et al. "Shared Pixel Compensation Circuit for AM-OLED Displays " Proceedings of the 9th Asian Symposium on Information Display (ASID) pp. 462-465 New Delhi dated Oct. 8-12, 2006 (4 pages).

Philipp: "Charge transfer sensing" Sensor Review vol. 19 No. 2 Dec. 31, 1999 10 pages.

Rafati et al.: "Comparison of a 17 b multiplier in Dual-rail domino and in Dual-rail D L (D L) logic styles"; dated 2002 (4 pages).

Safavaian et al.: "Three-TFT image sensor for real-time digital X-ray imaging"; dated Feb. 2, 2006 (2 pages).

Safavian et al.: "3-TFT active pixel sensor with correlated double sampling readout circuit for real-time medical x-ray imaging"; dated Jun. 2006 (4 pages).

Safavian et al.: "A novel current scaling active pixel sensor with correlated double sampling readout circuit for real time medical x-ray imaging"; dated May 2007 (7 pages).

Safavian et al.: "A novel hybrid active-passive pixel with correlated double sampling CMOS readout circuit for medical x-ray imaging"; dated May 2008 (4 pages).

Safavian et al.: "Self-compensated a-Si:H detector with current-mode readout circuit for digital X-ray fluoroscopy"; dated Aug. 2005 (4 pages).

Safavian et al.: "TFT active image sensor with current-mode readout circuit for digital x-ray fluoroscopy [5969D-82]"; dated Sep. 2005 (9 pages).

Smith, Lindsay I., "A tutorial on Principal Components Analysis," dated Feb. 26, 2001 (27 pages).

Stewart M. et al. "Polysilicon TFT technology for active matrix OLED displays" IEEE transactions on electron devices vol. 48 No. 5 May 2001 (7 pages).

Vygranenko et al.: "Stability of indium-oxide thin-film transistors by reactive ion beam assisted deposition"; dated Feb. 2009.

Wang et al.: "Indium oxides by reactive ion beam assisted evaporation: From material study to device application," dated Mar. 2009 (6 pages).

Yi He et al. "Current-Source a-Si:H Thin Film Transistor Circuit for Active-Matrix Organic Light-Emitting Displays" IEEE Electron Device Letters vol. 21 No. 12 Dec. 2000 pp. 590-592.

International Search Report Application No. PCT/IB2013/059074, dated Dec. 18, 2013 (5 pages).

International Searching Authority Written Opinion Application No. PCT/IB2013/059074, dated Dec. 18, 2013 (8 pages).

International Search Report Application No. 14157112.5-1903, dated Aug. 21, 2014 (7 pages).

Alexander et al.: "Unique Electrical Measurement Technology for Compensation, Inspection, and Process Diagnostics of AMOLED HDTV"; dated May 2010 (4 pages).

Arokia Nathan et al., "Amorphous Silicon Thin Film Transistor Circuit Integration for Organic LED Displays on Glass and Plastic", IEEE Journal of Solid-State Circuits, vol. 39, No. 9, Sep. 2004, pp. 1477-1486.

Boer, Willem Den. "Chapter 8: Alternative Flat Panel Display Technologies." *Active Matrix Liquid Crystal Displays [fundamentals and Applications]*. Amsterdam: Elsevier/Newnes, 2005. 206-09. Print.

Chaji et al.: "High-precision, fast current source for large-area current-programmed a-Si flat panels"; dated Sep. 2006 (4 pages).

Chaji et al.: "Stable Pixel Circuit for Small-Area High-Resolution a-Si:H AMOLED Displays"; dated Oct. 2008 (6 pages).

Chaji et al.: "Thin-Film Transistor Integration for Biomedical Imaging and AMOLED Displays"; dated 2008 (177 pages).

Chen, et al. "Fine-grained Dynamic Voltage Scaling on OLED Display." *IEEE* (Jan. 2012): 807-12. Print.

Jafarabadiashiani et al.: "A New Driving Method for a-Si AMOLED Displays Based on Voltage Feedback"; dated 2005 (4 pages).

Joon-Chul Goh et al., "A New a-Si:H Thin-Film Transistor Pixel Circuit for Active-Matrix Organic Light-Emitting Diodes", IEEE Electron Device Letters, Vol, 24, No. 9, Sep. 2003, pp. 583-585.

Lee et al.: "Ambipolar Thin-Film Transistors Fabricated by PECVD Nanocrystalline Silicon"; dated 2006 (6 pages).

Ma E Y et al.: "organic light emitting diode/thin film transistor integration for foldable displays" dated Sep. 15, 1997 (4 pages).

Matsueda y et al.: "35.1: 2.5-in. AMOLED with Integrated 6-bit Gamma Compensated Digital Data Driver"; dated May 2004.

Nathan A. et al., "Thin Film imaging technology on glass and plastic" ICM 2000, proceedings of the 12 international conference on microelectronics, dated Oct. 31, 2001 (4 pages).

Nathan et al.: "Backplane Requirements for Active Matrix Organic Light Emitting Diode Displays"; dated 2006 (16 pages).

Nathan et al.: "Invited Paper: a-Si for AMOLED—Meeting the Performance and Cost Demands of Display Applications (Cell Phone to HDTV)"; dated 2006 (4 pages).

Ono et al., "Shared Pixel Compensation Circuit for AM-OLED Displays", Proceedings of the 9th Asian Symposium on Information Display (ASID), pp. 462-465, New Delhi, Dated Oct. 8-12, 2006; 4 pages.

Philipp: "Charge transfer sensing" Sensor Review, vol. 19, No. 2, Dec. 31, 1999, 10 pages.

Stewart M. et al., "polysilicon TFT technology for active matrix oled displays" IEEE transactions on electron devices, vol. 48, No. 5, dated May 2001 (7 pages).

Vygranenko et al.: "Stability of indium-oxide thin-film transistors by reactive ion beam assisted deposition"; dated 2009.

Wang et al.: "Indium oxides by reactive ion beam assisted evaporation: From material study to device application"; dated Mar. 2009 (6 pages).

Yi He et al., "Current-Source a-Si:H Thin Film Transistor Circuit for Active-Matrix Organic Light-Emitting Displays", IEEE Electron Device Letters, vol. 21, No. 12, Dec. 2000, pp. 590-592.

* cited by examiner

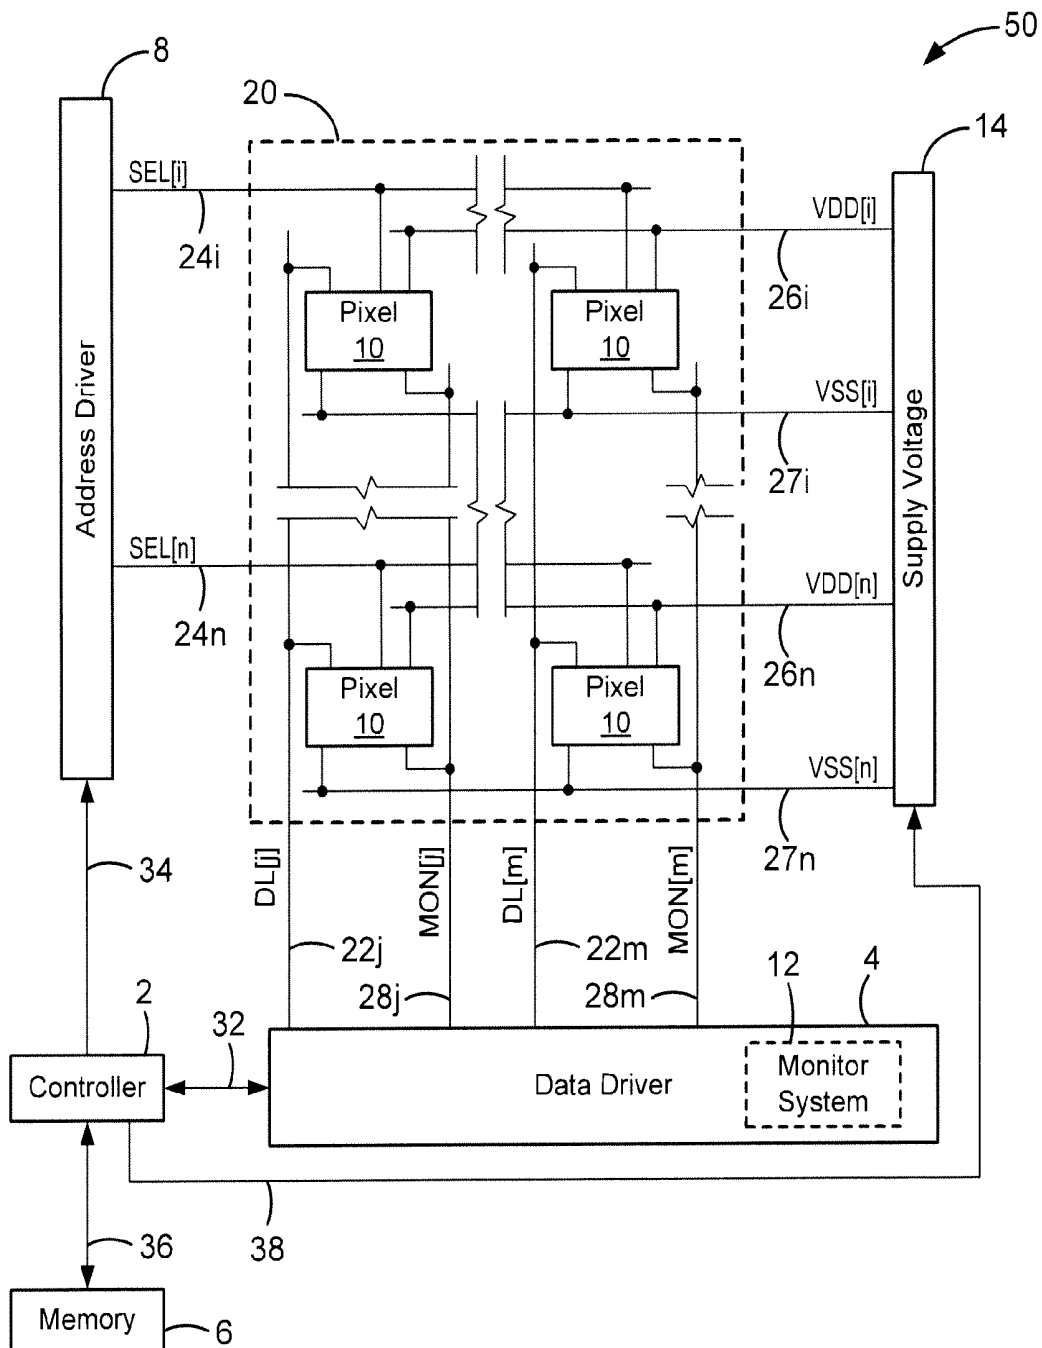


FIG. 1

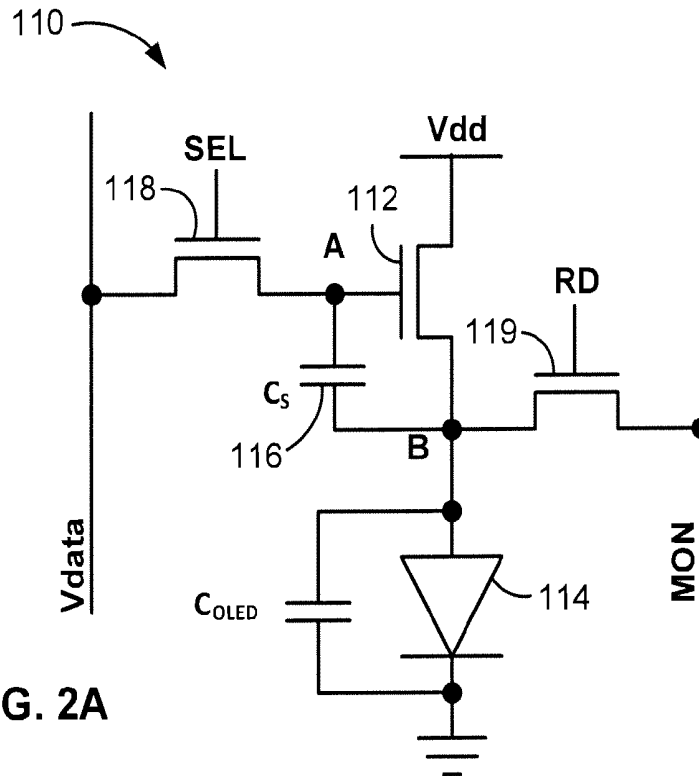


FIG. 2A

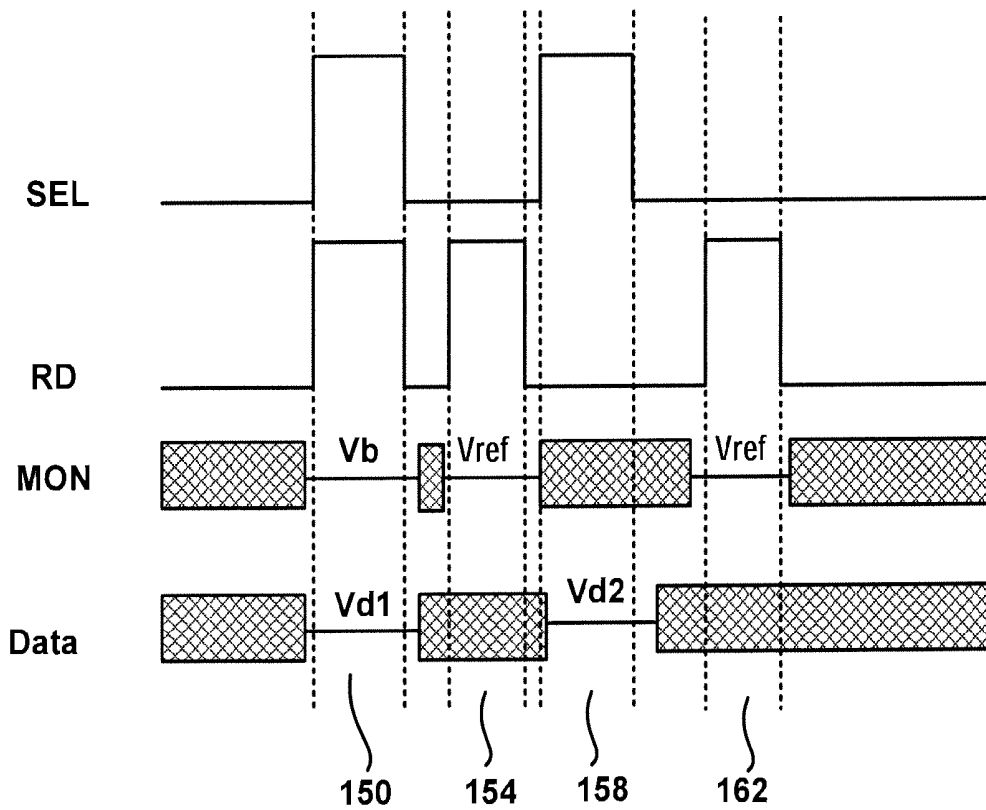


FIG. 2B

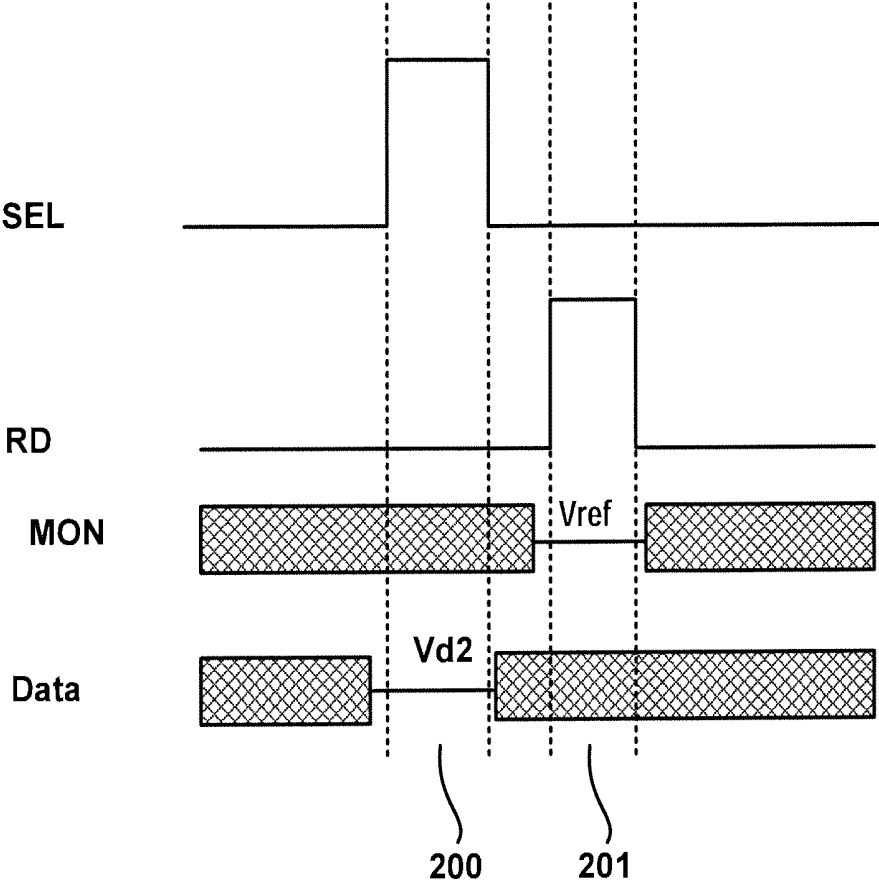


FIG. 2C

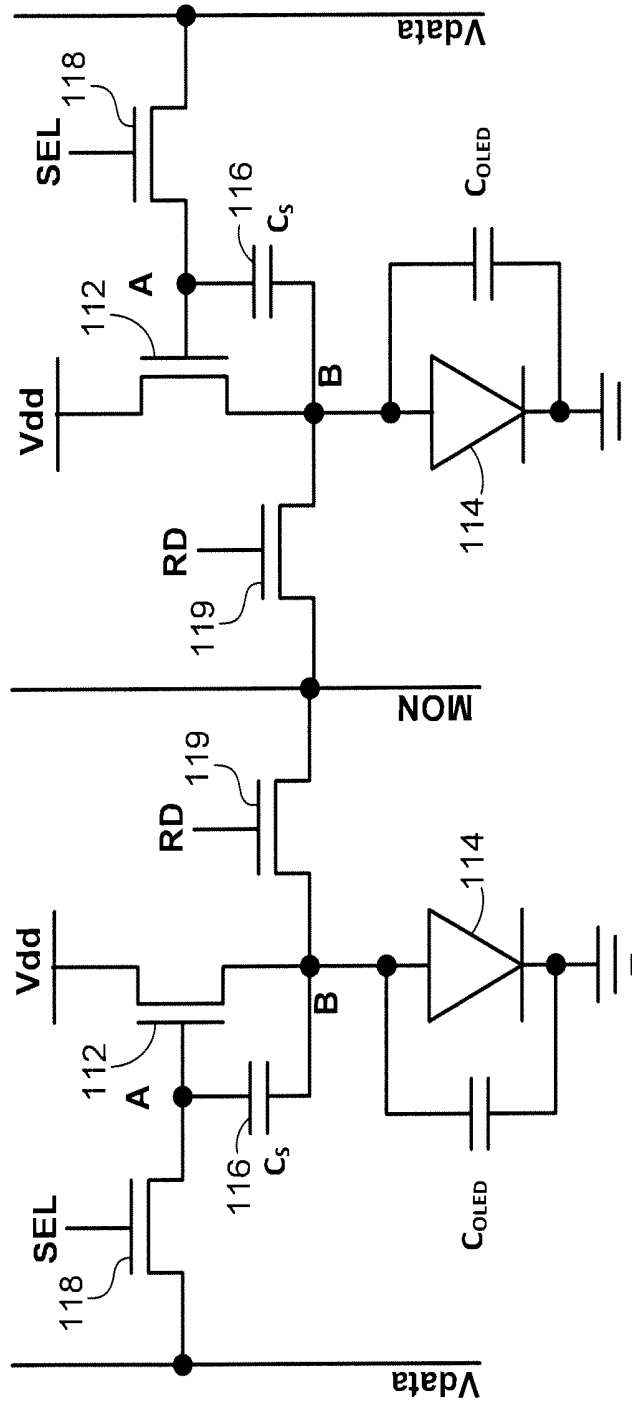


FIG. 3

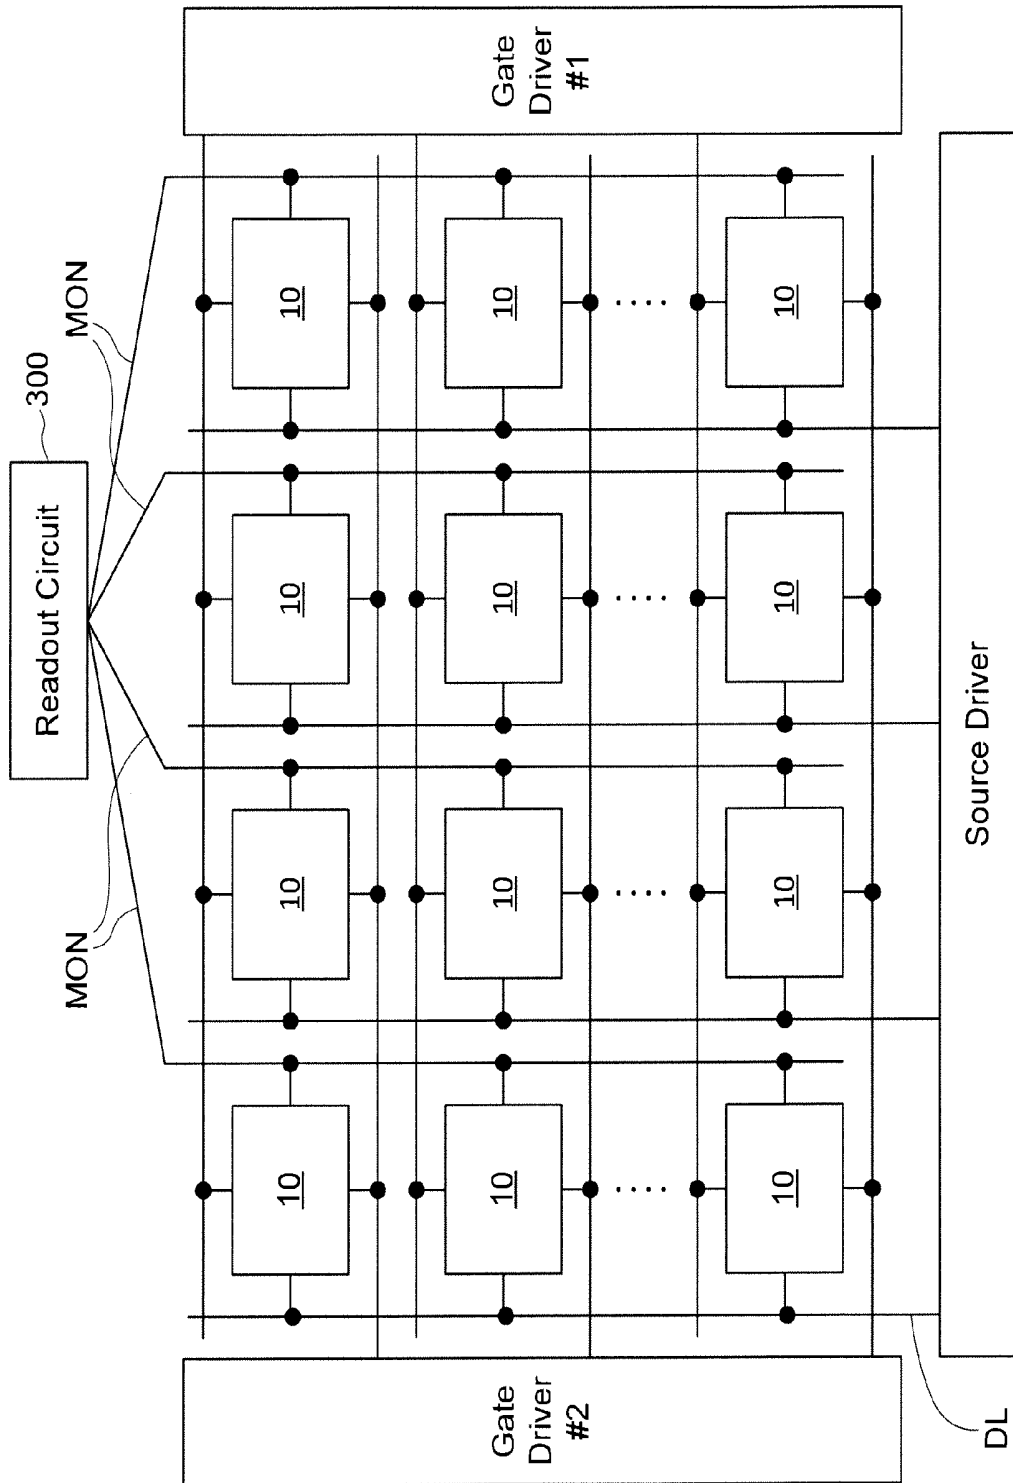


FIG. 4

PIXEL CIRCUITS FOR AMOLED DISPLAYS

FIELD OF THE INVENTION

The present disclosure generally relates to circuits for use in displays, and methods of driving, calibrating, and programming displays, particularly displays such as active matrix organic light emitting diode displays.

BACKGROUND

Displays can be created from an array of light emitting devices each controlled by individual circuits (i.e., pixel circuits) having transistors for selectively controlling the circuits to be programmed with display information and to emit light according to the display information. Thin film transistors ("TFTs") fabricated on a substrate can be incorporated into such displays. TFTs tend to demonstrate non-uniform behavior across display panels and over time as the displays age. Compensation techniques can be applied to such displays to achieve image uniformity across the displays and to account for degradation in the displays as the displays age.

Some schemes for providing compensation to displays to account for variations across the display panel and over time utilize monitoring systems to measure time dependent parameters associated with the aging (i.e., degradation) of the pixel circuits. The measured information can then be used to inform subsequent programming of the pixel circuits so as to ensure that any measured degradation is accounted for by adjustments made to the programming. Such monitored pixel circuits may require the use of additional transistors and/or lines to selectively couple the pixel circuits to the monitoring systems and provide for reading out information. The incorporation of additional transistors and/or lines may undesirably decrease pixel-pitch (i.e., "pixel density").

SUMMARY

In accordance with one embodiment, the OLED voltage of a selected pixel is extracted from the pixel produced when the pixel is programmed so that the pixel current is a function of the OLED voltage. One method for extracting the OLED voltage is to first program the pixel in a way that the current is not a function of OLED voltage, and then in a way that the current is a function of OLED voltage. During the latter stage, the programming voltage is changed so that the pixel current is the same as the pixel current when the pixel was programmed in a way that the current was not a function of OLED voltage. The difference in the two programming voltages is then used to extract the OLED voltage.

Another method for extracting the OLED voltage is to measure the difference between the current of the pixel when it is programmed with a fixed voltage in both methods (being affected by OLED voltage and not being affected by OLED voltage). This measured difference and the current-voltage characteristics of the pixel are then used to extract the OLED voltage.

A further method for extracting the shift in the OLED voltage is to program the pixel for a given current at time zero (before usage) in a way that the pixel current is a function of OLED voltage, and save the programming voltage. To extract the OLED voltage shift after some usage time, the pixel is programmed for the given current as was done at time zero. To get the same current as time zero, the programming voltage needs to change. The difference in the two programming voltages is then used to extract the shift in the OLED voltage. Here one needs to remove the effect of TFT aging from the

second programming voltage first; this is done by programming the pixel without OLED effect for a given current at time zero and after usage. The difference in the programming voltages in this case is the TFT aging, which is subtracted from the calculated difference in the aforementioned case.

In one implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a programming voltage to the drive transistor in the selected pixel to supply a first current to the light-emitting device (the first current being independent of the effective voltage V_{OLED} of the light-emitting device), measuring the first current, supplying a second programming voltage to the drive transistor in the selected pixel to supply a second current to the light-emitting device, the second current being a function of the current effective voltage V_{OLED} of the light-emitting device, measuring the second current and comparing the first and second current measurements, adjusting the second programming voltage to make the second current substantially the same as the first current, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second programming voltages.

In another implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a first programming voltage to the drive transistor in the selected pixel to supply a first current to the light-emitting device in the selected pixel (the first current being independent of the effective voltage V_{OLED} of the light-emitting device), measuring the first current, supplying a second programming voltage to the drive transistor in the selected pixel to supply a second current to the light-emitting device in the selected pixel (the second current being a function of the current effective voltage V_{OLED} of the light-emitting device), measuring the second current, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second current measurements.

In a modified implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a first programming voltage to the drive transistor in the selected pixel to supply a predetermined current to the light-emitting device at a first time (the first current being a function of the effective voltage V_{OLED} of the light-emitting device), supplying a second programming voltage to the drive transistor in the selected pixel to supply the predetermined current to the light-emitting device at a second time following substantial usage of the display, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second programming voltages.

In another modified implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a predetermined programming voltage to the drive transistor in the selected pixel to supply a first current to the light-emitting device (the first current being independent of the effective voltage V_{OLED} of the light-emitting device), measuring the first current, supplying the predetermined programming voltage to the drive transistor in the selected pixel to supply a second current to the light-emitting device (the second current being a function of the current effective voltage V_{OLED} of the light-emitting device), measuring the second current, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second currents and current-voltage characteristics of the selected pixel.

In a preferred implementation, a system is provided for controlling an array of pixels in a display in which each pixel

includes a light-emitting device. Each pixel includes a pixel circuit that comprises the light-emitting device, which emits light when supplied with a voltage V_{OLED} ; a drive transistor for driving current through the light-emitting device according to a driving voltage across the drive transistor during an emission cycle, the drive transistor having a gate, a source and a drain and characterized by a threshold voltage; and a storage capacitor coupled across the source and gate of the drive transistor for providing the driving voltage to the drive transistor. A supply voltage source is coupled to the drive transistor for supplying current to the light-emitting device via the drive transistor, the current being controlled by the driving voltage. A monitor line is coupled to a read transistor that controls the coupling of the monitor line to a first node that is common to the source side of the storage capacitor, the source of the drive transistor, and the light-emitting device. A data line is coupled to a switching transistor that controls the coupling of the data line to a second node that is common to the gate side of the storage capacitor and the gate of the drive transistor. A controller coupled to the data and monitor lines and to the switching and read transistors is adapted to:

- (1) during a first cycle, turn on the switching and read transistors while delivering a voltage V_b to the monitor line and a voltage V_{d1} to the data line, to supply the first node with a voltage that is independent of the voltage across the light-emitting device,
- (2) during a second cycle, turn on the read transistor and turn off the switching transistor while delivering a voltage V_{ref} to the monitor line, and read a first sample of the drive current at the first node via the read transistor and the monitor line,
- (3) during a third cycle, turn off the read transistor and turn on the switching transistor while delivering a voltage V_{d2} to the data line, so that the voltage at the second node is a function of V_{OLED} , and
- (4) during a fourth cycle, turn on said read transistor and turn off said switching transistor while delivering a voltage V_{ref} to said monitor line, and read a second sample the drive current at said first node via said read transistor and said monitor line. The first and second samples of the drive current are compared and, if they are different, the first through fourth cycles are repeated using an adjusted value of at least one of the voltages V_{d1} and V_{d2} , until the first and second samples are substantially the same.

The foregoing and additional aspects and embodiments of the present invention will be apparent to those of ordinary skill in the art in view of the detailed description of various embodiments and/or aspects, which is made with reference to the drawings, a brief description of which is provided next.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other advantages of the invention will become apparent upon reading the following detailed description and upon reference to the drawings.

FIG. 1 is a block diagram of an exemplary configuration of a system for driving an OLED display while monitoring the degradation of the individual pixels and providing compensation therefor.

FIG. 2A is a circuit diagram of an exemplary pixel circuit configuration.

FIG. 2B is a timing diagram of first exemplary operation cycles for the pixel shown in FIG. 2A.

FIG. 2C is a timing diagram of second exemplary operation cycles for the pixel shown in FIG. 2A.

FIG. 3 is a circuit diagram of another exemplary pixel circuit configuration.

FIG. 4 is a block diagram of a modified configuration of a system for driving an OLED display using a shared readout circuit, while monitoring the degradation of the individual pixels and providing compensation therefor.

While the invention is susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION

FIG. 1 is a diagram of an exemplary display system 50. The display system 50 includes an address driver 8, a data driver 4, a controller 2, a memory storage 6, and display panel 20. The display panel 20 includes an array of pixels 10 arranged in rows and columns. Each of the pixels 10 is individually programmable to emit light with individually programmable luminance values. The controller 2 receives digital data indicative of information to be displayed on the display panel 20. The controller 2 sends signals 32 to the data driver 4 and scheduling signals 34 to the address driver 8 to drive the pixels 10 in the display panel 20 to display the information indicated. The plurality of pixels 10 associated with the display panel 20 thus comprise a display array ("display screen") adapted to dynamically display information according to the input digital data received by the controller 2. The display screen can display, for example, video information from a stream of video data received by the controller 2. The supply voltage 14 can provide a constant power voltage or can be an adjustable voltage supply that is controlled by signals from the controller 2. The display system 50 can also incorporate features from a current source or sink (not shown) to provide biasing currents to the pixels 10 in the display panel 20 to thereby decrease programming time for the pixels 10.

For illustrative purposes, the display system 50 in FIG. 1 is illustrated with only four pixels 10 in the display panel 20. It is understood that the display system 50 can be implemented with a display screen that includes an array of similar pixels, such as the pixels 10, and that the display screen is not limited to a particular number of rows and columns of pixels. For example, the display system 50 can be implemented with a display screen with a number of rows and columns of pixels commonly available in displays for mobile devices, monitor-based devices, and/or projection-devices.

The pixel 10 is operated by a driving circuit ("pixel circuit") that generally includes a driving transistor and a light emitting device. Hereinafter the pixel 10 may refer to the pixel circuit. The light emitting device can optionally be an organic light emitting diode, but implementations of the present disclosure apply to pixel circuits having other electroluminescence devices, including current-driven light emitting devices. The driving transistor in the pixel 10 can optionally be an n-type or p-type amorphous silicon thin-film transistor, but implementations of the present disclosure are not limited to pixel circuits having a particular polarity of transistor or only to pixel circuits having thin-film transistors. The pixel circuit 10 can also include a storage capacitor for storing programming information and allowing the pixel circuit 10 to drive the light emitting device after being addressed. Thus, the display panel 20 can be an active matrix display array.

As illustrated in FIG. 1, the pixel 10 illustrated as the top-left pixel in the display panel 20 is coupled to a select line 24*i*, a supply line 26*i*, a data line 22*j*, and a monitor line 28*j*. A read line may also be included for controlling connections to the monitor line. In one implementation, the supply voltage 14 can also provide a second supply line to the pixel 10. For example, each pixel can be coupled to a first supply line 26 charged with V_{dd} and a second supply line 27 coupled with V_{ss}, and the pixel circuits 10 can be situated between the first and second supply lines to facilitate driving current between the two supply lines during an emission phase of the pixel circuit. The top-left pixel 10 in the display panel 20 can correspond a pixel in the display panel in a “*i*th” row and “*j*th” column of the display panel 20. Similarly, the top-right pixel 10 in the display panel 20 represents a “*j*th” row and “*m*th” column; the bottom-left pixel 10 represents an “*n*th” row and “*j*th” column; and the bottom-right pixel 10 represents an “*n*th” row and “*m*th” column. Each of the pixels 10 is coupled to appropriate select lines (e.g., the select lines 24*i* and 24*n*), supply lines (e.g., the supply lines 26*i* and 26*n*), data lines (e.g., the data lines 22*j* and 22*m*), and monitor lines (e.g., the monitor lines 28*j* and 28*m*). It is noted that aspects of the present disclosure apply to pixels having additional connections, such as connections to additional select lines, and to pixels having fewer connections, such as pixels lacking a connection to a monitoring line.

With reference to the top-left pixel 10 shown in the display panel 20, the select line 24*i* is provided by the address driver 8, and can be utilized to enable, for example, a programming operation of the pixel 10 by activating a switch or transistor to allow the data line 22*j* to program the pixel 10. The data line 22*j* conveys programming information from the data driver 4 to the pixel 10. For example, the data line 22*j* can be utilized to apply a programming voltage or a programming current to the pixel 10 in order to program the pixel 10 to emit a desired amount of luminance. The programming voltage (or programming current) supplied by the data driver 4 via the data line 22*j* is a voltage (or current) appropriate to cause the pixel 10 to emit light with a desired amount of luminance according to the digital data received by the controller 2. The programming voltage (or programming current) can be applied to the pixel 10 during a programming operation of the pixel 10 so as to charge a storage device within the pixel 10, such as a storage capacitor, thereby enabling the pixel 10 to emit light with the desired amount of luminance during an emission operation following the programming operation. For example, the storage device in the pixel 10 can be charged during a programming operation to apply a voltage to one or more of a gate or a source terminal of the driving transistor during the emission operation, thereby causing the driving transistor to convey the driving current through the light emitting device according to the voltage stored on the storage device.

Generally, in the pixel 10, the driving current that is conveyed through the light emitting device by the driving transistor during the emission operation of the pixel 10 is a current that is supplied by the first supply line 26*i* and is drained to a second supply line 27*i*. The first supply line 26*i* and the second supply line 27*i* are coupled to the voltage supply 14. The first supply line 26*i* can provide a positive supply voltage (e.g., the voltage commonly referred to in circuit design as “V_{dd}”) and the second supply line 27*i* can provide a negative supply voltage (e.g., the voltage commonly referred to in circuit design as “V_{ss}”). Implementations of the present disclosure can be realized where one or the other of the supply lines (e.g., the supply line 27*i*) is fixed at a ground voltage or at another reference voltage.

The display system 50 also includes a monitoring system 12. With reference again to the top left pixel 10 in the display panel 20, the monitor line 28*j* connects the pixel 10 to the monitoring system 12. The monitoring system 12 can be integrated with the data driver 4, or can be a separate stand-alone system. In particular, the monitoring system 12 can optionally be implemented by monitoring the current and/or voltage of the data line 22*j* during a monitoring operation of the pixel 10, and the monitor line 28*j* can be entirely omitted. Additionally, the display system 50 can be implemented without the monitoring system 12 or the monitor line 28*j*. The monitor line 28*j* allows the monitoring system 12 to measure a current or voltage associated with the pixel 10 and thereby extract information indicative of a degradation of the pixel 10. For example, the monitoring system 12 can extract, via the monitor line 28*j*, a current flowing through the driving transistor within the pixel 10 and thereby determine, based on the measured current and based on the voltages applied to the driving transistor during the measurement, a threshold voltage of the driving transistor or a shift thereof.

The monitoring system 12 can also extract an operating voltage of the light emitting device (e.g., a voltage drop across the light emitting device while the light emitting device is operating to emit light). The monitoring system 12 can then communicate signals 32 to the controller 2 and/or the memory 6 to allow the display system 50 to store the extracted degradation information in the memory 6. During subsequent programming and/or emission operations of the pixel 10, the degradation information is retrieved from the memory 6 by the controller 2 via memory signals 36, and the controller 2 then compensates for the extracted degradation information in subsequent programming and/or emission operations of the pixel 10. For example, once the degradation information is extracted, the programming information conveyed to the pixel 10 via the data line 22*j* can be appropriately adjusted during a subsequent programming operation of the pixel 10 such that the pixel 10 emits light with a desired amount of luminance that is independent of the degradation of the pixel 10. In an example, an increase in the threshold voltage of the driving transistor within the pixel 10 can be compensated for by appropriately increasing the programming voltage applied to the pixel 10.

FIG. 2A is a circuit diagram of an exemplary driving circuit for a pixel 110. The driving circuit shown in FIG. 2A is utilized to calibrate, program and drive the pixel 110 and includes a drive transistor 112 for conveying a driving current through an organic light emitting diode (“OLED”) 114. The OLED 114 emits light according to the current passing through the OLED 114, and can be replaced by any current-driven light emitting device. The OLED 114 has an inherent capacitance C_{OLED} . The pixel 110 can be utilized in the display panel 20 of the display system 50 described in connection with FIG. 1.

The driving circuit for the pixel 110 also includes a storage capacitor 116 and a switching transistor 118. The pixel 110 is coupled to a select line SEL, a voltage supply line V_{dd}, a data line V_{data}, and a monitor line MON. The driving transistor 112 draws a current from the voltage supply line V_{dd} according to a gate-source voltage (V_{gs}) across the gate and source terminals of the drive transistor 112. For example, in a saturation mode of the drive transistor 112, the current passing through the drive transistor 112 can be given by $I_{ds} = \beta(V_{gs} - V_t)^2$, where β is a parameter that depends on device characteristics of the drive transistor 112, I_{ds} is the current from the drain terminal to the source terminal of the drive transistor 112, and V_t is the threshold voltage of the drive transistor 112.

In the pixel **110**, the storage capacitor **116** is coupled across the gate and source terminals of the drive transistor **112**. The storage capacitor **116** has a first terminal, which is referred to for convenience as a gate-side terminal, and a second terminal, which is referred to for convenience as a source-side terminal. The gate-side terminal of the storage capacitor **116** is electrically coupled to the gate terminal of the drive transistor **112**. The source-side terminal **116s** of the storage capacitor **116** is electrically coupled to the source terminal of the drive transistor **112**. Thus, the gate-source voltage V_{gs} of the drive transistor **112** is also the voltage charged on the storage capacitor **116**. As will be explained further below, the storage capacitor **116** can thereby maintain a driving voltage across the drive transistor **112** during an emission phase of the pixel **110**.

The drain terminal of the drive transistor **112** is connected to the voltage supply line V_{dd} , and the source terminal of the drive transistor **112** is connected to (1) the anode terminal of the OLED **114** and (2) a monitor line MON via a read transistor **119**. A cathode terminal of the OLED **114** can be connected to ground or can optionally be connected to a second voltage supply line, such as the supply line V_{ss} shown in FIG. 1. Thus, the OLED **114** is connected in series with the current path of the drive transistor **112**. The OLED **114** emits light according to the magnitude of the current passing through the OLED **114**, once a voltage drop across the anode and cathode terminals of the OLED achieves an operating voltage (V_{OLED}) of the OLED **114**. That is, when the difference between the voltage on the anode terminal and the voltage on the cathode terminal is greater than the operating voltage V_{OLED} , the OLED **114** turns on and emits light. When the anode-to-cathode voltage is less than V_{OLED} , current does not pass through the OLED **114**.

The switching transistor **118** is operated according to the select line SEL (e.g., when the voltage on the select line SEL is at a high level, the switching transistor **118** is turned on, and when the voltage SEL is at a low level, the switching transistor is turned off). When turned on, the switching transistor **118** electrically couples node A (the gate terminal of the driving transistor **112** and the gate-side terminal of the storage capacitor **116**) to the data line V_{data} .

The read transistor **119** is operated according to the read line RD (e.g., when the voltage on the read line RD is at a high level, the read transistor **119** is turned on, and when the voltage RD is at a low level, the read transistor **119** is turned off). When turned on, the read transistor **119** electrically couples node B (the source terminal of the driving transistor **112**, the source-side terminal of the storage capacitor **116**, and the anode of the OLED **114**) to the monitor line MON.

FIG. 2B is a timing diagram of exemplary operation cycles for the pixel **110** shown in FIG. 2A. During a first cycle **150**, both the SEL line and the RD line are high, so the corresponding transistors **118** and **119** are turned on. The switching transistor **118** applies a voltage V_{d1} , which is at a level sufficient to turn on the drive transistor **112**, from the data line V_{data} to node A. The read transistor **119** applies a monitor-line voltage V_b , which is at a level that turns the OLED **114** off, from the monitor line MON to node B. As a result, the gate-source voltage V_{gs} is independent of V_{OLED} ($V_{d1} - V_b - V_{ds3}$, where V_{ds3} is the voltage drop across the read transistor **119**). The SEL and RD lines go low at the end of the cycle **150**, turning off the transistors **118** and **119**.

During the second cycle **154**, the SEL line is low to turn off the switching transistor **118**, and the drive transistor **112** is turned on by the charge on the capacitor **116** at node A. The voltage on the read line RD goes high to turn on the read transistor **119** and thereby permit a first sample of the drive

transistor current to be taken via the monitor line MON, while the OLED **114** is off. The voltage on the monitor line MON is V_{ref} , which may be at the same level as the voltage V_b in the previous cycle.

During the third cycle **158**, the voltage on the select line SEL is high to turn on the switching transistor **118**, and the voltage on the read line RD is low to turn off the read transistor **119**. Thus, the gate of the drive transistor **112** is charged to the voltage V_{d2} of the data line V_{data} , and the source of the drive transistor **112** is set to V_{OLED} by the OLED **114**. Consequently, the gate-source voltage V_{gs} of the drive transistor **112** is a function of V_{OLED} ($V_{gs} = V_{d2} - V_{OLED}$).

During the fourth cycle **162**, the voltage on the select line SEL is low to turn off the switching transistor, and the drive transistor **112** is turned on by the charge on the capacitor **116** at node A. The voltage on the read line RD is high to turn on the read transistor **119**, and a second sample of the current of the drive transistor **112** is taken via the monitor line MON.

If the first and second samples of the drive current are not the same, the voltage V_{d2} on the V_{data} line is adjusted, the programming voltage V_{d2} is changed, and the sampling and adjustment operations are repeated until the second sample of the drive current is the same as the first sample. When the two samples of the drive current are the same, the two gate-source voltages should also be the same, which means that:

$$\begin{aligned} V_{OLED} &= V_{d2} - V_{gs} \\ &= V_{d2} - (V_{d1} - V_b - V_{ds3}) \\ &= V_{d2} - V_{d1} + V_b + V_{ds3}. \end{aligned}$$

After some operation time (t), the change in V_{OLED} between time **0** and time t is $\Delta V_{OLED} = V_{OLED}(t) - V_{OLED}(\mathbf{0}) = V_{d2}(t) - V_{d2}(\mathbf{0})$. Thus, the difference between the two programming voltages $V_{d2}(t)$ and $V_{d2}(\mathbf{0})$ can be used to extract the OLED voltage.

FIG. 2C is a modified schematic timing diagram of another set of exemplary operation cycles for the pixel **110** shown in FIG. 2A, for taking only a single reading of the drive current and comparing that value with a known reference value. For example, the reference value can be the desired value of the drive current derived by the controller to compensate for degradation of the drive transistor **112** as it ages. The OLED voltage V_{OLED} can be extracted by measuring the difference between the pixel currents when the pixel is programmed with fixed voltages in both methods (being affected by V_{OLED} and not being affected by V_{OLED}). This difference and the current-voltage characteristics of the pixel can then be used to extract V_{OLED} .

During the first cycle **200** of the exemplary timing diagram in FIG. 2C, the select line SEL is high to turn on the switching transistor **118**, and the read line RD is low to turn off the read transistor **118**. The data line V_{data} supplies a voltage V_{d2} to node A via the switching transistor **118**. During the second cycle **201**, SEL is low to turn off the switching transistor **118**, and RD is high to turn on the read transistor **119**. The monitor line MON supplies a voltage V_{ref} to the node B via the read transistor **118**, while a reading of the value of the drive current is taken via the read transistor **119** and the monitor line MON. This read value is compared with the known reference value of the drive current and, if the read value and the reference value of the drive current are different, the cycles **200** and **201** are repeated using an adjusted value of the voltage V_{d2} . This process is repeated until the read value and the reference value

of the drive current are substantially the same, and then the adjusted value of V_{d2} can be used to determine V_{OLED} .

FIG. 3 is a circuit diagram of two of the pixels 110a and 110b like those shown in FIG. 2A but modified to share a common monitor line MON, while still permitting independent measurement of the driving current and OLED voltage separately for each pixel. The two pixels 110a and 110b are in the same row but in different columns, and the two columns share the same monitor line MON. Only the pixel selected for measurement is programmed with valid voltages, while the other pixel is programmed to turn off the drive transistor 12 during the measurement cycle. Thus, the drive transistor of one pixel will have no effect on the current measurement in the other pixel.

FIG. 4 illustrates a modified drive system that utilizes a readout circuit 300 that is shared by multiple columns of pixels while still permitting the measurement of the driving current and OLED voltage independently for each of the individual pixels 10. Although only four columns are illustrated in FIG. 4, it will be understood that a typical display contains a much larger number of columns, and they can all use the same readout circuit. Alternatively, multiple readout circuits can be utilized, with each readout circuit still sharing multiple columns, so that the number of readout circuits is significantly less than the number of columns. Only the pixel selected for measurement at any given time is programmed with valid voltages, while all the other pixels sharing the same gate signals are programmed with voltages that cause the respective drive transistors to be off. Consequently, the drive transistors of the other pixels will have no effect on the current measurement being taken of the selected pixel. Also, when the driving current in the selected pixel is used to measure the OLED voltage, the measurement of the OLED voltage is also independent of the drive transistors of the other pixels.

While particular embodiments and applications of the present invention have been illustrated and described, it is to be understood that the invention is not limited to the precise construction and compositions disclosed herein and that various modifications, changes, and variations can be apparent from the foregoing descriptions without departing from the spirit and scope of the invention as defined in the appended claims.

What is claimed is:

1. A method of determining the current effective voltage V_{OLED} of a light-emitting device in a selected pixel in an array of pixels in a display in which each pixel includes a drive transistor for supplying current to said light-emitting device, said method comprising

supplying a programming voltage to said drive transistor in said selected pixel to supply a first current to said light-emitting device in said selected pixel, said first current being independent of the effective voltage V_{OLED} of said light-emitting device,

measuring said first current,

supplying a second programming voltage to said drive transistor in said selected pixel to supply a second current to said light-emitting device in said selected pixel, said second current being a function of the current effective voltage V_{OLED} of said light-emitting device,

measuring said second current and comparing said first and second current measurements,

adjusting said second programming voltage to make said second current substantially the same as said first current,

extracting the value of the current effective voltage V_{OLED} of said light-emitting device from the difference between said first and second programming voltages.

2. The method of claim 1 in which said light-emitting devices are OLEDs.

3. A method of determining the current effective voltage V_{OLED} of a light-emitting device in a selected pixel in an array of pixels in a display in which each pixel includes a drive transistor for supplying current to said light-emitting device, said method comprising

supplying a first programming voltage to said drive transistor in said selected pixel to supply a first current to said light-emitting device in said selected pixel, said first current being independent of the effective voltage V_{OLED} of said light-emitting device,

measuring said first current,

supplying a second programming voltage to said drive transistor in said selected pixel to supply a second current to said light-emitting device in said selected pixel, said second current being a function of the current effective voltage V_{OLED} of said light-emitting device,

measuring said second current, and

extracting the value of the current effective voltage V_{OLED} of said light-emitting device from the difference between said first and second current measurements.

4. The method of claim 3 in which said light-emitting devices are OLEDs.

5. A system for determining the current effective voltage V_{OLED} of a pixel in an array of pixels in a display in which each pixel includes a light-emitting device that emits light when supplied with a voltage V_{OLED} , the system comprising a pixel circuit in each of said pixels, said circuit including

a drive transistor for driving current through the light-emitting device according to a driving voltage across the drive transistor during an emission cycle,

a storage capacitor coupled across the source and gate of said drive transistor for providing said driving voltage to said drive transistor,

a monitor line coupled to a read transistor that controls the coupling of said monitor line to a first node that is common to the source of said drive transistor and said light-emitting device,

a data line coupled to a switching transistor that controls the coupling of said data line to the gate of said drive transistor, and

a controller coupled to said data and monitor lines and to said switching and read transistors, and adapted to turn on said switching and read transistors of a selected pixel while supplying said first node of said selected pixel with a voltage that is sufficient to turn on said light-emitting device of said selected pixel, the current supplied to said light-emitting device being a function of the voltage V_{OLED} of said device,

measure the current flowing through said drive transistor and said light-emitting device of the selected pixel, and

extract from said current measurement the effective voltage V_{OLED} .

6. The system of claim 5 in which said first node of said selected pixel is supplied with a first voltage that is not sufficient to turn on said light-emitting device of said selected pixel so that the current supplied to said light-emitting device is not a function of the voltage V_{OLED} of said device, prior to supplying said first node of said selected pixel with a second voltage that is sufficient to turn on said light-emitting device of the selected pixel so that the current supplied to said light-emitting device is a function of the voltage V_{OLED} of said device.

11

7. The system of claim 6 in which said voltage V_{OLED} is determined from the difference between said first and second voltages.

8. A system for controlling an array of pixels in a display in which each pixel includes a light-emitting device, the system comprising

- a pixel circuit in each of said pixels, said circuit including said light-emitting device, which emits light when supplied with a voltage V_{OLED} ,
- a drive transistor for driving current through the light-emitting device according to a driving voltage across the drive transistor during an emission cycle, said drive transistor having a gate, a source and a drain and characterized by a threshold voltage,
- a storage capacitor coupled across the source and gate of said drive transistor for providing said driving voltage to said drive transistor,
- a supply voltage source coupled to said drive transistor for supplying current to said light-emitting device via said drive transistor, said current being controlled by said driving voltage,
- a monitor line coupled to a read transistor that controls the coupling of said monitor line to a first node that is common to the source side of said storage capacitor, the source of said drive transistor, and said light-emitting device,
- a data line coupled to a switching transistor that controls the coupling of said data line to a second node that is common to the gate side of said storage capacitor and the gate of said drive transistor, and
- a controller coupled to said data and monitor lines and to said switching and read transistors, and adapted to during a first cycle, turn on said switching and read transistors while delivering a voltage V_b to said monitor line and a voltage V_{d1} to said data line, to supply said first node with a voltage that is independent of the voltage across said light-emitting device,
- during a second cycle, turn on said read transistor and turn off said switching transistor while delivering a voltage V_{ref} to said monitor line, and read a first sample of the drive current at said first node via said read transistor and said monitor line,
- during a third cycle, turn off said read transistor and turn on said switching transistor while delivering a voltage V_{d2} to said data line, so that the voltage at said second node is a function of V_{OLED} ,
- during a fourth cycle, turn on said read transistor and turn off said switching transistor while delivering a voltage V_{ref} to said monitor line, and read a second sample of the drive current at said first node via said read transistor and said monitor line, and
- compare said first and second samples and, if said first and second samples are different, repeating said first through fourth cycles using an adjusted value of at least one of said voltages V_{d1} and V_{d2} , until said first and second samples are substantially the same.

9. The system of claim 8 in which said pixels are arranged in rows and columns, and said pixel circuits in a plurality of columns share a common monitor line.

10. The system of claim 9 in which said pixel circuits that share a common monitor line are in adjacent columns.

11. The system of claim 9 in which, during said second and fourth cycles, said controller is adapted to turn off all the drive

12

transistor in all of said pixel circuits sharing a common monitor line, except the pixel circuit in which said drive current is being read.

12. The system of claim 8 in which said controller is adapted to determine the current value of V_{OLED} when it has been determined that said first and second samples are substantially the same.

13. A system for controlling an array of pixels in a display in which each pixel includes a light-emitting device, the system comprising

- a pixel circuit in each of said pixels, said circuit including said light-emitting device, which emits light when supplied with a voltage V_{OLED} ,
- a drive transistor for driving current through the light-emitting device according to a driving voltage across the drive transistor during an emission cycle, said drive transistor having a gate, a source and a drain and characterized by a threshold voltage,
- a storage capacitor coupled across the source and gate of said drive transistor for providing said driving voltage to said drive transistor,
- a supply voltage source coupled to said drive transistor for supplying current to said light-emitting device via said drive transistor, said current being controlled by said driving voltage,
- a monitor line coupled to a read transistor that controls the coupling of said monitor line to a first node that is common to the source side of said storage capacitor, the source of said drive transistor, and said light-emitting device,
- a data line coupled to a switching transistor that controls the coupling of said data line to a second node that is common to the gate side of said storage capacitor and the gate of said drive transistor, and
- a controller coupled to said data and monitor lines and to said switching and read transistors, and adapted to during a first cycle, turn on said switching and read transistors while delivering a voltage V_b to said monitor line and a voltage V_{d1} to said data line, to supply said first node with a voltage that is independent of the voltage across said light-emitting device,
- during a second cycle, turn on said read transistor and turn off said switching transistor while delivering a voltage V_{ref} to said monitor line, and read the value of the drive current at said first node via said read transistor and said monitor line, and
- compare said read value of said drive current with a reference value of said drive current and, if said read value and said reference value are different, repeating said first and second cycles using an adjusted value of said voltage V_{d1} , until said read value and said reference value are substantially the same.

14. A system for controlling an array of pixels in a display in which each pixel includes a light-emitting device, the system comprising

- a pixel circuit in each of said pixels, said circuit including said light-emitting device, which emits light when supplied with a voltage V_{OLED} ,
- a drive transistor for driving current through the light-emitting device according to a driving voltage across the drive transistor during an emission cycle, said drive transistor having a gate, a source and a drain and characterized by a threshold voltage,

13

a storage capacitor coupled across the source and gate of said drive transistor for providing said driving voltage to said drive transistor,

a supply voltage source coupled to said drive transistor for supplying current to said light-emitting device via said drive transistor, said current being controlled by said driving voltage,

a monitor line coupled to a read transistor that controls the coupling of said monitor line to a first node that is common to the source side of said storage capacitor, the source of said drive transistor, and said light-emitting device,

a data line coupled to a switching transistor that controls the coupling of said data line to a second node that is common to the gate side of said storage capacitor and the gate of said drive transistor, and

a controller coupled to said data and monitor lines and to said switching and read transistors, and adapted to during a first cycle, turn on said switching and read transistors while delivering a voltage V_b to said monitor line and a voltage V_{d1} to said data line, to supply said first node with a voltage that is independent of the voltage across said light-emitting device,

14

during a second cycle, turn on said read transistor and turn off said switching transistor while delivering a voltage V_{ref} to said monitor line, and read a first sample of the drive current at said first node via said read transistor and said monitor line,

during a third cycle, turn off said read transistor and turn on said switching transistor while delivering a voltage V_{d2} to said data line, so that the voltage at said second node is a function of V_{OLED} ,

during a fourth cycle, turn on said read transistor and turn off said switching transistor while delivering a voltage V_{ref} to said monitor line, and read a second sample of the drive current at said first node via said read transistor and said monitor line, and

compare said first and second samples and, if said first and second samples are different, repeating said first through fourth cycles using an adjusted value of at least one of said voltages V_{d1} and V_{d2} , until said first and second samples are substantially the same.

* * * * *

专利名称(译)	用于AMOLED显示器的像素电路		
公开(公告)号	US9351368	公开(公告)日	2016-05-24
申请号	US13/789978	申请日	2013-03-08
[标]申请(专利权)人(译)	伊格尼斯创新公司		
申请(专利权)人(译)	IGNIS创新INC.		
当前申请(专利权)人(译)	IGNIS创新INC.		
[标]发明人	AZIZI YASER CHAJI GHOLAMREZA		
发明人	AZIZI, YASER CHAJI, GHOLAMREZA		
IPC分类号	G09G3/32 H05B33/08		
CPC分类号	H05B33/0848 G09G3/3233 G09G2300/0842 G09G2320/0295 G09G2320/045 G09G2320/0693 G09G3/3258 G09G2300/0819 G09G2320/048 G09G2320/10 H05B45/14		
代理机构(译)	尼克松皮博迪律师事务所		
审查员(译)	XAVIER, ANTONIO		
其他公开文献	US20140252988A1		
外部链接	Espacenet USPTO		

摘要(译)

从像素被编程时产生的像素中提取所选像素的OLED电压，使得像素电流是OLED电压的函数。用于提取OLED电压的一种方法是首先以电流不是OLED电压的函数的方式对像素进行编程，然后以电流是OLED电压的函数的方式对像素进行编程。在后一阶段期间，改变编程电压，使得像素电流与像素被编程的像素电流相同，使得电流不是OLED电压的函数。然后使用两个编程电压的差异来提取OLED电压。

