



US 20200099006A1

(19) **United States**(12) **Patent Application Publication**
Lee et al.(10) **Pub. No.: US 2020/0099006 A1**
(43) **Pub. Date: Mar. 26, 2020**(54) **ORGANIC LIGHT-EMITTING DISPLAY
APPARATUS AND METHOD OF
MANUFACTURING THE SAME****Publication Classification**(51) **Int. Cl.***H01L 51/50* (2006.01)*H01L 51/00* (2006.01)*H01L 51/56* (2006.01)(52) **U.S. Cl.**CPC *H01L 51/5092* (2013.01); *H01L 51/0018*
(2013.01); *H01L 27/3211* (2013.01); *H01L*
51/5064 (2013.01); *H01L 51/56* (2013.01)(71) Applicant: **Samsung Display Co., Ltd.**, Yongin-si
(KR)(72) Inventors: **Duckjung Lee**, Yongin-si (KR); **Arong**
Kim, Yongin-si (KR); **Jungsun Park**,
Yongin-si (KR); **Hyunsung Bang**,
Yongin-si (KR); **Jiyoung Choong**,
Yongin-si (KR)(21) Appl. No.: **16/693,382**(22) Filed: **Nov. 25, 2019****Related U.S. Application Data**(62) Division of application No. 15/659,569, filed on Jul.
25, 2017, now Pat. No. 10,522,779.(30) **Foreign Application Priority Data**

Aug. 12, 2016 (KR) 10-2016-0103196

ABSTRACT

An organic light-emitting display apparatus including: a first electrode of a first group; a first organic functional layer covering the first electrode of the first group and including a first emission layer; a second electrode of the first group covering the first organic functional layer; a first electrode of a second group separate from the first electrode of the first group; a second organic functional layer separate from the first organic functional layer, covering the first electrode of the second group, having a larger area than the first organic functional layer, and including a second emission layer; a second electrode of the second group covering the second organic functional layer; and a common electrode integrally and commonly disposed on the second electrode of the first group and the second electrode of the second group.

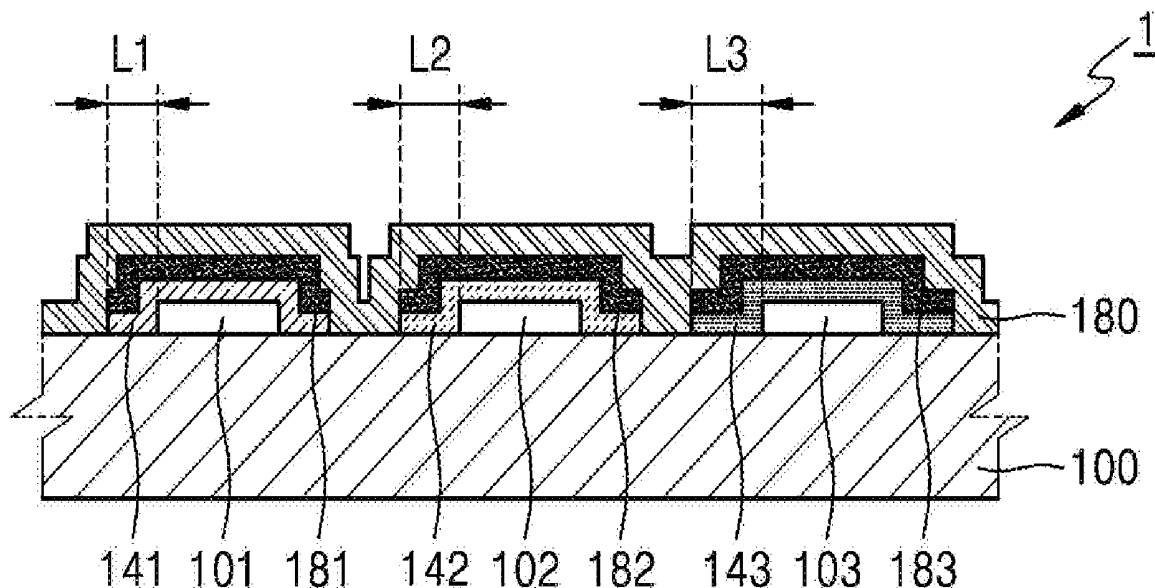


FIG. 1

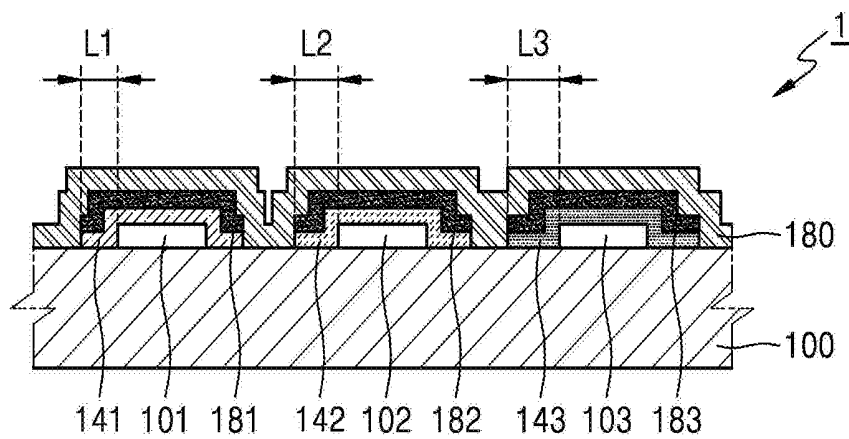


FIG. 2

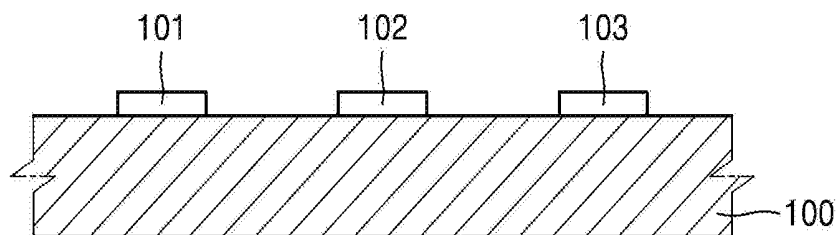


FIG. 3A

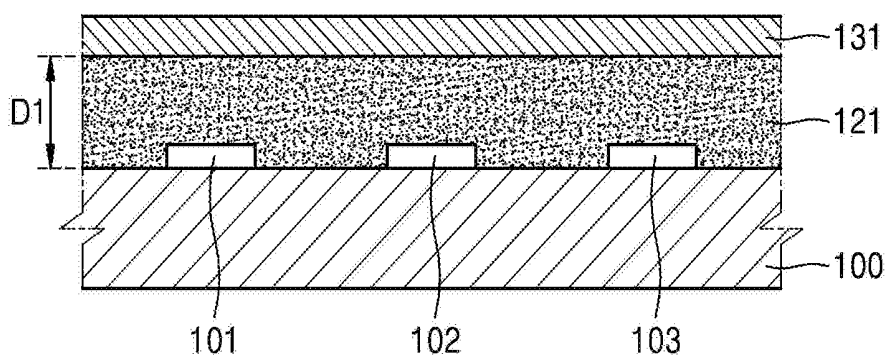


FIG. 3B

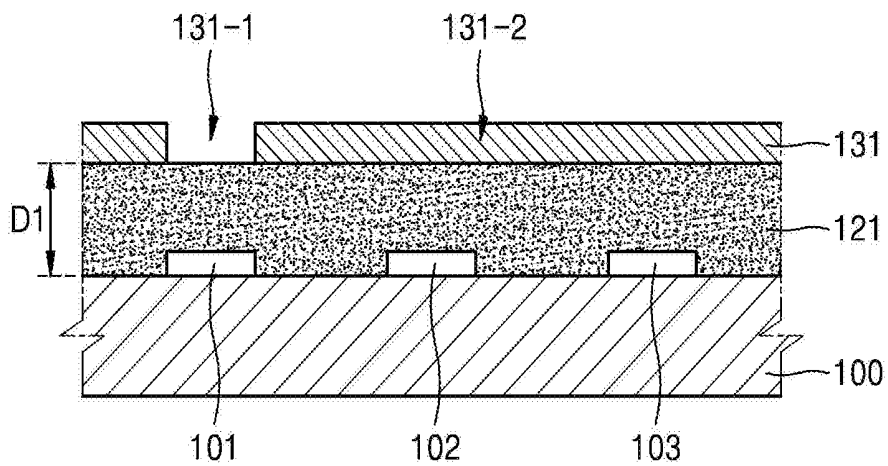


FIG. 3C

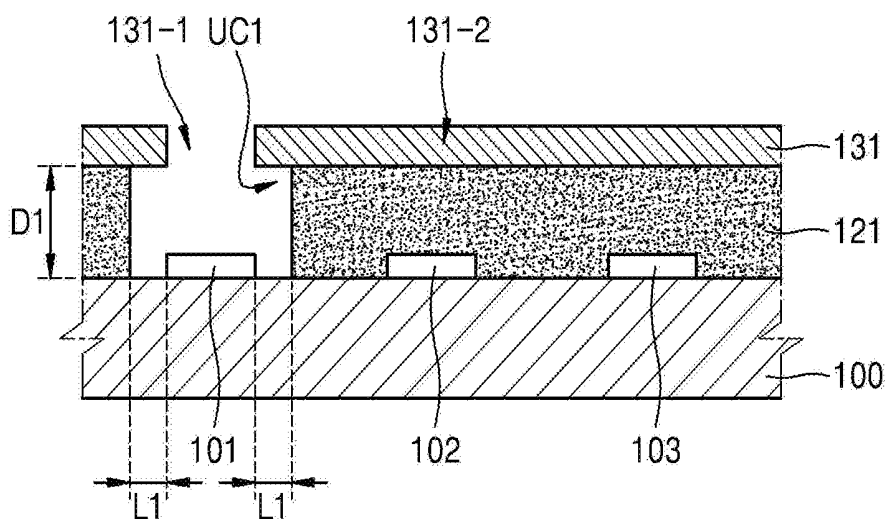


FIG. 3D

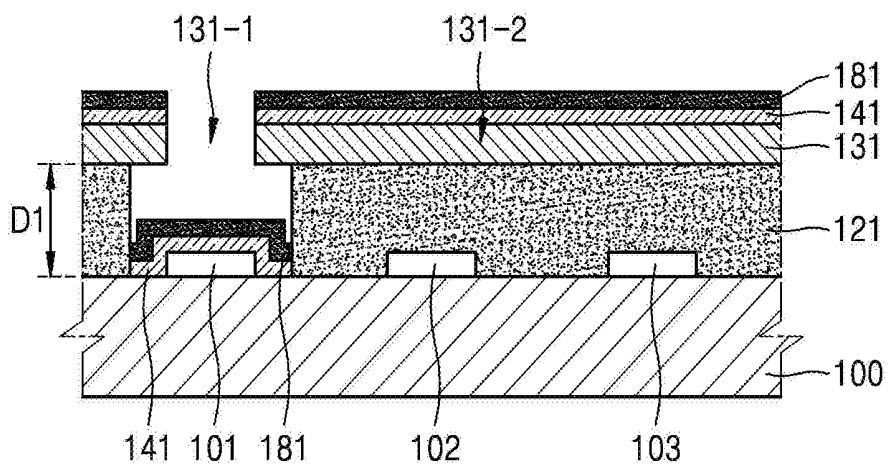


FIG. 3E

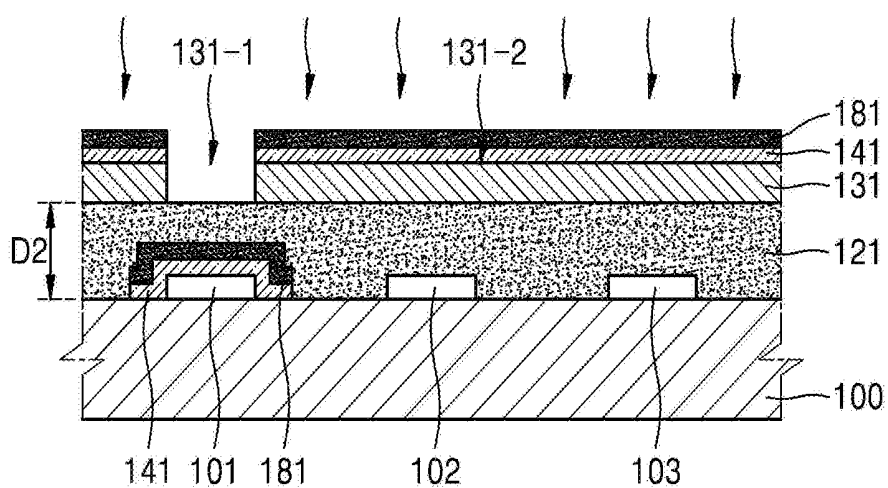


FIG. 3F

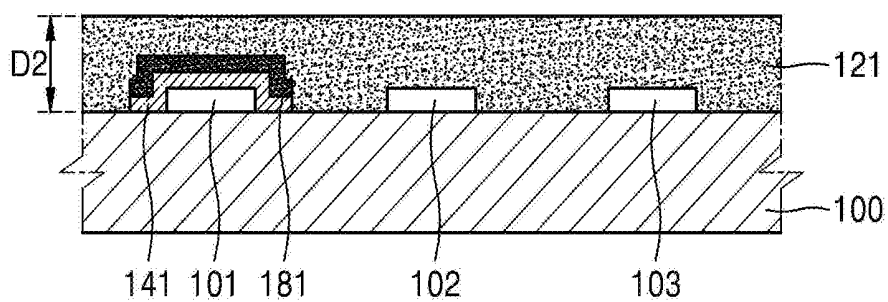


FIG. 4A

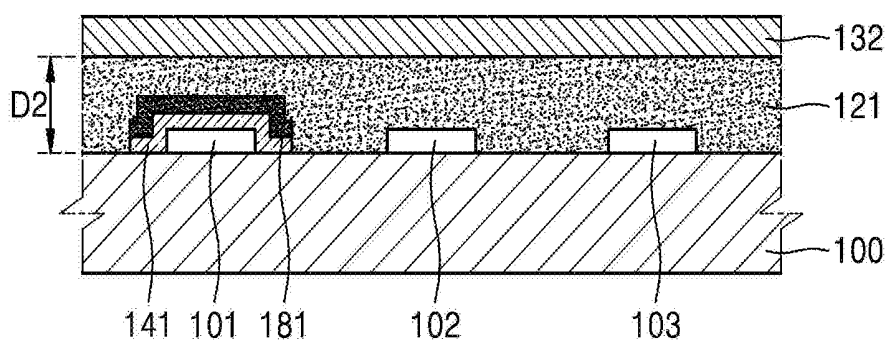


FIG. 4B

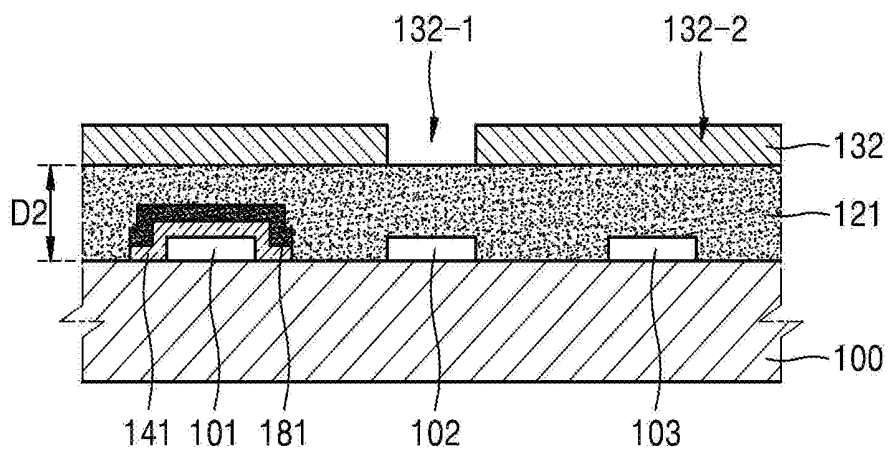


FIG. 4C

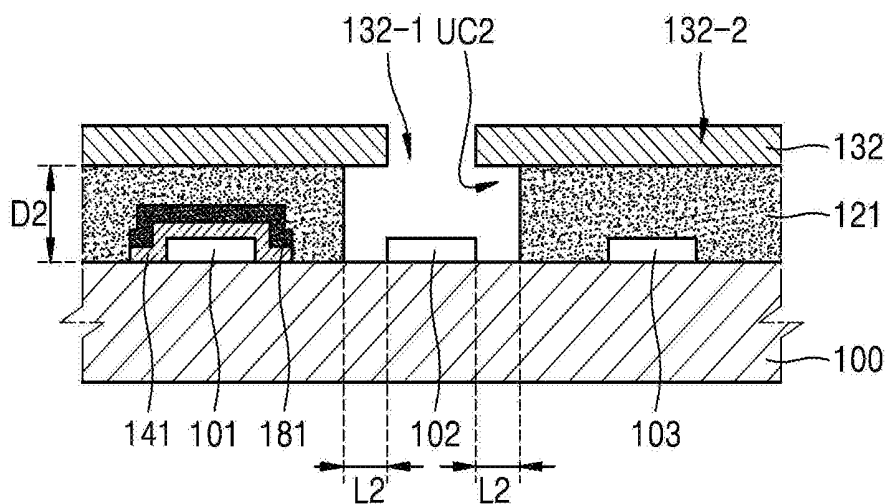


FIG. 4D

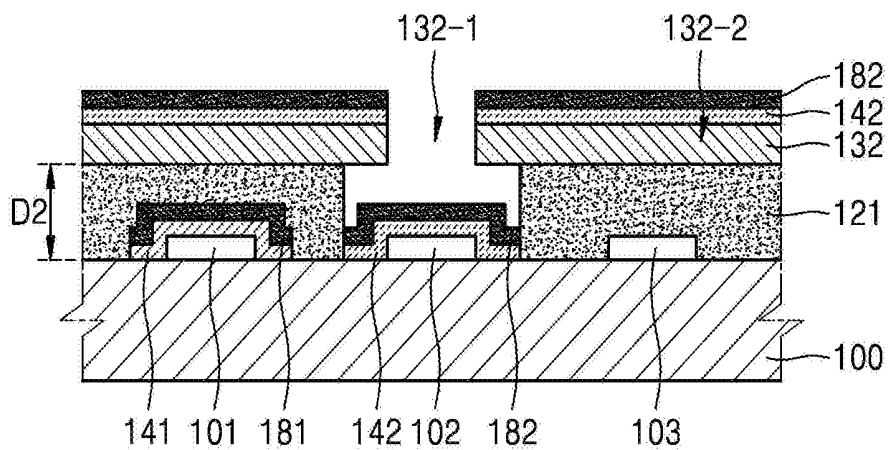


FIG. 4E

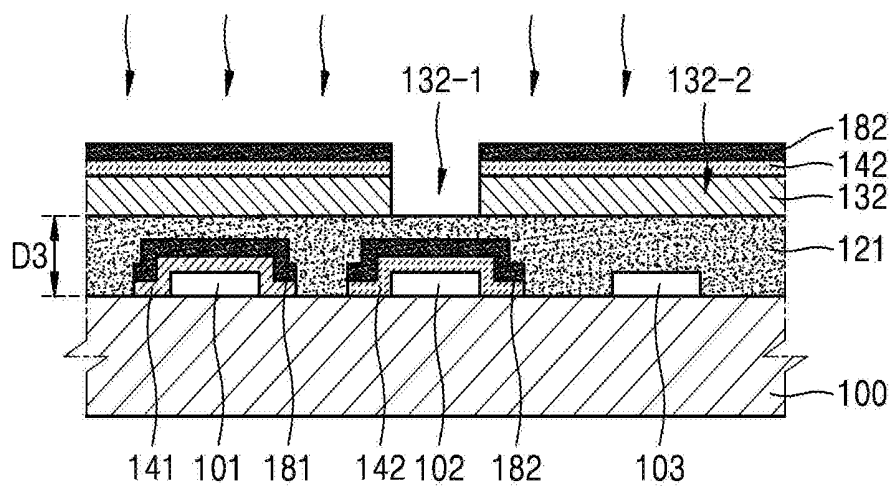


FIG. 4F

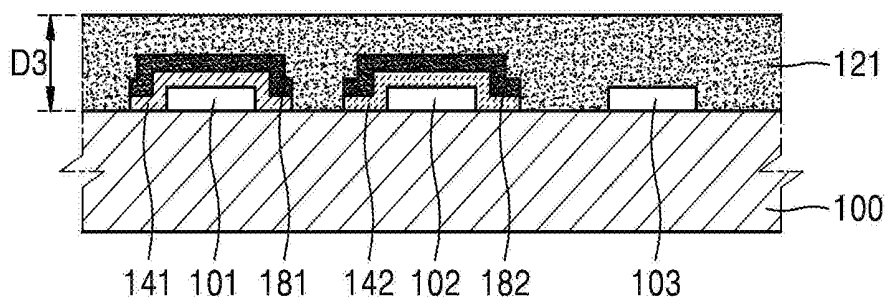


FIG. 5A

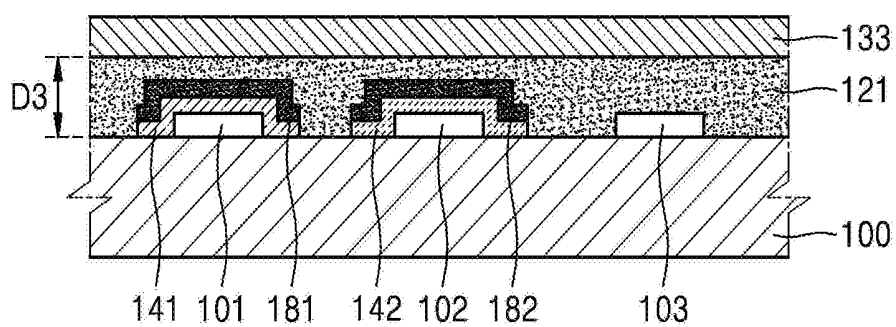


FIG. 5B

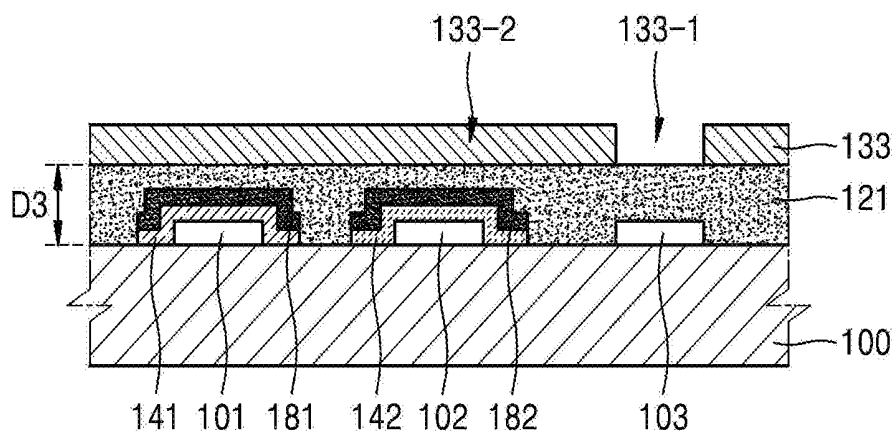


FIG. 5C

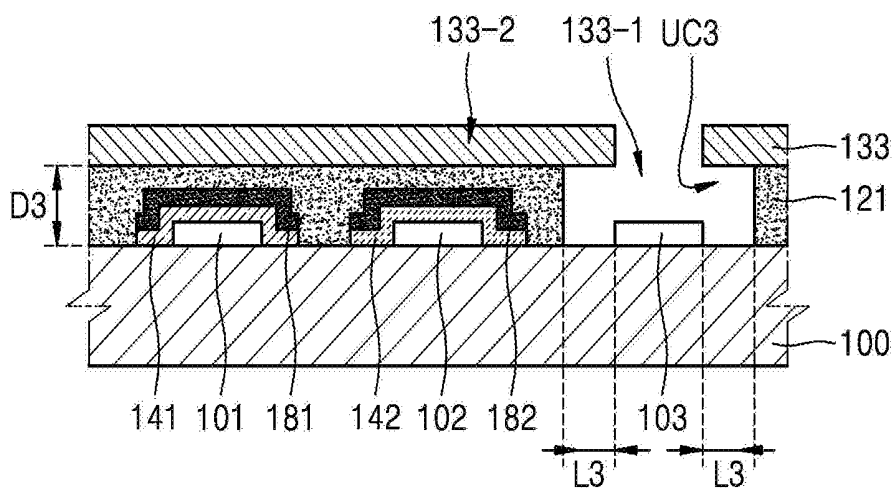


FIG. 5D

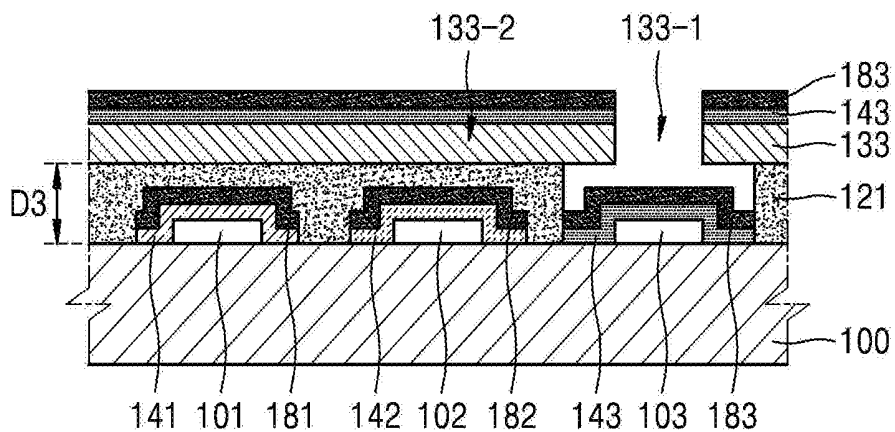


FIG. 5E

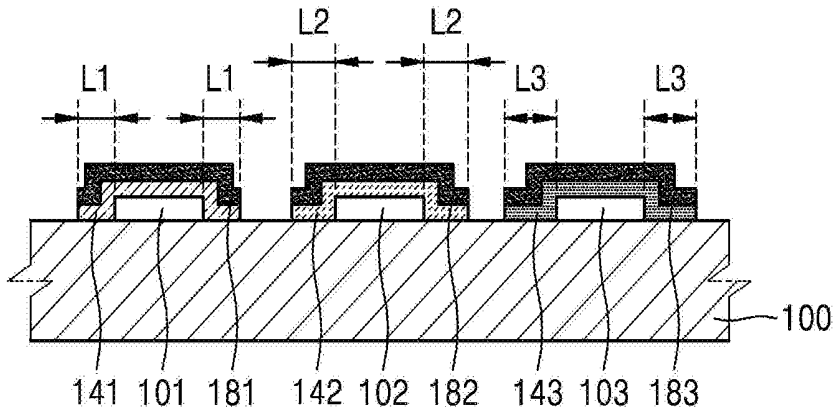


FIG. 6A

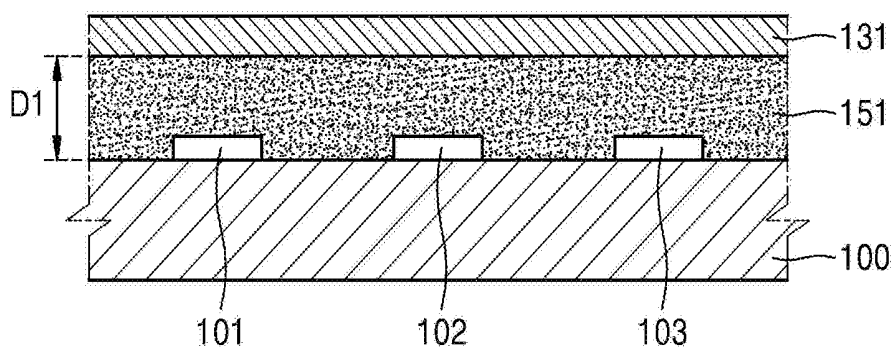


FIG. 6B

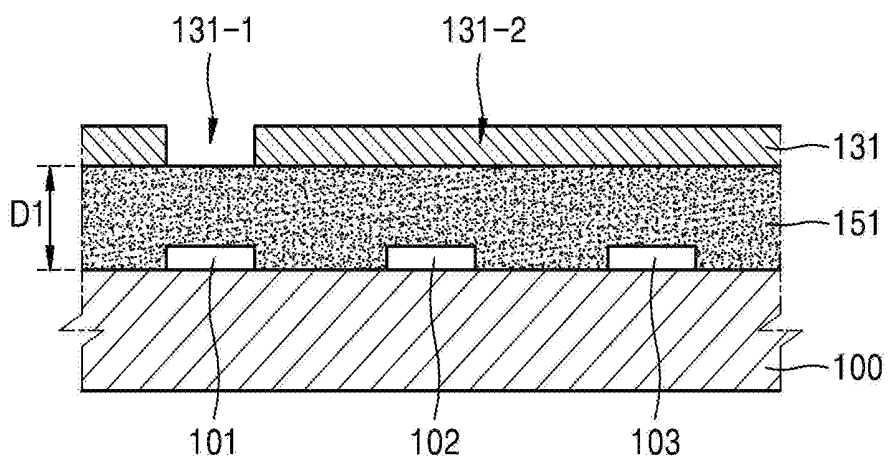


FIG. 6C

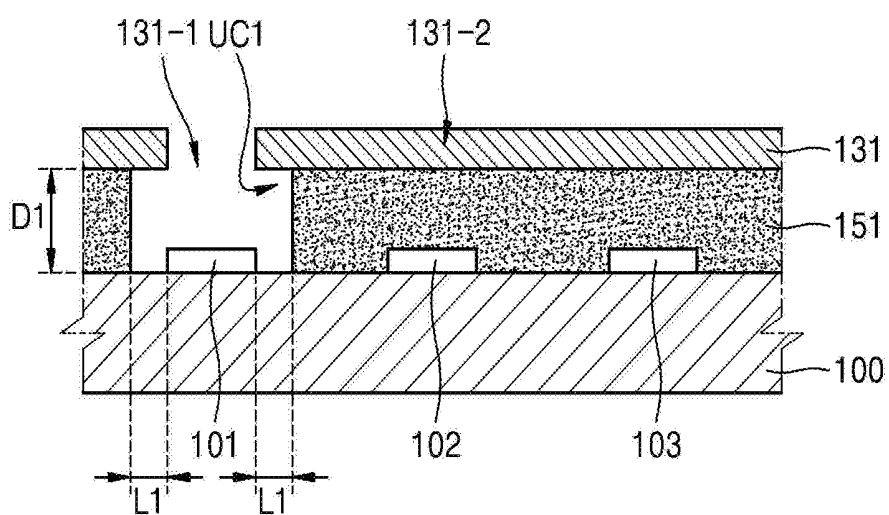


FIG. 6D

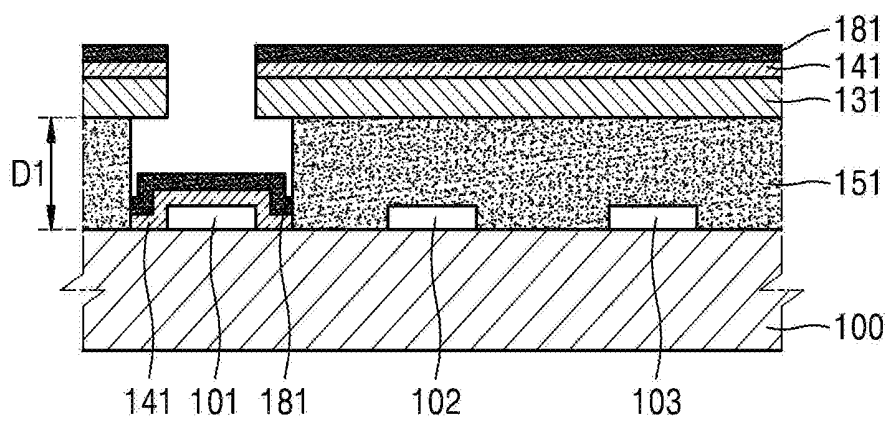


FIG. 6E

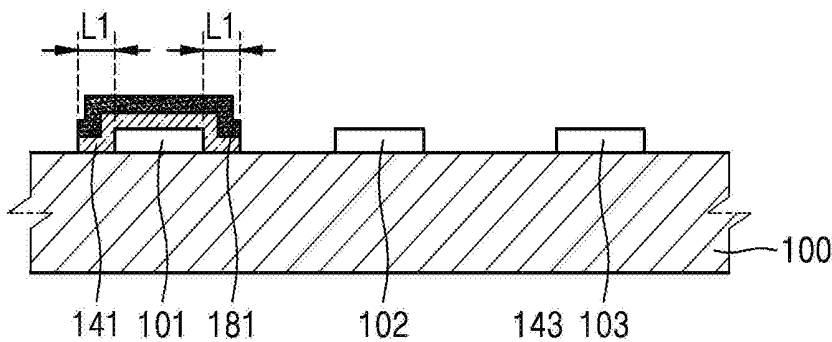


FIG. 7A

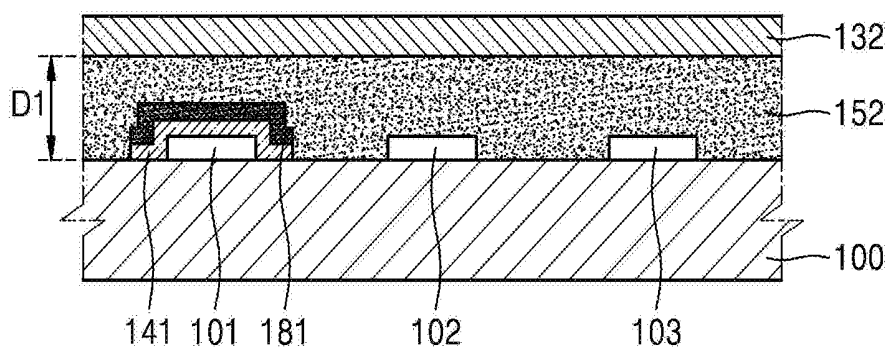


FIG. 7B

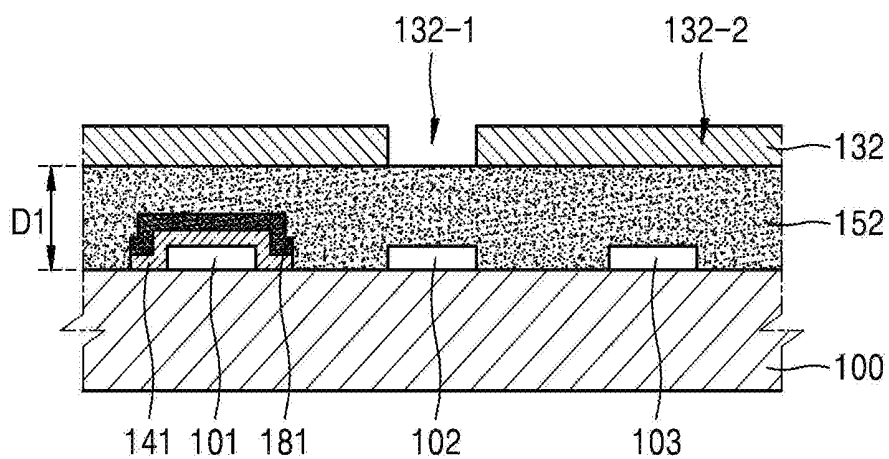


FIG. 7C

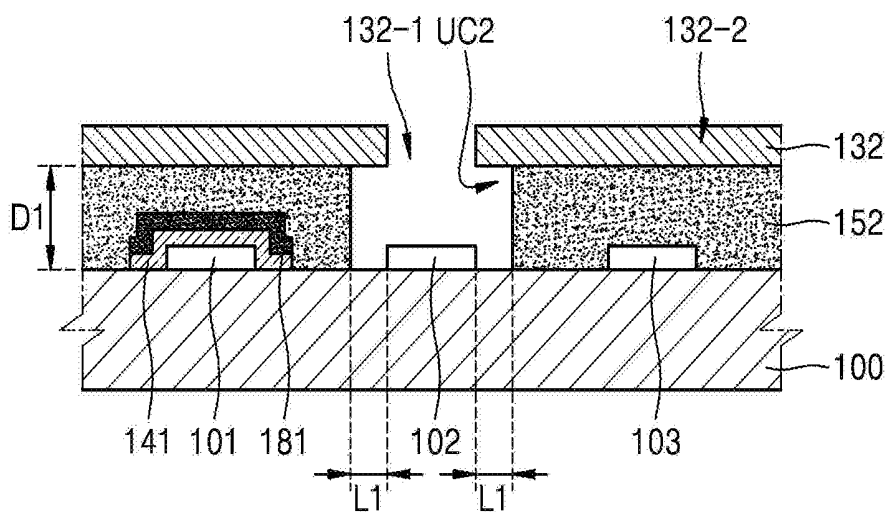


FIG. 7D

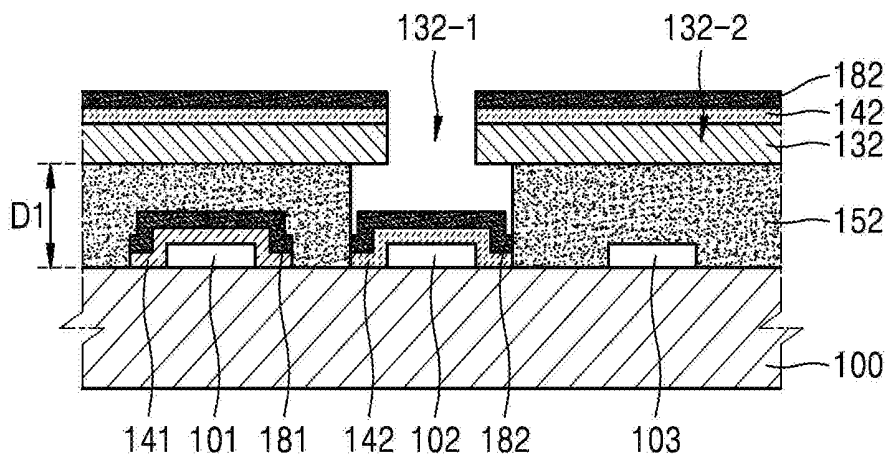


FIG. 7E

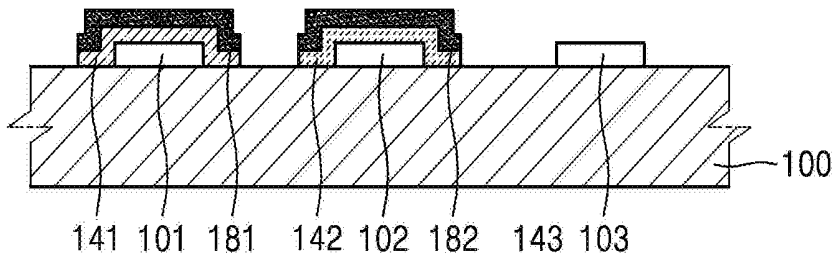


FIG. 8A

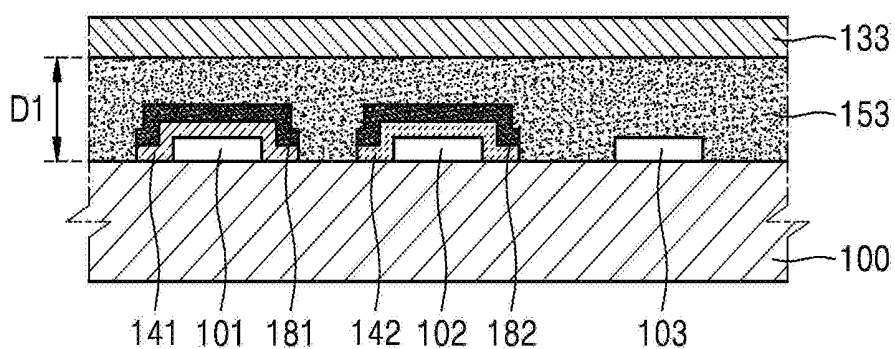


FIG. 8B

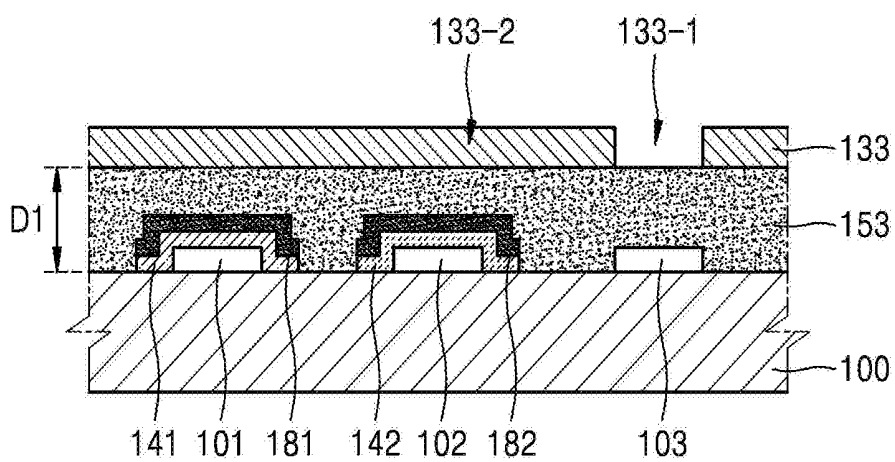


FIG. 8C

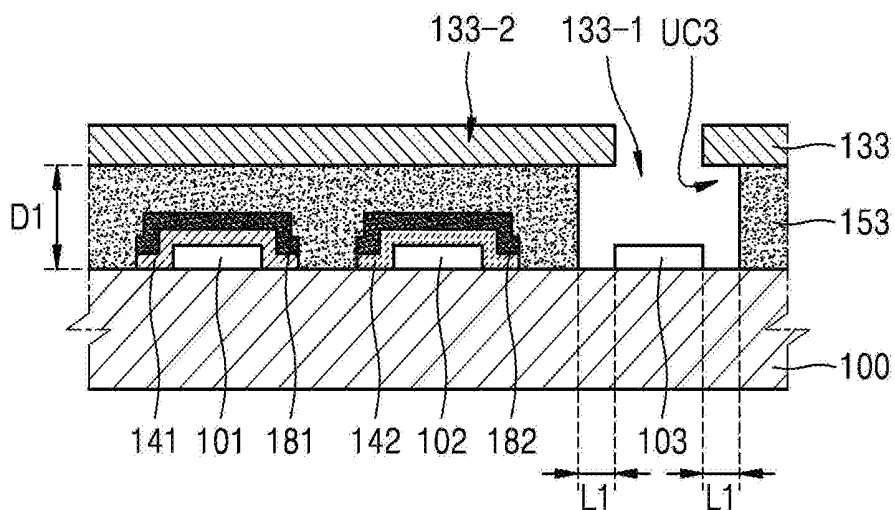


FIG. 8D

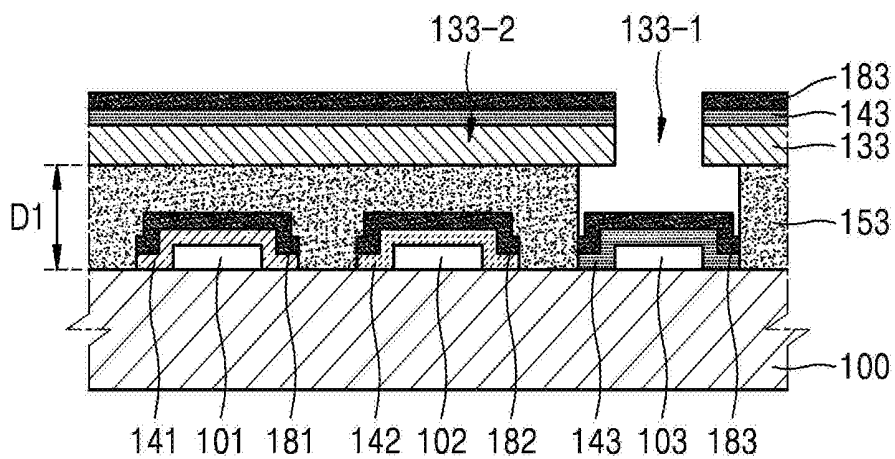


FIG. 8E


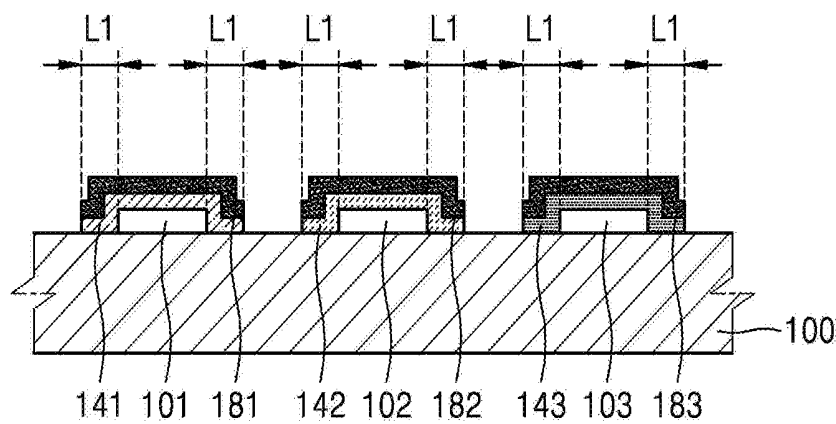


FIG. 9

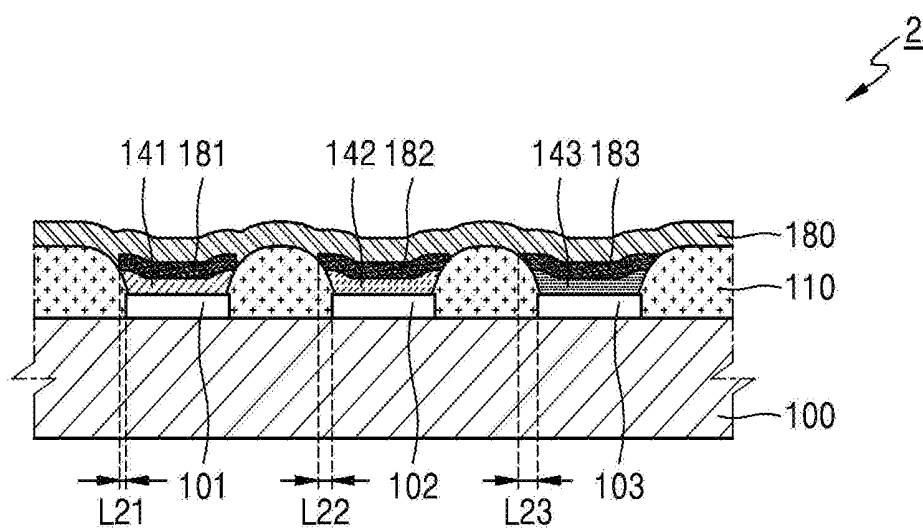

ORGANIC LIGHT-EMITTING DISPLAY APPARATUS AND METHOD OF MANUFACTURING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a Division of U.S. patent application Ser. No. 15/659,569, filed on Jul. 25, 2017, which claims priority from and the benefit of Korean Patent Application No. 10-2016-0103196, filed on Aug. 12, 2016, each of which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND

FIELD

[0002] Exemplary embodiments relate to an organic light-emitting display apparatus and a method of manufacturing the same.

DISCUSSION OF THE BACKGROUND

[0003] An organic light-emitting display apparatus includes a hole injection electrode, an electron injection electrode, and an organic emission layer between the hole injection electrode and the electron injection electrode, and is a self-emissive display apparatus, in which holes injected from the hole injection electrode and electrons injected from the electron injection electrode recombine in the organic emission layer and distinguish to emit light. The organic light-emitting display apparatus is regarded as a next generation display apparatus as a result of several desirable inherent characteristics, such as low power consumption, high brightness, and fast response speeds.

[0004] The above information disclosed in this Background section is only for enhancement of understanding of the background of the inventive concept, and, therefore, it may contain information that does not form the prior art that is already known in this country to a person of ordinary skill in the art.

SUMMARY

[0005] Exemplary embodiments provide an organic light-emitting display apparatus and a method of manufacturing the organic light-emitting display apparatus, capable of decreasing defects, simplifying manufacturing processes, and reducing cost.

[0006] Additional aspects will be set forth in the detailed description which follows, and, in part, will be apparent from the disclosure, or may be learned by practice of the inventive concept.

[0007] An exemplary embodiment discloses an organic light-emitting display apparatus including: a first electrode of a first group; a first organic functional layer covering the first electrode of the first group and including a first emission layer; a second electrode of the first group covering the first organic functional layer; a first electrode of a second group separate from the first electrode of the first group; a second organic functional layer separate from the first organic functional layer, covering the first electrode of the second group, having a larger area than the first organic functional layer, and including a second emission layer; a second electrode of the second group covering the second organic functional layer; and a common electrode integrally and

commonly disposed on the second electrode of the first group and the second electrode of the second group.

[0008] An exemplary embodiment also discloses a method of manufacturing an organic light-emitting display apparatus including: forming a first electrode of a first group and a first electrode of a second group on a substrate so as to be separate from each other; sequentially forming a lift-off layer and first photoresist on the first electrode of the first group and the first electrode of the second group; forming a first portion where the lift-off layer is removed, in a region corresponding to the first electrode of the first group, and a second portion where the lift-off layer remains; sequentially forming, in the first portion, a first organic functional layer including a first emission layer and a second electrode of the first group; heat-treating the lift-off layer so that the lift-off layer fills the first portion; removing the first photoresist, the first organic functional layer, and the second electrode of the first group that remain on the lift-off layer of the second portion; forming second photoresist on the lift-off layer; forming a third portion where the lift-off layer is removed, in a region corresponding to the first electrode of the second group, and a fourth portion where the lift-off layer remains; sequentially forming, in the third portion, a second organic functional layer comprising a second emission layer and a second electrode of the second group; heat-treating the lift-off layer so that the lift-off layer fills the third portion; and removing the second photoresist, the second organic functional layer, and the second electrode of the second group that remain on the lift-off layer of the fourth portion.

[0009] The foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The accompanying drawings, which are included to provide a further understanding of the inventive concept, and are incorporated in and constitute a part of this specification, illustrate exemplary embodiments of the inventive concept, and, together with the description, serve to explain principles of the inventive concept.

[0011] FIG. 1 is a schematic cross-sectional view of an organic light-emitting display apparatus according to an exemplary embodiment.

[0012] FIG. 2 is a schematic cross-sectional view of a plurality of anodes formed on a substrate of the organic light-emitting display apparatus according to an exemplary embodiment.

[0013] FIG. 3A, FIG. 3B, FIG. 3C, FIG. 3D, FIG. 3E, and FIG. 3F are schematic cross-sectional views of a first unit process of the organic light-emitting display apparatus according to an exemplary embodiment.

[0014] FIG. 4A, FIG. 4B, FIG. 4C, FIG. 4D, FIG. 4E, and FIG. 4F are schematic cross-sectional views of a second unit process of the organic light-emitting display apparatus according to an exemplary embodiment.

[0015] FIG. 5A, FIG. 5B, FIG. 5C, FIG. 5D, and FIG. 5E are schematic cross-sectional views of a third unit process of the organic light-emitting display apparatus according to an exemplary embodiment.

[0016] FIG. 6A, FIG. 6B, FIG. 6C, FIG. 6D, and FIG. 6E are schematic cross-sectional views of a first unit process of an organic light-emitting display apparatus according to a comparative example.

[0017] FIG. 7A, FIG. 7B, FIG. 7C, FIG. 7D, and FIG. 7E are schematic cross-sectional views of a second unit process of the organic light-emitting display apparatus according to a comparative example.

[0018] FIG. 8A, FIG. 8B, FIG. 8C, FIG. 8D, and FIG. 8E are schematic cross-sectional views of a third unit process of the organic light-emitting display apparatus according to a comparative example.

[0019] FIG. 9 is a schematic cross-sectional view of an organic light-emitting display apparatus according to another exemplary embodiment.

DETAILED DESCRIPTION OF THE ILLUSTRATED EXEMPLARY EMBODIMENTS

[0020] In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of various exemplary embodiments. It is apparent, however, that various exemplary embodiments may be practiced without these specific details or with one or more equivalent arrangements. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring various exemplary embodiments.

[0021] In the accompanying figures, the size and relative sizes of layers, films, panels, regions, etc., may be exaggerated for clarity and descriptive purposes. Also, like reference numerals denote like elements.

[0022] When an element or layer is referred to as being “on,” “connected to,” or is “coupled to” another element or layer, it may be directly on, connected to, or coupled to the other element or layer or intervening elements or layers may be present. When, however, an element or layer is referred to as being “directly on,” “directly connected to,” or “directly coupled to” another element or layer, there are no intervening elements or layers present. For the purposes of this disclosure, “at least one of X, Y, and Z” and “at least one selected from the group consisting of X, Y, and Z” may be construed as X only, Y only, Z only, or any combination of two or more of X, Y, and Z, such as, for instance, XYZ, XYY, YZ, and ZZ. Like numbers refer to like elements throughout. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

[0023] Although the terms first, second, etc. may be used herein to describe various elements, components, regions, layers, and/or sections, these elements, components, regions, layers, and/or sections should not be limited by these terms. These terms are used to distinguish one element, component, region, layer, and/or section from another element, component, region, layer, and/or section. Thus, a first element, component, region, layer, and/or section discussed below could be termed a second element, component, region, layer, and/or section without departing from the teachings of the present disclosure.

[0024] Spatially relative terms, such as “beneath,” “below,” “lower,” “above,” “upper,” and the like, may be used herein for descriptive purposes, and, thereby, to describe one element or feature’s relationship to another element(s) or feature(s) as illustrated in the drawings. Spatially relative terms are intended to encompass different orientations of an apparatus in use, operation, and/or manufacture in addition to the orientation depicted in the drawings. For example, if the apparatus in the drawings is turned over, elements described as “below” or “beneath” other

elements or features would then be oriented “above” the other elements or features. Thus, the exemplary term “below” can encompass both an orientation of above and below. Furthermore, the apparatus may be otherwise oriented (e.g., rotated 90 degrees or at other orientations), and, as such, the spatially relative descriptors used herein interpreted accordingly.

[0025] The terminology used herein is for the purpose of describing particular exemplary embodiments and is not intended to be limiting. As used herein, the singular forms, “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. Moreover, the terms “comprises,” “comprising,” “includes,” and/or “including,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, components, and/or groups thereof, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0026] Various exemplary embodiments are described herein with reference to sectional illustrations that are schematic illustrations of idealized exemplary embodiments and/or intermediate structures. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, exemplary embodiments disclosed herein should not be construed as limited to the particular illustrated shapes of regions, but are to include deviations in shapes that result from, for instance, manufacturing. The regions illustrated in the drawings are schematic in nature and their shapes are not intended to illustrate the actual shape of a region of a device and are not intended to be limiting.

[0027] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure is a part. Terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense, unless expressly so defined herein.

[0028] FIG. 1 is a schematic cross-sectional view of an organic light-emitting display apparatus 1 according to an exemplary embodiment.

[0029] Referring to FIG. 1, in the organic light-emitting display apparatus 1 according to the present exemplary embodiment, a plurality of anodes including a first anode 101, a second anode 102, and a third anode 103 are arranged to be separate from one another on a substrate 100. First to third organic functional layers 141, 142, and 143 including first to third emission layers are respectively arranged on the first to third anodes 101, 102, and 103, first to third auxiliary cathodes 181, 182, and 183 are respectively arranged on the first to third organic functional layers 141, 142, and 143, and an integral cathode 180 is disposed on the first to third auxiliary cathodes 181, 182, and 183 as a common electrode.

[0030] The first organic functional layer 141 covers an entire width of the first anode 101 and a region corresponding to a first distance L1, the second organic functional layer 142 covers an entire width of the second anode 102 and a region corresponding to a second distance L2, and the third organic functional layer 143 covers an entire width of the third anode 103 and a region corresponding to a third

distance L3. The second distance L2 is greater than the first distance L1, and the third distance L3 is greater than the second distance L2.

[0031] A method of manufacturing the organic light-emitting display apparatus 1 according to the present exemplary embodiment and the organic light-emitting display apparatus 1 manufactured by the manufacturing method will be described in detail with reference to FIGS. 2 to 5E.

[0032] FIG. 2 is a schematic cross-sectional view of the plurality of anodes, namely, first, second, and third anodes 101, 102, and 103, formed on the substrate 100 of the organic light-emitting display apparatus 1 according to an exemplary embodiment. FIGS. 3A to 3F are schematic cross-sectional views of a first unit process of the organic light-emitting display apparatus 1 according to an exemplary embodiment. FIGS. 4A to 4E are schematic cross-sectional views of a second unit process of the organic light-emitting display apparatus 1 according to an exemplary embodiment. FIGS. 5A to 5E are schematic cross-sectional views of a third unit process of the organic light-emitting display apparatus 1 according to an exemplary embodiment.

[0033] Referring to FIG. 2, a plurality of anodes, including the first anode 101, the second anode 102, and the third anode 103, are formed on the substrate 100.

[0034] The substrate 100 may include various materials. For example, the substrate 100 may include glass or plastic. The plastic may include a material having excellent heat-resistance and durability, such as polyimide, polyethylene naphthalate, polyethylene terephthalate, polyarylate, polycarbonate, polyetherimide, or polyethersulfone.

[0035] Although not illustrated in FIG. 2, a buffer layer (not shown) for forming a flat surface on the substrate 100 and preventing impurities from infiltrating into the substrate 100 may be further formed. For example, the buffer layer (not shown) may be a single layer or a plurality of layers including silicon nitride and/or silicon oxide.

[0036] The first to third anodes 101, 102, and 103 are hole injection electrodes and may include a material having a high work function. The first to third anodes 101, 102, and 103 may include a transparent conductive oxide. For example, the first to third anodes 101, 102, and 103 may each include at least one selected from the group including indium tin oxide, indium zinc oxide, zinc oxide, indium oxide, indium gallium oxide, and aluminum zinc oxide. Also, each of the first to third anodes 101, 102, and 103 may be a single layer or a plurality of layers including metal, such as silver (Ag), aluminum, magnesium, lithium, calcium, etc., and/or an alloy thereof.

[0037] Although not illustrated in FIG. 2, the first to third anodes 101, 102, and 103 may be electrically connected to first to third thin film transistors (not shown) respectively, such that the first to third thin film transistors (not shown) are arranged between the substrate 100 and the first to third anodes 101, 102, and 103.

[0038] Referring to FIG. 3A, a lift-off layer 121 including a fluoropolymer is formed on the substrate 100 on which the first to third anodes 101, 102, and 103 are formed, to have a first thickness D1. Then, first photoresist 131 is formed on the lift-off layer 121.

[0039] The fluoropolymer included in the lift-off layer 121 may include a polymer containing about 20 wt % to about 60 wt % of fluorine. For example, the fluoropolymer included in the lift-off layer 121 may include at least one of polytetrafluoroethylene, polychlorotrifluoroethylene, poly-

dichlorodifluoroethylene, a copolymer of chlorotrifluoroethylene and dichlorodifluoroethylene, a copolymer of tetrafluoroethylene and perfluoroalkylvinylether, a copolymer of chlorotrifluoroethylene and perfluoroalkylvinylether, a copolymer of tetrafluoroethylene and perfluoroalkylvinylether, and a copolymer of chlorotrifluoroethylene and perfluoroalkylvinylether.

[0040] The lift-off layer 121 may be formed on the substrate 100 by using an application method, a printing method, a deposition method, or the like. When the lift-off layer 121 is formed by an application method or a printing method, a process of forming photoresist may be performed after performing a hardening process and a polymerization process, if necessary.

[0041] The first thickness D1 of the lift-off layer 121 may be about 0.2 μm to about 5 μm . If the lift-off layer 121 is excessively thick, a time taken to melt the lift-off layer 121 for patterning increases, and accordingly, a manufacturing process time may increase. If the lift-off layer 121 is excessively thin, it becomes difficult to lift off the lift-off layer 121.

[0042] The lift-off layer 121 may further include a moisture absorbent. The moisture absorbent may include various materials. The moisture absorbent is a compound, such as calcium oxide, barium oxide, aluminum oxide, magnesium oxide, etc., in which metal-to-metal connection is made via oxygen, and may include a material that reacts with water to form metal hydroxide. The moisture absorbent may include one selected from the group including a metal halide, an inorganic acid salt of metal, an organic acid salt, a porous inorganic compound, and a combination thereof. The moisture absorbent may include an acryl-based organic material, a methacryl-based organic material, a polyisoprene-based organic material, a vinyl-based organic material, an epoxy-based organic material, a urethane-based organic material, a cellulose-based organic material, or the like. The moisture absorbent may include a titania-based inorganic material, a silicon oxide-based inorganic material, a zirconia-based inorganic material, an alumina-based inorganic material, or the like. The moisture absorbent may include a sealant made of epoxy silane, vinyl silane, aminosilane, or methacrylate silane. The moisture absorbent may capture moisture generated during the first unit process and prevent degradation of the first organic functional layer 141 formed during the first unit process.

[0043] The first photoresist 131 is formed on the lift-off layer 121. The first photoresist 131 may be exposed and developed by using a first photomask (not shown). The first photoresist 131 may be a positive-type photoresist or a negative-type photoresist. In the present exemplary embodiment, the positive-type photoresist will be described as an example.

[0044] Referring to FIG. 3B, the first photoresist 131 has a patterned shape. A first portion 131-1 of the first photoresist 131, which is a location corresponding to the first anode 101, is removed by exposure and development, and a second portion 131-2 of the first photoresist 131, which is a region outside the first portion 131-1, remains.

[0045] Referring to FIG. 3C, the lift-off layer 121 is etched by using a pattern of the first photoresist 131 of FIG. 3B as an etching mask.

[0046] Because the lift-off layer 121 includes a fluoropolymer, a solvent capable of etching the fluoropolymer is used as an etchant.

[0047] A first solvent (not shown) including fluorine may be used as the etchant. The first solvent may include hydrofluoroether. The hydrofluoroether has low reactivity with another material and thus, is electrochemically stable. The hydrofluoroether has a low global warming factor and low toxicity and thus, is environmentally stable.

[0048] By the etching process, a portion of the lift-off layer 121, which is formed in a location corresponding to the first portion 131-1, that is, on the first anode 101, is etched. As a first undercut profile UC1 is formed under a boundary surface of the first portion 131-1 of the first photoresist 131, the lift-off layer 121 is etched so as to be spaced apart from a side surface of the first anode 101 by a predetermined first distance L1.

[0049] Referring to FIG. 3D, the first organic functional layer 141 and the first auxiliary cathode 181 are sequentially formed on a structure of FIG. 3C.

[0050] The first organic functional layer 141 includes a first organic emission layer. The first organic functional layer 141 may further include at least one functional layer from among a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.

[0051] The first organic functional layer 141 may be formed by vacuum deposition. In the deposition process, the lift-off layer 121 and the first photoresist 131 serve as a deposition mask. One portion of the first organic functional layer 141 is formed in a location corresponding to the first portion 131-1, that is, on the first anode 101, and the other portion of the first organic functional layer 141 is formed on the second portion 131-2 of the first photoresist 131.

[0052] Similarly, the first auxiliary cathode 181 may be formed by vacuum deposition. In the deposition process, the lift-off layer 121 and the first photoresist 131 serve as a deposition mask. One portion of the first auxiliary cathode 181 is formed so as to cover an upper surface of the first organic functional layer 141. In addition, over the second portion 131-2, which is the rest of the first photoresist 131 minus the first portion 131-1, the other portion of the first auxiliary cathode 181 is formed on the first organic functional layer 141.

[0053] The first auxiliary cathode 181 may include the same material as that of the cathode 180 as a common electrode which will be described later. In addition, the first auxiliary cathode 181 may include a material different from that of the cathode 180. The first auxiliary cathode 181 may serve as a barrier protecting the first organic functional layer 141 from a solvent used in a lift-off process which will be described later.

[0054] Referring to FIG. 3E, a predetermined heat treatment process is performed on a structure of FIG. 3D.

[0055] The lift-off layer 121 including a fluoropolymer has a small surface energy and accordingly, has low reactivity with a different type of material. Due to these properties, when the lift-off layer 121 is heat-treated at a low temperature, the lift-off layer 121 reflows and thus, fills a region of the lift-off layer 121 corresponding to the removed first portion 131-1 and becomes even. Here, the entire thickness of the lift-off layer 121 decreases from the first thickness D1 to a second thickness D2.

[0056] The heat treatment process may be performed at a temperature equal to or greater than 60° C. and less than or equal to 90° C. If the temperature is below 60° C., it is hard for the reflow phenomenon to occur, and if the temperature is above 90° C., a first organic function layer may degrade.

[0057] Referring to FIG. 3F, the second portion 131-2 (refer to FIG. 3E) of the first photoresist 131 remaining in a structure of FIG. 3E is removed. The first organic functional layer 141 and the first auxiliary cathode 181 that remain on the first photoresist 131 are removed as well as the first photoresist 131. As a result, the first organic functional layer 141 and the first auxiliary cathode 181 remain on the first anode 101 as a pattern, and the substrate 100 is evenly covered by the lift-off layer 121.

[0058] After the first unit process is performed, the second unit process for forming, in a region where the second anode 102 is located, the second organic functional layer 142 (refer to FIG. 4D) emitting a color different from that of the first organic functional layer 141 is performed. Hereinafter, the second unit process will be described with reference to FIGS. 4A to 4F.

[0059] Referring to FIG. 4A, second photoresist 132 is formed on the lift-off layer 121 having the second thickness D2.

[0060] The second photoresist 132 may be exposed and developed by using a second photomask (not shown). The second photoresist 132 may be a positive-type photoresist or a negative-type photoresist. In the present exemplary embodiment, the positive-type photoresist will be described as an example.

[0061] Referring to FIG. 4B, the second photoresist 132 has a patterned shape. A first portion 132-1 of the second photoresist 132, which is a location corresponding to the second anode 102, is removed by exposure and development, and a second portion 132-2 of the second photoresist 132, which is a region outside the first portion 132-1, remains.

[0062] Referring to FIG. 4C, the lift-off layer 121 is etched by using a pattern of the second photoresist 132 of FIG. 4B as an etching mask.

[0063] Because the lift-off layer 121 includes a fluoropolymer, a solvent capable of etching the fluoropolymer is used as an etchant.

[0064] A first solvent (not shown) including fluorine may be used as the etchant. As in the first unit process, the first solvent may include hydrofluoroether. In some exemplary embodiments, a material different from that used in the first unit process may be used as the first solvent.

[0065] By the etching process, a portion of the lift-off layer 121, which is formed in a location corresponding to the first portion 132-1, that is, on the second anode 102, is etched. As a second undercut profile UC2 is formed under a boundary surface of the first portion 132-1 of the second photoresist 132, the lift-off layer 121 is etched so as to be spaced apart from a side surface of the second anode 102 by a predetermined second distance L2. When the etching process is performed during the same time period as the first unit process by using the same solvent as that used in the first unit process, the second undercut profile UC2 extends further, and thus, the second distance L2 is greater than the first distance L1 of the first unit process.

[0066] Referring to FIG. 4D, the second organic functional layer 142 and the second auxiliary cathode 182 are sequentially formed on a structure of FIG. 4C.

[0067] The second organic functional layer 142 includes a second organic emission layer. The second organic functional layer 142 may further include at least one functional

layer from among a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.

[0068] The second organic functional layer **142** may be formed by vacuum deposition. In the deposition process, the lift-off layer **121** and the second photoresist **132** serve as a deposition mask. One portion of the second organic functional layer **142** is formed in a location corresponding to the first portion **132-1**, that is, on the second anode **102**, and the other portion of the second organic functional layer **142** is formed on the second portion **132-2** of the second photoresist **132**.

[0069] Similarly, the second auxiliary cathode **182** may be formed by vacuum deposition. In the deposition process, the lift-off layer **121** and the second photoresist **132** serve as a deposition mask. One portion of the second auxiliary cathode **182** is formed so as to cover an upper surface of the second organic functional layer **142**. In addition, over the second portion **132-2**, which is the rest of the second photoresist **132** minus the first portion **132-1**, the other portion of the second auxiliary cathode **182** is formed on the second organic functional layer **142**.

[0070] The second auxiliary cathode **182** may include a material that is the same as, or different from, that of the first auxiliary cathode **181**. The second auxiliary cathode **182** may include the same material as that of the cathode **180** as a common electrode, which will be described later. In addition, the second auxiliary cathode **182** may include a material different from that of the cathode **180**. The second auxiliary cathode **182** may serve as a barrier protecting the second organic functional layer **142** from a solvent used in a lift-off process which will be described later.

[0071] Referring to FIG. 4E, a predetermined heat treatment process is performed on a structure of FIG. 4D.

[0072] The heat treatment process may be performed at a temperature equal to or greater than 60° C. and less than or equal to 90° C. The heat treatment process may be performed at a temperature that is the same as, or different from, that in the first unit process. A heat treatment time period may be the same as or different from that of the first unit process. Due to the heat treatment process, the lift-off layer **121** reflows and thus, fills a region of the lift-off layer **121** corresponding to the removed first portion **132-1**, and becomes even. Here, the entire thickness of the lift-off layer **121** decreases from the second thickness D2 to a third thickness D3.

[0073] Referring to FIG. 4F, the second portion **132-2** (refer to FIG. 4E) of the second photoresist **132** remaining in a structure of FIG. 4E is removed. The second organic functional layer **142** and the second auxiliary cathode **182** that remain on the second photoresist **132** are removed, as well as the second photoresist **132**. As a result, the first organic functional layer **141** and the first auxiliary cathode **181** on the first anode **101** and the second organic functional layer **142** and the second auxiliary cathode **182** on the second anode **102** remain as patterns, and the substrate **100** is evenly covered by the lift-off layer **121**.

[0074] After the second unit process is performed, the third unit process for forming, in a region where the third anode **103** is located, the third organic functional layer **143** (refer to FIG. 5D) emitting color different from those of the first organic functional layer **141** and the second organic functional layer **142** is performed. Hereinafter, the third unit process will be described with reference to FIGS. 5A to 5E.

[0075] Referring to FIG. 5A, third photoresist **133** is formed on the lift-off layer **121** having the third thickness D3.

[0076] The third photoresist **133** may be exposed and developed by using a third photomask (not shown). The third photoresist **133** may be a positive-type photoresist or a negative-type photoresist. In the present exemplary embodiment, the positive-type photoresist will be described as an example.

[0077] Referring to FIG. 5B, the third photoresist **133** has a patterned shape. A first portion **133-1** of the third photoresist **133**, which is a location corresponding to the third anode **103**, is removed by exposure and development, and a second portion **133-2** of the third photoresist **133**, which is a region outside the first portion **133-1**, remains.

[0078] Referring to FIG. 5C, the lift-off layer **121** is etched by using a pattern of the third photoresist **133** of FIG. 5B as an etching mask.

[0079] Because the lift-off layer **121** includes a fluoropolymer, a solvent capable of etching the fluoropolymer is used as an etchant.

[0080] A first solvent (not shown) including fluorine may be used as the etchant. As in the first and second unit processes, the first solvent may include hydrofluoroether. In some exemplary embodiments, a material different from that used in the first and second unit processes may be used as the first solvent.

[0081] By the etching process, a portion of the lift-off layer **121**, which is formed in a location corresponding to the first portion **133-1**, that is, on the third anode **103**, is etched. As a third undercut profile UC3 is formed under a boundary surface of the first portion **133-1** of the third photoresist **133**, the lift-off layer **121** is etched so as to be spaced apart from a side surface of the third anode **103** by a predetermined third distance L3. When the etching process is performed during the same time period as the second unit process by using the same solvent as that used in the second unit process, the third undercut profile UC3 extends further, and thus, the third distance L3 is greater than the second distance L2 of the second unit process.

[0082] Referring to FIG. 5D, the third organic functional layer **143** and the third auxiliary cathode **183** are sequentially formed on a structure of FIG. 5C.

[0083] The third organic functional layer **143** includes a third organic emission layer. The third organic functional layer **143** may further include at least one functional layer from among a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.

[0084] The third organic functional layer **143** may be formed by vacuum deposition. In the deposition process, the lift-off layer **121** and the third photoresist **133** serve as a deposition mask. One portion of the third organic functional layer **143** is formed in a location corresponding to the first portion **133-1**, that is, on the third anode **103**, and the other portion of the third organic functional layer **143** is formed on the second portion **133-2** of the third photoresist **133**.

[0085] Similarly, the third auxiliary cathode **183** may be formed by vacuum deposition. In the deposition process, the lift-off layer **121** and the third photoresist **133** serve as a deposition mask. One portion of the third auxiliary cathode **183** is formed so as to cover an upper surface of the third organic functional layer **143** which is in a location corresponding to the first portion **133-1**. In addition, over the second portion **133-2**, which is the rest of the third photo-

resist **133** minus the first portion **133-1**, the other portion of the third auxiliary cathode **183** is formed on the third organic functional layer **143**.

[0086] The third auxiliary cathode **183** may include a material that is the same as, or different from, that of the first auxiliary cathode **181** and the second auxiliary cathode **182**. The third auxiliary cathode **183** may include the same material as that of the cathode **180** as a common electrode, which will be described later. In addition, the third auxiliary cathode **183** may include a material different from that of the cathode **180**. The third auxiliary cathode **183** may serve as a barrier protecting the third organic functional layer **143** from a solvent used in a lift-off process, which will be described later.

[0087] Referring to FIG. 5E, the lift-off process is performed on a structure of FIG. 5D.

[0088] Because the lift-off layer **121** includes a fluoropolymer, a second solvent including fluorine is used in the lift-off process. The lift-off process is performed after the third organic functional layer **143** is formed, and accordingly, a material having low reactivity with the third organic functional layer **143** may be used as the second solvent. Similar to the first solvent, the second solvent may also include hydrofluoroether.

[0089] By lift-offting the lift-off layer **121** formed under the second portion **133-2** of the third photoresist **133**, as a result, the first organic functional layer **141** and the first auxiliary cathode **181** on the first anode **101**, the second organic functional layer **142** and the second auxiliary cathode **182** on the second anode **102**, and the third organic functional layer **143** and the third auxiliary cathode **183** on the third anode **103** remain as patterns. Here, since the second distance **L2** is greater than the first distance **L1**, and the third distance **L3** is greater than the second distance **L2**, an area of the second organic functional layer **142** is greater than that of the first organic functional layer **141**, and an area of the third organic functional layer **143** is greater than that of the second organic functional layer **142**.

[0090] The first to third organic functional layers **141**, **142**, and **143** may emit light having different colors from one another. The colors of the light emitted from the first to third organic functional layers **141**, **142**, and **143** may be mixed to form white light. For example, the first to third organic functional layers **141**, **142**, and **143** may emit red light, green light, and blue light. For example, the first to third organic functional layers **141**, **142**, and **143** may be configurations of sub-pixels constituting a unit pixel of the organic light-emitting display apparatus **1**.

[0091] The organic light-emitting display apparatus **1** of FIG. 1 may show one unit pixel. Also, the present exemplary embodiment may be applied to an organic light-emitting display apparatus including the unit pixel of FIG. 1 in a plurality of numbers. That is, a plurality of first organic functional layers **141** emitting first light may be simultaneously formed as a first group by the first unit process, a plurality of second organic functional layers **142** emitting second light may be simultaneously formed as a second group by the second unit process, and a plurality of third organic functional layers **143** emitting third light may be simultaneously formed as a third group by the third unit process. Through the first to third unit processes, full color may be implemented.

[0092] Referring to FIG. 1 again, the cathode **180** is formed on a structure of FIG. 5E. The cathode **180** may be

integrally formed as a common electrode on the first to third auxiliary cathodes **181**, **182**, and **183**.

[0093] In the present exemplary embodiment, the first to third anodes **101**, **102**, and **103** are hole injection electrodes, and the first to third auxiliary cathodes **181**, **182**, and **183** and the cathode **180** are electron injection electrodes. However, this is merely an example, and an electron injection electrode may be formed in a region where the first to third anodes **101**, **102**, and **103** are located, and a hole injection electrode may be formed in a region where the first to third auxiliary cathodes **181**, **182**, and **183** and the cathode **180** are located.

[0094] In a process of depositing an organic functional layer by using a metal mask including an opening, the metal mask makes precise processing difficult due to its thickness and alignment tolerance and thus is difficult to use in an ultra high-resolution panel, and it is difficult to make the metal mask large because of sagging due to the weight of metal. On the other hand, according to the present exemplary embodiment, a process of forming first to third organic functional layers **141**, **142**, and **143** patterns is performed through the reflow process and the lift-off process instead of deposition using the metal mask, and accordingly, problems caused by using the metal mask may be solved.

[0095] In the present exemplary embodiment, by allowing, via a heat treatment process, the remaining lift-off layer **121** to reflow in FIG. 3E of the first unit process and FIG. 4E of the second unit process instead of removing the remaining lift-off layer **121** by using lift-off processes, and performing only the one lift-off process in FIG. 5E of the third unit process, the cost of coating the high-priced fluoropolymer resin used in the lift-off layer **121** may be decreased, and thus, cost may be reduced. Hereinafter, the present exemplary embodiment will be described in comparison with a method of manufacturing an organic light-emitting display apparatus according to a comparative example of FIGS. 6A to 8E.

[0096] FIGS. 6A to 6E are schematic cross-sectional views of a first unit process of an organic light-emitting display apparatus according to a comparative example. FIGS. 7A to 7E are schematic cross-sectional views of a second unit process of the organic light-emitting display apparatus according to a comparative example. FIGS. 8A to 8E are schematic cross-sectional views of a third unit process of the organic light-emitting display apparatus according to a comparative example.

[0097] Referring to FIG. 6A, a first lift-off layer **151** including a fluoropolymer is formed on the substrate **100** on which the first to third anodes **101**, **102**, and **103** are formed, to have the first thickness **D1**. Then, the first photoresist **131** is formed on the first lift-off layer **151**. In the present comparative example, the first lift-off layer **151** is formed of the same material and the same thickness as those of the lift-off layer **121** of the previous first exemplary embodiment.

[0098] Referring to FIG. 6B, the first photoresist **131** has a patterned shape. The first portion **131-1** of the first photoresist **131**, which is a location corresponding to the first anode **101**, is removed by exposure and development, and the second portion **131-2** of the first photoresist **131**, which is a region outside the first portion **131-1**, remains.

[0099] Referring to FIG. 6C, with a pattern of the first photoresist **131** of FIG. 6B as an etching mask, the first lift-off layer **151** is etched by using a first solvent (not

shown) including fluorine. By the same etching process as the first unit process of the first exemplary embodiment, a portion of the first lift-off layer **151**, which is formed in a location corresponding to the first portion **131-1**, that is, on the first anode **101**, is etched. As the first undercut profile UC1 is formed under a boundary surface of the first portion **131-1** of the first photoresist **131**, the first lift-off layer **151** is etched so as to be spaced apart from a side surface of the first anode **101** by the predetermined first distance L1.

[0100] Referring to FIG. 6D, the first organic functional layer **141** and the first auxiliary cathode **181** are sequentially formed on a structure of FIG. 6C.

[0101] Referring to FIG. 6E, a first lift-off process is performed to entirely remove the remaining first lift-off layer **151**, and as a result, the first organic functional layer **141** and the first auxiliary cathode **181** on the first anode **101** remain as a pattern.

[0102] In the first unit process of the previous first exemplary embodiment, the lift-off layer **121** is not removed by the lift-off process but is allowed, via a heat treatment process, to reflow, and thus, the lift-off layer **121** is reused in the second unit process, whereas in the comparative example, the first lift-off layer **151** is entirely removed.

[0103] Referring to FIG. 7A, a second lift-off layer **152** with a first thickness D1, including a fluoropolymer, is again formed on the substrate **100**, and then, the second photoresist **132** is formed on the second lift-off layer **152**.

[0104] Referring to FIG. 7B, the second photoresist **132** is patterned by exposure and development so that the first portion **132-1** of the second photoresist **132**, which is a location corresponding to the second anode **102**, may be removed, and the second portion **132-2** of the second photoresist **132**, which is a region outside the first portion **132-1**, may remain.

[0105] Referring to FIG. 7C, utilizing a pattern of the second photoresist **132** of FIG. 7B as an etching mask, the second lift-off layer **152** is etched by using the first solvent (not shown) including fluorine. By the same etching process as the first unit process of the first exemplary embodiment, a portion of the second lift-off layer **152**, which is formed in a location corresponding to the first portion **132-1**, that is, on the second anode **102**, is etched. As the second undercut profile UC2 is formed under a boundary surface of the first portion **132-1** of the second photoresist **132**, the second lift-off layer **152** is etched so as to be spaced apart from a side surface of the second anode **102** by the predetermined first distance L1.

[0106] Referring to FIG. 7D, the second organic functional layer **142** and the second auxiliary cathode **182** are sequentially formed on a structure of FIG. 7C.

[0107] Referring to FIG. 7E, a second lift-off process is performed to entirely remove the remaining second lift-off layer **152**, and as a result, the first organic functional layer **141** and the first auxiliary cathode **181** on the first anode **101** and the second organic functional layer **142** and the second auxiliary cathode **182** on the second anode **102** remain as patterns.

[0108] In the first unit process and the second unit process of the previous first exemplary embodiment, the lift-off layer **121** is not removed by the lift-off process but is allowed, via a heat treatment process, to reflow, and thus, the lift-off layer **121** is reused in the second unit process and the third unit

process, whereas in the comparative example, the first lift-off layer **151** and the second lift-off layer **152** are entirely removed.

[0109] Referring to FIG. 8A, a third lift-off layer **153** with the first thickness D1, including a fluoropolymer, is formed on the substrate **100** again, and then, the third photoresist **133** is formed on the third lift-off layer **153**.

[0110] Referring to FIG. 8B, the third photoresist **133** is patterned by exposure and development so that the first portion **133-1** of the third photoresist **133**, which is a location corresponding to the third anode **103**, may be removed, and the second portion **133-2** of the third photoresist **133**, which is a region outside the first portion **133-1**, may remain.

[0111] Referring to FIG. 8C, with a pattern of the third photoresist **133** of FIG. 8B as an etching mask, the third lift-off layer **153** is etched by using the first solvent (not shown) including fluorine. By the same etching process as the first unit process of the first exemplary embodiment, a portion of the third lift-off layer **153**, which is formed in a location corresponding to the first portion **133-1**, that is, on the third anode **103**, is etched. As the third undercut profile UC3 is formed under a boundary surface of the first portion **133-1** of the third photoresist **133**, the third lift-off layer **153** is etched so as to be spaced apart from a side surface of the third anode **103** by the predetermined first distance L1.

[0112] Referring to FIG. 8D, the third organic functional layer **143** and the third auxiliary cathode **183** are sequentially formed on a structure of FIG. 8C.

[0113] Referring to FIG. 8E, a third lift-off process is performed to entirely remove the remaining third lift-off layer **153**, and as a result, the first organic functional layer **141** and the first auxiliary cathode **181** on the first anode **101**, the second organic functional layer **142** and the second auxiliary cathode **182** on the second anode **102**, and the third organic functional layer **143** and the third auxiliary cathode **183** on the third anode **103** remain as patterns. Here, since the first distance L1 formed during the first to third unit processes is identical, areas of the first to third organic functional layers **141**, **142**, and **143** are the same as one another.

[0114] In the previous first exemplary embodiment, two heat treatment processes and one lift-off process are performed, whereas, in the comparative example, three lift-off processes are performed. That is, according to the comparative example, a lift-off process is performed during every unit process, and thus, a lift-off layer including fluorine-based resin which is a high-priced material is used a lot. However, in the present exemplary embodiment, the lift-off process is performed only during the final unit process, and thus, material loss of the lift-off layer is small. Accordingly, cost may be reduced.

[0115] FIG. 9 is a schematic cross-sectional view of an organic light-emitting display apparatus **2** according to another exemplary embodiment.

[0116] The organic light-emitting display apparatus **2** of FIG. 9 further includes a pixel-defining layer **110**, compared to the above-described organic light-emitting display apparatus **1**.

[0117] Referring to FIG. 9, on the substrate **100**, a plurality of anodes including the first to third anodes **101**, **102**, and **103** are formed, and the pixel-defining layer **110** surrounding edges of the first to third anodes **101**, **102**, and **103** are formed. The first to third organic functional layers **141**, **142**,

and **143** including first to third emission layers are respectively arranged on the first to third anodes **101**, **102**, and **103**, the first to third auxiliary cathodes **181**, **182**, and **183** are respectively arranged on the first to third organic functional layers **141**, **142**, and **143**, and the integral cathode **180** is disposed on the first to third auxiliary cathodes **181**, **182**, and **183** and the pixel-defining layer **110** as a common electrode.

[0118] The first to third anodes **101**, **102**, and **103** have sharp ends, and accordingly, when current is applied after the cathode **180** is formed, an electric field may be focused to the ends, and thus, a short circuit may occur during driving. However, in the present exemplary embodiment, by covering ends of the first to third anodes **101**, **102**, and **103** with the pixel-defining layer **110**, the phenomenon in which an electric field is focused to the ends may be prevented.

[0119] The pixel-defining layer **110** may include an organic insulation layer including, for example, a general-purpose polymer (poly(methyl methacrylate) (PMMA), polystyrene (PS)), a polymer derivative having a phenol group, an acryl-based polymer, an imide-based polymer, an aryl ether-based polymer, an amide-based polymer, a fluorine-based polymer, a p-xylene based polymer, a vinyl alcohol-based polymer, and a blend thereof.

[0120] The pixel-defining layer **110** is obtained by forming a plurality of anodes including the first anode **101**, the second anode **102**, and the third anode **103** on the substrate **100** and forming a pixel-defining layer surrounding edges of the plurality of anodes in the process of FIG. 2 of the previous first exemplary embodiment and then performing the same as in the first unit process of FIGS. 3A to 3F, the second unit process of FIGS. 4A to 4E, and the third unit process of FIGS. 5A to 5E. Accordingly, since a second distance L22 is greater than a first distance L21, and a third distance L23 is greater than the second distance L22, an area of the second organic functional layer **182** is greater than that of the first organic functional layer **181**, and an area of the third organic functional layer **183** is greater than that of the second organic functional layer **182**.

[0121] Although not illustrated in the above drawings, the above-described organic light-emitting display apparatuses may further include an encapsulation member. The encapsulation member may be a glass substrate, metal foil, a thin film encapsulation layer including an inorganic layer and an organic layer mixed with each other, etc.

[0122] According to one or more exemplary embodiments, a high-resolution display panel may be formed because an emission layer is formed without using a fine metal mask (FMM).

[0123] Also, according to one or more exemplary embodiments, processes may be simplified by decreasing the number of times a lift-off process being performed.

[0124] In addition, according to one or more exemplary embodiments, cost may be reduced by decreasing an amount of fluorine-based resin used in a lift-off layer.

[0125] It should be understood that exemplary embodiments described herein should be considered in a descriptive sense only and not for purposes of limitation. Descriptions of features or aspects within each exemplary embodiment should typically be considered as available for other similar features or aspects in other exemplary embodiments.

[0126] Although certain exemplary embodiments and implementations have been described herein, other exemplary embodiments and modifications will be apparent from this description. Accordingly, the inventive concept is not

limited to such exemplary embodiments, but rather to the broader scope of the presented claims and various obvious modifications and equivalent arrangements.

What is claimed is:

1. A method of manufacturing an organic light-emitting display apparatus, the method comprising:

forming a first electrode of a first group and a first electrode of a second group on a substrate so as to be separate from each other;

forming a lift-off layer and first photoresist on the first electrode of the first group and the first electrode of the second group;

forming a first portion where the lift-off layer is removed, in a region corresponding to the first electrode of the first group, and a second portion where the lift-off layer remains;

forming, in the first portion, a first organic functional layer comprising a first emission layer and a second electrode of the first group;

heat-treating the lift-off layer so that the lift-off layer fills the first portion;

removing the first photoresist, the first organic functional layer, and the second electrode of the first group that remain on the lift-off layer of the second portion;

forming second photoresist on the lift-off layer;

forming a third portion where the lift-off layer is removed, in a region corresponding to the first electrode of the second group, and a fourth portion where the lift-off layer remains;

forming, in the third portion, a second organic functional layer comprising a second emission layer and a second electrode of the second group;

heat-treating the lift-off layer so that the lift-off layer fills the third portion; and

removing the second photoresist, the second organic functional layer, and the second electrode of the second group that remain on the lift-off layer of the fourth portion.

2. The method of claim 1, wherein the lift-off layer comprises a fluoropolymer.

3. The method of claim 1, wherein the lift-off layer is heat-treated at a temperature equal to or greater than 60° C. and less than or equal to 90° C.

4. The method of claim 1, wherein the first organic functional layer and the second electrode of the first group are formed by a deposition process.

5. The method of claim 1, wherein the second organic functional layer and the second electrode of the second group are formed by a deposition process.

6. The method of claim 1, wherein:

the lift-off layer under the first photoresist forms a first undercut profile in the first portion; and

the lift-off layer under the second photoresist forms a second undercut profile in the second portion,

wherein a distance between an end of the first electrode of the second group and the second undercut profile is greater than a distance between an end of the first electrode of the first group and the first undercut profile.

7. The method of claim 1, wherein an insulation layer is further formed between the first electrode of the first group and the first electrode of the second group.

8. The method of claim 1, further comprising:

completely removing the remaining lift-off layer simultaneously with removing the second photoresist, the

second organic functional layer, and the second electrode of the second group that remain on the lift-off layer of the fourth portion; and
forming a common electrode to be integrally and commonly disposed on the second electrode of the first group and the second electrode of the second group.

9. The method of claim 8, wherein the lift-off layer is removed by a solvent comprising fluorine.

10. The method of claim 1, further comprising:
forming a first electrode of a third group on the substrate;
and
after the removing of the second photoresist, the second organic functional layer, and the second electrode of the second group that remain on the lift-off layer of the fourth portion, s forming third photoresist on the lift-off layer;
forming a fifth portion where the lift-off layer is removed, in a region corresponding to the first electrode of the third group, and a sixth portion where the lift-off layer remains;
sequentially forming, in the fifth portion, a third organic functional layer comprising a third emission layer and a second electrode of the third group; and
completely removing the remaining lift-off layer simultaneously with removing the third photoresist, the third organic functional layer, and the second electrode of the third group that remain on the lift-off layer of the sixth portion, and further forming a common electrode located integral commonly on the second electrode of the first group, the second electrode of the second group, and the second electrode of the third group.

* * * * *

专利名称(译)	有机发光显示装置及其制造方法		
公开(公告)号	US20200099006A1	公开(公告)日	2020-03-26
申请号	US16/693382	申请日	2019-11-25
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE DUCKJUNG KIM ARONG PARK JUNGSUN BANG HYUNSUNG CHOUNG JIYOUNG		
发明人	LEE, DUCKJUNG KIM, ARONG PARK, JUNGSUN BANG, HYUNSUNG CHOUNG, JIYOUNG		
IPC分类号	H01L51/50 H01L51/00 H01L51/56		
CPC分类号	H01L27/3218 H01L51/0096 H01L51/5064 H01L51/5092 H01L27/3211 H01L51/0018 H01L51/5209 H01L51/5231 H01L51/56 H01L51/5206		
优先权	1020160103196 2016-08-12 KR		
外部链接	Espacenet USPTO		

摘要(译)

一种有机发光显示设备，包括：第一组的第一电极；以及第二电极。第一有机功能层，其覆盖第一组的第一电极并包括第一发射层；所述第一组的第二电极覆盖所述第一有机功能层；第二组的第一电极与第一组的第一电极分开；与第一有机功能层分离的第二有机功能层，覆盖第二组的第一电极，具有比第一有机功能层更大的面积，并且包括第二发射层；所述第二组的第二电极覆盖所述第二有机功能层；共用电极一体设置在第一组的第二电极和第二组的第二电极上。

