



US008878171B2

(12) **United States Patent**
Heo et al.

(10) **Patent No.:** **US 8,878,171 B2**
(45) **Date of Patent:** **Nov. 4, 2014**

(54) **ORGANIC LIGHT EMITTING DISPLAY
DEVICE**

(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)

(72) Inventors: **Jeong-Haeng Heo**, Gyeonggi-do (KR);
Jae-Man Lee, Seoul (KR); **Gwi-Jeong
Cho**, Daegu (KR); **So-Yeon Ahn**, Seoul
(KR)

(73) Assignee: **LG Display Co., Ltd.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/036,163**

(22) Filed: **Sep. 25, 2013**

(65) **Prior Publication Data**

US 2014/0091289 A1 Apr. 3, 2014

(30) **Foreign Application Priority Data**

Sep. 28, 2012 (KR) 10-2012-0109027

(51) **Int. Cl.**
H01L 51/50 (2006.01)

(52) **U.S. Cl.**
CPC **H01L 51/5064** (2013.01); **H01L 51/5072**
(2013.01)

USPC **257/40**; **257/E51.022**

(58) **Field of Classification Search**
USPC **257/E51.019**, **E51.022**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,994,498	B2 *	8/2011	Pieh et al.	257/40
8,294,143	B2 *	10/2012	Imai et al.	257/40
2009/0315024	A1	12/2009	Song et al.	
2010/0133522	A1	6/2010	Pieh et al.	
2013/0092909	A1	4/2013	Han et al.	

OTHER PUBLICATIONS

Combined Search and Examination Report dated Feb. 21, 2014 from
the Intellectual Property Report from the United Kingdom Intellec-
tual Property Office in counterpart application No. GB 1316848.9.

* cited by examiner

Primary Examiner — Chandra Chaudhari

(74) *Attorney, Agent, or Firm* — Morgan, Lewis & Bockius
LLP

(57) **ABSTRACT**

An organic light emitting display device includes first and second electrodes facing each other on a substrate, a first stack including a first hole transport layer, a second hole transport layer, a first emitting layer, and a first electron transport layer, the layers being sequentially stacked on the first electrode, a second stack including a third hole transport layer, a fourth hole transport layer, a second emitting layer including at least two hosts and a single dopant and having at least three emitting areas, and a second electron transport layer, the layers being sequentially stacked between the first stack and the second electrode, wherein the second emitting layer includes a first emitting area including a material of the fourth hole transport layer, a second emitting area including a material of the second electron transport layer, and a third emitting area including the at least two hosts.

15 Claims, 11 Drawing Sheets

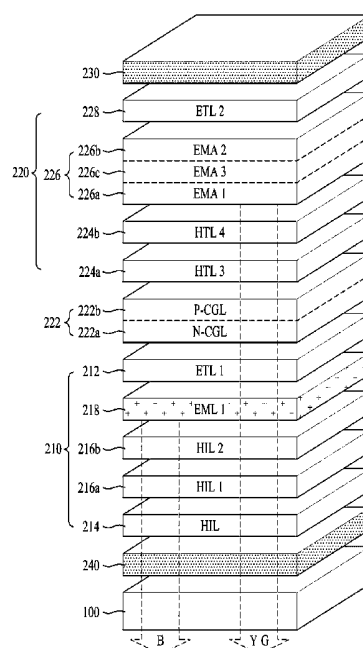


FIG.1A

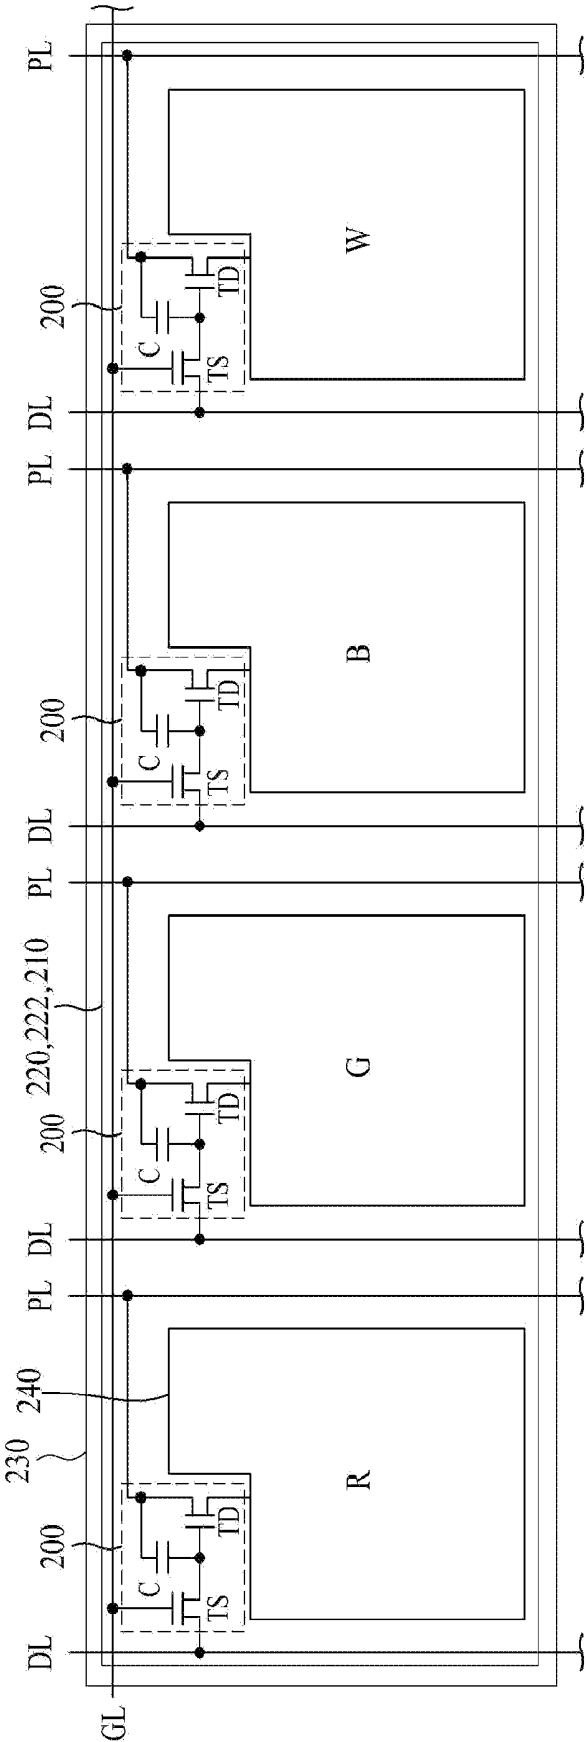


FIG. 1B

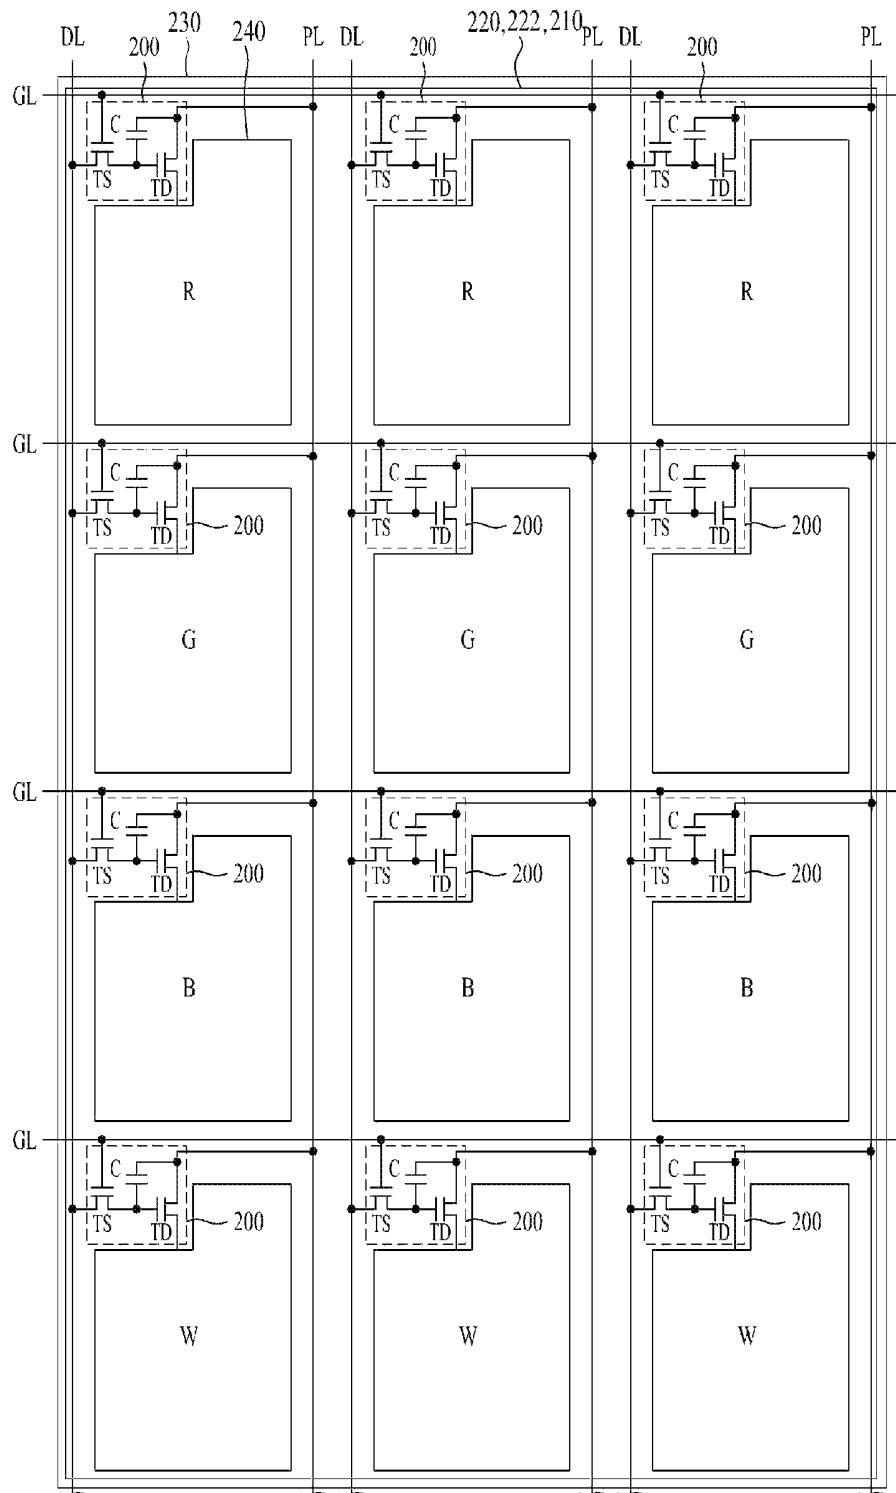


FIG. 1D

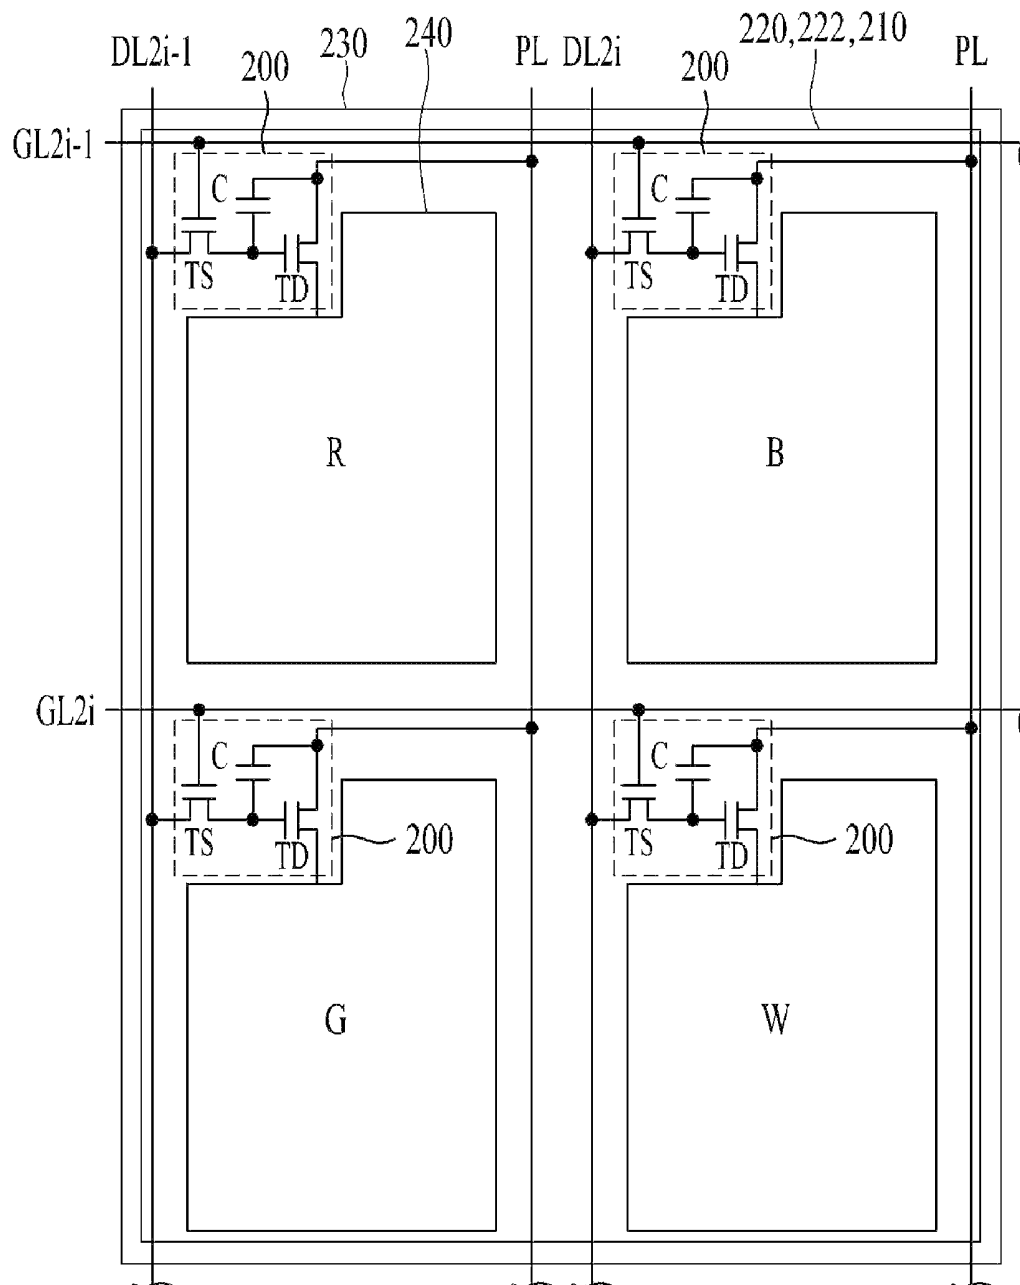


FIG. 2

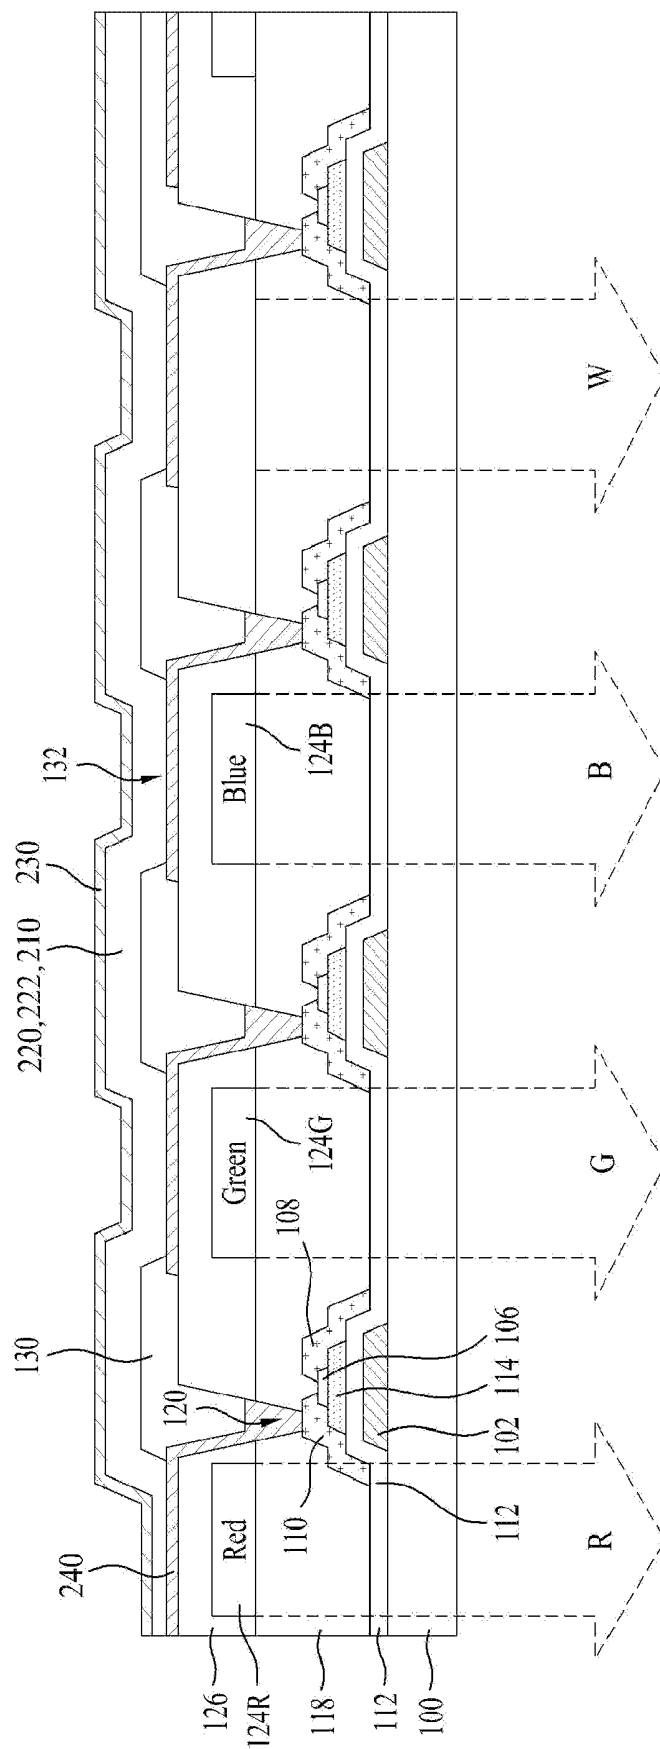


FIG. 3

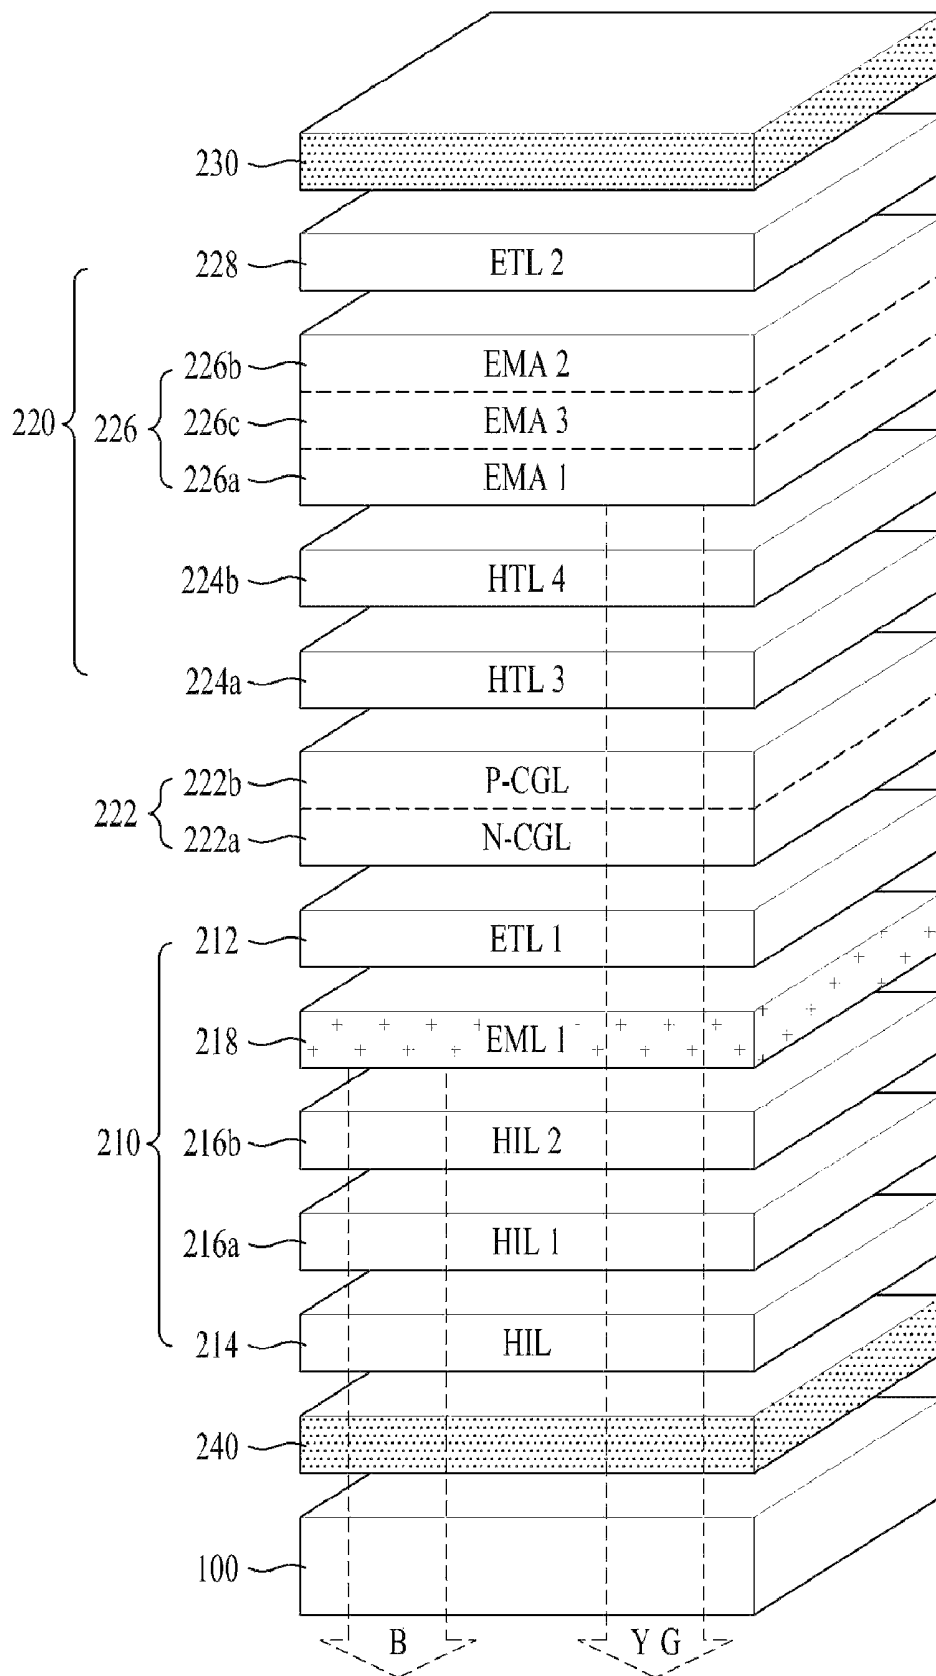


FIG. 4A

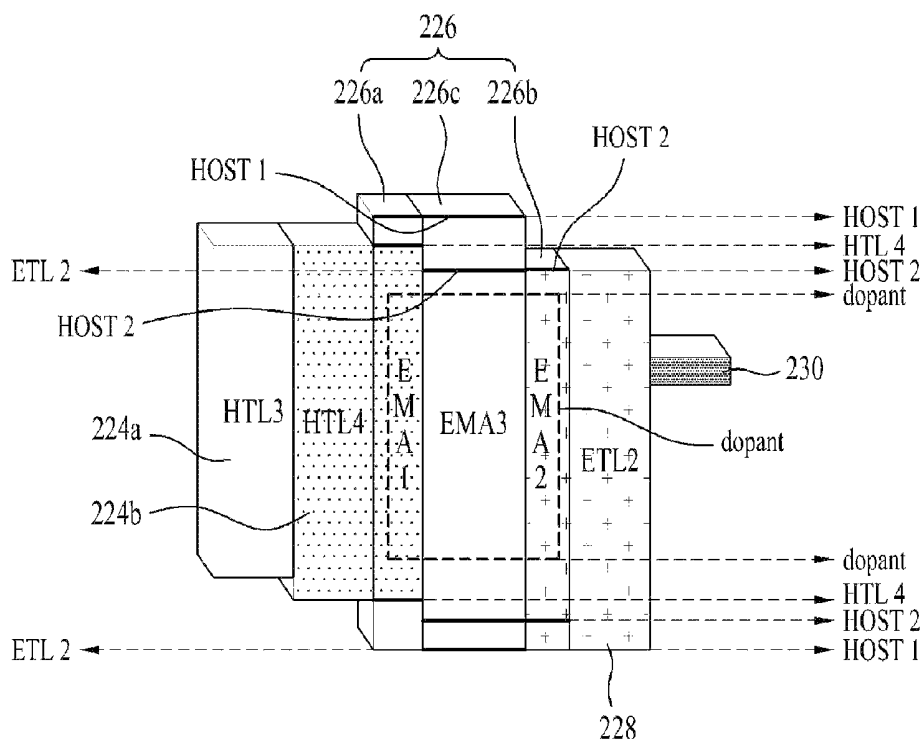


FIG. 4B

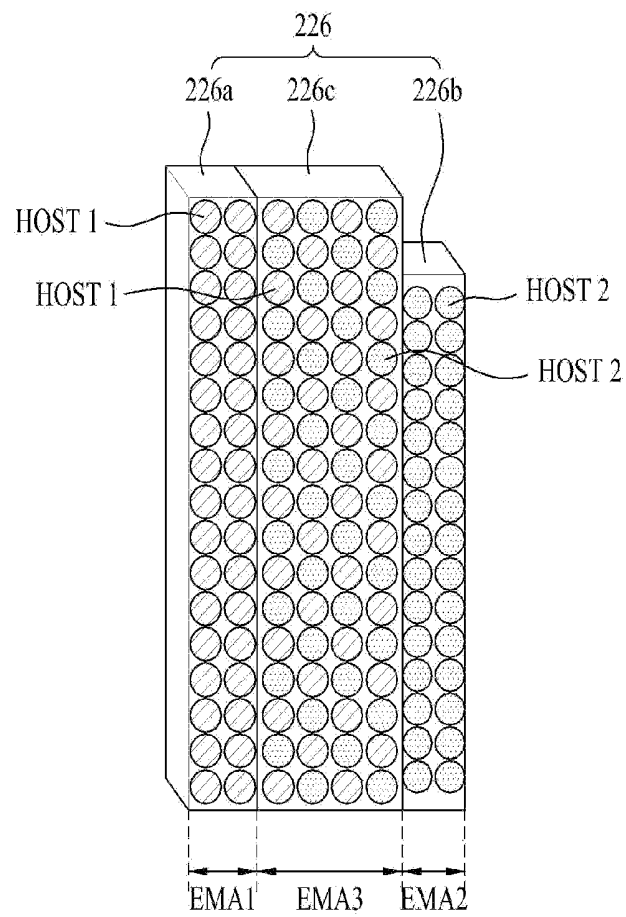


FIG. 5

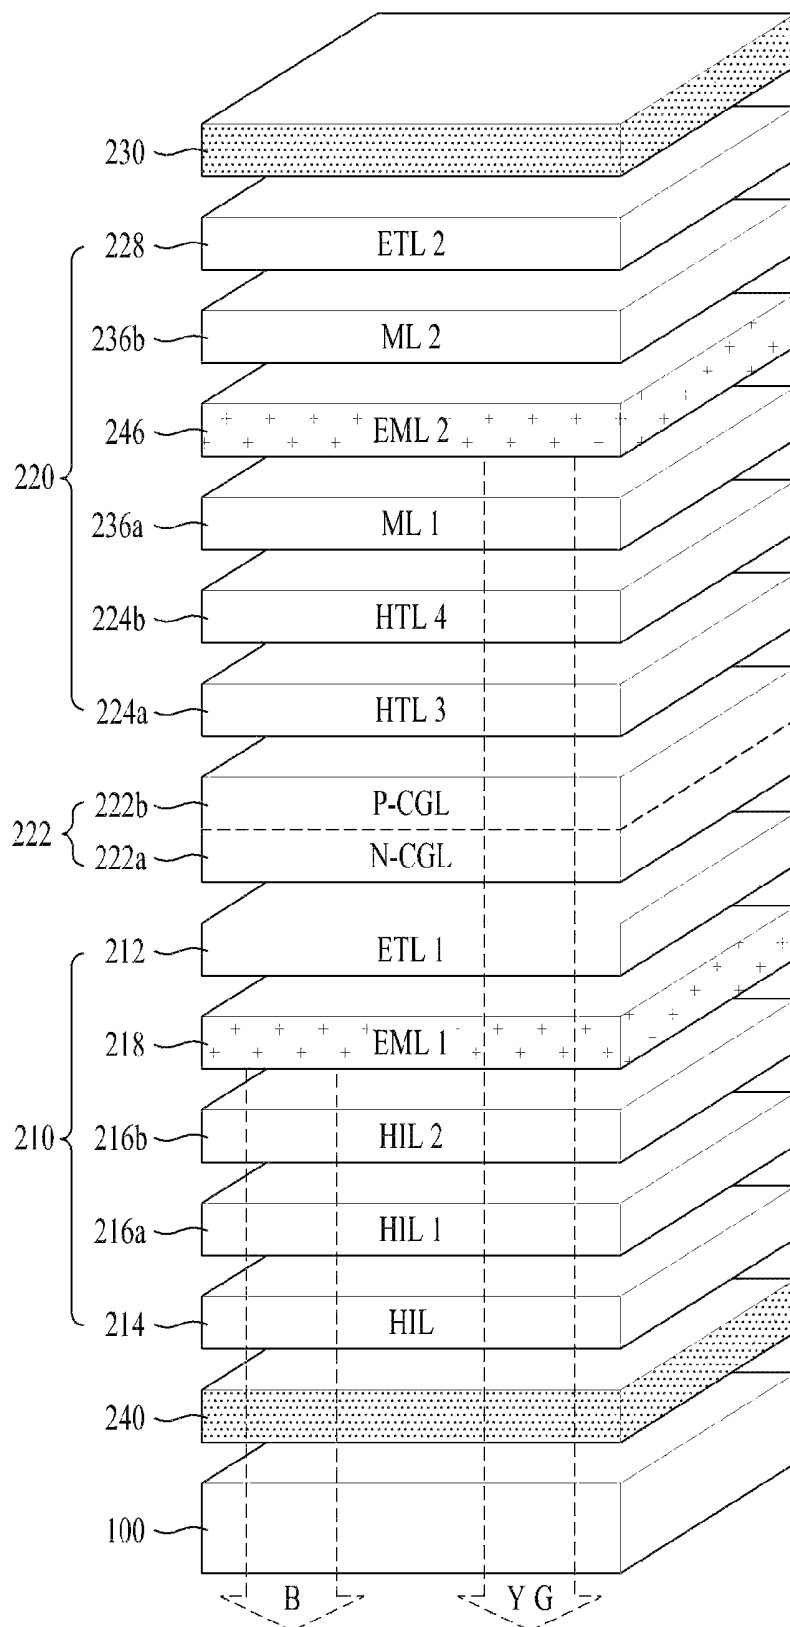


FIG.6A


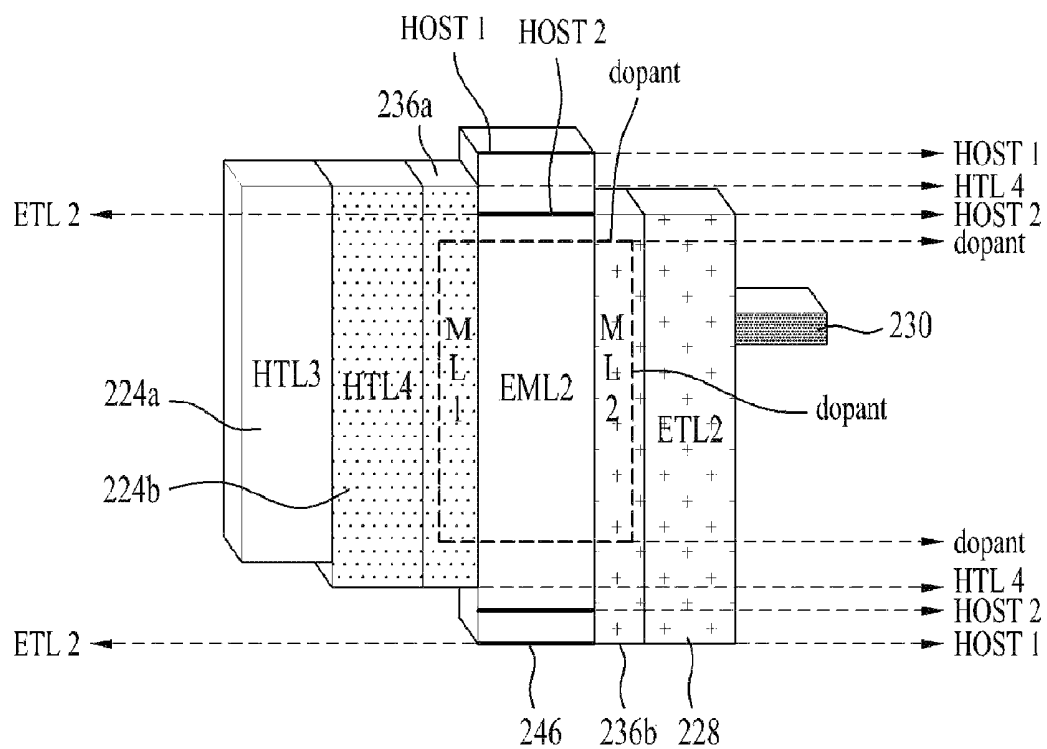


FIG. 6B

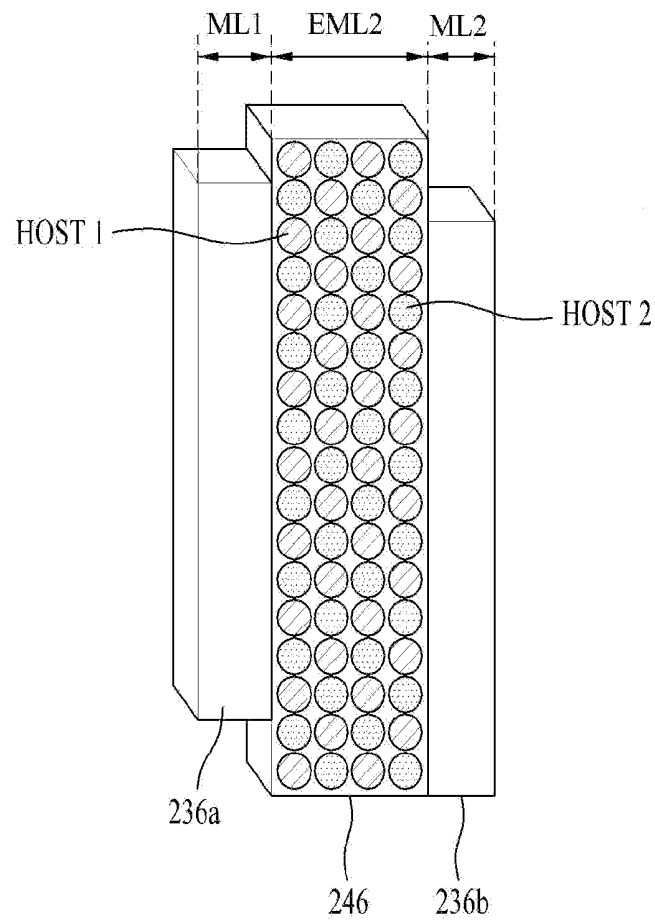

ORGANIC LIGHT EMITTING DISPLAY DEVICE

This application claims the benefit of Korean Patent Application No. 10-2012-0109027, filed on Sep. 28, 2012, which is hereby incorporated by reference as if fully set forth herein.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an organic light emitting display device, and more particularly, to an organic light emitting display device with improved lifespan by reducing resistance at an interface between an emitting layer and a hole transport layer or an electron transport layer that is formed adjacent thereto.

2. Discussion of the Related Art

Image display devices, which display a variety of information on a screen, are a core technology of information and communication and are becoming increasingly thinner, lighter, more portable, and higher in performance. Thus, organic light emitting device (OLED) display devices, which display an image by controlling light emission of an organic emitting layer (EML), have received attention as a flat panel display device that may address problems in terms of weight and volume which occur in cathode ray tubes (CRTs).

OLEDs are self-emissive devices including a thin EML between electrodes and can be fabricated as a thin film with a thickness similar to that of paper. In particular, an OLED includes an anode, a hole transport layer (HTL), a hole injection layer (HIL), an EML, an electron injection layer (EIL), an electron transport layer (ETL), and a cathode.

As such, an EML is formed between an HTL and an ETL. In this regard, it is difficult for holes to move towards the EML due to an interface barrier between the HTL and the EML and it is difficult for electrons to move towards the EML due to an interface barrier between the ETL and the EML. Accordingly, lifespan of an OLED is reduced.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to an organic light emitting display device that substantially obviates one or more problems due to limitations and disadvantages of the related art.

An object of the present invention is to provide an organic light emitting display device with improved lifespan by reducing resistance at an interface between an emitting layer and a hole transport layer or an electron transport layer that is formed adjacent thereto.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, an organic light emitting display device includes first and second electrodes facing each other on a substrate, a first stack including a hole injection layer, a first hole transport layer, a second hole transport layer, a first emitting layer, and a first electron transport layer, the layers being sequentially stacked on the first electrode, a second

stack including a third hole transport layer, a fourth hole transport layer, a second emitting layer including at least two hosts and a single dopant and having at least three emitting areas, and a second electron transport layer, the layers being sequentially stacked between the first stack and the second electrode, and a charge generation layer formed between the first stack and the second stack and adjusting charge balance between the first and second stacks, wherein the second emitting layer includes a first emitting area including a material of the fourth hole transport layer, a second emitting area including a material of the second electron transport layer, and a third emitting area including the at least two hosts.

The third emitting area may include first and second hosts and a phosphorescent dopant.

The first emitting area may include the first host and a phosphorescent dopant, the phosphorescent dopant being the same as that of the third emitting area.

The second emitting area may include the second host and the phosphorescent dopant, the phosphorescent dopant being the same as that of the third emitting area.

The first host may include a material that more satisfactorily receives holes transferred from the fourth hole transport layer than the second host.

The second host may include a material that more satisfactorily receives electrons transferred from the second electron transport layer than the first host.

The first emitting area may have a thickness of 30 Å to 100 Å, and the second emitting area may have a thickness of 30 Å to 100 Å.

The second emitting layer may have a thickness of 150 Å to 250 Å.

In another aspect of the present invention, an organic light emitting display device includes first and second electrodes facing each other on a substrate, a first stack including a hole injection layer, a first hole transport layer, a second hole transport layer, a first emitting layer, and a first electron transport layer, the layers being sequentially stacked on the first electrode, a second stack including a third hole transport layer, a fourth hole transport layer, a second emitting layer including at least two hosts and a dopant, and a second electron transport layer, the layers being sequentially stacked between the first stack and the second electrode, a charge generation layer formed between the first stack and the second stack and adjusting charge balance between the first and second stacks, and at least one of a first mixing layer disposed between the fourth hole transport layer and the second emitting layer and including a material of the fourth hole transport layer and the dopant and a second mixing layer disposed between the second electron transport layer and the second emitting layer and including a material of the second electron transport layer and the dopant.

The second emitting layer may include first and second hosts and a phosphorescent dopant.

The first host may include a material that more satisfactorily receives holes transferred from the first mixing layer including the material of the fourth hole transport layer than the second host.

The second host may include a material that more satisfactorily receives electrons transferred from the second mixing layer including the material of the second electron transport layer than the first host.

The dopant of the first and second mixing layers may be the same as that of the second emitting layer.

The first mixing layer may have a thickness of 30 Å to 100 Å, and the second mixing layer may have a thickness of 30 Å to 100 Å.

The second emitting layer may have a thickness of 150 Å to 250 Å.

It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

FIGS. 1A through 1D are equivalent circuit diagrams each illustrating R, G, B and W pixels of an organic light emitting display device according to a first embodiment of the present invention;

FIG. 2 is a sectional view of the organic light emitting display device according to R, G, B and W sub-pixel regions illustrated in FIGS. 1A to 1D;

FIG. 3 is a perspective view of a white organic light emitting diode (OLED) of the organic light emitting display device according to the first embodiment of the present invention;

FIG. 4A is a band diagram illustrating the white OLED illustrated in FIG. 3;

FIG. 4B is a view illustrating first and second hosts formed in first, second and third emitting areas illustrated in FIG. 3;

FIG. 5 is a perspective view of a white OLED of an organic light emitting display device according to a second embodiment of the present invention;

FIG. 6A is a band diagram illustrating the white OLED illustrated in FIG. 5; and

FIG. 6B is a view illustrating first and second hosts formed in a second mixing layer illustrated in FIG. 6A.

DETAILED DESCRIPTION OF THE INVENTION

Hereinafter, embodiments will be described with reference to the annexed drawings. Features and operating effects of the embodiments will be clearly understood from the following description of specific embodiments. The same reference numerals will be used throughout the drawings to refer to the same elements. When a detailed description of the related art may unnecessarily obscure the subject matter of the present invention, a description thereof will be omitted.

Hereinafter, exemplary embodiments of the present invention will be described in detail with reference to FIGS. 1A through 6B.

FIGS. 1A through 1D are equivalent circuit diagrams each illustrating R, G, B and W pixels of an organic light emitting display device according to a first embodiment of the present invention. FIG. 2 is a sectional view of the organic light emitting display device according to R, G, B and W sub-pixel regions illustrated in FIGS. 1A to 1D. FIG. 3 is a perspective view of a white organic light emitting diode (OLED) of the organic light emitting display device according to the first embodiment of the present invention. FIG. 4A is a band diagram illustrating the white OLED illustrated in FIG. 3. FIG. 4B is a view illustrating first and second hosts formed in first, second and third emitting areas illustrated in FIG. 3.

The organic light emitting display device according to the present invention includes a substrate in which a display region is defined by a plurality of sub-pixel regions in the

form of a matrix and an encapsulation substrate or a thin-film encapsulation that is formed on the substrate and protects sub-pixels from moisture or oxygen.

The sub-pixel regions consist of an R sub-pixel region, a G sub-pixel region, a B sub-pixel region, and a W sub-pixel region, and the R, G, B and W sub-pixel regions are arranged in a matrix form and display an image. As illustrated in FIG. 1A, the sub-pixel regions may be configured such that the R, G, B and W sub-pixel regions are arranged in a single row parallel to a gate line, such as in an array of 1 row and 4 columns (1 row×4 columns). In another embodiment, as illustrated in FIG. 1B, the R, G, B and W sub-pixel regions may be arranged in a single column parallel to a data line, such as in an array of 4 rows and 1 column (4 rows×1 column). Although a case in which the R, G, B and W sub-pixel regions are arranged in this order has been described, R, B, G and W sub-pixel regions may be arranged in this order or W, R, G and B sub-pixel regions may be arranged in this order. That is, disposition order is not limited to the above-described examples and may be changed as desired by a user.

In addition, as illustrated in FIGS. 1C and 1D, the R, B, G and W sub-pixel regions may be arranged in an array of 2 rows×2 columns. For example, as illustrated in FIG. 1C, the R sub-pixel region may be formed at an intersection between a $2i-1^{th}$ (here, i is a natural number of 1 or more) data line (DL $2i-1$) and a $2i-1^{th}$ gate line (GL $2i-1$), the G sub-pixel region may be formed at an intersection between a $2i^{th}$ data line (DL $2i$) and the $2i-1^{th}$ gate line (GL $2i-1$), the B sub-pixel region may be formed at an intersection between the $2i-1^{th}$ data line (DL $2i-1$) and a $2i^{th}$ gate line (GL $2i$), and the W sub-pixel region may be formed at an intersection between the $2i^{th}$ data line (DL $2i$) and the $2i^{th}$ gate line (GL $2i$).

In addition, as illustrated in FIG. 1D, the R sub-pixel region may be formed at an intersection between the $2i-1^{th}$ data line (DL $2i-1$) and the $2i-1^{th}$ gate line (GL $2i-1$), the B sub-pixel region may be formed at an intersection between the $2i^{th}$ data line (DL $2i$) and the $2i-1^{th}$ gate line (GL $2i-1$), the G sub-pixel region may be formed at an intersection between the $2i-1^{th}$ data line (DL $2i-1$) and the $2i^{th}$ gate line (GL $2i$), and the W sub-pixel region may be formed at an intersection between the $2i^{th}$ data line (DL $2i$) and the $2i^{th}$ gate line (GL $2i$).

Each of the R, G, B and W sub-pixel regions includes a cell driving unit 200 and a white OLED connected to the cell driving unit 200.

The cell driving unit 200 includes a switch thin film transistor TS connected to a gate line GL and a data line DL, a driving thin film transistor TD connected to the switch thin film transistor TS, a power line PL, and a first electrode 240 of the white OLED, and a storage capacitor C connected to the power line PL and a drain electrode 110 of the switch thin film transistor TS. Each sub-pixel region may have a structure including a switch transistor, a driving transistor, a capacitor, and an OLED or may have a structure further including a transistor and a capacitor. In addition, the driving thin film transistor TD may be directly connected to the first electrode 240 of the white OLED and, in another embodiment, another thin film transistor may be formed between the driving thin film transistor TD and the white OLED.

A gate electrode of the switch thin film transistor TS is connected to the gate line GL, a source electrode thereof is connected to the data line DL, and a drain electrode thereof is connected to a gate electrode of the driving thin film transistor TD and the storage capacitor C. A source electrode of the driving thin film transistor TD is connected to the power line PL and a drain electrode 110 thereof is connected to the first

electrode **240**. The storage capacitor C is connected between the power line PL and the gate electrode of the driving thin film transistor TD.

The switch thin film transistor TS is turned on when a scan pulse is supplied to the gate line GL and thus a data signal supplied to the data line DL is supplied to the storage capacitor C and the gate electrode of the driving thin film transistor TD. The driving thin film transistor TD controls current I supplied from the power line PL to the OLED in response to the data signal supplied to the gate electrode, thereby adjusting light emission of the OLED. In addition, even through the switch thin film transistor TS is turned off, the driving thin film transistor TD supplies constant current I until a data signal of the next frame is supplied, due to voltage charged in the storage capacitor C, whereby the white OLED maintains light emission.

As illustrated in FIG. 2, the driving thin film transistor TD is connected to the gate line GL and includes a gate electrode **102** formed on a substrate **100**, a gate insulating film **112** formed on the gate electrode **102**, an oxide semiconductor layer **114** formed to correspond to the gate electrode **102**, with the gate insulating film **112** disposed therebetween, an etch stopper **106** formed on the oxide semiconductor layer **114** to prevent damage to the oxide semiconductor layer **114** and protect the oxide semiconductor layer **114** from oxygen, a source electrode **108** connected to the data line DL, and the drain electrode **110** facing the source electrode **108**. In addition, a first passivation film **118** is formed on the driving thin film transistor TD.

The oxide semiconductor layer **114** is formed of an oxide including at least one metal selected from among Zn, Cd, Ga, In, Sn, Hf, and Zr. A thin film transistor including such oxide semiconductor layer has higher charge mobility and lower leakage current than a thin film transistor including a silicon semiconductor layer. In addition, the thin film transistor including a silicon semiconductor layer is manufactured through a high-temperature manufacturing process and needs to be subjected to a crystallization process, and thus, as the thin film transistor is fabricated to a large area, uniformity is deteriorated during the manufacturing process, which makes it difficult to fabricate a large-area thin film transistor. By contrast, the thin film transistor including the oxide semiconductor layer **114** may be manufactured through a low-temperature manufacturing process and is advantageously suited to large-area fabrication.

As a color filter, an R color filter **124R** is formed on a passivation film of the R sub-pixel region to realize a red (R) color, a G color filter **124G** is formed on a passivation film of the G sub-pixel region to realize a green (G) color, a B color filter **124B** is formed on a passivation film of the B sub-pixel region to realize a blue (B) color, and no color filter is formed on a passivation film of the W sub-pixel region and thus the W sub-pixel region realizes a white (W) color. In addition, a second passivation film **126** is formed on the R, G and B color filters **124R**, **124G** and **124B**.

With reference to FIGS. 2 and 3, the white OLED has a multi-stack structure including the first electrode **240** connected to the drain electrode **110** of the driving thin film transistor TD, a second electrode **230** facing the first electrode **240**, a bank insulating film **130** provided with bank holes **132** to expose the first electrode **240**, and a first stack **210**, a charge generation layer (CGL) **222**, and a second stack **220** that are stacked between the first electrode **240** and the second electrode **230**. In the white OLED having a multi-stack structure, the respective stacks includes EMLs of different colors, and light emitted from the EMLs of the respective stacks is mixed to realize white light. In addition, FIG. 3 illustrates a bottom

emission type white OLED in which light emitted from first and second EMLs **218** and **226** is emitted in a bottom direction, but embodiments of the present invention are not limited thereto. In another embodiment, the white OLED according to the first embodiment of the present invention may be of a top emission type or a dual emission type.

The first electrode **240** as an anode is formed of a transparent conductive material such as a transparent conductive oxide (TCO), e.g., indium tin oxide (ITO), indium zinc oxide (IZO), or the like.

The second electrode **230** as a cathode is formed of a reflective metal material such as aluminum (Al), gold (Au), molybdenum (Mo), chromium (Cr), copper (Cu), LiF, an Al-LiF alloy, or the like.

The first stack **210** includes a hole injection layer (HIL) **214**, a first hole transport layer (HTL1) **216a**, an HTL2 **216b**, a first emitting layer (EML1) **218**, and a first electron transport layer (ETL1) **212** that are sequentially stacked between the first electrode **240** and the CGL **222**. In this regard, the EML1 **218** includes a fluorescent blue dopant and host to emit blue light.

The CGL **222** is formed between the first and second stacks **210** and **220** to adjust charge balance therebetween. The CGL **222** includes an N-type CGL (N-CGL) **222a** formed adjacent to the first stack **210** to inject electrons into the first stack **210** and a P-type CGL (P-CGL) **222b** disposed adjacent to the second stack **220** to inject holes into the second stack **220**.

The second stack **220** includes a third HTL (HTL3) **224a**, a fourth HTL (HTL4) **224b**, a second emitting layer **226**, and a second ETL (ELT2) **228** that are sequentially stacked between the second electrode **230** and the CGL **222**.

The HTL3 **224a** transfers holes supplied from the P-CGL **222b** to the HTL4 **224b**, is the thickest element of the white OLED, and adjust cavity balance. The HTL4 **224b** transfers holes supplied from the HTL3 **224a** to the EML2 **226** and has a higher triplet energy level T1 than that of the EML2 **226** so as to prevent holes injected into the EML2 **226** from returning into the HTL4 **224b**.

The EML2 **226** consists of at least two hosts and a single dopant and has at least three emitting areas. Preferably, the EML2 **226** consists of different host materials, i.e., first and second hosts (HOST1 and HOST2) and a phosphorescent yellow-green dopant.

In particular, the EML2 **226** includes a first emitting area (EMA1) **226a** including a material for forming the HTL4 **224b**, a second emitting area (EMA2) **226b** including a material for forming the ETL2 **228**, and a third emitting area (EMA3) **226c** including the first and second hosts (HOST1 and HOST2). In this regard, a total thickness of the EML2 **226** is 150 Å to 250 Å.

As illustrated in FIGS. 4A and 4B, the EMA1 **226a** is formed of the material of the HTL4 **224b**, the HOST1, and the phosphorescent yellow-green dopant. As such, the EMA1 **226a** includes the material of the HTL4 **224b** and thus reduces interface resistance between the EML2 **226** and the HTL4 **224b** and facilitates injection of holes into the EMA3 **226c** by the EML2 **226**. In addition, the HOST1 is formed of a material that more satisfactorily receives holes transferred from the HTL4 **224b** than the HOST2. Thus, the EMA1 **226a** satisfactorily receives holes transferred from the HTL4 **224b** via the HOST1 and, accordingly, electrons and holes are smoothly recombined without disappearance or accumulation of charges, which results in enhanced luminous efficiency. In this regard, the EMA1 **226a** has a thickness of 30 Å to 100 Å.

As illustrated in FIGS. 4A and 4B, the EMA2 **226b** includes the material of the ETL2 **228**, the HOST2, and the

phosphorescent yellow-green dopant in combination. As such, the EMA2 226b includes the material of the ETL2 228 and thus reduces interface resistance between the EML2 226 and the ETL2 228 and facilitates injection of electrons into the EMA3 226c by the EML2 226. In addition, the HOST2 is formed of a material that more satisfactorily receives electrons transferred from the ETL2 228 than the HOST1. Thus, the EMA2 226b satisfactorily receives electrons transferred from the ETL2 228 via the HOST2 and, accordingly, electrons and holes are smoothly recombined without disappearance or accumulation of charges, which results in enhanced luminous efficiency. In this regard, the EMA2 226b has a thickness of 30 Å to 100 Å.

As illustrated in FIGS. 4A and 4B, the EMA3 226c includes the HOST1 and HOST2 and the phosphorescent yellow-green dopant in combination. The EMA3 226c satisfactorily receives holes from the material of the HTL4 224b included in the EMA1 226a and satisfactorily receives electrons from the material of the ETL2 228 included in the EMA2 226b and, accordingly, luminous efficiency is enhanced. The EMA1 226a, the EMA2 226b, and the EMA3 226c are formed of the same dopant.

As such, the charge barrier between the HTL4 224b and the EML2 226 is reduced through the EMA1 226a, and the charge barrier between the ETL2 228 and the EML2 226 is reduced through the EMA2 226b. As the charge barrier decreases, charge accumulation is reduced and thus the white OLED is not deteriorated, which results in improved lifespan of the white OLED. This will be described with reference to Table 1 below.

Table 1 shows lifespan (in hours) of a white OLED according to a comparative embodiment and lifespan (in hours) of the white OLED according to the first embodiment of the present invention.

TABLE 1

Structure	10 mA/cm ²				T95 (hour)
	Volt (V)	Cd/A	CIE _x	CIE _y	
Comparative embodiment	7.4	80.1	0.316	0.323	2,836
First embodiment of the present invention	7.4	81.2	0.316	0.323	4,526-7,000

The white OLED according to the comparative embodiment has a multi-stack structure including a first stack including a fluorescent blue EML as a first EML and a second stack including a phosphorescent yellow-green EML as a second EML. The phosphorescent yellow-green EML consists of first and second hosts and a phosphorescent yellow-green dopant.

As shown in Table 1 above, the white OLED according to the comparative embodiment has a lifespan of 2,836 hours. By contrast, the white OLED according to the first embodiment of the present invention has a lifespan between 4,526 and 7,000 hours. In Table 1, T95 denotes the time required for the OLED to reach 95% of the total lifespan. For example, the white OLED according to the first embodiment of the present invention has a T95 between 4,526 and 7,000 hours.

While the white OLED according to comparative embodiment has reduced lifespan due to a resistance at an interface between a second EML and a fourth HTL, the white OLED according to the first embodiment of the present invention has decreased interface resistance between the EML2 226 and the

adjacent HTL4 224b or ETL2 228 such that the HTL4 224b and the EMA 226a of the adjacent EML2 226 includes a material of the HTL4 224b, and the ETL2 228 and the EMA2 226b of the adjacent EML2 226 includes a material of the ETL2 228. Accordingly, the white OLED has enhanced lifespan.

FIG. 5 is a perspective view of a white OLED according to a second embodiment of the present invention. FIG. 6A is a band diagram illustrating the white OLED illustrated in FIG. 5. FIG. 6B is a view illustrating first and second hosts formed in a second mixing layer illustrated in FIG. 6A.

The organic light emitting display device according to the second embodiment of the present invention includes a substrate in which a display region is defined by a plurality of sub-pixel regions in the form of a matrix, and an encapsulation substrate or a thin-film encapsulation that is formed on the substrate and protects sub-pixels from moisture or oxygen.

The sub-pixel regions consist of an R sub-pixel region, a G sub-pixel region, a B sub-pixel region, and a W sub-pixel region, and the R, G, B and W sub-pixel regions are arranged in a matrix form and display an image. The R, G, B and W sub-pixel regions may be arranged as illustrated in FIGS. 1A to 1D and disposition order thereof may be changed as desired by a user.

Each of the R, G, B and W sub-pixel regions includes the cell driving unit 200 and a white OLED connected to the cell driving unit 200. The organic light emitting display device according to the second embodiment of the present invention includes the same elements and has the same functions as those of the organic light emitting display device according to the first embodiment of the present invention, except that the organic light emitting display device according to the second embodiment includes a different white OLED, and thus, a detailed description of the same elements will be omitted.

Referring to FIGS. 2 and 5, the white OLED has a multi-stack structure including the first electrode 240 connected to the drain electrode 110 of the driving thin film transistor TD, the second electrode 230 facing the first electrode 240, the bank insulating film 130 provided with bank holes 132 to expose the first electrode 240, and the first stack 210, the CGL 222, and the second stack 220 that are stacked between the first electrode 240 and the second electrode 230. In the white OLED having a multi-stack structure, the respective stacks includes EMLs of different colors, and light emitted from the EMLs of the respective stacks is mixed to realize white light. In addition, FIG. 5 illustrates a bottom emission type white OLED in which light emitted from first and second EMLs (EML1 and EML2) 218 and 246 is emitted in a bottom direction, but embodiments of the present invention are not limited thereto. In another embodiment, the white OLED according to the second embodiment of the present invention may be of a top emission type or a dual emission type.

The first electrode 240 as an anode is formed of a transparent conductive material such as a TCO, e.g., ITO, IZO, or the like.

The second electrode 230 as a cathode is formed of a reflective metal material such as Al, Au, Mo, Cr, Cu, LiF, or an Al—LiF alloy.

The first stack 210 includes the HIL 214, the HTL1 216a, the HTL2 216b, the EML1 218, and the ETL1 212 that are sequentially stacked between the first electrode 240 and the CGL 222. In this regard, the EML1 218 includes a fluorescent blue dopant and host to emit blue light.

The CGL 222 is formed between the first and second stacks 210 and 220 to adjust charge balance therebetween. The CGL 222 includes the N-CGL 222a formed adjacent to the first

stack **210** to inject electrons into the first stack **210** and the P-CGL **222b** disposed adjacent to the second stack **220** to inject holes into the second stack **220**.

The second stack **220** may have a stacked structure in which the HTL3 **224a**, the HTL4 **224b**, the EML2 **246**, and the ETL2 **228** are sequentially stacked between the second electrode **230** and the CGL **222** and include a first mixing layer (ML1) **236a** between the HTL4 **224b** and the EML2 **228**, a second mixing layer (ML2) **236b** between the ETL2 **228** and the EML2 **246**, or the ML1 and ML2 **236a** and **236b**. A case in which the white OLED according to the second embodiment of the present invention includes both the ML1 and ML2 **236a** and **236b** will now be described by way of example.

The HTL3 **224a** transfers holes supplied from the P-CGL **222b** to the HTL4 **224b**, is the thickest element of the white OLED, and adjusts cavity balance. The HTL4 **224b** transfers holes supplied from the HTL3 **224a** to the EML2 **226** and has a higher triplet energy level T1 than that of the EML2 **226** so as to prevent holes injected into the EML2 **226** from returning into the HTL4 **224b**.

The EML2 **226** consists of at least two hosts and a single dopant and has at least three emitting areas. Preferably, as illustrated in FIGS. 5A and 5B, the EML2 **246** consists of different host materials, i.e., first and second hosts (HOST1 and HOST2) and a phosphorescent yellow-green dopant. In this regard, the HOST1 is formed of a material that more easily receives holes transferred from the ML1 **236a** including the material of the HTL4 **224b** than the HOST2, and the HOST2 is formed of a material that more easily receive electrons transferred from the ML2 **236b** including the material of the ETL2 **228** than the HOST1. Accordingly, the EML2 **246** satisfactorily receives the holes transferred from the ML1 **236a** via the HOST1 and satisfactorily receives electrons transferred from the ML2 **236b** and the ETL2 **228** via the HOST2 and thus the electrons and the holes are smoothly recombined therein, which results in enhanced luminous efficiency. The EML2 **246** has a thickness of 150 Å to 250 Å.

As illustrated in FIG. 6A, the ML1 **236a** includes the material of the HTL4 **224b** and a phosphorescent yellow-green dopant in combination. As such, the ML1 **236a** includes the material of the HTL4 **224b** and thus an interface resistance between the EML2 **246** and the HTL4 **224b** is reduced and holes are smoothly injected into the EML2 **246**. The dopant of the ML1 **236a** is the same as that of the EML2 **246**. In this regard, the ML1 **236a** has a thickness of 30 Å to 100 Å.

As illustrated in FIG. 6A, the ML2 **236b** includes the material of the ETL2 **228** and a phosphorescent yellow-green dopant in combination. As such, the ML2 **236b** includes the material of the ETL2 **228** and thus an interface resistance between the EML2 **246** and the ETL2 **228** is reduced and electrons are smoothly injected into the EML2 **246**. The dopant of the ML2 **236b** is the same as that of the EML2 **246**. In this regard, the ML2 **236b** has a thickness of 30 Å to 100 Å.

As such, the charge barrier between the HTL4 **224b** and the EML2 **246** is reduced through the ML1 **236a**, and the charge barrier between the ETL2 **228** and the EML2 **246** is reduced through the ML2 **236b**. As the charge barrier decreases, charge accumulation is reduced and thus the white OLED is not deteriorated, which results in improved lifespan thereof. This will be described with reference to Table 2 below.

Table 2 shows lifespan (in hours) of a white OLED according to a comparative embodiment and lifespan (in hours) of the white OLED according to the second embodiment of the present invention.

TABLE 2

Structure	Volt (V)	10 mA/cm ²			T95 (hour)
		Cd/A	CIE _x	CIE _y	
Comparative embodiment	7.4	80.1	0.316	0.323	2,836
Case A	7.4	78.7	0.316	0.313	5,436
Case B	7.4	79.8	0.317	0.317	6,742

The white OLED according to the comparative embodiment has a multi-stack structure including a first stack including a fluorescent blue EML as a first EML and a second stack including a phosphorescent yellow-green EML as a second EML. The phosphorescent yellow-green EML consists of first and second hosts and a phosphorescent yellow-green dopant.

In Table 2, Case A denotes a case in which the white OLED according to the second embodiment of the present invention includes both the ML1 and ML2 **236a** and **236b**. That is, Case A denotes the white OLED including the first stack **210** including the HIL **214**, the HTL1 **216a**, the HTL2 **216b**, the EML1 **218**, and the ETL1 **212** that are sequentially stacked, the CGL **222** formed between the first and second stacks **210** and **220**, and the second stack **220** including the HTL3 **224a**, the HTL4 **224b**, the ML1 **236a**, the EML2 **246**, the ML2 **236b**, and the ETL2 **228** that are sequentially stacked on the CGL **222**.

In Table 2, Case B denotes a case in which the white OLED according to the second embodiment of the present invention includes only the ML1 **236a**. That is, Case B denotes the white OLED including the first stack **210** including the HIL **214**, the HTL1 **216a**, the HTL2 **216b**, the EML1 **218**, and the ETL1 **212** that are sequentially stacked, the CGL **222** formed between the first and second stacks **210** and **220**, and the second stack **220** including the HTL3 **224a**, the HTL4 **224b**, the ML1 **236a**, the EML2 **246**, and the ETL2 **228** that are sequentially stacked on the CGL **222**.

As shown in Table 2 above, the white OLED according to the comparative embodiment has a lifespan of 2,836 hours. By contrast, the white OLED (Case A) according to the second embodiment of the present invention has a lifespan of 5,436 hours and the white OLED (Case B) according to the second embodiment of the present invention has a lifespan of 6,742 hours.

As such, it can be confirmed that the white OLED according to the second embodiment has a longer lifespan than that of the white OLED according to the comparative embodiment.

While the white OLED according to comparative embodiment has reduced lifespan due to a resistance at an interface between an EML and a fourth HTL, the white OLED according to the second embodiment of the present invention has decreased interface resistance due to the ML1 **236a** disposed between the HTL4 **224b** and the EML2 **246** and including the material of the HTL4 **224b** or the ML2 **236b** disposed between the ETL2 **228** and the EML2 **246** and including the material of the ETL2 **228**. Accordingly, the white OLED has enhanced lifespan.

As is apparent from the foregoing description, an organic light emitting display device according to the present invention includes a white OLED including an EML2 consisting of EMA1, EMA2, and EMA3. In the white OLED, a HTL4 and the EMA1 of the adjacent EML2 include a material of the HTL4, and the ETL2 and the EMA2 of the adjacent EML2 include a material of the ETL2, and thus, interface resistance

between the EML2 and the adjacent HTL4 or ETL2 is reduced. Accordingly, the white OLED has enhanced lifespan.

In addition, an organic light emitting display device according to the present invention includes a white OLED including at least one of an ML1 and an ML2. The white OLED includes an ML1 disposed between an HTL4 and an EML2 and including a material of the HTL4, an ML2 disposed between an ETL2 and the EML2 and including a material of the ETL2, or the ML1 and ML2 and thus has reduced interface resistance between the EML2 and the adjacent HTL4 or ETL2. Accordingly, the white OLED has enhanced OLED.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An organic light emitting display device comprising: first and second electrodes facing each other on a substrate; a first stack comprising a hole injection layer, a first hole transport layer, a second hole transport layer, a first emitting layer, and a first electron transport layer that are sequentially stacked on the first electrode; a second stack comprising a third hole transport layer, a fourth hole transport layer, a second emitting layer comprising at least two hosts and a single dopant and having at least three emitting areas, and a second electron transport layer that are sequentially stacked between the first stack and the second electrode; and a charge generation layer formed between the first stack and the second stack and adjusting charge balance between the first and second stacks, wherein the second emitting layer comprises a first emitting area comprising a material of the fourth hole transport layer, a second emitting area comprising a material of the second electron transport layer, and a third emitting area comprising the at least two hosts.
2. The organic light emitting display device according to claim 1, wherein the third emitting area comprises first and second hosts and a phosphorescent dopant.
3. The organic light emitting display device according to claim 2, wherein the first emitting area comprises the first host and the phosphorescent dopant, the phosphorescent dopant being the same as that of the third emitting area.
4. The organic light emitting display device according to claim 2, wherein the second emitting area comprises the second host and the phosphorescent dopant, the phosphorescent dopant being the same as that of the third emitting area.
5. The organic light emitting display device according to claim 2, wherein the first host comprises a material that more receives holes transferred from the fourth hole transport layer than the second host.

6. The organic light emitting display device according to claim 2, wherein the second host comprises a material that more receives electrons transferred from the second electron transport layer than the first host.

7. The organic light emitting display device according to claim 1, wherein the first emitting area has a thickness of 30 Å to 100 Å, and the second emitting area has a thickness of 30 Å to 100 Å.

8. The organic light emitting display device according to claim 1, wherein the second emitting layer has a thickness of 150 Å to 250 Å.

9. An organic light emitting display device comprising: first and second electrodes facing each other on a substrate; a first stack comprising a hole injection layer, a first hole transport layer, a second hole transport layer, a first emitting layer, and a first electron transport layer that are sequentially stacked on the first electrode; a second stack comprising a third hole transport layer, a fourth hole transport layer, a second emitting layer comprising at least two hosts and a dopant, and a second electron transport layer that are sequentially stacked between the first stack and the second electrode; a charge generation layer formed between the first stack and the second stack and adjusting charge balance between the first and second stacks; and at least one of a first mixing layer disposed between the fourth hole transport layer and the second emitting layer and a second mixing layer disposed between the second electron transport layer and the second emitting layer, wherein the first mixing layer comprises a material of the fourth hole transport layer and the dopant, and the second mixing layer comprises a material of the second electron transport layer and the dopant.

10. The organic light emitting display device according to claim 9, wherein the second emitting layer comprises first and second hosts and a phosphorescent dopant.

11. The organic light emitting display device according to claim 10, wherein the first host comprises a material that more receives holes transferred from the first mixing layer comprising the material of the fourth hole transport layer than the second host.

12. The organic light emitting display device according to claim 10, wherein the second host comprises a material that more receives electrons transferred from the second mixing layer comprising the material of the second electron transport layer than the first host.

13. The organic light emitting display device according to claim 9, wherein the dopant of the first and second mixing layers is the same as that of the second emitting layer.

14. The organic light emitting display device according to claim 9, wherein the first mixing layer has a thickness of 30 Å to 100 Å, and the second mixing layer has a thickness of 30 Å to 100 Å.

15. The organic light emitting display device according to claim 9, wherein the second emitting layer has a thickness of 150 Å to 250 Å.

* * * * *

专利名称(译)	有机发光显示装置		
公开(公告)号	US8878171	公开(公告)日	2014-11-04
申请号	US14/036163	申请日	2013-09-25
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	HEO JEONG HAENG LEE JAE MAN CHO GWI JEONG AHN SO YEON		
发明人	HEO, JEONG-HAENG LEE, JAE-MAN CHO, GWI-JEONG AHN, SO-YEON		
IPC分类号	H01L51/50		
CPC分类号	H01L51/5044 H01L51/5064 H01L51/5072 H01L2251/5384 H01L27/3209		
优先权	1020120109027 2012-09-28 KR		
其他公开文献	US20140091289A1		
外部链接	Espacenet USPTO		

摘要(译)

有机发光显示装置包括在基板上彼此面对的第一和第二电极，第一堆叠包括第一空穴传输层，第二空穴传输层，第一发光层和第一电子传输层，这些层是顺序的堆叠在第一电极上，第二叠层包括第三空穴传输层，第四空穴传输层，包括至少两个主体和单一掺杂剂并具有至少三个发光区域的第二发光层，和第二电子传输层，所述层依次堆叠在所述第一叠层和所述第二电极之间，其中所述第二发光层包括第一发光区域和第二发光区域，所述第一发光区域包括所述第四空穴传输层的材料，所述第二发光区域包括所述第二电子传输层的材料，以及第三发射区域包括至少两个主机。

