




US 20150243900A1

(19) **United States**(12) **Patent Application Publication**
Kitamura(10) **Pub. No.: US 2015/0243900 A1**(43) **Pub. Date: Aug. 27, 2015**(54) **ORGANIC ELECTROLUMINESCENT
DEVICE HAVING SPECIFIC DIAMINE
COMPOUND**(71) Applicant: **UDC Ireland Limited**, Dublin (IE)(72) Inventor: **Tetsu Kitamura**, Ashigarakami-gun (JP)(21) Appl. No.: **14/613,748**(22) Filed: **Feb. 4, 2015****Related U.S. Application Data**(63) Continuation of application No. 12/644,303, filed on
Dec. 22, 2009, now Pat. No. 8,980,441.(30) **Foreign Application Priority Data**

Dec. 22, 2008 (JP) 2008-326513

Publication Classification(51) **Int. Cl.**
H01L 51/00 (2006.01)(52) **U.S. Cl.**
CPC **H01L 51/0059** (2013.01); **H01L 51/0087**
(2013.01); **H01L 51/0094** (2013.01); **H01L**
51/0061 (2013.01); **H01L 51/5221** (2013.01)(57) **ABSTRACT**

An organic electroluminescent device is provided and includes: a cathode; an anode; and a light-emitting layer between the cathode and the anode. The light-emitting layer includes a compound represented by formula (1).



(1)

In formula (1), L represents a linking group; A₁, A₂, A₃, A₄, A₅, A₆, A₇, A₈, A₉, and A₁₀ each independently represent a carbon atom or a nitrogen atom, provided that at least two of A₁, A₅, A₆, and A₁₀ each represent a carbon atom having R'; R' represents a substituent having a carbon atom at a bonding position thereof; a plurality of Rs each independently represent a substituent; m represents an integer; and n represents an integer of 2 to 10.

ORGANIC ELECTROLUMINESCENT DEVICE HAVING SPECIFIC DIAMINE COMPOUND

[0001] This application is based on and claims priority under 35 U.S.C. §119 from Japanese Patent Application No. 2008-326513 filed Dec. 22, 2008, the entire disclosure of which is herein incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention


[0003] This invention relates to an organic electroluminescent device.

[0004] 2. Background Art


[0005] An organic electroluminescent device (hereinafter "organic EL device") has been studied extensively for providing high-brightness luminescence at a low driving voltage. An organic electroluminescent device has an organic light emitting layer sandwiched between a pair of opposing electrodes. With an electric field applied to the electrodes, electrons and holes are injected from the cathode and the anode, respectively, into the organic layer, where they are recombined to generate excitons, the energy of which is utilized for light emission.

[0006] Recently, the luminescence efficiency of devices has been increasing by the use of a phosphorescent material. Phosphorescent electroluminescent devices using an iridium complex or a platinum complex as a phosphorescent material are disclosed, e.g., in U.S. Pat. No. 6,303,238 and WO 00/57676. Devices achieving both high efficiency and high durability, however, have not yet been developed. One of the reasons for the difficulty in developing a phosphorescent device with high efficiency and high durability is that there are limited host materials that have good chemical stability, excellent carrier injection/transport properties, and a high energy level of the lowest excited triplet state (T_1 energy). A host material is required to have a higher T_1 than a phosphorescent material because, and if not, the luminescence is quenched. When the T_1 of a host material is higher than, but with only a small difference from, that of a phosphorescent material, back energy transfer from the phosphorescent material to the host material occurs partially, which causes a reduction in efficiency or durability. Therefore, a host material having a sufficiently high T_1 , good chemical stability, and excellent carrier injection/transport properties.

[0007] An organic electroluminescent device having a tetraphenylsilane compound of the following formula as a host material forming a light emitting layer along with a phosphorescent material is disclosed (U.S. Patent Publication No. 2004/0209116). Although the T_1 energy level of the host material proposed is high, the charge injection and transfer properties are low so that the device needs an increased driving voltage. Improvements in this respect have been demanded.



[0008] JP-4-126790A describes an organic electroluminescent device having an m-phenylenediamine compound of the following formula.

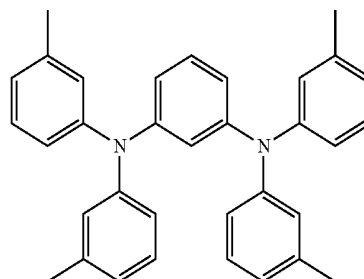


[0009] The above compound was turned out by the present inventors' study to have a low T_1 energy level. When it is used with a phosphorescent material, the compound quenches the luminescence of the phosphorescent material, only to achieve low luminescence efficiency and insufficient driving durability.

SUMMARY OF THE INVENTION

[0010] An object of an illustrative, non-limiting embodiment of the invention is to provide an organic electroluminescent device having high efficiency, low driving voltage, and high driving durability.


[0011] According to an aspect of the invention, there is provided the following electroluminescent devices.

1. An organic electroluminescent device including: a cathode; an anode; and a light-emitting layer between the cathode and the anode, the light-emitting layer including a compound represented by formula (1):

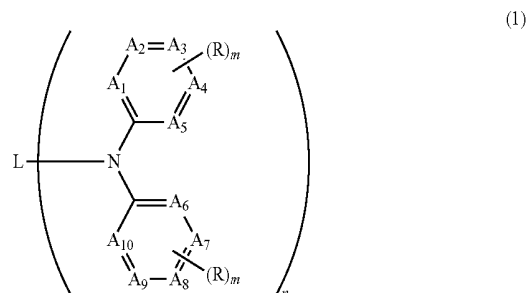


wherein L represents a linking group; $A_1, A_2, A_3, A_4, A_5, A_6, A_7, A_8, A_9$, and A_{10} each independently represent a carbon atom or a nitrogen atom, provided that at least two of A_1, A_5, A_6 , and A_{10} each represent a carbon atom having R'; R' represents a substituent having a carbon atom at a bonding position thereof; a plurality of Rs each independently represent a substituent; m represents an integer; and n represents an integer of 2 to 10.

2. The organic electroluminescent device according to item 1 above, wherein the compound of formula (1) is a compound represented by formula (2):

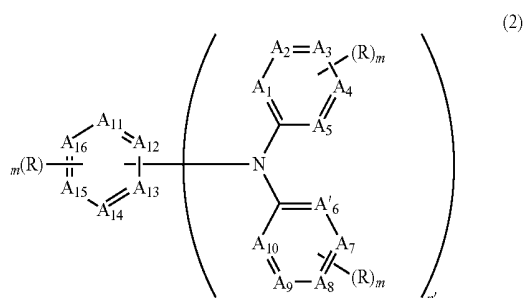

wherein $A_2, A_3, A_4, A_5, A_7, A_8, A_9, A_{10}, A_{11}, A_{12}, A_{13}, A_{14}, A_{15}$, and A_{16} each independently represent a carbon atom or a nitrogen atom; A_1 and A_6 each represent a carbon atom having R' ; R' represents a substituent having a carbon atom at a bonding position thereof; a plurality of R s each independently represent a substituents; m represents an integer; and n' represents 2 or 3.

3. The organic electroluminescent device according to item 2 above, wherein the compound of formula (2) is a compound represented by formula (3):

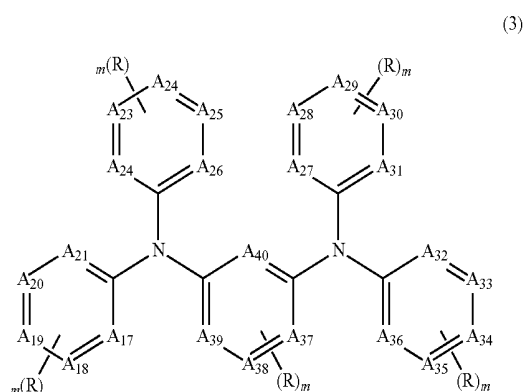

wherein $A_{18}, A_{19}, A_{20}, A_{21}, A_{23}, A_{24}, A_{25}, A_{26}, A_{28}, A_{29}, A_{30}, A_{31}, A_{33}, A_{34}, A_{35}, A_{36}, A_{37}, A_{38}, A_{39}$, and A_{40} each independently represent a carbon atom or a nitrogen atom; A_{17}, A_{22}, A_{27} , and A_{32} each represent a carbon atom having R'' ; R'' represents a substituent having a sp^3 carbon atom at a bonding position thereof; a plurality of R s each independently represent a substituents; and m represents an integer.


4. The organic electroluminescent device according to any one of items 1 to 3 above, wherein the compound has an excited triplet level T_1 of 2.8 to 3.5 eV in a form of a thin film

5. The organic electroluminescent device according to any one of items 1 to 4 above, wherein the light emitting layer further includes a phosphorescent material.

6. The organic electroluminescent device according to item 5 above, wherein the phosphorescent material is an iridium complex or a platinum complex.

7. The organic electroluminescent device according to item 6 above, wherein the phosphorescent material is a platinum complex containing a tridentate or higher polydentate ligand.

8. The organic electroluminescent device according to item 6 above, wherein the phosphorescent material is a platinum complex represented by formula (4):

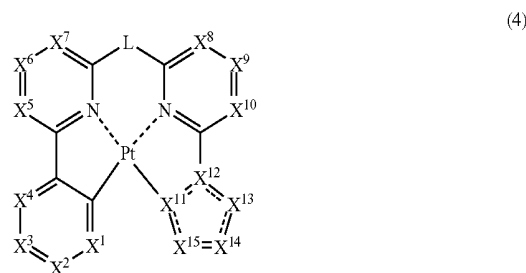


wherein X^1, X^2, X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of X^1, X^2, X^3 , and X^4 represents a nitrogen atom; X^5, X^6, X^7, X^8, X^9 , and X^{10} each independently represent a carbon atom or a nitrogen atom; X^{11} and X^{12} each independently represent a carbon atom or a nitrogen atom; X^{13}, X^{14} , and X^{15} , each independently represent a carbon atom, a nitrogen atom, an oxygen atom, or a sulfur atom; a 5-membered ring skeleton formed of $X^{11}, X^{12}, X^{13}, X^{14}$, and X^{15} contains 2 or less nitrogen atoms; and L represents a single bond or a divalent linking group.

9. The organic electroluminescent device according to item 5 above, wherein the phosphorescent material has a maximum luminescence wavelength of 500 nm or shorter.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0012] According to an exemplary embodiment of the invention, an organic electroluminescent device having high efficiency, low driving voltage, and high driving durability can be obtained.

[0013] An organic electroluminescent device according to an exemplary embodiment of the invention includes a cathode, an anode, and a light-emitting layer between the cathode and the anode. The light-emitting layer contains a compound represented by formula (1):

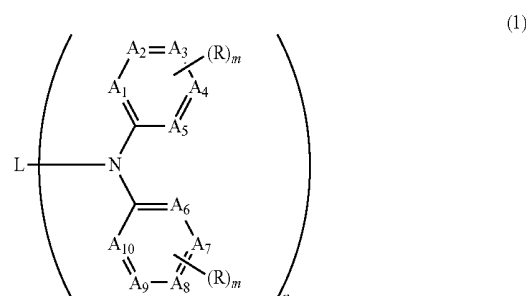

[0014] In formula (1), L represents a linking group; $A_1, A_2, A_3, A_4, A_5, A_6, A_7, A_8, A_9$, and A_{10} each independently represent a carbon atom or a nitrogen atom, provided that at least two of A_1, A_5, A_6 , and A_{10} each represent a carbon atom having R' ; R' represents a substituent having a carbon atom at the bonding position thereof; a plurality of R s each independently represent a substituent; m represents an integer; and n represents an integer of 2 to 10.

[0015] The organic electroluminescent device contains at least one light-emitting layer as an organic layer. The organic electroluminescent device may have plural light-emitting layers. As organic layers than the light-emitting layer, a hole

injection layer, a hole transport layer, an electron blocking layer, an exciton blocking layer, a hole blocking layer, an electron transport layer, an electron injection layer, and/or a protective layer may be arranged in the organic electroluminescent device. Each layer may serve other functions than described and each layer may include two or more sublayers.


[0016] The organic electroluminescent device of the invention may be either of the type utilizing light emission from singlet excitons (fluorescent light emission) or of the type utilizing light emission from triplet excitons (phosphorescent light emission) but is preferably of the latter type in terms of luminescence efficiency.

[0017] The light-emitting layer preferably contains at least one luminescent material and at least one host material. As used herein, the term "host material" refers to a material constituting a light-emitting layer other than a luminescent material and performing at least one of a function to disperse and retain the luminescent material therein, a function to accepting holes from an anode or a hole transport layer, etc., a function to accept electrons from a cathode or an electron transport layer, etc., a function to transport holes and/or electrons, a function to provide a site for hole-electron recombination, a function to shift the energy of excitons generated by the recombination to the luminescent material, and a function to transport holes and/or electrons to the luminescent material.

[0018] The compound of formula (1) may be present in not only a light-emitting layer but any one of or two or more of other organic layers. The compound of formula (1) is preferably present in a hole injection layer, a hole transport layer, an electron blocking layer, a light-emitting layer, a hole blocking layer, an electron transport layer, and an electron injection layer, more preferably in a light-emitting layer, an electron blocking layer, a hole transport layer, and a hole injection layer, even more preferably in a light-emitting layer. It is the most preferred for the compound of formula (1) be present in a light-emitting layer as a host material. In a case where the compound of formula (1) is used as a host material in a light-emitting layer, the content of the compound of formula (1) in a light-emitting layer is preferably 30% to 99.9%, more preferably 50% to 99%, even more preferably 70% to 100%, by mass. Where the compound of formula (1) is incorporated into a hole injection layer, hole transport layer, electron blocking layer, hole blocking layer, electron transport layer, or electron injection layer, the content of the compound of formula (1) in each layer is preferably 50% to 100%, more preferably 70% to 100%, even more preferably 90% to 100%, by mass.

[0019] The compound of formula (1) will be described.

[0020] The compound of formula (1) is chemically stable and has high carrier transport properties and a large T_1 and is therefore useful in a light-emitting layer.



(1)

[0021] In formula (1), L represents a linking group; $A_1, A_2, A_3, A_4, A_5, A_6, A_7, A_8, A_9$, and A_{10} each independently represent a carbon atom or a nitrogen atom, provided that at least two of A_1, A_5, A_6 , and A_{10} each represent a carbon atom having R'; R' represents a substituent having a carbon atom at a bonding position thereof; a plurality of Rs each independently represent a substituent; m represents an integer; and n represents an integer of 2 to 10.

[0022] The compound of formula (1) may have its molecular assembly state in a film, ionization potential energy (Ip), T_1 energy, and so on controlled by selection of substituents and linking group L in formula (1). Ip is preferably 5.0 to 7.0 eV, more preferably 5.3 to 6.5 eV, even more preferably 5.5 to 6.2 eV, in terms of chemical stability and hole transport properties, while varying depending on intended uses.

[0023] As stated previously, a host material of a light-emitting layer preferably has a sufficiently larger energy gap (higher excited triplet level, i.e., T_1 energy, in the case of a phosphorescent device) than a luminescent material. Otherwise, energy transfer from the luminescent material to the host material would occur, causing reductions in efficiency and durability. When the energy gap of the host material is higher than, but with only a small difference from, that of the luminescent material, back energy transfer from the luminescent material to the host material will partially occur, which also causes reductions in efficiency and durability. Accordingly, in using a luminescent material with a larger energy gap, a host material is required to have a still larger energy gap. Because an energy gap descends in the order of phosphorescence, fluorescence and in the order of blue, green, and red, a host material having a largest energy gap (T_1) will be required when in using a phosphorescent material having a short wavelength (i.e., blue). T_1 energy of the compound of formula (1) is preferably 2.7 to 4.0 eV, more preferably 2.8 to 3.5 eV, even more preferably 2.9 to 3.3 eV, while depending on a luminescent material to be combined with the compound.

[0024] In the invention, Ip of a compound is determined by analyzing a thin film formed of the compound by photoelectron spectrometry in an atmosphere using, for example, AC-1 from Riken Keiki Co., Ltd. T_1 energy of a compound is obtained from the short wavelength end of the phosphorescence spectrum of a thin film of the compound. For example, a material to be analyzed is deposited on a cleaned quartz glass substrate by vacuum evaporation to a thickness of about 50 nm. The deposit film is analyzed with a spectrophotofluorometer F-7000 from Hitachi High-Technologies Corp. at a liquid nitrogen temperature. The wavelength at the rising edge of the luminescence spectrum (the short wavelength side end) is converted to energy unit to obtain T_1 energy.

[0025] Substituents in formula (1) include the following group of substituents, designated substituent group A.

Substituent Group A:

[0026] An alkyl group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 10, carbon atoms, such as methyl, ethyl, isopropyl, tert-butyl, n-octyl, n-decyl, n-hexadecyl, cyclopropyl, cyclopentyl, or cyclohexyl; an alkenyl group preferably having 2 to 30, more

preferably 2 to 20, even more preferably 2 to 10, carbon atoms, such as vinyl, allyl, 2-butenyl, or 3-pentenyl; an alkynyl group preferably having 2 to 30, more preferably 2 to 20, even more preferably 2 to 10, carbon atoms, such as propargyl or 3-pentynyl; an aryl group preferably having 6 to 30, more preferably 6 to 20, even more preferably 6 to 12, carbon atoms, such as phenyl, p-methylphenyl, naphthyl, or anthranyl; an amino group preferably having 0 to 30, more preferably 0 to 20 carbon atoms, even more preferably 0 to 10, carbon atoms, such as amino, methylamino, dimethylamino, diethylamino, dibenzylamino, diphenylamino, or ditolylamino; an alkoxy group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 10, carbon atoms, such as methoxy, ethoxy, butoxy, or 2-ethylhexyloxy; an aryloxy group preferably having 6 to 30, more preferably 6 to 20, even more preferably 6 to 12, carbon atoms, such as phenyloxy, 1-naphthyloxy, or 2-naphthyloxy; a heterocyclic oxy group preferably having 1 to 30, more preferably 1 to 20 carbon atoms, even more preferably 1 to 12, carbon atoms, such as pyridyloxy, pyrazolyloxy, pyrimidyloxy, or quinolyloxy; an acyl group preferably having 2 to 30, more preferably 2 to 20, even more preferably 2 to 12, carbon atoms, such as acetyl, benzoyl, formyl, or pivaloyl; an alkoxycarbonyl group preferably having 2 to 30, more preferably 2 to 20, even more preferably 2 to 12, carbon atoms, such as methoxycarbonyl or ethoxycarbonyl; an aryloxy carbonyl group preferably having 7 to 30, more preferably 7 to 20, even more preferably 7 to 12, carbon atoms, such as phenyloxycarbonyl; an acyloxy group preferably having 2 to 30, more preferably 2 to 20, even more preferably 2 to 10, carbon atoms, such as acetoxyl or benzoyloxy; an acylamino group preferably having 2 to 30, more preferably 2 to 20, even more preferably 2 to 10, carbon atoms, such as acetylamino or benzoylamino; an alkoxycarbonylamino group preferably having 2 to 30, more preferably 2 to 20, even more preferably 2 to 12, carbon atoms, such as methoxycarbonylamino; an aryloxy carbonylamino group preferably having 7 to 30, more preferably 7 to 20, even more preferably 7 to 12, carbon atoms, such as phenyloxycarbonylamino; a sulfonylamino group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as methanesulfonylamino or benzenesulfonylamino; a sulfamoyl group preferably having 0 to 30, more preferably 0 to 20, even more preferably 0 to 12, carbon atoms, such as sulfamoyl, methylsulfamoyl, dimethylsulfamoyl, or phenylsulfamoyl; carbamoyl group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as carbamoyl, methylcarbamoyl, diethylcarbamoyl, or phenylcarbamoyl; an alkylthio group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as methylthio or ethylthio; an arylthio group preferably having 6 to 30 carbon atoms, more preferably 6 to 20, even more preferably 6 to 12, carbon atoms, such as phenylthio; a heterocyclic thio group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as pyridylthio, 2-benzimidazolylthio, 2-benzoxazolylthio, or 2-benzothiazolylthio; a sulfonyl group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as mesyl or tosyl; a sulfinyl group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as methanesulfinyl or benzenesulfinyl; a ureido group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as ureido, methylureido, or phenylureido; an

phosphoramidate group preferably having 1 to 30, more preferably 1 to 20, even more preferably 1 to 12, carbon atoms, such as diethylphosphoramidate or phenylphosphoramidate; a hydroxyl group, a mercapto group, a halogen atom (e.g., fluorine, chlorine, bromine, or iodine), a cyano group, a sulfo group, a carboxyl group, a nitro group, a hydroxamic acid group, a sulfino group, a hydrazino group, an imino group; a heterocyclic group, either aromatic or non-aromatic, having preferably 1 to 30, more preferably 1 to 12, carbon atoms, with examples of the hetero atom including nitrogen, oxygen, sulfur, phosphorus, silicon, selenium, and tellurium, such as pyridyl, pyrazinyl, pyrimidyl, pyridazinyl, pyrrolyl, pyrazolyl, triazolyl, imidazolyl, oxazolyl, thiazolyl, isoxazolyl, isothiazolyl, quinolyl, furyl, thienyl, selenophenyl, tellurophenyl, piperidyl, piperidino, morpholino, pyrrolidyl, pyrrolidino, benzoxazolyl, benzimidazolyl, benzothiazolyl, carbazolyl, azepinyl, and silolyl; a silyl group preferably having 3 to 40, more preferably 3 to 30, even more preferably 3 to 24, carbon atoms, such as trimethylsilyl or triphenylsilyl; a silyloxy group preferably having 3 to 40, more preferably 3 to 30, even more preferably 3 to 24, carbon atoms, such as trimethylsilyloxy or triphenylsilyloxy; and a phosphoryl group, such as diphenylphosphoryl or dimethylphosphoryl. If possible, the substituents listed as substituent group A may further have a substituent selected from, for example, the substituent group A.

[0027] In a case where the substituent described above and hereunder, such as an alkyl group, has a carbon atom-containing substituent, the number of carbon atoms recited includes the number of carbon atoms contained in the carbon atom-containing substituent.

[0028] A_1 , A_2 , A_3 , A_4 , A_5 , A_6 , A_7 , A_8 , A_9 , and A_{10} each independently represent a carbon atom or a nitrogen atom each optionally having a substituent. The substituent that may be possessed by A_1 through A_{10} include the substituent group A.

[0029] At least two of A_1 , A_5 , A_6 , and A_{10} each represent a carbon atom having R'. R' is a substituent having a carbon atom at the bonding position thereof. Examples of the substituent R' having a carbon atom at the bonding position thereof include those listed as the substituent group A and having a carbon atom at the bonding position thereof. In view of chemical stability, carrier transport properties, and T_1 energy of the compound of formula (1), R' is preferably an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, or a heterocyclic group having 2 to 10 carbon atoms, more preferably an alkyl group having 1 to 18 carbon atoms or an aryl group having 6 to 18 carbon atoms, even more preferably an alkyl group having 1 to 18 carbon atoms.

[0030] In view of chemical stability, carrier transport properties, and T_1 energy of the compound, R is preferably an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, an amino group having 2 to 12 carbon atoms, an alkoxy group having 1 to 18 carbon atoms, an aryloxy group having 6 to 18 carbon atoms, a heterocyclic oxy group having 2 to 10 carbon atoms, an acyl group having 1 to 18 carbon atoms, an acylamino group having 1 to 18 carbon atoms, a sulfonylamino group having 1 to 18 carbon atoms, a sulfamoyl group having 2 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, an alkylthio group having 1 to 18 carbon atoms, a heterocyclic thio group having 2 to 10 carbon atoms, a sulfonyl group having 1 to 18

carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, a silyl group having 3 to 18 carbon atoms, a silyloxy group having 3 to 18 carbon atoms, or a phosphoryl group having 1 to 18 carbon atoms; more preferably an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, an amino group having 2 to 12 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, a silyl group having 3 to 18 carbon atoms, or a phosphoryl group having 1 to 18 carbon atoms; even more preferably an alkyl group having 1 to 18 carbon atoms, a halogen atom, a cyano group, or a silyl group having 3 to 18 carbon atoms.

[0031] R' and R may have a substituent selected from, for example, the substituent group A.


[0032] In terms of chemical stability, carrier transport properties, and T_1 energy of the compound, L is preferably an alkylene group having 1 to 18 carbon atoms, an arylene group having 6 to 24 carbon atoms, a divalent heterocyclic group having 2 to 10 carbon atoms, or a combination thereof; more preferably an arylene group having 6 to 24 carbon atoms, a divalent heterocyclic group having 2 to 10 carbon atoms, or a combination thereof; even more preferably a 6-membered aromatic cyclic group, a 5-membered aromatic heterocyclic group, a 6-membered aromatic heterocyclic group, or a combination thereof.

[0033] In terms of carrier injection and transport properties, n is preferably 2 to 10, more preferably 2 to 6, even more preferably 2 to 4.

[0034] m is preferably 0 to 3, more preferably 0 to 2, even more preferably 0 to 1.

[0035] While A_1 through A_{10} each independently represent a carbon atom or a nitrogen atom, the total number of nitrogen atoms contained as A_1 through A_{10} is preferably 0 to 6, more preferably 0 to 4, even more preferably up to 2.

[0036] In terms of carrier transport properties and chemical stability, the compound (1) is preferably a compound represented by formula (2):

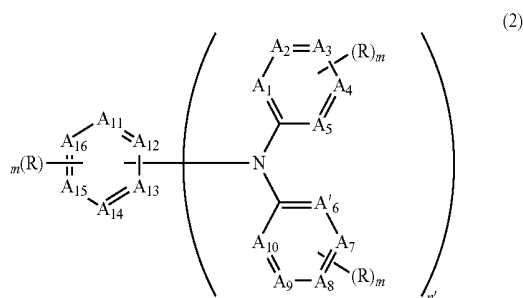

[0037] In formula (2), $A_2, A_3, A_4, A_5, A_7, A_8, A_9, A_{10}, A_{11}, A_{12}, A_{13}, A_{14}, A_{15}$, and A_{16} each independently represent a carbon atom or a nitrogen atom; A'_1 and A'_6 each represent a carbon atom having R'; R' represents a substituent having a carbon atom at a bonding position thereof; a plurality of Rs each independently represent a substituents; m represents an integer; and n' represents 2 or 3.

[0038] Having a substituent R' at the meta position of the 6-membered aromatic rings, the compound represented by formula (2) is preferred as being chemically stable and less likely to crystallize.


[0039] The carbon atom or nitrogen atom as represented by $A_2, A_3, A_4, A_5, A_7, A_8, A_9, A_{10}, A_{11}, A_{12}, A_{13}, A_{14}, A_{15}$, and A_{16} may have a substituent. Examples of the substituent that may be possessed by the carbon or nitrogen atom as $A_2, A_3, A_4, A_5, A_7, A_8, A_9, A_{10}, A_{11}, A_{12}, A_{13}, A_{14}, A_{15}$, and A_{16} include the substituent group A.

[0040] Preferred examples of R' and R in formula (2) are the same as those described with respect to formula (1). n' is preferably 2.

[0041] m is preferably 0 to 3, more preferably 0 to 2, even more preferably 0 to 1.

[0042] In formula (2), the n' arylamine moieties may be bonded to the 6-membered aromatic cyclic linking group at o-, m-, and p-positions. When they are in a p- or m-position relative to each other, the molecular strain is smaller to provide higher chemical stability. When they are in an o- or m-position relative to each other, the molecule is less symmetric and therefore less likely to crystallize. Accordingly, the n' arylamine moieties are preferably bonded to the 6-membered aromatic cyclic linking group at m-position relative to each other.

[0043] In terms of carrier transport properties and chemical stability, the compound of formula (2) is preferably a compound represented by formula (3):

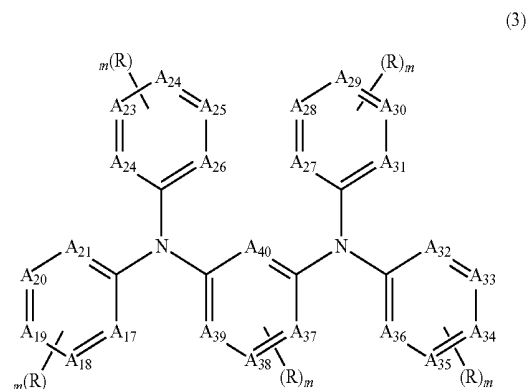

[0044] In formula (3), $A_{18}, A_{19}, A_{20}, A_{21}, A_{22}, A_{23}, A_{24}, A_{25}, A_{26}, A_{28}, A_{29}, A_{30}, A_{31}, A_{33}, A_{34}, A_{35}, A_{36}, A_{37}, A_{38}, A_{39}$, and A_{40} each independently represent a carbon atom or a nitrogen atom; A_{17}, A_{22}, A_{27} , and A_{32} each represent a carbon atom having R"; R" represents a substituent having an sp^3 carbon atom at a bonding position thereof; a plurality of Rs each independently represent a substituents; and m represents an integer.

[0045] $A_{18}, A_{19}, A_{20}, A_{21}, A_{23}, A_{24}, A_{25}, A_{26}, A_{28}, A_{29}, A_{30}, A_{31}, A_{33}, A_{34}, A_{35}, A_{36}, A_{37}, A_{38}, A_{39}$, and A_{40} each independently represent a carbon atom or a nitrogen atom, and A_{17}, A_{22}, A_{27} , and A_{32} each represent a carbon atom having R". The carbon atom or nitrogen atom represented by A_{17} to A_{40} each independently may include a substituent, and examples of the substituent includes the substituent group A.

[0046] In terms of chemical stability, carrier transport properties, and T_1 energy of the compound, the number of nitrogen atoms contained in A_{18} to A_{21}, A_{23} to A_{26}, A_{28} to A_{31} , and A_{33} to A_{40} is preferably 0 to 10, more preferably 0 to 5, even more preferably 0 to 2.

[0047] In terms of chemical stability, carrier transport properties, and T_1 energy, R in formula (3) is preferably an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to

18 carbon atoms, an amino group having 2 to 12 carbon atoms, an alkoxy group having 1 to 18 carbon atoms, an aryloxy group having 6 to 18 carbon atoms, a heterocyclic oxy group having 2 to 10 carbon atoms, an acyl group having 1 to 18 carbon atoms, an acylamino group having 1 to 18 carbon atoms, a sulfonylamino group having 1 to 18 carbon atoms, a sulfamoyl group having 2 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, an alkylthio group having 1 to 18 carbon atoms, a heterocyclic thio group having 2 to 10 carbon atoms, a sulfonyl group having 1 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, a silyl group having 3 to 18 carbon atoms, a silyloxy group having 3 to 18 carbon atoms, or a phosphoryl group having 1 to 18 carbon atoms; more preferably an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, an amino group having 2 to 12 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, a silyl group having 3 to 18 carbon atoms, or a phosphoryl group having 1 to 18 carbon atoms; even more preferably an alkyl group having 1 to 18 carbon atoms, a halogen atom, a cyano group, or a silyl group having 3 to 18 carbon atoms.

[0048] The substituent R" having an sp^3 carbon atom at the bonding position thereof is preferably an alkyl group having 1 to 18 carbon atoms, more preferably an alkyl group having 1 to 6 carbon atoms, even more preferably methyl, trifluoromethyl, ethyl, n-propyl, isopropyl, n-butyl, or t-butyl.

[0049] Examples of the substituent that may be possessed by R or R" include the substituent group A.

[0050] m is preferably 0 to 3, more preferably 0 to 2, even more preferably 0 or 1.


[0051] T_1 energy generally decreases as a pi-conjugated system is extended in the molecule, and T_1 energy of a molecule is decided by a partial structure where T_1 energy level is the lowest in the molecule. Therefore, T_1 energy of a molecule having even one moiety with an extended pi conjugated system is decided by that moiety. Therefore, it is generally unfavorable from the viewpoint of T_1 that the compound contains a biaryl structure or a fused aromatic ring structure in its molecule. Nevertheless, the compound may have a biaryl structure when the two benzene ring planes are in a twisted relationship as a result of, for example, steric hindrance because the T_1 energy is kept on a relatively high level.

[0052] The compound of formula (1), (2), or (3) preferably has a molecular weight of 350 to 1200, more preferably 400 to 1000, even more preferably 450 to 800. With the molecular weight falling within that range, the compound in film form exhibits good stability, and a high degree of purification is attained easily in view of solvent solubility and sublimation temperature. The compound preferably has a glass transition temperature (T_g), which provides a measure of stability in film form, of 60° to 450° C., more preferably 100° to 450° C., even more preferably 130° to 450° C.


[0053] T_g is determined by thermal analysis, such as differential scanning calorimetry (DSC) or differential thermal analysis (DTA), X-ray diffractometry (XRD), polarizing microscopic observation, and the like. The compound of formula (1), (2), or (3) preferably has as high purity as possible because a poorly purified compound would act as a trap in electron transport. The purity is determined by, for example, high performance liquid chromatography (HPLC). The purity as expressed in peak area ratio detected by measuring absorption intensity at 254 nm is preferably 95.0% or more,

more preferably 97.0% or more, even more preferably 99.0% or more, most preferably 99.9% or more.


[0054] Specific but non-limiting examples of the compound of formula (1) are shown below.

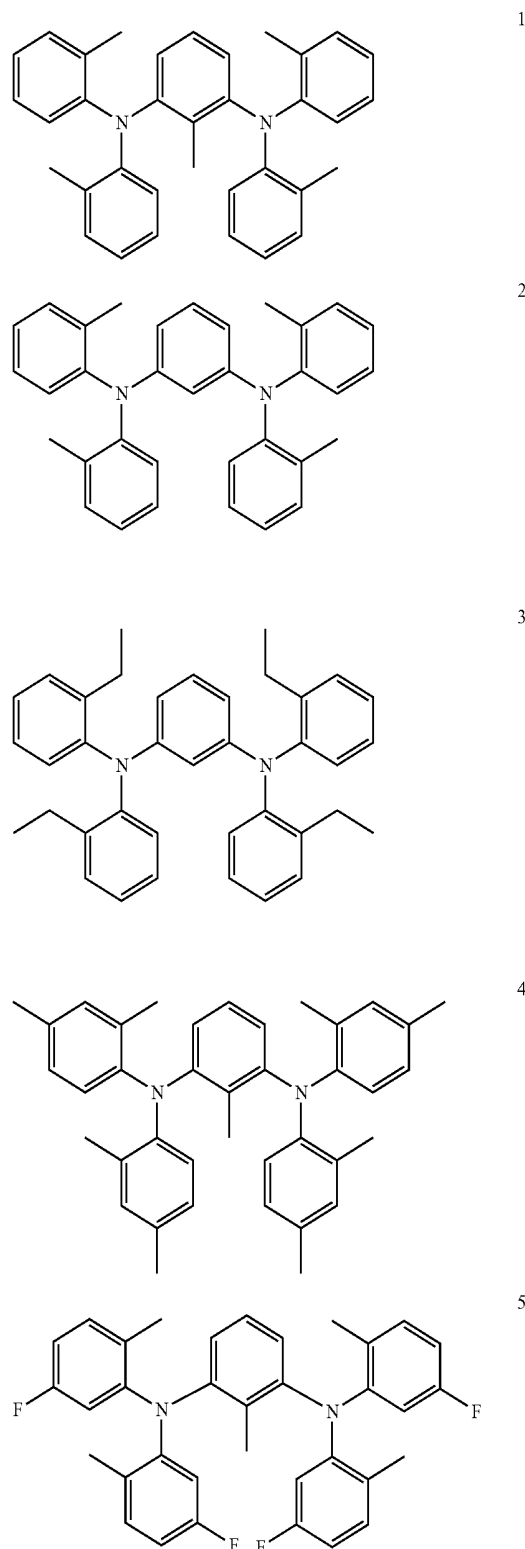


-continued

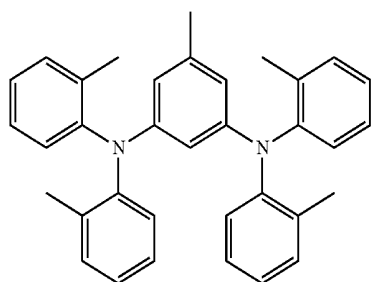


6

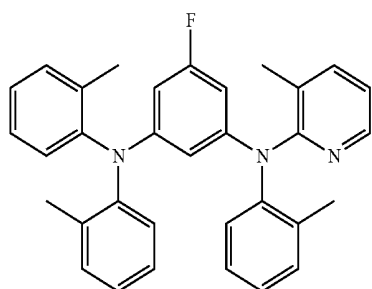


7

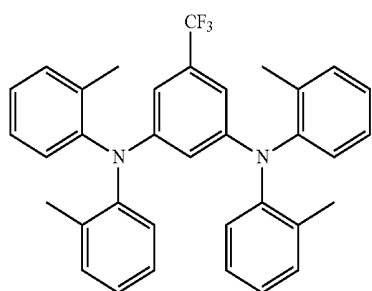

8

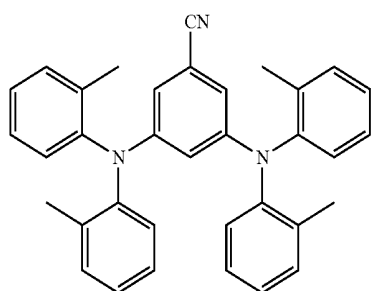


9

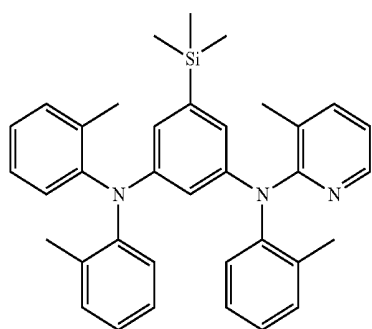


10


-continued

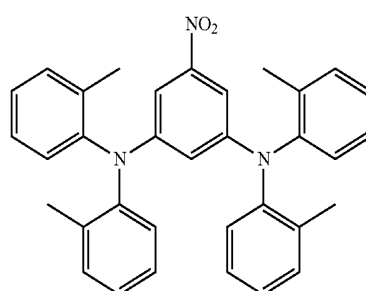


11

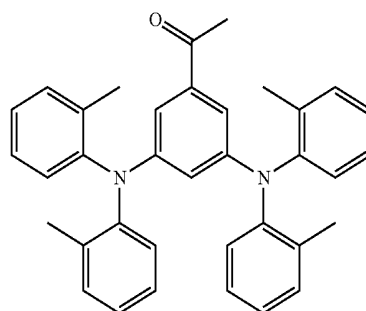


12

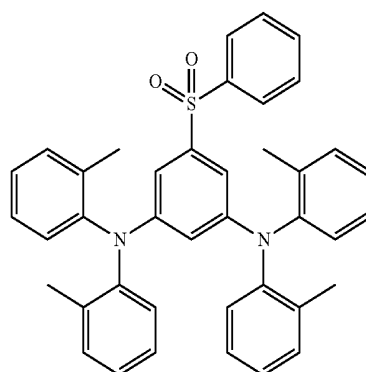

13






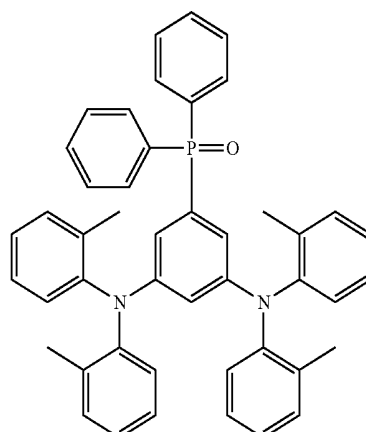


14





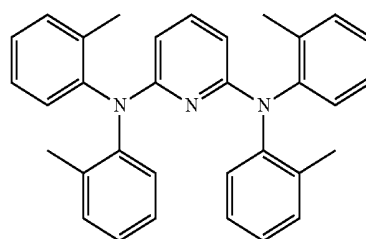


15

-continued

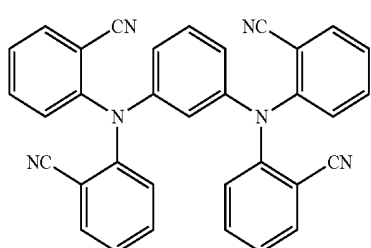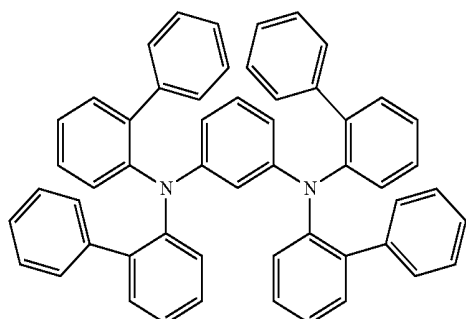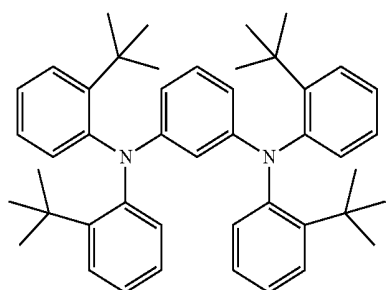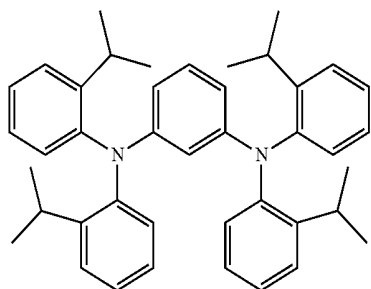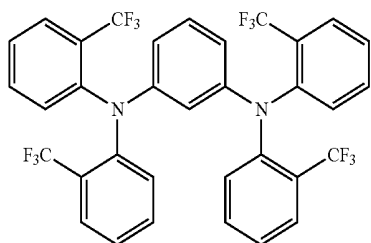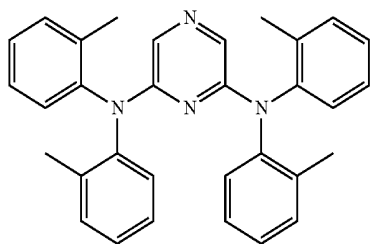

-continued

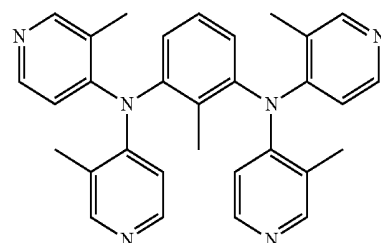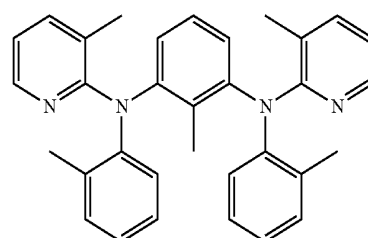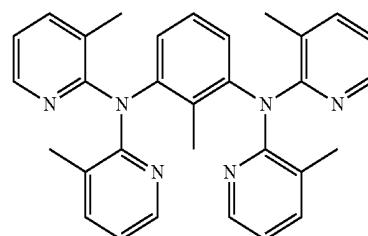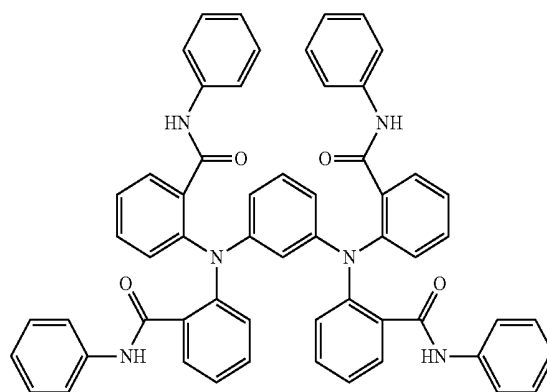

16

22

17

18

23

19

24


20

25


21

26


-continued




27

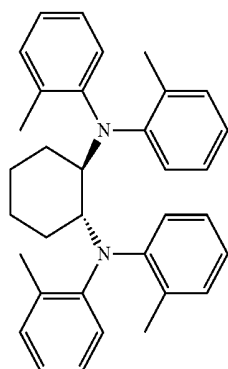


28

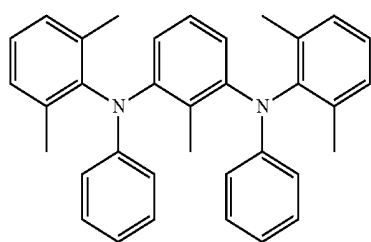

29

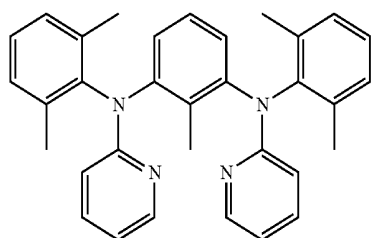


30

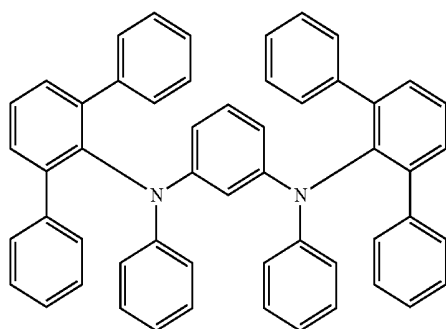


31


-continued

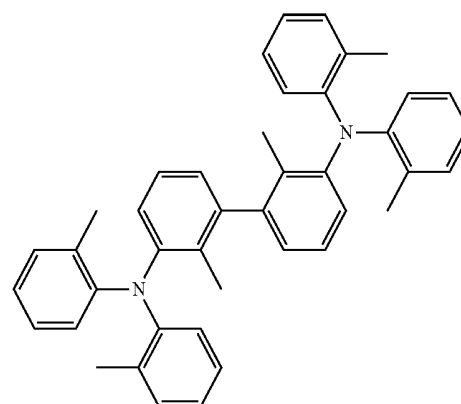


32

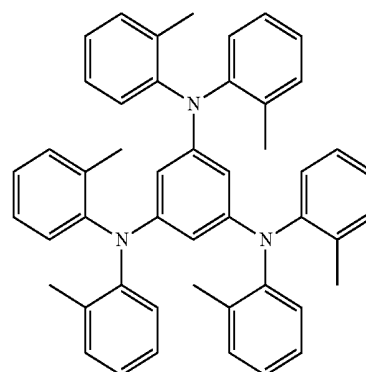

33

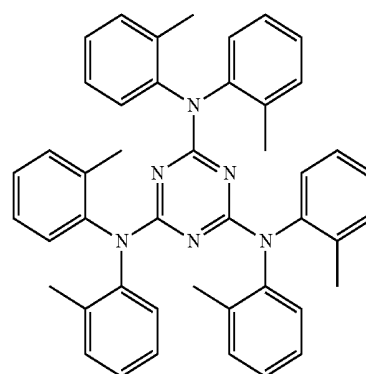


34

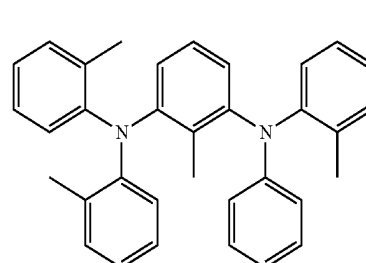

35

[0055] The compound of formula (1), (2), or (3) can be synthesized by a combination of various known synthesis processes. For example, N-arylation using a Pd catalyst or a Cu catalyst is well known as reported, e.g., in *Angew. Chem. Int. Ed.*, 2003, 42, 5400. For the synthesis of a triarylamine material having a substituent at the ortho position, it is preferred to adopt a high temperature reaction using a Cu catalyst (Ullmann coupling reaction) because a reaction hardly proceeds due to steric hindrance of the ortho positioned substituent.

ent. The reaction temperature is preferably 140° C. or higher, more preferably 160° C. or higher, even more preferably 180° C. or higher. A typical process for synthesizing the compound of formula (1), (2), or (3) is illustrated below.

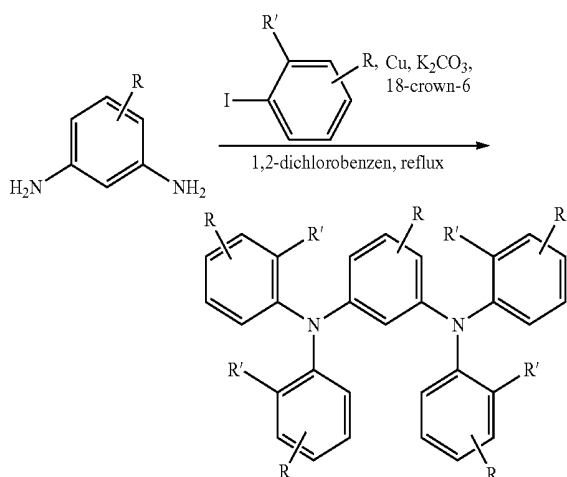

[0056] The compound of formula (1), (2), or (3) with a part or the whole of its hydrogen atoms replaced with deuterium is also useful as a preferred charge transport material, as is known with respect to carbazole materials disclosed in WO 08/117889.

[0057] An organic electroluminescent device containing the compound of formula (1), (2), or (3) will then be described.

<Organic Electroluminescent Device>

[0058] An organic electroluminescent device of the invention includes a cathode, an anode, and a light-emitting layer between the cathode and the anode, and the light-emitting layer contains the compound of formula (1). At least one of the cathode and the anode is preferably transparent from the nature of a electroluminescent device.

[0059] The organic electroluminescent device may have other organic layers than the light-emitting layer. A preferred layer structure of a plurality of organic layers is a stack of a hole transport layer, a light-emitting layer, and an electron transport layer from the side of the anode. A hole injection layer may be provided between the hole transport layer and the anode, and/or an electron transport intermediate layer may be provided between the light-emitting layer and the electron transport layer. A hole transport intermediate layer may be provided between the light-emitting layer and the hole transport layer. Likewise, an electron injection layer may be provided between the cathode and the electron transport layer. Each of these organic layers may include two or more sublayers.

[0060] Each organic layer is formed conveniently by dry film formation, such as vapor deposition and sputtering, transfer, printing, wet coating, inkjet printing, spraying, and so forth.

[0061] Each element in the electroluminescent device will be described.

(Substrate)

[0062] The above layer structure may be stacked above a substrate.

[0063] The substrate that may be used in the invention preferably does not scatter nor attenuate the light emitted from the organic layer.

(Anode)

[0064] The anode usually serves as an electrode supplying positive holes to the organic layer. The shape, structure, and size of the anode are not limited and are chosen from known electrode materials as appropriate to the use of the electroluminescent device. The anode is usually formed as a transparent electrode.

(Cathode)

[0065] The cathode usually functions to supply electrons to the organic layer. The shape, structure, size, etc. of the cathode are not particularly limited and selected from among known electrode materials as appropriate to the use of the device.

(Organic layers)

[0066] The organic electroluminescent device of the invention has at least one organic layer including a light-emitting layer. As previously stated, examples of the organic layers other than the light-emitting layer include a hole transport layer, an electron transport layer, a charge blocking layer, a hole injection layer, and an electron injection layer.

[0067] The light-emitting layer functions to accept holes from the anode, hole injection layer, or hole transport layer and electrons from the cathode, electron injection layer, or electron transport layer and allow the holes and electrons to recombine to emit light.

[0068] The details of the substrate, anode, cathode, organic layer(s), and light-emitting layer are described, e.g., in JP 2007-270736A and JP 2007-266458A, which are herein incorporated by reference.

<Luminescent Material>

[0069] The luminescent material that can be used in the invention may be either a phosphorescent material or a fluorescent material.


[0070] The light-emitting layer may contain two or more luminescent materials so as to improve color purity or to broaden the luminescent wavelength region. At least one of the luminescent materials is preferably a phosphorescent material.

[0071] It is preferred in terms of driving durability that the luminescent material is related to the above described host material by the relationship: $1.2 \text{ eV} > \Delta I_p > 0.2 \text{ eV}$ and/or the relationship: $1.2 \text{ eV} > \Delta E_a > 0.2 \text{ eV}$, wherein ΔI_p is the difference of I_p between the host material and the luminescent material, and ΔE_a is the difference in electron affinity (E_a) between the host material and the luminescent material.

[0072] It is preferred that the luminescent material contains a platinum complex or an iridium complex.

[0073] The details of fluorescent materials and phosphorescent materials are described, e.g., in JP-2008-270736A and JP-2007-266458A, which are herein incorporated by reference.

[0074] The platinum complex is preferably represented by formula (4):

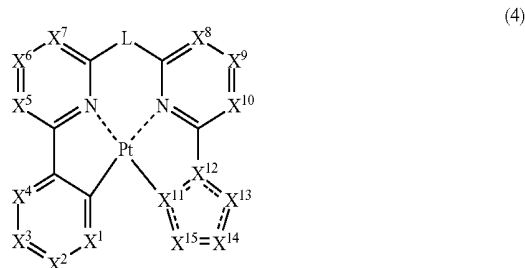

[0075] In formula (4), X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of them is a nitrogen atom; X^5 , X^6 , X^7 , X^8 , X^9 , and X^{10} each independently represent a carbon atom or a nitrogen atom; X^{11} and X^{12} each independently represent a carbon atom or a nitrogen atom; X^{13} , X^{14} , and X^{15} each independently represent a carbon atom, a nitrogen atom, an oxygen atom, or a sulfur atom; the number of nitrogen atoms contained in the 5-membered ring skeleton including X^{11} , X^{12} , X^{13} , X^{14} , and X^{15} is 2 or less nitrogen atoms; and L represents a single bond or a divalent linking group.

[0076] X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom. If possible, X^1 , X^2 , X^3 , and X^4 may independently optionally have a substituent selected from, for example, the substituent group A. Preferred substituents are an alkyl group, a perfluoroalkyl group, an aryl group, an aromatic heterocyclic group, a dialkylamino group, a diarylamino group, an alkoxy group, a cyano group, and a halogen atom; more preferably an alkyl group, a perfluoroalkyl group, an aryl group, a dialkylamino group, a cyano group, and a fluorine atom; even more preferably an alkyl group, a trifluoromethyl group, and a fluorine atom. If possible, the substituents may be connected to each other to form a fused ring.

[0077] While at least one of X^1 , X^2 , X^3 , and X^4 is a nitrogen atom, the number of nitrogen atoms contained in the ring skeleton formed of them is preferably 1 or 2, more preferably 1. The position of the nitrogen atom is preferably, but not limited to, X^2 and/or X^3 , more preferably X^3 .

[0078] In formula (4), examples of the 6-membered ring including X^1 , X^2 , X^3 , and X^4 together with the two carbon atoms include pyridine, pyrazine, pyrimidine, pyridazine, and triazine, preferably pyridine, pyrazine, pyrimidine, and pyridazine, more preferably pyridine. Compared with a benzene ring, a pyridine, pyrazine, pyrimidine, or pyridazine ring (particularly a pyridine ring) is desirable because the hydrogen atom at the position where to bond a metal atom to form a metal-carbon bond exhibits higher acidity, which favors to the formation of a metal complex.

[0079] X^5 , X^6 , X^7 , X^8 , X^9 , and X^{10} each independently represent a carbon atom or a nitrogen atom. Preferably, X^5 , X^6 , X^7 , X^8 , X^9 , and X^{10} each represent a carbon atom. If possible, X^5 , X^6 , X^7 , X^8 , X^9 , and X^{10} may independently optionally have a substituent selected from, for example, the substituent group A. Preferred substituents are an alkyl group, a perfluoroalkyl group, an aryl group, an aromatic heterocyclic group, a dialkylamino group, a diarylamino group, an alkoxy group, a cyano group, and a halogen atom; more preferably an alkyl group, a perfluoroalkyl group, an aryl

group, a dialkylamino group, a cyano group, and a fluorine atom; even more preferably an alkyl group, a dialkylamino group, a trifluoromethyl group, and a fluorine atom. If possible, the substituents may be connected to each other to form a fused ring.

[0080] X^{11} and X^{12} each independently represent a carbon atom or a nitrogen atom. It is preferred that either one of X^{11} and X^{12} is a carbon atom with the other being a nitrogen atom.

[0081] X^{13} , X^{14} , and X^{15} each independently represent a carbon atom, a nitrogen atom, an oxygen atom, or a sulfur atom, preferably a carbon atom or a nitrogen atom.

[0082] The number of nitrogen atoms contained in the 5-membered ring skeleton composed of X^{11} , X^{12} , X^{13} , X^{14} , and X^{15} is 2 or less (0, 1, or 2), preferably 1 or 2, more preferably 2. If possible, X^{11} , X^{12} , X^{13} , X^{14} , and X^{15} may independently optionally have a substituent selected from, for example, the substituent group A. Preferred substituents are an alkyl group, a perfluoroalkyl group, an aryl group, an aromatic heterocyclic group, a dialkylamino group, a diarylamino group, an alkoxy group, a cyano group, and a halogen atom; more preferably an alkyl group, a perfluoroalkyl group, an aryl group, a dialkylamino group, a cyano group, and a fluorine atom; even more preferably an alkyl group, a cyano group, a trifluoromethyl group, and a fluorine atom. If possible, the substituents may be connected to each other to form a fused ring.


[0083] The bonds between adjacent two of X^{11} , X^{12} , X^{13} , X^{14} , and X^{15} may be any combination of a single bond and a double bond. Examples of the 5-membered ring composed of X^{11} , X^{12} , X^{13} , X^{14} , and X^{15} include pyrrole, pyrazole, imidazole, furan, and thiophene; more preferably pyrrole, pyrazole, and imidazole; even more preferably pyrrole and pyrazole. The metal complex in which the 5-membered ring composed of X^{11} , X^{12} , X^{13} , X^{14} , and X^{15} is a pyrrole, pyrazole, or imidazole ring (particularly a pyrrole or pyrazole ring) exhibits improved stability.

[0084] L represents a single bond or a divalent linking group. Examples of the divalent linking group as represented by L include an alkylene group (e.g., methylene, ethylene, or propylene), an arylene group (e.g., phenylene or naphthalenediyl), a heteroarylene group (e.g., pyridinediyl or thiophenediyl), an imido group —NR— (e.g., phenylimino), an oxy group —O—, a thio group —S—, a phosphinylidene group —PR— (e.g., phenylphosphinylidene), a silylene group —SiRR'— (e.g., dimethylsilylene or diphenylsilylene), and a combination thereof. The linking group may optionally have a substituent selected from, for example, the substituent group A.

[0085] L is preferably a single bond, an alkylene group, an arylene group, a heteroarylene group, an imino group, an oxy group, a thio group, or a silylene group; more preferably a single bond, an alkylene group, an arylene group, or an imino group; even more preferably a single bond, an alkylene group, or an arylene group; still more preferably a single bond, a methylene group, or a phenylene group, particularly preferably a single bond or a di-substituted methylene group; still more preferably a single bond, a dimethylmethylene group, a diethylmethylene group, diisobutylmethylene group, a dibenzylmethylene group, an ethylmethylmethylene group, a methylpropylmethylene group, an isobutylmethylmethylene group, a diphenylmethylene group, a methylphenylmethylene group, a cyclohexanediyl group, a cyclopentanediiyl group, a fluorenediyl group, or a fluoromethylmethylene group; still more preferably a single bond, a dimethylmeth-


ylene group, a diphenylmethylene group, or a cyclohexanediyl group; and most preferably a dimethylmethylene group or a diphenylmethylene group.

[0086] Typical, but non-limiting, examples of the divalent linking group are shown below.

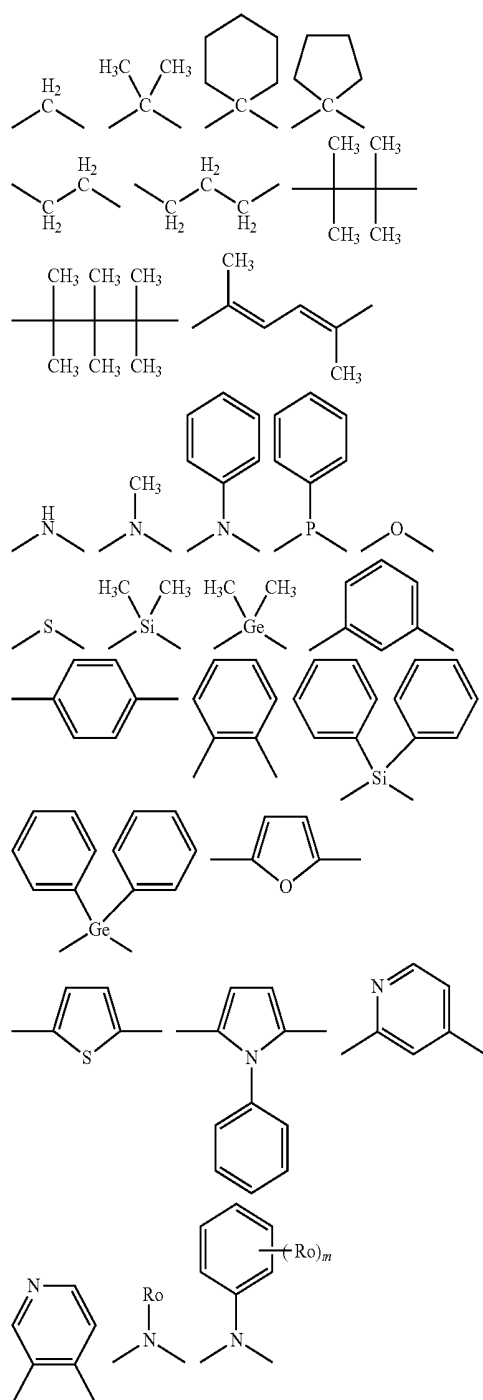

[0087] R_0 represents a substituent selected from the substituent group A, preferably an alkyl group, more preferably an alkyl group having 1 to 6 carbon atoms; and m represents an integer of 1 to 5, preferably 2 to 5, even more preferably 2 or 3.

[0088] The platinum complex of formula (4) is preferably represented by formula (5):

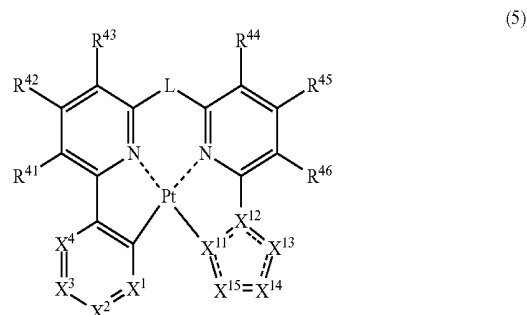

[0089] In formula (5), X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of X^1 , X^2 , X^3 , and X^4 is a nitrogen atom; R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each independently represent a hydrogen atom or a substituent; X^{11} and X^{12} each independently represent a carbon atom or a nitrogen atom; X^{13} , X^{14} , and X^{15} each independently represent a carbon atom, a nitrogen atom, an oxygen atom, or a sulfur atom; the number of nitrogen atoms contained in the 5-membered ring skeleton including X^{11} , X^{12} , X^{13} , X^{14} , and X^{15} is 2 or less nitrogen atoms; and L represents a single bond or a divalent linking group.

[0090] Preferred ranges of X^1 , X^2 , X^3 , X^4 , X^{11} , X^{12} , X^{13} , X^{14} , X^{15} , and L in formula (5) are the same as those for X^1 , X^2 , X^3 , X^4 , X^{11} , X^{12} , X^{13} , X^{14} , X^{15} , and L in formula (4).

[0091] In formula (5), R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each independently represent a hydrogen atom or a substituent. The substituent represented by R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , or R^{46} is selected from the substituent group A. If possible, R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} may be connected to each other to form a ring.


[0092] R^{41} and R^{46} are each preferably a hydrogen atom, an alkyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, an acyl group, an alkoxycarbonyl group, an alkylthio group, a sulfonyl group, a hydroxyl group, a halogen atom, a cyano group, a nitro group, or a heterocyclic group; more preferably a hydrogen atom, an alkyl group, an aryl group, a halogen atom, a cyano group, or a heterocyclic group; even more preferably a hydrogen atom, a methyl group, a *t*-butyl group, a trifluoromethyl group, a phenyl group, a fluorine atom, a cyano group, or a pyridyl group; still more preferably a hydrogen atom, a methyl group, or a fluorine atom; and most preferably a hydrogen atom.

[0093] The preferred ranges of R^{43} and R^{44} are the same as those recited for R^{41} and R^{46} .

[0094] R^{42} and R^{45} are each preferably a hydrogen atom, an alkyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, an alkylthio group, an arylthio group, a halogen atom, a cyano group, or a heterocyclic group; more preferably a hydrogen atom, an alkyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, a halogen atom, or a heterocyclic group; even more preferably a hydrogen atom, an alkyl group, an amino group, an alkoxy group, a halogen atom, or a heterocyclic group; still more preferably a hydrogen atom, a methyl group, a *t*-butyl group, a dialkylamino group, a diphenylamino group, a methoxy group, a phenoxy group, a fluorine atom, an imidazolyl group, a pyr-

rolyl group, or a carbazolyl group; particularly preferably a hydrogen atom, a fluorine atom, or a methyl group; and most preferably a hydrogen atom.

[0095] A preferred embodiment of the platinum complex of formula (5) is represented by formula (5a-1):



(5a-1)

[0096] In formula (5a-1), X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of X^1 , X^2 , X^3 , and X^4 is a nitrogen atom; R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each independently represent a hydrogen atom or a substituent; X^{53} , X^{54} , and X^{55} each independently represent a carbon atom or a nitrogen atom; and the number of nitrogen atoms contained in the 5-membered ring skeleton including X^{53} , X^{54} , and X^{55} is 1 or 2; and L represents a single bond or a divalent linking group.


[0097] The preferred ranges of X^1 , X^2 , X^3 , X^4 , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , and L in formula (5a-1) are the same as those in formula (5).

[0098] X^{53} , X^{54} , and X^{55} each independently represent a carbon atom or a nitrogen atom. If possible, X^{53} , X^{54} , and X^{55} may independently optionally have a substituent selected from, for example, the substituent group A. Preferred substituents are an alkyl group, a perfluoroalkyl group, an aryl group, an aromatic heterocyclic group, a dialkylamino group, a diarylamino group, an alkoxy group, a cyano group, and a halogen atom; more preferably an alkyl group, a perfluoroalkyl group, an aryl group, a dialkylamino group, a cyano group, and a fluorine atom; even more preferably an alkyl group, a trifluoromethyl group, and a fluorine atom. If possible, the substituents may be connected to each other to form a fused ring.

[0099] In formula (5a-1), the number of nitrogen atoms contained in the 5-membered ring skeleton including X^{53} , X^{54} , and X^{55} is 1 or 2, preferably 2.

[0100] Examples of the 5-membered ring including X^{53} , X^{54} , and X^{55} together with the carbon atom and the nitrogen atom include pyrrole, pyrazole, and imidazole rings, more preferably pyrrole, pyrazole, and imidazole ring, even more preferably pyrrole and pyrazole rings; and most preferably a pyrazole ring.

[0101] The platinum complex of formula (5a-1) is preferably represented by formula (5a-2):




(5a-2)

[0102] In formula (5a-2), X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of X^1 , X^2 , X^3 , and X^4 is a nitrogen atom; R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each independently represent a hydrogen atom or a substituent; X^{54} and X^{55} each independently represent a carbon atom or a nitrogen atom; and the number of nitrogen atoms contained in the 5-membered ring skeleton including X^{54} and X^{55} is 1 or 2; R^{75} represents a hydrogen atom or a substituent; and L represents a single bond or a divalent linking group.

[0103] The preferred ranges of X^1 , X^2 , X^3 , X^4 , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , R^{53} , R^{54} , and L in formula (5a-2) are the same as those recited with respect to formula (5a-1).

[0104] R^{75} represents a hydrogen atom or a substituent. The substituent is selected from, for example, the substituent group A. R^{75} is preferably a hydrogen atom, an alkyl group, a perfluoroalkyl group, an aryl group, an aromatic heterocyclic group, a dialkylamino group, a diarylamino group, an alkoxy group, a cyano group, or a halogen atom; more preferably a hydrogen atom, an alkyl group, a perfluoroalkyl group, an aryl group, a dialkylamino group, a cyano group, or a fluorine atom; even more preferably a hydrogen atom, an alkyl group, a trifluoromethyl group, a cyano group, or a fluorine atom; and most preferably a cyano group, a fluorine atom, or a hydrogen atom. If possible, the substituent may be connected to the substituent of X^{54} or X^{53} to form a fused ring.

[0105] The platinum complex of formula (5a-2) is preferably represented by formula (5a-3):



(5a-3)


[0106] In formula (5a-3), X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom; R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each independently represent a hydro-

gen atom or a substituents; X^{54} and X^{55} each independently represent a carbon atom or a nitrogen atom; and the number of nitrogen atoms contained in the 5-membered ring skeleton including X^{54} and X^{55} is 1 or 2; R^{75} represents a hydrogen atom or a substituents; and L represents a single bond or a divalent linking group.

[0107] The preferred ranges of X^1 , X^2 , X^4 , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , R^{53} , R^{54} , R^{75} , and L in formula (5a-3) are the same as those in formula (5a-2).

[0108] The number of nitrogen atoms contained in the 6-membered ring skeleton including X^1 , X^2 , X^4 , the nitrogen atom, and the two carbon atoms in formula (5a-3) is 1 to 3, preferably 1 or 2, even more preferably 1. The 6-membered ring is preferably pyridine, pyrazine, pyrimidine, pyridazine, or triazine; more preferably pyridine, pyrazine, pyrimidine, or pyridazine; even more preferably pyridine, pyrazine, or pyrimidine; and most preferably pyridine.

[0109] The platinum complex of formula (5a-3) is preferably represented by formula (5a-4) shown below. The platinum complex of formula (5a-4) is a novel compound.

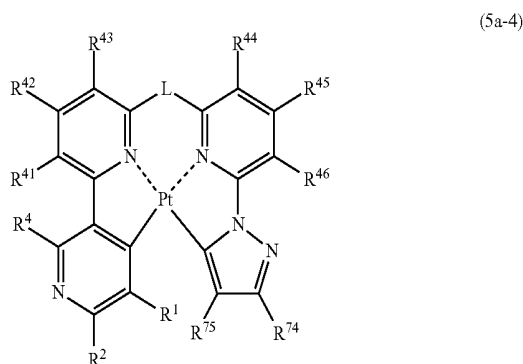

[0110] In formula (5a-4), R^1 , R^2 , R^4 , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , R^{74} , and R^{75} each independently represent a hydrogen atom or a substituents; and L represents a single bond or a divalent linking group.

[0111] The preferred ranges of R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , R^{75} , and L in formula (5a-4) are the same as those in formula (5a-3).

[0112] R^1 , R^2 , R^4 , and R^{74} each independently represent a hydrogen atom or a substituent. The substituent is selected from, for example, the substituent group A. If possible, R^4 and R^{41} may be taken together, and R^1 and R^2 may be taken together, each to form a fused ring. If possible, the substituents of R^1 and R^{75} may be taken together, in which case the total ligands form a cyclic structure.


[0113] R^1 is preferably a hydrogen atom, an alkyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, an acyl group, an alkoxycarbonyl group, an alkylthio group, a sulfonyl group, a hydroxyl group, a halogen atom, a cyano group, a nitro group, or a heterocyclic group; more preferably a hydrogen atom, an alkyl group, an aryl group, an alkoxy group, an aryloxy group, an alkylthio group, a halogen atom, or a cyano group; even more preferably a hydrogen atom, an alkyl group, a perfluoroalkyl group, an aryl group, a halogen atom, or a cyano group; still more preferably a hydrogen atom, a methyl group, a trifluoromethyl group, or a cyano group; particularly preferably a hydrogen atom, a trifluoromethyl group, a fluorine atom, or a cyano group.

[0114] R^2 and R^4 are each preferably a hydrogen atom, a halogen atom, a fluorine-substituted phenyl group, a fluorine-substituted alkoxy group, a perfluoroalkyl group, a cyano group, a nitro group, or an aryloxy group; more preferably a hydrogen atom, a fluorine atom, a fluorine-substituted phenyl group, a trifluoromethoxy group, a trifluoromethyl group, a cyano group, or a phenoxy group; even more preferably a hydrogen atom, a fluorine atom, a perfluorophenyl group, a trifluoromethyl group, a cyano group, or a phenoxy group substituted with an electrophilic substituent; particularly preferably a hydrogen atom or a fluorine atom; most preferably a fluorine atom.

[0115] R^{74} is preferably a hydrogen atom, an alkyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, an acyl group, an alkoxycarbonyl group, an alkylthio group, a sulfonyl group, a hydroxyl group, a halogen atom, a cyano group, a nitro group, or a heterocyclic group; more preferably a hydrogen atom, an alkyl group, an aryl group, an alkoxy group, an aryloxy group, an alkylthio group, a halogen atom, or a cyano group; even more preferably a hydrogen atom, an alkyl group, a perfluoroalkyl group, an aryl group, a halogen atom, or a cyano group; still more preferably a hydrogen atom, a methyl group, a trifluoromethyl group, a fluorine atom, or a cyano group; particularly preferably a hydrogen atom, a trifluoromethyl group, a fluorine atom, or a cyano group; most preferably a trifluoromethyl group or a cyano group.

[0116] The platinum complex of formula (5a-4) is not only useful as various materials in organic EL devices but also finds use as luminescent materials in other applications, such as display devices, displays, backlights, electrophotography, lighting sources, light sources for writing, reading, or exposure, signs, billboards, and interior accessories; materials for medical uses; fluorescent brightening agents, photographic materials, UV absorbing materials, laser dyes, recording medium materials, inkjet pigments, color filter dyes, color conversion filters, analyses, solar cell materials, and organic thin film transistor materials.

[0117] A compound that functions as a ligand to provide the novel platinum complex represented by formula (5a-4) is represented by formula (5a-4') shown below. The compound of formula (5a-4') is a novel compound.

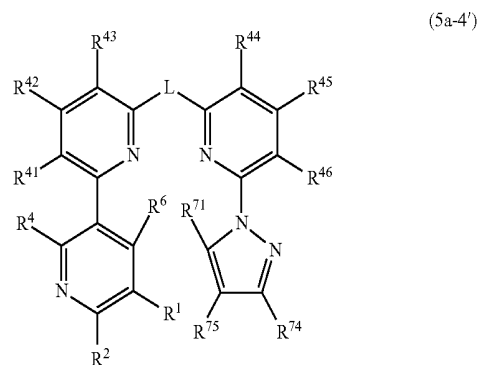


[0118] In formula (5a-4'), R^1 , R^2 , R^4 , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , R^{74} , and R^{75} each independently represent a hydrogen atom or a substituents; and L represents a single bond or a divalent linking group.

[0119] The preferred ranges of R^1 , R^2 , R^4 , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , R^{74} , R^{75} , and L in formula (5a-4') are the same

as those described with respect to formula (5a-4). R^6 and R^{71} each independently represent a hydrogen atom or a substituent selected from, for example, the substituent group A. R^6 and R^{71} are each preferably a halogen atom or a hydrogen atom, more preferably a hydrogen atom.

[0120] The compound of formula (5a-4') is useful as not only a ligand of the metal complex of formula (5a-4) but also an intermediate for fluorescent materials, charge transport materials, pharmaceuticals, and agricultural chemicals.

[0121] Another preferred embodiment of the platinum complex of formula (5) is represented by formula (5b-1):

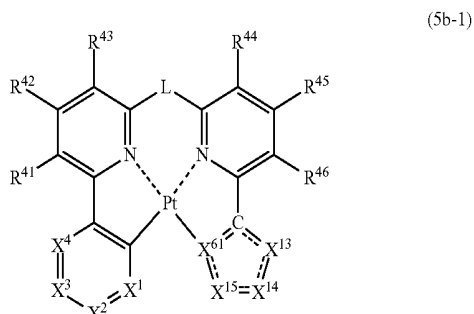

[0122] In formula (5b-1), X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of X^1 , X^2 , X^3 , and X^4 is a nitrogen atom; R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each independently represent a hydrogen atom or a substituent; X^{61} represents a carbon atom or a nitrogen atom; X^{13} , X^{14} , and X^{15} each independently represent a carbon atom, a nitrogen atom, an oxygen atom, or a sulfur atom; the number of nitrogen atoms contained in the 5-membered ring skeleton including X^{13} , X^{14} , X^{15} , X^{61} , and the carbon atom is 2 or less; and L represents a single bond or a divalent linking group.


[0123] The preferred ranges of X^1 , X^2 , X^3 , X^4 , X^{13} , X^{14} , X^{15} , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , and L in formula (5b-1) are the same as those described with respect to formula (5).

[0124] X^{61} represents a carbon atom or a nitrogen atom, preferably a nitrogen atom.

[0125] In formula (5b-1), the number of nitrogen atoms contained in the 5-membered ring skeleton composed of X^{13} , X^{14} , X^{15} , X^{61} , and the carbon atom is 0, 1, or 2, preferably 1 or 2, more preferably 2.

[0126] The bonds between adjacent two of X^{61} , the carbon atom, X^{13} , X^{14} , and X^{15} may be any combination of a single bond and a double bond. Examples of the 5-membered ring composed of X^{61} , the carbon atom, X^{13} , X^{14} , and X^{15} include pyrrole, pyrazole, imidazole, furan, and thiophene, more preferably pyrrole, pyrazole, and imidazole; even more preferably pyrazole.

[0127] The platinum complex of formula (5b-1) is preferably represented by formula (5b-2):

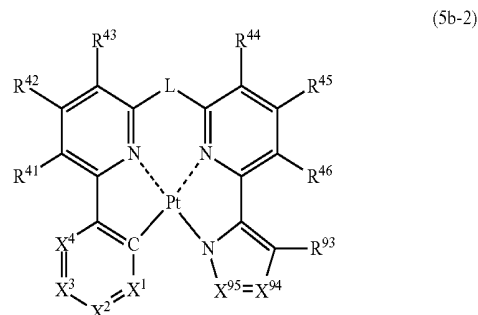

[0128] In formula (5b-2), X^1 , X^2 , X^3 , and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of X^1 , X^2 , X^3 , and X^4 is a nitrogen atom; R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , and R^{46} each independently represent a hydrogen atom or a substituent; X^{94} and X^{95} each independently represent a carbon atom or a nitrogen atom, provided that at least one of X^{94} and X^{95} is a carbon atom; R^{93} represents a hydrogen atom or a substituent; and L represents a single bond or a divalent linking group.


[0129] The preferred ranges of X^1 , X^2 , X^3 , X^4 , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , and L in formula (5b-2) are the same as those recited with respect to formula (5b-1).

[0130] X^{94} and X^{95} each independently represent a carbon atom or a nitrogen atom, provided that at least one of them is a carbon atom. Preferably, X^{94} is a carbon atom, and X^{95} is a nitrogen atom. If possible, X^{94} and X^{95} may each independently optionally have a substituent selected from, for example, the substituent group A. Preferred substituents are an alkyl group, a perfluoroalkyl group, an aryl group, an aromatic heterocyclic group, a dialkylamino group, a diarylamino group, an alkoxy group, a cyano group, and a halogen atom; more preferably an alkyl group, a perfluoroalkyl group, an aryl group, a dialkylamino group, a cyano group, and a fluorine atom; even more preferably an alkyl group, a trifluoromethyl group, and a fluorine atom. If possible, the substituents may be connected to each other to form a fused ring.

[0131] Examples of the 5-membered ring composed of X^{94} and X^{95} together with the nitrogen atom and the two carbon atoms include pyrrole, pyrazole, and imidazole, more preferably pyrazole and imidazole, even more preferably pyrazole.

[0132] R^{93} represents a hydrogen atom or a substituent. The substituent as R^{93} is selected from, for example, the substituent group A. R^{93} is preferably a hydrogen atom, an alkyl group, a perfluoroalkyl group, an aryl group, an aromatic heterocyclic group, a dialkylamino group, a diarylamino group, an alkoxy group, a cyano group, or a halogen atom; more preferably a hydrogen atom, an alkyl group, a perfluoroalkyl group, an aryl group, a dialkylamino group, a cyano group, or a fluorine atom; even more preferably a hydrogen atom, an alkyl group, a trifluoromethyl group, or a fluorine atom; and most preferably a fluorine atom or a hydrogen atom. If possible, the substituents of X^{94} and X^{95} may be connected to each other to form a fused ring.

[0133] The platinum catalyst of formula (5b-2) is preferably represented by formula (5b-3):

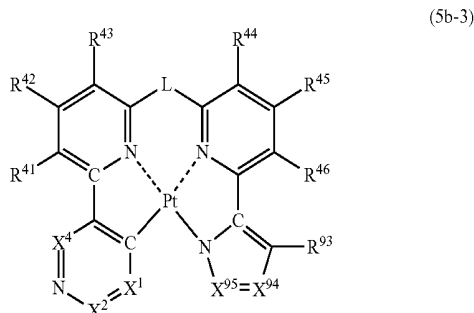

[0134] In formula (5b-3), X¹, X², and X⁴ each independently represent a carbon atom or a nitrogen atom, provided that at least one of X¹, X², and X⁴ is a nitrogen atom; R⁴¹, R⁴², R⁴³, R⁴⁴, R⁴⁵, and R⁴⁶ each independently represent a hydrogen atom or a substituent; X⁹⁴ and X⁹⁵ each independently represent a carbon atom or a nitrogen atom, provided that at least one of X⁹⁴ and X⁹⁵ is a carbon atom; R⁹³ represents a hydrogen atom or a substituent; and L represents a single bond or a divalent linking group.






[0135] The preferred ranges of X¹, X², X⁴, X⁹⁴, R⁴¹, R⁴², R⁴³, R⁴⁴, R⁴⁵, R⁴⁶, R⁹³, and L in formula (5b-3) are the same as those recited with respect to formula (5b-2).

[0136] The number of nitrogen atoms contained in the 6-membered ring skeleton composed of X¹, X², X⁴, the nitrogen atom, and the two carbon atoms in formula (5b-3) is 1 to 3, preferably 1 or 2, even more preferably 1. The 6-membered ring is preferably pyridine, pyrazine, pyrimidine, pyridazine, or triazine; more preferably pyridine, pyrazine, pyrimidine, or pyridazine; even more preferably pyridine, pyrazine, or pyrimidine; and most preferably pyridine.


[0137] The metal complex having the above described specific structure may be a low molecular compound, a high molecular compound in which the residue is bonded to the polymer main chain thereof (the high molecular compound preferably having a mass average molecular weight of 1,000 to 5,000,000, more preferably 5,000 to 2,000,000, even more preferably 10,000 to 1,000,000) or a high molecular compound having the metal complex having the above specific structure in the main chain (the high molecular compound preferably having a mass average molecular weight of 1,000 to 5,000,000, more preferably 5,000 to 2,000,000, even more preferably 10,000 to 1,000,000). The low molecular weight compound is preferred to the high molecular weight compound.

[0138] The high molecular compound may be a homopolymer or a copolymer that may be a random copolymer or a block copolymer. The copolymer may comprise a component having a light emitting function and/or a component having a charge transport function.

[0139] Preferred but non-limiting examples of the metal complex of formula (4) are shown below.




-continued

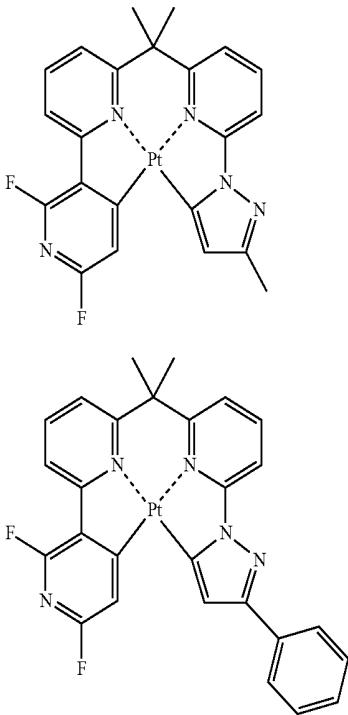

6


-continued

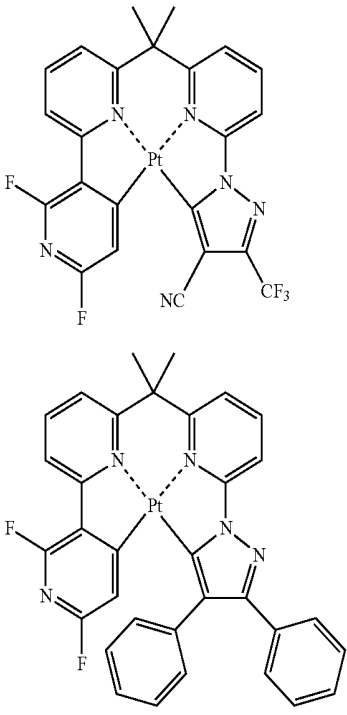

11


7

12




8

13






9

14




10

15




-continued




16

-continued




21


17




22




18




23




19




24




20



25




-continued




26

-continued




31

27





32





28

33





29

34








30

35




-continued

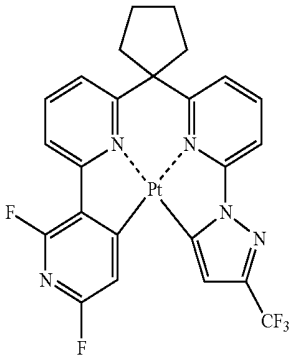


-continued

36


41

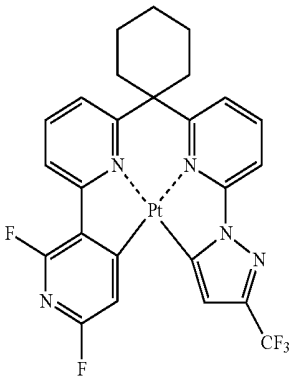


37

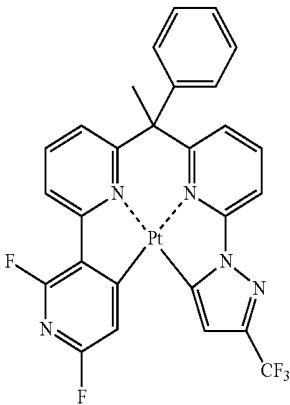

38





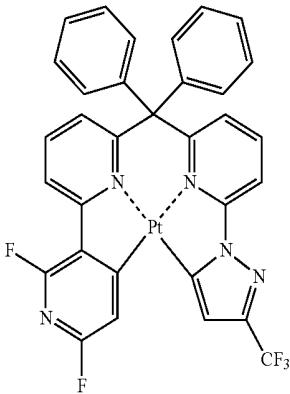


39

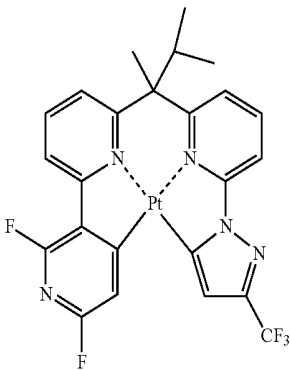

40


-continued

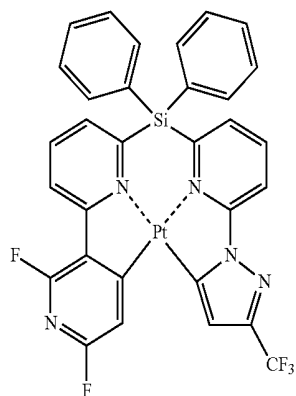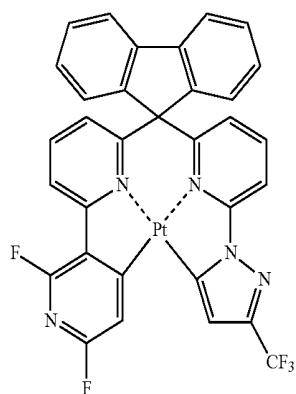

-continued


45

50

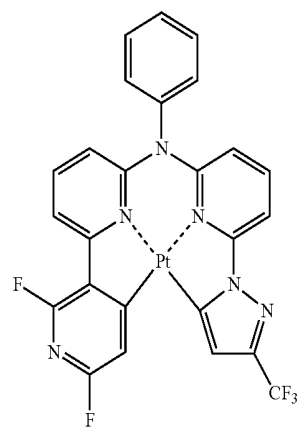


46

47




51

48








52

49




53

-continued




-continued

54




59

55




60

56




61

57




62

58

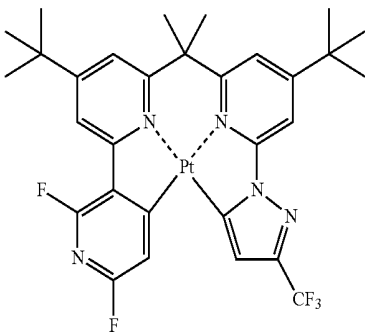


63

-continued

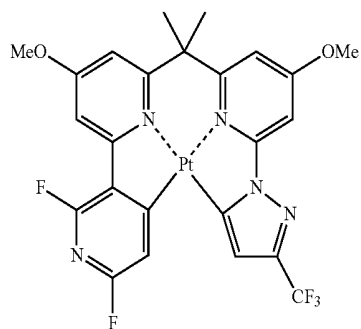


64


-continued

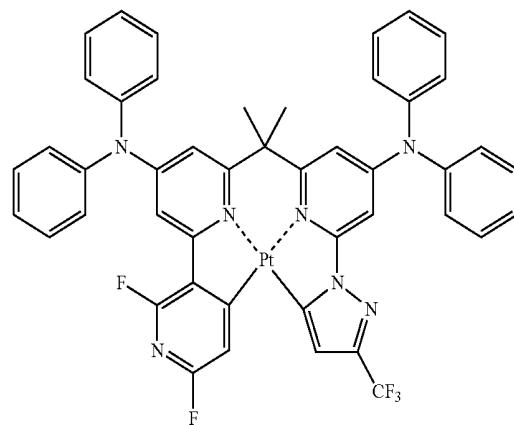


68

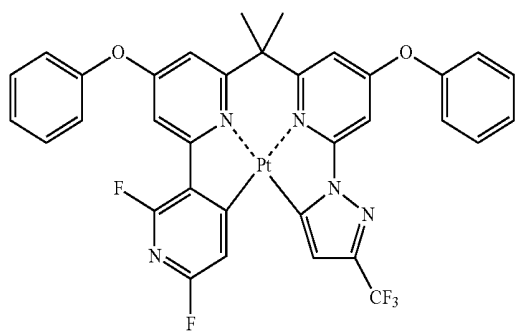


65

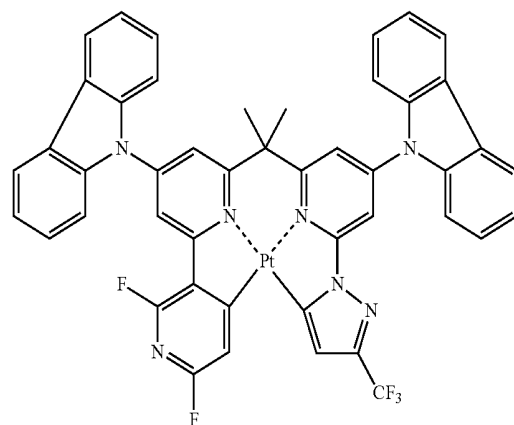


69

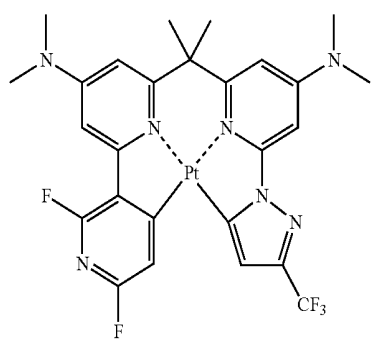


66



70

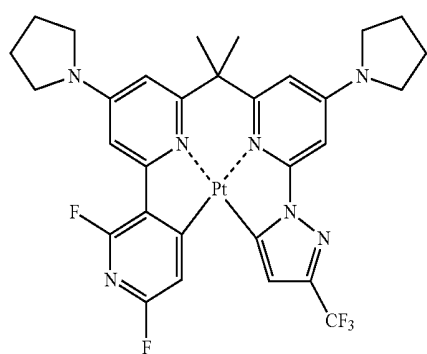


67




71


-continued




72




73



74




75




76


-continued




77




78



79








80




81

-continued




-continued

82




87

83




88

84




89

85




90

86




91


-continued




92




93



94




95




96


-continued




97




98



99








100








101


-continued



-continued




-continued




112


-continued




117




113




118




114




119




115



120




116




121


-continued




122




123



124




125




126


-continued




127




128



129








130








131


-continued

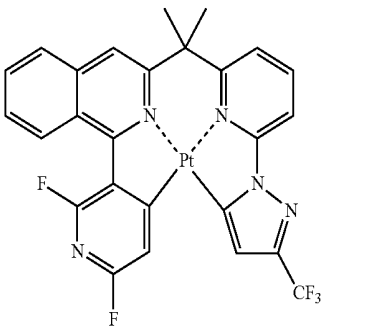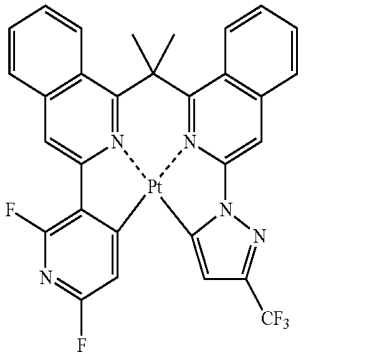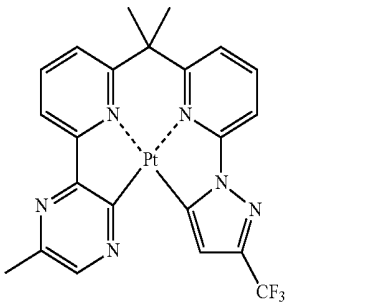


-continued

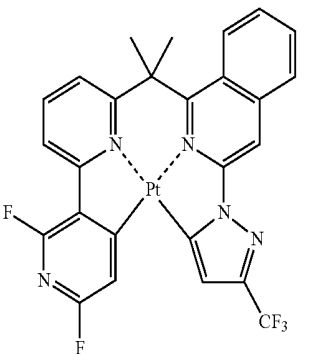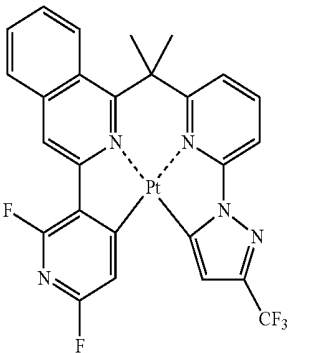


-continued




142




143



144




145

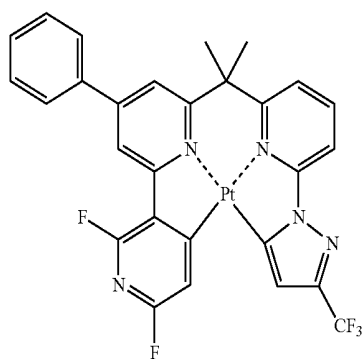


146


-continued

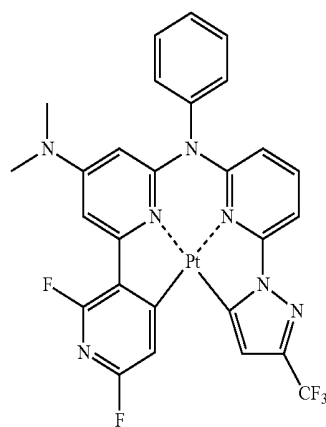


147

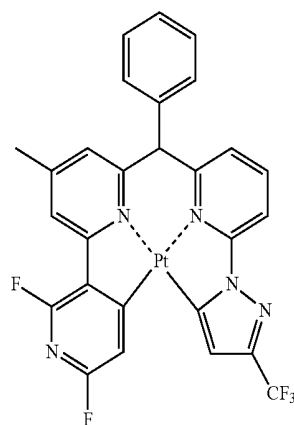

148

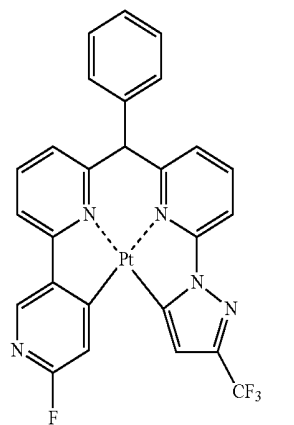


149

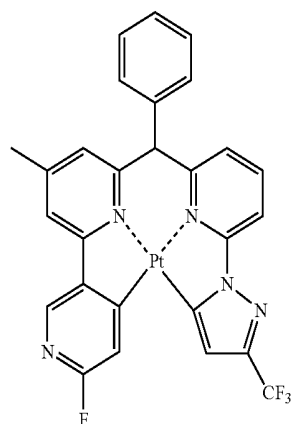


150

-continued




151


-continued

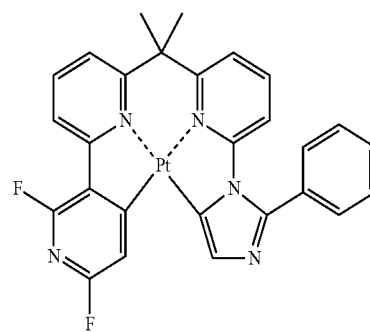


156




152

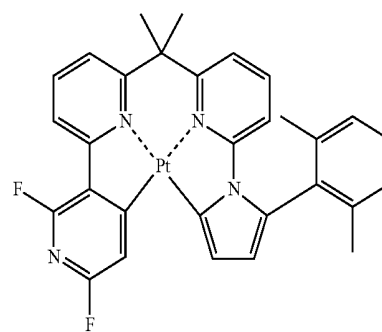


157




153




158




154



159




155




160

-continued




161


-continued




166




162




167




163




168




164



169








165








170

-continued



-continued



171

172

173

174

175

176






177

178






179

180

-continued



-continued



181

182

183

184

185

186






187

188






189

190






-continued








-continued




-continued




-continued




-continued




211




212



213




214




215


-continued




216




217



218








219








220


-continued




-continued

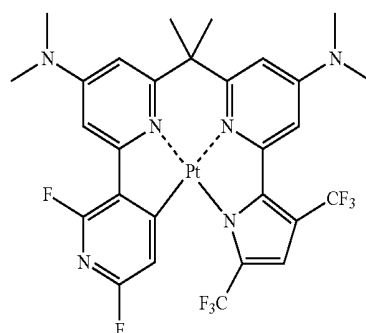


-continued

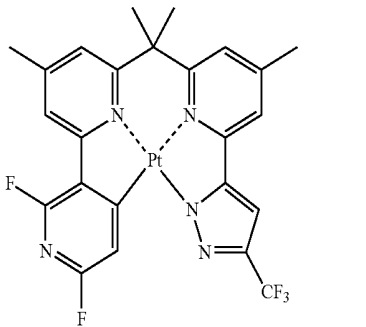


231

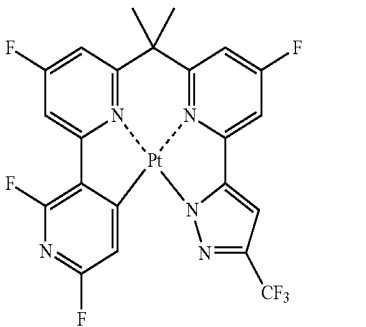


232

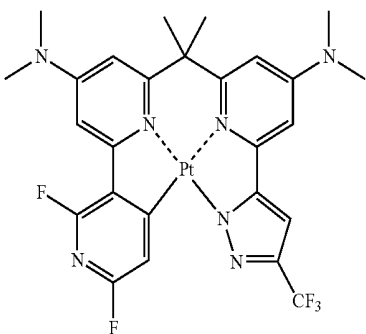

234

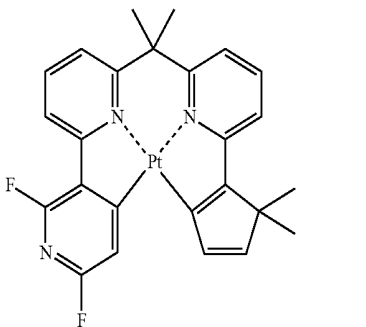


235

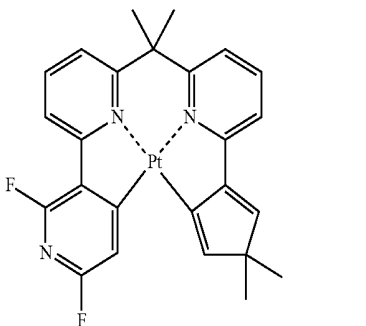


236


-continued




237




238



239







240






241

-continued

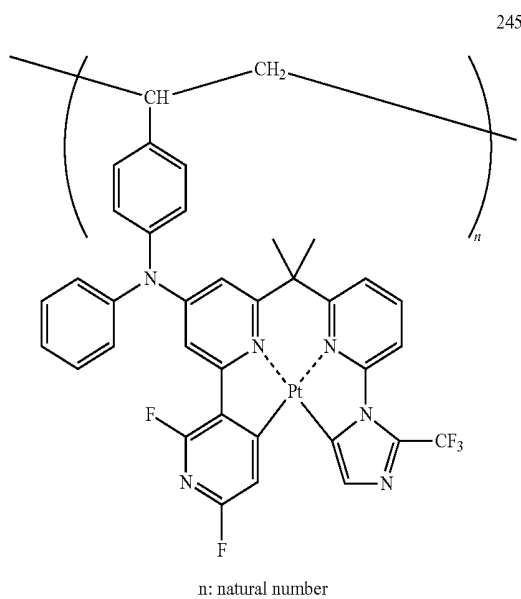


-continued

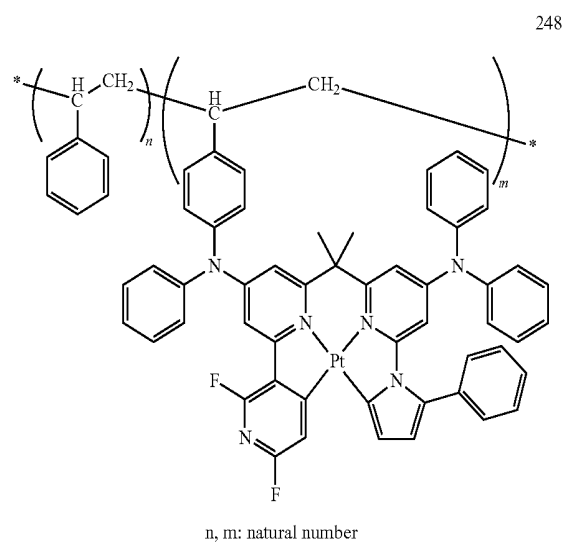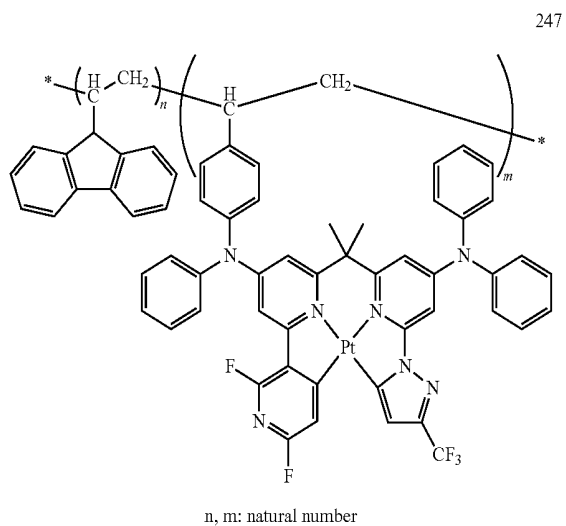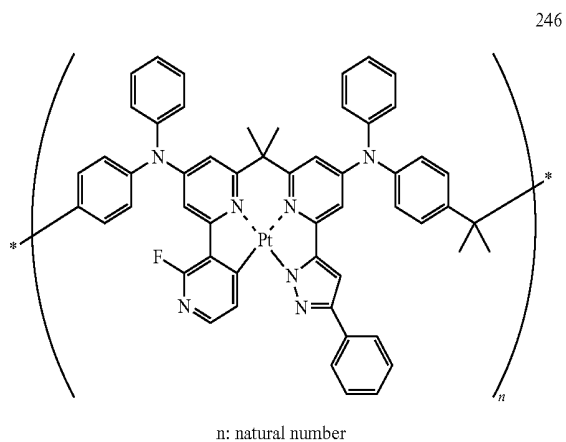

[0140] A method for manufacturing the metal complex of formula (4) will be described.

[0141] The metal complex of formula (4) is prepared by the reaction between a compound of formula (C-0) shown below (hereinafter also referred to as a ligand) and a platinum salt in a solvent.

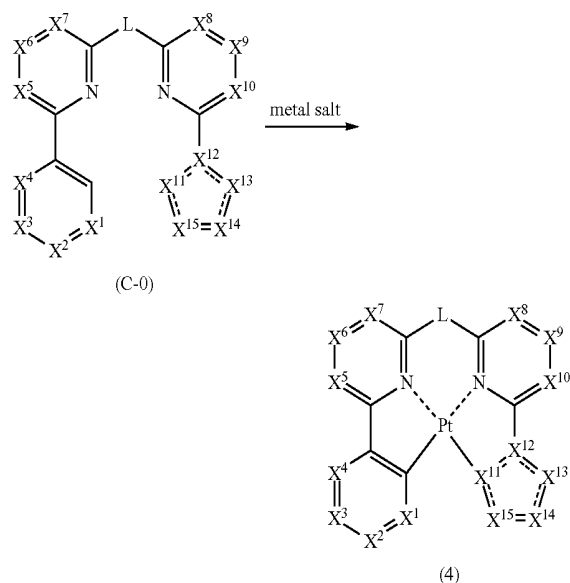

[0142] In formula (C-0), $X^1, X^2, X^3, X^4, X^5, X^6, X^7, X^8, X^9, X^{10}, X^{11}, X^{12}, X^{13}, X^{14}, X^{15}$, and L are as defined for formula (4), and the preferred ranges of $X^1, X^2, X^3, X^4, X^5, X^6, X^7, X^8, X^9, X^{10}, X^{11}, X^{12}, X^{13}, X^{14}, X^{15}$, and L are the same as those described with respect to formula (4).

[0143] In manufacturing the platinum complex, examples of the platinum salt that can be used in the reaction include those having divalent platinum, such as platinum chloride, platinum bromide, platinum iodide, platinum acetylacetonate, bis(benzonitrile)dichloroplatinum, bis(acetonitrile)dichloroplatinum, dichloro(1,5-cyclooctadiene)platinum, dibromobis(triphenylphosphine)platinum, dichloro(1,10-phenanthroline)platinum, dichlorobis(triphenylphosphine)platinum, ammonium tetrachloroplatinate, diamminedibromoplatinate, diamminedichloroplatinate, diamminediiodoplatinum, potassium tetrabromoplatinate, potassium tetrachloroplatinate, sodium tetrachloroplatinate, dimethylbis(dimethyl sulfoxide)platinum, dimethylbis(dimethyl sulfide)platinum, and dimethyl(bicyclo[2.2.1]hepta-2,5-diene)platinum.

[0144] Preferred of these platinum salts are platinum halides, such as platinum chloride, platinum bromide, and platinum iodide; nitrile complexes, such as bis(benzonitrile)dichloroplatinum and bis(acetonitrile)dichloroplatinum; and olefin complexes, such as dichloro(1,5-cyclooctadiene)platinum. More preferred of them are platinum halides, such as platinum chloride and platinum bromide; and nitrile complexes, such as bis(benzonitrile)dichloroplatinum and bis(acetonitrile)dichloroplatinum.

[0145] The platinum salt used in manufacturing the platinum complex may contain crystal water, a solvent for crystallization, or a coordinated solvent. The valence of platinum of the platinum salt is preferably, but not limited to, 2 or 0, more preferably 2.

[0146] In using a platinum salt containing one platinum atom per molecule in manufacturing the platinum complex, the amount of the platinum salt to be used in the formation of the platinum complex is usually 0.1 to 10 mol, preferably 0.5 to 5 mol, even more preferably 1 to 3 mol, per mole of the ligand. When in using a platinum salt containing n platinum atoms, the amount to be used is one nth of that recited above.

[0147] In manufacturing the platinum complex, examples of the solvent that can be used in the reaction between the platinum salt and the ligand include amides, such as N,N-dimethylformamide, formamide, and N,N-dimethylacetamide; nitriles, such as acetonitrile, propionitrile, butyronitrile, and benzonitrile; halogenated hydrocarbons, such as dichloromethane, 1,2-dichloroethane, chloroform, carbon tetrachloride, chlorobenzene, and o-dichlorobenzene; aliphatic hydrocarbons, such as pentane, hexane, octane, and decane; aromatic hydrocarbons, such as benzene, toluene, xylene, and mesitylene; ethers, such as diethyl ether, diisopropyl ether, butyl ether, tert-butyl methyl ether, 1,2-dimethoxyethane, tetrahydrofuran, and 1,4-dioxane; ketones, such as acetone, methyl ethyl ketone and methyl isobutyl ketone; alcohols, such as methanol, ethanol, 1-propanol, 2-propanol, tert-butyl alcohol, 2-methoxyethanol, 2-ethoxyethanol, ethylene glycol, and glycerol; and water.

[0148] Preferred of them are nitriles, such as acetonitrile, propionitrile, butyronitrile, and benzonitrile; aromatic hydrocarbons, such as benzene, toluene, xylene, and mesitylene; and alcohols, such as methanol, ethanol, 1-propanol, 2-propanol, tert-butyl alcohol, 2-methoxyethanol, 2-ethoxyethanol, ethylene glycol, and glycerol. Particularly preferred are nitriles, such as acetonitrile, propionitrile, butyronitrile, and benzonitrile, and aromatic hydrocarbons, such as benzene, toluene, xylene, and mesitylene.

[0149] These solvents may be used either individually or in combination of two or more thereof.

[0150] In manufacturing the platinum complex, the amount of the solvent to be used in the reaction is not limited as long as the reaction proceeds sufficiently but is preferably 1 to 200 times, more preferably 5 to 100 times, the volume of the ligand.

[0151] In manufacturing the platinum complex, in a case where the reaction between the platinum salt and the ligand is accompanied by production of an acidic substance, such as hydrogen halide, the reaction may be carried out in the presence of a basic substance. Examples of suitable basic substances include tertiary amines, such as triethylamine, diisopropylethylamine, pyridine, and 1,8-dimethylaminonaphthalene; metal alkoxides, such as sodium methoxide and sodium ethoxide; and inorganic bases, such as sodium hydroxide, potassium hydroxide, potassium carbonate, and sodium hydrogencarbonate.


[0152] In manufacturing the platinum complex, the reaction is preferably performed in an inert gas atmosphere, such as nitrogen or argon.

[0153] In manufacturing the platinum complex, while the reaction temperature, time, and pressure vary depending on the reactants, the solvent, and the like, the temperature is usually 20° to 300° C., preferably 50° to 250° C., more preferably 80° to 220° C.; the time is usually 30 minutes to 24 hours, preferably 1 to 12 hours, more preferably 2 to 10 hours; and the pressure is usually atmospheric pressure but, where necessary may be increased or decreased pressure.

[0154] In manufacturing the platinum complex, the heating means used to conduct the reaction include, but are not limited to, an oil bath, a mantle heater, and microwave heating.

[0155] The platinum complex thus produced may be isolated and purified where needed by, for example, column chromatography, recrystallization, reprecipitation, sublimation, and a combination thereof.

[0156] Of the platinum complexes of formula (4), those represented by formula (5a-1) may also be prepared in accordance with the following reaction scheme:

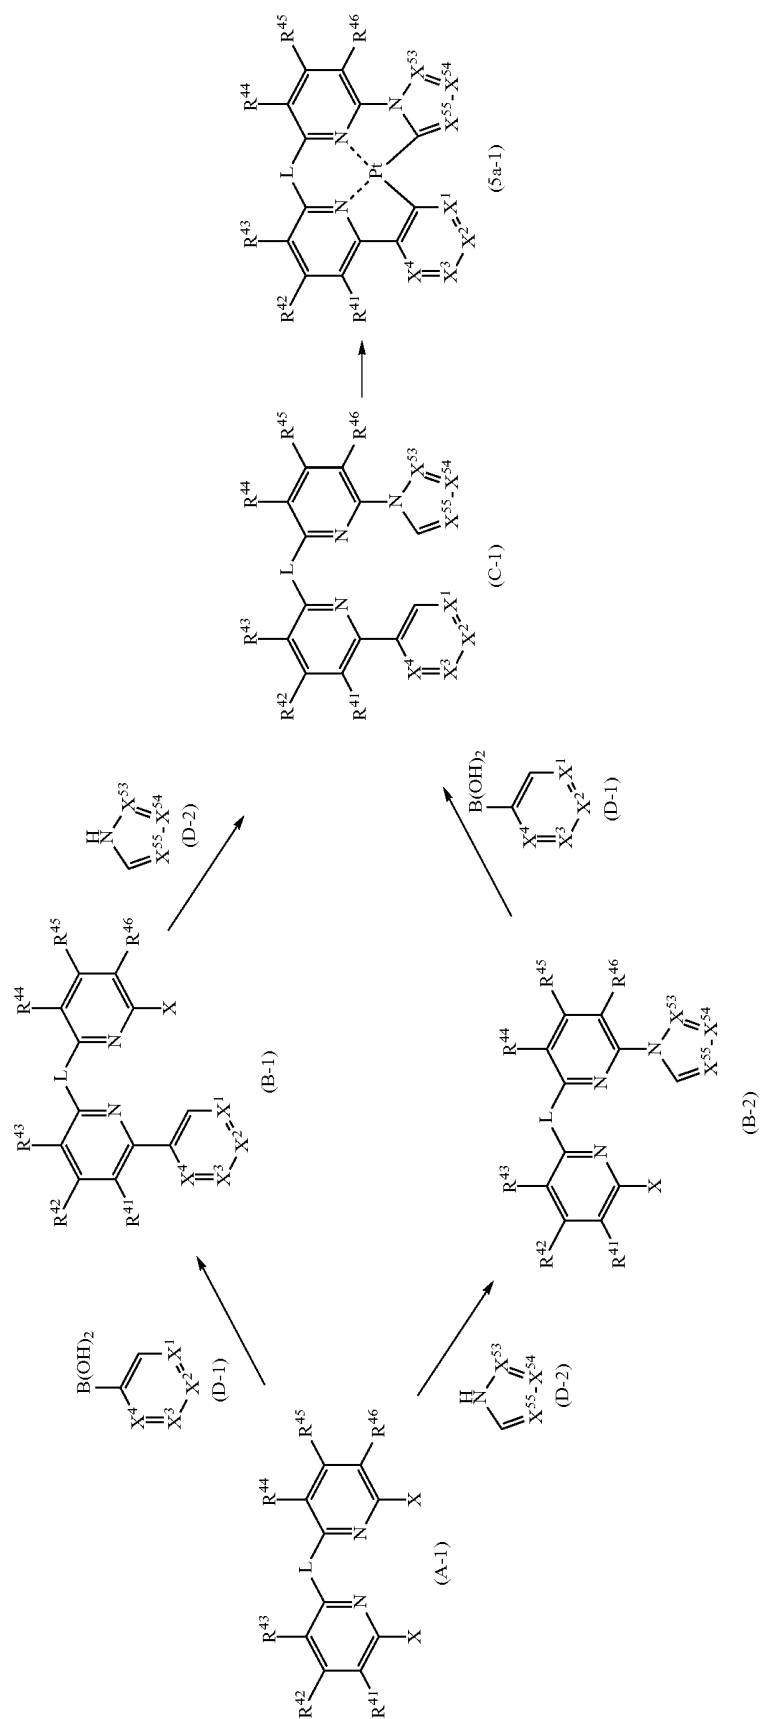

[0157] In the formula, X^1 , X^2 , X^3 , X^4 , X^{53} , X^{54} , X^{55} , R^{41} , R^{42} , R^{43} , R^{44} , R^{45} , R^{46} , and L are as defined for formula (5a-3).

[0158] The step of obtaining (B-1) from (A-1) and the step of obtaining (C-1) from (B-2) are carried out by following the method reported in, e.g., *Synth. Commun.*, 11, 513 (1981).

[0159] The step of obtaining (C-1) from (B-1) and the step of obtaining (B-2) from (A-1) are achieved in accordance with the method reported in, e.g., *Angew. Chem. Int. Ed.*, 42, 2051-2053 (2003).

[0160] The step of obtaining the platinum complex of formula (5a-1) from (C-1) is carried out by dissolving a compound (C-1) and 1 to 1.5 equivalents of platinum (II) chloride in benzonitrile and heating the reaction system at 130° C. to the refluxing temperature (i.e., the boiling point of benzonitrile, 191° C.) for 30 minutes to 4 hours while stirring. The platinum complex of formula (4) may be purified by recrystallization using chloroform, dichloromethane, toluene, xylene, acetonitrile, butyronitrile, benzonitrile, ethyl acetate, or the like, silica gel column chromatography, sublimation, and the like.

[0161] In a case where a defined substituent changes under some reaction conditions in the aforementioned synthesis, or where a defined substituent is unsuitable to effect the synthesis, the synthesis is easily accomplished by, for example, protection and deprotection of the functional group by referring, e.g., to T.W. Greene, *Protective Groups in Organic Synthesis*, John Wiley & Sons, Inc. (1981). Where necessary, the order of reaction steps, such as the step of introducing a substituent, may be changed appropriately.

[0162] The amount of the luminescent material in the light-emitting layer is usually 0.1% to 50% by mass based on the total mass of the materials making up the light-emitting layer. It is preferably 1% to 50% by mass, more preferably 2% to 40% by mass, in view of durability and external quantum efficiency.

[0163] The thickness of the light-emitting layer is preferably, but not limited to, 2 to 500 nm, more preferably 3 to 200 nm, even more preferably 5 to 100 nm, in view of external quantum efficiency.

<Host Material>

[0164] The host materials that can be used in the invention include not only the compounds of formulae (1), (2), and (3) but other compounds acting as a charge transport material or a hole transport material. Charge transporting host materials are preferred. Two or more host materials may be used in combination. For example, an electron transporting host material and a hole transporting host material may be used in combination. Examples of useful host materials other than the compounds of the invention include pyrroles, indoles, carbazoles, azaindoles, azacarbazoles, triazoles, oxazoles, oxadiazoles, pyrazoles, imidazoles, thiofenenes, polyarylanes, pyrazolines, pyrazolones, phenylenediamines, arylamines, amino-substituted chalcones, styrylanthracenes, fluorenones, hydrazones, stilbenes, silazanes, aromatic tertiary amine compounds, styrylamine compounds, porphyrin compounds; electrically conductive oligomers or polymers, such as polysilane compounds, poly(N-vinylcarbazole) and its derivatives, aniline copolymers, thiophene oligomers, and polythiophene; organic silanes, carbon film, pyridines, pyrimidines, triazines, anthraquinodimethanes, anthrones, diphenylquinones, thiopyrane dioxide derivatives, carbodiimides, fluorenylidene methanes, distyrylpyrazines, fluorine-

substituted aromatic compounds; heterocyclic tetracarboxylic acid anhydrides, such as naphthalenetetracarboxylic acid anhydride and perylenetetracarboxylic acid anhydride; and various metal complexes and derivatives thereof (having a substituent or a fused ring), such as metallophthalocyanines, 8-quinolinol metal complexes, metal complexes having benzoxazole or benzothiazole as a ligand.

[0165] In the light-emitting layer, it is preferred that the host material (e.g., the compound of formula (1), (2), or (3)) have a higher T_1 energy (lowest excited triplet energy) level than the above described phosphorescent material in terms of color purity, luminescence efficiency, and driving durability.

[0166] The host compound content is preferably, but not limited to, 15% to 99% by mass, more preferably 30% to 95% by mass, even more preferably 50% to 93% by mass, based on the total mass of materials making up the light-emitting layer in terms of luminescence efficiency and driving voltage. When the host material is a mixture of the compound of formula (1), (2), or (3) and other host compound(s), the proportion of the compound of formula (1), (2), or (3) in the total host material is preferably 30% to 100% by mass, more preferably 50% to 100% by mass, even more preferably at least 70% to 100% by mass.

(Hole Injection Layer, Hole Transport Layer)

[0167] The hole injection layer and the hole transport layer function to accept holes from the anode or from the side of the anode and transport the holes to the side of the cathode. Hole injection materials and hole transport materials that can be used in these layers may be either low molecular or high molecular compounds. Examples of suitable hole injection/transport materials include pyrrole derivatives, carbazole derivatives, triazole derivatives, oxazole derivatives, oxadiazole derivatives, imidazole derivatives, polyarylanes derivatives, pyrazoline derivatives, pyrazolone derivatives, phenylenediamine derivatives, arylamine derivatives, amino-substituted chalcone derivatives, styrylanthracene derivatives, fluorenone derivatives, hydrazone derivatives, stilbene derivatives, silazane derivatives, aromatic tertiary amine compounds, styrylamine compounds, phthalocyanine compounds, porphyrin compounds, thiophene derivatives, organic silane derivatives, carbon, and metal complexes, such as iridium complexes.

[0168] The hole injection or transport layer in the organic EL device may contain an electron accepting dopant. Examples of the electron accepting dopant include either organic or inorganic compound, which has ability to oxidize an organic compound.

[0169] Examples of the inorganic accepting dopant include metal halides, such as ferric chloride, aluminum chloride, gallium chloride, indium chloride, and antimony pentachloride, and metal oxides, such as vanadium pentoxide and molybdenum trioxide.

[0170] Suitable examples of the organic accepting dopant include compounds having a nitro group, a halogen atom, a cyano group, a trifluoromethyl group, etc. as a substituent, quinone compounds, acid anhydride compounds, and fullerene and its derivatives. Other useful organic accepting dopants are described in JP 6-212153A, JP 11-111463A, JP 11-251067A, JP 2000-196140A, JP 2000-286054A, JP 2000-315580A, JP 2001-102175A, JP 2001-160493A, JP 2002-252085A, JP 2002-56985A, JP 2003-157981A, JP 2003-217862A, JP 2003-229278A, JP 2004-342614A, JP 2005-72012A, JP 2005-166637A, and JP 2005-209643A.

[0171] Preferred of these accepting dopants are hexacyanobutadiene, hexacyanobenzene, tetracyanoethylene, tetracyanoquinodimethane, tetrafluorotetracyanoquinodimethane, p-fluoranil, p-chloranil, p-bromanil, p-benzoquinone, 2,6-dichlorobenzoquinone, 2,5-dichlorobenzoquinone, 1,2,4,5-tetracyanobenzene, 1,4-dicyanotetrafluorobenzene, 2,3-dichloro-5,6-dicyanobenzoquinone, p-dinitrobenzene, m-dinitrobenzene, o-dinitrobenzene, 1,4-naphthoquinone, 2,3-dichloronaphthoquinone, 1,3-dinitronaphthalene, 1,5-dinitronaphthalene, 9,10-anthraquinone, 1,3,6,8-tetranitrocarbazole, 2,4,7-trinitro-9-fluorenone, 2,3,5,6-tetracyanopyridine, and fullerene C60. More preferred of them are hexacyanobutadiene, hexacyanobenzene, tetracyanoethylene, tetracyanoquinodimethane, tetrafluorotetracyanoquinodimethane, p-fluoranil, p-chloranil, p-bromanil, 2,6-dichlorobenzoquinone, 2,5-dichlorobenzoquinone, 2,3-dichloronaphthoquinone, 1,2,4,5-tetracyanobenzene, 2,3-dichloro-5,6-dicyanobenzoquinone, and 2,3,5,6-tetracyanopyridine. Tetrafluorotetracyanoquinodimethane is particularly preferred.

[0172] The accepting dopants may be used either individually or as a mixture of two or more thereof. The amount of the accepting dopant is preferably, though dependent on the accepting dopant compound, 0.01% to 50% by mass, more preferably 0.05% to 20% by mass, even more preferably 0.1% to 10% by mass, based on the material making up the hole transport layer.

[0173] The hole injection layer and the hole transport layer each preferably have a thickness of 500 nm or less not to increase the driving voltage. The thickness of the hole transport layer is preferably 1 to 500 nm, more preferably 5 to 200 nm, even more preferably 10 to 100 nm. The thickness of the hole injection layer is preferably 0.1 to 200 nm, more preferably 0.5 to 100 nm, even more preferably 1 to 100 nm.

[0174] Each of the hole injection layer and the hole transport layer may have a single layer structure formed of one or more of the above described materials or a multilayer structure composed of sublayers having the same or different compositions.

(Electron Injection Layer, Electron Transport Layer)

[0175] The electron injection layer and the electron transport layer function to accept electrons from the cathode or from the side of the cathode and transport the electrons to the side of the anode. Electron injection materials and electron transport materials that can be used in these layers may be either low molecular or high molecular compounds.

[0176] Examples of suitable electron injection/transport materials include the compounds of the invention, pyridine derivatives, quinoline derivatives, pyrimidine derivatives, pyrazine derivatives, phthalazine derivatives, phenanthroline derivative, triazine derivatives, triazole derivatives, oxazole derivatives, oxadiazole derivatives, imidazole derivatives, fluorenone derivatives, anthraquinodimethane derivatives, anthrone derivatives, diphenylquinone derivatives, thiopyrane dioxide derivatives, carbodiimide derivatives, fluorenylidene methane derivatives, distyrylpyrazine derivatives, aromatic tetracarboxylic acid anhydrides, such as naphthalenetetracarboxylic acid anhydride and perylenetetracarboxylic acid anhydride; various metal complexes, such as metal-phthalocyanines, 8-quinolinol metal complexes, metal complexes having benzoxazole or benzothiazole as a ligand; and organic silane derivative typified by silole.

[0177] The electron injection or transport layer in the organic EL device may contain an electron donating dopant, which has ability to reduce an organic compound. Suitable examples of the donating dopant include alkali metals (e.g., Li), alkaline earth metals (e.g., Mg), transition metals, rare earth metals, and reducing organic compounds. The metals as a donating dopant preferably have a work function of 4.2 eV or less. Examples of such metals are Li, Na, K, Be, Mg, Ca, Sr, Ba, Y, Cs, La, Sm, Gd, and Yb. Examples of the reducing organic compounds are nitrogen-containing compounds, sulfur-containing compounds, and phosphorus-containing compounds.

[0178] Materials described in JP 6-212153A, JP 2000-196140A, JP 2003-68468A, JP 2003-229278A, and JP 2004-342614A are also useful as a donating dopant.

[0179] These donating dopants may be used either individually or in combination of two or more thereof. The amount of the donating dopant is preferably, though dependent on the donating dopant, 0.1% to 99% by mass, more preferably 1.0% to 80% by mass, even more preferably 2.0% to 70% by mass, based on the material making up the electron transport layer.

[0180] The electron injection layer and the electron transport layer each preferably have a thickness of 500 nm or less not to increase the driving voltage.

[0181] The thickness of the electron transport layer is preferably 1 to 500 nm, more preferably 5 to 200 nm, even more preferably 10 to 100 nm. The thickness of the electron injection layer is preferably 0.1 to 200 nm, more preferably 0.2 to 100 nm, even more preferably 0.5 to 50 nm.

[0182] Each of the electron injection layer and the electron transport layer may have a single layer structure formed of one or more of the above described materials or a multilayer structure composed of sublayers having the same or different compositions.

(Hole Blocking Layer)

[0183] The hole blocking layer functions to prevent the holes transported from the anode side to the light-emitting layer from escaping to the cathode side. In the present invention, an organic layer may be provided adjoining the cathode side of the light-emitting layer to serve as a hole blocking layer.

[0184] The hole blocking layer is preferably made of an aluminum complex, e.g., aluminum (III) bis(2-methyl-8-quinolinato) 4-phenylphenolate (BALq), a triazole derivative, or a phenanthroline derivative, e.g., 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline (BCP).

[0185] The thickness of the hole blocking layer is preferably 1 to 500 nm, more preferably 5 to 200 nm, even more preferably 10 to 100 nm.

[0186] The hole blocking layer may have a single layer structure formed of one or more of the above described materials or a multilayer structure composed of sublayers having the same or different compositions.

(Electron Blocking Layer)

[0187] The electron blocking layer functions to prevent the electrons transported from the cathode side to the light-emitting layer from escaping to the anode side. In the present invention, an organic layer may be provided adjoining the anode side of the light-emitting layer to serve as an electron blocking layer.

[0188] The electron blocking layer may be made of any of the aforementioned hole transport materials.

[0189] The thickness of the electron blocking layer is preferably 1 to 500 nm, more preferably 5 to 200 nm, even more preferably 10 to 100 nm.

[0190] The electron blocking layer may have a single layer structure formed of one or more of the above described materials or a multilayer structure composed of sublayers having the same or different compositions.

(Protective Layer)

[0191] The whole organic EL device may be protected with a protective layer.

[0192] The protective layer can be of any material that prevents substances which may accelerate deterioration of the device, such as moisture and oxygen, from entering the device.

[0193] The details of the protective layer are described in JP 2008-270736A and JP 2007-266458A, which are herein incorporated by reference.

(Charge Generating Layer)

[0194] In order to improve luminescence efficiency, the organic EL device of the invention may have a charge generating layer between light emitting sublayers (emission sublayers).

[0195] The charge generating layer functions to generate charges (i.e., holes and electrons) on electric field application and to inject the charges generated into emission sublayers adjoining thereto.

[0196] The details of the charge generating layer are described in JP 11-329748A, JP 2003-272860A, and JP 2004-39617A, which are herein incorporated by reference.

(Sealing)

[0197] The device may be wholly sealed in a sealing container.

[0198] A desiccant or an inert liquid may be put in a space between the sealing container and the device. Useful desiccants include, but are not limited to, barium oxide, sodium oxide, potassium oxide, calcium oxide, sodium sulfate, calcium sulfate, magnesium sulfate, phosphorus pentoxide, calcium chloride, magnesium chloride, copper chloride, cesium fluoride, niobium fluoride, calcium bromide, vanadium bromide, molecular sieve, zeolite, and magnesium oxide. Useful inert liquids include, but are not limited to, paraffins, liquid paraffins, fluorine-containing solvents (e.g., perfluoroalkanes, perfluoroamines, and perfluoroethers), chlorine-containing solvents, and silicone oils.

[0199] The organic EL device emits light on applying a direct current (which may contain an alternating component, if needed) voltage usually of 2 to 15 V or a direct current between the anode and the cathode.


[0200] For driving the device, the methods taught in JP 2-148687A, JP 6-301355A, JP 5-29080A, JP 7-134558A, JP 8-234685A, JP 8-241047A, Japanese Patent 2784615, and U.S. Pat. Nos. 5,828,429 and 6,023,308 can be used.

[0201] The organic EL device of the invention is suited for use in display devices, displays, backlights, electrophotography, lighting sources, light sources for writing, reading, or exposure, signs, billboards, interior accessories, optical communications, and so on.


EXAMPLES

[0202] The invention will now be illustrated in greater detail with reference to Examples, but it should be understood that the invention is not deemed to be limited thereto.

[0203] Compounds of the invention and comparative compounds shown below were synthesized.

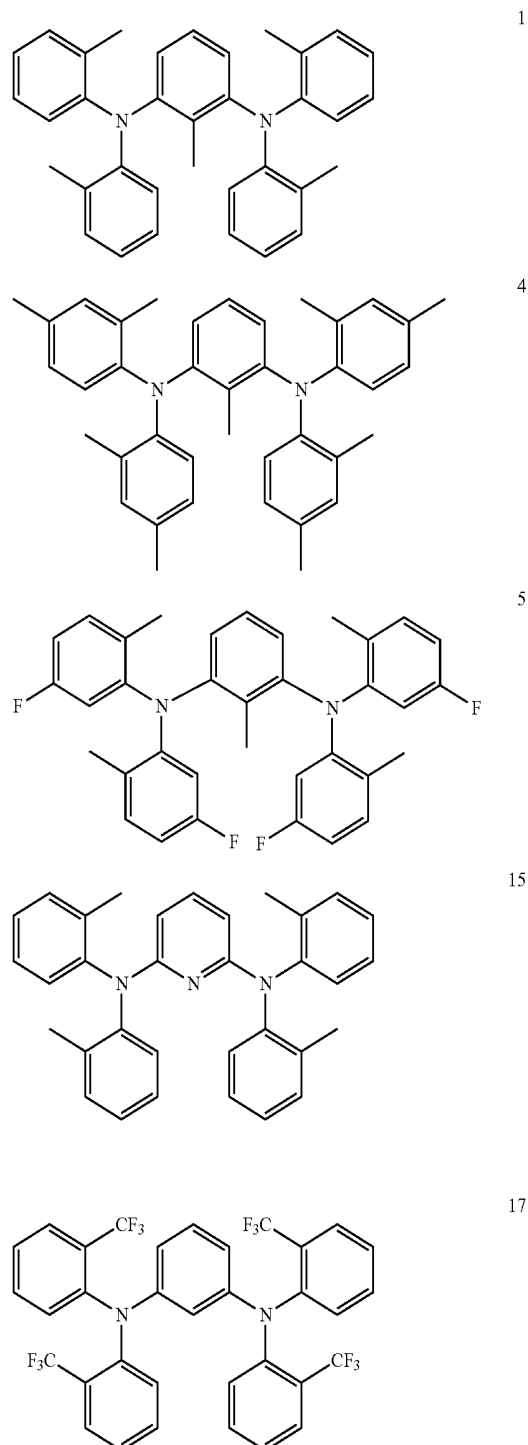


-continued

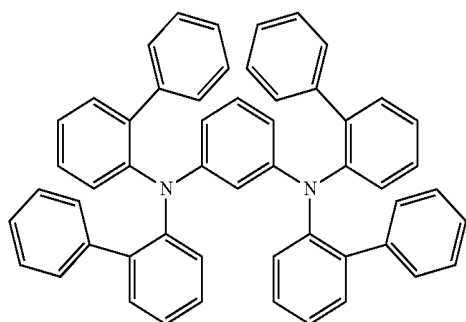

20


-continued

Comparative Compound 3

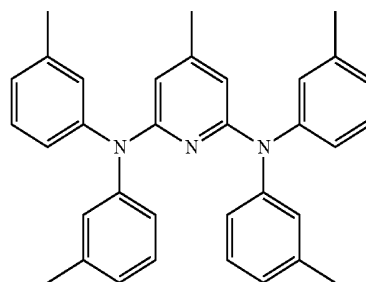


Comparative Compound 4

27

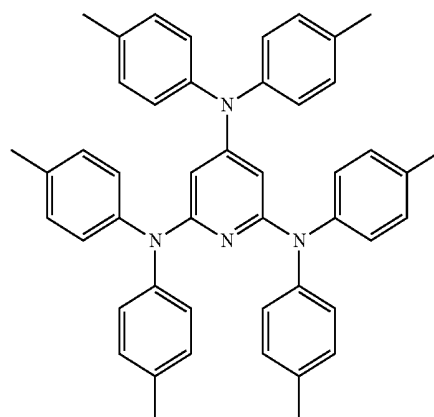


Comparative Compound 5


32

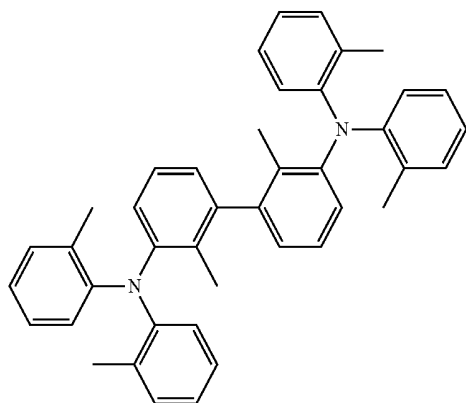


Comparative Compound 1




Comparative Compound 6

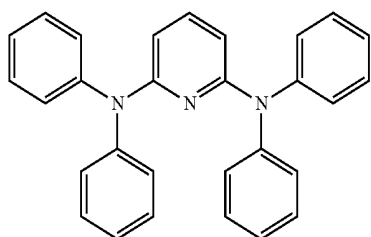

Comparative Compound 2

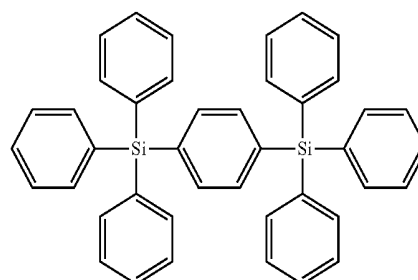


Comparative Compound 7

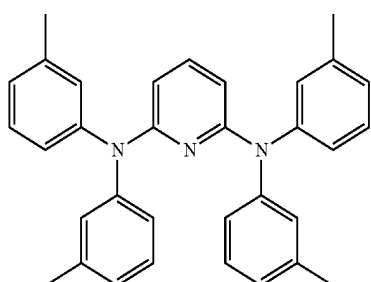

Synthesis Example 1

Preparation of Compound 1

[0204]

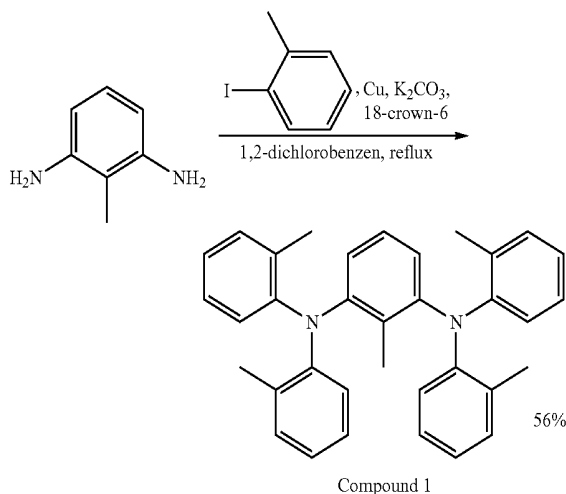

[0205] A mixture of 1.20 g (10.0 mmol) of 2,6-diaminotoluene, 34.8 g (160 mmol) of o-iodotoluene, 3.54 g (40.0 mmol) of copper powder, 11.6 g (80.0 mmol) of potassium carbonate, 0.264 g (0.500 mmol) of 18-crown-6, and 10 ml of 1,2-dichlorobenzene was heated under reflux for 5 hours while stirring in a nitrogen atmosphere. After cooling the reaction system to room temperature, 100 ml of isopropyl alcohol was added. The solid precipitated was collected by filtration, washed successively with 5% hydrochloric acid, pure water, and methanol, and completely dissolved in 40 ml of chloroform. The insoluble matter (copper powder) was removed by filtration, and the filtrate was concentrated and recrystallized from a 1:1 mixture of toluene and hexane to give 1.35 g (56%) of Compound 1 as white crystals.

[0206] ^1H NMR δ (300 MHz, CDCl_3 , ppm): 7.15 (d, 2H), 7.08-6.97 (m, 8H), 6.95-6.89 (m, 3H), 6.74-6.66 (m, 4H), 6.52 (d, 2H), 1.94 (s, 3H), 1.81 (s, 3H), 1.50 (s, 3H)

[0207] The resulting product was purified by sublimation to make a device (HPLC purity: 100.0%).

[0208] A 2.5 cm square quartz glass substrate having a thickness of 0.5 mm was cleaned by ultrasonication in 2-propanol, followed by UV-ozone treatment for 30 minutes. Each of compounds 1, 4, and 5 and comparative compounds A, B, and F was deposited on the cleaned substrate by vacuum vapor deposition to a thickness of 50 nm. The following physical properties (a), (b), and (c) of the deposited film were determined. The results obtained are shown in Table 1.

(a) Ionization potential (Ip)

[0209] Measured using a photoelectron spectrometer AC-1 from Riken Keiki Co., Ltd.

(b) Electron affinity (Ea)

[0210] The band gap (Eg) was obtained from the longer wavelength end of the absorption spectrum. Then, Ea was obtained according to formula: $Ea = Ip - Eg$.

(c) Excited triplet level (T_1 energy)

[0211] The phosphorescence spectrum was determined at -196°C . The T_1 energy was obtained from the shorter wavelength end of the spectrum.

TABLE 1

Compound Number	Ip (eV)	Ea (eV)	T_1 (eV)
Compound 1	5.8	1.9	3.1
Compound 4	5.7	1.9	3.1
Compound 5	5.9	2.0	3.1
Comparative Compound 1	5.6	1.9	2.7
Comparative Compound 2	5.5	1.8	2.7
Comparative Compound 6	—	—	3.2

[0212] Ip of Comparative Compound 6 was not measurable because the Ip was above the detection limit (6.0 eV).

Organic Electroluminescent Device

Example 1

Preparation of Device 1-1

[0213] An ITO-coated glass substrate (2.5 mm×2.5 mm×0.5 mm(t)) (a product from Geomatec Corp.; surface resistivity: 10 Ω/sq) was cleaned by ultrasonication in 2-propanol, followed by UV-ozone treatment for 30 minutes. The following four organic compound layers were successively formed in the order described on the ITO film (transparent anode) by vacuum vapor deposition to the respective thicknesses described.

First layer: copper phthalocyanine (CuPc) (10 nm)


Second layer: NPD (see below) (40 nm)

Third layer (light-emitting layer): Compound 1 and D-158 (see below) in a weight ratio of 93:7 (which composition will be referred to as "cpd. 1+7% D-158") (30 nm)

Fourth layer: BAlq (30 nm)


[0214] Subsequently, lithium fluoride and metallic aluminum were deposited in that order on the fourth layer to a thickness of 0.1 nm and 100 nm, respectively, to form a cathode.

[0215] The resulting coated substrate was transferred into a glove box purged with nitrogen without being exposed to air, where it was sealed in a glass container using a UV curing adhesive (XNR5516HV from Nagase Chemtex Corp.) to complete an organic electroluminescent device 1-1. The compounds used in the preparation of the organic electroluminescent device 1-1 and the other devices hereinafter described are shown below.

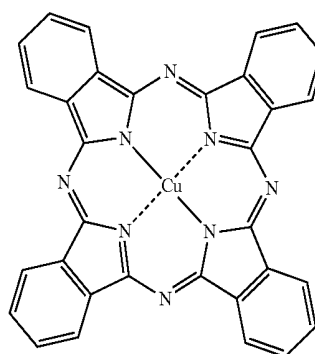


CuPc


-continued

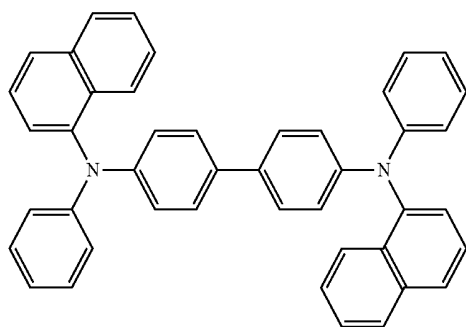


NPD

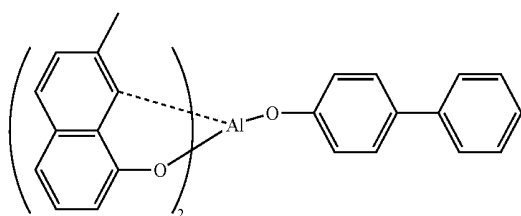


BAlq

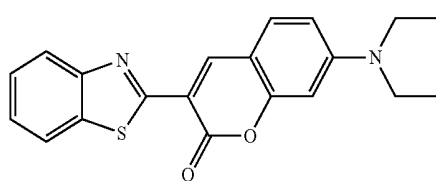

Coumarin 6

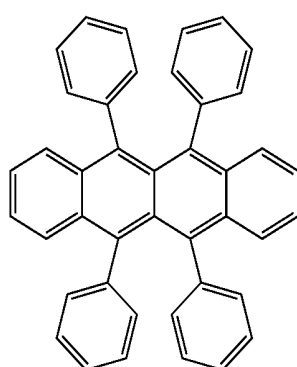


Rubrene




D-16


-continued




D-35




D-46



D-107



D-158



D-159

Preparation of Other Devices

[0216] Other devices were prepared in the same manner as for device 1-1 except for changing the composition of the light-emitting layer as shown in Table 2.

TABLE 2

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wave-length (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 1-1	cpd. 1 + 10% D-158	469	10	10	10
Inventive Device 1-4	cpd. 4 + 7% D-158	469	10	11	9
Inventive Device 1-17	cpd. 17 + 7% D-158	469	9	12	9
Inventive Device 1-20	cpd. 20 + 7% D-158	469	8	9	7
Inventive Device 1-27	cpd. 27 + 7% D-158	470	9	10	8
Inventive Device 1-32	cpd. 32 + 7% D-158	469	8	8	8
Comparative Device 1-1	comparative cpd. 1 + 7% D-158	470	2	21	<0.1
Comparative Device 1-3	comparative cpd. 3 + 7% D-158	470	3	18	<0.1
Comparative Device 1-6	comparative cpd. 6 + 7% D-158	469	5	15	1

Example 2

[0217] Organic devices were prepared in the same manner as in “Preparation of device 1-1” except for changing the composition of the light-emitting layer as shown in Table 3.

TABLE 3

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wave-length (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 2-1	cpd. 1 + 7% D-46	466	10	10	10
Inventive Device 2-5	cpd. 5 + 7% D-46	466	10	11	9
Inventive Device 2-15	cpd. 15 + 7% D-46	464	10	10	6
Inventive Device 2-20	cpd. 20 + 7% D-46	467	8	12	5
Inventive Device 2-27	cpd. 27 + 7% D-46	467	10	10	4
Inventive Device 2-32	cpd. 32 + 7% D-46	466	8	9	4
Comparative Device 2-1	comparative cpd. 1 + 7% D-46	Unmeasurable due to considerable secondary light emission			
Comparative Device 2-4	comparative cpd. 4 + 7% D-46	Unmeasurable due to considerable secondary light emission			
Comparative Device 2-7	comparative cpd. 7 + 7% D-46	466	3	21	0.1

Example 3

[0218] Organic devices were prepared in the same manner as in “Preparation of device 1-1” except for changing the composition of the light-emitting layer as shown in Table 4.

TABLE 4

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wave-length (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 3-1	cpd. 1 + 7% D-107	461	10	10	10
Inventive Device 3-4	cpd. 4 + 7% D-107	461	10	11	10
Inventive Device 3-17	cpd. 17 + 7% D-107	461	10	12	8
Inventive Device 3-20	cpd. 20 + 7% D-107	462	8	10	5
Inventive Device 3-27	cpd. 27 + 7% D-107	462	9	9	5
Inventive Device 3-32	cpd. 32 + 7% D-107	462	8	9	6
Comparative Device 3-1	comparative cpd. 1 + 7% D-107	Unmeasurable due to considerable secondary light emission			
Comparative Device 3-2	comparative cpd. 2 + 7% D-107	Unmeasurable due to considerable secondary light emission			
Comparative Device 3-7	comparative cpd. 7 + 7% D-107	461	5	16	0.5

Example 4

[0219] Organic devices were prepared in the same manner as in “Preparation of device 1-1” except for changing the composition of the light-emitting layer as shown in Table 5.

TABLE 5

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wave-length (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 4-1	cpd. 1 + 7% D-159	513	10	10	10
Inventive Device 4-5	cpd. 5 + 7% D-159	513	10	11	8
Inventive Device 4-20	cpd. 20 + 7% D-159	513	8	10	7
Inventive Device 4-32	cpd. 32 + 7% D-159	513	9	8	8
Comparative Device 4-1	comparative cpd. 1 + 7% D-159	514	4	12	<0.1
Comparative Device 4-2	comparative cpd. 2 + 7% D-159	513	5	12	0.1
Comparative Device 4-6	comparative cpd. 6 + 7% D-159	513	7	13	2

Example 5

[0220] Organic devices were prepared in the same manner as in “Preparation of device 1-1” except for changing the composition of the light-emitting layer as shown in Table 6.

TABLE 6

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wavelength (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 5-1	cpd. 1 + 7% D-35	503	10	10	10
Inventive Device 5-15	cpd. 15 + 7% D-35	501	11	10	6
Inventive Device 5-27	cpd. 27 + 7% D-35	504	10	10	6
Inventive Device 5-32	cpd. 32 + 7% D-35	503	8	10	8
Comparative Device 5-1	comparative cpd. 1 + 7% D-35	504	4	12	<0.1
Comparative Device 5-5	comparative cpd. 5 + 7% D-35	503	6	16	0.5
Comparative Device 5-7	comparative cpd. 7 + 7% D-35	503	6	14	1

Example 6

[0221] Organic devices were prepared in the same manner as in “Preparation of device 1-1” except for changing the composition of the light-emitting layer as shown in Table 7.

TABLE 6

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wavelength (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 6-1	cpd. 1 + 7% D-16	625	10	10	10
Inventive Device 6-4	cpd. 4 + 7% D-16	626	10	11	10
Inventive Device 6-20	cpd. 20 + 7% D-16	626	8	10	7
Inventive Device 6-27	cpd. 27 + 7% D-16	626	9	10	6
Comparative Device 6-1	comparative cpd. 1 + 7% D-16	629	7	11	<0.1
Comparative Device 6-3	comparative cpd. 3 + 7% D-16	628	7	11	<0.1
Comparative Device 6-6	comparative cpd. 6 + 7% D-16	625	8	13	3

Example 7

[0222] Organic devices were prepared in the same manner as in “Preparation of device 1-1” except for changing the composition of the light-emitting layer as shown in Table 8.

TABLE 8

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wavelength (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 7-1	cpd. 1 + 7% coumarin 6	496	10	10	10
Inventive Device 7-20	cpd. 20 + 7% coumarin 6	496	10	10	8

TABLE 8-continued

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wavelength (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 7-32	cpd. 32 + 7% coumarin 6	497	10	10	10
Comparative Device 7-1	comparative cpd. 1 + 7% coumarin 6	496	7	12	0.2
Comparative Device 7-6	comparative cpd. 6 + 7% coumarin 6	496	8	13	5

Example 8

[0223] Organic devices were prepared in the same manner as in “Preparation of device 1-1” except for changing the composition of the light-emitting layer as shown in Table 9.

TABLE 9

Designation of Device	Composition of Light-emitting layer	Maximum Luminescence Wavelength (nm)	Relative External Quantum Efficiency	Relative Driving Voltage	Relative Driving Durability
Inventive Device 8-1	cpd. 1 + 7% rubrene	555	10	10	10
Inventive Device 8-20	cpd. 20 + 7% rubrene	555	10	10	8
Inventive Device 8-32	cpd. 32 + 7% rubrene	555	10	10	9
Comparative Device 8-1	comparative cpd. 1 + 7% rubrene	556	7	11	0.5
Comparative Device 8-6	comparative cpd. 6 + 7% rubrene	555	9	13	6

[0224] The devices prepared as above were evaluated as follows. The results obtained are shown in Tables 2 to 9.

(a) Relative External Quantum Efficiency

[0225] A DC voltage was applied to the device by use of Source-Measure Unit Model 2400 supplied by Toyo Corp., and the luminance was measured with a luminance meter BM-8 from Topcon Corp. The luminescence spectrum and wavelength were determined using a spectrum analyzer PMA-11 from Hamamatsu Photonics K.K. The external quantum efficiency at a luminance of around 1000 cd/m² was calculated from these parameters in accordance with the luminance conversion method and expressed relatively taking the results of device 1-1, 2-1, 3-1, 4-1, 5-1, 6-1, 7-1, 8-1, and 9-1 as 10.

(b) Relative Driving Voltage

[0226] A DC voltage required to make the device emit light with a luminance of 1000 cd/m² was measured as a measure of the relative driving voltage. The results were relatively expressed taking the results of device 1-1, 2-1, 3-1, 4-1, 5-1, 6-1, 7-1, 8-1, and 9-1 as 10.

(c) Relative Driving Durability

[0227] The time period of reducing the luminance of the device from 1000 cd/m² to 500 cd/m² was measured as a


measure of the relative driving durability. The results were relatively expressed taking the results of device 1-1, 2-1, 3-1, 4-1, 5-1, 6-1, 7-1, 8-1, and 9-1 as 10. The device emit light with a luminance of 1000 cd/m² was measured and then the time relatively expressed taking the results of device 1-1, 2-1, 3-1, 4-1, 5-1, 6-1, 7-1, 8-1, and 9-1 as 10.

(d) Maximum Luminance Wavelength

[0228] A DC voltage was applied to the device to make the device emit light with a luminance of 1000 cd/m². The maximum luminance wavelength was obtained from the luminance spectrum.

[0229] It is seen from the results of Tables 2 through 9 that the organic EL devices containing the compound of formula (1), (2) or (3) have higher efficiency, lower driving voltage, and higher driving durability than those containing comparative compounds.

1. An organic electroluminescent device comprising:
a cathode;
an anode; and
a light-emitting layer between the cathode and the anode, the light-emitting layer including a compound represented by formula (1):



(1)

wherein L represents a linking group; A₁, A₂, A₃, A₄, A₅, A₆, A₇, A₈, A₉, and A₁₀ each independently represent a carbon atom or a nitrogen atom each optionally having a substituent, provided that at least two of A₁, A₅, A₆, and A₁₀ each represent a carbon atom having Rⁱ;

Rⁱ is selected from the group consisting of an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, and an acylamino group having 2 to 10 carbon atoms;

a plurality of Rs each independently represent an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms;


m represents an integer; and

n represents an integer of 2 to 10;

with the proviso that when A₁ and A₆ each represent a carbon atom having Rⁱ and Rⁱ is an alkyl group having 1 to 18 carbon atoms and n represents 2 and L is a 6-membered aromatic linking moiety and the n arylamine moieties are bonded to L at m-positions, then the plurality of Rs linked to L each independently represent a hydrogen atom or a substituent selected

from the group consisting of an unsubstituted aryl group having 6 to 18 carbon atoms, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, and further when A₁ and A₆ each represent a carbon atom having Rⁱ and Rⁱ is methyl and L is phenyl and n represents 2 and the n arylamine moieties are bonded to L at m-positions, then L must be substituted.

2. The organic electroluminescent device according to claim 1, wherein the compound of formula (1) is a compound represented by formula (2):

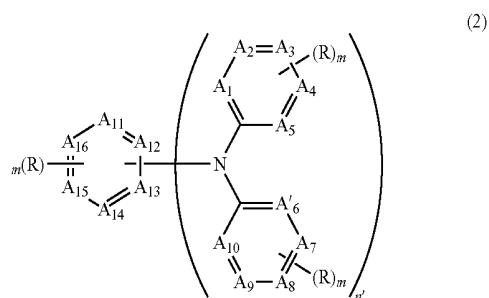

(2)

wherein A₂, A₃, A₄, A₅, A₇, A₈, A₉, A₁₀, A₁₁, A₁₂, A₁₃, A₁₄, A₁₅, and A₁₆ each independently represent a carbon atom or a nitrogen atom each optionally having a substituent;

either A₁ and A₆ each represent a carbon atom having Rⁱ;
or

A₁ and A₅ each represent a carbon atom having Rⁱ;


Rⁱ represents a substituent selected from the group consisting of an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, and an acylamino group having 2 to 10 carbon atoms;

a plurality of Rs each independently represent an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms;

m represents an integer; and

n' represents 2 or 3.

3. The organic electroluminescent device according to claim 2, wherein the compound of formula (2) is a compound represented by formula (3):

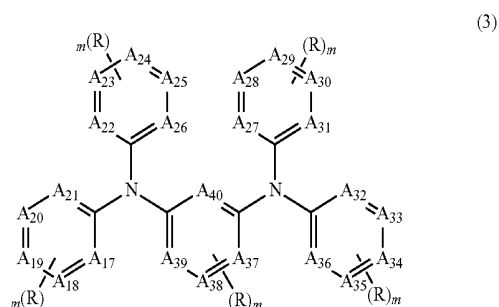

(3)

wherein $A_{18}, A_{19}, A_{20}, A_{21}, A_{23}, A_{24}, A_{25}, A_{26}, A_{28}, A_{29}, A_{30}, A_{31}, A_{33}, A_{34}, A_{35}, A_{36}, A_{37}, A_{38}, A_{39},$ and A_{40} each independently represent a carbon atom or a nitrogen atom; $A_{17}, A_{22}, A_{27},$ and A_{32} each represent a carbon atom having R'' ;

R'' is an alkyl group having 1 to 18 carbon atoms;

a plurality of R_s each independently represent a hydrogen atom or a substituent selected from the group consisting of an unsubstituted aryl group having 6 to 18 carbon atoms, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms; and

m represents an integer.


4. The organic electroluminescent device according to claim 1, wherein the compound has an excited triplet level T_1 of 2.8 to 3.5 eV in a form of a thin film.

5. The organic electroluminescent device according to claim 1, wherein the light emitting layer further includes a phosphorescent material.

6. The organic electroluminescent device according to claim 5, wherein the phosphorescent material is an iridium complex or a platinum complex.

7. The organic electroluminescent device according to claim 6, wherein the phosphorescent material is a platinum complex containing a tridentate or higher polydentate ligand.

8. The organic electroluminescent device according to claim 6, wherein the phosphorescent material is a platinum complex represented by formula (4):

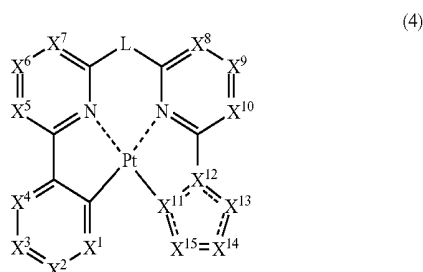

wherein $X^1, X^2, X^3,$ and X^4 each independently represent a carbon atom or a nitrogen atom, provided that at least one of $X^1, X^2, X^3,$ and X^4 represents a nitrogen atom; $X^5, X^6, X^7, X^8, X^9,$ and X^{10} each independently represent a carbon atom or a nitrogen atom;

X^{11} and X^{12} each independently represent a carbon atom or a nitrogen atom;

$X^{13}, X^{14},$ and X^{15} each independently represent a carbon atom, a nitrogen atom, an oxygen atom, or a sulfur atom; a 5-membered ring skeleton including $X^{11}, X^{12}, X^{13}, X^{14},$ and X^{15} contains 2 or less nitrogen atoms; and

L represents a single bond or a divalent linking group.


9. The organic electroluminescent device according to claim 5, wherein the phosphorescent material has a maximum luminescence wavelength of 500 nm or shorter.

10. The organic electroluminescent device according to claim 2, wherein A'_1 and A'_6 each represent a carbon atom having R' , and R' is selected from the group consisting of an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, and an acylamino group having 2 to 10 carbon atoms.

11. The organic electroluminescent device according to claim 2, wherein A'_1 and A'_5 each represent a carbon atom having R' , and R' is an aryl group having 6 to 18 carbon atoms.

12. The organic electroluminescent device according to claim 2, wherein A'_1 and A'_6 each represent a carbon atom having R' , and R' is an aryl group having 6 to 18 carbon atoms.

13. The organic electroluminescent device according to claim 2, wherein the compound of formula (2) is a compound represented by the following formula:

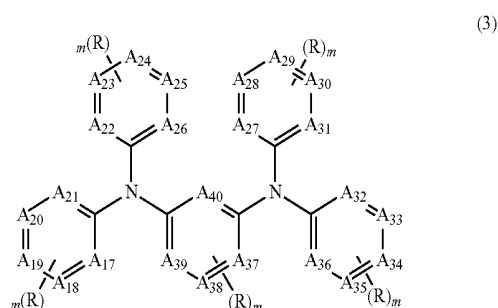


wherein $A_{18}, A_{19}, A_{20}, A_{21}, A_{23}, A_{24}, A_{25}, A_{26}, A_{28}, A_{29}, A_{30}, A_{31}, A_{33}, A_{34}, A_{35}, A_{36}, A_{37}, A_{38}, A_{39},$ and A_{40} each independently represent a carbon atom or a nitrogen atom; $A_{17}, A_{22}, A_{27},$ and A_{32} each represent a carbon atom having R' ;

R' is selected from the group consisting of an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, and an acylamino group having 2 to 10 carbon atoms;

a plurality of R_s each independently represent a hydrogen atom or a substituent selected from the group consisting of an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms; and m represents an integer.

14. The organic electroluminescent device according to claim 2, wherein the compound of formula (2) is a compound represented by the following formula:

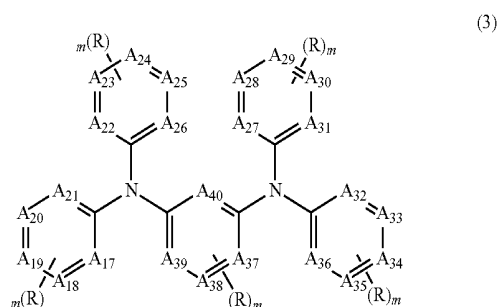


wherein $A_{18}, A_{19}, A_{20}, A_{22}, A_{23}, A_{24}, A_{25}, A_{26}, A_{27}, A_{28}, A_{29}, A_{30}, A_{31}, A_{33}, A_{34}, A_{35}, A_{37}, A_{38}, A_{39},$ and A_{40} each independently represent a carbon atom or a nitrogen atom; $A_{17}, A_{21}, A_{32},$ and A_{36} each represent a carbon atom having R' ;

R' is selected from the group consisting of an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, and an acylamino group having 2 to 10 carbon atoms;

a plurality of Rs each independently represent an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms; and

m represents an integer.

15. A compound of formula (1):



(1)

wherein L represents a linking group; A₁, A₂, A₃, A₄, A₅, A₆, A₇, A₈, A₉, and A₁₀ each independently represent a carbon atom or a nitrogen atom each optionally having a substituent, provided that at least two of A₁, A₅, A₆, and A₁₀ each represent a carbon atom having R';

R' is selected from the group consisting of an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, an acylamino group having 2 to 10 carbon atoms, or a heterocyclic group having 2 to 10 carbon atoms;

a plurality of Rs each independently represent an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms;


m represents an integer; and

n represents an integer of 2 to 10;

with the proviso that when A₁ and A₆ each represent a carbon atom having R' and R' is an alkyl group having 1 to 18 carbon atoms and n represents 2 and L is a 6-membered aromatic linking moiety and the n arylamine moieties are bonded to L at m-positions, then the plurality of Rs linked to L each independently represent a hydrogen atom or a substituent selected from the group consisting of an unsubstituted aryl group having 6 to 18 carbon atoms, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, and further when A₁ and A₆ each represent a carbon atom having R' and R' is methyl and L is phenyl and n represents 2 and the

n arylamine moieties are bonded to L at m-positions, then L must be substituted.

16. The compound according to claim 15, wherein the compound of formula (1) is a compound represented by formula (2):

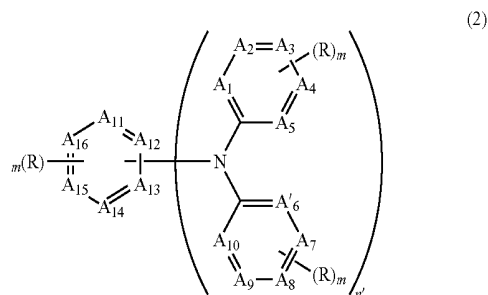

(2)

wherein A₂, A₃, A₄, A₅, A₇, A₈, A₉, A₁₀, A₁₁, A₁₂, A₁₃, A₁₄, A₁₅, and A₁₆ each independently represent a carbon atom or a nitrogen atom each optionally having a substituent; A' and A' each represent a carbon atom having R';

either A' and A' each represent a carbon atom having R'; or

A' and A' each represent a carbon atom having R';


R' represents a substituent selected from the group consisting of an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, an acylamino group having 2 to 10 carbon atoms, or a heterocyclic group having 2 to 10 carbon atoms;

a plurality of Rs each independently represent an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms;

m represents an integer; and

n' represents 2 or 3.

17. The compound according to claim 16, wherein the compound of formula (2) is a compound represented by formula (3):

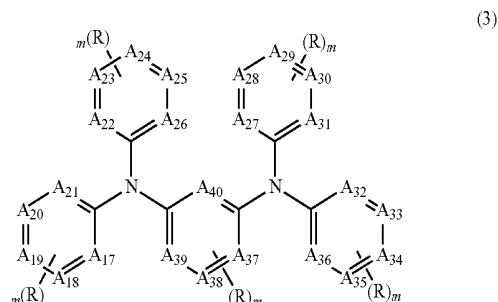

(3)


wherein A₁₈, A₁₉, A₂₀, A₂₁, A₂₃, A₂₄, A₂₅, A₂₆, A₂₈, A₂₉, A₃₀, A₃₁, A₃₃, A₃₄, A₃₅, A₃₆, A₃₇, A₃₈, A₃₉, and A₄₀ each

independently represent a carbon atom or a nitrogen atom; A₁₇, A₂₂, A₂₇, and A₃₂ each represent a carbon atom having R^m;

R^m is an alkyl group having 1 to 18 carbon atoms;

a plurality of Rs each independently represent a hydrogen atom or a substituent selected from the group consisting of an unsubstituted aryl group having 6 to 18 carbon atoms, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms; and m represents an integer.

18. The compound according to claim 16, wherein the compound of formula (2) is a compound represented by the following formula:

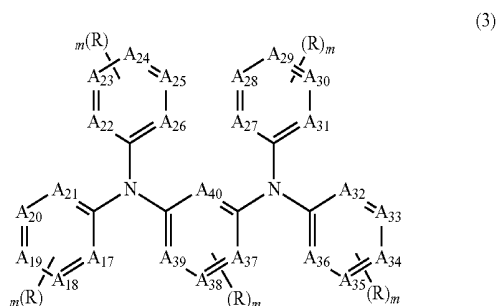

wherein A₁₈, A₁₉, A₂₀, A₂₂, A₂₃, A₂₄, A₂₅, A₂₆, A₂₇, A₂₈, A₂₉, A₃₀, A₃₁, A₃₃, A₃₄, A₃₅, A₃₇, A₃₈, A₃₉, and A₄₀ each independently represent a carbon atom or a nitrogen atom; A₁₇, A₂₁, A₃₂, and A₃₆ each represent a carbon atom having R¹;

R¹ is selected from the group consisting of an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, and an acylamino group having 2 to 10 carbon atoms;

a plurality of Rs each independently represent an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms; and

m represents an integer.


19. The compound according to claim 16, wherein A₁' and A₆' each represent a carbon atom having R¹, and R¹ is selected

from the group consisting of an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, an acylamino group having 2 to 10 carbon atoms, and a heterocyclic group having 2 to 10 carbon atoms.

20. The compound according to claim 16, wherein A₁' and A₅' each represent a carbon atom having R¹, and R¹ is an aryl group having 6 to 18 carbon atoms.

21. The compound according to claim 16, wherein A₁' and A₆' each represent a carbon atom having R¹, and R¹ is an aryl group having 6 to 18 carbon atoms.

22. The compound according to claim 16, wherein the compound of formula (2) is a compound represented by the following formula:

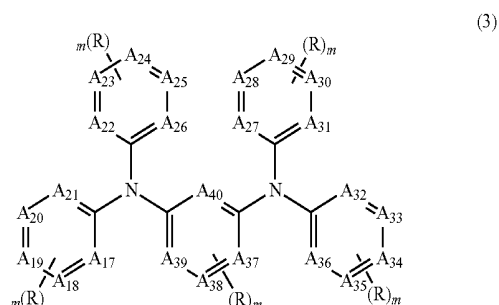

wherein A₁₈, A₁₉, A₂₀, A₂₁, A₂₃, A₂₄, A₂₅, A₂₆, A₂₈, A₂₉, A₃₀, A₃₁, A₃₃, A₃₄, A₃₅, A₃₆, A₃₇, A₃₈, A₃₉, and A₄₀ each independently represent a carbon atom or a nitrogen atom; A₁₇, A₂₂, A₂₇, and A₃₂ each represent a carbon atom having R¹;

R¹ is selected from the group consisting of an aryl group having 6 to 18 carbon atoms, a carbamoyl group having 2 to 18 carbon atoms, a cyano group, and an acylamino group having 2 to 10 carbon atoms;

a plurality of Rs each independently represent an alkyl group having 1 to 18 carbon atoms, an aryl group having 6 to 18 carbon atoms, a halogen atom, a cyano group, a nitro group, a heterocyclic group having 2 to 10 carbon atoms, an acyl group having 2 to 12 carbon atoms, and a sulfonyl group having 1 to 12 carbon atoms, a silyl group having 3 to 18 carbon atoms or a phosphoryl group having 1 to 18 carbon atoms; and

m represents an integer.

* * * * *

专利名称(译)	具有特定二胺化合物的有机电致发光器件		
公开(公告)号	US20150243900A1	公开(公告)日	2015-08-27
申请号	US14/613748	申请日	2015-02-04
[标]申请(专利权)人(译)	UDC爱尔兰有限公司		
申请(专利权)人(译)	UDC IRELAND LIMITED		
当前申请(专利权)人(译)	UDC IRELAND LIMITED		
[标]发明人	KITAMURA TETSU		
发明人	KITAMURA, TETSU		
IPC分类号	H01L51/00		
CPC分类号	H01L51/0059 H01L51/0087 H01L51/0094 H01L51/0061 H01L51/5221 H01L2251/5376 H01L51/5016 H01L51/0067 H01L2251/308 H01L2251/301 H01L51/5206 H01L51/004 H01L51/0085 H01L51/5012 Y10S428/917		
优先权	2008326513 2008-12-22 JP		
其他公开文献	US9564599		
外部链接	Espacenet USPTO		

摘要(译)

提供一种有机电致发光器件，包括：阴极;阳极;以及阴极和阳极之间的发光层。发光层包含由式(1)表示的化合物。在公式(1)中，L表示链接组;A1，A2，A3，A4，A5，A6，A7，A8，A9，A10每个独立地代表碳原子或氮原子，条件是A1，A5，A6和A10各自代表具有R³的碳原子;R³表示在其键合位置具有碳原子的取代基;多个R各自独立地表示取代基;m表示整数;n表示2到10的整数。

