



US009659527B2

(12) **United States Patent**
Azizi et al.

(10) **Patent No.:** **US 9,659,527 B2**
(45) **Date of Patent:** ***May 23, 2017**

(54) **PIXEL CIRCUITS FOR AMOLED DISPLAYS**

(71) Applicant: **Ignis Innovation Inc.**, Waterloo (CA)

(72) Inventors: **Yaser Azizi**, Waterloo (CA);
Gholamreza Chaji, Waterloo (CA)

(73) Assignee: **Ignis Innovation Inc.**, Waterloo (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/133,318**

(22) Filed: **Apr. 20, 2016**

(65) **Prior Publication Data**

US 2016/0232845 A1 Aug. 11, 2016

Related U.S. Application Data

(63) Continuation of application No. 13/789,978, filed on Mar. 8, 2013, now Pat. No. 9,351,368.

(51) **Int. Cl.**

G09G 3/32 (2016.01)

H05B 33/08 (2006.01)

G09G 3/3233 (2016.01)

(52) **U.S. Cl.**

CPC **G09G 3/3233** (2013.01); **H05B 33/0848** (2013.01); **G09G 2300/0819** (2013.01); **G09G 2300/0842** (2013.01); **G09G 2320/0295** (2013.01); **G09G 2320/045** (2013.01); **G09G 2320/0693** (2013.01); **G09G 2320/10** (2013.01)

(58) **Field of Classification Search**

None

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,506,851 A 4/1970 Polkinghorn et al.

3,750,987 A 8/1973 Gobel

3,774,055 A 11/1973 Bapat et al.

(Continued)

FOREIGN PATENT DOCUMENTS

AU 729652 6/1997

AU 764896 12/2001

(Continued)

OTHER PUBLICATIONS

Ahnood et al.: "Effect of threshold voltage instability on field effect mobility in thin film transistors deduced from constant current measurements"; dated Aug. 2009.

(Continued)


Primary Examiner — Antonio Xavier

(74) *Attorney, Agent, or Firm* — Nixon Peabody LLP

(57) **ABSTRACT**

The OLED voltage of a selected pixel is extracted from the pixel produced when the pixel is programmed so that the pixel current is a function of the OLED voltage. One method for extracting the OLED voltage is to first program the pixel in a way that the current is not a function of OLED voltage, and then in a way that the current is a function of OLED voltage. During the latter stage, the programming voltage is changed so that the pixel current is the same as the pixel current when the pixel was programmed in a way that the current was not a function of OLED voltage. The difference in the two programming voltages is then used to extract the OLED voltage.

3 Claims, 5 Drawing Sheets

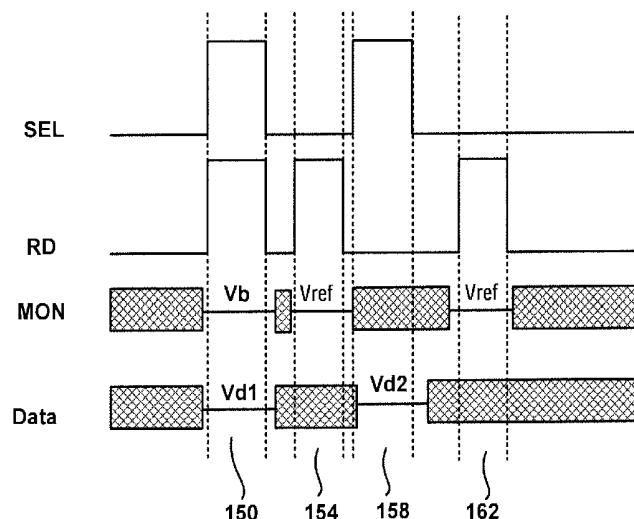

(56)

References Cited

U.S. PATENT DOCUMENTS

4,090,096 A	5/1978	Nagami	6,753,655 B2	6/2004	Shih et al.
4,354,162 A	10/1982	Wright	6,753,834 B2	6/2004	Mikami et al.
4,996,523 A	2/1991	Bell et al.	6,756,741 B2	6/2004	Li
5,134,387 A	7/1992	Smith et al.	6,777,888 B2	8/2004	Kondo
5,153,420 A	10/1992	Hack et al.	6,781,567 B2	8/2004	Kimura
5,170,158 A	12/1992	Shinya	6,788,231 B1	9/2004	Hsueh
5,204,661 A	4/1993	Hack et al.	6,809,706 B2	10/2004	Shimoda
5,266,515 A	11/1993	Robb et al.	6,828,950 B2	12/2004	Koyama
5,278,542 A	1/1994	Smith et al.	6,858,991 B2	2/2005	Miyazawa
5,408,267 A	4/1995	Main	6,859,193 B1	2/2005	Yumoto
5,498,880 A	3/1996	Lee et al.	6,876,346 B2	4/2005	Anzai et al.
5,572,444 A	11/1996	Lentz et al.	6,900,485 B2	5/2005	Lee
5,589,847 A	12/1996	Lewis	6,903,734 B2	6/2005	Eu
5,619,033 A	4/1997	Weisfield	6,911,960 B1	6/2005	Yokoyama
5,648,276 A	7/1997	Hara et al.	6,911,964 B2	6/2005	Lee et al.
5,670,973 A	9/1997	Bassetti et al.	6,914,448 B2	7/2005	Jinno
5,691,783 A	11/1997	Numao et al.	6,919,871 B2	7/2005	Kwon
5,701,505 A	12/1997	Yamashita et al.	6,924,602 B2	8/2005	Komiya
5,714,968 A	2/1998	Ikeda	6,937,220 B2	8/2005	Kitaura et al.
5,744,824 A	4/1998	Kousai et al.	6,940,214 B1	9/2005	Komiya et al.
5,745,660 A	4/1998	Kolpatzik et al.	6,954,194 B2	10/2005	Matsumoto et al.
5,748,160 A	5/1998	Shieh et al.	6,970,149 B2	11/2005	Chung et al.
5,758,129 A	5/1998	Gray et al.	6,975,142 B2	12/2005	Azami et al.
5,835,376 A	11/1998	Smith et al.	6,975,332 B2	12/2005	Arnold et al.
5,870,071 A	2/1999	Kawahata	6,995,519 B2	2/2006	Arnold et al.
5,874,803 A	2/1999	Garbuzov et al.	7,027,015 B2	4/2006	Booth, Jr. et al.
5,880,582 A	3/1999	Sawada	7,034,793 B2	4/2006	Sekiya et al.
5,903,248 A	5/1999	Irwin	7,038,392 B2	5/2006	Libsch et al.
5,917,280 A	6/1999	Burrows et al.	7,057,588 B2	6/2006	Asano et al.
5,949,398 A	9/1999	Kim	7,061,451 B2	6/2006	Kimura
5,952,789 A	9/1999	Stewart et al.	7,071,932 B2	7/2006	Libsch et al.
5,990,629 A	11/1999	Yamada et al.	7,106,285 B2	9/2006	Naugler
6,023,259 A	2/2000	Howard et al.	7,112,820 B2	9/2006	Chang et al.
6,069,365 A	5/2000	Chow et al.	7,113,864 B2	9/2006	Smith et al.
6,091,203 A	7/2000	Kawashima et al.	7,122,835 B1	10/2006	Ikeda et al.
6,097,360 A	8/2000	Holloman	7,129,914 B2	10/2006	Knapp et al.
6,100,868 A	8/2000	Lee et al.	7,164,417 B2	1/2007	Cok
6,144,222 A	11/2000	Ho	7,224,332 B2	5/2007	Cok
6,229,506 B1	5/2001	Dawson et al.	7,248,236 B2	7/2007	Nathan et al.
6,229,508 B1	5/2001	Kane	7,259,737 B2	8/2007	Ono et al.
6,246,180 B1	6/2001	Nishigaki	7,262,753 B2	8/2007	Tanghe et al.
6,252,248 B1	6/2001	Sano et al.	7,274,363 B2	9/2007	Ishizuka et al.
6,268,841 B1	7/2001	Cairns et al.	7,310,092 B2	12/2007	Imamura
6,288,696 B1	9/2001	Holloman	7,315,295 B2	1/2008	Kimura
6,307,322 B1	10/2001	Dawson et al.	7,317,434 B2	1/2008	Lan et al.
6,310,962 B1	10/2001	Chung et al.	7,321,348 B2	1/2008	Cok et al.
6,323,631 B1	11/2001	Juang	7,327,357 B2	2/2008	Jeong
6,333,729 B1	12/2001	Ha	7,333,077 B2	2/2008	Koyama et al.
6,388,653 B1	5/2002	Goto et al.	7,343,243 B2	3/2008	Smith et al.
6,392,617 B1	5/2002	Gleason	7,414,600 B2	8/2008	Nathan et al.
6,396,469 B1	5/2002	Miwa et al.	7,466,166 B2	12/2008	Date et al.
6,414,661 B1	7/2002	Shen et al.	7,495,501 B2	2/2009	Iwabuchi et al.
6,417,825 B1	7/2002	Stewart et al.	7,502,000 B2	3/2009	Yuki et al.
6,430,496 B1	8/2002	Smith et al.	7,515,124 B2	4/2009	Yaguma et al.
6,433,488 B1	8/2002	Bu	7,535,449 B2	5/2009	Miyazawa
6,473,065 B1	10/2002	Fan	7,554,512 B2	6/2009	Steer
6,475,845 B2	11/2002	Kimura	7,569,849 B2	8/2009	Nathan et al.
6,501,098 B2	12/2002	Yamazaki	7,595,776 B2	9/2009	Hashimoto et al.
6,501,466 B1	12/2002	Yamagishi et al.	7,604,718 B2	10/2009	Zhang et al.
6,522,315 B2	2/2003	Ozawa et al.	7,609,239 B2	10/2009	Chang
6,535,185 B2	3/2003	Kim et al.	7,612,745 B2	11/2009	Yumoto et al.
6,542,138 B1	4/2003	Shannon et al.	7,619,594 B2	11/2009	Hu
6,559,839 B1	5/2003	Ueno et al.	7,619,597 B2	11/2009	Nathan et al.
6,580,408 B1	6/2003	Bae et al.	7,639,211 B2	12/2009	Miyazawa
6,583,398 B2	6/2003	Harkin	7,683,899 B2	3/2010	Hirakata et al.
6,618,030 B2	9/2003	Kane et al.	7,688,289 B2	3/2010	Abe et al.
6,639,244 B1	10/2003	Yamazaki et al.	7,760,162 B2	7/2010	Miyazawa
6,680,580 B1	1/2004	Sung	7,808,008 B2	10/2010	Miyake
6,686,699 B2	2/2004	Yumoto	7,859,520 B2	12/2010	Kimura
6,690,000 B1	2/2004	Muramatsu et al.	7,889,159 B2	2/2011	Nathan et al.
6,693,610 B2	2/2004	Shannon et al.	7,903,127 B2	3/2011	Kwon
6,694,248 B2	2/2004	Smith et al.	7,920,116 B2	4/2011	Woo et al.
6,697,057 B2	2/2004	Koyama et al.	7,944,414 B2	5/2011	Shirasaki et al.
6,724,151 B2	4/2004	Yoo	7,978,170 B2	7/2011	Park et al.
6,734,636 B2	5/2004	Sanford et al.	7,989,392 B2	8/2011	Crockett et al.
			7,995,008 B2	8/2011	Miwa
			8,063,852 B2	11/2011	Kwak et al.
			8,102,343 B2	1/2012	Yatabe
			8,144,081 B2	3/2012	Miyazawa

(56)

References Cited

U.S. PATENT DOCUMENTS

8,159,007 B2	4/2012	Barna et al.	2004/0160516 A1	8/2004	Ford
8,242,979 B2	8/2012	Anzai et al.	2004/0171619 A1	9/2004	Barkoczy
8,253,665 B2	8/2012	Nathan et al.	2004/0174349 A1	9/2004	Libsch et al.
8,319,712 B2	11/2012	Nathan et al.	2004/0174354 A1	9/2004	Ono et al.
8,405,582 B2	3/2013	Kim	2004/0183759 A1	9/2004	Stevenson et al.
8,816,946 B2	8/2014	Nathan et al.	2004/0189627 A1	9/2004	Shirasaki et al.
2001/0002703 A1	6/2001	Koyama	2004/0196275 A1	10/2004	Hattori
2001/0009283 A1	7/2001	Arao et al.	2004/0227697 A1	11/2004	Mori
2001/0026257 A1	10/2001	Kimura	2004/0239696 A1	12/2004	Okabe
2001/0030323 A1	10/2001	Ikeda	2004/0251844 A1	12/2004	Hashido et al.
2001/0040541 A1	11/2001	Yoneda et al.	2004/0252085 A1	12/2004	Miyagawa
2001/0043173 A1	11/2001	Troutman	2004/0252089 A1	12/2004	Ono et al.
2001/0045929 A1	11/2001	Prache	2004/0256617 A1	12/2004	Yamada et al.
2001/0052940 A1	12/2001	Hagihara et al.	2004/0257353 A1	12/2004	Imamura et al.
2002/0000576 A1	1/2002	Inukai	2004/0257355 A1	12/2004	Naugler
2002/0011796 A1	1/2002	Koyama	2004/0263437 A1	12/2004	Hattori
2002/0011799 A1	1/2002	Kimura	2005/0007357 A1	1/2005	Yamashita et al.
2002/0012057 A1	1/2002	Kimura	2005/0052379 A1	3/2005	Waterman
2002/0030190 A1	3/2002	Ohtani et al.	2005/0057459 A1	3/2005	Miyazawa
2002/0047565 A1	4/2002	Nara et al.	2005/0067970 A1	3/2005	Libsch et al.
2002/0052086 A1	5/2002	Maeda	2005/0067971 A1	3/2005	Kane
2002/0080108 A1	6/2002	Wang	2005/0083270 A1	4/2005	Miyazawa
2002/0084463 A1	7/2002	Sanford et al.	2005/0110420 A1	5/2005	Arnold et al.
2002/0101172 A1	8/2002	Bu	2005/0110727 A1	5/2005	Shin
2002/0117722 A1	8/2002	Osada et al.	2005/0123193 A1	6/2005	Lamberg et al.
2002/0140712 A1	10/2002	Ouchi et al.	2005/0140610 A1	6/2005	Smith et al.
2002/0158587 A1	10/2002	Komiya	2005/0145891 A1	7/2005	Abe
2002/0158666 A1	10/2002	Azami et al.	2005/0156831 A1	7/2005	Yamazaki et al.
2002/0158823 A1	10/2002	Zavacky et al.	2005/0168416 A1	8/2005	Hashimoto et al.
2002/0171613 A1	11/2002	Goto et al.	2005/0206590 A1	9/2005	Sasaki et al.
2002/0186214 A1	12/2002	Siwinski	2005/0219188 A1	10/2005	Kawabe et al.
2002/0190971 A1	12/2002	Nakamura et al.	2005/0243037 A1	11/2005	Eom et al.
2002/0195967 A1	12/2002	Kim et al.	2005/0248515 A1	11/2005	Naugler et al.
2002/0195968 A1	12/2002	Sanford et al.	2005/0258867 A1	11/2005	Miyazawa
2003/0001828 A1	1/2003	Asano	2005/0285825 A1	12/2005	Eom et al.
2003/0020413 A1	1/2003	Oomura	2006/0012311 A1	1/2006	Ogawa
2003/0030603 A1	2/2003	Shimoda	2006/0038750 A1	2/2006	Inoue et al.
2003/0062524 A1	4/2003	Kimura	2006/0038758 A1	2/2006	Routley et al.
2003/0062844 A1	4/2003	Miyazawa	2006/0038762 A1	2/2006	Chou
2003/0076048 A1	4/2003	Rutherford	2006/0066533 A1	3/2006	Sato et al.
2003/0090445 A1	5/2003	Chen et al.	2006/0077077 A1	4/2006	Kwon
2003/0090447 A1	5/2003	Kimura	2006/0092185 A1	5/2006	Jo et al.
2003/0090481 A1	5/2003	Kimura	2006/0125408 A1	6/2006	Nathan et al.
2003/0095087 A1	5/2003	Libsch	2006/0139253 A1	6/2006	Choi et al.
2003/0098829 A1	5/2003	Chen et al.	2006/0145964 A1	7/2006	Park et al.
2003/0107560 A1	6/2003	Yumoto et al.	2006/0158402 A1 *	7/2006	Nathan G09G 3/3233 345/82
2003/0107561 A1	6/2003	Uchino et al.	2006/0191178 A1	8/2006	Sempel et al.
2003/0111966 A1	6/2003	Mikami et al.	2006/0209012 A1	9/2006	Hagood, IV
2003/0112205 A1	6/2003	Yamada	2006/0214888 A1	9/2006	Schneider et al.
2003/0112208 A1	6/2003	Okabe et al.	2006/0221009 A1	10/2006	Miwa
2003/0117348 A1	6/2003	Knapp et al.	2006/0227082 A1	10/2006	Ogata et al.
2003/0122474 A1	7/2003	Lee	2006/0232522 A1	10/2006	Roy et al.
2003/0122747 A1	7/2003	Shannon et al.	2006/0244391 A1	11/2006	Shishido et al.
2003/0128199 A1	7/2003	Kimura	2006/0244697 A1	11/2006	Lee et al.
2003/0151569 A1	8/2003	Lee et al.	2006/0261841 A1	11/2006	Fish
2003/0156104 A1	8/2003	Morita	2006/0290614 A1	12/2006	Nathan et al.
2003/0169241 A1	9/2003	LeChevalier	2007/0001939 A1	1/2007	Hashimoto et al.
2003/0169247 A1	9/2003	Kawabe et al.	2007/0001945 A1	1/2007	Yoshida et al.
2003/0179626 A1	9/2003	Sanford et al.	2007/0008251 A1	1/2007	Kohno et al.
2003/0189535 A1	10/2003	Matsumoto et al.	2007/0008297 A1	1/2007	Bassetti
2003/0197663 A1	10/2003	Lee et al.	2007/0035489 A1	2/2007	Lee
2003/0214465 A1	11/2003	Kimura	2007/0035707 A1	2/2007	Margulis
2003/0227262 A1	12/2003	Kwon	2007/0040773 A1	2/2007	Lee et al.
2003/0230141 A1	12/2003	Gilmour et al.	2007/0040782 A1	2/2007	Woo et al.
2003/0230980 A1	12/2003	Forrest et al.	2007/0063932 A1	3/2007	Nathan et al.
2004/0004589 A1	1/2004	Shih	2007/0080908 A1	4/2007	Nathan et al.
2004/0032382 A1	2/2004	Cok et al.	2007/0085801 A1	4/2007	Park et al.
2004/0041750 A1	3/2004	Abe	2007/0109232 A1	5/2007	Yamamoto et al.
2004/0066357 A1	4/2004	Kawasaki	2007/0128583 A1	6/2007	Miyazawa
2004/0070557 A1	4/2004	Asano et al.	2007/0164941 A1	7/2007	Park et al.
2004/0129933 A1	7/2004	Nathan et al.	2007/0182671 A1	8/2007	Nathan et al.
2004/0135749 A1	7/2004	Kondakov et al.	2007/0236430 A1	10/2007	Fish
2004/0145547 A1	7/2004	Oh	2007/0241999 A1	10/2007	Lin
2004/0150595 A1	8/2004	Kasai	2007/0242008 A1	10/2007	Cummings
2004/0155841 A1	8/2004	Kasai	2008/0001544 A1	1/2008	Murakami et al.
			2008/0043044 A1	2/2008	Woo et al.
			2008/0048951 A1	2/2008	Naugler et al.
			2008/0055134 A1	3/2008	Li et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2008/0074360	A1	3/2008	Lu et al.	
2008/0088549	A1 *	4/2008	Nathan	G09G 3/3233 345/80
2008/0094426	A1	4/2008	Kimpe	
2008/0122819	A1	5/2008	Cho et al.	
2008/0129906	A1	6/2008	Lin et al.	
2008/0228562	A1	9/2008	Smith et al.	
2008/0231641	A1	9/2008	Miyashita	
2008/0265786	A1	10/2008	Koyama	
2008/0290805	A1	11/2008	Yamada et al.	
2008/0315788	A1	12/2008	Levey	
2009/0009459	A1	1/2009	Miyashita	
2009/0015532	A1	1/2009	Katayama et al.	
2009/0058789	A1	3/2009	Hung et al.	
2009/0121988	A1	5/2009	Amo et al.	
2009/0146926	A1	6/2009	Sung et al.	
2009/0153448	A1	6/2009	Tomida et al.	
2009/0153459	A9	6/2009	Han et al.	
2009/0174628	A1	7/2009	Wang et al.	
2009/0201230	A1	8/2009	Smith	
2009/0201281	A1	8/2009	Routley et al.	
2009/0251486	A1	10/2009	Sakakibara et al.	
2009/0278777	A1	11/2009	Wang et al.	
2009/0289964	A1	11/2009	Miyachi	
2009/0295423	A1 *	12/2009	Levey	G09G 3/006 324/760.01
2010/0039451	A1	2/2010	Jung	
2010/0039453	A1	2/2010	Nathan et al.	
2010/0045646	A1 *	2/2010	Kishi	G09G 3/3233 345/211
2010/0103082	A1	4/2010	Levey	
2010/0103159	A1	4/2010	Leon	
2010/0134475	A1 *	6/2010	Ogura	G09G 3/3291 345/213
2010/0207920	A1	8/2010	Chaji et al.	
2010/0225634	A1	9/2010	Levey et al.	
2010/0251295	A1	9/2010	Amento et al.	
2010/0269889	A1	10/2010	Reinhold et al.	
2010/0277400	A1	11/2010	Jeong	
2010/0315319	A1	12/2010	Cok et al.	
2010/0315449	A1 *	12/2010	Chaji	G09G 3/3208 345/690
2011/0050741	A1	3/2011	Jeong	
2011/0069089	A1	3/2011	Kopf et al.	
2011/0074762	A1 *	3/2011	Shirasaki	G09G 3/3225 345/211
2011/0191042	A1 *	8/2011	Chaji	G09G 3/32 702/64
2011/0205221	A1 *	8/2011	Lin	G09G 3/2092 345/213
2011/0205250	A1	8/2011	Yoo et al.	
2012/0169793	A1	7/2012	Nathan	
2012/0299976	A1	11/2012	Chen et al.	
2012/0299978	A1 *	11/2012	Chaji	G09G 3/3291 345/690
2014/0252988	A1	9/2014	Azizi et al.	
2014/0267215	A1	9/2014	Soni	

FOREIGN PATENT DOCUMENTS

CA	1 294 034	1/1992
CA	2 249 592	7/1998
CA	2 303 302	3/1999
CA	2 368 386	9/1999
CA	2 242 720	1/2000
CA	2 354 018	6/2000
CA	2 432 530	7/2002
CA	2 436 451	8/2002
CA	2 507 276	8/2002
CA	2 463 653	1/2004
CA	2 498 136	3/2004
CA	2 522 396	11/2004
CA	2 438 363	2/2005
CA	2 443 206	3/2005

CA	2 519 097	3/2005
CA	2 472 671	12/2005
CA	2 523 841	1/2006
CA	2 567 076	1/2006
CA	2 495 726	7/2006
CA	2 557 713	11/2006
CA	2 526 782	C 8/2007
CA	2 651 893	11/2007
CA	2 672 590	10/2009
CN	1601594	A 3/2005
CN	1886774	12/2006
CN	104036719	9/2014
DE	202006007613	9/2006
EP	0 478 186	4/1992
EP	1 028 471	A 8/2000
EP	1 130 565	A1 9/2001
EP	1 194 013	4/2002
EP	1 321 922	6/2003
EP	1 335 430	A1 8/2003
EP	1 381 019	1/2004
EP	1 429 312	A 6/2004
EP	1 439 520	A2 7/2004
EP	1 465 143	A 10/2004
EP	1 473 689	A 11/2004
EP	1 517 290	A2 3/2005
EP	1 521 203	A2 4/2005
EP	2 133 860	A1 12/2009
EP	2 383 720	A2 11/2011
GB	2 399 935	9/2004
GB	2 460 018	11/2009
JP	09 090405	4/1997
JP	10-254410	9/1998
JP	11 231805	8/1999
JP	2002-278513	9/2002
JP	2003-076331	3/2003
JP	2003-099000	4/2003
JP	2003-173165	6/2003
JP	2003-186439	7/2003
JP	2003-195809	7/2003
JP	2003-271095	9/2003
JP	2003-308046	10/2003
JP	2004-054188	2/2004
JP	2004-226960	8/2004
JP	2005-004147	1/2005
JP	2005-099715	4/2005
JP	2005-258326	9/2005
JP	2005-338819	12/2005
TW	569173	1/2004
TW	200526065	8/2005
TW	1239501	9/2005
WO	WO 98/11554	3/1998
WO	WO 99/48079	9/1999
WO	WO 01/27910	A1 4/2001
WO	WO 02/067327	A 8/2002
WO	WO 03/034389	4/2003
WO	WO 03/063124	7/2003
WO	WO 03/075256	9/2003
WO	WO 2004/003877	1/2004
WO	WO 2004/015668	A1 2/2004
WO	WO 2004/034364	4/2004
WO	WO 2005/022498	3/2005
WO	WO 2005/055185	6/2005
WO	WO 2005/055186	A1 6/2005
WO	WO 2005/069267	7/2005
WO	WO 2005/122121	12/2005
WO	WO 2006/063448	6/2006
WO	WO 2006/128069	11/2006
WO	WO 2008/057369	5/2008
WO	WO 2008/0290805	11/2008
WO	WO 2009/059028	5/2009
WO	WO 2009/127065	10/2009
WO	WO 2010/066030	6/2010
WO	WO 2010/120733	10/2010

OTHER PUBLICATIONS

Alexander et al.: "Pixel circuits and drive schemes for glass and elastic AMOLED displays"; dated Jul. 2005 (9 pages).

(56)

References Cited

OTHER PUBLICATIONS

Alexander et al.: "Unique Electrical Measurement Technology for Compensation Inspection and Process Diagnostics of AMOLED HDTV"; dated May 2010 (4 pages).

Arokia Nathan et al., "Amorphous Silicon Thin Film Transistor Circuit Integration for Organic LED Displays on Glass and Plastic", IEEE Journal of Solid-State Circuits, vol. 39, No. 9, Sep. 2004, pp. 1477-1486.

Ashtiani et al.: "AMOLED Pixel Circuit With Electronic Compensation of Luminance Degradation"; dated Mar. 2007 (4 pages).

Chaji et al.: "A Current-Mode Comparator for Digital Calibration of Amorphous Silicon AMOLED Displays"; dated Jul. 2008 (5 pages).

Chaji et al.: "A fast settling current driver based on the CCII for AMOLED displays"; dated Dec. 2009 (6 pages).

Chaji et al.: "A Low-Cost Stable Amorphous Silicon AMOLED Display with Full V~T- and V~O~L~E~D Shift Compensation"; dated May 2007 (4 pages).

Chaji et al.: "A low-power driving scheme for a-Si:H active-matrix organic light-emitting diode displays"; dated Jun. 2005 (4 pages).

Chaji et al.: "A low-power high-performance digital circuit for deep submicron technologies"; dated Jun. 2005 (4 pages).

Chaji et al.: "A novel a-Si:H AMOLED pixel circuit based on short-term stress stability of a-Si:H TFTs"; dated Oct. 2005 (3 pages).

Chaji et al.: "A Novel Driving Scheme and Pixel Circuit for AMOLED Displays"; dated Jun. 2006 (4 pages).

Chaji et al.: "A novel driving scheme for high-resolution large-area a-Si:H AMOLED displays"; dated Aug. 2005 (4 pages).

Chaji et al.: "A Stable Voltage-Programmed Pixel Circuit for a-Si:H AMOLED Displays"; dated Dec. 2006 (12 pages).

Chaji et al.: "A Sub-μA fast-settling current-programmed pixel circuit for AMOLED displays"; dated Sep. 2007.

Chaji et al.: "An Enhanced and Simplified Optical Feedback Pixel Circuit for AMOLED Displays"; dated Oct. 2006.

Chaji et al.: "Compensation technique for DC and transient instability of thin film transistor circuits for large-area devices"; dated Aug. 2008

Chaji et al.: "Driving scheme for stable operation of 2-TFT a-Si AMOLED pixel"; dated Apr. 2005 (2 pages).

Chaji et al.: "Dynamic-effect compensating technique for stable a-Si:H AMOLED displays"; dated Aug. 2005 (4 pages).

Chaji et al.: "Electrical Compensation of OLED Luminance Degradation"; dated Dec. 2007 (3 pages).

Chaji et al.: "eUTDSP: a design study of a new VLIW-based DSP architecture"; dated May 2003 (4 pages).

Chaji et al.: "Fast and Offset-Leakage Insensitive Current-Mode Line Driver for Active Matrix Displays and Sensors"; dated Feb. 2009 (8 pages).

Chaji et al.: "High Speed Low Power Adder Design With a New Logic Style: Pseudo Dynamic Logic (SDL)"; dated Oct. 2001 (4 pages).

Chaji et al.: "High-precision fast current source for large-area current-programmed a-Si flat panels"; dated Sep. 2006 (4 pages).

Chaji et al.: "Low-Cost AMOLED Television with IGNIS Compensating Technology"; dated May 2008 (4 pages).

Chaji et al.: "Low-Cost Stable a-Si:H AMOLED Display for Portable Applications"; dated Jun. 2006 (4 pages).

Chaji et al.: "Low-Power Low-Cost Voltage-Programmed a-Si:H AMOLED Display"; dated Jun. 2008 (5 pages).

Chaji et al.: "Merged phototransistor pixel with enhanced near infrared response and flicker noise reduction for biomolecular imaging"; dated Nov. 2008 (3 pages).

Chaji et al.: "Parallel Addressing Scheme for Voltage-Programmed Active-Matrix OLED Displays"; dated May 2007 (6 pages).

Chaji et al.: "Pseudo dynamic logic (SDL): a high-speed and low-power dynamic logic family"; dated 2002 (4 pages).

Chaji et al.: "Stable a-Si:H circuits based on short-term stress stability of amorphous silicon thin film transistors"; dated May 2006 (4 pages)

Chaji et al.: "Stable Pixel Circuit for Small-Area High-Resolution a-Si:H AMOLED Displays"; dated Oct. 2008 (6 pages).

Chaji et al.: "Stable RGBW AMOLED display with OLED degradation compensation using electrical feedback"; dated Feb. 2010 (2 pages).

Chaji et al.: "Thin-Film Transistor Integration for Biomedical Imaging and AMOLED Displays"; dated May 2008 (177 pages).

Chapter 3: Color Spaces Keith Jack: Video Demystified: "A Handbook for the Digital Engineer" 2001 Referex ORD-0000-00-00 USA EP040425529 ISBN: 1-878707-56-6 pp. 32-33.

Chapter 8: Alternative Flat Panel Display 1-25 Technologies; Willem den Boer: "Active Matrix Liquid Crystal Display: Fundamentals and Applications" 2005 Referex ORD-0000-00-00 U.K.; XP040426102 ISBN: 0-7506-7813-5 pp. 206-209 p. 208.

Chen, et al. "Fine-grained Dynamic Voltage Scaling on OLED Display." IEEE (Jan. 2012): 807-12. Print.

European Partial Search Report Application No. 12 15 6251.6 European Patent Office dated May 30, 2012 (7 pages).

European Patent Office Communication Application No. 05 82 1114 dated Jan. 11, 2013 (9 pages).

European Patent Office Communication with Supplemental European Search Report for EP Application No. 07 70 1644.2, dated Aug. 18, 2009(12 pages).

European Search Report Application No. 10 83 4294.0-1903 dated Apr. 8, 2013 (9 pages).

European Search Report Application No. EP 05 80 7905 dated Mar. 18, 2009 (5 pages).

European Search Report Application No. EP 05 82 1114 dated Mar. 27, 2009 (2 pages).

European Search Report Application No. EP 07 70 1644 dated Aug. 5, 2009 (5 pages).

European Search Report Application No. EP 10 17 5764—dated Oct. 18 2010 (11 pages).

European Search Report Application No. EP 10 82 9593.2—European Patent Office dated May 17, 2013 (7 pages).

European Search Report Application No. EP 12 15 6251.6 European Patent Office dated Oct. 12, 2012 (18 pages).

European Search Report Application No. EP. 11 175 225.9 dated Nov. 4, 2011 (10 pages).

European Supplementary Search Report Application No. EP 09 80 2309 dated May 8, 2011 (14 pages).

European Supplementary Search Report Application No. EP 09 83 1339.8 dated Mar. 26, 2012 (11 pages).

Extended European Search Report Application No. EP 06 75 2777.0 dated Dec. 3, 2010 (21 pages).

Extended European Search Report Application No. EP 09 73 2338.0 dated May 24, 2011 (9 pages).

Extended European Search Report Application No. EP 11 17 5223., 4 mailed Nov. 8, 2011 (8 pages).

Extended European Search Report Application No. EP 12 17 4465.0 European Patent Office dated Sep. 7, 2012 (9 pages).

Fan et al. "LTPS TFT Pixel Circuit Compensation for TFT Threshold Voltage Shift and IR-Drop on the Power Line for Amoled Displays" 5 pages copyright 2012.

Goh et al. "A New a-Si:H Thin-Film Transistor Pixel Circuit for Active-Matrix Organic Light-Emitting Diodes" IEEE Electron Device Letters vol. 24 No. 9 Sep. 2003 pp. 583-585.

International Search Report Application No. PCT/CA2005/001844 dated Mar. 28, 2006 (2 pages).

International Search Report Application No. PCT/CA2006/000941 dated Oct. 3, 2006 (2 pages).

International Search Report Application No. PCT/CA2007/000013 dated May 7, 2007 (2 pages).

International Search Report Application No. PCT/CA2009/001049 mailed Dec. 7, 2009 (4 pages).

International Search Report Application No. PCT/CA2009/001769 dated Apr. 8, 2010 (8 pages).

International Search Report Application No. PCT/IB2010/002898 Canadian Intellectual Property Office dated Mar. 30, 2011 (5 pages).

International Search Report Application No. PCT/IB2010/055481 dated Apr. 7, 2011 (3 pages).

International Search Report Application No. PCT/IB2011/051103 dated Jul. 8, 2011 2 pages.

(56)

References Cited**OTHER PUBLICATIONS**

International Search Report Application No. PCT/IB2012/052651 5 pages dated Sep. 11, 2012.

International Searching Authority Written Opinion Application No. PCT/IB2010/055481 dated Apr. 7, 2011 (6 pages).

International Searching Authority Written Opinion Application No. PCT/IB2012/052651 6 pages dated Sep. 11, 2012.

International Searching Authority Written Opinion Application No. PCT/IB2011/051103 dated Jul. 8, 2011 6 pages.

International Searching Authority Written Opinion Application No. PCT/IB2010/002898 Canadian Intellectual Property Office dated Mar. 30, 2011 (8 pages).

International Searching Authority Written Opinion Application No. PCT/CA2009/001769 dated Apr. 8, 2010 (8 pages).

Jafarabadiastiani et al.: "A New Driving Method for a-Si AMOLED Displays Based on Voltage Feedback"; dated May 2005 (4 pages).

Joon-Chul Goh et al., "A New a-Si:H Thin-Film Transistor Pixel Circuit for Active-Matrix Organic Light-Emitting Diodes", IEEE Electron Device Letters, vol. 24, No. 9, Sep. 2003, pp. 583-585.

Lee et al.: "Ambipolar Thin-Film Transistors Fabricated by PECVD Nanocrystalline Silicon"; dated May 2006 (6 pages).

Ma e y et al.: "Organic Light-Emitting Diode/Thin Film Transistor Integration for foldable Displays" Conference record of the 1997 International display research conference and international workshops on LCD technology and emissive technology. Toronto Sep. 15-19, 1997 (6 pages).

Matsueda y et al.: "35.1: 2.5-in. AMOLED with Integrated 6-bit Gamma Compensated Digital Data Driver"; dated May 2004 (4 pages).

Nathan et al. "Amorphous Silicon Thin Film Transistor Circuit Integration for Organic LED Displays on Glass and Plastic" IEEE Journal of Solid-State Circuits vol. 39 No. 9 Sep. 2004 pp. 1477-1486.

Nathan et al.: "Backplane Requirements for Active Matrix Organic Light Emitting Diode Displays"; dated Sep. 2006 (16 pages).

Nathan et al.: "Call for papers second international workshop on compact thin-film transistor (TFT) modeling for circuit simulation"; dated Sep. 2009 (1 page).

Nathan et al.: "Driving schemes for a-Si and LTPS AMOLED displays"; dated Dec. 2005 (11 pages).

Nathan et al.: "Invited Paper: a-Si for AMOLED—Meeting the Performance and Cost Demands of Display Applications (Cell Phone to HDTV)"; dated Jun. 2006 (4 pages).

Nathan et al.: "Thin film imaging technology on glass and plastic"; dated Oct. 31-Nov. 2, 2000 (4 pages).

Ono et al. "Shared Pixel Compensation Circuit for AM-OLED Displays" Proceedings of the 9th Asian Symposium on Information Display (ASID) pp. 462-465 New Delhi dated Oct. 8-12, 2006 (4 pages).

Philipp. "Charge transfer sensing" Sensor Review vol. 19 No. 2 Dec. 31, 1999 (Dec. 31, 1999) 10 pages.

Rafati et al.: "Comparison of a 17 b multiplier in Dual-rail domino and in Dual-rail D L (D L) logic styles"; dated 2002 (4 pages).

Safavaian et al.: "Three-TFT image sensor for real-time digital X-ray imaging"; dated Feb. 2, 2006 (2 pages).

Safavian et al.: "3-TFT active pixel sensor with correlated double sampling readout circuit for real-time medical x-ray imaging"; dated Jun. 2006 (4 pages).

Safavian et al.: "A novel current scaling active pixel sensor with correlated double sampling readout circuit for real time medical x-ray imaging"; dated May 2007 (7 pages).

Safavian et al.: "A novel hybrid active-passive pixel with correlated double sampling CMOS readout circuit for medical x-ray imaging"; dated May 2008 (4 pages).

Safavian et al.: "Self-compensated a-Si:H detector with current-mode readout circuit for digital X-ray fluoroscopy"; dated Aug. 2005 (4 pages).

Safavian et al.: "TFT active image sensor with current-mode readout circuit for digital x-ray fluoroscopy [5969D-82]"; dated Sep. 2005 (9 pages).

Smith, Lindsay I., "A tutorial on Principal Components Analysis," dated Feb. 26, 2001 (27 pages).

Stewart M. et al. "Polysilicon TFT technology for active matrix OLED displays" IEEE transactions on electron devices vol. 48 No. 5 May 2001 (7 pages).

Vygranenko et al.: "Stability of indium-oxide thin-film transistors by reactive ion beam assisted deposition"; dated Feb. 2009.

Wang et al.: "Indium oxides by reactive ion beam assisted evaporation: From material study to device application," dated Mar. 2009 (6 pages).

Yi He et al. "Current-Source a-Si:H Thin Film Transistor Circuit for Active-Matrix Organic Light-Emitting Displays" IEEE Electron Device Letters vol. 21 No. 12 Dec. 2000 pp. 590-592.

International Search Report Application No. PCT/IB2013/059074, dated Dec. 18, 2013 (5 pages).

International Searching Authority Written Opinion Application No. PCT/IB2013/059074, dated Dec. 18, 2013 (8 pages).

International Search Report Application No. 14157112.5-1903, dated Aug. 21, 2014 (7 pages).

* cited by examiner

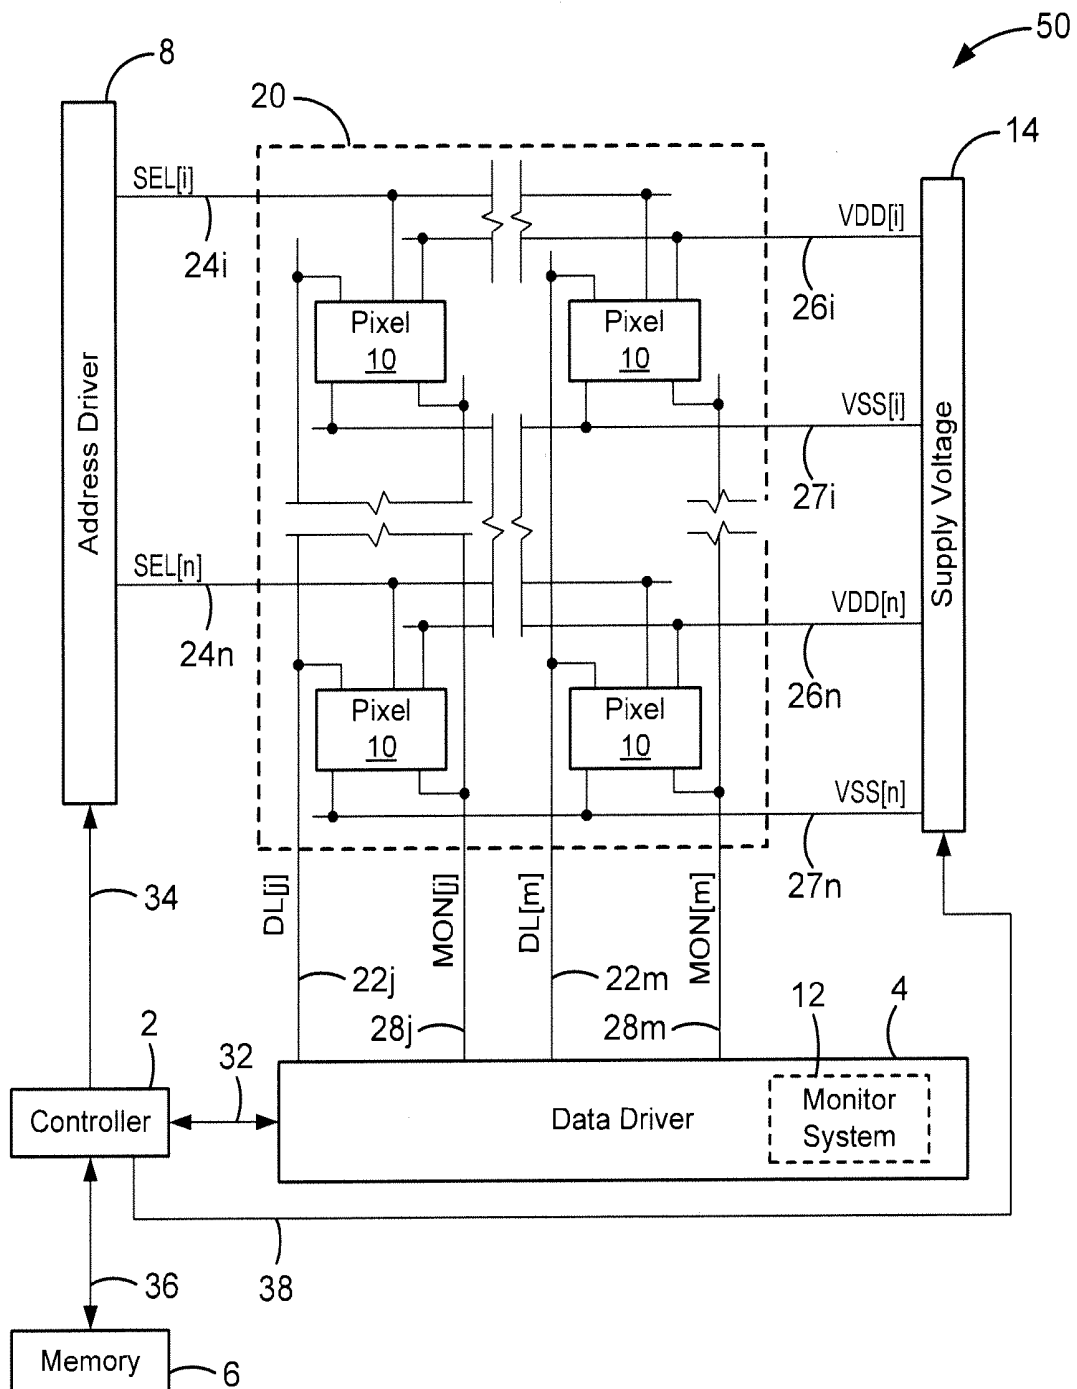


FIG. 1

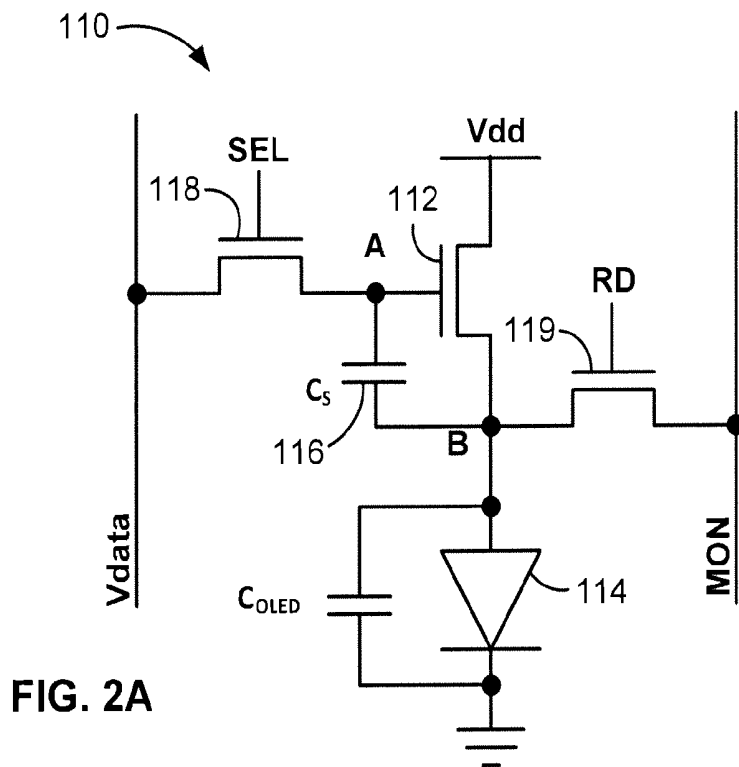


FIG. 2A

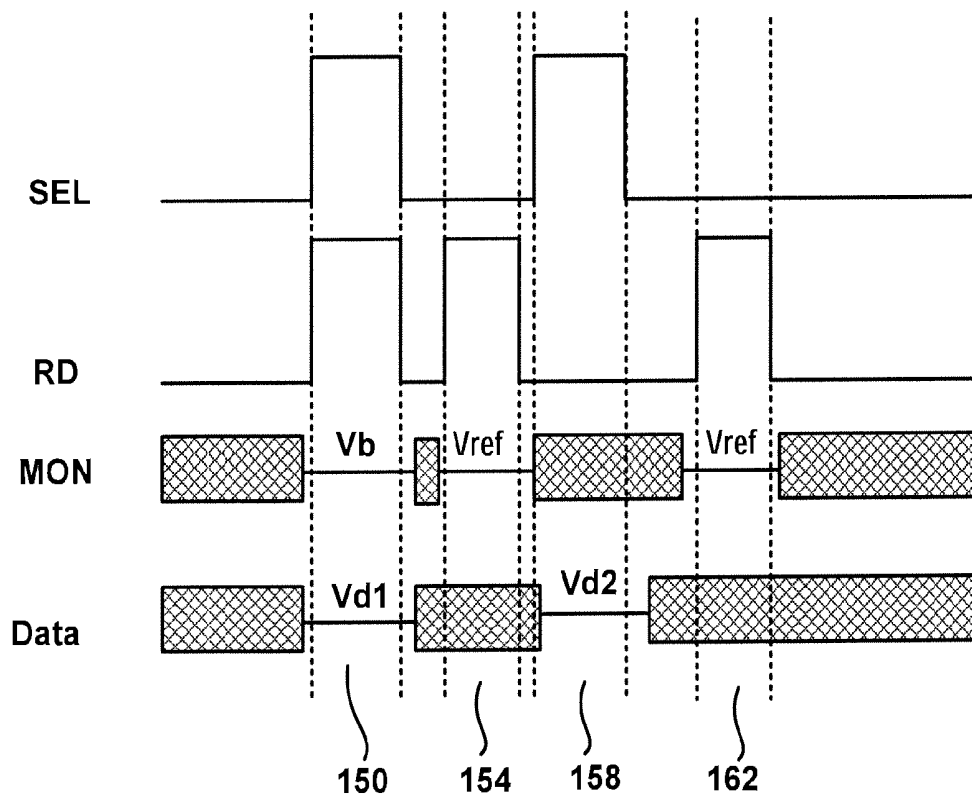


FIG. 2B

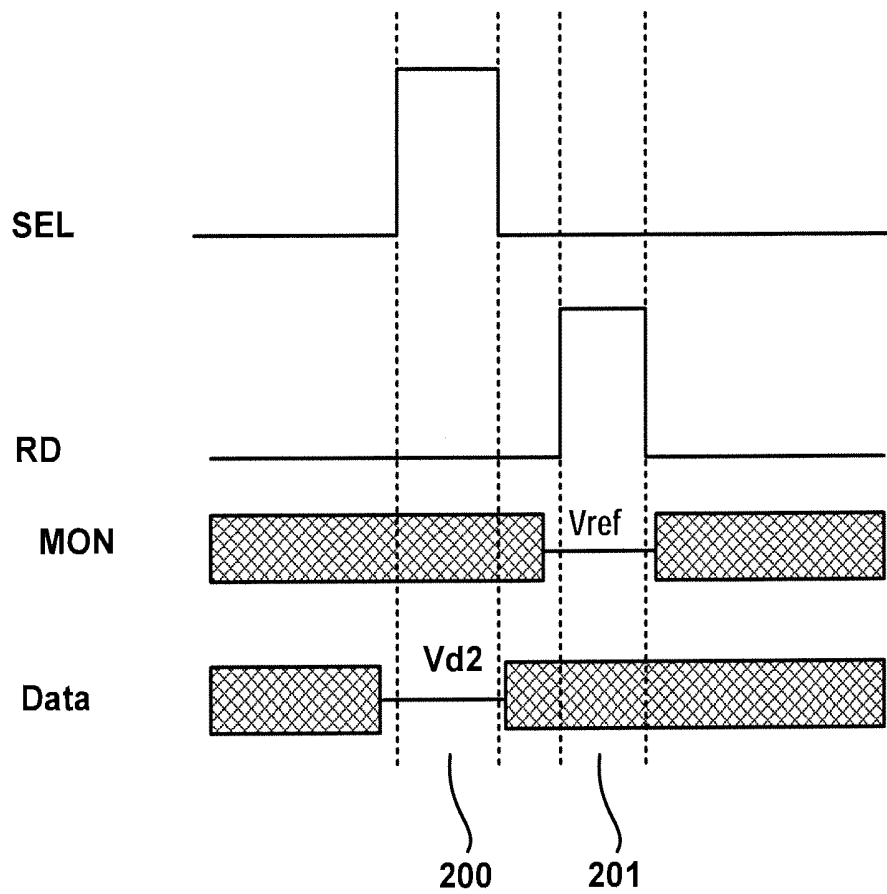


FIG. 2C

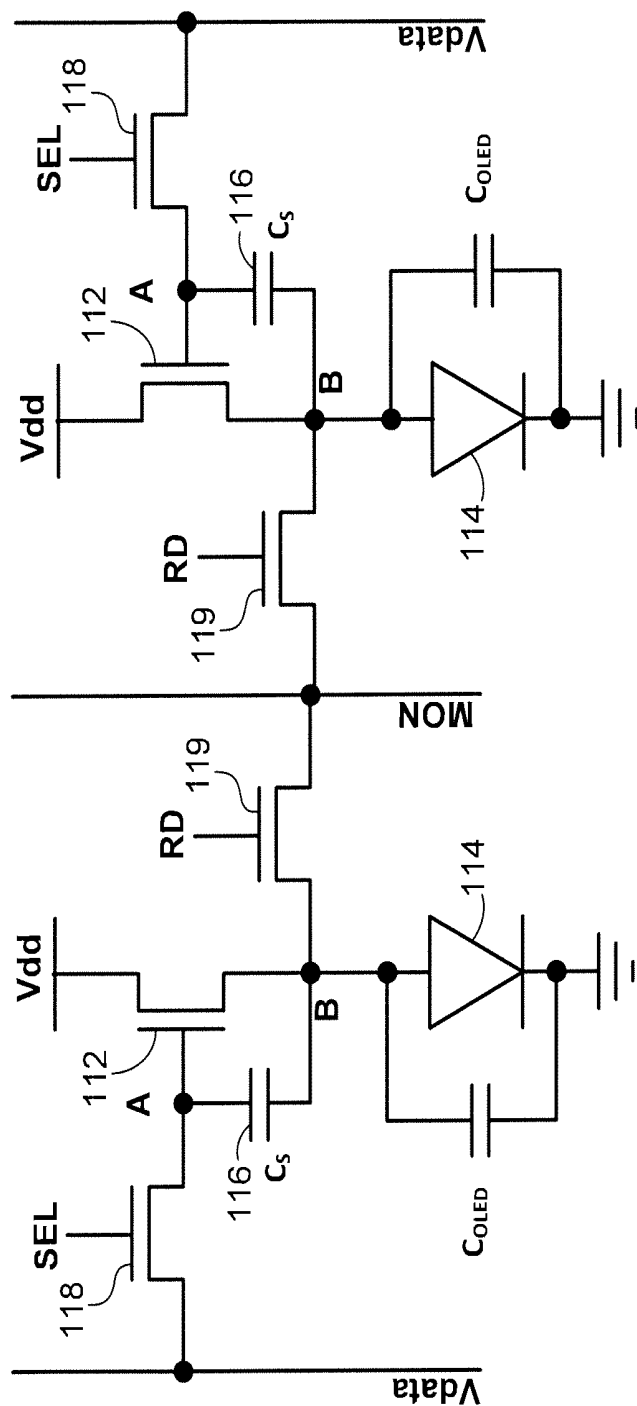


FIG. 3

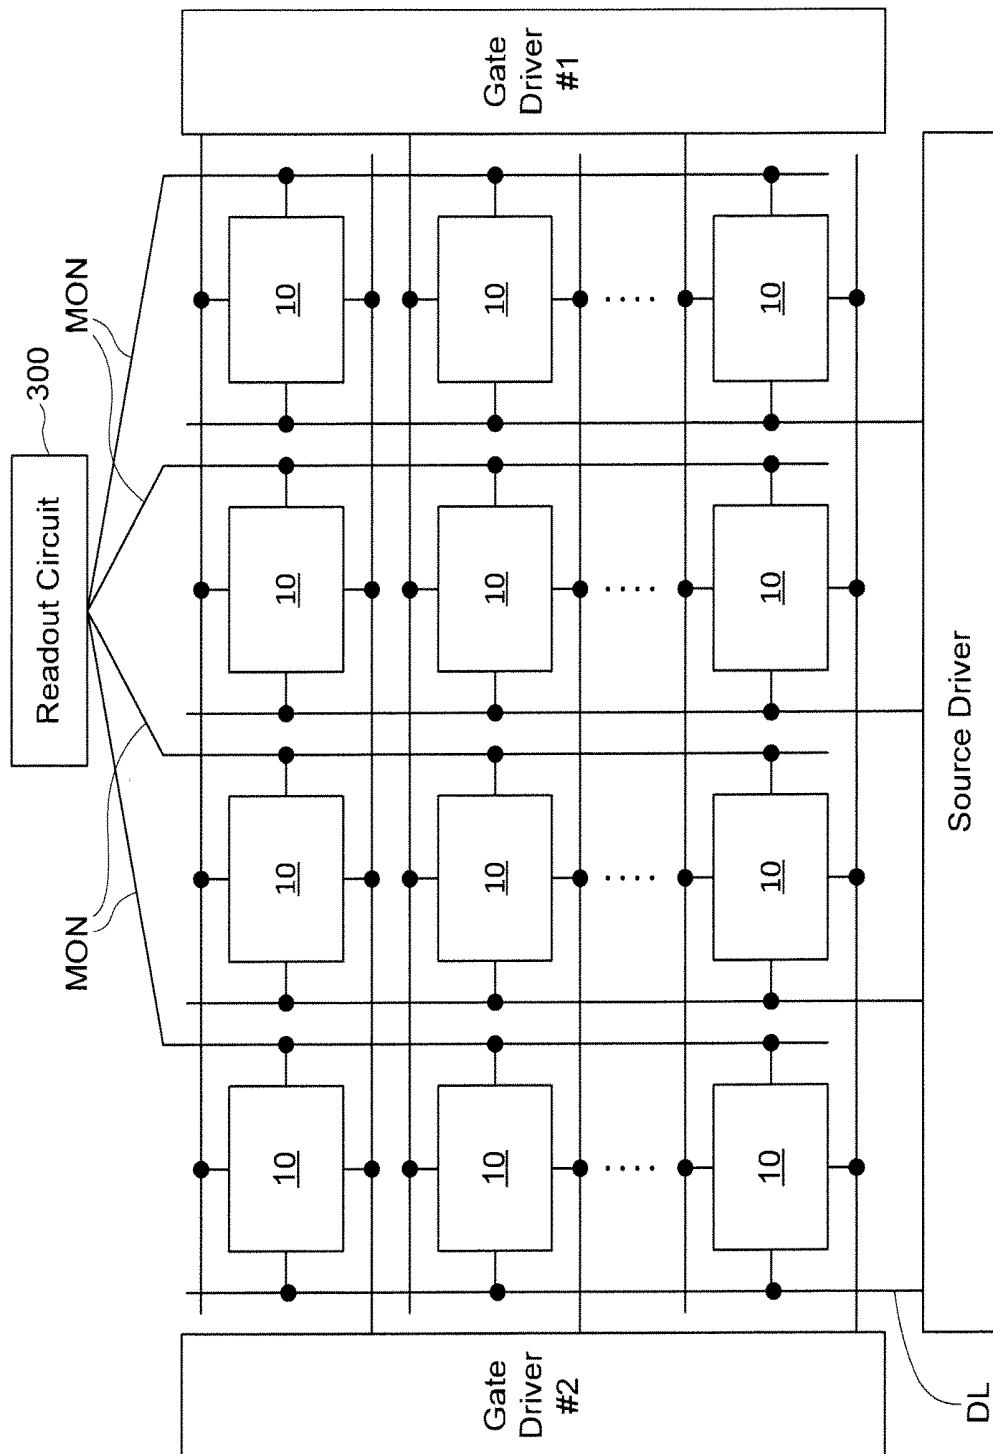


FIG. 4

PIXEL CIRCUITS FOR AMOLED DISPLAYS

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a continuation of and claims the benefit of U.S. patent application Ser. No. 13/789,978, filed Mar. 8, 2013, now allowed, which is hereby incorporated by reference herein in its entirety.

FIELD OF THE INVENTION

The present disclosure generally relates to circuits for use in displays, and methods of driving, calibrating, and programming displays, particularly displays such as active matrix organic light emitting diode displays.

BACKGROUND

Displays can be created from an array of light emitting devices each controlled by individual circuits (i.e., pixel circuits) having transistors for selectively controlling the circuits to be programmed with display information and to emit light according to the display information. Thin film transistors ("TFTs") fabricated on a substrate can be incorporated into such displays. TFTs tend to demonstrate non-uniform behavior across display panels and over time as the displays age. Compensation techniques can be applied to such displays to achieve image uniformity across the displays and to account for degradation in the displays as the displays age.

Some schemes for providing compensation to displays to account for variations across the display panel and over time utilize monitoring systems to measure time dependent parameters associated with the aging (i.e., degradation) of the pixel circuits. The measured information can then be used to inform subsequent programming of the pixel circuits so as to ensure that any measured degradation is accounted for by adjustments made to the programming. Such monitored pixel circuits may require the use of additional transistors and/or lines to selectively couple the pixel circuits to the monitoring systems and provide for reading out information. The incorporation of additional transistors and/or lines may undesirably decrease pixel-pitch (i.e., "pixel density").

SUMMARY

In accordance with one embodiment, the OLED voltage of a selected pixel is extracted from the pixel produced when the pixel is programmed so that the pixel current is a function of the OLED voltage. One method for extracting the OLED voltage is to first program the pixel in a way that the current is not a function of OLED voltage, and then in a way that the current is a function of OLED voltage. During the latter stage, the programming voltage is changed so that the pixel current is the same as the pixel current when the pixel was programmed in a way that the current was not a function of OLED voltage. The difference in the two programming voltages is then used to extract the OLED voltage.

Another method for extracting the OLED voltage is to measure the difference between the current of the pixel when it is programmed with a fixed voltage in both methods (being affected by OLED voltage and not being affected by OLED

voltage). This measured difference and the current-voltage characteristics of the pixel are then used to extract the OLED voltage.

A further method for extracting the shift in the OLED voltage is to program the pixel for a given current at time zero (before usage) in a way that the pixel current is a function of OLED voltage, and save the programming voltage. To extract the OLED voltage shift after some usage time, the pixel is programmed for the given current as was done at time zero. To get the same current as time zero, the programming voltage needs to change. The difference in the two programming voltages is then used to extract the shift in the OLED voltage. Here one needs to remove the effect of TFT aging from the second programming voltage first; this is done by programming the pixel without OLED effect for a given current at time zero and after usage. The difference in the programming voltages in this case is the TFT aging, which is subtracted from the calculated difference in the aforementioned case.

In one implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a programming voltage to the drive transistor in the selected pixel to supply a first current to the light-emitting device (the first current being independent of the effective voltage V_{OLED} of the light-emitting device), measuring the first current, supplying a second programming voltage to the drive transistor in the selected pixel to supply a second current to the light-emitting device, the second current being a function of the current effective voltage V_{OLED} of the light-emitting device, measuring the second current and comparing the first and second current measurements, adjusting the second programming voltage to make the second current substantially the same as the first current, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second programming voltages.

In another implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a first programming voltage to the drive transistor in the selected pixel to supply a first current to the light-emitting device in the selected pixel (the first current being independent of the effective voltage V_{OLED} of the light-emitting device), measuring the first current, supplying a second programming voltage to the drive transistor in the selected pixel to supply a second current to the light-emitting device in the selected pixel (the second current being a function of the current effective voltage V_{OLED} of the light-emitting device), measuring the second current, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second current measurements.

In a modified implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a first programming voltage to the drive transistor in the selected pixel to supply a predetermined current to the light-emitting device at a first time (the first current being a function of the effective voltage V_{OLED} of the light-emitting device), supplying a second programming voltage to the drive transistor in the selected pixel to supply the predetermined current to the light-emitting device at a second time following substantial usage of the display, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second programming voltages.

In another modified implementation, the current effective voltage V_{OLED} of a light-emitting device in a selected pixel is determined by supplying a predetermined programming

voltage to the drive transistor in the selected pixel to supply a first current to the light-emitting device (the first current being independent of the effective voltage V_{OLED} of the light-emitting device), measuring the first current, supplying the predetermined programming voltage to the drive transistor in the selected pixel to supply a second current to the light-emitting device (the second current being a function of the current effective voltage V_{OLED} of the light-emitting device), measuring the second current, and extracting the value of the current effective voltage V_{OLED} of the light-emitting device from the difference between the first and second currents and current-voltage characteristics of the selected pixel.

In a preferred implementation, a system is provided for controlling an array of pixels in a display in which each pixel includes a light-emitting device. Each pixel includes a pixel circuit that comprises the light-emitting device, which emits light when supplied with a voltage V_{OLED} ; a drive transistor for driving current through the light-emitting device according to a driving voltage across the drive transistor during an emission cycle, the drive transistor having a gate, a source and a drain and characterized by a threshold voltage; and a storage capacitor coupled across the source and gate of the drive transistor for providing the driving voltage to the drive transistor. A supply voltage source is coupled to the drive transistor for supplying current to the light-emitting device via the drive transistor, the current being controlled by the driving voltage. A monitor line is coupled to a read transistor that controls the coupling of the monitor line to a first node that is common to the source side of the storage capacitor, the source of the drive transistor, and the light-emitting device. A data line is coupled to a switching transistor that controls the coupling of the data line to a second node that is common to the gate side of the storage capacitor and the gate of the drive transistor. A controller coupled to the data and monitor lines and to the switching and read transistors is adapted to:

- (1) during a first cycle, turn on the switching and read transistors while delivering a voltage V_b to the monitor line and a voltage V_{d1} to the data line, to supply the first node with a voltage that is independent of the voltage across the light-emitting device,
- (2) during a second cycle, turn on the read transistor and turn off the switching transistor while delivering a voltage V_{ref} to the monitor line, and read a first sample of the drive current at the first node via the read transistor and the monitor line,
- (3) during a third cycle, turn off the read transistor and turn on the switching transistor while delivering a voltage V_{d2} to the data line, so that the voltage at the second node is a function of V_{OLED} , and
- (4) during a fourth cycle, turn on said read transistor and turn off said switching transistor while delivering a voltage V_{ref} to said monitor line, and read a second sample the drive current at said first node via said read transistor and said monitor line. The first and second samples of the drive current are compared and, if they are different, the first through fourth cycles are repeated using an adjusted value of at least one of the voltages V_{d1} and V_{d2} , until the first and second samples are substantially the same.

The foregoing and additional aspects and embodiments of the present invention will be apparent to those of ordinary skill in the art in view of the detailed description of various embodiments and/or aspects, which is made with reference to the drawings, a brief description of which is provided next.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other advantages of the invention will become apparent upon reading the following detailed description and upon reference to the drawings.

FIG. 1 is a block diagram of an exemplary configuration of a system for driving an OLED display while monitoring the degradation of the individual pixels and providing compensation therefor.

FIG. 2A is a circuit diagram of an exemplary pixel circuit configuration.

FIG. 2B is a timing diagram of first exemplary operation cycles for the pixel shown in FIG. 2A.

FIG. 2C is a timing diagram of second exemplary operation cycles for the pixel shown in FIG. 2A.

FIG. 3 is a circuit diagram of another exemplary pixel circuit configuration.

FIG. 4 is a block diagram of a modified configuration of a system for driving an OLED display using a shared readout circuit, while monitoring the degradation of the individual pixels and providing compensation therefor.

While the invention is susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION

FIG. 1 is a diagram of an exemplary display system 50. The display system 50 includes an address driver 8, a data driver 4, a controller 2, a memory storage 6, and display panel 20. The display panel 20 includes an array of pixels 10 arranged in rows and columns. Each of the pixels 10 is individually programmable to emit light with individually programmable luminance values. The controller 2 receives digital data indicative of information to be displayed on the display panel 20. The controller 2 sends signals 32 to the data driver 4 and scheduling signals 34 to the address driver 8 to drive the pixels 10 in the display panel 20 to display the information indicated. The plurality of pixels 10 associated with the display panel 20 thus comprise a display array ("display screen") adapted to dynamically display information according to the input digital data received by the controller 2. The display screen can display, for example, video information from a stream of video data received by the controller 2. The supply voltage 14 can provide a constant power voltage or can be an adjustable voltage supply that is controlled by signals from the controller 2. The display system 50 can also incorporate features from a current source or sink (not shown) to provide biasing currents to the pixels 10 in the display panel 20 to thereby decrease programming time for the pixels 10.

For illustrative purposes, the display system 50 in FIG. 1 is illustrated with only four pixels 10 in the display panel 20. It is understood that the display system 50 can be implemented with a display screen that includes an array of similar pixels, such as the pixels 10, and that the display screen is not limited to a particular number of rows and columns of pixels. For example, the display system 50 can be implemented with a display screen with a number of rows

and columns of pixels commonly available in displays for mobile devices, monitor-based devices, and/or projection devices.

The pixel 10 is operated by a driving circuit (“pixel circuit”) that generally includes a driving transistor and a light emitting device. Hereinafter the pixel 10 may refer to the pixel circuit. The light emitting device can optionally be an organic light emitting diode, but implementations of the present disclosure apply to pixel circuits having other electroluminescence devices, including current-driven light emitting devices. The driving transistor in the pixel 10 can optionally be an n-type or p-type amorphous silicon thin-film transistor, but implementations of the present disclosure are not limited to pixel circuits having a particular polarity of transistor or only to pixel circuits having thin-film transistors. The pixel circuit 10 can also include a storage capacitor for storing programming information and allowing the pixel circuit 10 to drive the light emitting device after being addressed. Thus, the display panel 20 can be an active matrix display array.

As illustrated in FIG. 1, the pixel 10 illustrated as the top-left pixel in the display panel 20 is coupled to a select line 24i, a supply line 26i, a data line 22j, and a monitor line 28j. A read line may also be included for controlling connections to the monitor line. In one implementation, the supply voltage 14 can also provide a second supply line to the pixel 10. For example, each pixel can be coupled to a first supply line 26 charged with Vdd and a second supply line 27 coupled with Vss, and the pixel circuits 10 can be situated between the first and second supply lines to facilitate driving current between the two supply lines during an emission phase of the pixel circuit. The top-left pixel 10 in the display panel 20 can correspond a pixel in the display panel in a “ith” row and “jth” column of the display panel 20. Similarly, the top-right pixel 10 in the display panel 20 represents a “jth” row and “mth” column; the bottom-left pixel 10 represents an “nth” row and “jth” column; and the bottom-right pixel 10 represents an “nth” row and “mth” column. Each of the pixels 10 is coupled to appropriate select lines (e.g., the select lines 24i and 24n), supply lines (e.g., the supply lines 26i and 26n), data lines (e.g., the data lines 22j and 22m), and monitor lines (e.g., the monitor lines 28j and 28m). It is noted that aspects of the present disclosure apply to pixels having additional connections, such as connections to additional select lines, and to pixels having fewer connections, such as pixels lacking a connection to a monitoring line.

With reference to the top-left pixel 10 shown in the display panel 20, the select line 24i is provided by the address driver 8, and can be utilized to enable, for example, a programming operation of the pixel 10 by activating a switch or transistor to allow the data line 22j to program the pixel 10. The data line 22j conveys programming information from the data driver 4 to the pixel 10. For example, the data line 22j can be utilized to apply a programming voltage or a programming current to the pixel 10 in order to program the pixel 10 to emit a desired amount of luminance. The programming voltage (or programming current) supplied by the data driver 4 via the data line 22j is a voltage (or current) appropriate to cause the pixel 10 to emit light with a desired amount of luminance according to the digital data received by the controller 2. The programming voltage (or programming current) can be applied to the pixel 10 during a programming operation of the pixel 10 so as to charge a storage device within the pixel 10, such as a storage capacitor, thereby enabling the pixel 10 to emit light with the desired amount of luminance during an emission operation

following the programming operation. For example, the storage device in the pixel 10 can be charged during a programming operation to apply a voltage to one or more of a gate or a source terminal of the driving transistor during the emission operation, thereby causing the driving transistor to convey the driving current through the light emitting device according to the voltage stored on the storage device.

Generally, in the pixel 10, the driving current that is conveyed through the light emitting device by the driving transistor during the emission operation of the pixel 10 is a current that is supplied by the first supply line 26i and is drained to a second supply line 27i. The first supply line 26i and the second supply line 27i are coupled to the voltage supply 14. The first supply line 26i can provide a positive supply voltage (e.g., the voltage commonly referred to in circuit design as “Vdd”) and the second supply line 27i can provide a negative supply voltage (e.g., the voltage commonly referred to in circuit design as “Vss”). Implementations of the present disclosure can be realized where one or the other of the supply lines (e.g., the supply line 27i) is fixed at a ground voltage or at another reference voltage.

The display system 50 also includes a monitoring system 12. With reference again to the top left pixel 10 in the display panel 20, the monitor line 28j connects the pixel 10 to the monitoring system 12. The monitoring system 12 can be integrated with the data driver 4, or can be a separate stand-alone system. In particular, the monitoring system 12 can optionally be implemented by monitoring the current and/or voltage of the data line 22j during a monitoring operation of the pixel 10, and the monitor line 28j can be entirely omitted. Additionally, the display system 50 can be implemented without the monitoring system 12 or the monitor line 28j. The monitor line 28j allows the monitoring system 12 to measure a current or voltage associated with the pixel 10 and thereby extract information indicative of a degradation of the pixel 10. For example, the monitoring system 12 can extract, via the monitor line 28j, a current flowing through the driving transistor within the pixel 10 and thereby determine, based on the measured current and based on the voltages applied to the driving transistor during the measurement, a threshold voltage of the driving transistor or a shift thereof.

The monitoring system 12 can also extract an operating voltage of the light emitting device (e.g., a voltage drop across the light emitting device while the light emitting device is operating to emit light). The monitoring system 12 can then communicate signals 32 to the controller 2 and/or the memory 6 to allow the display system 50 to store the extracted degradation information in the memory 6. During subsequent programming and/or emission operations of the pixel 10, the degradation information is retrieved from the memory 6 by the controller 2 via memory signals 36, and the controller 2 then compensates for the extracted degradation information in subsequent programming and/or emission operations of the pixel 10. For example, once the degradation information is extracted, the programming information conveyed to the pixel 10 via the data line 22j can be appropriately adjusted during a subsequent programming operation of the pixel 10 such that the pixel 10 emits light with a desired amount of luminance that is independent of the degradation of the pixel 10. In an example, an increase in the threshold voltage of the driving transistor within the pixel 10 can be compensated for by appropriately increasing the programming voltage applied to the pixel 10.

FIG. 2A is a circuit diagram of an exemplary driving circuit for a pixel 110. The driving circuit shown in FIG. 2A is utilized to calibrate, program and drive the pixel 110 and

includes a drive transistor **112** for conveying a driving current through an organic light emitting diode ("OLED") **114**. The OLED **114** emits light according to the current passing through the OLED **114**, and can be replaced by any current-driven light emitting device. The OLED **114** has an inherent capacitance C_{OLED} . The pixel **110** can be utilized in the display panel **20** of the display system **50** described in connection with FIG. 1.

The driving circuit for the pixel **110** also includes a storage capacitor **116** and a switching transistor **118**. The pixel **110** is coupled to a select line SEL, a voltage supply line Vdd, a data line Vdata, and a monitor line MON. The driving transistor **112** draws a current from the voltage supply line Vdd according to a gate-source voltage (Vgs) across the gate and source terminals of the drive transistor **112**. For example, in a saturation mode of the drive transistor **112**, the current passing through the drive transistor **112** can be given by $I_{ds} = \beta(V_{gs} - V_t)^2$, where β is a parameter that depends on device characteristics of the drive transistor **112**, I_{ds} is the current from the drain terminal to the source terminal of the drive transistor **112**, and V_t is the threshold voltage of the drive transistor **112**.

In the pixel **110**, the storage capacitor **116** is coupled across the gate and source terminals of the drive transistor **112**. The storage capacitor **116** has a first terminal, which is referred to for convenience as a gate-side terminal, and a second terminal, which is referred to for convenience as a source-side terminal. The gate-side terminal of the storage capacitor **116** is electrically coupled to the gate terminal of the drive transistor **112**. The source-side terminal **116s** of the storage capacitor **116** is electrically coupled to the source terminal of the drive transistor **112**. Thus, the gate-source voltage Vgs of the drive transistor **112** is also the voltage charged on the storage capacitor **116**. As will be explained further below, the storage capacitor **116** can thereby maintain a driving voltage across the drive transistor **112** during an emission phase of the pixel **110**.

The drain terminal of the drive transistor **112** is connected to the voltage supply line Vdd, and the source terminal of the drive transistor **112** is connected to (1) the anode terminal of the OLED **114** and (2) a monitor line MON via a read transistor **119**. A cathode terminal of the OLED **114** can be connected to ground or can optionally be connected to a second voltage supply line, such as the supply line Vss shown in FIG. 1. Thus, the OLED **114** is connected in series with the current path of the drive transistor **112**. The OLED **114** emits light according to the magnitude of the current passing through the OLED **114**, once a voltage drop across the anode and cathode terminals of the OLED achieves an operating voltage (V_{OLED}) of the OLED **114**. That is, when the difference between the voltage on the anode terminal and the voltage on the cathode terminal is greater than the operating voltage V_{OLED} , the OLED **114** turns on and emits light. When the anode-to-cathode voltage is less than V_{OLED} , current does not pass through the OLED **114**.

The switching transistor **118** is operated according to the select line SEL (e.g., when the voltage on the select line SEL is at a high level, the switching transistor **118** is turned on, and when the voltage SEL is at a low level, the switching transistor is turned off). When turned on, the switching transistor **118** electrically couples node A (the gate terminal of the driving transistor **112** and the gate-side terminal of the storage capacitor **116**) to the data line Vdata.

The read transistor **119** is operated according to the read line RD (e.g., when the voltage on the read line RD is at a high level, the read transistor **119** is turned on, and when the voltage RD is at a low level, the read transistor **119** is turned

off). When turned on, the read transistor **119** electrically couples node B (the source terminal of the driving transistor **112**, the source-side terminal of the storage capacitor **116**, and the anode of the OLED **114**) to the monitor line MON.

FIG. 2B is a timing diagram of exemplary operation cycles for the pixel **110** shown in FIG. 2A. During a first cycle **150**, both the SEL line and the RD line are high, so the corresponding transistors **118** and **119** are turned on. The switching transistor **118** applies a voltage Vd1, which is at a level sufficient to turn on the drive transistor **112**, from the data line Vdata to node A. The read transistor **119** applies a monitor-line voltage Vb, which is at a level that turns the OLED **114** off, from the monitor line MON to node B. As a result, the gate-source voltage Vgs is independent of V_{OLED} ($V_{d1} - V_b - V_{ds3}$, where V_{ds3} is the voltage drop across the read transistor **119**). The SEL and RD lines go low at the end of the cycle **150**, turning off the transistors **118** and **119**.

During the second cycle **154**, the SEL line is low to turn off the switching transistor **118**, and the drive transistor **112** is turned on by the charge on the capacitor **116** at node A. The voltage on the read line RD goes high to turn on the read transistor **119** and thereby permit a first sample of the drive transistor current to be taken via the monitor line MON, while the OLED **114** is off. The voltage on the monitor line MON is Vref, which may be at the same level as the voltage Vb in the previous cycle.

During the third cycle **158**, the voltage on the select line SEL is high to turn on the switching transistor **118**, and the voltage on the read line RD is low to turn off the read transistor **119**. Thus, the gate of the drive transistor **112** is charged to the voltage Vd2 of the data line Vdata, and the source of the drive transistor **112** is set to V_{OLED} by the OLED **114**. Consequently, the gate-source voltage Vgs of the drive transistor **112** is a function of V_{OLED} ($V_{gs} = V_{d2} - V_{OLED}$).

During the fourth cycle **162**, the voltage on the select line SEL is low to turn off the switching transistor, and the drive transistor **112** is turned on by the charge on the capacitor **116** at node A. The voltage on the read line RD is high to turn on the read transistor **119**, and a second sample of the current of the drive transistor **112** is taken via the monitor line MON.

If the first and second samples of the drive current are not the same, the voltage Vd2 on the Vdata line is adjusted, the programming voltage Vd2 is changed, and the sampling and adjustment operations are repeated until the second sample of the drive current is the same as the first sample. When the two samples of the drive current are the same, the two gate-source voltages should also be the same, which means that:

$$\begin{aligned} V_{OLED} &= V_{d2} - V_{gs} \\ &= V_{d2} - (V_{d1} - V_b - V_{ds3}) \\ &= V_{d2} - V_{d1} + V_b + V_{ds3}. \end{aligned}$$

After some operation time (t), the change in V_{OLED} between time 0 and time t is $\Delta V_{OLED} = V_{OLED}(t) - V_{OLED}(0) = V_{d2}(t) - V_{d2}(0)$. Thus, the difference between the two programming voltages $V_{d2}(t)$ and $V_{d2}(0)$ can be used to extract the OLED voltage.

FIG. 2C is a modified schematic timing diagram of another set of exemplary operation cycles for the pixel **110** shown in FIG. 2A, for taking only a single reading of the drive current and comparing that value with a known reference value. For example, the reference value can be the

desired value of the drive current derived by the controller to compensate for degradation of the drive transistor **112** as it ages. The OLED voltage V_{OLED} can be extracted by measuring the difference between the pixel currents when the pixel is programmed with fixed voltages in both methods (being affected by V_{OLED} and not being affected by V_{OLED}). This difference and the current-voltage characteristics of the pixel can then be used to extract V_{OLED} .

During the first cycle **200** of the exemplary timing diagram in FIG. 2C, the select line SEL is high to turn on the switching transistor **118**, and the read line RD is low to turn off the read transistor **118**. The data line Vdata supplies a voltage Vd2 to node A via the switching transistor **118**. During the second cycle **201**, SEL is low to turn off the switching transistor **118**, and RD is high to turn on the read transistor **119**. The monitor line MON supplies a voltage Vref to the node B via the read transistor **118**, while a reading of the value of the drive current is taken via the read transistor **119** and the monitor line MON. This read value is compared with the known reference value of the drive current and, if the read value and the reference value of the drive current are different, the cycles **200** and **201** are repeated using an adjusted value of the voltage Vd2. This process is repeated until the read value and the reference value of the drive current are substantially the same, and then the adjusted value of Vd2 can be used to determine V_{OLED} .

FIG. 3 is a circuit diagram of two of the pixels **110a** and **110b** like those shown in FIG. 2A but modified to share a common monitor line MON, while still permitting independent measurement of the driving current and OLED voltage separately for each pixel. The two pixels **110a** and **110b** are in the same row but in different columns, and the two columns share the same monitor line MON. Only the pixel selected for measurement is programmed with valid voltages, while the other pixel is programmed to turn off the drive transistor **12** during the measurement cycle. Thus, the drive transistor of one pixel will have no effect on the current measurement in the other pixel.

FIG. 4 illustrates a modified drive system that utilizes a readout circuit **300** that is shared by multiple columns of pixels while still permitting the measurement of the driving current and OLED voltage independently for each of the individual pixels **10**. Although only four columns are illustrated in FIG. 4, it will be understood that a typical display contains a much larger number of columns, and they can all use the same readout circuit. Alternatively, multiple readout circuits can be utilized, with each readout circuit still sharing multiple columns, so that the number of readout circuits is significantly less than the number of columns. Only the pixel selected for measurement at any given time is programmed with valid voltages, while all the other pixels sharing the same gate signals are programmed with voltages that cause the respective drive transistors to be off. Consequently, the drive transistors of the other pixels will have no effect on the current measurement being taken of the selected pixel. Also, when the driving current in the selected pixel is used to measure the OLED voltage, the measurement of the OLED voltage is also independent of the drive transistors of the other pixels.

While particular embodiments and applications of the present invention have been illustrated and described, it is to be understood that the invention is not limited to the precise construction and compositions disclosed herein and that various modifications, changes, and variations can be appar-

ent from the foregoing descriptions without departing from the spirit and scope of the invention as defined in the appended claims.

What is claimed is:

1. A method of determining a change, between a first time and a second time, in the current effective voltage V_{OLED} of a light-emitting device in a selected pixel in an array of pixels in a display in which each pixel includes a drive transistor for supplying current to said light-emitting device, the second time after the first time following substantial usage of said display, said method comprising

supplying a first programming voltage to said drive transistor in said selected pixel to supply a first current to said light-emitting device in said selected pixel at the first time, said first current being a function of the effective voltage V_{OLED} of said light-emitting device; measuring said first current;

supplying a second programming voltage to said drive transistor in said selected pixel to supply a second current to said light-emitting device in said selected pixel at the second time;

measuring said second current and comparing said first and second current measurements, adjusting said second programming voltage to make said second current substantially the same as said first current, and

extracting the value of the change, between the first time and the second time, in the current effective voltage V_{OLED} of said light-emitting device from the difference between said first and second programming voltages.

2. A method of determining the current effective voltage V_{OLED} of a light-emitting device in a selected pixel in an array of pixels in a display in which each pixel includes a drive transistor for supplying current to said light-emitting device, said method comprising

at a first time, extracting a first value of the current effective voltage V_{OLED} of said light-emitting device, supplying a first programming voltage to said drive transistor in said selected pixel to supply a first current to said light-emitting device in said selected pixel at the first time, said first current being a function of the effective voltage V_{OLED} of said light-emitting device; measuring said first current;

supplying a second programming voltage to said drive transistor in said selected pixel to supply a second current to said light-emitting device in said selected pixel at a second time after the first time following substantial usage of said display;

measuring said second current and comparing said first and second current measurements, adjusting said second programming voltage to make said second current substantially the same as said first current,

determining a value of the change in the current effective voltage V_{OLED} of said light-emitting device from the difference between said first and second programming voltages, and

extracting the value of the current effective voltage V_{OLED} of said light-emitting device from the first value of the current effective voltage V_{OLED} of said light-emitting device and the change in the value of the current effective voltage V_{OLED} of said light-emitting device.

3. A method of determining the current effective voltage V_{OLED} of a light-emitting device in a selected pixel in an array of pixels in a display in which each pixel includes a drive transistor for supplying current to said light-emitting device, said method comprising

11

at a first time,
 supplying a programming voltage to said drive transistor in said selected pixel to supply a first current to said light-emitting device in said selected pixel, said first current being independent of the effective voltage V_{OLED} of said light-emitting device, 5
 measuring said first current,
 supplying a second programming voltage to said drive transistor in said selected pixel to supply a second current to said light-emitting device in said selected pixel, said second current being a function of the current effective voltage V_{OLED} of said light-emitting device, 10
 measuring said second current and comparing said first and second current measurements,
 adjusting said second programming voltage to make said second current substantially the same as said first current, and 15
 extracting a first value of the current effective voltage V_{OLED} of said light-emitting device from the difference between said first and second programming voltages, at a second time after the first time following substantial usage of said display, 20

12

supplying a third programming voltage to said drive transistor in said selected pixel to supply a third current to said light-emitting device in said selected pixel, said third current being a function of the current effective voltage V_{OLED} of said light-emitting device,
 measuring said third current and comparing said second and third current measurements,
 adjusting said second programming voltage to make said third current substantially the same as said second current, and
 determining a change in the value of the current effective voltage V_{OLED} of said light-emitting device from the difference between said second and third programming voltages, and
 extracting the value of the current effective voltage V_{OLED} of said light-emitting device from the first value of the current effective voltage V_{OLED} of said light-emitting device and the change in the value of the current effective voltage V_{OLED} of said light-emitting device.

* * * * *

专利名称(译)	用于AMOLED显示器的像素电路		
公开(公告)号	US9659527	公开(公告)日	2017-05-23
申请号	US15/133318	申请日	2016-04-20
[标]申请(专利权)人(译)	伊格尼斯创新公司		
申请(专利权)人(译)	IGNIS创新INC.		
当前申请(专利权)人(译)	IGNIS创新INC.		
[标]发明人	AZIZI YASER CHAJI GHOLAMREZA		
发明人	AZIZI, YASER CHAJI, GHOLAMREZA		
IPC分类号	G09G3/32 H05B33/08 G09G3/3233		
CPC分类号	G09G3/3233 H05B33/0848 G09G2300/0819 G09G2300/0842 G09G2320/0295 G09G2320/045 G09G2320/0693 G09G2320/10 G09G3/3258 G09G2320/048 H05B45/14		
代理机构(译)	尼克松皮博迪律师事务所		
审查员(译)	XAVIER , ANTONIO		
其他公开文献	US20160232845A1		
外部链接	Espacenet USPTO		

摘要(译)

从像素被编程时产生的像素中提取所选像素的OLED电压，使得像素电流是OLED电压的函数。用于提取OLED电压的一种方法是首先以电流不是OLED电压的函数的方式对像素进行编程，然后以电流是OLED电压的函数的方式对像素进行编程。在后一阶段期间，改变编程电压，使得像素电流与像素被编程的像素电流相同，使得电流不是OLED电压的函数。然后使用两个编程电压的差异来提取OLED电压。

