



US 20160301030A1

(19) **United States**(12) **Patent Application Publication**
FUJINO et al.(10) **Pub. No.: US 2016/0301030 A1**(43) **Pub. Date: Oct. 13, 2016**(54) **OLED DISPLAY DEVICE, NON-CONTACT IC
CARD AND FLEXIBLE DISPLAY DEVICE****Publication Classification**(71) Applicant: **BOE TECHNOLOGY GROUP CO.,
LTD., Beijing (CN)**(72) Inventors: **Seiji FUJINO, Beijing (CN); Guodong
HUANG, Beijing (CN); Xiaohu
WANG, Beijing (CN)**(73) Assignee: **BOE TECHNOLOGY GROUP CO.,
LTD., Beijing (CN)**(21) Appl. No.: **14/646,145**(22) PCT Filed: **Oct. 24, 2014**(86) PCT No.: **PCT/CN2014/089434**

§ 371 (c)(1),

(2) Date: **May 20, 2015**(30) **Foreign Application Priority Data**


Jun. 25, 2014 (CN) 201420346192.7

(51) **Int. Cl.****H01L 51/52** (2006.01)**H01L 23/66** (2006.01)**H01L 25/16** (2006.01)**H01L 27/32** (2006.01)(52) **U.S. Cl.**CPC **H01L 51/5253** (2013.01); **H01L 27/3276**
(2013.01); **H01L 23/66** (2013.01); **H01L****27/3225** (2013.01); **H01L 27/3288** (2013.01);**H01L 25/167** (2013.01); **H01L 2223/6677**(2013.01); **H01L 2251/5338** (2013.01)

(57)

ABSTRACT

The present disclosure relates to the field of organic electroluminescence and provides an OLED display device, a non-contact IC card and a flexible display device. The OLED display device includes a substrate, an encapsulation structure arranged above the substrate, and an OLED arranged between the substrate and the encapsulation structure. A region where an integrated circuit of the display device is bonded is arranged between the substrate and the OLED.

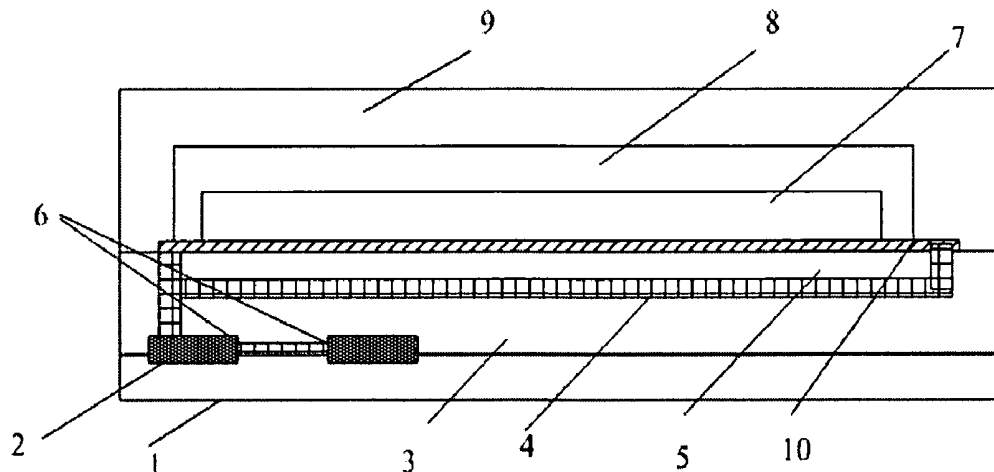

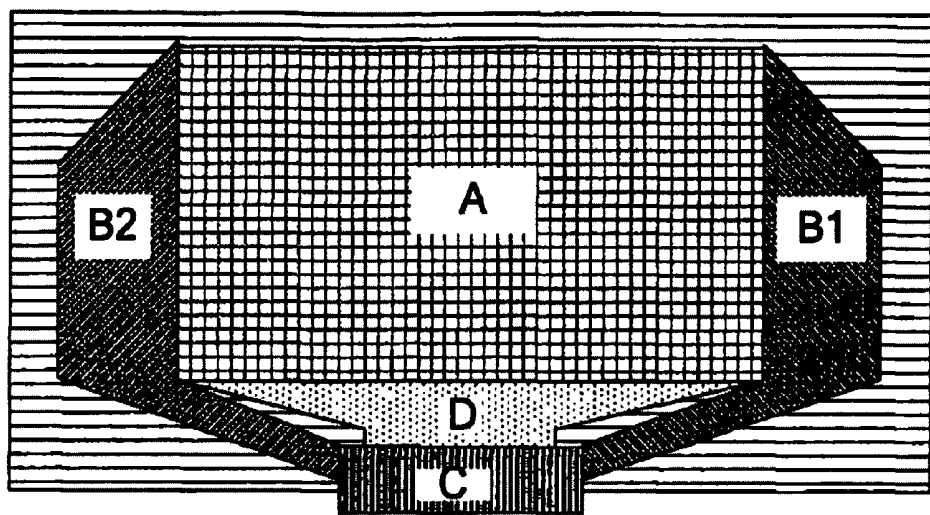


Fig.1

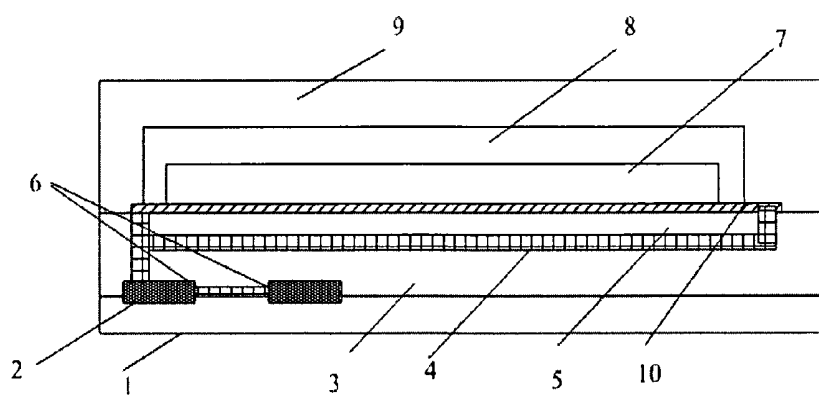


Fig.2

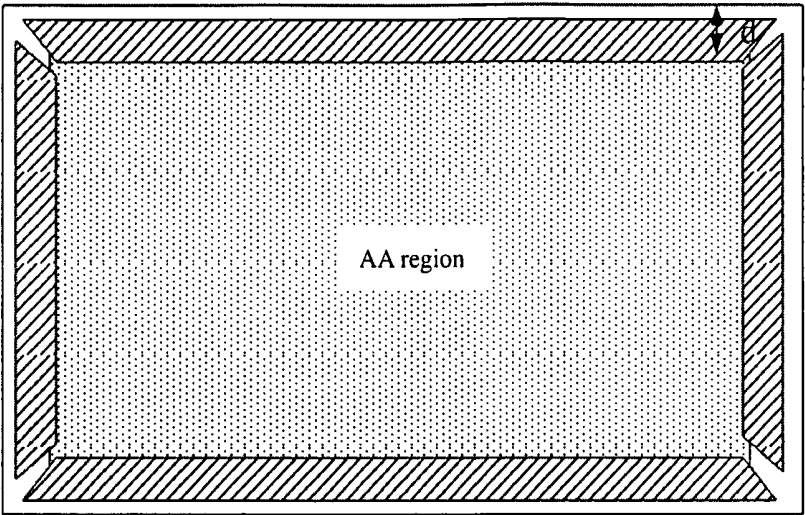


Fig.3

OLED DISPLAY DEVICE, NON-CONTACT IC CARD AND FLEXIBLE DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application is the U.S. national phase of PCT Application No. PCT/CN2014/089434 filed on Oct. 24, 2014, which claims a priority of the Chinese patent application No. 201420346192.7 filed on Jun. 25, 2014, the disclosures of which are incorporated in their entirety by reference herein.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of organic electroluminescence, in particular to an OLED display device, a non-contact IC card and a flexible display device.

BACKGROUND

[0003] The principle of organic electroluminescence lies in that a cathode layer and an anode layer are arranged at both sides of a light-emitting layer made of an organic material, and the organic material of the light-emitting layer will emit light when a voltage is applied across the cathode layer and the anode layer and a current flows through the light-emitting layer. An organic light-emitting diode (OLED) has been developed on the basis of this principle. As compared with a traditional liquid crystal display device, the OLED has such advantages as small size, simple manufacturing process, fully-cured light-emitting material, and flexibility, thus it has been widely used in display and lighting.

[0004] An existing OLED display device includes, apart from the anode layer, the light-emitting layer and the cathode layer, an insulating layer and an isolation column layer, so as to divide the light-emitting layer into a plurality of small light-emitting points, i.e., pixel points. The different pixel points emit light as required, so as to form an image. For the OLED, a region having the light-emitting layer is called as a light-emitting region, and a current flows towards the light-emitting region via a lead outside the light-emitting region. A region where the leads are lapped onto the light-emitting region is called as a lapping region.

[0005] FIG. 1 is a schematic view showing the existing OLED display device. It includes a substrate and regions located on the substrate, i.e., a display region A consisting of an array of the light-emitting points and at which the anodes are arranged in a row direction while the cathodes are arranged in a column direction, first lead regions B1 and B2 arranged at either sides of the display region A and corresponding to the cathodes in odd-numbered rows and in even-numbered rows, respectively, a first lead region D arranged at a lower side of the display region and connected to the anodes of the display region, and an integrated circuit (IC) region C where the first lead regions B1, B2 and D are converged. As shown in FIG. 1, there are the first lead regions and the IC region around the display region A, and these regions will occupy a display area of the display device, so the OLED display device has a wide frame.

SUMMARY

[0006] An object of the present disclosure is to provide an OLED display device, a non-contact IC card and a flexible display device, so as to provide the OLED display device with a narrow frame.

[0007] In one aspect, the present disclosure provides in embodiments an OLED display device, including a substrate, an encapsulation structure arranged above the substrate, and an OLED arranged between the substrate and the encapsulation structure, wherein a region where an integrated circuit of the display device is bonded is arranged between the substrate and the OLED.

[0008] Further, a first lead region is arranged between the OLED and the substrate, a first insulating layer having a first via-hole is arranged between the first lead region and the substrate, and a lead from the first lead region is connected to the integrated circuit through the first via-hole.

[0009] Further, a second insulating layer having a second via-hole, an electrode layer and a second lead region having a third via-hole are arranged between the first lead region and the OLED, and a lead from the first lead region is connected to a cathode and an anode of the OLED through the second via-hole and the third via-hole.

[0010] Further, the first lead region is provided with an antenna for receiving an external data signal.

[0011] Further, the encapsulation structure includes:

[0012] a planarization film arranged on the OLED;

[0013] an encapsulation thin film arranged on the planarization film; and

[0014] a transparent substrate arranged on the encapsulation thin film.

[0015] Further, the integrated circuit is arranged on the substrate, the first insulating layer is arranged on the integrated circuit, the first lead region is arranged on the first insulating layer, the second insulating layer is arranged on the first lead region, the second lead region and the electrode region are arranged on the second insulating layer, the OLED is arranged on the second lead region and the electrode layer, and the encapsulation structure is arranged on the OLED.

[0016] Further, an edge of the OLED is separated from an edge of the substrate in a horizontal direction at a distance of 0.5 mm to 1.5 mm.

[0017] Further, one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

[0018] In another aspect, the present disclosure provides in embodiments a non-contact IC card including the above-mentioned OLED display device.

[0019] In yet another aspect, the present disclosure provides in embodiments a flexible display device including the above-mentioned OLED display device.

[0020] The present disclosure has the following advantageous effects. According to embodiments of the present disclosure, the region where the integrated circuit of the OLED display device is bonded is arranged between the substrate and the OLED, so the integrated circuit may be bonded at any region below the display region (region AA) of the OLED display device, without occupying a display area of the display device. As a result, it is able to narrow a frame at a side of the region AA and to maximize the region AA, thereby to provide the OLED display device with a narrow frame.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] FIG. 1 is a schematic view showing an OLED display device in the related art;

[0022] FIG. 2 is a cross-sectional view of an OLED display device according to an embodiment of the present disclosure; and

[0023] FIG. 3 is a planar view of an OLED display device according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0024] In order to make the objects, the technical solutions and the advantages of the present disclosure more apparent, the present disclosure will be described hereinafter in conjunction with the drawings and embodiments.

[0025] The present disclosure provides in following embodiments an OLED display device, a non-contact IC card and a flexible display device, so as to provide the OLED display device with a narrow frame.

[0026] The OLED display device in embodiments includes a substrate, an encapsulation structure arranged above the substrate, and an OLED arranged between the substrate and the encapsulation structure, wherein a region where an integrated circuit of the display device is bonded is arranged between the substrate and the OLED.

[0027] According to the OLED display device in embodiments of the present disclosure, the region where the integrated circuit of the OLED display device is bonded is arranged between the substrate and the OLED, so the integrated circuit may be bonded at any region below a region AA of the OLED display device, without occupying any display area of the display device. As a result, it is able to narrow a frame at a side of the region AA in FIG. 3 and to maximize the region AA, thereby to provide the OLED display device with a narrow frame.

[0028] Further, a first lead region is arranged between the OLED and the substrate, a first insulating layer having a first via-hole is arranged between the first lead region and the substrate, and a lead from the first lead region is connected to the integrated circuit through the first via-hole.

[0029] Further, a second insulating layer having a second via-hole, an electrode layer and a second lead region having a third via-hole are arranged between the first lead region and the OLED, and a lead from the first lead region is connected to a cathode and an anode of the OLED through the second via-hole and the third via-hole.

[0030] Further, the first lead region is provided with an antenna for receiving an external data signal, and the received external data signal is transmitted to the integrated circuit inside the OLED display device.

[0031] Further, the encapsulation structure includes:

[0032] a planarization film arranged on the OLED;

[0033] an encapsulation thin film arranged on the planarization film; and

[0034] a transparent substrate arranged on the encapsulation thin film.

[0035] Further, the integrated circuit is arranged on the substrate, the first insulating layer is arranged on the integrated circuit, the first lead region is arranged on the first insulating layer, the second insulating layer is arranged on the first lead region, the second lead region and the electrode region are arranged on the second insulating layer, the

OLED is arranged on the second lead region and the electrode layer, and the encapsulation structure is arranged on the OLED.

[0036] Further, an edge of the OLED is separated from an edge of the substrate in a horizontal direction at a distance of 0.5 mm to 1.5 mm.

[0037] Further, one or more of a memory, a Bluetooth module, a GPS module, an MEMS module and an FM module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

[0038] The OLED display device according to embodiments of the present disclosure will be described hereinafter in details in conjunction with the drawings.

[0039] As shown in FIG. 2, the OLED display device includes a substrate 1, an integrated circuit 2 arranged on the substrate 1, a first insulating layer 3 arranged on the integrated circuit 2 and having a first via-hole (not shown), a first lead region 4 arranged on the first insulating layer 3, a second insulating layer 5 arranged on the first lead region 4 and having a second via-hole (not shown), an electrode layer 10 and a second lead region having a third via-hole (not shown) both arranged on the second insulating layer 5, an OLED 7 arranged on the second lead region and the electrode layer 10, and an encapsulation structure arranged on the OLED 7. The encapsulation structure consists of a planarization film, an encapsulation thin film 8 and a transparent substrate 9. For the OLED display device in embodiments of the present disclosure, the OLED 7 is of a top-emitting type, so the transparent substrate is used in the encapsulation structure so as to allow light from the OLED 7 to pass therethrough.

[0040] As shown in FIG. 2, the integrated circuit 2 is bonded at a position 6, i.e., the bonding is performed below the display region of the OLED display device, without occupying any display area of the display device. As a result, it is able to narrow a frame at a size of the region AA in FIG. 3 and maximize the region AA, thereby to provide the OLED display device with a narrow frame.

[0041] Further, in embodiments of the present disclosure, the leads of the OLED display device are also arranged below the display region. The second insulating layer 5, the second lead region and the electrode layer 10 are arranged between the first lead region 4 and the OLED 7, and a lead from the first lead region 4 is connected to an anode and a cathode of the OLED 7 through a second via-hole in the second insulating layer 5 and the third via-hole in the second lead region. The first insulating layer 3 is arranged between the first lead region 4 and the integrated circuit 2, and a lead from the first lead region 4 is connected to the integrated circuit 2 through the first via-hole in the first insulating layer 3. In this way, it is able to further reduce an area of a non-display region. As shown in FIG. 3, an edge of the region AA may be separated from an edge of the entire OLED display device in a horizontal direction at a distance D of 0.5 mm to 1.5 mm.

[0042] Further, apart from the integrated circuit 2, a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module may also be arranged between the substrate 1 and the first insulating layer 3, and connected to the integrated circuit 2 via wires, so as to help the OLED display device to achieve corresponding functions.

[0043] Further, the first lead region 4 may be provided with an antenna, so as to achieve communication and provide a wireless power source. In this way, the integrated circuit and the memory inside the OLED display device may be driven without an additional power source.

[0044] For the OLED display device in embodiments of the present disclosure, the integrated circuit may be bonded in two ways. One of the ways includes bonding the integrated circuit and the memory onto the substrate 1, and then attaching the substrate 1 with the integrated circuit and the memory onto a structure including the encapsulation thin film, the OLED 7, the second lead region and the electrode layer 10, the second insulating layer 5, the first lead region 4 and the first insulating layer 3. The other includes bonding the integrated circuit and the memory onto the structure including the encapsulation thin film, the OLED 7, the second lead region and the electrode layer 10, the second insulating layer 5, the first lead region 4 and the first insulating layer 3, and then attaching the structure with the integrated circuit and the memory onto the substrate 1.

[0045] The present disclosure further provides in embodiments a non-contact IC card including the above-mentioned OLED display device. The non-contact IC card may be used for an ID card, a passport or a credit card.

[0046] The present disclosure further provides in embodiments a flexible display device including the above-mentioned OLED display device. The flexible display device may be any product or member having a display function, such as an OLED panel, a mobile phone, a flat-panel computer, a TV, a display, a laptop computer, a digital photo frame and a navigator. Further, the flexible display device may be applied to a wearable device.

[0047] The above are merely the preferred embodiments of the present disclosure. It should be appreciated that, a person skilled in the art may make further modifications and improvements without departing from the principle of the present disclosure, and these modifications and improvements shall also fall within the scope of the present disclosure.

1. An organic light-emitting diode (OLED) display device, comprising a substrate, an encapsulation structure arranged above the substrate, and an OLED arranged between the substrate and the encapsulation structure, wherein a region where an integrated circuit of the display device is bonded is arranged between the substrate and the OLED.

2. The OLED display device according to claim 1, wherein a first lead region is arranged between the OLED and the substrate, a first insulating layer having a first via-hole is arranged between the first lead region and the substrate, and a lead from the first lead region is connected to the integrated circuit through the first via-hole.

3. The OLED display device according to claim 2, wherein a second insulating layer having a second via-hole, an electrode layer and a second lead region having a third via-hole are arranged between the first lead region and the OLED, and a lead from the first lead region is connected to a cathode and an anode of the OLED through the second via-hole and the third via-hole.

4. The OLED display device according to claim 3, wherein the first lead region is provided with an antenna for receiving an external data signal.

5. The OLED display device according to claim 4, wherein the encapsulation structure comprises:

a planarization film arranged on the OLED;
an encapsulation thin film arranged on the planarization film; and
a transparent substrate arranged on the encapsulation thin film.

6. The OLED display device according to claim 5, wherein the integrated circuit is arranged on the substrate, the first insulating layer is arranged on the integrated circuit, the first lead region is arranged on the first insulating layer, the second insulating layer is arranged on the first lead region, the second lead region and the electrode region are arranged on the second insulating layer, the OLED is arranged on the second lead region and the electrode layer, and the encapsulation structure is arranged on the OLED.

7. The OLED display device according to claim 1, wherein an edge of the OLED is separated from an edge of the substrate in a horizontal direction at a distance of 0.5 mm to 1.5 mm.

8. The OLED display device according to claim 1, wherein the encapsulation structure comprises:

a planarization film arranged on the OLED;
an encapsulation thin film arranged on the planarization film; and
a transparent substrate arranged on the encapsulation thin film.

9. The OLED display device according to claim 2, wherein one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

10. A non-contact IC card comprising the OLED display device according to claim 1.

11. A flexible display device comprising the OLED display device according to claim 1.

12. The OLED display device according to claim 2, wherein the encapsulation structure comprises:

a planarization film arranged on the OLED;
an encapsulation thin film arranged on the planarization film; and
a transparent substrate arranged on the encapsulation thin film.

13. The OLED display device according to claim 3, wherein the encapsulation structure comprises:

a planarization film arranged on the OLED;
an encapsulation thin film arranged on the planarization film; and
a transparent substrate arranged on the encapsulation thin film.

14. The OLED display device according to claim 3, wherein one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

15. The OLED display device according to claim 4, wherein one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

16. The OLED display device according to claim **5**, wherein one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

17. The OLED display device according to claim **6**, wherein one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

18. The OLED display device according to claim **7**, wherein one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

19. The OLED display device according to claim **8**, wherein one or more of a memory, a Bluetooth module, a global positioning system (GPS) module, a micro-electro-mechanical system (MEMS) module and a frequency modulation (FM) module is arranged between the substrate and the first insulating layer, and connected to the integrated circuit via a wire.

* * * * *

专利名称(译)	OLED显示器件，非接触式IC卡和柔性显示器件		
公开(公告)号	US20160301030A1	公开(公告)日	2016-10-13
申请号	US14/646145	申请日	2014-10-24
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	FUJINO SEIJI HUANG GUODONG WANG XIAOHU		
发明人	FUJINO, SEIJI HUANG, GUODONG WANG, XIAOHU		
IPC分类号	H01L51/52 H01L23/66 H01L25/16 H01L27/32		
CPC分类号	H01L51/5253 H01L27/3276 H01L23/66 H01L2251/5338 H01L27/3288 H01L25/167 H01L2223/6677 H01L27/3225 H01L27/32 H01L51/52 H01L51/5246		
优先权	201420346192.7 2014-06-25 CN		
其他公开文献	US9577216		
外部链接	Espacenet USPTO		

摘要(译)

本发明涉及有机电致发光领域，并且提供一种OLED显示装置，非接触IC卡和柔性显示装置。OLED显示装置包括基板，设置在基板上方的封装结构，以及设置在基板和封装结构之间的OLED。显示装置的集成电路被接合的区域被布置在基板和OLED之间。

