



US 20180323240A1

(19) **United States**(12) **Patent Application Publication**
WON et al.(10) **Pub. No.: US 2018/0323240 A1**(43) **Pub. Date: Nov. 8, 2018**(54) **DISPLAY DEVICE**(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)(72) Inventors: **Sang Hyuk WON**, Gimpo-si (KR);
Min Joo KIM, Seoul (KR); **Jae Won LEE**, Goyang-si (KR); **Sang Hoon PAK**, Seoul (KR); **Byong Hoo KIM**, Paju-si (KR); **Sang Heun LEE**, Seoul (KR); **Hyang Myoung GWON**, Paju-si (KR); **Jeong Hoon LEE**, Gimpo-si (KR)(73) Assignee: **LG Display Co., Ltd.**, Seoul (KR)(21) Appl. No.: **15/966,321**(22) Filed: **Apr. 30, 2018**(30) **Foreign Application Priority Data**

May 8, 2017 (KR) 10-2017-0057291

Publication Classification(51) **Int. Cl.**
H01L 27/32 (2006.01)
G09G 3/3241 (2006.01)**G06F 3/041** (2006.01)**G06F 3/044** (2006.01)**H01L 51/52** (2006.01)(52) **U.S. Cl.**CPC **H01L 27/323** (2013.01); **H01L 27/322** (2013.01); **H01L 27/3276** (2013.01); **H01L 51/5221** (2013.01); **G06F 3/0412** (2013.01); **G06F 3/044** (2013.01); **H01L 51/5206** (2013.01); **G09G 3/3241** (2013.01)

(57)

ABSTRACT

Disclosed is a display device capable of reducing the thickness and the weight thereof. In an organic light-emitting diode display device having a touch sensor, a plurality of routing lines, which are connected respectively to a plurality of touch sensors disposed on an encapsulation unit, are disposed on different planes so as to overlap each other and are electrically connected to each other through a plurality of routing contact holes. Thereby, a connection fault between the routing lines is prevented. In addition, through the provision of the touch sensors above the encapsulation unit, a separate attachment process is unnecessary, which results in a simplified manufacturing process and reduced costs.

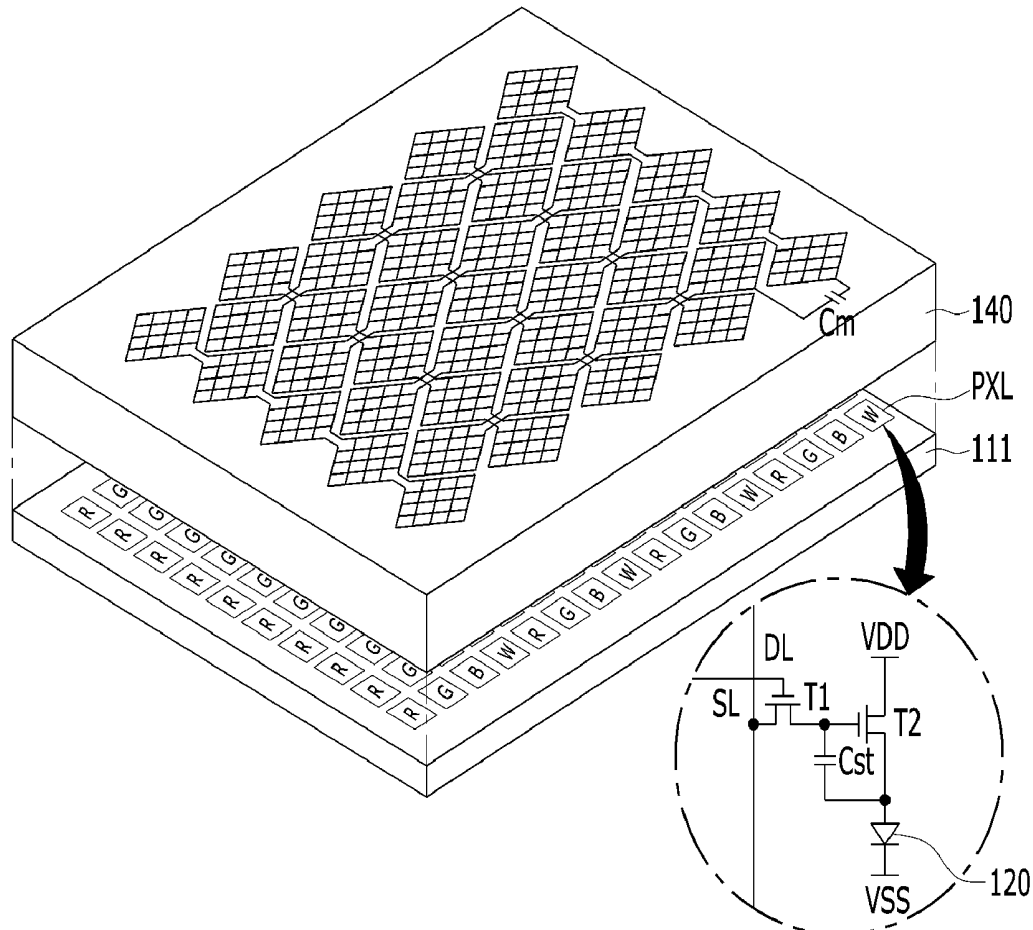


FIG. 1

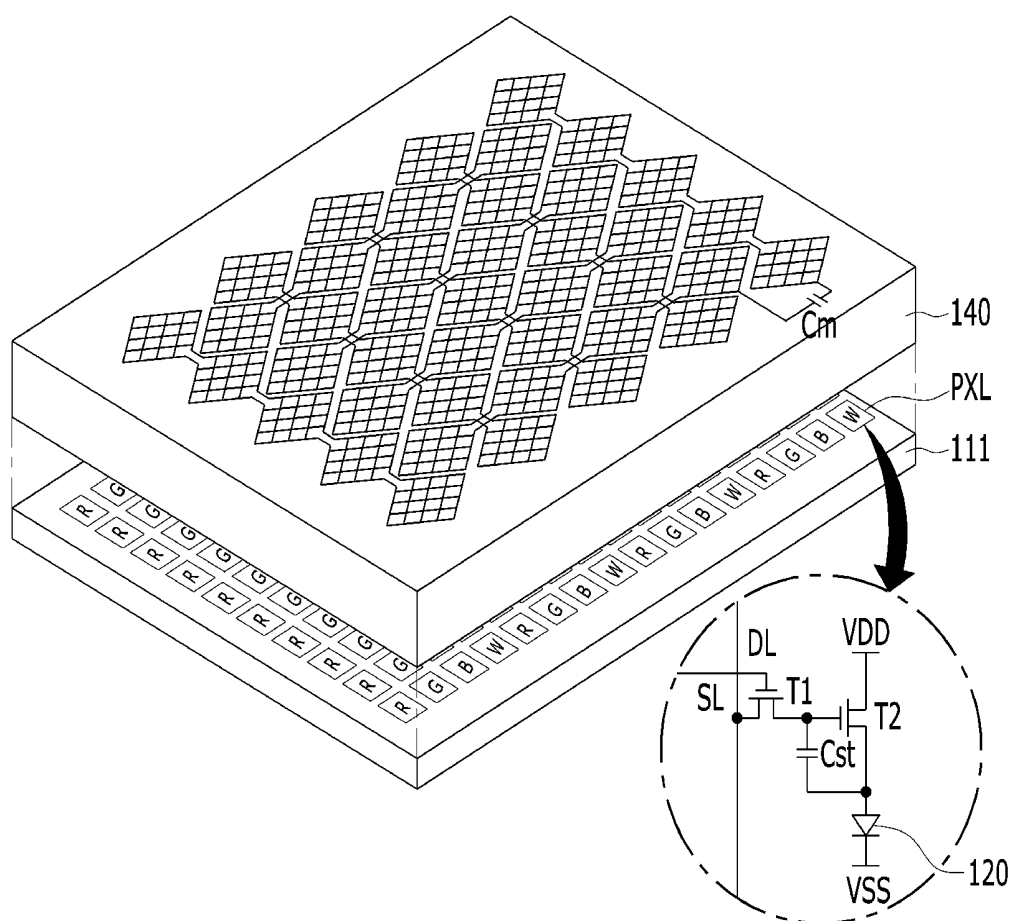


FIG. 2

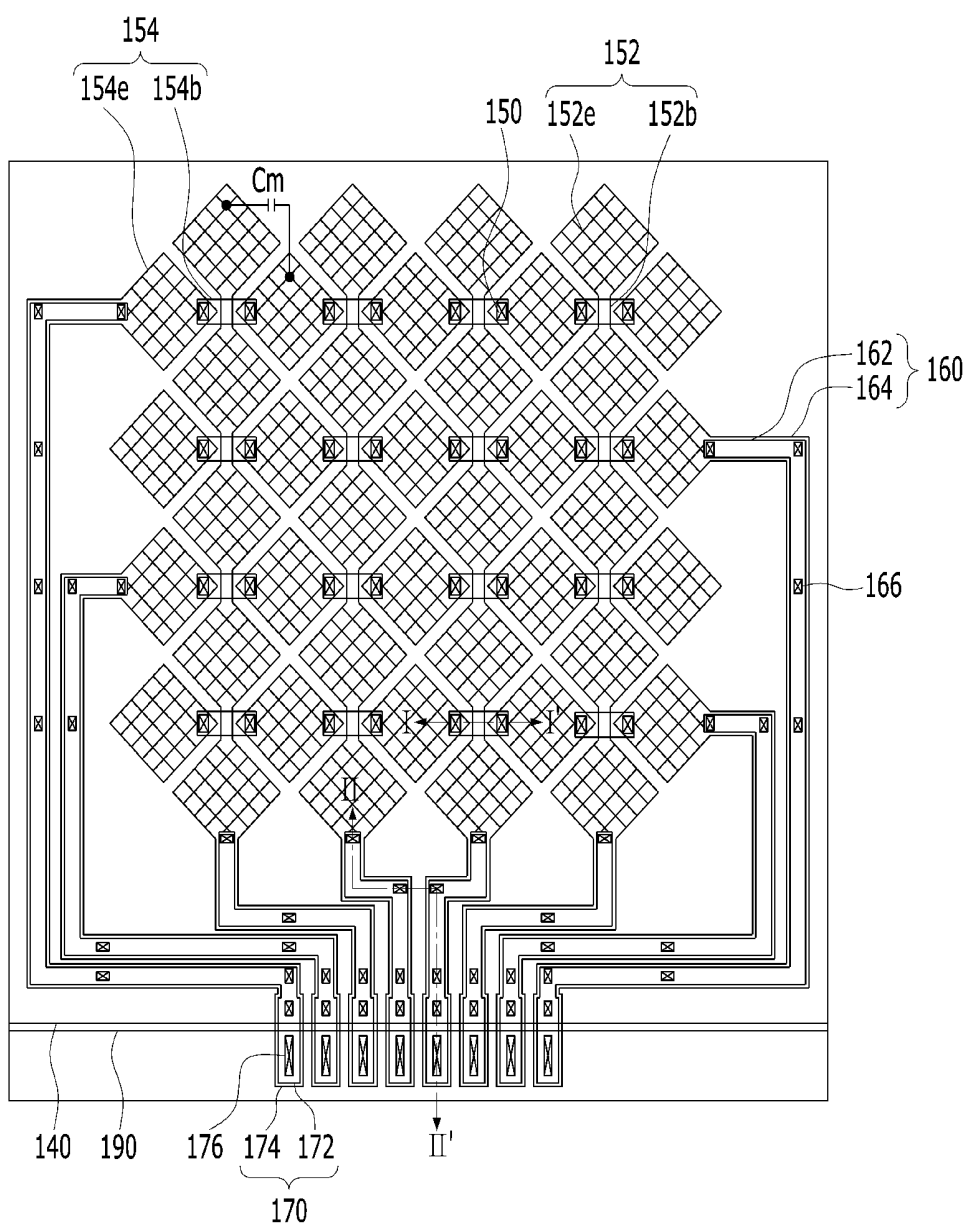


FIG. 4A

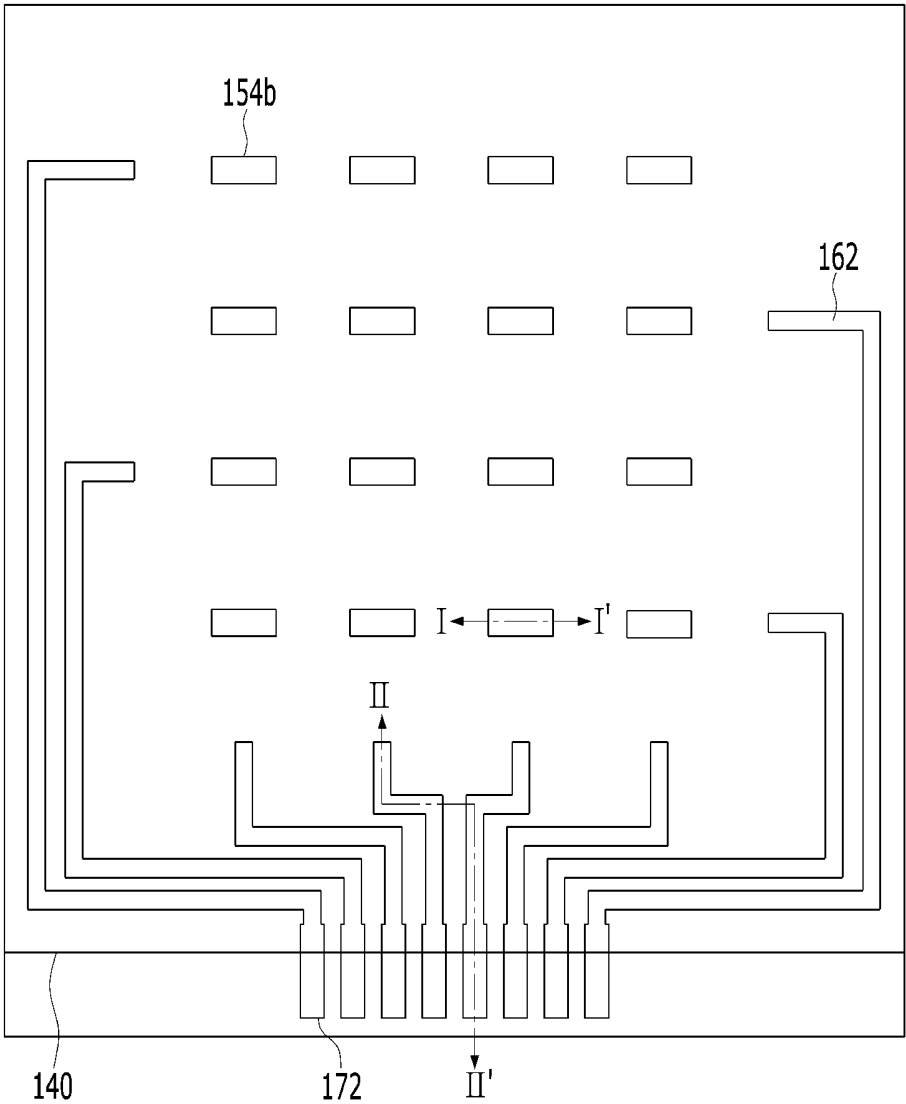


FIG. 4B

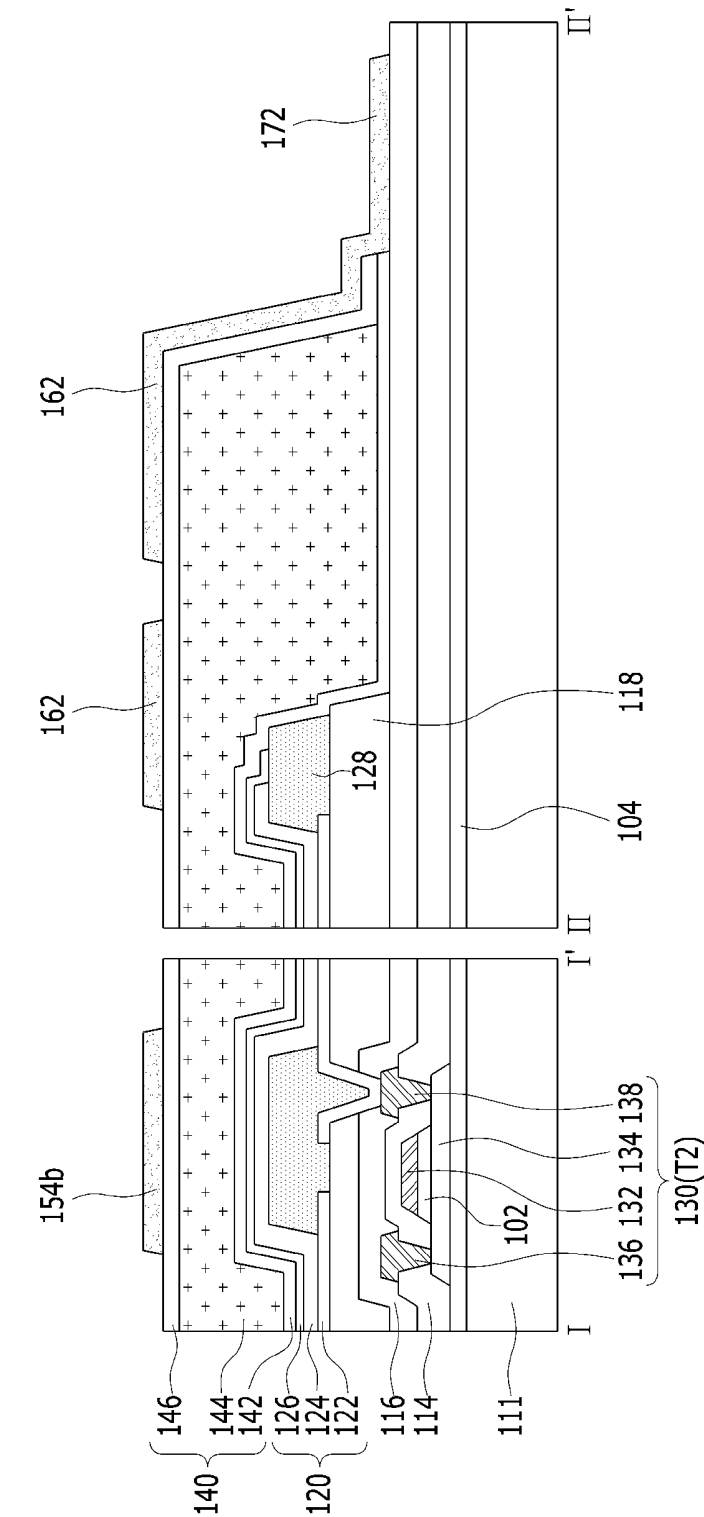


FIG. 5A

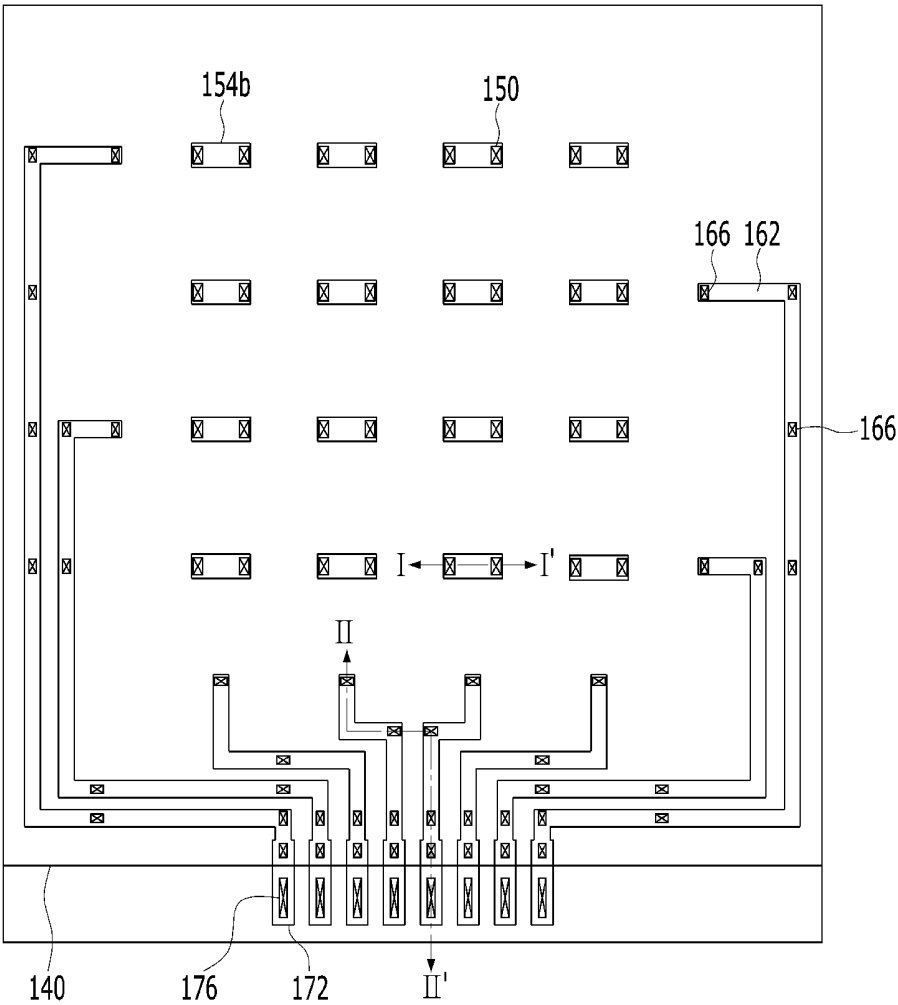


FIG. 5B

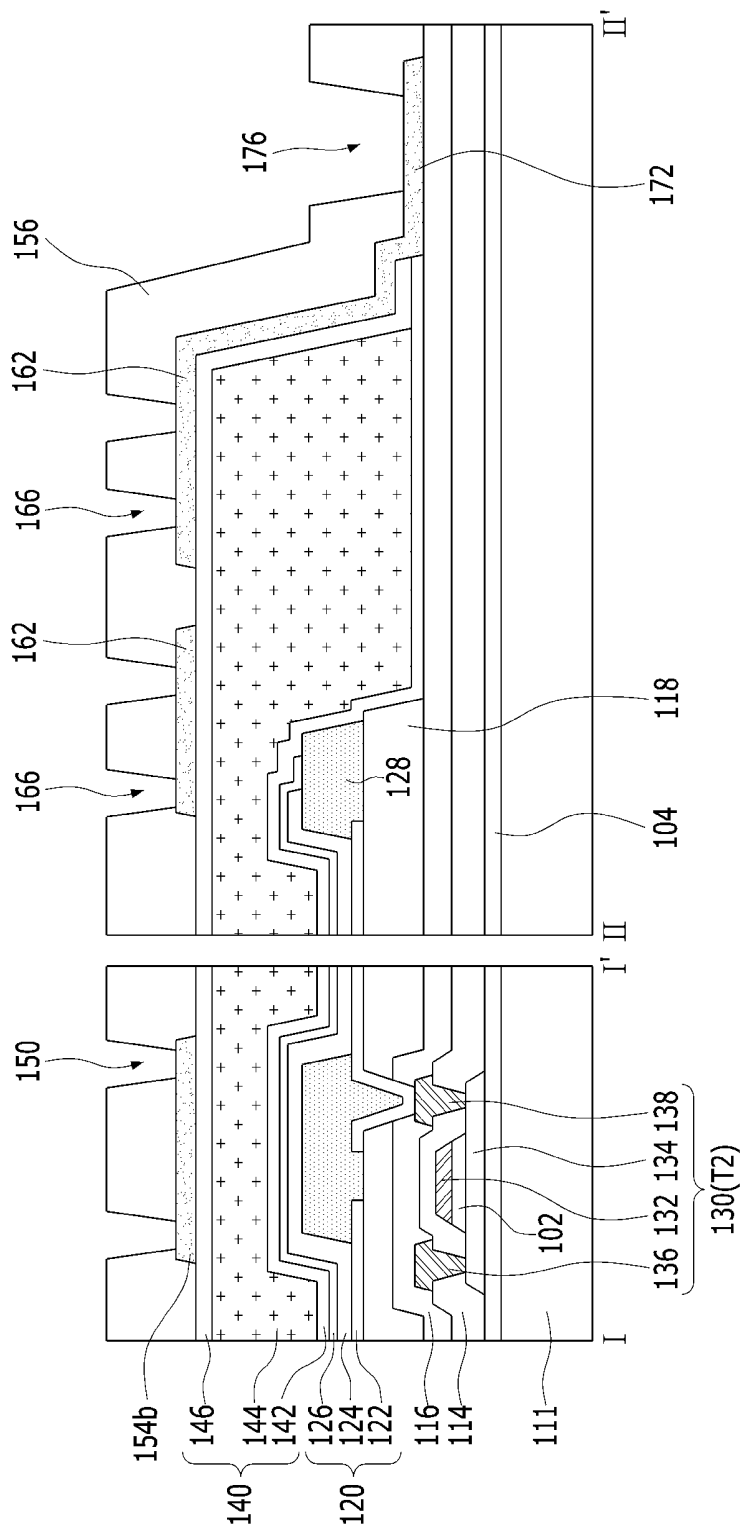


FIG. 7A

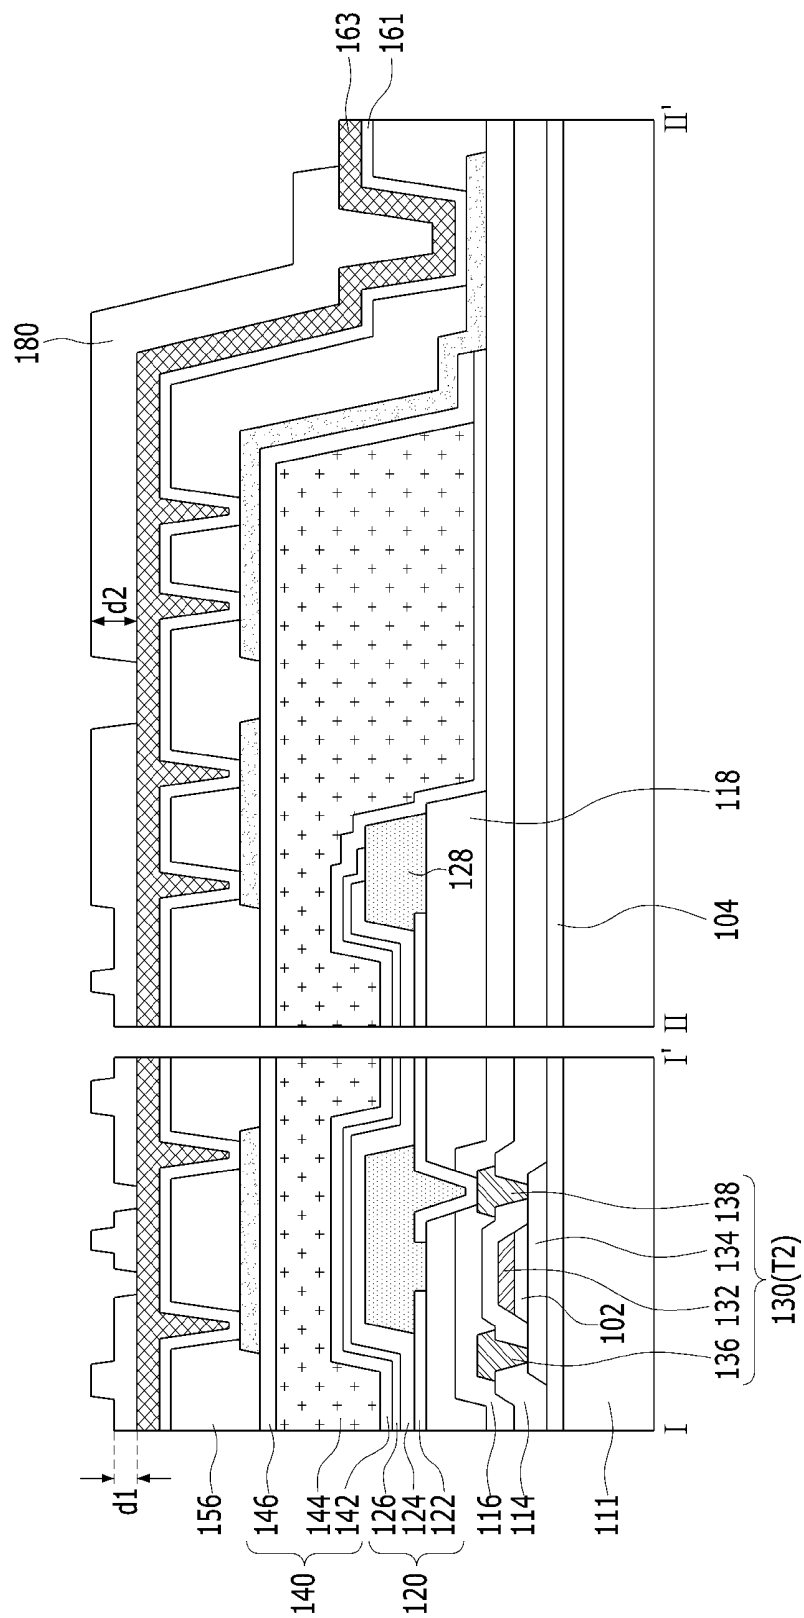


FIG. 7B

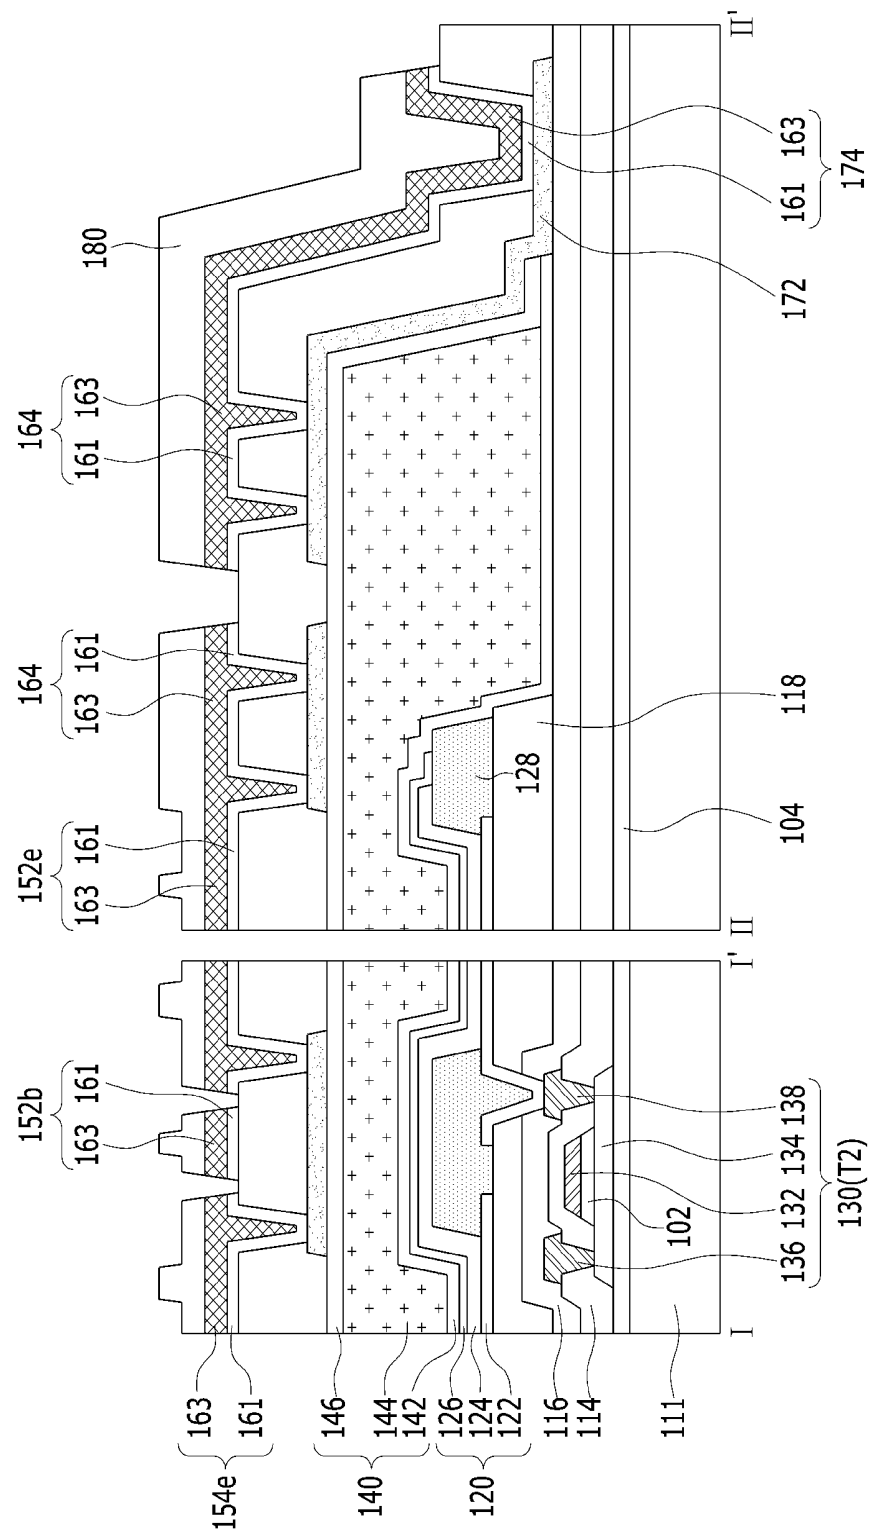


FIG. 7C

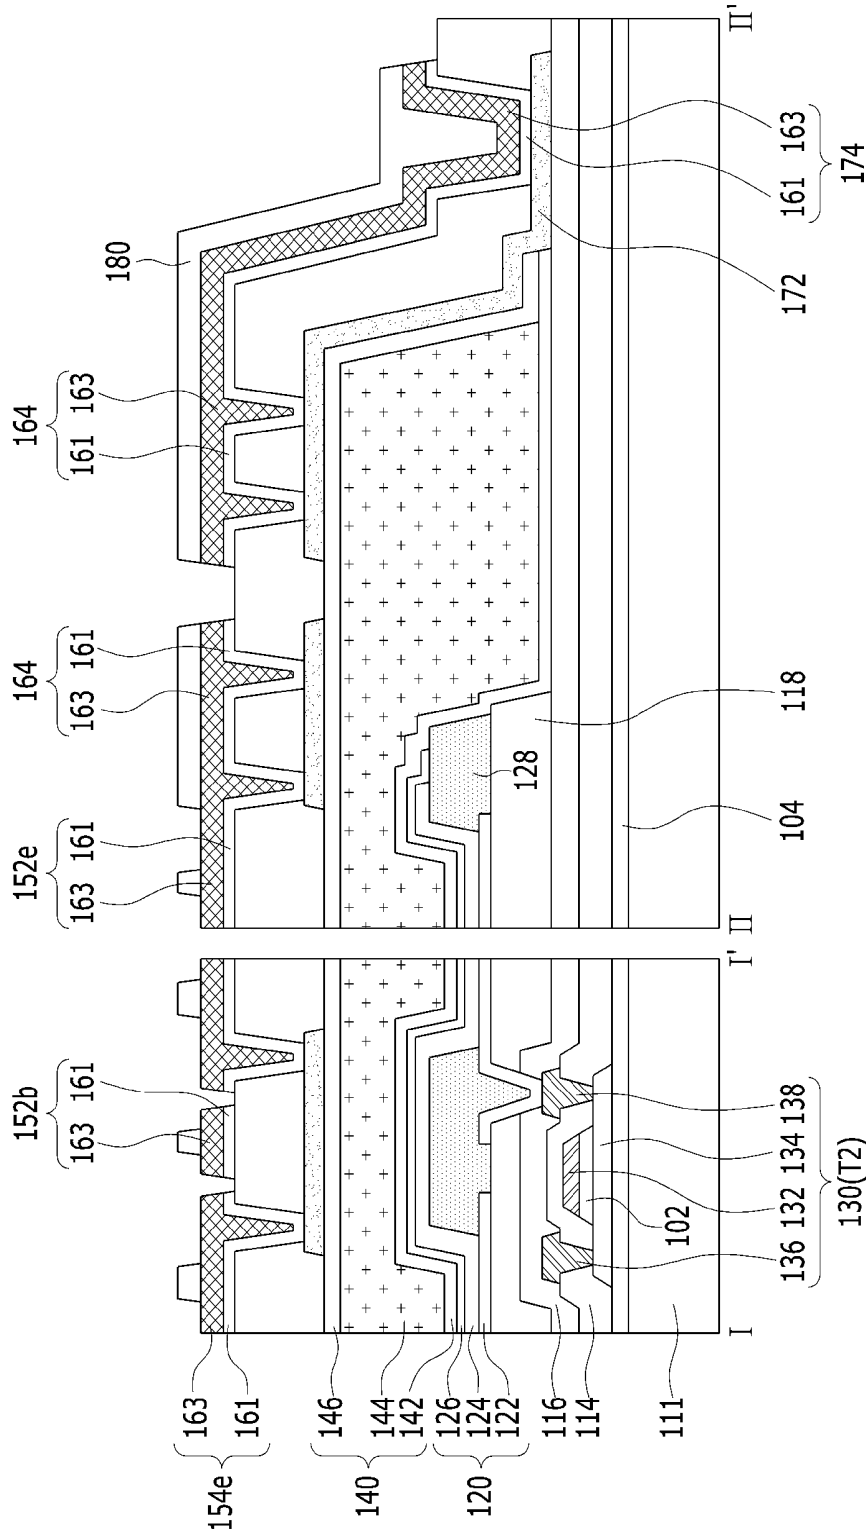


FIG. 7D

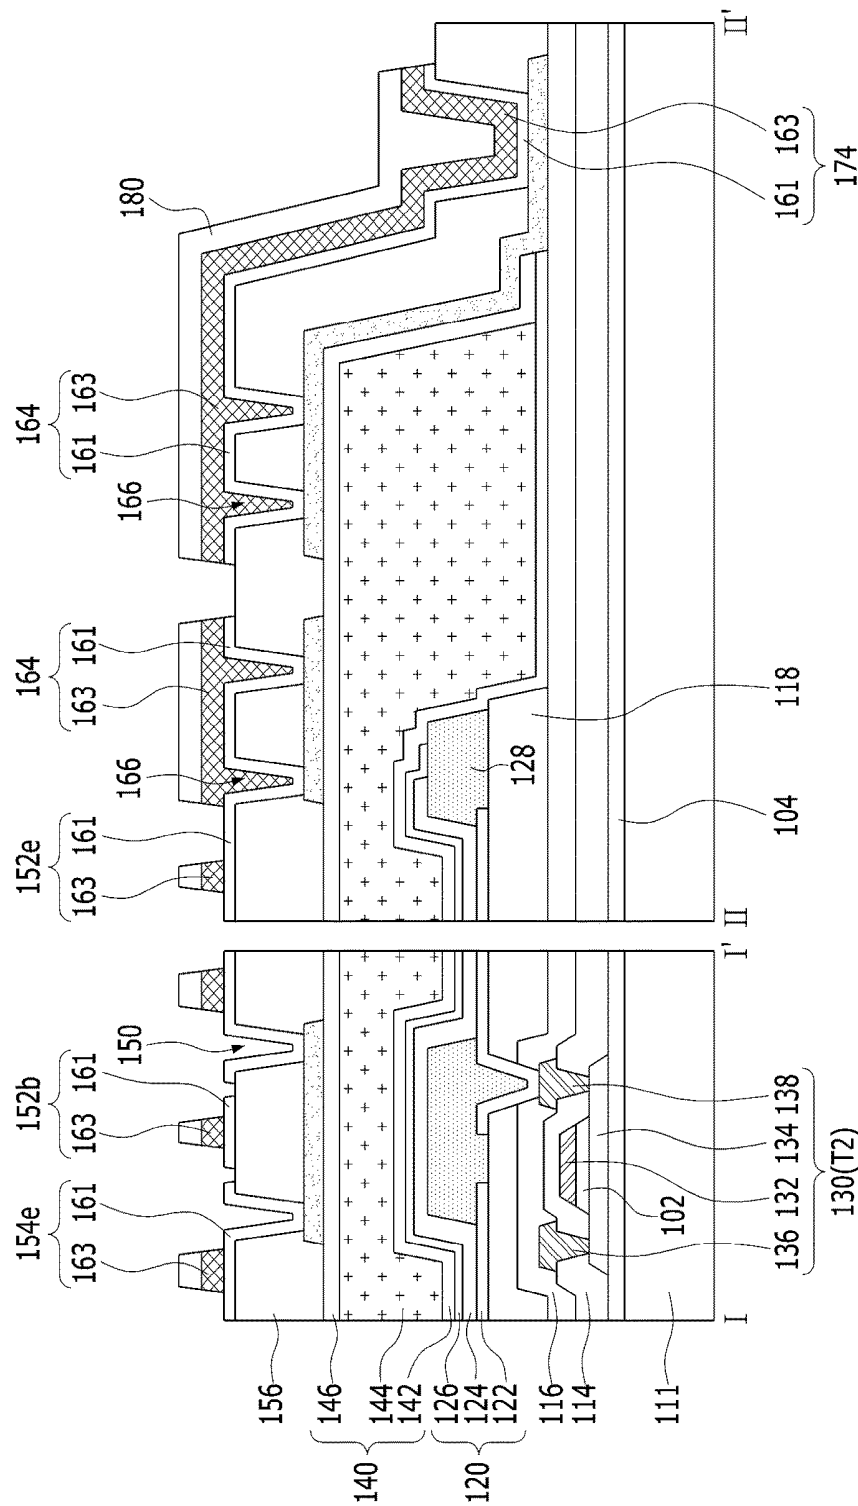


FIG. 8A

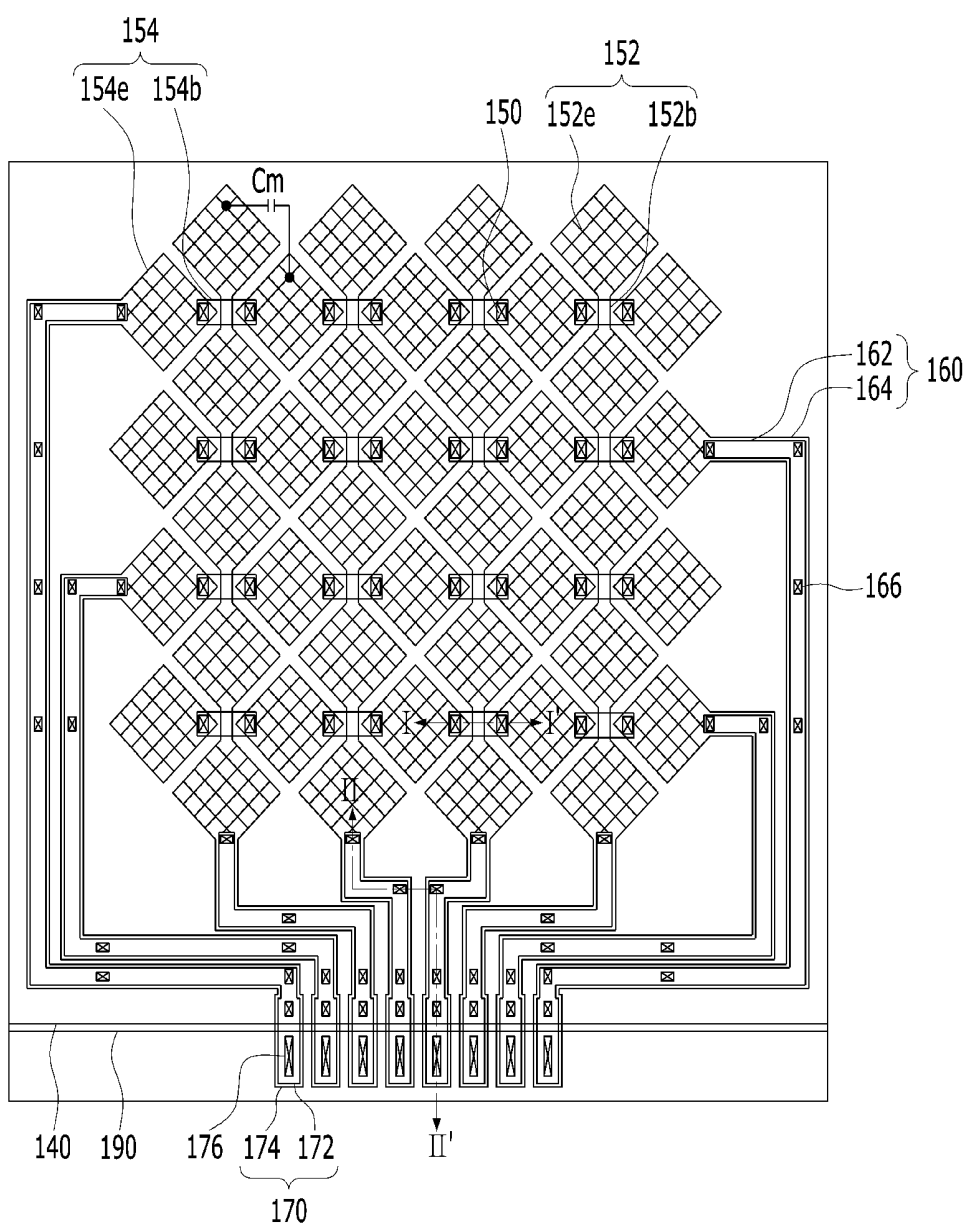


FIG. 8B


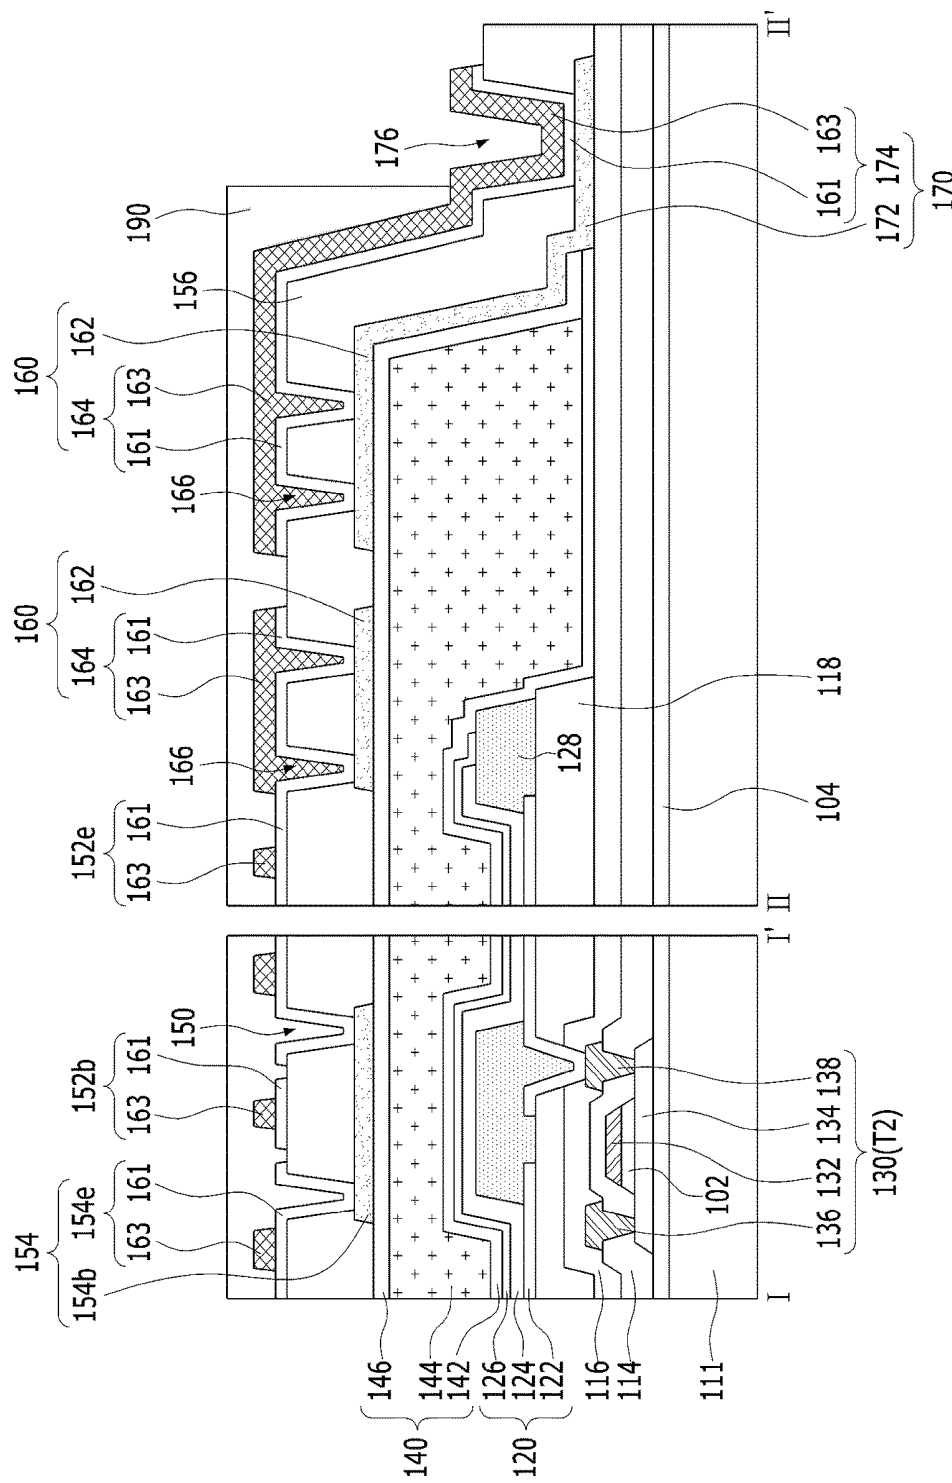


FIG. 10

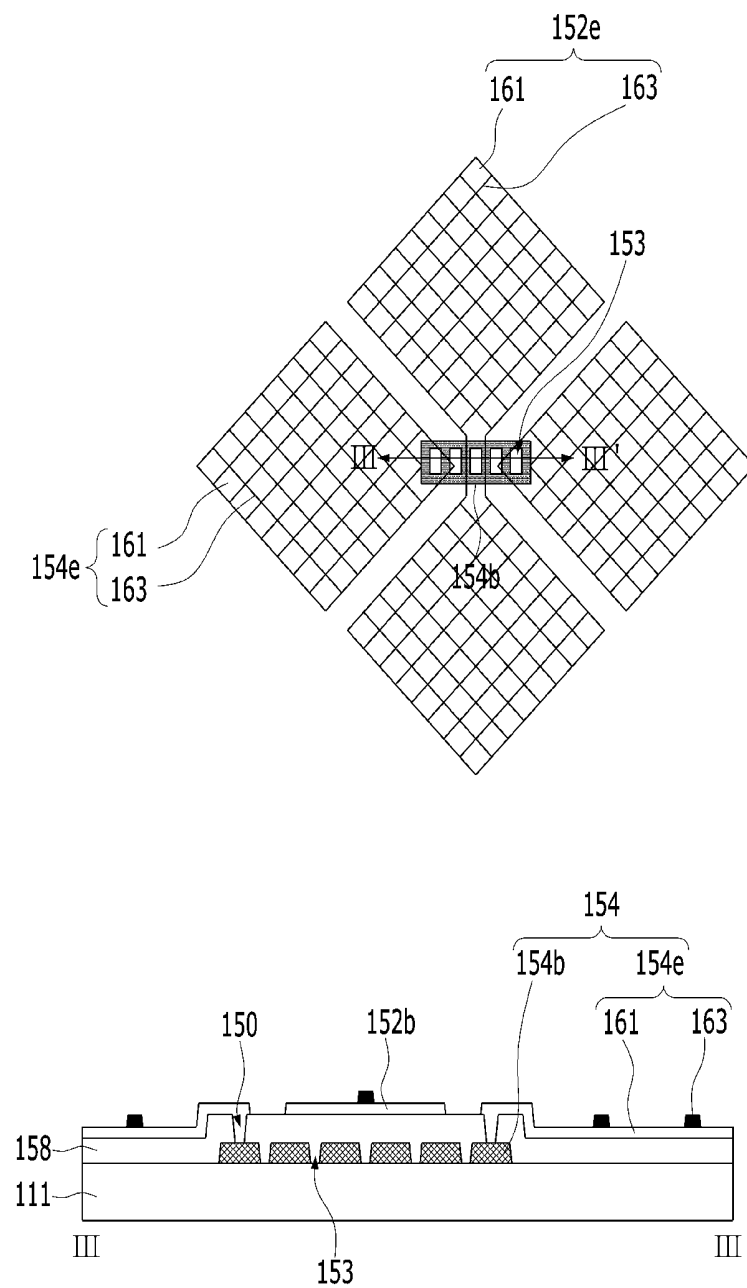

DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of Korean Patent Application No. 10-2017-0057291, filed on May 8, 2017, which is hereby incorporated by reference in its entirety as if fully set forth herein.

BACKGROUND

Field of the Disclosure

[0002] The present disclosure relates to a display device, and more particularly, to a display device and a method of manufacturing the same for achieving a simplified manufacturing process and reduced costs.

Description of the Background

[0003] A touchscreen is an input device that allows a user to input a command by selecting a content appearing on a screen of a display device or the like with the human hand or an object. That is, the touchscreen converts a contact position that the human hand or the object directly touches into an electrical signal, and receives the content selected at the contact position as an input signal. The touchscreen may eliminate a separate input device, which is connected to the display device and operates, such as a keyboard or a mouse, and thus the use range thereof is gradually expanding.

[0004] Such a touchscreen is generally attached to the front surface of a display panel, such as a liquid crystal display panel or an organic light-emitting diode display panel, via an adhesive. In this case, since the touchscreen is separately manufactured and attached to the front surface of the display panel, the manufacturing process becomes complicated and the costs can be increased due to the addition of such an attachment process.

SUMMARY

[0005] Accordingly, the present disclosure is directed to a display device that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0006] The present disclosure has been provided to solve the problems described above, and the present disclosure is to provide a display device and a method of manufacturing the same for achieving a simplified manufacturing process and reduced costs.

[0007] Additional advantages and features of the disclosure will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the disclosure. The other advantages of the disclosure may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0008] To achieve these and other advantages and in accordance with the purpose of the disclosure, as embodied and broadly described herein, an organic light-emitting diode display device having a touch sensor is configured such that a plurality of routing lines, which are connected respectively to a plurality of touch sensors above an encapsulation unit, are disposed on different planes so as to overlap each other and are electrically connected to each other through a plurality of routing contact holes, whereby

a connection fault between the routing lines is prevented. In addition, through the provision of the touch sensors above the encapsulation unit, a separate attachment process is unnecessary, which results in a simplified manufacturing process and reduced costs.

[0009] In another aspect of the present disclosure, a display device including a light-emitting element disposed on a substrate; an encapsulation unit disposed on the light-emitting element; a plurality of touch sensors disposed over the encapsulation unit; a touch insulation layer disposed on the encapsulation unit; a lower routing line disposed on the touch insulation layer having a plurality of routing contact holes and covering a lateral surface of the encapsulation unit; and an upper routing line disposed on the touch insulation layer along the lower routing line and connected to the lower routing line through the plurality of routing contact holes, wherein the lower routing line and the upper routing line are disposed on different planes and overlap each other.

[0010] In a further aspect of the present disclosure, A method of manufacturing a display device including forming a light-emitting element on a substrate; forming an encapsulation unit on the light-emitting element; forming a plurality of touch sensors above the encapsulation unit; and forming a plurality of routing lines connected to the plurality of touch sensors and covering a side surface of the encapsulation unit, wherein the plurality of routing lines are disposed on different planes to overlap each other and is electrically connected to each other through a plurality of routing contact holes.

[0011] It is to be understood that both the foregoing general description and the following detailed description of the present disclosure are exemplary and explanatory and are intended to provide further explanation of the disclosure as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The accompanying drawings, which are included to provide a further understanding of the disclosure and are incorporated in and constitute a part of this application, illustrate aspect(s) of the disclosure and together with the description serve to explain the principle of the disclosure.

[0013] In the drawings:

[0014] FIG. 1 is a perspective view illustrating an organic light-emitting diode display device having a touch sensor according to the present disclosure;

[0015] FIG. 2 is a plan view illustrating the organic light-emitting diode display device having the touch sensor illustrated in FIG. 1;

[0016] FIG. 3 is a cross-sectional view illustrating the organic light-emitting diode display device having the touch sensor taken along lines "I-I" and "II-II" of FIG. 2;

[0017] FIGS. 4A and 4B are a plan view and a cross-sectional view respectively for explaining a method of manufacturing a second bridge, a lower routing line, and a lower pad electrode illustrated in FIGS. 2 and 3;

[0018] FIGS. 5A and 5B are a plan view and a cross-sectional view for explaining a method of manufacturing a touch contact hole, a routing contact hole, and a pad contact hole illustrated in FIGS. 2 and 3;

[0019] FIGS. 6A and 6B are a plan view and a cross-sectional view for explaining a method of manufacturing

first and second touch electrodes, a first bridge, an upper routing line, and an upper pad electrode illustrated in FIGS. 2 and 3;

[0020] FIGS. 7A to 7D are cross-sectional views for explaining the method of manufacturing the first and second touch electrodes, the first bridge, the upper routing line, and the upper pad electrode illustrated in FIG. 6B in detail;

[0021] FIGS. 8A and 8B are a plan view and a cross-sectional view for explaining a method of manufacturing a touch protective layer illustrated in FIGS. 2 and 3;

[0022] FIG. 9 is a cross-sectional view illustrating an organic light-emitting diode display device having a touch sensor according to another aspect of the present disclosure; and

[0023] FIG. 10 is a plan view and a cross-sectional view illustrating another form of the bridges in the organic light-emitting diode display device having a touch sensor according to the present disclosure.

DETAILED DESCRIPTION

[0024] Hereinafter, aspects according to the present disclosure will be described in detail with reference to the accompanying drawings. Whenever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0025] FIG. 1 is a perspective view illustrating an organic light-emitting diode display device having a touch sensor according to the present disclosure.

[0026] The organic light-emitting diode display device having a touch sensor illustrated in FIG. 1 senses the presence or absence of a touch and a touch position by sensing a variation in mutual capacitance C_m (touch sensor) in response to a user touch via touch electrodes 152e and 154e illustrated in FIG. 2 during a touch period. Then, the organic light-emitting diode display device having a touch sensor illustrated in FIG. 1 displays an image via unit pixels each including a light-emitting element 120. Each unit pixel may include red (R), green (G), and blue (B) subpixels PXL, or may include red (R), green (G), blue (B), and white (W) subpixels PXL.

[0027] To this end, the organic light-emitting diode display device illustrated in FIG. 1 includes a plurality of subpixels PXL arranged in a matrix form on a substrate 111, an encapsulation unit 140 disposed on the subpixels PXL, and a mutual capacitance array C_m disposed on the encapsulation unit 140.

[0028] Each of the subpixels PXL includes a pixel drive circuit and the light-emitting element 120 connected to the pixel drive circuit.

[0029] The pixel drive circuit includes a switching transistor T1, a driving transistor T2, and a storage capacitor Cst.

[0030] The switching transistor T1 is turned on when a scan pulse is supplied to a scan line SL, and supplies a data signal supplied to a data line DL to the storage capacitor Cst and a gate electrode of the driving transistor T2.

[0031] The driving transistor T2 controls current to be supplied from a high-voltage (VDD) supply line to the light-emitting element 120 in response to the data signal supplied to the gate electrode of the driving transistor T2, thereby adjusting the amount of emission of light from the light-emitting element 120. Then, even if the switching transistor T1 is turned off, the driving transistor T2 maintains the emission of light of the light-emitting element 120 by

supplying a constant amount of current thereto by a voltage charged in the storage capacitor Cst until a data signal of a next frame is supplied.

[0032] The driving transistor T2 or 130, as illustrated in FIG. 3, includes a gate electrode 132, a semiconductor layer 134 overlapping the gate electrode 132 with a gate insulation layer 102 therebetween, and source and drain electrodes 136 and 138 formed on an interlayer insulation layer 114 to come into contact with the semiconductor layer 134. Here, the semiconductor layer 134 is formed on a buffer layer 104 using at least one of an amorphous semiconductor material, a polycrystalline semiconductor material, and an oxide semiconductor material.

[0033] The light-emitting element 120 includes an anode electrode 122, at least one light-emitting stack 124 formed on the anode electrode 122, and a cathode electrode 126 formed on the light-emitting stack 124.

[0034] The anode electrode 122 is electrically connected to the drain electrode 138 of the driving transistor T2 or 130, which is exposed through a pixel contact hole formed in a protective layer 116.

[0035] The light-emitting stack 124 is formed on the anode electrode 122 in a light-emitting area that is defined by a bank 128. The light-emitting stack 124 is formed by stacking a hole-related layer, an organic emission layer, and an electron-related layer on the anode electrode 122 in this order or in the reverse order. In addition, the at least one light-emitting stack 124 may include first and second light-emitting stacks, which face each other with a charge generation layer therebetween. In this case, the organic emission layer of any one of the first and second light-emitting stacks generates blue light, and the organic emission layer of the other one of the first and second light-emitting stacks generates yellow-green light, whereby white light is generated via the first and second light-emitting stacks. Since the white light generated in the light-emitting stack 124 is incident on a color filter located above or below the light-emitting stack 124, a color image may be realized. In addition, colored light corresponding to each subpixel may be generated in each light-emitting stack 124 to realize a color image, without a separate color filter. That is, the light-emitting stack 124 of the red (R) subpixel may generate red light, the light-emitting stack 124 of the green (G) subpixel may generate green light, and the light-emitting stack 124 of the blue (B) subpixel may generate blue light.

[0036] The cathode electrode 126 may be formed so as to face the anode electrode 122 with the light-emitting stack 124 therebetween, and is connected to a low-voltage (VSS) supply line.

[0037] The encapsulation unit 140 prevents external moisture or oxygen from entering the light-emitting element 120, which is vulnerable to the external moisture or oxygen. To this end, the encapsulation unit 140 includes a plurality of inorganic encapsulation layers 142 and 146 and an organic encapsulation layer 144 disposed between the inorganic encapsulation layers 142 and 146. The inorganic encapsulation layer 146 is the uppermost layer. Here, the encapsulation unit 140 includes at least two inorganic encapsulation layers 142 and 146 and at least one organic encapsulation layer 144. In the present disclosure, the structure of the encapsulation unit 140 in which the organic encapsulation layer 144 is disposed between the first and second inorganic encapsulation layers 142 and 146 will be described by way of example.

[0038] The first inorganic encapsulation layer 142 is formed on the substrate 111, on which the cathode electrode 126 has been formed, so as to be closest to the light-emitting element 120. The first inorganic encapsulation layer 142 is formed of an inorganic insulation material that is capable of being deposited at a low temperature, such as silicon nitride (SiN_x), silicon oxide (SiO_x), silicon oxide nitride (SiON), and aluminum oxide (Al_2O_3). Thus, since the first inorganic encapsulation layer 142 is deposited under a low-temperature atmosphere, it is possible to prevent damage to the light-emitting stack 124, which is vulnerable to a high-temperature atmosphere, during the deposition process of the first inorganic encapsulation layer 142.

[0039] The organic encapsulation layer 144 serves to dampen the stress between the respective layers caused by bending the organic light-emitting diode display device and to increase planarization performance. The organic encapsulation layer 144 is formed using an organic insulation material, such as an acryl resin, epoxy resin, polyimide, polyethylene, and silicon oxycarbide (SiOC).

[0040] The second inorganic encapsulation layer 146 is formed so as to cover the upper surface and the side surface of the organic encapsulation layer 144 and the upper surface of the first inorganic encapsulation layer 142 that is exposed by the organic encapsulation layer 144. Thus, since the upper and lower surfaces of the organic encapsulation layer 144 are sealed by the first and second inorganic encapsulation layers 142 and 146, it is possible to minimize or prevent external moisture or oxygen from entering the organic encapsulation layer 144, or to minimize or prevent moisture or oxygen in the organic encapsulation layer 144 from entering the light-emitting element 120. The second inorganic encapsulation layer 146 is formed of an inorganic insulation material, such as silicon nitride (SiN_x), silicon oxide (SiO_x), silicon oxide nitride (SiON), and aluminum oxide (Al_2O_3).

[0041] On the encapsulation unit 140, a touch sensing line 154 and a touch driving line 152 are disposed so as to intersect each other with a touch insulation layer 156 therebetween. The mutual capacitance array Cm is formed at the intersection of the touch sensing line 154 and the touch driving line 152. Thus, the mutual capacitance array Cm serves as a touch sensor by storing charges in response to a touch driving pulse supplied to the touch driving line 152 and discharging the stored charge to the touch sensing line 154.

[0042] The touch driving line 152 includes a plurality of first touch electrodes 152e, and first bridges 152b, which electrically interconnect the first touch electrodes 152e.

[0043] The first touch electrodes 152e are equidistantly spaced apart from each other in the Y-direction, which is a first direction, on the touch insulation layer 156. Each of the first touch electrodes 152e is electrically connected to an adjacent first touch electrode 152e via the first bridge 152b.

[0044] The first bridge 152b is disposed on the touch insulation layer 156 in the same plane as the first touch electrode 152e, and is electrically connected to the first touch electrode 152e without a separate contact hole.

[0045] The touch sensing line 154 includes a plurality of second touch electrodes 154e, and second bridges 154b, which electrically interconnect the second touch electrodes 154e.

[0046] The second touch electrodes 154e are equidistantly spaced apart from each other in the X-direction, which is a

second direction, on the touch insulation layer 156. Each of the second touch electrodes 154e is electrically connected to an adjacent second touch electrode 154e via the second bridge 154b.

[0047] The second bridge 154b is formed on the second inorganic encapsulation layer 146 and is exposed through a touch contact hole 150, which is formed in the touch insulation layer 156, so as to be electrically connected to the second touch electrode 154e. The second bridge 154b is disposed so as to overlap the bank 128, in the same manner as the first bridge 152b, which may prevent damage to the aperture ratio due to the first and second bridges 152b and 154b.

[0048] In this way, the touch driving line 152 and the touch sensing line 154 of the present disclosure are connected respectively to a touch drive unit (not illustrated) via a routing line 160 and a touch pad 170, which are disposed in a non-active (bezel) area.

[0049] As such, the routing line 160 transmits a touch driving pulse generated in the touch drive unit to the touch driving line 152 via the touch pad 170, and also transmits a touch signal from the touch sensing line 154 to the touch pad 170.

[0050] The routing line 160 is disposed between each of the first and second touch electrodes 152e and 154e and the touch pad 170 to electrically interconnect these 152e, 154e and 170. The routing line 160 connected to the first touch electrode 152e, as illustrated in FIG. 2, extends to at least one of the upper side and the lower side of an active area so as to be connected to the touch pad 170. The routing line 160 connected to the second touch electrode 154e extends to at least one of the right side and the left side of the active area so as to be connected to the touch pad 170. The arrangement of the routing line 160 is not limited to the structure of FIG. 2, and may be changed in various ways according to design requirements of the display device.

[0051] A plurality of routing lines 160 is provided on different planes so as to overlap each other. In the present disclosure, the structure in which the routing lines 160 include lower and upper routing lines 162 and 164 disposed on different planes will be described by way of example.

[0052] The lower routing line 162 is formed by the same mask process as the second bridge 154b using the same material as the second bridge 154b. The lower routing line 162 is formed on the second inorganic encapsulation layer 146, which is the uppermost layer of the encapsulation unit 140, so as to cover the side surface of the encapsulation unit 140. Since the lower routing line 162 is protected by the touch insulation layer 156, it is possible to prevent damage to the lower routing line 162 when patterning the upper routing line 164, which results in increased reliability.

[0053] The upper routing line 164 is formed by the same mask process as the touch electrodes 152e and 154e using the same material as the touch electrodes 152e and 154e. The upper routing line 164 is disposed on the touch insulation layer 156, which is formed so as to cover the lower routing line 162, and is also formed to cover the side surface of the touch insulation layer 156. In addition, the upper routing line 164 is formed on the touch insulation layer 156 so as to extend along the lower routing line 162 and to have the same shape as the lower routing line 162. The upper routing line 164 extends from each of the first and second touch electrodes 152e and 154e, and overlaps the lower routing line 162 with the touch insulation layer 156 therebetween.

[0054] The upper routing line 164 is electrically connected to the lower routing line 162, which is exposed through a plurality of routing contact holes 166 formed in the touch insulation layer 156. The routing contact holes 166 may serve to increase connection areas between the upper routing line 164 and the lower routing line 162, and thus may prevent a connection fault between the upper routing line 164 and the lower routing line 162. In addition, since the routing line 160, which includes the upper routing line 164 and the lower routing line 162, is formed to have a multi-layered structure, it is possible to reduce the resistance of the routing line 160. Moreover, since the routing line 160 has a multilayered structure, even if any one of the upper and lower routing lines 162 and 164 is disconnected, the other routing line may perform transmission of the touch driving pulse and the touch signal.

[0055] The touch pad 170 is formed so as to be exposed outwards by a touch protective layer 190, and thus is connected to a signal transmission film on which the touch drive unit (not illustrated) is mounted. The touch pad 170 may be disposed in at least one of one side area and the other side area of the substrate 111, together with a display pad (not illustrated) connected to at least one of the data line DL, the scan line SL, the low-voltage (VSS) supply line, and the high-voltage (VDD) supply line. Alternatively, the touch pad 170 and the display pad may be disposed in different non-active areas. Meanwhile, the arrangement of the touch pad 170 is not limited to the structure of FIG. 2, and may be changed in various ways according to necessary design requirements of the display device.

[0056] The touch pad 170 is disposed on at least one layer 116 among a plurality of insulation layers 102, 104, 114, 116 and 118 disposed below the light-emitting element 120. The touch pad 170 includes a lower pad electrode 172 extending from the lower routing line 162 and an upper pad electrode 174 extending from the upper routing line 164.

[0057] The lower pad electrode 172 is formed by the same mask process as the second bridge 154b using the same material as the second bridge 154b. The lower pad electrode 172 extends from the lower routing line 162 on the protective layer 116, and thus, is directly connected to the lower routing line 162.

[0058] The upper pad electrode 174 is formed by the same mask process as the touch electrodes 152e and 154e using the same material as the touch electrodes 152e and 154e. The upper pad electrode 174 is electrically connected to the lower pad electrode 172, which is exposed through a pad contact hole 176 formed in the touch insulation layer 156.

[0059] In this way, in the present disclosure, each of the first and second touch electrodes 152e and 154e, the first and second bridge 152b and 154b, the upper routing line 164, and the upper pad electrode 174 is formed of the transparent conductive layer 161 and the opaque conductive layer 163 disposed on or beneath the transparent conductive layer 161. The transparent conductive layer 161 is formed in a single layer or in multiple layers using at least one of ITO, IZO, ZnO, IGZO, and ITO/Ag/ITO. The opaque conductive layer 163 is formed in a single layer or in multiple layers using a highly conductive material having strong corrosion resistance and acid resistance, such as Al, Ti, Cu, and Mo. For example, the opaque conductive layer 163 is formed in a triple-layered structure as a stack of Ti/Al/Ti or Mo/Al/Mo.

[0060] The transparent and opaque conductive layers 161 and 163 of each of the upper routing line 164 and the upper

pad electrode 174 are formed to have the same shape. That is, the opaque conductive layer 163 of each of the upper routing line 164 and the upper pad electrode 174 is formed on the transparent conductive layer 161 of each of the upper routing line 164 and the upper pad electrode 174 so as to have the same shape and the same line width as those of the transparent conductive layer 161.

[0061] The opaque conductive layer 163 of each of the first and second touch electrodes 152e and 154e and the first and second bridges 152b and 154b is formed to have a line width smaller than that of the transparent conductive layer 161 of each of the first and second touch electrodes 152e and 154e and the first and second bridges 152b and 154b. That is, the opaque conductive layer 163 of each of the first and second touch electrodes 152e and 154e and the first and second bridges 152b and 154b is formed on the transparent conductive layer 161 to have a mesh shape. The opaque conductive layer 163 has conductivity higher than that of the transparent conductive layer 161, so that the first and second touch electrodes 152e and 154e may be formed as low-resistance electrodes. Thereby, the resistance and the capacitance of the first and second touch electrodes 152e and 154e may be reduced, which may result in a reduced RC time constant and increased touch sensitivity. In addition, since the mesh-shaped opaque conductive layer 163 has a very small line width, it is possible to prevent deterioration in the aperture ratio and transmissivity due to the mesh-shaped opaque conductive layer 163.

[0062] FIGS. 4A to 8B are plan views and cross-sectional views for explaining a method of manufacturing the organic light-emitting diode display device having the touch sensor illustrated in FIGS. 2 and 3.

[0063] Referring to FIGS. 4A and 4B, the second bridge 154b, the lower routing line 162, and the lower pad electrode 172 are formed on the substrate 111 having the switching transistor T1, the driving transistor T2 or 130, the light-emitting element 120, and the encapsulation unit 140 formed thereon.

[0064] Specifically, a conductive layer is deposited on the entire surface of the substrate 111, having the switching transistor T1, the driving transistor T2 or 130, the light-emitting element 120, and the encapsulation unit 140 formed thereon, by a deposition process. Subsequently, the conductive layer is patterned by a photolithography process and an etching process using a first mask, whereby the second bridge 154b, the lower routing line 162, and the lower pad electrode 172 are formed. Here, each of the second bridge 154b, the lower routing line 162, and the lower pad electrode 172 is formed in a single layer or in multiple layers using a having good conductivity, and strong corrosion resistance and acid resistance, such as Al, Ag, Ti, Cu, Mo, and MoTi. For example, each of the second bridge 154b, the lower routing line 162, and the lower pad electrode 172 is formed in a triple-layered structure as a stack of Ti/Al/Ti or Mo/Al/Mo.

[0065] Referring to FIGS. 5A and 5B, the touch insulation layer 156, which includes the touch contact hole 150, the routing contact hole 166, and the pad contact hole 176, is formed on the substrate 111 having the second bridge 154b, the lower routing line 162, and the lower pad electrode 172 formed thereon.

[0066] Specifically, the touch insulation layer 156 is formed by depositing an inorganic or organic insulation material on the substrate 111 having the second bridge 154b,

the lower routing line **162**, and the lower pad electrode **172** formed thereon. Here, the touch insulation layer **156** may be an inorganic layer such as SiN_x , SiON , and SiO_2 , or may be an acryl-based, epoxy-based, Parylene-C, Parylene-N, Parylene-F, or siloxane-based organic layer. Subsequently, the touch insulation layer **156** is patterned by a photolithography process and an etching process using a second mask, whereby the touch contact hole **150**, the routing contact hole **166**, and the pad contact hole **176** are formed.

[0067] Referring to FIGS. **6A** and **6B**, the first and second touch electrodes **152e** and **154e**, the first bridge **152b**, the upper routing line **164**, and the upper pad electrode **174** are formed on the substrate **111** having the touch contact hole **150**, the routing contact hole **166**, and the pad contact hole **176** formed thereon. This will be described below with reference to FIGS. **7A** to **7D**.

[0068] As illustrated in FIG. **7A**, the transparent conductive layer **161** and the opaque conductive layer **163** are sequentially laminated on the substrate **111** having the touch contact hole **150**, the routing contact hole **166**, and the pad contact hole **176** formed thereon. Here, the transparent conductive layer **161** is formed of a transparent conductive layer, such as ITO, IZO, ZnO, IGZO, and ITO/Ag/ITO, and the opaque conductive layer **163** is formed in a single layer or in multiple layers using a having good conductivity, and strong corrosion resistance and acid resistance, such as Al, Ag, Ti, Cu, Mo, and MoTi. For example, the opaque conductive layer **163** is formed in a triple-layered structure as a stack of Ti/Al/Ti or Mo/Al/Mo.

[0069] Subsequently, after a photosensitive layer is laminated on the opaque conductive layer **163**, the photosensitive layer is patterned by a photolithography process using a third mask, such as a half-tone mask or a slit mask, whereby a photosensitive layer **180** having a multilayered structure is formed. The multilayered photosensitive layer **180** is formed to have a second thickness d_2 in the area in which the mesh-shaped opaque conductive layer **163** of each of the first and second touch electrodes **152e** and **154e** and the first bridge **152b**, the upper routing line **164**, and the upper pad electrode **174** are formed, and is also formed to have a first thickness in the area in which the transparent conductive layer **161** is formed so as to be exposed by the mesh-shaped opaque conductive layer **163** of each of the first and second touch electrodes **152e** and **154e** and the first bridge **152b**. The photosensitive layer **180** is not formed in the remaining area.

[0070] The opaque conductive layer **163** and the transparent conductive layer **161** are etched through an etching process using the multilayered photosensitive layer **180** as a mask. Thereby, as illustrated in FIG. **7B**, each of the first and second touch electrodes **152e** and **154e**, the first bridge **152b**, the upper routing line **164**, and the upper pad electrode **174** is formed to have a multilayered structure that includes the transparent and opaque conductive layers **161** and **163** having the same line width.

[0071] Subsequently, by ashing the multilayered photosensitive layer **180**, as illustrated in FIG. **7C**, the total thickness of the photosensitive layer **180** is reduced such that a portion of the photosensitive layer **180**, which has the first thickness, is removed, whereby the opaque conductive layer **163** of each of the first and second touch electrodes **152e** and **154e** and the first bridge **152b** is exposed. Subsequently, when the exposed opaque conductive layer **163** is removed through an etching process using the multilayered

photosensitive layer **180**, subjected to ashing, as a mask, as illustrated in FIG. **7D**, the transparent conductive layer **161** of each of the first and second touch electrodes **152e** and **154e** and the first bridge **152b** is exposed. Subsequently, the photosensitive layer **180** remaining on the substrate is removed through a stripping process, as illustrated in FIG. **6B**.

[0072] Referring to FIGS. **8A** and **8B**, the touch protective layer **190** is formed on the substrate **111** having the first and second touch electrodes **152e** and **154e**, the first bridge **152b**, the upper routing line **164**, and the upper pad electrode **174** formed thereon.

[0073] Specifically, an organic insulation material, such as a photo-acryl-based resin, is applied to the entire surface of the substrate **111** having the first and second touch electrodes **152e** and **154e**, the first bridge **152b**, the upper routing line **164**, and the upper pad electrode **174** formed thereon. Subsequently, the organic insulation material is patterned by a photolithography process and an etching process using a fourth mask. Thereby, as illustrated in FIG. **8B**, the touch protective layer **190** is formed so as to expose the touch pad **170**.

[0074] In this way, in the display panel according to the present disclosure, the transparent conductive layer **161** and the mesh-shaped opaque conductive layer **163**, which are included in each of the touch electrodes **152e** and **154e**, are formed through the same mask process. Thereby, the present disclosure may achieve a simplified process and reduced costs owing to a reduced number of mask processes.

[0075] FIG. **9** is a cross-sectional view illustrating an organic light-emitting diode display device according to another aspect of the present disclosure.

[0076] The organic light-emitting diode display device illustrated in FIG. **9** includes the same constituent elements as those of the organic light-emitting diode display device illustrated in FIG. **3**, except that it further includes color filters **192** disposed between the encapsulation unit **140** and the touch electrodes **152e** and **154e**. Thus, a detailed description related to the same constituent elements will be omitted below.

[0077] The color filters **192** are formed between each of the touch sensing line **154** and the touch driving line **152** and the light-emitting element **120**. The distance between each of the touch sensing line **154** and the touch driving line **152** and the light-emitting element **120** is increased by the color filters **192**. Thereby, the capacitance of a parasitic capacitor formed between each of the touch sensing line **154** and the touch driving line **152** and the light-emitting element **120** may be minimized, and mutual interaction due to coupling between each of the touch sensing line **154** and the touch driving line **152** and the light-emitting element **120** may be prevented. In addition, the color filters **192** may prevent a chemical solution (e.g., developing solution or etching solution) used in the process of manufacturing the touch sensing line **154** and the touch driving line **152**, external moisture, and the like from entering the light-emitting stack **124**. Thereby, the color filters **192** may prevent damage to the light-emitting stack **124**, which is vulnerable to the chemical solution or moisture. Meanwhile, as illustrated in FIG. **9**, the configuration in which the touch electrodes **152e** and **154e** are disposed over the color filters **192** has been described by way of example, but the color filters **192** may be disposed over the touch electrodes **152e** and **154e**. In this case, the

touch electrodes **152e** and **154e** are disposed between the color filters **192** and the encapsulation unit **140**.

[0078] A black matrix **194** is disposed between the color filters **192**. The black matrix **194** serves to separate the respective subpixel areas from each other and to prevent optical interference and light leakage between adjacent subpixel areas. The black matrix **194** may be formed of a high-resistance black insulation material, or may be formed by stacking at least two colors of color filters among red (R), green (G), and blue (B) color filters **192**. In addition, a touch planarization layer **196** is formed on the substrate **111** having the color filters **192** and the black matrix **194** formed thereon. The substrate **111** having the color filters **192** and the black matrix **194** formed thereon is flattened by the touch planarization layer **196**.

[0079] Meanwhile, in the present disclosure, the first and second bridges **152b** and **154b** may include a plurality of slits **153**, as illustrated in FIG. 10. The second bridge **154b** having the slits **153**, illustrated in FIG. 10, may have a reduced surface area, compared to the second bridge **154b** having no slit **153** illustrated in FIG. 3. Thereby, the reflection of external light by the second bridge **154b** may be reduced, which may prevent deterioration in visibility. In addition, in the present disclosure, the mutual-capacitance-type touch sensor, which is formed between the touch sensing line **154** and the touch driving line **152** intersecting each other, has been described by way of example, the present disclosure may also be applied to a self-capacitance-type touch sensor Cs.

[0080] As is apparent from the above description, in a display device according to the present disclosure, a plurality of routing lines, which are connected respectively to a plurality of touch sensors, are disposed on different planes so as to overlap each other and are electrically connected to each other through a plurality of routing contact holes. Thereby, according to the present disclosure, it is possible to prevent a connection fault between the routing lines. In addition, in the present disclosure, a transparent conductive layer and a mesh-shaped opaque conductive layer, which are included in each touch electrode, are formed through the same mask process. Thereby, it is possible to simplify a manufacturing process and to reduce costs, through reduction in the number of mask processes. Moreover, a conventional organic light-emitting diode display device includes a touchscreen attached thereto using an adhesive, whereas an organic light-emitting diode display device of the present disclosure includes touch electrodes disposed on an encapsulation unit, which may make a separate attachment process be unnecessary, resulting in a simplified manufacturing process and reduced costs.

[0081] Although the aspects of the present disclosure have been described above in detail with reference to the accompanying drawings, it will be apparent to those skilled in the art that the present disclosure described above is not limited to the aspects described above, and various substitutions, modifications, and alterations may be devised within the spirit and scope of the present disclosure.

What is claimed is:

1. A display device comprising:

- a light-emitting element disposed on a substrate;
- an encapsulation unit disposed on the light-emitting element;
- a plurality of touch sensors disposed above the encapsulation unit; and

a plurality of routing lines connected to the plurality of touch sensors and covering a side surface of the encapsulation unit,

wherein the plurality of routing lines are disposed on different planes so as to overlap each other and are electrically connected to each other through a plurality of routing contact holes.

2. The display device according to claim 1, wherein the plurality of routing lines comprise:

- a lower routing line disposed on the encapsulation unit; and
 - an upper routing line connected to the lower routing line through the plurality of routing contact holes, which are formed in a touch insulation layer covering the lower routing line, and
- wherein the upper routing line is disposed on the touch insulation layer and is provided along the lower routing line.

3. The display device according to claim 2, wherein the plurality of touch sensors comprise a touch sensing line and a touch driving line disposed on the encapsulation unit so as to intersect each other,

wherein the touch driving line comprises:

- a plurality of first touch electrodes arranged in a first direction on the encapsulation unit; and
- a first bridge interconnecting the plurality of first touch electrodes,

wherein the touch sensing line comprises:

- a plurality of second touch electrodes arranged in a second direction intersecting the first direction; and
- a second bridge interconnecting the second touch electrodes,

wherein the lower routing line is formed of the same material as one of the first and second bridges, and wherein the upper routing line extends from each of the first and second touch electrodes.

4. The display device according to claim 3, further comprising a touch pad disposed on at least one of a plurality of insulation layers, which are disposed under the light-emitting element, and extended from the plurality of routing lines,

wherein the touch pad comprises:

- a lower pad electrode extended from the lower routing line; and
- an upper pad electrode extended from the upper routing line.

5. The display device according to claim 4, wherein at least one of the upper routing line, the upper pad electrode, the first bridge, the first touch electrodes, and the second touch electrodes comprises a transparent conductive layer and an opaque conductive layer disposed on the transparent conductive layer,

wherein the transparent conductive layer has a structure including at least one layer formed of at least one of ITO, IZO, ZnO, and IGZO, and

wherein the opaque conductive layer has a structure including at least one layer formed of at least one of Ti, Al, Mo, MoTi, Cu, and Ta.

6. The display device according to claim 4, wherein the opaque conductive layer of the upper routing line and the upper pad electrode is disposed on or beneath the transparent conductive layer and has a same shape as the transparent conductive layer.

7. The display device according to claim 4, wherein the opaque conductive layer of the first and second touch electrodes and the first bridge is provided on the transparent conductive layer and has a line width smaller than that of the transparent conductive layer.

8. The display device according to claim 7, wherein the opaque conductive layer of at least one of the first touch electrodes, the second touch electrodes, the first bridge, and the second bridge has a mesh shape.

9. The display device according to claim 3, wherein at least one of the first bridge and the second bridge comprises at least one slit.

10. The display device according to claim 1, further comprising a color filter disposed between the encapsulation unit and the touch sensors.

11. A display device comprising:

- a light-emitting element disposed on a substrate;
- an encapsulation unit disposed on the light-emitting element;
- a plurality of touch sensors disposed over the encapsulation unit;
- a touch insulation layer disposed on the encapsulation unit;
- a lower routing line disposed on the touch insulation layer having a plurality of routing contact holes and covering a lateral surface of the encapsulation unit; and
- an upper routing line disposed on the touch insulation layer along the lower routing line and connected to the lower routing line through the plurality of routing contact holes,

wherein the lower routing line and the upper routing line are disposed on different planes and overlap each other.

12. The display device according to claim 11, wherein the plurality of touch sensors comprise:

- a touch driving line having a plurality of first touch electrodes arranged in a first direction on the encapsulation unit and a first bridge interconnecting the plurality of first touch electrodes disposed on the encapsulation unit so as to intersect each other,
- a touch sensing line having a plurality of second touch electrodes arranged in a second direction intersecting the first direction and a second bridge interconnecting the second touch electrodes,

wherein one of the first and second bridges is formed of the same material as the lower routing line, and the upper routing line extends from each of the first and second touch electrodes.

13. The display device according to claim 12, further comprising a touch pad disposed on at least one of a plurality of insulation layers disposed under the light-emitting element and extended from the upper and lower routing lines,

wherein the touch pad includes a lower pad electrode extended from the lower routing line and an upper pad electrode extended from the upper routing line.

14. The display device according to claim 13, wherein at least one of the upper routing line, the upper pad electrode, the first bridge, the first touch electrodes, and the second touch electrodes comprises a transparent conductive layer and an opaque conductive layer disposed on the transparent conductive layer,

wherein the transparent conductive layer has a structure including at least one layer formed of at least one of ITO, IZO, ZnO, and IGZO, and the opaque conductive layer has a structure including at least one layer formed of at least one of Ti, Al, Mo, MoTi, Cu, and Ta.

15. The display device according to claim 14, wherein the opaque conductive layer of the upper routing line and the upper pad electrode is disposed on or beneath the transparent conductive layer and has a same shape as the transparent conductive layer.

16. The display device according to claim 14, wherein the opaque conductive layer of the first and second touch electrodes and the first bridge is provided on the transparent conductive layer and has a line width smaller than that of the transparent conductive layer.

17. The display device according to claim 16, wherein the opaque conductive layer of at least one of the first touch electrodes, the second touch electrodes, the first bridge, and the second bridge has a mesh shape.

18. The display device according to claim 12, wherein at least one of the first bridge and the second bridge comprises at least one slit.

19. The display device according to claim 11, further comprising a color filter disposed between the encapsulation unit and the touch sensors.

20. A method of manufacturing a display device comprising:

- forming a light-emitting element on a substrate;
 - forming an encapsulation unit on the light-emitting element;
 - forming a plurality of touch sensors above the encapsulation unit; and
 - forming a plurality of routing lines connected to the plurality of touch sensors and covering a side surface of the encapsulation unit,
- wherein the plurality of routing lines are disposed on different planes to overlap each other and is electrically connected to each other through a plurality of routing contact holes.

* * * * *

专利名称(译)	显示设备		
公开(公告)号	US20180323240A1	公开(公告)日	2018-11-08
申请号	US15/966321	申请日	2018-04-30
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	WON SANG HYUK KIM MIN JOO LEE JAE WON PAK SANG HOON KIM BYONG HOO LEE SANG HEUN GWON HYANG MYOUNG LEE JEONG HOON		
发明人	WON, SANG HYUK KIM, MIN JOO LEE, JAE WON PAK, SANG HOON KIM, BYONG HOO LEE, SANG HEUN GWON, HYANG MYOUNG LEE, JEONG HOON		
IPC分类号	H01L27/32 G09G3/3241 G06F3/041 G06F3/044 H01L51/52		
CPC分类号	H01L27/323 H01L27/322 H01L27/3276 G09G3/3241 G06F3/0412 G06F3/044 H01L51/5206 H01L51/5221 G06F2203/04103 G06F3/0443 G06F3/0446 G06F2203/04111 G06F2203/04112		
优先权	1020170057291 2017-05-08 KR		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种能够减小其厚度和重量的显示装置。在具有触摸传感器的有机发光二极管显示装置中，分别连接到设置在封装单元上的多个触摸传感器的多条路由线设置在不同的平面上，以便彼此重叠并且是电的。通过多个布线接触孔彼此连接。因此，防止了路由线之间的连接故障。另外，通过在封装单元上方提供触摸传感器，不需要单独的附接过程，这导致简化的制造过程和降低的成本。

