




US 20110220880A1


(19) **United States**(12) **Patent Application Publication**
CHENG et al.(10) **Pub. No.: US 2011/0220880 A1**(43) **Pub. Date: Sep. 15, 2011**(54) **M-TERPHENYL COMPOUND DERIVATIVES
AND APPLICATION FOR ORGANIC LIGHT
EMITTING DIODE**(57) **ABSTRACT**

An m-terphenyl derivative has a structure of formula (I) or (II):

(I)

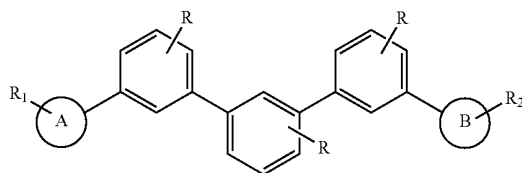

(II)

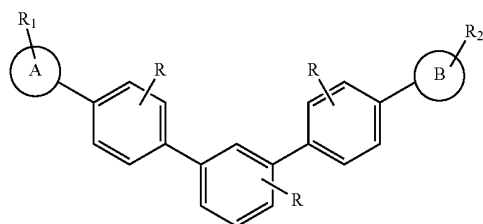


wherein A and B are five-membered heterocyclic compounds containing nitrogen, each of substituents R, R₁ and R₂ is a member independently selected from the group consisting of H, halo, cyano, trifluoromethyl, amino, C₁-C₁₀ alkyl, C₂-C₁₀ alkenyl, C₂-C₁₀ alkynyl, C₃-C₂₀ cycloalkyl, C₃-C₂₀ cycloalkenyl, C₁-C₂₀ heterocycloalkyl, C₁-C₂₀ heterocycloalkenyl, aryl and heteroaryl. The compound of the present invention may have advantages in good electron affinity, low HOMO and thereby achieving hole blocking and may be used for electron transport material and/or electron injection material.

(76) Inventors: **Chien-Hong CHENG**, Hsinchu (TW); **Cheng-An WU**, Hsinchu (TW); **Fang-Iy WU**, Hsinchu (TW); **Cheng-Hung SHIH**, Hsinchu (TW)(21) Appl. No.: **12/985,678**(22) Filed: **Jan. 6, 2011**(30) **Foreign Application Priority Data**

Mar. 12, 2010 (TW) 099142097

Publication Classification

(51) **Int. Cl.**
H01L 51/54 (2006.01)
C07D 249/08 (2006.01)
C07D 271/107 (2006.01)

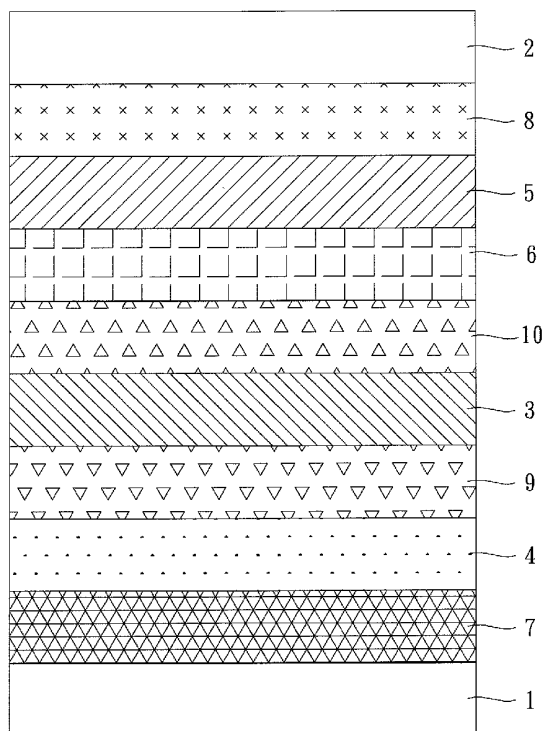(52) **U.S. Cl. .. 257/40; 548/266.2; 548/145; 257/E51.041**

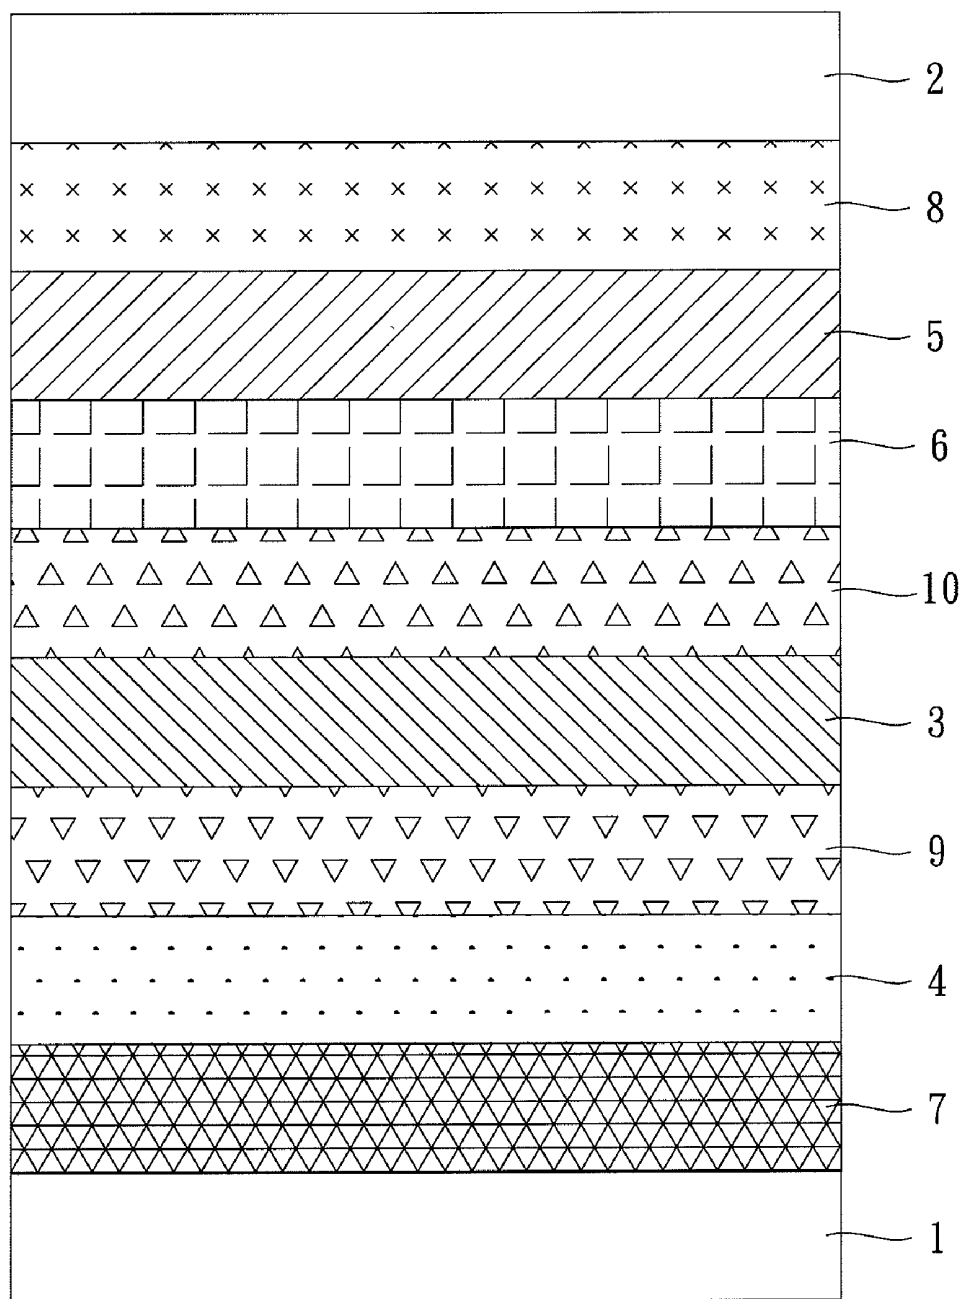


Fig. 1

M-TERPHENYL COMPOUND DERIVATIVES AND APPLICATION FOR ORGANIC LIGHT EMITTING DIODE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a novel compound and organic light emitting diode using the same, particularly to m-terphenyl derivatives and organic light emitting diode using the same.

[0003] 2. Description of the Prior Art

[0004] OLED works on the principal that electrons and holes diffuse through an electron transport layer (ETL) and hole transport layer (HTL), respectively, to enter a light-emitting layer, and recombine in the emitting region to form a particle generally referred as exciton. In order for the exciton to relax to the ground state, the energy is given off in the form of photo radiation. The radiation color can be tuned by applying different emitting materials. OLED has been highly-regarded due to a lot of advantages, such as self illumination, wider visual angle ($>170^\circ$), shorter response time ($\sim\mu\text{s}$), higher contrast, higher efficiency, lower power consumption, higher brightness, lower operative voltage (3-10V), thinner size ($<2\text{ mm}$), flexibility and so on.

[0005] The exciton generated from recombining holes and electrons may have triplet state or singlet state for its spin state. The singlet exciton relaxation would radiate fluorescence, and the triplet exciton relaxation would radiate phosphorescence. Phosphorescence achieves 3-fold efficiency when compared to fluorescence and may greatly enhance the IQE (internal quantum efficiency) of devices up to 100% by adopting heavy metal in electroluminescent configuration to achieve strong spin-orbital coupling and mixing of singlets and triplets. Therefore, phosphorescent heavy metals are now adopted as phosphorescent dopants in the emitting layer of OLED. In addition, by applying a doping method on the emitting layer, self-quenching of the emitting materials can be reduced greatly to enhance the efficiency of the device.



[0006] However, due to the higher triplet energy level for phosphorescent molecules, some energy would tend to flow to other material with lower triplet energy level and cause illumination in the device. Therefore, A good electron transport material should include following properties: 1. reversible electrochemical redox properties; 2. suitable HOMO and LUMO values so as to provide lowered operating voltage for good electron injection and optional hole blocking properties, where the HOMO value for the known electron transport material with hole blocking property is usually more than 6 eV; 3. higher electron mobility so as to obtain the combination area departed from the cathode and increase the generation rate of excitons; 4. higher thermal stability so as to prevent the heat generated by driving device from shortening the life expectancy of devices; and 5. good film forming ability.

[0007] To sum up, it is an important issue to achieve balance between electrons and holes in the devices and provide devices with better performance; therefore, it is necessary and critical to develop a novel carrier transport material.

SUMMARY OF THE INVENTION

[0008] The present invention is directed to m-terphenyl derivatives and organic light emitting diode using the same.

[0009] According to one embodiment, an m-terphenyl derivative having a structure of formula (I) or (II):

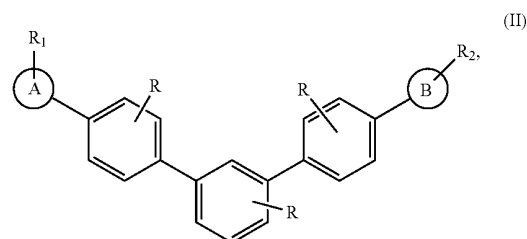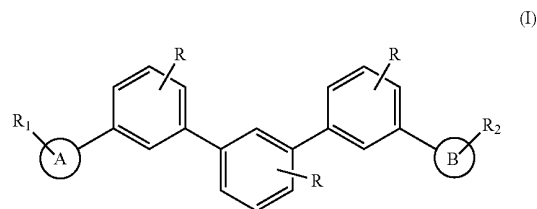

wherein A and B are five-membered heterocyclic compounds containing nitrogen, each of substituents R, R₁ and R₂ is a member independently selected from the group consisting of H, halo, cyano, trifluoromethyl, amino, C₁-C₁₀ alkyl, C₂-C₁₀ alkenyl, C₂-C₁₀ alkynyl, C₃-C₂₀ cycloalkyl, C₃-C₂₀ cycloalkenyl, C₁-C₂₀ heterocycloalkyl, C₁-C₂₀ heterocycloalkenyl, aryl and heteroaryl.

[0010] According to another embodiment, an organic light emitting diode includes a cathode, an anode, an emitting layer and an organic material layer. The emitting layer is configured between the cathode and the anode. The organic material layer is configured between the emitting layer and the cathode and comprises the aforementioned m-terphenyl derivatives.

[0011] Other advantages of the present invention will become apparent from the following descriptions taken in conjunction with the accompanying drawings wherein certain embodiments of the present invention are set forth by way of illustration and examples.


BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The foregoing aspects and many of the accompanying advantages of this invention will become more readily appreciated as the same becomes better understood by reference to the following detailed descriptions, when taken in conjunction with the accompanying drawings, wherein:

[0013] FIG. 1 is a schematic diagram illustrating an OLED device containing m-terphenyl derivatives.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0014] The m-terphenyl derivatives of the present invention having a structure of formula (I) or (II) is provided.

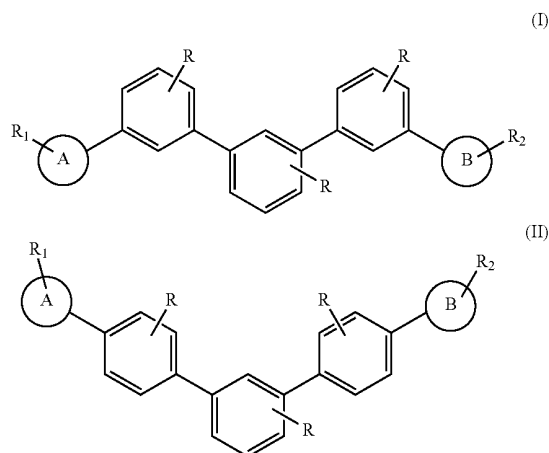

[0015] A and B may be the same or different five-membered heterocyclic compounds containing nitrogen, for example without limited to pyrrole, pyrazole, imidazole, 1,2,3-triazole, 1,2,4-triazole, 1,2,3,4-tetrazole, 1,2-oxazole, 1,3-oxazole, 1,3,4-oxadiazole, 1,2,4-oxadiazole, 1,2-thiazole, 1,3-thiazole or 1,3,4-thiadiazole. In addition, A and B may be bonded to the m-terphenyl via C or N atom.

[0016] Each of substituents R, R₁ in A and R₂ in B of the m-terphenyl derivatives is a member independently selected from the group consisting of H, halo, cyano, trifluoromethyl, amino, C₁-C₁₀ alkyl, C₂-C₁₀ alkenyl, C₂-C₁₀ alkynyl, C₃-C₂₀ cycloalkyl, C₃-C₂₀ cycloalkenyl, C₁-C₂₀ heterocycloalkyl, C₁-C₂₀ heterocycloalkenyl, aryl and heteroaryl.

[0017] The term [aryl] refers to a hydrocarbon moiety having one or more aromatic rings. Examples of aryl moieties include phenyl (Ph), phenylene, naphthyl, naphthylene, pyrenyl, anthryl, and phenanthryl.


[0018] The term [heteroaryl] refers to a moiety having one or more aromatic rings that contain at least one heteroatom (e.g., N, O, or S). Examples of heteroaryl moieties include furyl, furylene, fluorenyl, pyrrolyl, thienyl, oxazolyl, imidazolyl, thiazolyl, pyridyl, pyrimidinyl, quinazolinyl, quinolyl, isoquinolyl and indolyl.

[0019] Alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkenyl, heterocycloalkyl, heterocycloalkenyl, aryl, and heteroaryl mentioned herein include both substituted and unsubstituted moieties, unless specified otherwise. Possible substituents on cycloalkyl, cycloalkenyl, heterocycloalkyl, heterocycloalkenyl, aryl, and heteroaryl include, but are not limited to, C₁-C₁₀ to alkyl, C₂-C₁₀ alkenyl, C₂-C₁₀ alkynyl, C₃-C₂₀ cycloalkyl, C₃-C₂₀ cycloalkenyl, C₁-C₂₀ heterocycloalkyl, C₁-C₂₀ heterocycloalkenyl, C₁-C₁₀ alkoxy, aryl, aryloxy, heteroaryl, heteroaryloxy, amino, C₁-C₁₀ alkylamino, C₁-C₂₀ dialkylamino, arylamino, diarylamino, C₁-C₁₀ alkylsulfonamino, arylsulfonamino, C₁-C₁₀ alkylimino, arylimino, C₁-C₁₀ alkylsulfonimino, arylsulfonimino, hydroxyl, halo, thio, C₁-C₁₀ alkylthio, arylthio, C₁-C₁₀ alkylsulfonfyl, arylsulfonfyl, acylamino, aminoacyl, aminothioacyl, amido, amidino, guanidine, ureido, thioureido, cyano, nitro, nitroso, azido, acyl, thioacyl, acyloxy, carboxyl, and carboxylic ester. On the other hand, possible substituents on alkyl, alkenyl, or alkynyl include all of the above-recited substituents except


C₁-C₁₀ alkyl. Cycloalkyl, cycloalkenyl, heterocycloalkyl, heterocycloalkenyl, aryl, and heteroaryl can also be fused with each other.

[0020] In one preferred embodiment, A is the same as B and the substituent R₁ of A is the same as the substituent R₂ of B. A may be 1,3,4-oxadiazole or 1,2,4-triazole. The compounds 1,3,4-oxadiazole and 1,2,4-triazole have been characterized in having good electron affinity and ultra low HOMO (highest occupied molecular orbital) resulting in blocking the hole easily. Therefore, it is suitable and efficient to adopt 1,3,4-oxadiazole and 1,2,4-triazole in m-terphenyl core for electron transporting material.

[0021] In one embodiment, m-terphenyl derivatives having heterocyclic substituents are represented as formulae (a) to (e).

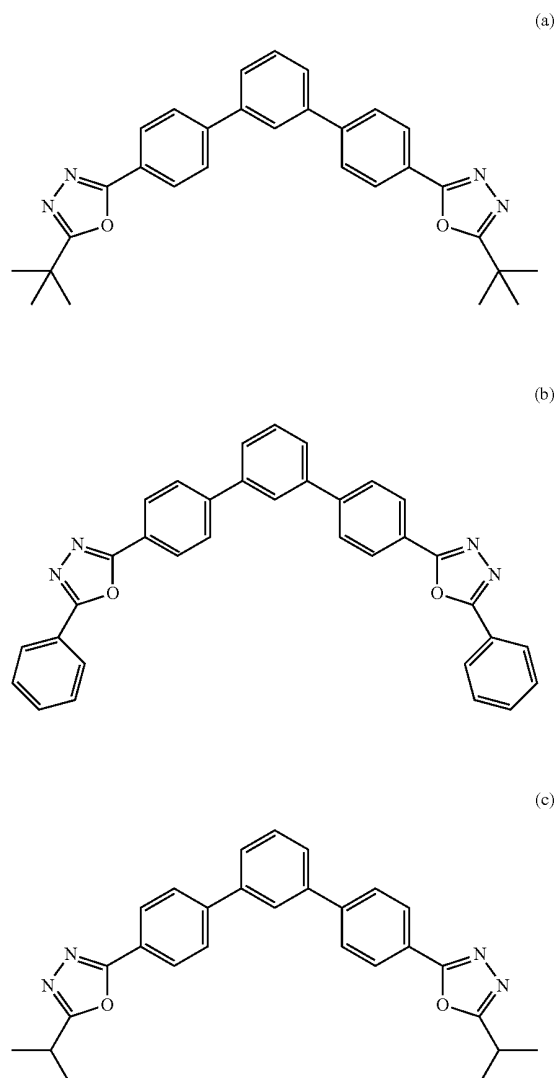


-continued

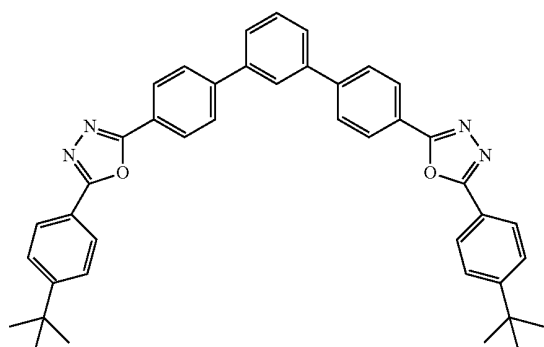


(d)

-continued

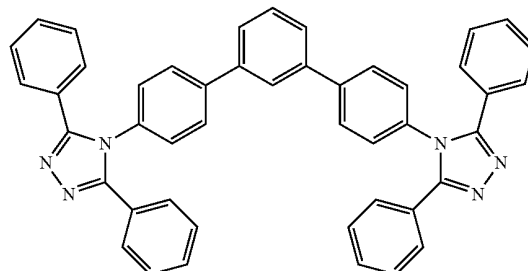


(e)


[0022] In another embodiment, m-terphenyl derivatives having heterocyclic substituents are represented as formulae (f) to (j).

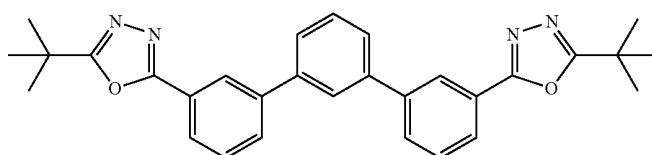


(f)




(g)

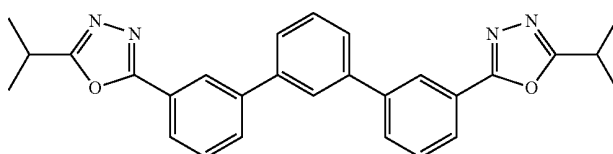

(h)

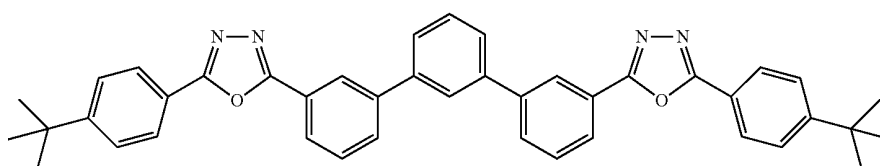

(i)

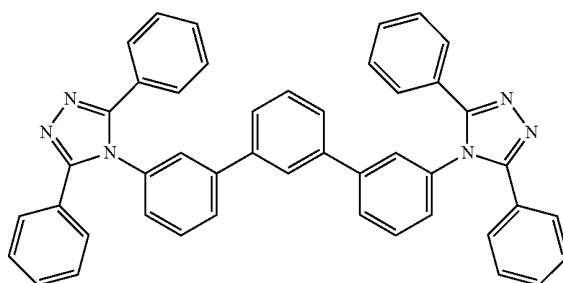

(j)


[0023] Refer to FIG. 1, which is a schematic diagram illustrating an organic light emitting device containing m-terphenyl derivatives according to one embodiment of the present invention. The light emitting device includes an emitting layer 3 configured between the anode 1 and cathode 2. The emitting layer 3 is made of host emitting material doped with light emitting material. The light emitting device may also include a hole injecting layer 7, a hole transport layer 4, an electron blocking layer 9, an emitting layer 3, an exciton blocking layer 10, a hole blocking layer 6, an electron transport layer 5 and an electron injecting layer 8 sequentially configured on top of the anode 1. The real thickness of each layer doesn't correspond to the schematic size, and exciton blocking layer 10, electron blocking layer 9, hole blocking layer 6 and electron injecting layer 8 may be optional. The m-terphenyl derivatives having heterocyclic substituents may function as an electron transport material, an electron injection material, a hole blocking material or an exciton blocking material.

Compound Synthesis


[0024] Refer to following description illustrating the synthetic pathway of the m-terphenyl derivatives of the present invention.

[0025] Compound m-2a, Bis(1,3,4-oxadiazole-5-diyl) 3,3'-m-terphenyl, for example, may be obtained from the reaction of reactants m-1a 2-(3-bromophenyl)-1,3,4-oxadiazole and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene in the presence of K_2CO_3 and $PdCl_2(PPh_3)_2$.


[0026] Accordingly, compound p-2a, Bis(1,3,4-oxadiazole-5-diyl) 4,4'-m-terphenyl, for example, was obtained from the reaction of reactants 2-(4-bromophenyl)-1,3,4-oxadiazole and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene in the presence of K_2CO_3 and $PdCl_2(PPh_3)_2$.

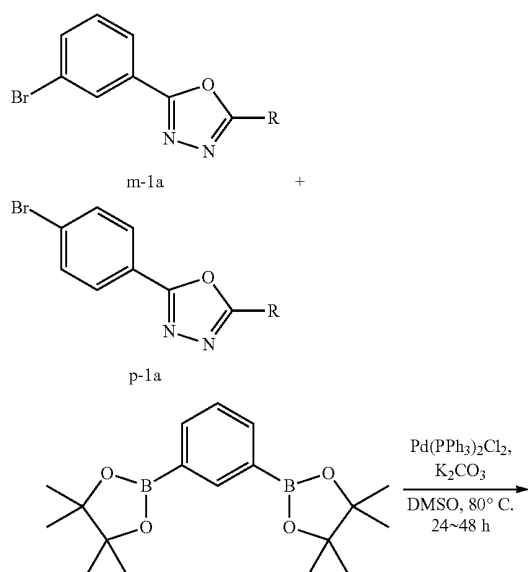


-continued

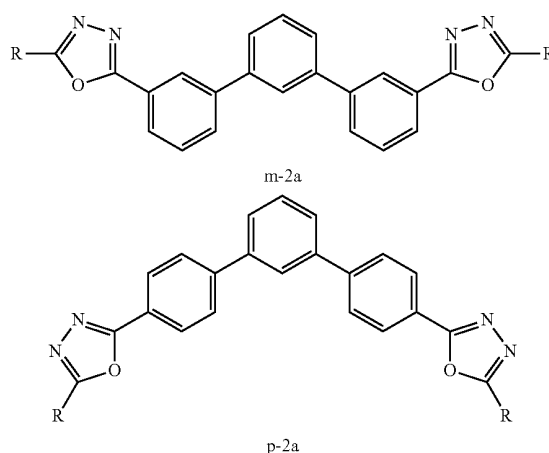


[0027] Therefore, referring to following reaction formulae, products m-2b, p-2b, m-2c or p-2c may be obtained by choosing various starting materials m-1b, p-1b, m-1c or p-1c for reaction.

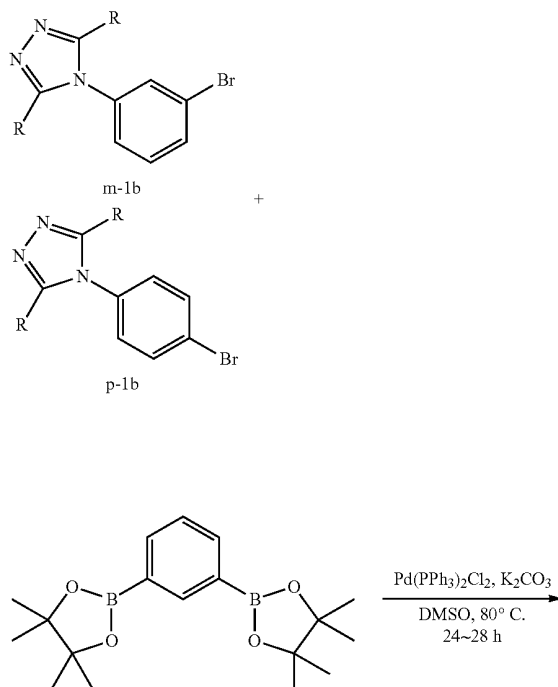


-continued

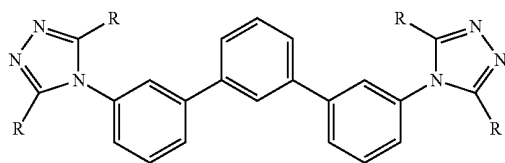


m-2b

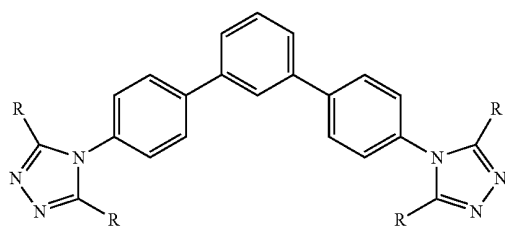


p-2b




m-1c




p-1c

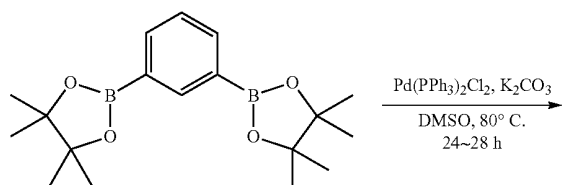

-continued



m-2c

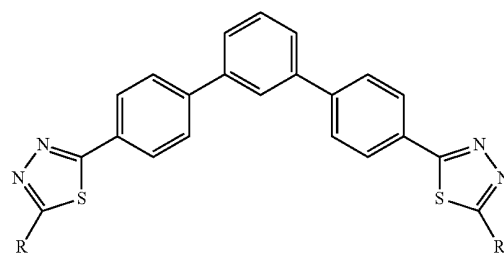


p-2c

[0028] Examples of m-terphenyl derivatives of the present invention are now further specified and described. However, the scope of the present invention is not thus limited with these examples and is set forth by the appended claims.

Example 1

Bis(2-isopropyl-1,3,4-oxadiazole-5-yl) 3,3'-m-terphenyl

[0029]



[0030] Compounds

[0031] 2-(3-bromophenyl)-5-isopropyl-1,3,4-oxadiazole (5 g, 18.79 mmol), K_2CO_3 (12.96 g, 93.98 mmol), $PdCl_2(PPh_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (3.10 g, 9.39 mmol) then 40 mL Dry DMSO were added to 100 mL two-neck flask. Stirring is performed for the reaction at 80-120°C until the starting material disappeared as monitored by TLC. After cooling to room temperature, the catalyst was removed by filtration and washed with chloroform. The crude product was extracted with H_2O five to six times to remove the DMSO. The organic layer was dried over $MgSO_4$, filtered and concentrated under reduced pressure and then purified by column chromatography on silica gel (hexane/EA=2:1) to give the product. Yield: 75%

[0032] 1H -NMR (400 MHz, $CDCl_3$, δ): 8.31 (s, 2H), 8.04-8.02 (d, J=8 Hz, 2H), 7.86 (s, 1H), 7.80-7.78 (d, J=8 Hz, 2H),

7.66-7.65 (d, J=4 Hz, 2H), 7.65-7.55 (m, 3H), 3.29-3.26 (m, 2H), 1.46-1.44 (d, J=8 Hz, 12H).


[0033] ^{13}C -NMR (100 MHz, CDCl_3 , δ): 170.79, 164.28, 141.59, 140.48, 130.09, 129.53, 126.57, 125.84, 125.58, 125.22, 124.52, 26.26, 19.89.

[0034] HRMS (EI) Calcd for $\text{C}_{28}\text{H}_{26}\text{N}_4\text{O}_2$ (M^+): 450.2056. Found: 450.2060.

Example 2

Bis(2-isopropyl-1,3,4-oxadiazole-5-diyl) 4,4'-m-terphenyl

[0035]

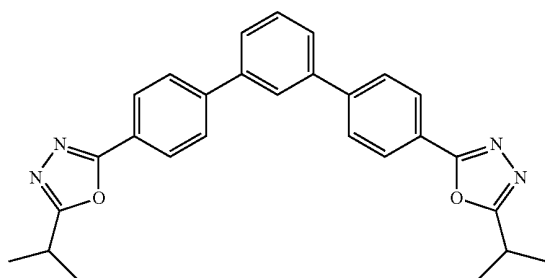

[0036] Compounds 2-(3-bromophenyl)-5-isopropyl-1,3,4-oxadiazole (5 g, 18.79 mmol), K_2CO_3 (12.96 g, 93.98 mmol), $\text{PdCl}_2(\text{PPh}_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (3.10 g, 9.39 mmol) then 40 mL Dry DMSO were added to a 100 mL two-neck flask. The product was then obtained according to those steps in example 1. Yield: 82%

[0037] ^1H -NMR (400 MHz, CDCl_3 , δ): 8.13-8.11 (d, J=8 Hz, 4H), 7.85 (s, 1H), 7.77-7.75 (d, J=8 Hz, 4H), 7.66-7.64 (d, J=8 Hz, 2H), 7.58-7.55 (m, 1H), 3.29-3.26 (m, 2H), 1.47-1.45 (d, J=8 Hz, 12H).


[0038] ^{13}C -NMR (100 MHz, CDCl_3 , δ): 170.88, 164.34, 143.78, 140.63, 129.56, 127.66, 127.25, 126.84, 125.39, 123.17, 26.42, 20.03.

[0039] HRMS (EI) Calcd for $\text{C}_{28}\text{H}_{26}\text{N}_4\text{O}_2$ (M^+): 450.2056. Found: 450.2058.

Example 3

Bis(2-tert-butyl-1,3,4-oxadiazole-5-diyl) 3,3'-m-terphenyl

[0040]



[0041] Compounds 2-(3-bromophenyl)-5-tert-butyl-1,3,4-oxadiazole (5 g, 17.85 mmol), K_2CO_3 (12.31 g, 89.27 mmol), $\text{PdCl}_2(\text{PPh}_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (2.94 g, 8.92 mmol) then 40 mL Dry DMSO were added to a 100 mL two-neck flask. The product was then obtained according to those steps in example 1. Yield: 78%.

[0042] ^1H -NMR (400 MHz, CDCl_3 , δ): 8.29 (s, 2H), 8.04-8.02 (d, J=8 Hz, 2H), 7.86 (s, 1H), 7.80-7.78 (d, J=8 Hz, 2H), 7.67-7.65 (d, J=8 Hz, 2H), 7.61-7.57 (m, 3H), 1.48 (s, 18H).


[0043] ^{13}C -NMR (100 MHz, CDCl_3 , δ): 173.31, 164.53, 141.89, 140.85, 130.34, 129.54, 126.86, 126.20, 125.85, 125.52, 124.87, 32.54, 28.28.

[0044] HRMS (FAB) Calcd for $\text{C}_{30}\text{H}_{30}\text{N}_4\text{O}_2$ ($\text{M}^+ + 1$): 479.2447. Found: 479.2457.

Example 4

Bis(2-tert-butyl-1,3,4-oxadiazole-5-diyl) 4,4'-m-terphenyl

[0045]

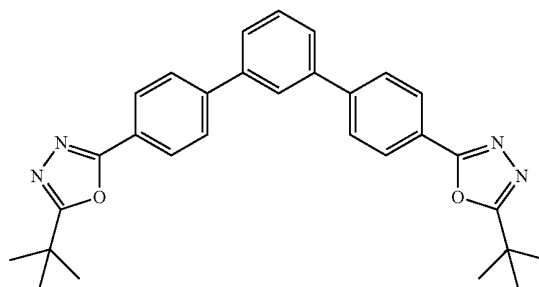

[0046] Compounds 2-(4-bromophenyl)-5-tert-butyl-1,3,4-oxadiazole (5 g, 17.85 mmol), K_2CO_3 (12.31 g, 89.27 mmol), $\text{PdCl}_2(\text{PPh}_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (2.94 g, 8.92 mmol) then 40 mL Dry DMSO were added to a 100 mL two-neck flask. The product was then obtained according to those steps in example 1. Yield: 86%

[0047] ^1H -NMR (400 MHz, CDCl_3 , δ): 8.15-8.13 (d, J=8 Hz, 4H), 7.87 (s, 1H), 7.79-7.77 (d, J=8 Hz, 4H), 7.68-7.66 (d, J=8 Hz, 2H), 7.60-7.57 (m, 1H), 1.51 (s, 18H).


[0048] ^{13}C -NMR (100 MHz, CDCl_3 , δ): 173.19, 164.36, 143.78, 140.68, 129.57, 127.67, 127.28, 126.85, 125.96, 123.26, 32.48, 28.22.

[0049] HRMS (FAB) Calcd for $\text{C}_{30}\text{H}_{30}\text{N}_4\text{O}_2$ ($\text{M}^+ + 1$): 479.2447. Found: 479.2449. Anal. calcd. For $\text{C}_{30}\text{H}_{30}\text{N}_4\text{O}_2$: C 75.29; H, 6.32; N, 11.71; Found: C 75.18, H 6.34, N 11.50.

Example 5

Bis(2-(4-tert-butylphenyl)-1,3,4-oxadiazole-5-diyl)
3,3'-m-terphenyl

[0050]

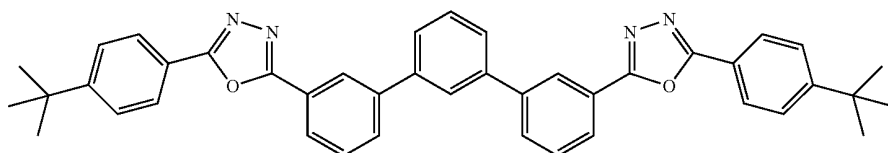

[0051] Compounds 2-(3-bromophenyl)-5-(4-tert-butylphenyl)-1,3,4-oxadiazole (5 g, 14.04 mmol), K_2CO_3 (9.61 g, 70.20 mmol), $PdCl_2(PPh_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (2.31 g, 7.02 mmol) then 40 mL Dry DMSO were added to a 100 mL two-neck flask. The product was then obtained according to those steps in example 1. Yield: 76%

[0052] 1H -NMR (400 MHz, $CDCl_3$, δ): 8.41 (s, 2H), 8.14-8.12 (d, $J=8$ Hz, 2H), 8.09-8.07 (d, $J=8$ Hz, 4H), 7.92 (s, 1H), 7.84-7.82 (d, $J=8$ Hz, 2H), 7.68-7.66 (d, $J=8$ Hz, 2H), 7.64-7.53 (m, 7H), 1.34 (s, 18H).


[0053] ^{13}C -NMR (100 MHz, $CDCl_3$, δ): 164.73, 164.21, 155.33, 141.81, 140.63, 130.36, 129.70, 129.58, 129.54, 126.76, 126.05, 125.99, 125.82, 125.52, 124.57, 120.94, 35.02, 31.04.

[0054] HRMS (EI) Calcd for $C_{42}H_{38}N_4O_2$ (M^+): 630.2995. Found: 630.2995.

Example 6

Bis(2-(4-tert-butylphenyl)-1,3,4-oxadiazole-5-diyl)
4,4'-m-terphenyl

[0055]

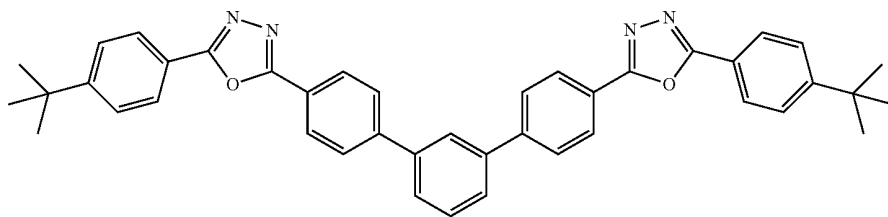

[0056] Compounds 2-(4-bromophenyl)-5-(4-tert-butylphenyl)-1,3,4-oxadiazole (5 g, 14.04 mmol), K_2CO_3 (9.61 g, 70.20 mmol), $PdCl_2(PPh_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (2.31 g, 7.02 mmol) then 40 mL Dry DMSO were added to a 100 mL two-neck flask. The product was then obtained according to those steps in example 1. Yield: 85%

[0057] 1H -NMR (400 MHz, $CDCl_3$, δ): 8.22-8.20 (d, $J=8$ Hz, 4H), 8.07-8.05 (d, $J=8$ Hz, 4H), 7.88 (s, 1H), 7.81-7.79 (d, $J=8$ Hz, 4H), 7.67-7.65 (d, $J=8$ Hz, 2H), 7.59-7.53 (m, 5H), 1.35 (s, 18H).


[0058] ^{13}C -NMR (100 MHz, $CDCl_3$, δ): 164.66, 164.10, 155.33, 143.87, 140.58, 129.59, 127.72, 127.36, 126.86, 126.73, 126.00, 125.92, 123.03, 120.98, 35.03, 31.06.

[0059] HRMS (EI) Calcd for $C_{42}H_{38}N_4O_2$ (M^+): 630.2995. Found: 630.2999.

Example 7

Bis((3,5-diphenyl)-1,2,4-triazole-4-diyl) 3,3'-m-terphenyl

[0060]

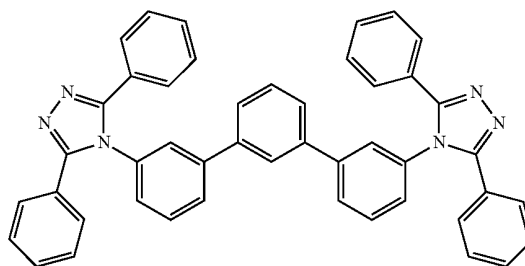

[0061] Compounds 4-(3-bromophenyl)-3,5-diphenyl-4H-1,2,4-triazole (5 g, 13.33 mmol), K_2CO_3 (9.2 g, 66.66 mmol),

$PdCl_2(PPh_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (2.2 g, 6.6 mmol) then 40 mL Dry DMSO were added to a 100 mL two-neck flask. The product was then obtained according to those steps in example 1. Yield: 80%

[0062] 1H -NMR (400 MHz, $CDCl_3$, δ): 7.65-7.63 (m, 4H), 7.51-7.28 (m, 24H), 7.14-7.12 (m, 4H).


[0063] ^{13}C -NMR (100 MHz, $CDCl_3$, δ): 154.62, 142.35, 139.76, 135.66, 130.28, 129.64, 128.83, 128.42, 128.04, 126.87, 126.68, 126.59, 126.17, 125.69.

[0064] HRMS (EI) Calcd for $C_{46}H_{32}N_6$ (M^+): 668.2688. Found: 668.2688.

Example 8

Bis((3,5-diphenyl)-1,2,4-triazole-4-diyl) 4,4'-m-ter-phenyl

[0065]

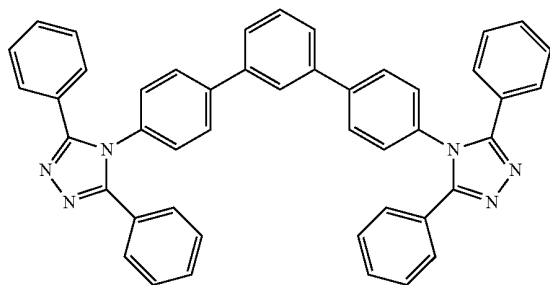

[0066] Compounds 4-(4-bromophenyl)-3,5-diphenyl-4H-1,2,4-triazole (5 g, 13.33 mmol), K_2CO_3 (9.2 g, 66.66 mmol), $PdCl_2(PPh_3)_2$ (10 mol %) and 1,3-bis(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl) benzene (2.2 g, 6.6 mmol) then 40 mL Dry DMSO were added to a 100 mL two-neck flask. The product was then obtained according to those steps in example 1. Yield: 83%

[0067] 1H -NMR (400 MHz, $CDCl_3$, δ): 7.84 (s, 1H), 7.73-7.71 (d, $J=8$ Hz, 4H), 7.67-7.26 (m, 27H).

[0068] ^{13}C -NMR (100 MHz, $CDCl_3$, δ): 154.76, 141.82, 140.00, 134.46, 129.66, 128.83, 128.44, 128.18, 126.58, 125.91.

[0069] HRMS (EI) Calcd for $C_{46}H_{32}N_6$ (M^+): 668.2688. Found: 668.2699.

Energy Level of Compounds

[0070] The LUMO, HOMO and energy level of compounds are listed in Table 1.

TABLE 1

Energy level of compounds			
Compound	LUMO (eV)	HOMO (eV)	energy level (eV)
Example 1	-2.18	-6.13	3.95
Example 2	-2.38	-6.25	3.87
Example 3	-2.17	-6.12	3.95
Example 4	-2.38	-6.25	3.87
Example 5	-2.37	-6.27	3.9
Example 6	-2.74	-6.43	3.69
OXD-7	-2.53	-6.34	3.81
(Reference)*			

*Reference compound OXD-7 (1,3-Bis([p-tert-butyl]phenyl-1,3,4-oxadiazoyl)benzene) is used for electron transport material.

Triplet Energy State of Compounds

[0071]

TABLE 1

Triplet energy level of compounds	
Compound	E_T (eV)
Example 1	2.83 eV
Example 2	2.56 eV
Example 3	2.83 eV
Example 4	2.56 eV
Example 5	2.9 eV
Example 6	2.77 eV
OXD-7 (Reference)	2.70 eV

[0072] In OLED devices, a higher energy level of triplet state of the electron transport materials would prevent the excitons in the devices from diffusing to the electron transport layer and lighting therein as well as undesired light leakage, thereby increasing light purity and lighting efficiency for the devices.

[0073] The triplet level of example compounds 1~6 of the present invention ranges from 2.77~2.9 eV, which is higher than that of OXD-7 (2.70 eV); therefore, the example compounds of the present invention would have better performance and be suitable for exciton blocking material.

Examples for OLED Structure

[0074] As for the formed device structure, ITO is used for the substrate and an electrode; the tested electrode includes LiF/Al; the tested emitting material includes Bis(4,6-difluorophenylpyridinato-N,C2)picolinatoiridium (Firpic), Iridium, fac-tris(2-phenylpyridine) iridium(III) ($Ir(ppy)_3$) and Bis(1-phenylisoquinoline)(acetylacetonate) iridium (III) ($Ir(piq)_2acac$); the tested electron transfer material includes Bhen(4,7-diphenyl-1,10-phenanthroline) and Alq_3 (tris(8-hydroxyquinoline)aluminum(III)), which also can be used for hole blocking material, or hole blocking material and electron transporting material simultaneously. The tested hole transporting material includes NPB (4,4'-bis[N-(1-naphthyl)-N-phenyl-amino]biphenyl) and TAPC (1,1'-bis(di-4-tolylaminophenyl) cyclohexane), which also can be used for electron blocking material, or electron blocking material and hole transporting material simultaneously. The m-2a and m-2b of the present invention may be used for electron transport material and/or electron injection material.

[0075] The detailed configuration and width (nm) of the tested devices are respectively illustrated as follows, where blue OLED devices include devices A, B, E; green OLED devices include devices C, D; red OLED device includes device G; device G represents an OLED device with doping material; and the reference device adopts OXD-7 as the electron transport material.

[0076] Device A: NPB (50)/TAPC (15)/11% Firpic:host (40)/m-2b (12.5)/BPhen (12.5)/LiF (1)/Al (100).

[0077] Device B: NPB (50)/TAPC (15)/11% Firpic:host (40)/m-2a (12.5)/BPhen (12.5)/LiF (1)/Al (100).

[0078] Reference for Device A B (Ref-A,B): NPB (50)/TAPC (15)/11% Firpic:host (40)/OXD-7 (12.5)/Bphen (12.5)/LiF (1)/Al (100).

[0079] Device C: NPB (50)/TAPC (15)/5% $Ir(ppy)_3$:host (40)/m-2b (12.5)/TAZ (12.5)/LiF (1)/Al (100).

[0080] Device D: NPB (20)/TAPC (15)/16% Ir(ppy)₃: host (40)/m-2b (12.5)/TAZ (12.5)/LiF (1)/Al (100).

[0081] Reference for Device C D (Ref-C,D): NPB (20)/TAPC (15)/16% Ir(ppy)₃: host(40)/OXD-7 (12.5)/TAZ (12.5)/LiF (1)/Al (100).

[0082] Device E: TAPC (30)/host 11% Firpic: mcp (50)/m-2b (30)/LiF (1)/Al (100).

[0083] Reference for Device E (Ref-E): TAPC (30)/host mcp:11% Firpic (50)/OXD-7 (30)/LiF (1)/Al (100).

[0084] Device F: TAPC (50)/host: 10% Ir(piq)₂acac (50)/m-2a (30)/LiF (1)/Al (100).

[0085] Reference for Device F (Ref-F): TAPC (50)/host: 10% Ir(piq)₂acac (50)/OXD-7 (30)/LiF (1)/Al (100).

[0086] Device G: TAPC (30)/host Firpic:m-2a (50)/m-2a (30)/LiF (1)/Al (100)

[0087] The lighting performance of the test devices are listed in Table 3.

TABLE 3

Performance Comparison for OLED devices							
De- vice	V _d ^a	L _{max} ^b (Cd/m ²)	□η _{ext} ^c (%)	η _e ^d (Cd/A)	η _p ^e (lm/W)	λ _{max} ^f	CIE@8 V
A	4.0	18508	15.7	16.36	6.92	471	(0.14, 0.29)
B	4.1	23671	20.8	21.43	11.99	472	(0.16, 0.35)
Ref- A, B	4.1	13371	10	10.7	3.5	472	(0.14, 0.34)
C	3.6	7002	13.3	14.65	13.16	512	(0.27, 0.60)
D	2.5	71029	29.5	51.94	54.47	515	(0.28, 0.63)
Ref- C, D	6.84	16193	8.74	8.2	2.66	514	(0.27, 0.62)
E	4.3	50283	21	40.62	28.29	472	(0.16, 0.32)
Ref- E	3.61	14427	11.6	12	5.82	472	(0.24, 0.35)
F	3.34	7843	12.6	9.99	7.85	625	(0.68, 0.32)
Ref- F	3.57	4416	10.4	8.1	2.4	632	(0.63, 0.32)
G	5.84	2178	6.62	6.9	2.2	472	(0.16, 0.34)

^aV_d: drive voltage;

^bL_{max}: maximum luminescence;

^cη_{ext}: maximum external quantum efficiency;

^dη_e: maximum current efficiency;

^eη_p: maximum power efficiency;

^fλ_{max}: maximum emission wavelength.



[0088] Referring to Table 3, devices containing m-terphenyl derivative m-2a, m-2b of the present invention, in comparison to the reference device, are better in each index and have better performance.

[0089] To sum up, the m-terphenyl derivatives of the present invention have advantages in good electron drawing, low HOMO and achieving hole blocking and may be used for electron transport material and/or electron injection material.

[0090] While the invention can be subject to various modifications and alternative forms, a specific example thereof has been shown in the drawings and is herein described in detail. It should be understood, however, that the invention is not to be limited to the particular form disclosed, but on the contrary, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the appended claims.

What is claimed is:

1. An m-terphenyl derivative having a structure of formula (I) or (II):

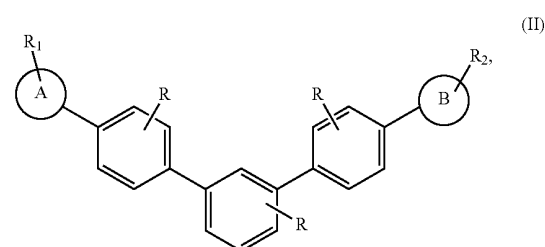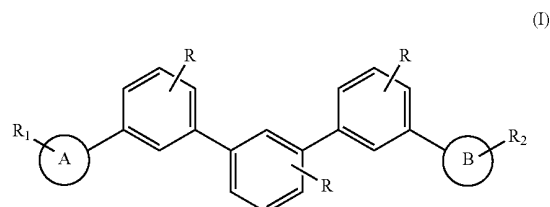

wherein A and B are five-membered heterocyclic compounds containing nitrogen, each of substituents R, R₁ and R₂ is a member independently selected from the group consisting of H, halo, cyano, trifluoromethyl, amino, C₁-C₁₀ alkyl, C₂-C₁₀ alkenyl, C₂-C₁₀ alkynyl, C₃-C₂₀ cycloalkyl, C₃-C₂₀ cycloalkenyl, C₁-C₂₀ heterocycloalkyl, C₁-C₂₀ heterocycloalkenyl, aryl and heteroaryl.

2. The m-terphenyl derivative as claimed in claim 1, wherein the five-membered heterocyclic compounds A and B are selected from the group consisting of pyrrole, pyrazole, imidazole, 1,2,3-triazole, 1,2,4-triazole, 1,2,3,4-tetrazole, 1,2-oxazole, 1,3-oxazole, 1,3,4-oxadiazole, 1,2,4-oxadiazole, 1,2-thiazole and 1,3-thiazole.

3. The m-terphenyl derivative as claimed in claim 1, wherein the five-membered heterocyclic compounds A and B are selected from the group consisting of 1,3,4-oxadiazole and 1,2,4-triazole.


4. The m-terphenyl derivative as claimed in claim 1, wherein the five-membered heterocyclic compounds A and B are the same, and the substituents R₁ and R₂ are the same.

5. The m-terphenyl derivative as claimed in claim 4, wherein the five-membered heterocyclic compound A is selected from the group consisting of pyrrole, pyrazole, imidazole, 1,2,3-triazole, 1,2,4-triazole, 1,2,3,4-tetrazole, 1,2-oxazole, 1,3-oxazole, 1,3,4-oxadiazole, 1,2,4-oxadiazole, 1,2-thiazole, 1,3-thiazole and 1,3,4-thiadiazole.


6. The m-terphenyl derivative as claimed in claim 5, wherein the five-membered heterocyclic compound A is selected from the group consisting of 1,3,4-oxadiazole and 1,2,4-triazole.

7. The m-terphenyl derivative as claimed in claim 1, having a structure of formulae (a)~(j):


(a)

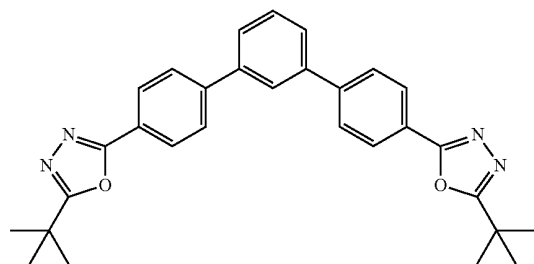


(b)

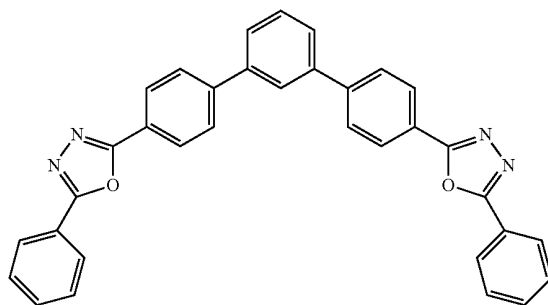


(c)

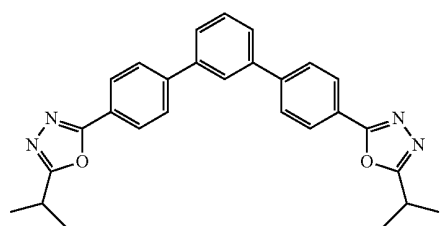


(d)

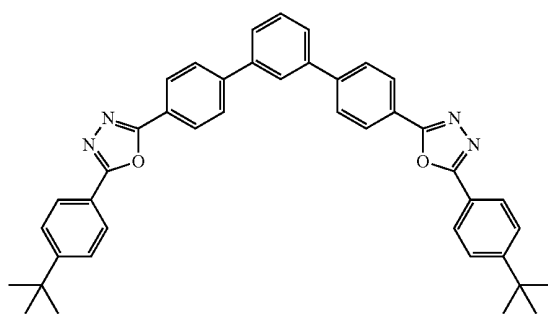


(e)

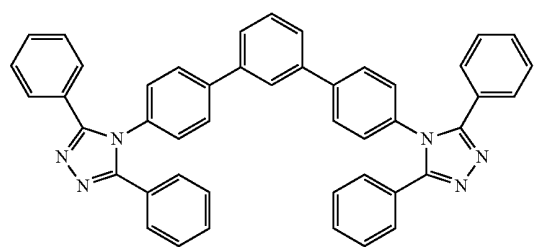


(f)



(g)




(h)




-continued

(i)

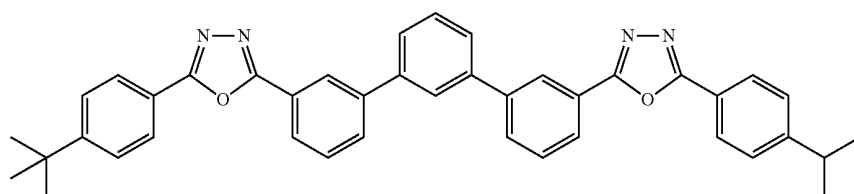

(i)

(j)

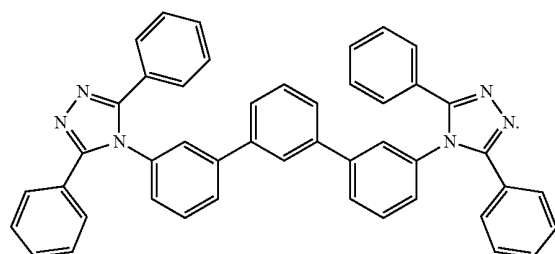

(j)


8. An organic light emitting diode, comprising:

a cathode;


an anode;

an emitting layer configured between the cathode and the anode; and

an organic material layer configured between the emitting layer and the cathode, wherein the organic material layer comprises an m-terphenyl derivative having a structure of formula (I) or (II):

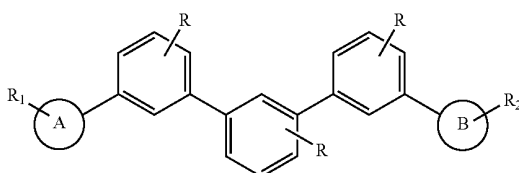

(I)

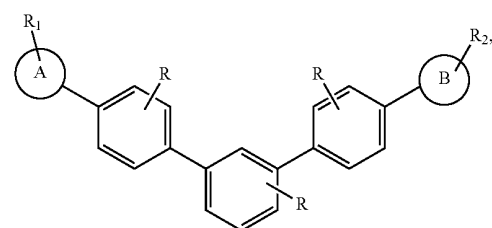

(II)

wherein A and B are five-membered heterocyclic compounds containing nitrogen, each of substituents R, R₁ and R₂ is a member independently selected from the group consisting of H, halo, cyano, trifluoromethyl, amino, C₁-C₁₀ alkyl, C₂-C₁₀ alkenyl, C₂-C₁₀ alkynyl, C₃-C₂₀ cycloalkyl, C₃-C₂₀ cycloalkenyl, C₁-C₂₀ heterocycloalkyl, C₁-C₂₀ heterocycloalkenyl, aryl and heteroaryl.

9. The organic light emitting diode as claimed in claim 8, wherein the five-membered heterocyclic compounds A and B are selected from the group consisting of pyrrole, pyrazole, imidazole, 1,2,3-triazole, 1,2,4-triazole, 1,2,3,4-tetrazole, 1,2-oxazole, 1,3-oxazole, 1,3,4-oxadiazole, 1,2,4-oxadiazole, 1,2-thiazole, 1,3-thiazole and 1,3,4-thiadiazole.

10. The organic light emitting diode as claimed in claim 8, wherein the five-membered heterocyclic compounds A and B are selected from the group consisting of 1,3,4-oxadiazole and 1,2,4-triazole.


11. The organic light emitting diode as claimed in claim 8, wherein the five-membered heterocyclic compounds A and B are the same, and the substituents R₁ and R₂ are the same.

12. The organic light emitting diode as claimed in claim 11, wherein the five-membered heterocyclic compound A is selected from the group consisting of pyrrole, pyrazole, imidazole, 1,2,3-triazole, 1,2,4-triazole, 1,2,3,4-tetrazole, 1,2-oxazole, 1,3-oxazole, 1,3,4-oxadiazole, 1,2,4-oxadiazole, 1,2-thiazole, 1,3-thiazole and 1,3,4-thiadiazole.


13. The organic light emitting diode as claimed in claim 12, wherein the five-membered heterocyclic compound A is selected from the group consisting of 1,3,4-oxadiazole and 1,2,4-triazole.

14. The organic light emitting diode as claimed in claim 8, wherein the m-terphenyl derivative has a structure of formulae (a)–(j):


(a)

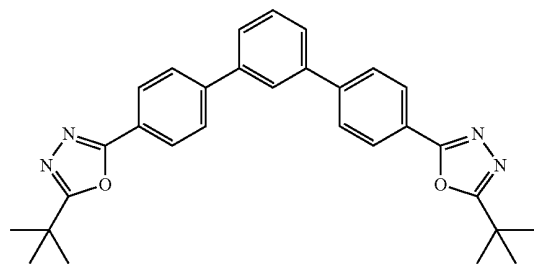


(b)

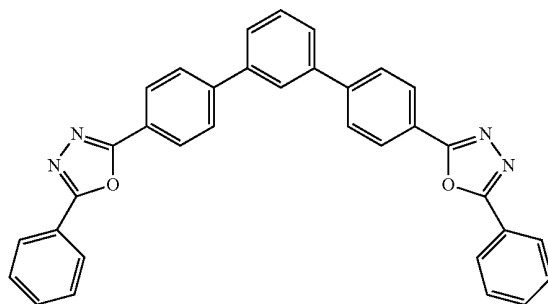


(c)

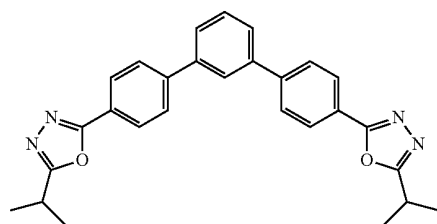


(d)

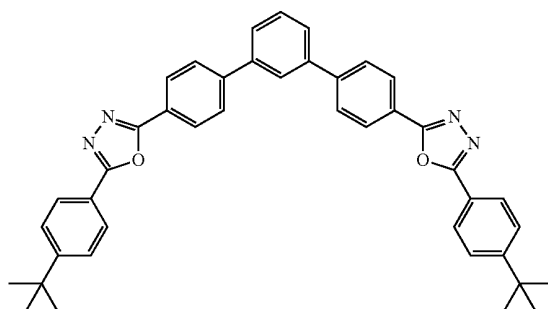


(e)

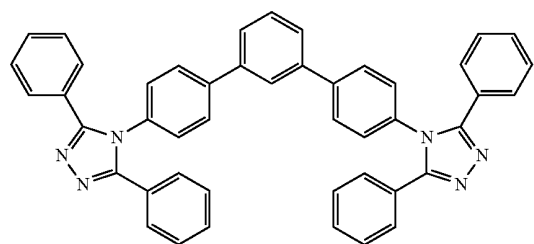


(f)



(g)



(h)




(g)

(h)

-continued


(i)

(i)

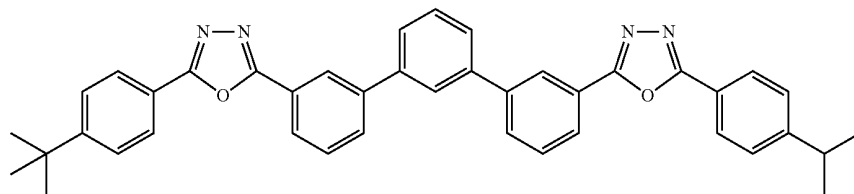

(j)

(j)

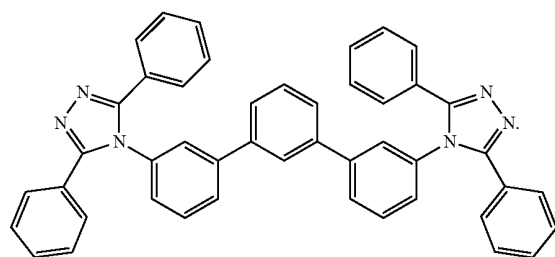

15. The organic light emitting diode as claimed in claim 8, wherein the organic light emitting diode is a blue OLED, a green OLED, a red OLED, a blue phosphorescent OLED, a green phosphorescent OLED or a red phosphorescent OLED.

16. The organic light emitting diode as claimed in claim 8, wherein the organic material layer is an electron transport layer, and the m-terphenyl derivative is an electron transport material.

17. The organic light emitting diode as claimed in claim 8, wherein the organic material layer is an electron injection

layer, and the m-terphenyl derivative is an electron injection material.

18. The organic light emitting diode as claimed in claim 8, wherein the organic material layer is a hole blocking layer, and the m-terphenyl derivative is a hole blocking material.

19. The organic light emitting diode as claimed in claim 8, wherein the organic material layer is an exciton blocking layer, and the m-terphenyl derivative is an exciton blocking material.

* * * * *

专利名称(译)	间三苯基化合物衍生物及其在有机发光二极管中的应用		
公开(公告)号	US20110220880A1	公开(公告)日	2011-09-15
申请号	US12/985678	申请日	2011-01-06
[标]申请(专利权)人(译)	程洪CHIEN 吴澄AN 吴芳IY SHIH郑烘		
申请(专利权)人(译)	程建洪 吴承恩-AN 吴方IY SHIH CHENG-HUNG		
当前申请(专利权)人(译)	E Ink公司HOLDINGS INC.		
[标]发明人	CHENG CHIEN HONG WU CHENG AN WU FANG IY SHIH CHENG HUNG		
发明人	CHENG, CHIEN-HONG WU, CHENG-AN WU, FANG-IY SHIH, CHENG-HUNG		
IPC分类号	H01L51/54 C07D249/08 C07D271/107		
CPC分类号	C07D249/08 H01L51/5275 H01L51/5253 C07D271/107		
优先权	099142097 2010-12-03 TW		
其他公开文献	US8475939		
外部链接	Espacenet USPTO		

摘要(译)

间 - 三联苯衍生物具有式 (I) 或 (II) 的结构： 其中A和B是含氮的五元杂环化合物，取代基R，R1和R2各自独立地选自H，卤素，氰基，三氟甲基，氨基，C1-C10烷基，C2-C10链烯基，C2-C10炔基，C3-C20环烷基，C3-C20环烯基，C1-C20杂环烷基，C1-C20杂环烯基，芳基和杂芳基。本发明的化合物可具有良好的电子亲和性，低HOMO，从而实现空穴阻挡的优点，并可用于电子传输材料和/或电子注入材料。

