



US 20160372035A1

(19) **United States**(12) **Patent Application Publication**
NAKATANI(10) **Pub. No.: US 2016/0372035 A1**(43) **Pub. Date: Dec. 22, 2016**(54) **EL DISPLAY DEVICE AND METHOD FOR
DRIVING EL DISPLAY DEVICE**(52) **U.S. Cl.**CPC **G09G 3/3233** (2013.01); **G09G 3/3266**
(2013.01); **G09G 2320/041** (2013.01); **G09G**
2330/028 (2013.01); **G09G 2330/045**
(2013.01); **G09G 2300/0842** (2013.01); **G09G**
2330/021 (2013.01)(71) Applicant: **JOLED INC.**, Tokyo (JP)(72) Inventor: **Toshikuni NAKATANI**, Tokyo (JP)(73) Assignee: **JOLED INC.**, Tokyo (JP)(21) Appl. No.: **14/902,101**(57) **ABSTRACT**(22) PCT Filed: **Jun. 5, 2014**(86) PCT No.: **PCT/JP2014/002995**

§ 371 (c)(1),

(2) Date: **Dec. 30, 2015**(30) **Foreign Application Priority Data**

Jul. 5, 2013 (JP) 2013-142167

Publication Classification(51) **Int. Cl.****G09G 3/3233** (2006.01)**G09G 3/3266** (2006.01)

An EL display device includes a display screen; a first gate signal line; a second gate signal line; gate driver ICs (circuits); a current generating circuit which supplies a current to EL elements; a current amount obtaining circuit which obtains a magnitude of a current flowing through a plurality of pixels; and an on-voltage generating circuit which generates a control voltage output by the gate driver IC (circuit) to the first gate signal line. Each of the pixels includes a first switching transistor. The control voltage is a voltage which causes the first switching transistor to be in a conducting state. The on-voltage generating circuit varies a first control voltage based on an output result from the current amount obtaining circuit.

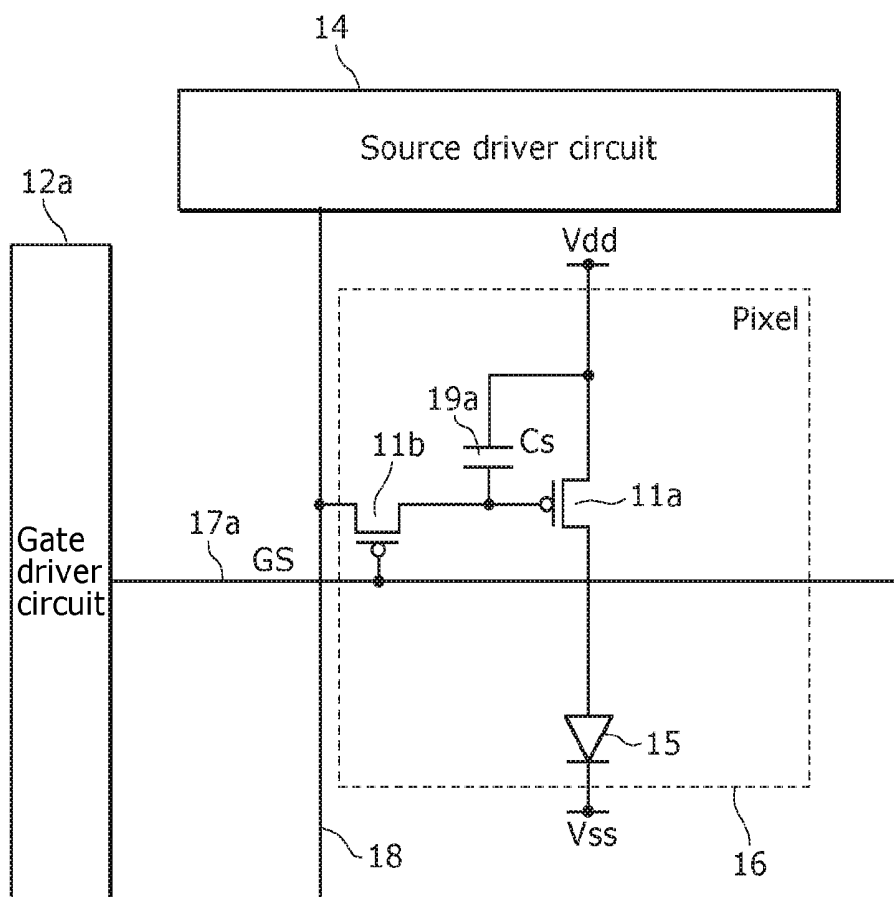


FIG. 1

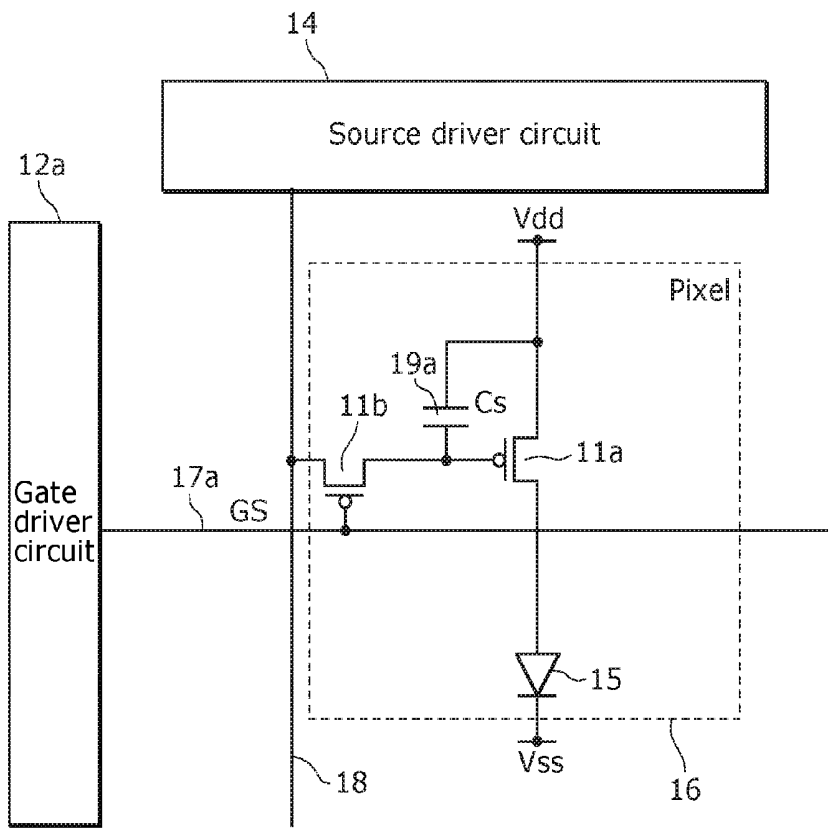


FIG. 2

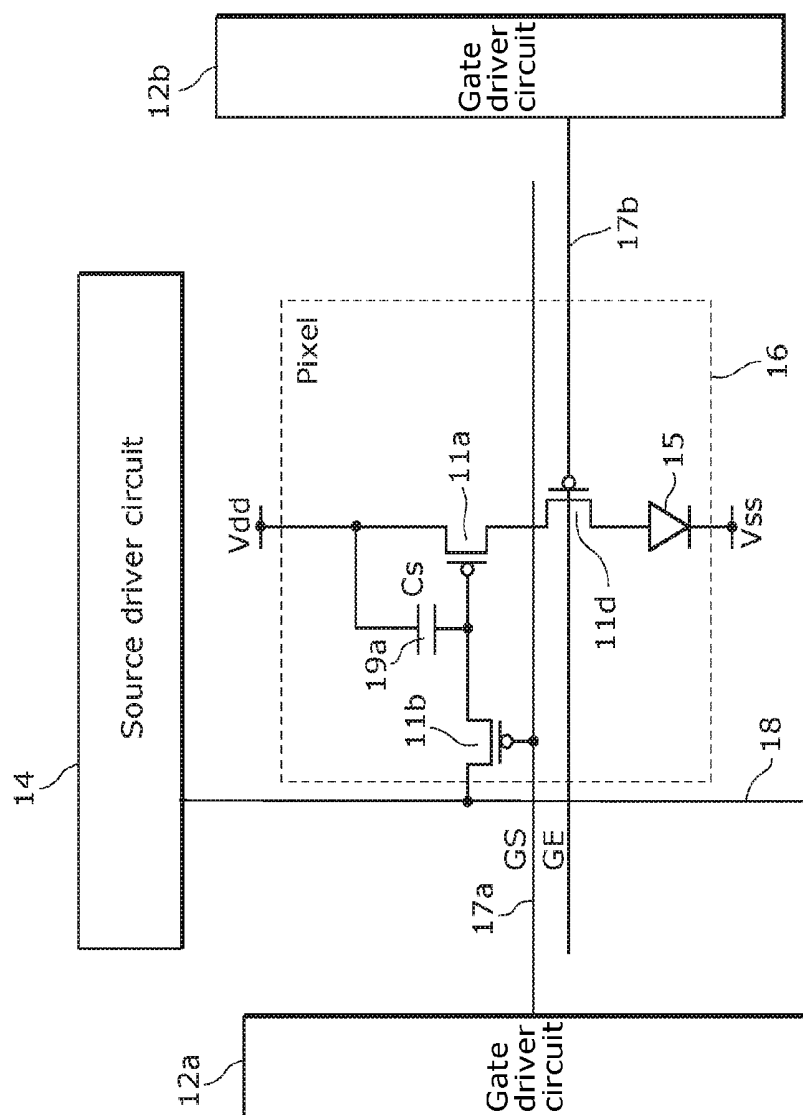
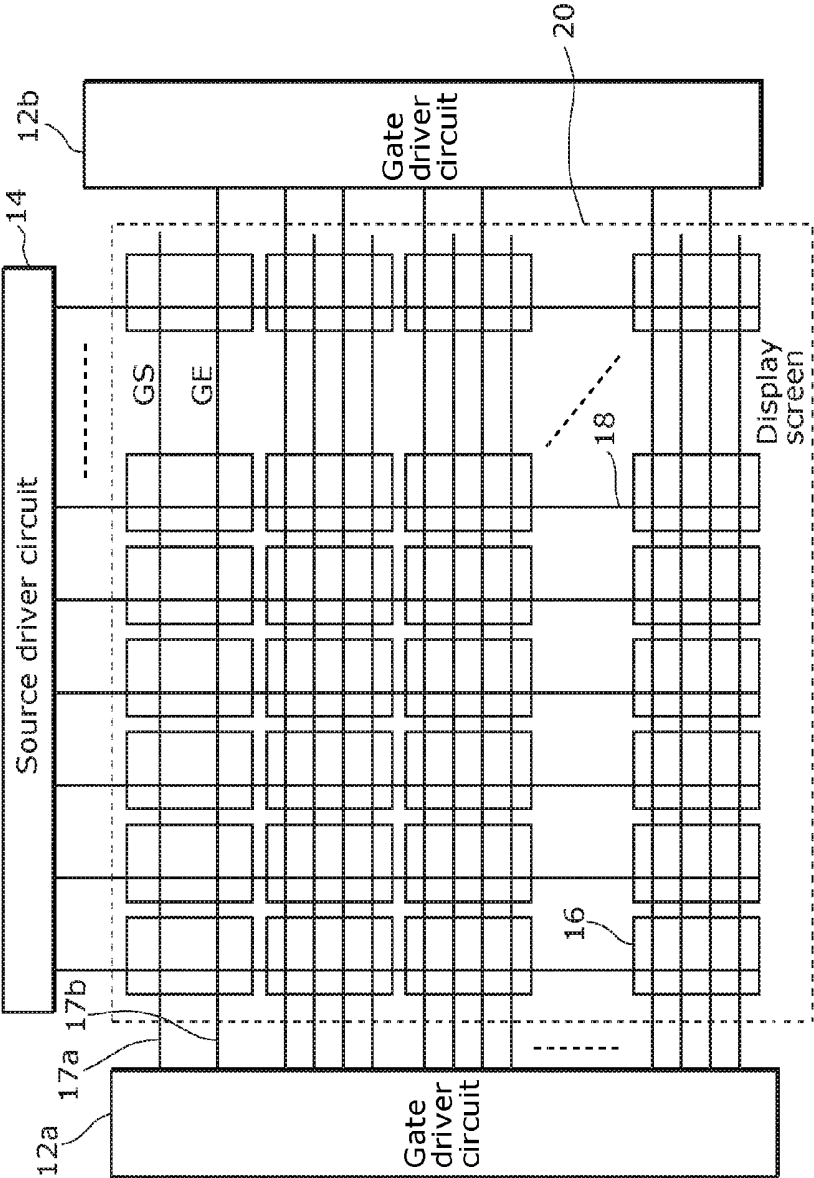


FIG. 3



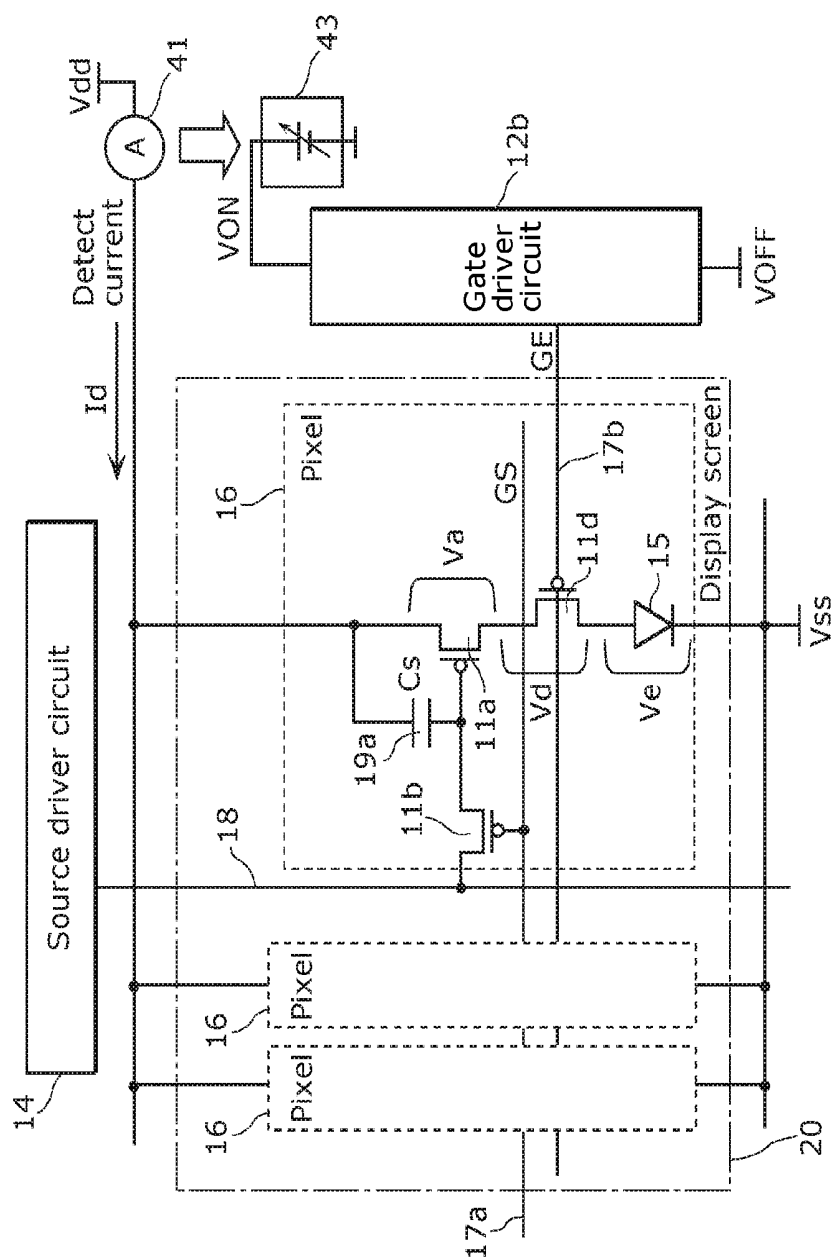


FIG. 5

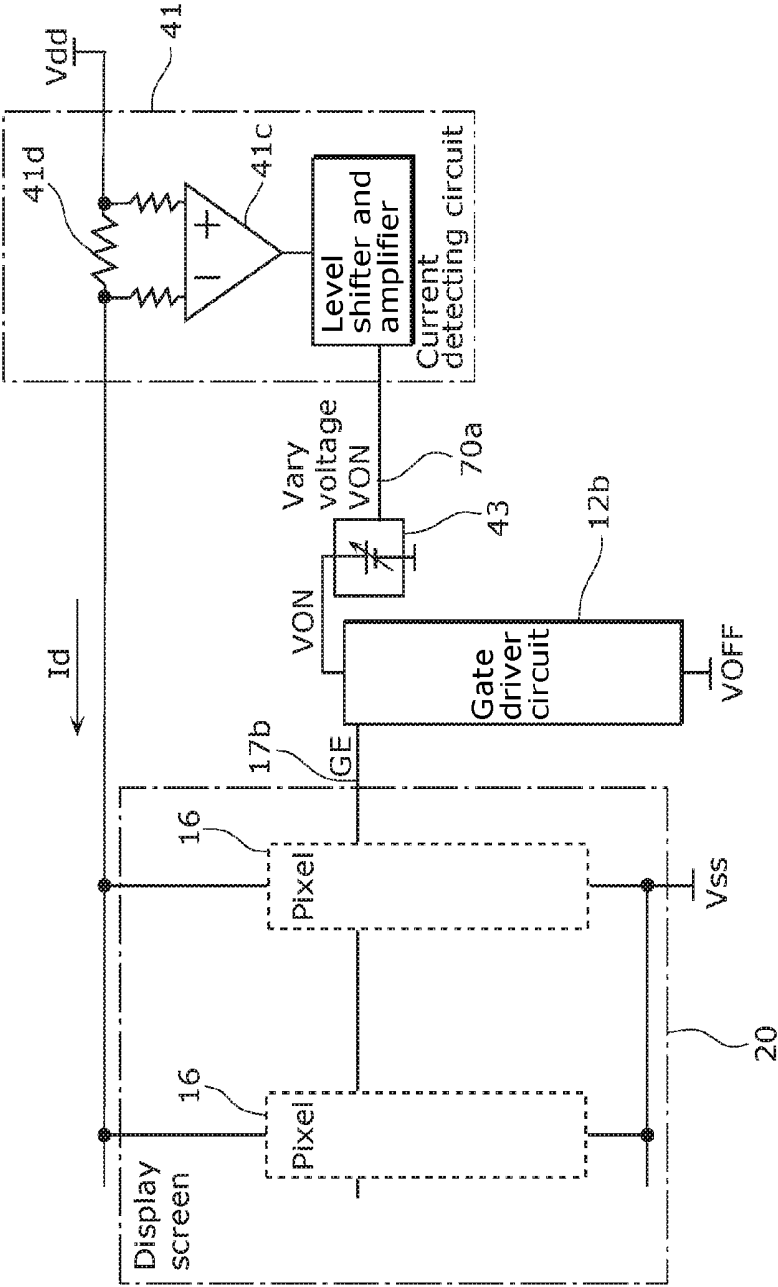


FIG. 6

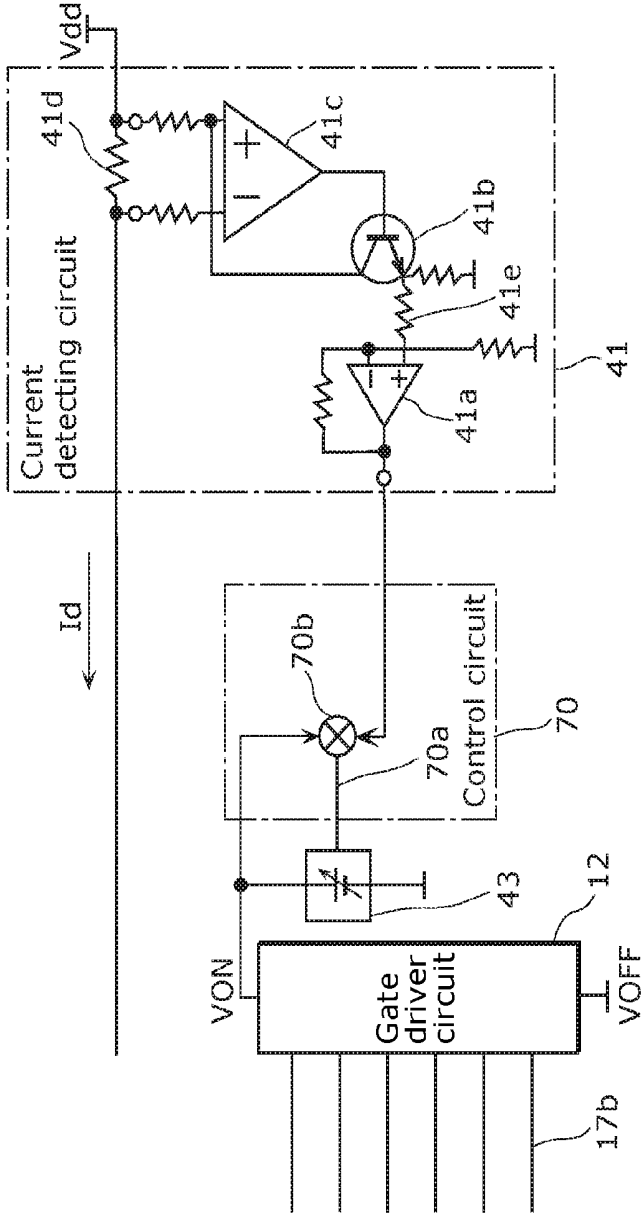


FIG. 7

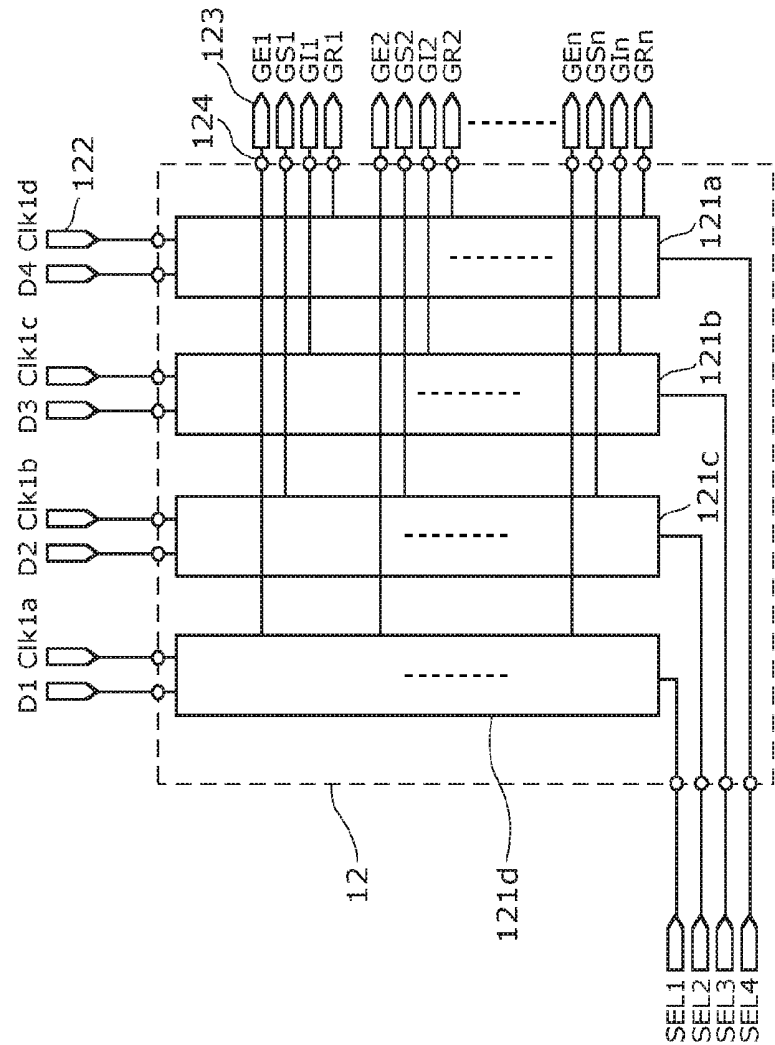


FIG. 8

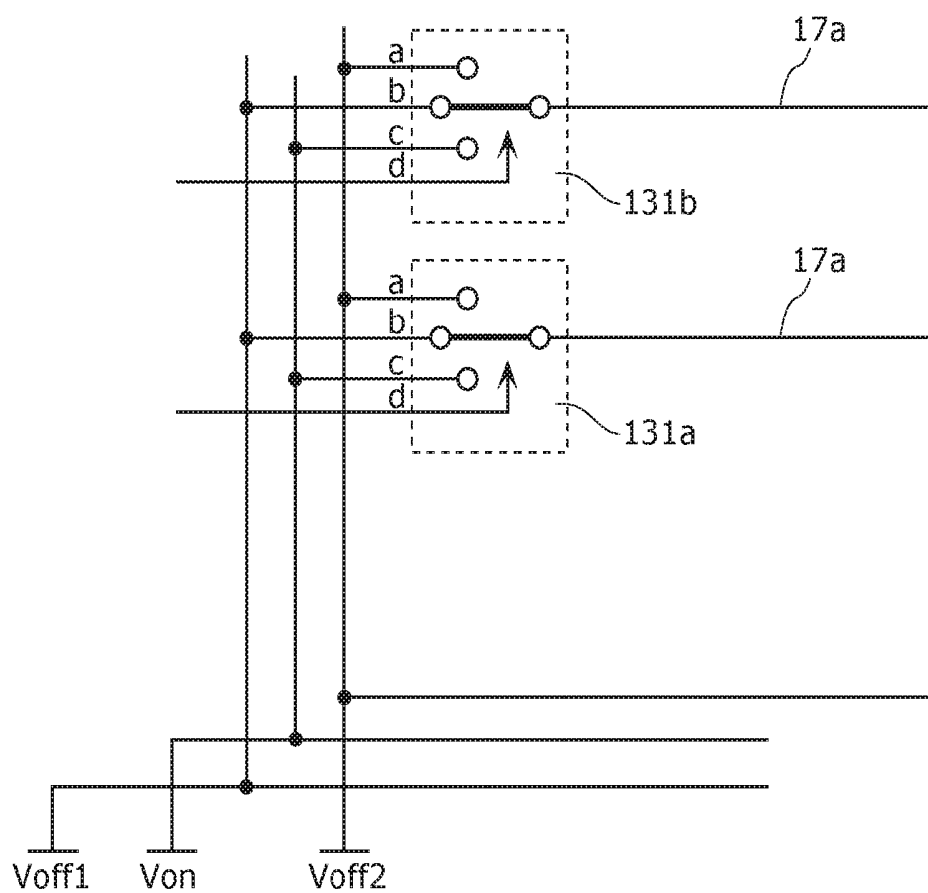


FIG. 9

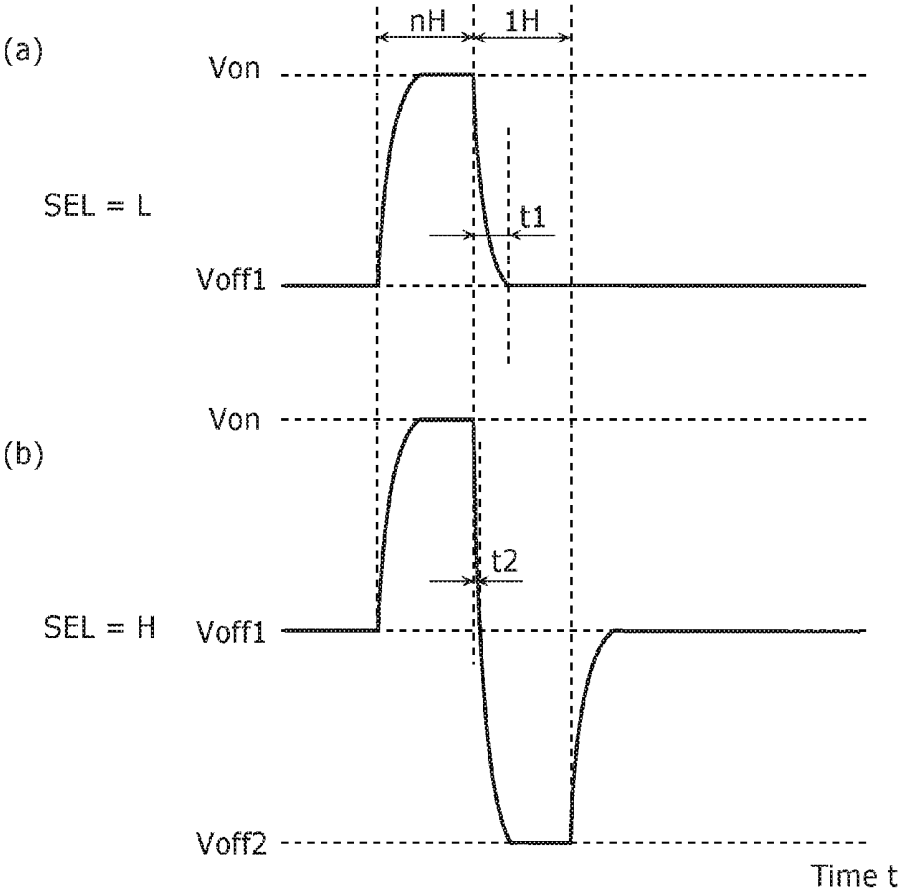


FIG. 10

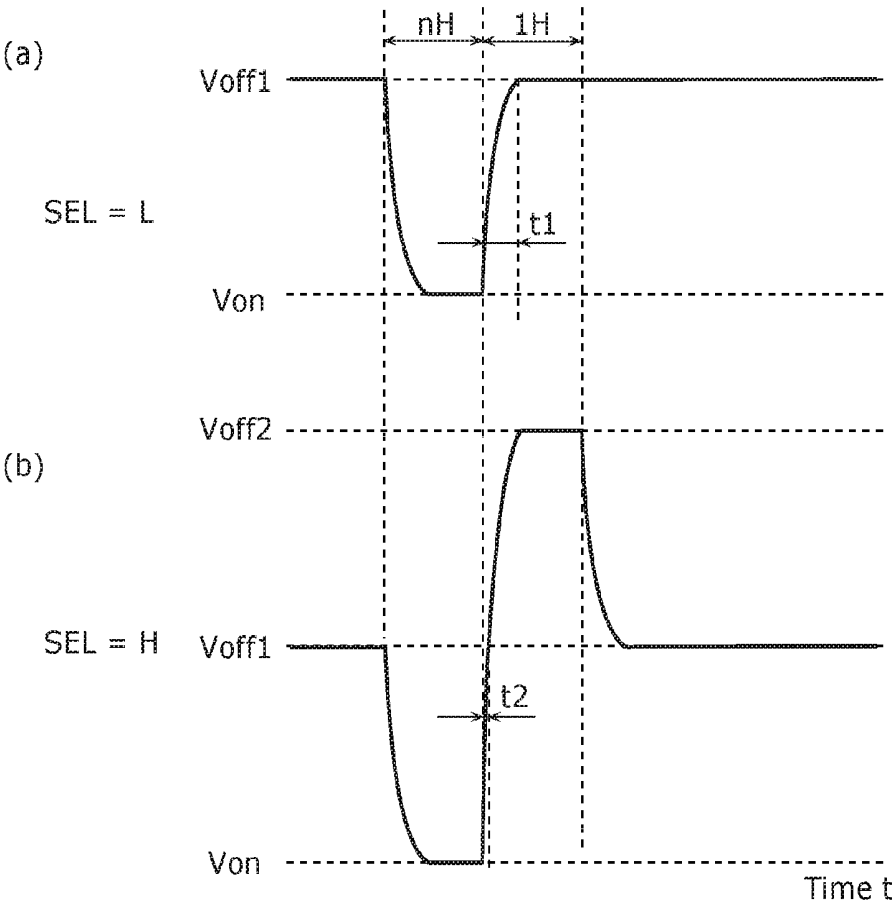


FIG. 12

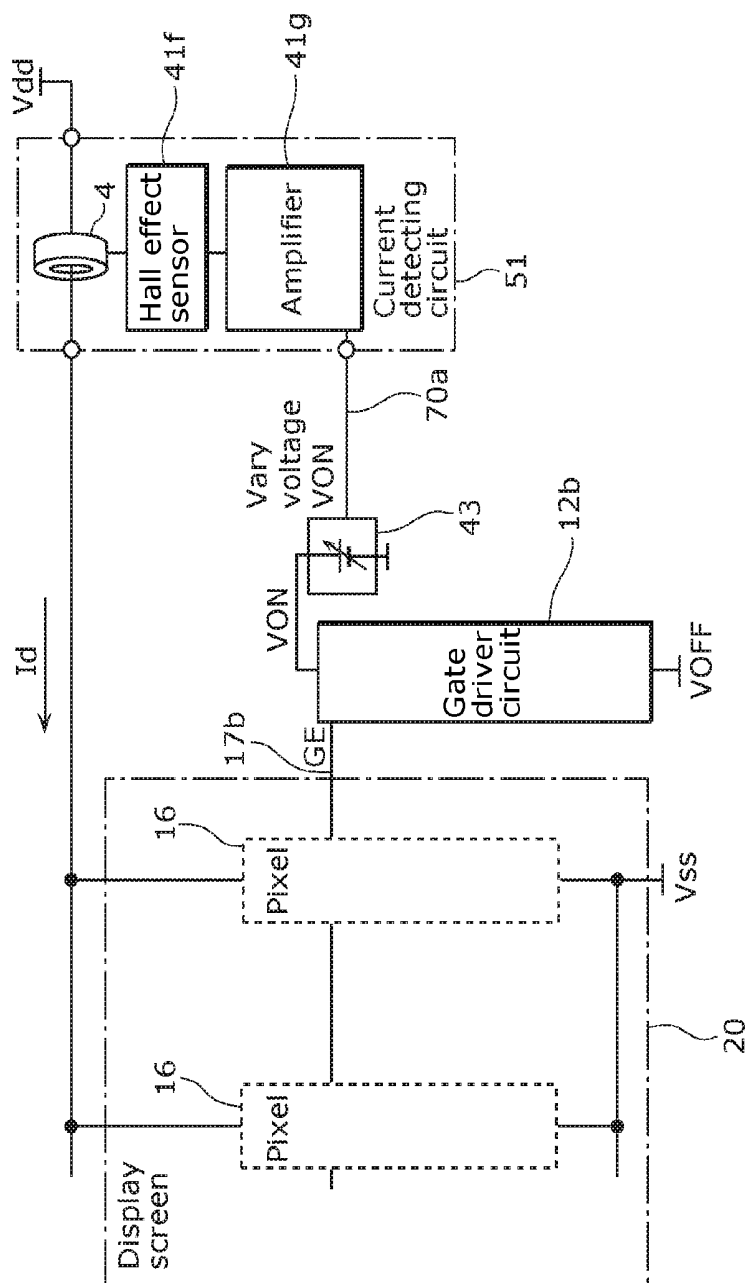


FIG. 13

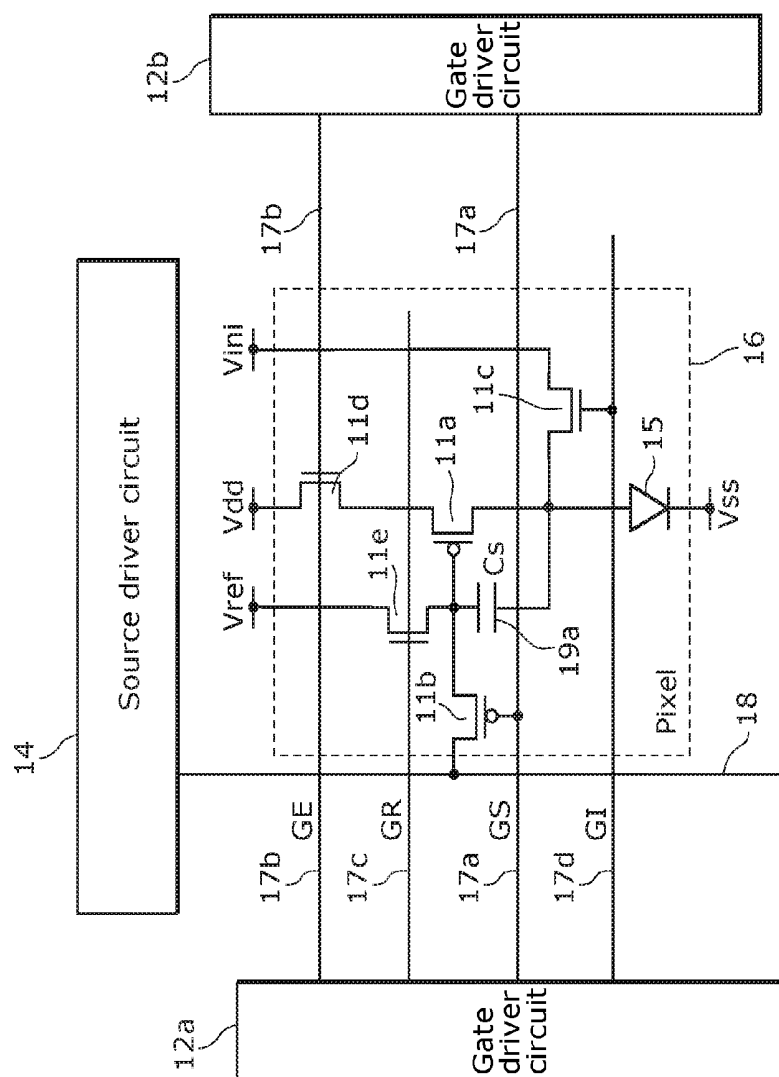


FIG. 14

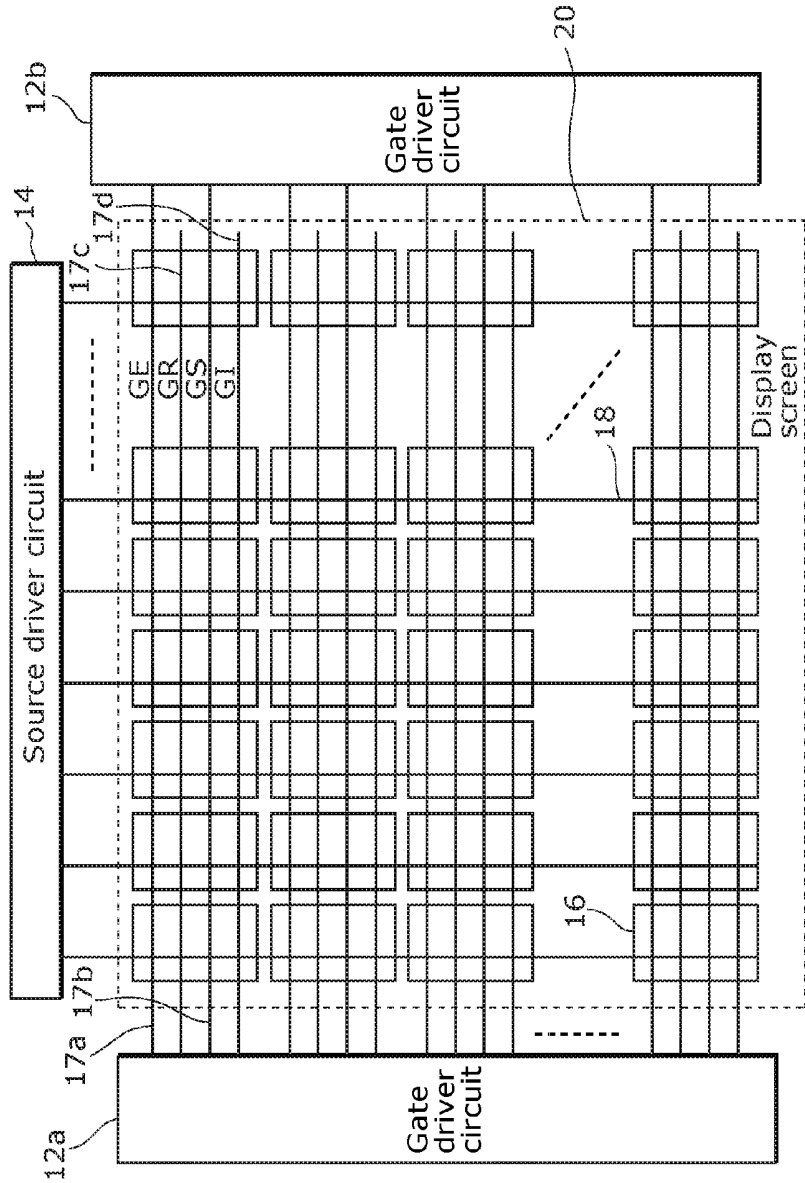


FIG. 17

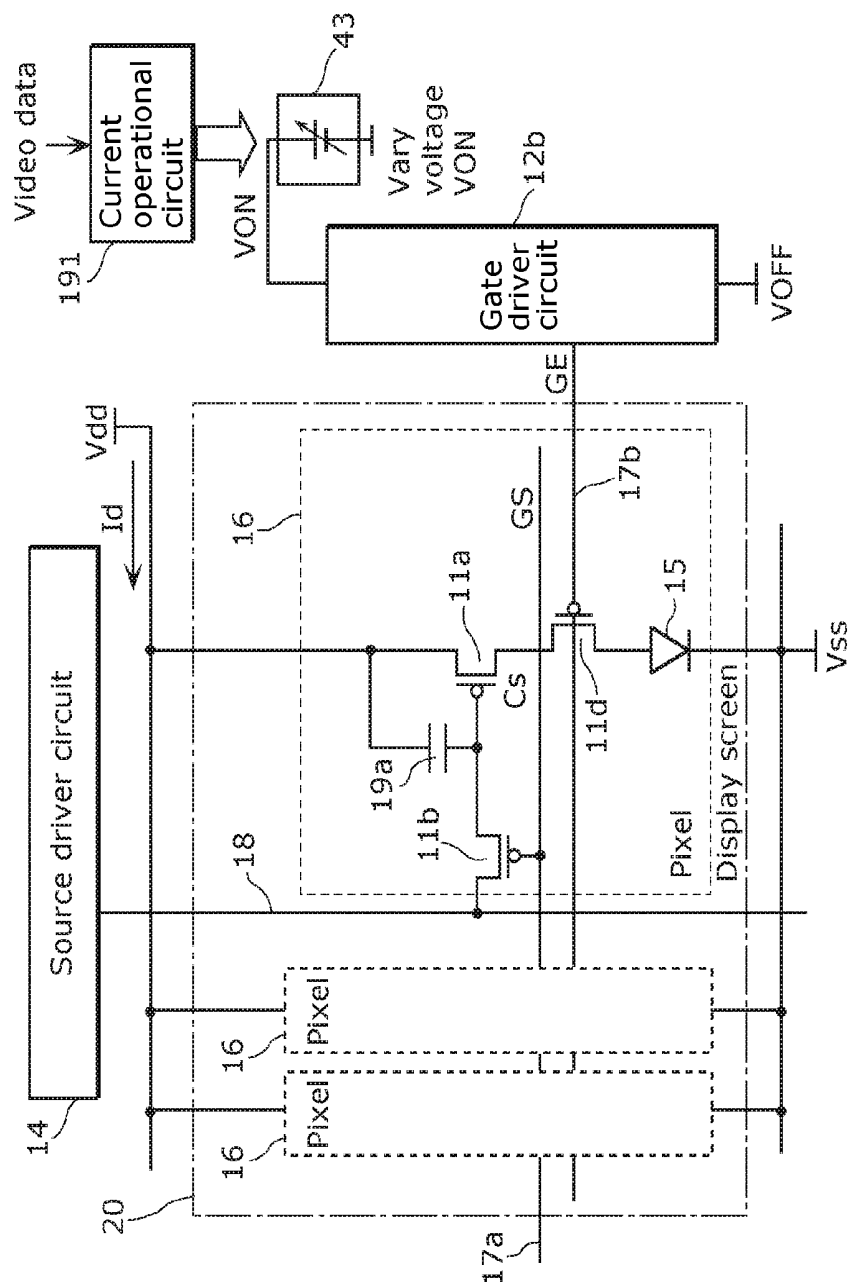


FIG. 18

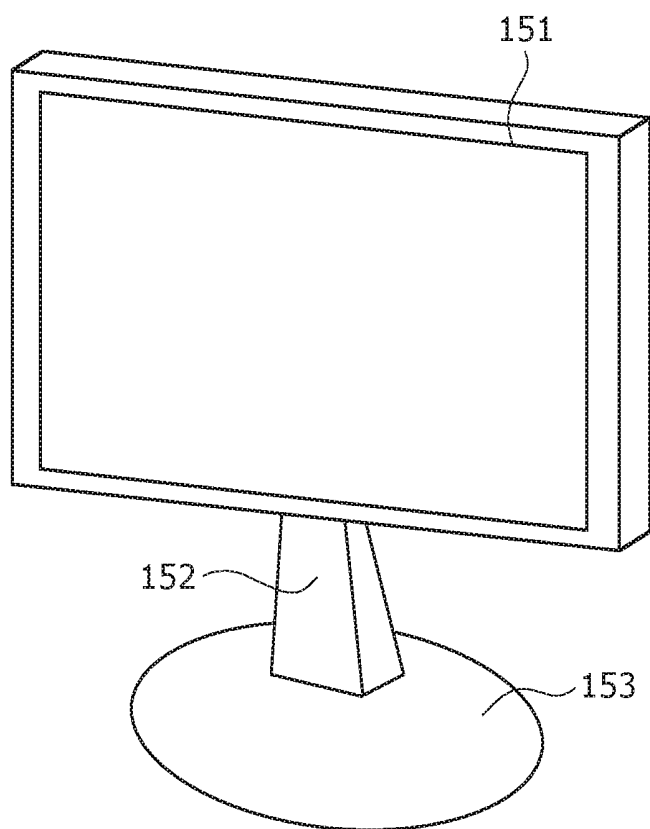


FIG. 19


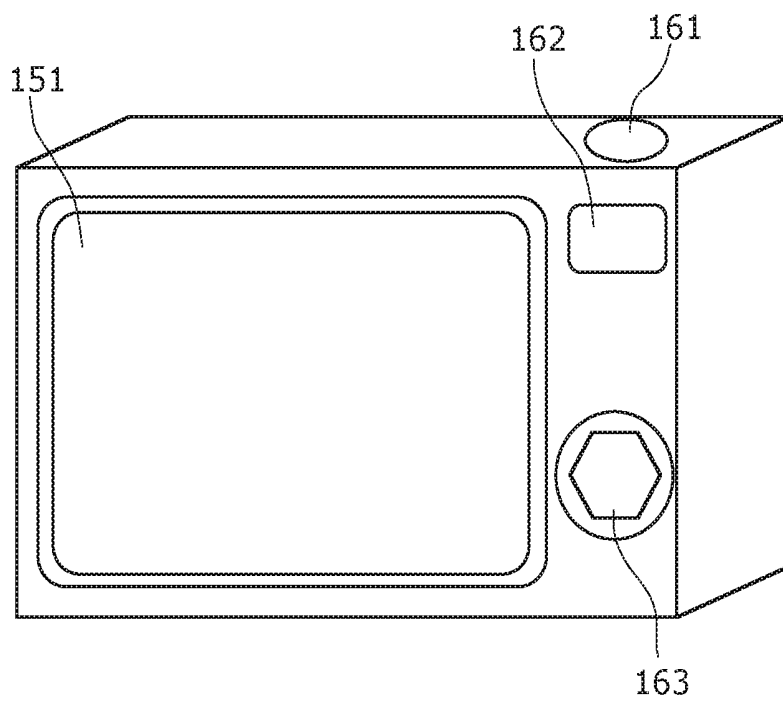


FIG. 20

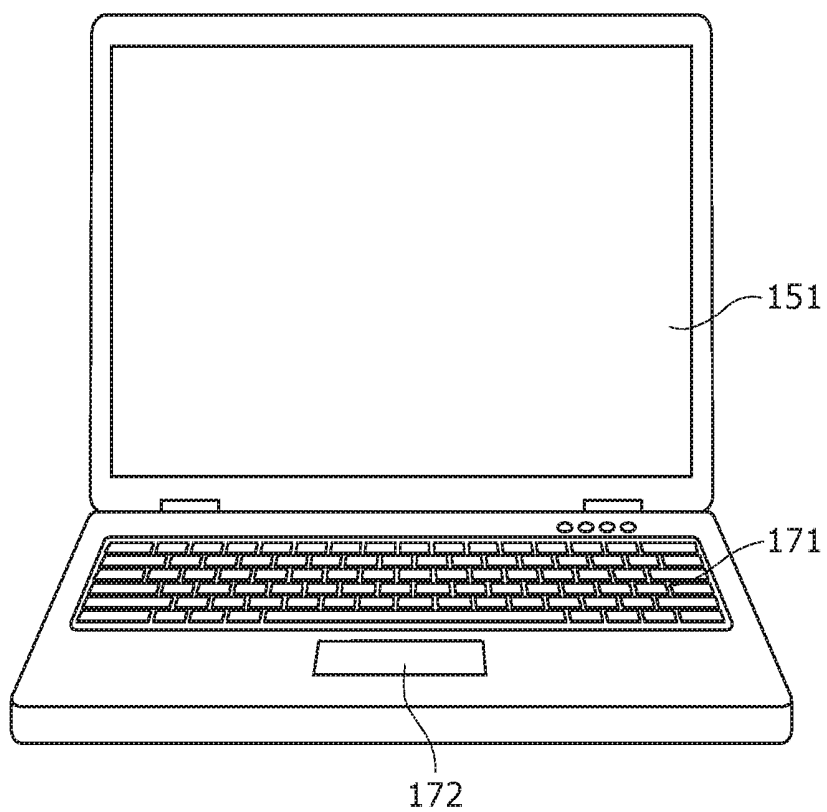

EL DISPLAY DEVICE AND METHOD FOR DRIVING EL DISPLAY DEVICE

TECHNICAL FIELD

[0001] The present disclosure relates to a video display method and a display device for displaying TV images and the like on a display panel including, for example, organic electroluminescent elements (hereinafter, the organic electroluminescence may be referred to as EL or OLED). The present disclosure also relates to a video display system, a video display method, and a display device suitable for displaying stereoscopic images.

BACKGROUND ART

[0002] Patent Literature (PTL) 1 discloses an EL display device including EL elements. The EL display device controls a current flowing through each EL element by decreasing an on-resistance of a transistor to be written into a driving transistor. With this, display luminance and current consumption of the EL display device can be reduced.

CITATION LIST

Patent Literature

[PTL 1] Japanese Unexamined Patent Application Publication No. 2010-145446

SUMMARY OF INVENTION

Technical Problem

[0003] An object of the present disclosure is to provide an EL display device which can reduce degradation of EL elements resulting from an overheated display panel, and maintain an excellent display quality with less decrease in image quality.

Solution to Problem

[0004] An EL display device according to an aspect of the present disclosure includes: a display screen including a plurality of pixels arranged in rows and columns; a first gate signal line and a second gate signal line which are disposed for each of the rows of the plurality of pixels; a gate driver circuit which outputs a first control voltage to the first gate signal line and a second control voltage to the second gate signal line; a current generating circuit which supplies a current to the plurality of pixels of the display screen; a current amount obtaining circuit which obtains a magnitude of a current flowing through the plurality of pixels; and a control voltage generating circuit which generates the first control voltage output by the gate driver circuit to the first gate signal line. Each of the plurality of pixels includes: an EL element; a driving transistor which supplies a driving current to the EL element; a first switching transistor disposed in a path of the driving current, the first switching transistor having a voltage applied across a channel and adjusted based on the first control voltage supplied from the first gate signal line; and a second switching transistor which switches between a conducting state and a non-conducting state based on the second control voltage supplied from the second gate signal line, the second switching transistor applying a video signal to the driving transistor. The control

voltage generating circuit adjusts a magnitude of the first control voltage based on an output result from the current amount obtaining circuit.

Advantageous Effects of Invention

[0005] According to the present disclosure, it is possible to provide an EL display device which can reduce degradation of EL elements resulting from an overheated display panel, and maintain an excellent display quality with less decrease in image quality.

BRIEF DESCRIPTION OF DRAWINGS

[0006] FIG. 1 illustrates an EL display device according to a technique forming the basis of the present disclosure.

[0007] FIG. 2 illustrates a pixel configuration of an EL display device according to the present disclosure.

[0008] FIG. 3 illustrates a configuration of the EL display device according to the present disclosure.

[0009] FIG. 4 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0010] FIG. 5 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0011] FIG. 6 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0012] FIG. 7 illustrates a configuration of a gate driver IC (circuit) in the EL display device according to the present disclosure.

[0013] FIG. 8 illustrates a configuration of a switching circuit in the EL display device according to the present disclosure.

[0014] FIGS. 9(a) and (b) illustrate two-value voltage drive and three-value voltage drive in the case of an N-channel transistor.

[0015] FIGS. 10(a) and (b) illustrate two-value voltage drive and three-value voltage drive in the case of a P-channel transistor.

[0016] FIG. 11 illustrates the EL display device according to the present disclosure.

[0017] FIG. 12 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0018] FIG. 13 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0019] FIG. 14 illustrates a configuration of the EL display device according to the present disclosure.

[0020] FIG. 15 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0021] FIG. 16 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0022] FIG. 17 illustrates a pixel configuration in the EL display device according to the present disclosure.

[0023] FIG. 18 illustrates a display which employs the EL display device according to the present disclosure.

[0024] FIG. 19 illustrates a digital camera which employs the EL display device according to the present disclosure.

[0025] FIG. 20 illustrates a laptop personal computer which employs the EL display device according to the present disclosure.

DESCRIPTION OF EMBODIMENTS

[0026] Hereinafter, embodiments will be described in detail with reference to the drawings where necessary. Note, however, that excessively detailed descriptions may be omitted. For example, detailed descriptions of well-known

aspects or repetitive descriptions of substantially identical configurations may be omitted. This is to facilitate understanding by a person of ordinary skill in the art by avoiding unnecessary verbosity in the subsequent description.

[0027] (Underlying Knowledge Forming the Basis of the Present Disclosure)

[0028] Underlying knowledge forming the basis of the present disclosure is described below prior to describing details of the present disclosure.

[0029] An active-matrix (hereinafter, may be referred to as AM) organic EL display device including organic EL elements arranged in rows and columns has been employed as a display panel for, for example, a smart phone, and has been commercialized. Each EL element includes an EL layer between an anode electrode (terminal) and a cathode electrode (terminal). The EL element emits light in response to a current or a voltage supplied to the anode electrode (terminal) and the cathode electrode (terminal). Accordingly, the EL element has characteristics in which the display luminance is proportional to current consumption and an increase in display luminance increases the current consumption.

[0030] Accordingly, an increase in display luminance increases power consumption. An increase in power consumption causes the panel to generate heat, which results in degradation of the EL elements and the like.

[0031] In order to solve such a problem, a method is available which varies the power supply voltage of a driving transistor.

[0032] FIG. 1 illustrates an EL display device according to a technique forming the basis of the present disclosure.

[0033] FIG. 1 illustrates an example of a pixel circuit of an organic EL element.

[0034] A pixel circuit 16 includes, as a basic configuration, a light-emitting element (EL element) 15, a driving transistor 11a which drives the EL element 15, and a switching transistor 11b which applies a video signal to the driving transistor 11a. The drain side of the driving transistor 11a is connected to a voltage source Vdd (such as a power supply device) of the EL element 15. The Vdd is an anode voltage. The light emission luminance of the EL element 15 can be adjusted by causing the driving transistor 11a and the switching transistor 11b to control a current Id of the EL element 15.

[0035] There is a potential difference between the voltage source Vdd and the EL element 15 in the pixel circuit in FIG. 1 (the potential difference Vdd across a channel of the driving transistor 11a). Hence, heat is generated in the driving transistor 11a due to power loss which corresponds to $\text{power} = \text{current (Id)} \times \text{voltage (Vdd - a potential difference across the EL element - Vss)}$. This rapidly degrades the characteristics of the EL element 15 adjacent to the driving transistor 11a.

[0036] In order to reduce heat generation of the driving transistor 11a, power loss may be reduced by detecting a current Id flowing through the EL element 15, varying the voltage of the voltage source Vdd, and decreasing the current Id. However, this causes a problem of degrading the display quality (uneven luminance and flicker) due to uneven characteristics of the driving transistors 11a which drive the EL elements 15. Moreover, although the on-resistance of the transistor which writes a signal to the driving transistor 11a may be varied, the rate of variation is so small and produces little effect.

[0037] Hereinafter, a pixel circuit and a display panel which can reduce degradation of the EL characteristics and achieve a high display quality will be described. In the following description, the term transistors 11 refers to the driving transistor 11a, and switching transistors 11b, 11c, and 11d.

Embodiment 1

[0038] Hereinafter, an EL display device according to Embodiment 1 will be described with reference to FIG. 2 to FIG. 12.

[0039] [1-1. Configuration of EL Display Device]

[0040] An EL display device according to the present disclosure has a feature in which the current of each EL element 15 is controlled by a control transistor (switching transistor 11d) different from the driving transistor 11a which applies a current to the EL element 15. The on-characteristics of the switching transistor 11d are controlled by varying the voltage applied to the gate of the switching transistor 11d, and the current of the EL element 15 is controlled via the driving transistor 11a. Accordingly, the EL driving current can be controlled without reducing the display quality due to uneven characteristics of the driving transistors 11a. Additionally, heat generation of the entire EL pixel circuit can be reduced, which can prevent the characteristics of the EL element from degrading due to the heat generation.

[0041] In the present disclosure, the drawings include omitted, magnified or reduced portions to facilitate understanding or creation of the drawings.

[0042] The matters and content illustrated in the drawings or described in this embodiment of the Description according to the present disclosure are also applicable to other embodiments. The EL display panel illustrated in the drawings or described in this embodiment disclosed herein is applicable to EL display devices according to the present disclosure.

[0043] For example, of course, as an EL display device 151 of a laptop personal computer in FIG. 20 to be described later, one of the EL display devices (EL display panels) illustrated in the drawings or described in this embodiment of the present disclosure can be employed or employed to form an information apparatus.

[0044] Parts assigned with the same numbers or symbols have identical or similar forms, materials, functions or operations, relevant matters, perform identical or similar actions, or provide identical or similar effects.

[0045] The details illustrated in the drawings etc. can be combined with other embodiments etc. even when no such indication is provided. For example, it is possible to form an information display device illustrated in FIG. 18, FIG. 19, or FIG. 20 to be described later, by adding a touch panel etc. to the EL display panel illustrated in FIG. 2 according to the present disclosure.

[0046] The EL display device according to the present disclosure may conceptually include system apparatuses such as information apparatuses. The EL display panels may conceptually include system apparatuses such as information apparatuses in a broad sense.

[0047] Although the driving transistors and the switching transistors are described as thin-film transistors in the present disclosure, the driving transistors and the switching transistors according to the present disclosure are not limited

to the thin-film transistors. Thin-film diodes (TFD), ring diodes and the like can be used to form the same.

[0048] The driving transistors and the switching transistors are not limited to such thin-film elements, but also may be transistors formed on a silicon wafer. For example, a transistor may be firstly formed using a silicon wafer, and removed and transferred onto a glass board. Moreover, for example, a display panel on which a transistor chip formed using a silicon wafer is mounted by bonding on a glass substrate is exemplified.

[0049] As a matter of course, the transistors according to the present disclosure may be field effect transistors (FETs), metal-oxide-semiconductor (MOS) FET, MOS transistors, or bi-polar transistors. Those transistors are also basically thin-film transistors. Additionally, the transistors may be, of course, varistors, thyristors, ring diodes, photodiodes, photo transistors, PLZT elements, etc.

[0050] It is preferable that the transistors according to the present disclosure include a lightly doped drain (LDD) structure, irrespective of whether each transistor is an N-channel transistor or a P-channel transistor.

[0051] Furthermore, the transistors may be any one of those formed using: high-temperature polycrystalline silicon (HTPS); low-temperature polycrystalline silicon (LTPS); continuous grain silicon (CGS); transparent amorphous oxide semiconductors (TAOS, IZO); amorphous silicon (AS); and infrared rapid thermal annealing (RTA).

[0052] In FIG. 2, transistors (the driving transistor 11a and the switching transistors 11b and 11d) included in the pixel 16 are all P-channel transistors. However, in the present disclosure, the transistors (the driving transistor 11a and the switching transistors 11b and 11d) in the pixel 16 are not limited to the P-channel transistors. The transistors may include only N-channel transistors or each may include both the N-channel and P-channel transistors. Moreover, the driving transistor 11a may include both the P-channel and N-channel transistors.

[0053] The switching transistors 11b and 11d are not limited to transistors, but may be analog switches each including both the P-channel and N-channel transistors, for example.

[0054] It is preferable that the transistors each have a top gate structure. This is because the top gate structure decreases parasitic capacitance, and a gate electrode pattern of the top gate functions as a light shielding layer to shield light emitted from the EL element 15, making it possible to reduce malfunction of the transistor or an off-leakage current.

[0055] It is preferable, in the process to be carried out, that a copper line or a copper alloy line can be employed as a line material for gate signal lines 17a and 17b or a source signal line 18, or for both the gate signal lines 17a and 17b and the source signal line 18. This is because it is possible to decrease wiring resistance of signal lines (the gate signal lines 17a and 17b or the source signal line 18) and a larger EL display panel can be implemented.

[0056] It is preferable that the gate signal lines 17a and 17b which are driven (controlled) by gate driver ICs (gate driver circuits) 12 (12a and 12b) have low impedance. Accordingly, it is also preferable that the compositions or structures of the gate signal lines 17a and 17b have low impedance.

[0057] In particular, it is preferable that LTPS is employed. The LTPS can be used to form transistors having

a top gate structure and a small parasitic capacitance and of N channel and P channel. The copper line or the copper alloy line process can be employed in processes. It is preferable that a three-layer structure of Ti—Cu—Ti is employed for the copper line.

[0058] For the lines, it is preferable that a three-layer structure of Mo (molybdenum)-Cu—Mo is employed in the case of transparent amorphous oxide semiconductors (TAOS).

[0059] FIG. 2 and FIG. 3 each illustrate a pixel configuration of an EL display apparatus according to the present disclosure. The EL display device according to Embodiment 1 includes a display screen 20 including a plurality of EL elements 15. As peripheral circuits of the display screen 20, the EL display device includes: a gate driver IC (circuit) 12a which drives the gate signal lines 17a; a gate driver IC (circuit) 12b which drives the gate signal lines 17b; a source driver IC (circuit) 14 which generates and outputs a video signal; and a control circuit 70 (see FIG. 6) which controls the gate driver ICs (circuits) 12a and 12b, the source driver IC (circuit) 14 and the like.

[0060] Each gate signal line 17a is referred to as a gate signal line GS, and each gate signal line 17b is referred to as a gate signal line GE. The switching transistor 11b has a gate terminal connected to the gate signal line 17a. The switching transistor 11d has a gate terminal connected to the gate signal line 17b.

[0061] As FIG. 3 illustrates, the display screen 20 includes the EL elements 15 arranged in a matrix. The display screen 20 displays an image based on a video signal externally input to the EL display device.

[0062] The transistors included in the pixel 16 are P-channel transistors. The driving transistor 11a generates a current to be supplied to the EL element 15. The switching transistor 11b applies, to the driving transistor 11a of the pixel 16, a video signal generated by the source driver IC (circuit) 14 and applied to the source signal line 18.

[0063] The switching transistor 11d is disposed or formed in the path of the line through which a driving current to the EL element 15 flows. The path refers a path through which a driving current flows. The switching transistor 11d may be positioned anywhere between an anode Vdd terminal and a cathode Vss terminal. Turning on the switching transistor 11d causes the current from the driving transistor 11a to be supplied to the EL element 15. The EL element 15 emits light in proportional to the current supplied to the EL element 15. Turning off the switching transistor 11d stops the supply of the current to the EL element 15, thereby stopping the light emission of the EL element 15.

[0064] A capacitor 19a includes an electrode serving as a first electrode connected to the gate terminal of the driving transistor 11a, and a second electrode connected to the source terminal of the driving transistor 11a.

[0065] The capacitor 19a holds a voltage corresponding to the signal voltage supplied from the source signal line 18. For example, after the switching transistor 11b is turned off, the capacitor 19a stably holds the potential between the gate and source electrodes of the driving transistor 11a, and stabilizes the current supplied to the EL element 15 from the driving transistor 11a.

[0066] In Embodiment 1 of the present disclosure, the switching transistor 11d is used in a linear region, and is also used in a non-linear region. Switching between the linear

region and the non-linear region is controlled by a gate voltage applied to the gate terminal of the switching transistor **11d**.

[0067] The EL element **15**, the driving transistor **11a**, and the switching transistor **11d** are disposed between the anode electrode (terminal or line) and the cathode electrode (terminal or line). The EL element **15**, the driving transistor **11a**, and the switching transistor **11d** are connected in series.

[0068] Increasing the on-voltage applied to the gate terminal of the switching transistor **11d** causes the switching transistor **11d** to be in an on state at a high level and to operate in a saturated region. The voltage across the channel (between the source and the drain) of the switching transistor **11d** decreases. Accordingly, a sufficient voltage is applied to the EL element **15** and across the channel of the driving transistor **11a**. Hence, a constant current from the driving transistor **11a** is supplied to the EL element **15**.

[0069] Decreasing the on-voltage applied to the gate terminal of the switching transistor **11d** increases the on-resistance across the channel of the switching transistor **11d** (the switching transistor **11d** operates in a linear region). An increase in the on-resistance across the channel (between the source and the drain) of the switching transistor **11d** increases the voltage across the channel of the switching transistor **11d**. Accordingly, a voltage is unlikely to be applied across the channel of the driving transistor **11a** and to the EL element **15**. Hence, a current supplied to the EL element **15** by the driving transistor **11a** is decreased.

[0070] As described above, according to the present disclosure, when a current supplied to the EL element **15** is to be decreased, the on-voltage applied to the gate terminal of the switching transistor **11d** is decreased, and the resistance across the channel of the switching transistor **11d** is increased.

[0071] The gate driver ICs (circuits) **12a** and **12b** each include a plurality of scanning and output buffer circuit **121a**, **121b**, and **121c** (see FIG. 7). The gate driver IC (circuit) **12a** is connected to each gate signal line **17a**, and the gate driver IC (circuit) **12b** is connected to each gate signal line **17b**. The gate driver ICs (circuits) **12a** and **12b** are driving circuits which have functions of controlling conduction (on) and non-conduction (off) of the switching transistors **11b** and **11d** of the pixel **16** by outputting selection signals to the gate signal lines **17a** and **17b**, respectively.

[0072] In the EL display device according to the present disclosure, the gate driver TCs (circuits) **12a** and **12b** are respectively disposed on the left and right sides of the display screen **20**. At least the gate signal lines **17** of each pixel **16** are connected to the gate driver IC (circuit) **12a** or the gate driver IC (circuit) **12b**. In FIG. 2 and FIG. 3, the gate signal line **17a** (gate signal line GS) is connected to the gate driver IC (circuit) **12a**, and is connected to the gate terminal of the switching transistor **11b**. The gate signal line **17b** (gate signal line GE) is connected to the gate driver IC (circuit) **12b**, and is connected to the gate terminal of the switching transistor **11d**.

[0073] The EL display device according to one aspect of the present disclosure includes: a display screen including a plurality of pixels arranged in rows and columns; the gate signal lines **17** (the gate signal lines **17a** and **17b**) disposed for each pixel row of the display screen; the source signal line **18** disposed for each pixel column of the display screen; the gate driver circuits (gate driver ICs) **12a** and **12b** which

respectively drive the gate signal lines **17a** and **17b**; and the source driver IC (source driver circuit) **14** which drives the source signal lines **18**.

[0074] The gate driver ICs (circuits) **12a** and **12b** output selection signals having a first pulse and a second pulse. The source driver IC (circuit) **14** outputs or generates a video signal corresponding to an input image.

[0075] In the EL elements **15**, non-light emitting state sequentially starts on a per-row basis of the EL elements **15** based on the first pulse of the selection signals input via the gate signal lines **17a** and **17b**. Based on the second pulse of the selection signals, a video signal (light emission data) is written from the source signal line **18**. The video signal is held in the capacitor **19a** of the pixel **16**. The driving transistor **11a** generates a light emission current (EL current) I_d based on the video signal held in the capacitor **19a**. The light emission current I_d is supplied to the EL element **15** by the switching transistor **11d** being turned on by the first pulse.

[0076] The driving circuit unit supplies the selection signal and the video signal to the gate signal lines **17a** and **17b** and the source signal line **18** such that writing of light emission data to the first row of the EL elements **15** starts before the non-light emitting state in the last row of the EL elements **15** starts and writing of the light emission data into the last row of the EL elements **15** ends after the light-emitting state starts in the first row of the EL elements **15**.

[0077] As described above, the EL display device according to Embodiment 1 is capable of performing current control on the EL element **15** using a control transistor (the switching transistor **11d**) different from the driving transistor **11a** which applies a current to the EL element **15**. The on-characteristics of the switching transistor **11d** are controlled by varying the voltage applied to the gate of the switching transistor **11d**, and the current of the EL element **15** is controlled via the driving transistor **11a**. Accordingly, the EL driving current can be controlled without reducing the display quality resulting from uneven characteristics of the driving transistors **11a**. Additionally, heat generation of the entire EL pixel circuit can be reduced, and degradation of the characteristics of the EL elements resulting from the heat generation can be prevented.

[0078] [1-2. Operation of EL Display Device]

[0079] Next, an operation (a driving method) of the EL display device according to Embodiment 1 will be described.

[0080] FIG. 4 illustrates a pixel configuration of the EL display device according to Embodiment 1.

[0081] In the present disclosure, as FIG. 4 illustrates, a magnitude of a current flowing through the display screen **20** is detected by a current detecting circuit **41**. The current detecting circuit **41** detects the magnitude of at least one of (i) a current flowing through the anode V_{dd} and (ii) a current flowing through the cathode V_{ss} . The current detecting circuit **41** may detect not only the magnitude of the current but also a variation in the magnitude of the current or the variation rate. In FIG. 4, the current detecting circuit **41** is disposed in the anode line or terminal. The current detecting circuit **41** corresponds to the current amount obtaining circuit according to the present disclosure.

[0082] In FIG. 4, an on-voltage generating circuit **43** has at least one of (i) a function of generating an on-voltage (V_{on}) and (ii) a function of varying the on-voltage. The

on-voltage generating circuit 43 corresponds to a control voltage generating circuit according to the present disclosure.

[0083] The on-voltage (V_{on}) is supplied to the gate driver IC (circuit) 12b, and the on-voltage is output to the gate signal line 17b (gate signal line GE).

[0084] In FIG. 4, the switching transistor 11d is a P-channel transistor. Accordingly, the on-voltage is a negative voltage. An off-voltage is a positive voltage.

[0085] The EL element 15, the driving transistor 11a, and the switching transistor 11d are disposed between the anode electrode (terminal or line) and the cathode electrode (terminal or line). The EL element 15, the driving transistor 11a, and the switching transistor 11d are connected in series.

[0086] The switching transistor 11d operates in a saturated region when the switching transistor 11d is in an on state at a high level. The voltage across the channel (between the source and the drain) of the switching transistor 11d decreases. Accordingly, a sufficient voltage is applied to the EL element 15 and across the channel of the driving transistor 11a. Hence, a constant current from the driving transistor 11a is supplied to the EL element 15.

[0087] A decrease in the on-voltage applied to the gate terminal of the switching transistor 11d increases the on-resistance across the channel (between the source and the drain) of the switching transistor 11d (the switching transistor 11d operates in a linear region). An increase in the on-resistance across the channel of the switching transistor 11d increases the voltage across the channel of the switching transistor 11d. Accordingly, a voltage is unlikely to be applied to the EL element 15 and across the channel of the driving transistor 11a. Hence, a current supplied to the EL element 15 by the driving transistor 11a is decreased.

[0088] With a decrease in the on-voltage applied to the gate terminal of the switching transistor 11d, the voltage V_d across the channel of the switching transistor 11d decreases. Accordingly, a sufficient voltage is applied to the EL element 15 and across the channel of the driving transistor 11a, which facilitates the flow of the current to the EL element 15.

[0089] With an increase in the on-voltage, the voltage V_d across the channel of the switching transistor 11d increases. Accordingly, a voltage is unlikely to be applied across the channel of the driving transistor 11a, and the voltage V_e is unlikely to be applied to the EL element 15. This makes a current to be unlikely to flow into the EL element (a current flow to the EL element is decreased). A decrease in the current flowing through the EL element 15 leads to less power consumed by the display screen. Additionally, since less heat is generated by the display screen, degradation of the EL elements 15 and the transistors 11 is reduced.

[0090] As described above, the voltage V_d across the channel of the switching transistor 11d can be varied by varying or adjusting the on-voltage applied to the gate terminal of the switching transistor 11d.

[0091] The anode terminal voltage and the cathode terminal voltage can be divided into the voltage V_a across the channel of the driving transistor 11a, the voltage V_d across the channel of the switching transistor 11d, and the voltage V_e across the terminals of the EL element 15.

[0092] Varying the on-voltage of the gate signal line 17b varies the voltage V_d across the channel of the switching transistor 11d. Since the cathode voltage V_{ss} and the anode voltage V_{dd} each are a constant voltage, a variation in the

V_d varies the voltage V_a across the channel of the driving transistor 11a and the voltage V_e across the terminals of the EL element 15. Accordingly, varying the voltage V_d can vary the current flowing through the EL element 15. A variation in the current of the EL element 15 leads to a variation in the current flowing through the display screen 20. Accordingly, the current flowing through the display screen 20 can be varied by varying the on-voltage.

[0093] The characteristics of the driving transistors 11a vary due to problems in manufacturing processes or the like. Likewise, the characteristics of the EL elements 15 vary due to problems in manufacturing processes or the like. The variations in the characteristics of the driving transistors 11a and the EL elements 15 cause, for example, stripe unevenness on the display screen 20, leading to a reduction in the display quality.

[0094] As a conventional method for decreasing a current flowing through the display screen 20, the anode voltage or the cathode voltage may be varied. For example, in order to decrease a current flowing through the display screen 20, it is sufficient that the anode voltage V_{dd} is decreased. A decrease in the anode voltage V_{dd} can decrease the current flowing through the display screen 20. However, since the anode voltage V_{dd} is a common voltage in the display screen 20, the decrease in the anode voltage V_{dd} is directly reflected on the variations in the characteristics of the EL elements 15 and the driving transistors 11a. Hence, stripe unevenness is displayed. This leads to a reduction in the display quality. Varying the anode voltage V_{dd} or the cathode voltage V_{ss} which are common in the display screen 20 also varies the brightness of the display screen. Accordingly, flicker is caused on the display screen 20 based on the variation in the voltage V_{dd} or the variation in the voltage V_{ss} .

[0095] In the present disclosure, the voltage V_d across the channel of the switching transistor 11d is varied by varying the on-voltage applied to the gate terminal of the switching transistor 11d disposed in the current path of the driving transistor 11a.

[0096] The variation in the V_d is divided appropriately, based on the characteristics of the driving transistor 11a and the EL element 15, into the voltage V_a across the channel of the driving transistor 11a and the voltage V_e across the terminals of the EL element 15. The voltage division is carried out according to the variations in the characteristics of the driving transistors 11a and the EL elements 15. The characteristics of the driving transistors 11a and the EL elements 15 vary in a certain degree within the display screen 20. Accordingly, even if the on-voltage of the switching transistor 11d is varied, stripe unevenness and the like resulting from the characteristics of the transistors and the like occur dispersedly across the display screen 20, or the occurrence is reduced. Hence, as in the case where the anode voltage V_{dd} or the cathode voltage V_{ss} which are common in the display screen 20 is decreased (varied), occurrence of stripe unevenness is reduced and flicker is also not caused.

[0097] In the present disclosure, as FIG. 4 illustrates, the current detecting circuit (unit) 41 detects the current I_d flowing through the display screen 20 and the on-voltage generated by the on-voltage generating circuit 43 is varied based on the magnitude of the detected current or the variation rate of the current. The variation in the on-voltage varies the current flowing through the display screen 20.

[0098] In the present disclosure, for example, the current detecting circuit 41 detects when the current flowing through the display screen 20 increases or when the current flowing through the display screen 20 exceeds a predetermined value, and the on-voltage generating circuit 43 is controlled based on the detected or measured current or the data proportional to the current. The on-voltage generating circuit 43 varies the on-voltage applied to the gate terminal of the switching transistor 11d so as to increase the voltage Vd across the channel of the switching transistor 11d (so as to increase the on-resistance of the switching transistor 11d). As a result, the current flowing through the EL element 15 is decreased.

[0099] In the present disclosure, the current detecting circuit 41 detects, for example, when the current flowing through the display screen 20 decreases or when the current flowing through the display screen 20 becomes below a predetermined value, and the on-voltage generating circuit 43 is controlled based on the detected or measured current or the data proportional to the current. The on-voltage generating circuit 43 varies the on-voltage applied to the gate terminal of the switching transistor 11d so as to decrease the voltage Vd across the channel of the switching transistor 11d (so as to decrease the on-resistance of the switching transistor 11d). As a result, control is performed such that the current flowing through the EL element 15 increases and light emission is provided with higher peak luminance.

[0100] FIG. 5 illustrates a configuration of the EL display device according to Embodiment 1 with more detailed current detecting circuit 41.

[0101] The gate driver circuit (IC) 12b (see FIG. 5) outputs voltages Von, Voff1, and Voff2 (see FIG. 9). The on-voltage generating circuit 43 includes a feedback (FB) control line 70a for on-voltage adjustment (see FIG. 5). The on-characteristics (the on-resistance and the voltage Vd across the channel) of the control transistor (switching transistor) 11d of the gate driver IC (circuit) 12b can be varied by varying the voltage of the on-voltage generating circuit 43 serving as the on-voltage of the control transistor (switching transistor) 11d using the FB control line 70a.

[0102] In other words, when the on-voltage serving as a power supply voltage applied to the gate driver IC (circuit) 12b is increased, the gate driver IC (circuit) 12b outputs an on-voltage to the gate signal line 17. This also increases the on-voltage. Accordingly, the on-voltage applied to the gate terminal of the switching transistor 11d also increases. Additionally, the on-voltage serving as a power supply voltage applied to the gate driver IC (circuit) 12b also decreases. Accordingly, the on-voltage output by the gate driver IC (circuit) 12b to the gate signal line 17b also decreases. As described above, the on-voltage applied to the gate terminal of the switching transistor 11d can be, for example, varied by adjusting, varying, setting or the like the on-voltage serving as a power supply voltage of the gate driver IC (circuit) 12b. Accordingly, it is possible to perform current control on the EL element 15.

[0103] When the switching transistor (control transistor) 11d is an n-type transistor, an increase in the on-voltage of the switching transistor 11d decreases the on-resistance of the switching transistor 11d, and the value of current flowing through the EL element 15 increases.

[0104] On the other hand, a decrease in the on-voltage of the switching transistor 11d increases the on-resistance of

the switching transistor 11d, and the value of current flowing through the EL element 15 decreases. When the switching transistor 11d is a p-type transistor, of course, the switching transistor 11d operates in a manner reverse to that of an n-type transistor.

[0105] With this, the current of the EL element 15 can be controlled by an increase or a decrease (levels) of the on-voltage of the switching transistor 11d and the like. This allows the current detecting circuit 41 to detect the current value Id of the voltage source Vdd (for example, a power supply) of the EL element 15. By providing feedback to the on-voltage, the EL element current of the entire panel can be controlled.

[0106] With the above-described current control of the EL element, a voltage is divided appropriately between the switching transistor 11d, the driving transistor 11a and the EL element 15 which are present between the voltage source Vdd of the anode side of the EL element 15 and the voltage source Vss of the cathode side of the EL element 15. Accordingly, the variations in the characteristics of the driving transistors 11a and the EL elements 15 are not displayed on the display screen 20. Flicker is not caused on the display screen 20 unlike the case where the anode voltage Vdd is varied.

[0107] The display screen 20 includes the current detecting circuit 41 (see FIG. 5). The current detecting circuit 41 is connected in series to the path of the panel current (EL element current) Id which corresponds to a sum of the current flowing through the EL elements 15 within the display screen 20. The current detecting circuit 41 is connected to the on-voltage generating circuit 43 so as to control the Von which is the on-voltage of the switching transistor 11d.

[0108] As FIG. 5 illustrates, the current detecting circuit 41 is disposed between the voltage source Vdd and the switching transistor 11d. The current detecting circuit 41 includes: a current detecting resistor 41d; and a differential amplifier 41c (see FIG. 6) for detecting the voltage generated across the current detecting resistor 41d due to the EL element current Id. The differential amplifier 41c generates a voltage value obtained by amplifying the EL element current Id by a given amount according to the current Id. The switching element (transistor) 41b and an amplifier 41a adjust the level of the voltage generated by the differential amplifier 41c so as to match the FB control line 70a of the on-voltage generating circuit 43 in a subsequent stage.

[0109] An increase in the EL element current Id increases the output voltage of the amplifier 41a, and a decrease in the EL element current Id decreases the output voltage of the amplifier 41a.

[0110] The amplifier 41a is connected to a feedback circuit (the FB control line 70a) of the on-voltage generating circuit 43, and adjusts the on-voltage of the on-voltage generating circuit 43 such that the EL element current Id does not exceed a given value.

[0111] When the FB control line 70a of the on-voltage generating circuit 43 has negative feedback characteristics, an increase in the FB control line voltage decreases the output voltage of the on-voltage generating circuit 43, and a decrease in the FB control line voltage increases the output voltage of the on-voltage generating circuit 43. In the connection state of the amplifier 41a and the FB control line 70a, when the EL element current Id is low, the FB control line voltage is also low. This increases the on-voltage of the

on-voltage generating circuit 43, causing withstand voltage breakdown of the gate driver IC (circuit) 12b and the pixel 16. In order to prevent this from happening, as FIG. 6 illustrates, constant voltage constant current (CVCC) control is performed by disposing a combining circuit 70b which combines the output voltage of the amplifier 41a of the current detecting circuit 41 and the output voltage (Von) of the on-voltage generating circuit 43 immediately prior to the FB control line 70a. FIG. 6 illustrates a pixel configuration of the EL display device according to the present disclosure. When the switching transistor 11d is an n-type switching transistor, an increase in the EL element current Id increases the voltage of the FB control line 70a, and a decrease in the on-voltage increases the on-resistance of the switching transistor 11d. This decreases the value of the current flowing through the EL element 15. When the switching transistor 11d is a p-type switching transistor, the switching transistor 11d performs operations reverse to those of the n-type transistor in the above circuit. Hence, the current of the EL element 15 becomes an overcurrent. However, making the switching element (transistor) 41b have a phase inversion structure solves the overcurrent.

[0112] Here, the term “phase inversion” refers to that the connection of a resistor 41e disposed between the positive terminal of the amplifier 41a and the emitter of the switching element (transistor) 41b is changed to a connection between the positive terminal of the amplifier 41a and the collector of the switching element (transistor) 41b (not illustrated).

[0113] The above operation allows the entire EL element current within the display screen to be controlled, achieving an object of the present disclosure, which is to reduce degradation of the EL characteristics and to provide a high display quality.

[0114] In Embodiment 1, the current Id flowing through the entire display screen 20 is detected by the current detecting circuit 41; however, the present disclosure is not limited to the example. For example, it may be that the display screen 20 is divided into a plurality of sections (for example, the display screen is divided into a plurality of sets of pixel rows), the current detecting circuit 41 is disposed for each divided section of the display screen 20, the magnitude of the flowing current or the amount of variation in the current is detected, and the on-voltage of each switching transistor 11d in each divided section is varied or adjusted based on the detected current.

[0115] Moreover, the present disclosure is not limited to the example where the current detecting circuit 41 is disposed for each divided section of the display screen 20. For example, it may also be that the magnitude of the flowing current or an amount of variation in the current is detected for each pixel row, and the on-voltage of each switching transistor 11d for each pixel row is varied or adjusted based on the detected current.

[0116] It may also be that, for example, for each pixel 16, the magnitude of the flowing current or the amount of variation in the current is detected, and the on-voltage of the switching transistor 11d in the pixel 16 is varied or adjusted based on the detected current.

[0117] As illustrated in FIG. 9 to be described later, the gate driver ICs (circuits) 12a and 12b can output three voltages (Von, Voff1, and Voff2) from output terminals 123. The gate driver ICs (circuits) 12a and 12b have a mode where two voltages (Von and Voff1) are output (two-value drive of gate voltages) and a mode where three voltages

(Von, Voff1, and Voff2) are output (three-value drive of gate voltages). The modes can be set by selection signal lines (SEL terminals) (see FIG. 7). FIG. 7 illustrates a configuration of a gate driver IC (circuit) and FIG. 8 illustrates a pixel configuration of the EL display device according to the present disclosure. The setting by the SEL terminals can be performed for respective scanning and output buffer circuits 121a, 121b, 121c, and 121d formed or disposed in the gate driver IC (circuit) 12a or 12b.

[0118] FIG. 9 illustrates two-value voltage drive and three-value voltage drive in the case of the N-channel transistors. FIG. 10 illustrates the two-value voltage drive and three-value voltage drive in the case of the P-channel transistors.

[0119] The gate driver ICs (circuits) 12a and 12b can output the output waveforms illustrated in (b) of FIG. 9 from the output terminals 123. The output voltage includes three voltages of off-voltages (Voff1 and Voff2) and an on-voltage (Von). Since the three voltages are output, the drive is referred to as the three-value drive of gate voltages or as a gate over drive.

[0120] A driving method using two voltages of an off-voltage (Voff1) and an on-voltage (Von) is referred to as a normal drive of gate voltages or a two-value drive of gate voltages (see (a) of FIG. 9).

[0121] In the three-value drive of gate voltages, as (b) of FIG. 9 illustrates, the Von is applied to a selected gate signal line 17a (or 17b), and the voltage Voff2 is applied to the selected gate signal line 17a (or 17b) in the next pixel row selecting period. Moreover, in the pixel row selecting period after the above pixel row selecting period, the voltage Voff1 is applied. The voltage Voff2 is lower than the voltage Voff1. Accordingly, the potential difference between the voltage Von and the voltage Voff2 is greater than the potential difference between the voltage Von and the voltage Voff1. The switching transistor 11b of the pixel 16 is turned off upon application of the voltage Voff1.

[0122] In the two-value drive of gate voltages, time t1 is required for the voltage Von to reach Voff1. In the three-value drive of gate voltages, when the voltage Von is varied to the voltage Voff2, time t2 ($t_2 < t_1$) is required for the voltage Von to reach the voltage Voff1. Accordingly, since the time taken for the voltage Von to reach the voltage Voff1 in the three-value drive of gate voltages is time t2, the switching transistor 11b of the pixel 16 is turned into an off state rapidly. For this reason, in the three-value drive of gate voltages, crosstalk between pixel rows does not occur.

[0123] The two-value drive of gate voltages and three-value drive of gate voltages are determined by a logic voltage applied to the SEL (SEL1 to SEL4) terminals in FIG. 7.

[0124] The on-voltage is a voltage for turning on the transistors 11 of the pixel 16. The voltages Voff1 and Voff2 are voltages for turning off the transistors 11 of the pixel 16.

[0125] The voltage Voff2 is used in order to rapidly stop selecting (turning off) pixels selected for being applied with a video signal, after writing the video signal thereto. The voltage Voff1 is used in order to reduce a variation in the transistor characteristics such as Vt shift resulting from an application of a deep voltage (Voff2) to the gate terminals of the transistors 11.

[0126] The two-value drive of gate voltages and the three-value drive of gate voltages are set by a logic voltage applied to the SEL (SEL1 and SEL 2) terminals. When the logic

voltage applied to the SEL (SEL 1 to SEL 4) terminals illustrated in FIG. 7 is “L”, the mode is set to the two-value drive of gate voltages. When the logic voltage applied to the SEL (SEL 1 to SEL 4) terminals is “H”, the mode is set to the three-value drive of gate voltages.

[0127] The SEL (SEL1 to SEL 4) terminals are respectively connected to the scanning and output buffer circuits 121a to 121d. The outputs of the scanning and output buffer circuits 121 are set to the two-value drive of gate voltages or the three-value drive of gate voltages by the logic voltage of the SEL terminals.

[0128] In the EL display device according to Embodiment 1 illustrated in FIG. 7, the data input terminals (D1, D2, D3, and D4) and clock input terminals (Clk1a, Clk1b, Clk1c, and Clk1d) of the respective scanning and output buffer circuits 121 can be independently set.

[0129] Switching between the on-voltage, the voltage Voff1, and the voltage Voff2 is performed by switching circuits 131 as illustrated in FIG. 8. FIG. 8 illustrates a configuration of the switching circuits of the EL display device according to the present disclosure. One of terminal a (the voltage Voff2), terminal b (the voltage Voff1), and terminal c (the on-voltage) is selected by an input signal (2 bits) to terminal d of the switching circuit, and applied to the gate signal line 17.

[0130] FIG. 10 illustrates the two-value voltage drive and three-value voltage drive in the case of the P-channel transistors. As FIG. 10 illustrates, when the switching transistors 11b, 11c, and 11d are P-channel transistors, in the three-value drive of gate voltages and the two-value drive of gate voltages, the polarities of the on-voltage (Von) and the off-voltages (Voff1 and Voff2) are opposite to those of the on-voltage (Von) and the off-voltages (Voff1 and Voff2) illustrated in FIG. 9.

[0131] [1-3. Advantageous Effects Etc.]

[0132] As described above, the EL display device according to one aspect of the present disclosure is an active-matrix EL display device including pixels 16 arranged in rows and columns as illustrated in FIG. 2. The EL display device includes: a display screen including pixels arranged in rows and columns; a first gate signal line and a second gate signal line arranged for each pixel row; a gate driver circuit which outputs a control voltage to the first gate signal line and the second gate signal line; a current generating circuit which supplies a current to the EL elements of the display screen; a current detecting unit which obtains a magnitude of a current flowing through the pixels; and a control voltage generating circuit which generates a control voltage output to the first gate signal line by the gate driver circuit. Each of the pixels includes: a light-emitting element; a driving transistor which supplies a driving current to the light-emitting element; a first switching transistor which is disposed in a path of the driving current, and which switches between a conducting state and a non-conducting state based on the control voltage supplied from the first gate signal line; and a second switching transistor which switches between a conducting state and a non-conducting state based on the control voltage supplied from the second gate signal line, and which applies a video signal to the driving transistor. The control voltage is for turning the first switching transistor into a conducting state. The control voltage generating circuit varies the control voltage based on an output result from the current amount obtaining circuit.

[0133] When the current detected or obtained by the current detecting circuit is greater than a predetermined value, a control voltage applied to the first switching transistor is varied so as to increase the on-resistance of the first switching transistor. An increase in the on-resistance increases the voltage across the channel of the first switching transistor (voltage between the drain and source terminals), thereby decreasing a current flowing through the EL element of the pixel.

[0134] When the current detected or obtained by the current detecting circuit is less than a predetermined value, a control voltage applied to the first switching transistor is varied so as to decrease the on-resistance of the first switching transistor. A decrease in the on-resistance decreases the voltage across the channel of the first switching transistor (voltage between the drain and source terminals), thereby increasing a current flowing through the EL element of the pixel or facilitating a current flow of the EL element.

[0135] Moreover, varying the on-resistance of the first switching transistor disposed in the path of the driving current to the EL element allows the current flowing through the display screen to be controlled. Accordingly, an over-current flowing through the display screen can be decreased. The decrease is moderate, which prevents flicker from occurring. Moreover, the current flowing through the display screen is controlled by varying the voltage across the channel of the first switching transistor, and thus, the variations in the characteristics of the driving transistors and the EL elements of respective pixels are reduced. Accordingly, it can be reduced that variations in the characteristics of the driving transistors and the EL elements are visually seen, leading to a high-quality image display.

[0136] The current detecting circuit 41 of the EL display device described above includes a current detecting resistor which detects a panel current Id and a differential amplifier which detects a voltage across the current detecting resistor. The EL display device is of a high side type (see FIG. 5) where the current detecting circuit 41 is disposed between the voltage source Vdd and the switching transistor (control transistor) 11d. However, it may also be that the EL display device is of a low side type where the current detecting circuit 41 is disposed between the cathode side of the EL element and the voltage source Vss.

[0137] FIG. 11 illustrates a configuration of an EL display device including the current detecting circuit 41 which detects a cathode current.

[0138] As FIG. 11 illustrates, the current detecting circuit (unit) 41 detects the current Id flowing through the display screen 20 connected to the cathode side of the EL element 15, and varies the on-voltage generated by the on-voltage generating circuit 43, based on the magnitude of the detected current or the variation rate of the current. The current flowing through the display screen 20 is varied by varying the on-voltage. Detailed operations of the current detecting circuit 41 are similar to those of the current detecting circuit 41 illustrated in FIG. 4.

[0139] The other configurations of the EL display device illustrated in FIG. 11 are similar to those to be described in subsequent embodiments, and thus, the descriptions thereof are omitted here.

[0140] The current detecting circuit of the EL display device described above is not limited to a resistor. For example, as FIG. 12 illustrates, the current detecting circuit may be a current detecting circuit 51 including a current

transformer 4, a hall effect sensor 41f, and an amplifier 41g. In this case, only the method of detecting a current performed by the current detecting circuit 51 is different from that performed by the current detecting circuit 41. The difference in the current measuring positions (high side type/low side type) does not affect the control. Of course, the current detecting circuit 51 can also decrease the EL element current in a similar manner to the current detecting circuit 41. In this configuration, a pick up resistor and the like need not be disposed along the anode line and the cathode line, which facilitates the configuration.

[0141] (Variation 1 of Embodiment 1)

[0142] Hereinafter, Variation 1 of Embodiment 1 will be described with reference to FIG. 13 to FIG. 15.

[0143] FIG. 2 illustrates the embodiment where one pixel includes three transistors. In FIG. 2, two gate signal lines 17 are connected to one pixel. However, the present disclosure is not limited to such an example, and the present disclosure is also applicable to another pixel configuration as illustrated in FIG. 13.

[0144] In FIG. 13, a switching transistor 11e includes a gate terminal connected to a gate signal line 17c, and one of the source and the drain connected to Vref. A switching transistor 11c has a function of determining the timing at which the Vini is applied to an electrode of a capacitor 19a. The switching transistor 11e and the switching transistor 11c are, for example, n-type thin-film transistors (n-type TFTs).

[0145] The driving transistor 11a is a driving element having a drain connected to the anode voltage Vdd which is a first power supply line, and a source connected to the anode of the EL element 15. The driving transistor 11a converts the voltage corresponding to the signal voltage applied between the gate and the source into a drain current corresponding to the signal voltage. The drain current is supplied to the EL element 15 as a signal current. The driving transistor 11a is, for example, an n-type thin-film transistor (n-type TFT).

[0146] The EL element 15 is a light-emitting element having a cathode connected to a cathode voltage Vss which is a second power supply line. The EL element 15 emits light in response to the signal current supplied by the driving transistor 11a.

[0147] The switching transistor 11d is a switching transistor having a gate connected to the gate signal line 17b, and one of the source and drain terminals connected to the drain terminal of the driving transistor 11a. The switching transistor 11d is, for example, an n-type thin-film transistor (n-type TFT).

[0148] The capacitor 19a first stores the source potential of the driving transistor 11a (potential of the source signal line 18) in a steady state when the switching transistor 11b is in a conducting state. After that, the potential of the capacitor 19a is determined even when the switching transistor 11b is brought into an OFF state, and thus a gate voltage of the driving transistor 11a is determined.

[0149] The capacitor 19a is formed or disposed so as to overlap (stack) with the source signal line 18 and the gate signal lines 17 (at least one of 17a, 17b, 17c, and 17d). In this case, layout flexibility is improved, a wider space can be secured between elements, and yield is improved.

[0150] The EL display device includes source signal lines 18 for respective pixel columns. The gate signal lines 17a and 17b are connected to both the gate driver ICs (circuits) 12a and 12b, and connected to each EL element 15 in a pixel

row including the pixel 16. With this, the gate signal lines 17a and 17b have a function of supplying timing at which the signal voltage is written into each EL element 15 in the pixel row including the pixels 16, and a function of supplying timing at which a reference voltage is applied to the gate of the driving transistor 11a of the pixel 16.

[0151] In Variation 1 of Embodiment 1 illustrated in FIG. 13, it is preferable that the relation of the anode voltage Vdd > the reference voltage Vref > the cathode voltage Vss > an initial voltage Vini is satisfied. Specifically, as an example, the anode voltage Vdd ranges from 10 to 18 (V), the reference voltage Vref ranges from 1.5 to 3 (V), the cathode voltage Vss ranges from 0.5 to 2.5 (V), and the initial voltage Vini ranges from 0 to -3 (V).

[0152] It may be that the switching transistor 11d is disposed or formed between the source terminal of the driving transistor 11a and the anode terminal of the EL element 15.

[0153] The gate terminal of the switching transistor 11d is connected to the gate signal line 17b. The gate terminal of the switching transistor 11e is connected to the gate signal line 17c. The gate terminal of the switching transistor 11b is connected to the gate signal line 17a. The gate terminal of the switching transistor 11c is connected to the gate signal line 17d.

[0154] In the embodiment illustrated in FIG. 13, it may be that the gate signal line 17b connected to the gate terminal of the switching transistor 11d is referred to as a gate signal line GE, the gate signal line 17c connected to the gate terminal of the switching transistor 11e is referred to as a gate signal line GR, the gate signal line 17a connected to the gate terminal of the switching transistor 11b is referred to as a gate signal line GS, and the gate signal line 17d connected to the gate terminal of the switching transistor 11c is referred to as a gate signal line GL.

[0155] When an on-voltage is applied to the gate signal line 17b (GE), the switch transistor 11d is turned on, and a light emission current is supplied from the driving transistor 11a to the EL element 15. The EL element 15 emits light based on the magnitude of the light emission current. The magnitude of the light emission current is determined by causing the switching transistor 11b to apply, to the pixel 16, the video signal applied to the source signal line 18.

[0156] The capacitor 19a has one terminal connected to the gate terminal of the driving transistor 11a, and the other terminal connected to the source terminal of the driving transistor 11a. The drain terminal of the switching transistor 11b is connected to the source signal line 18. The source driver IC (circuit) 14 applies a video signal to the source signal line 18.

[0157] FIG. 14 illustrates a pixel configuration of the EL display device according to the present disclosure. As FIG. 14 illustrates, the gate signal lines 17a and 17b are connected to the gate driver ICs (circuits) 12a and 12b disposed on the left and right sides of the display screen 20. The gate signal lines 17c and 17d are connected to the gate driver IC (circuit) 12a disposed on the left side of the display screen 20 (see FIG. 14).

[0158] The gate driver IC (circuit) 12a applies a pixel selection voltage (on-voltage Von) to the gate signal lines 17a, 17b, 17c, and 17d. The gate driver IC (circuit) 12b applies a pixel selection voltage (on-voltage Von) to the gate signal lines 17a and 17b. When the on-voltage is applied to the gate signal line 17b, the switching transistor 11b is

turned on, and the video signal applied to the source signal line 18 is applied to the pixel 16.

[0159] The EL display panel includes the display screen 20 including the pixels 16 arranged in rows and columns. Each of the pixels 16 includes the EL element 15.

[0160] As FIG. 13 illustrates, both ends of the gate signal lines 17a and 17b are connected to the gate driver ICs (circuits) 12a and 12b. One end of each of the gate signal lines 17c and 17d is connected to the gate driver IC (circuit) 12a. The gate driver ICs (circuits) 12a and 12b each are mounted on a chip on film (COF) (not illustrated).

[0161] Likewise, each pixel 16 is connected to the source signal line 18. The source signal line 18 has one end connected to the source driver IC (circuit) 14. The source driver IC (circuit) 14 is mounted on a COF (not illustrated).

[0162] The source driver IC (circuit) 14 outputs a video signal which is supplied or applied to the source signal line 18.

[0163] FIG. 15 illustrates an EL display device according to the present embodiment which corresponds to the pixel configuration in FIG. 13.

[0164] The on-voltage (V_{on}) is supplied to the gate driver IC (circuit) 12b, and the on-voltage is output to the gate signal line 17b (gate signal line GE).

[0165] In FIG. 13 to FIG. 15, the switching transistor 11d is an N-channel transistor. Accordingly, an on-voltage is a positive voltage. An off-voltage is a negative voltage.

[0166] With an increase in the on-voltage, the voltage V_d across the channel of the switching transistor 11d decreases. This facilitates the flow of a current to the EL element 15.

[0167] With a decrease in the on-voltage, the voltage V_d across the channel of the switching transistor 11d decreases. Accordingly, the voltage V_e is unlikely to be applied to the EL element 15, which makes a current to be unlikely to flow into the EL element 15 (the current flow into the EL element is decreased).

[0168] As described above, the voltage V_d across the channel of the switching transistor 11d can be varied by varying the on-voltage.

[0169] Varying the on-voltage of the gate signal line 17b varies the voltage V_d across the channel of the switching transistor 11d. Since the cathode voltage V_{ss} and the anode voltage V_{dd} each are a constant voltage, a variation in the V_d varies the voltage V_a across the channel of the driving transistor 11a and the voltage V_e across the terminals of the EL element 15. Accordingly, the current flowing through the EL element 15 can be varied by varying the voltage V_d . A variation in the current of the EL element 15 leads to a variation in the current flowing through the display screen 20. Accordingly, the current flowing through the display screen 20 can be varied by varying the on-voltage.

[0170] In the present disclosure, the voltage V_d across the channel of the switching transistor 11d can be varied by varying the on-voltage. The variation in V_d is divided appropriately into the voltage V_a across the channel of the driving transistor 11a and the voltage V_e across the terminals of the EL element 15. The voltage division is carried out according to the characteristics of the driving transistor 11a and the EL element 15. The characteristics of the driving transistors 11a and the EL elements 15 vary within the display screen 20. Accordingly, unlike the case where the anode voltage V_{dd} is decreased (varied), occurrence of stripe unevenness is reduced and no flicker is caused.

[0171] In the present disclosure, the current detecting circuit 41 detects, for example, when the current flowing through the display screen 20 increases or when the current flowing through the display screen 20 exceeds a predetermined value, and the on-voltage generating circuit 43 is controlled based on the detected or measured current or the data proportional to the current. The on-voltage generating circuit 43 varies the on-voltage so as to increase the voltage V_d across the channel of the switching transistor 11d. As a result, the current flowing through the EL element 15 is decreased.

[0172] In the present disclosure, the current detecting circuit 41 detects, for example, when the current flowing through the display screen 20 decreases or when the current flowing through the display screen 20 becomes below a predetermined value, and the on-voltage generating circuit 43 is controlled based on the detected or measured current or the data proportional to the current. The on-voltage generating circuit 43 varies the on-voltage so as to decrease the voltage V_d across the channel of the switching transistor 11d. As a result, control is performed such that the current flowing through the EL element 15 increases, and light emission is provided with higher peak luminance.

[0173] (Variation 2 of Embodiment 1)

[0174] Hereinafter, Variation 2 of Embodiment 1 will be described with reference to FIG. 16.

[0175] FIG. 16 illustrates an embodiment corresponding to another pixel configuration. In the embodiment illustrated in FIG. 16, in a similar manner to FIG. 2, the switching transistor 11d is a P-channel transistor. Accordingly, an on-voltage is a negative voltage. An off-voltage is a positive voltage.

[0176] FIG. 16 illustrates a pixel configuration of the EL display device according to the present disclosure. The gate signal line 17c is connected to the gate terminal of the switching transistor 11e to control on and off of the switching transistor 11e. The gate signal line 17a is connected to the gate terminal of the switching transistor 11b to control on and off of the switching transistor 11b. The gate signal line 17d is connected to the gate terminal of the switching transistor 11c to control on and off of the switching transistor 11c. The gate signal line 17b is connected to the gate terminal of the switching transistor 11d to control on and off of the switching transistor 11d.

[0177] In the pixel configuration illustrated in FIG. 16, the gate signal lines 17a, 17c, and 17d are connected to the gate driver IC (circuit) 12a, and the gate signal line 17b is connected to the gate driver IC (circuit) 12b.

[0178] In FIG. 16, the drain terminal of the P-channel driving transistor 11a is connected to the source terminal of the switching transistor 11d, and the drain terminal of the switching transistor 11d is connected to the anode terminal of the EL element 15. The cathode voltage V_{ss} is applied to the cathode terminal of the EL element 15. The anode voltage V_{dd} is applied to the source terminal of the driving transistor 11a.

[0179] When an on-voltage is applied to the gate signal line 17b, the switching transistor 11d is turned on, and a light emission current is supplied from the driving transistor 11a to the EL element 15. The EL element 15 emits light based on the magnitude of the light emission current.

[0180] The source terminal and the drain terminal of the switching transistor 11c are connected between the gate terminal and the drain terminal of the driving transistor 11a.

When an on-voltage is applied to the gate signal line **17d**, the gate terminal and the drain terminal of the driving transistor **11a** are short-circuited (connected).

[0181] The gate terminal of the driving transistor **11a** is connected to one terminal of the capacitor **19b**. The other terminal of the capacitor **19b** is connected to the drain terminal of the switching transistor **11b**. The source terminal of the switching transistor **11b** is connected to the source signal line **18**.

[0182] When the on-voltage is applied to the gate signal line **17a**, the switching transistor **11b** is turned on, and the video signal (voltage, current) applied to the source signal line **18** is applied to the pixel **16**. In the present disclosure, the video signal is a video signal voltage, but may be a video signal current.

[0183] The capacitor **19a** has one terminal connected to the drain terminal of the switching transistor **11b**, and the other terminal which is connected to the anode electrode (terminal) and to which the anode voltage Vdd is applied.

[0184] It has been described above that the other terminal of the capacitor **19a** is connected to the anode electrode (terminal), and the anode voltage Vdd is applied to the other terminal, but the present disclosure is not limited to the example. For example, the other terminal of the capacitor **19a** may be connected to any other given DC voltage.

[0185] It has been described above that the source terminal of the driving transistor **11a** is connected to the anode electrode (terminal) and the anode voltage Vdd is applied to the source terminal, but the present disclosure is not limited to the example. For example, the source terminal of the driving transistor **11a** may be connected to any other given DC voltage. In other words, it may be that one terminal of the capacitor **19a** and the source terminal of the driving transistor **11a** are connected to terminals having different potentials.

[0186] For example, the source terminal of the driving transistor **11a** is connected to an electrode or a line applied with the anode voltage Vdd, and one terminal of the driving transistor **11a** is connected to an electrode or a line applied with DC voltage of Vb=5 (V).

[0187] The drain terminal of the switching transistor **11e** is connected to the drain terminal of the switching transistor **11b**, and the source terminal of the switching transistor **11e** is connected to an electrode or a signal line applied with a reset voltage Va. When an on-voltage is applied to the gate signal line **17c**, the switching transistor **11e** is turned on, and the reset voltage Va is applied to the capacitor **19a**.

[0188] The switching transistor **11c** and the switching transistor **11e** are P-channel transistors, and have an LDD structure. The switching transistors **11c** and **11e** each have at least double gates (dual gates). Preferably, the switching transistors **11c** and **11e** have triple or more gates. In other words, a configuration is employed in which the gates of a plurality of transistors are connected in series.

[0189] Employing the LDD structure and multi-gate structure (dual-gate, triple-gate, or more gates) can enhance excellent off-characteristics of the switching transistors **11c** and **11e**. Without enhanced off-characteristics of the switching transistors **11c** and **11e**, the charges of the capacitor **19a** cannot be held properly.

[0190] It is preferable that the transistors other than the switching transistors **11c** and **11p** are also P-channel transistors, and have an LDD structure. As necessary, the transistors may have a multigate structure.

[0191] By using the multigate transistors (more than dual gates) or combining with the LDD structure, off-leakage can be reduced, and excellent contrast and offset cancellation can be realized. In addition, an excellent high luminance display and image display can be realized.

[0192] The switching transistor **11b** applies, to the gate terminal of the driving transistor **11a** of the pixel **16**, the video signal output from the source driver IC (circuit) **14**. The driving transistor **11a** performs voltage-to-current conversion based on the applied video signal, and supplies a light emission current to the EL element **15** based on the video signal.

[0193] Decreasing the on-voltage applied to the gate terminal of the switching transistor **11d** causes the switching transistor **11d** to be in an on state at a high level and to operate in a saturated region. The voltage across the channel (between the source and the drain) of the switching transistor **11d** decreases. Accordingly, a sufficient voltage is applied to the EL element **15** and across the channel of the driving transistor **11a**. Hence, a constant current from the driving transistor **11a** is supplied to the EL element **15**.

[0194] An increase in the on-voltage applied to the gate terminal of the switching transistor **11d** increases the on-resistance across the channel of the switching transistor **11d** (causes the switching transistor **11d** to operate in a linear region). An increase in the on-resistance across the channel (between the source and the drain) of the switching transistor **11d** increases the voltage across the channel of the switching transistor **11d**. Accordingly, a voltage is unlikely to be applied across the channel of the driving transistor **11a** and to the EL element **15**. Hence, a current supplied to the EL element **15** by the driving transistor **11a** is decreased.

[0195] As described above, according to the present disclosure, when the current supplied to the EL element **15** is to be decreased, the on-voltage applied to the gate terminal of the switching transistor **11d** is increased, and the resistance across the channel of the switching transistor **11d** is increased.

[0196] Varying the on-voltage of the gate signal line **17b** varies the voltage Vd across the channel of the switching transistor **11d**. Since the cathode voltage Vss and the anode voltage Vdd each are a constant voltage, a variation in the Vd varies the voltage Va across the channel of the driving transistor **11a** and the voltage Ve across the terminals of the EL element **15**.

[0197] Accordingly, a current flowing through the EL element **15** can be varied by varying the voltage Vd across the channel of the switching transistor **11d**. A variation in the current of the EL element **15** leads to a variation in the current flowing through the display screen **20**. Accordingly, the current flowing through the display screen **20** can be varied by varying the on-voltage.

[0198] As described above, the switching transistor **11d** illustrated in FIG. 16 is a P-channel transistor. Hence, in the three-voltage drive of gate voltages and the two-value drive of gate voltages, as illustrated in FIG. 10, the polarities of the on-voltage (Von) and the off-voltages (Voff1 and Voff2) are opposite to those in FIG. 9.

[0199] In the above described embodiment, the current detecting circuit **41** detects when the current flowing through the display screen **20** increases or when the current flowing through the display screen **20** exceeds a predetermined

value, and the on-voltage generating circuit **43** is controlled based on the detected or measured current or the data proportional to the current.

Embodiment 2

[0200] Hereinafter, Embodiment 2 will be described with reference to FIG. 17.

[0201] FIG. 17 illustrates an embodiment where a current operational circuit **191** performs processing (an operation) on an input video signal to obtain the current I_d flowing through the display screen **20** or data proportional to the current and control the on-voltage generating circuit **43** based on such data. The current operational circuit **191** corresponds to a current amount obtaining circuit according to the present disclosure.

[0202] The current flowing through the EL element **15** of the pixel **16** and luminance of the EL element **15** are in a linear (proportional) relation. Hence, power consumption of the panel can be obtained by calculating, for example, the sum of video data.

[0203] As described above, data based on the current flowing through the display screen **20** can be obtained by obtaining the sum of the video data and, for example, integrating the sum.

[0204] The EL elements **15** have different light emission efficiency depending on red (R), green (G), and blue (B). In general, B has a lowest light emission efficiency. G has a second lowest light emission efficiency. R has a highest light emission efficiency. In view of this, a multiplier (not illustrated) is used to weight the light emission efficiency. A multiplier for the R (not illustrated) performs multiplication on the light emission efficiency of the R with respect to R image data (Rdata). A multiplier for the G (not illustrated) performs multiplication on the light emission efficiency of the G with respect to G image data (Gdata). A multiplier for the B (not illustrated) performs multiplication on the light emission efficiency of the B with respect to B image data (Bdata).

[0205] R, G, and B have different luminosity factors. The luminosity factor according to the national television system committee (NTSC) is R:G:B=3:6:1. Accordingly, the R multiplier (not illustrated) multiplies the light emission efficiency by three with respect to the Rdata. The G multiplier (not illustrated) multiplies the light emission efficiency by six with respect to the Gdata. The B multiplier (not illustrated) multiplies the light emission efficiency by one with respect to the Bdata.

[0206] The above-described input data is RGB data (red is RDATA, green is GDATA, and blue is BDATA), but the present disclosure is not limited to the example. The input data may be YUV (luminance data and chromaticity data). In the case of the YUV, Y (luminance) data, or Y data and UV (chromaticity) data are directly weighted, or light emission efficiency is converted into, for example, luminance data in view of the light emission efficiency relative to the chromaticity before being weighted. The other matters have been illustrated with reference to FIG. 2 and the like, and thus, the descriptions thereof are omitted.

[0207] As described above, in the present disclosure, the current detecting circuit may be used to measure or detect a current. Moreover, the current operational circuit may be used to obtain, for example, a value based on a current and the like. Alternatively, both the current detecting circuit and the current operational circuit may be used to obtain a

current and the like. In the embodiments of the present disclosure, a current is obtained; however, the present disclosure is not limited to such an example, but a value proportional to a current may be obtained. A value based on a current or a value related to the current may also be obtained. The current value includes a variation in current or a variation rate of the current. Accordingly, a current amount obtaining circuit may be used.

Other Embodiments

[0208] It is possible to apply the details (or part of the details) described with reference to the drawings in each of the above-described embodiments, to various electronic devices. To be specific, it is possible to apply them to the display screens of electronic devices.

[0209] Examples of such electronic devices include: a video camera, a digital camera, a head mounted display, a navigation system, an audio reproducing device (a car audio, an audio component, etc.), a computer, a gaming device, a mobile information terminal (a mobile computer, a mobile phone, a mobile game device, a digital book, etc.), an image reproducing apparatus including a recording medium (to be specific, a device including a display capable of reproducing a recording medium of a digital versatile disc (DVD) or the like and displaying the image thereof), etc.

[0210] FIG. 18 illustrates a display including a support column **152**, a holding base **153**, and the EL display device (EL display panel) **151** according to the present invention. The display illustrated in FIG. 18 has a function of displaying various information items (a still image, video, a text image, etc.) on a display portion. It is to be noted that the function of the display illustrated in FIG. 18 is not limited to this, and the display can have various functions.

[0211] FIG. 19 illustrates a camera including a shutter **161**, a viewfinder **162**, a cursor **163**, and the EL display device (EL display panel) **151** according to the present invention. The camera illustrated in FIG. 19 has a function of capturing a still image. The camera also has a function of capturing video. It is to be noted that the functions of the camera illustrated in FIG. 19 are not limited to these functions, and the camera can have various functions.

[0212] FIG. 20 illustrates a computer including a keyboard **171**, a touch-pad **172**, and the EL display device (EL display panel) **151** according to the present invention. The computer illustrated in FIG. 20 has a function of displaying various information items (a still image, video, a text image, etc.) on a display portion. It is to be noted that the function of the computer illustrated in FIG. 20 is not limited to this, and the computer can have various functions.

[0213] It should be understood that the above-described embodiment can also be applied to the other embodiments according to the present disclosure. It should also be understood that it is possible to combine the present embodiment with other embodiments.

[0214] It is possible to improve the image quality of the above-described information apparatuses illustrated in FIG. 18 to FIG. 20 and reduce cost, by employing the EL display device (EL display panel) or the driving system described in the above-described embodiments in the configuration of the display portions in the present embodiment. In addition, it is possible to easily perform test or adjustment.

[0215] It is possible to arbitrarily combine the present embodiment with other embodiments.

[0216] In the present disclosure, the drawings include omitted, magnified or reduced portions to facilitate understanding or creation of the drawings.

[0217] The matters and content illustrated in the drawings or described in this embodiment of the Description according to the present disclosure are also applicable to other embodiments. The EL display panel illustrated in the drawings or described in this embodiment disclosed herein is applicable to EL display devices according to the present disclosure.

[0218] For example, needless to say, as the EL display device 151 of a laptop personal computer in FIG. 20, one of the EL display devices (EL display panels) illustrated in the drawings or described in the embodiments of the present disclosure can be employed to form an information apparatus.

[0219] Parts assigned with the same numbers or symbols have identical or similar forms, materials, functions, relevant matters, perform identical or similar actions, or provide identical or similar effects.

[0220] The details illustrated in the drawings etc. can be combined with other embodiments etc. even when no such indication is provided. For example, it is possible to form an information display device and the like as illustrated in FIG. 18, FIG. 19, and FIG. 20 by adding a touch panel etc. on the EL display panel as illustrated in FIG. 2 according to the present disclosure.

[0221] The EL display device according to the present disclosure may conceptually include system apparatuses such as information apparatuses. The EL display panels may conceptually include the system apparatuses such as information apparatuses in a broad sense.

[0222] Although the driving transistor 11a and the switching transistors 11b and 11d are described as thin-film transistors in the present disclosure, the driving transistor and the switching transistors according to the present disclosure are not limited to the thin-film transistors. Thin-film diodes (TFDs), ring diodes, and the like may also be used to form the same.

[0223] The driving transistors and the switching transistors are not limited to such thin-film elements, but also may be transistors formed on a silicon wafer. For example, a transistor may be firstly formed using a silicon wafer, and removed and transferred onto a glass board. Moreover, for example, a display panel on which a transistor chip formed using a silicon wafer is mounted by bonding on a glass substrate is exemplified.

[0224] The transistors 11 (the driving transistor 11a and the switching transistors 11b and 11d) may be, of course, FETs, MOS-FETs, MOS transistors, or bipolar transistors. Those transistors are also basically thin-film transistors. Additionally, the transistors may be, of course, varistors, thyristors, ring diodes, photodiodes, photo transistors, PLZT elements, etc.

[0225] It is preferable that the transistor 11 (the driving transistor 11a and switching transistors 11b and 11d) according to the present disclosure has an LDD structure regardless of whether the transistor 11 is an N-channel transistor or a P-channel transistor.

[0226] Furthermore, the transistor 11 may be any one of those formed using: HTPS; LTPS; CGS; TAOS; IZO; AS; and RTA.

[0227] In FIG. 2 and FIG. 16, the transistors (the driving transistor 11a and the switching transistors 11b and 11d)

included in the pixel are all P-channel transistors. However, the transistors 11 of the pixel according to the present disclosure are not limited to the P-channel transistors. The transistors 11 may include only N-channel transistors or each include both the N-channel and P-channel transistors. Moreover, the driving transistor 11a may include both the P-channel and N-channel transistors.

[0228] The switching transistors 11b and 11d are not limited to transistors, but may be, for example, analog switches each including both the P-channel and N-channel transistors.

[0229] It is preferable that the transistors 11 (the driving transistor 11a and the switching transistors 11b and 11d) each have a top gate structure. This is because the top gate structure decreases parasitic and a gate electrode pattern of the top gate functions as a light shielding layer to shield light emitted from the EL element 15, making it possible to reduce malfunction of the transistor or an off-leakage current.

[0230] It is preferable, in the process to be carried out, that a copper line or a copper alloy line can be employed as a line material for the gate signal line 17 or the source signal line 18, or for both the gate signal line 17 and the source signal line 18. This is because it is possible to decrease wiring resistance of the signal lines and a larger EL display panel can be implemented.

[0231] It is preferable that the gate signal lines 17 which is driven (controlled) by the gate driver ICs (circuits) 12 has low impedance. Accordingly, the above applies to the compositions or structures of the gate signal lines 17.

[0232] In particular, it is preferable that LTPS is employed. The LTPS can be used to form N-channel and P-channel transistors having a top gate structure and a small parasitic capacitance. The copper line or copper alloy line process can be employed in processes. It is preferable that a three-layer structure of Ti—Cu—Ti is employed for the copper line.

[0233] For the lines, it is preferable that a three-layer structure of Mo (molybdenum)—Cu—Mo is employed in the case of transparent amorphous oxide semiconductors (TAOS).

[0234] As described above, the embodiments have been presented as exemplifications of the techniques according to the present disclosure. The attached drawings and the detailed descriptions are provided for that purpose.

[0235] Accordingly, the structural elements described in the attached drawings and the detailed descriptions may include not only the structural elements which are essential for solving the problems but also the structural elements which are not essential for solving the problems but used for exemplifying the above-described techniques. As such, description of these non-essential structural elements in the accompanying drawings and the detailed descriptions should not be taken to mean that these non-essential structural elements are essential.

[0236] Furthermore, since the foregoing embodiments are for exemplifying the techniques according to the present disclosure, various changes, substitutions, additions, omissions, and so on, can be carried out within the scope of the Claims or its equivalents.

INDUSTRIAL APPLICABILITY

[0237] The present disclosure can be used to an EL display device (EL display panel) and a method for driving the same.

Specifically, the present disclosure can be used to, for example, a video camera, a digital camera, a head mounted display, a navigation system, an audio reproducing device (a car audio, an audio component, etc.), a computer, a gaming device, a mobile information terminal (a mobile computer, a mobile phone, a mobile game device, a digital book, etc.), an image reproducing apparatus including a recording medium (to be specific, a device including a display capable of reproducing a recording medium of a digital versatile disc (DVD) or the like and displaying the image thereof), etc.

REFERENCE SIGNS LIST

- [0238] 11a driving transistor (TFT)
 - [0239] 11b second switching transistor
 - [0240] 11d first switching transistor
 - [0241] 12a, 12b gate driver IC (circuit)
 - [0242] 14 source driver IC (circuit)
 - [0243] 15 EL element
 - [0244] 16 pixel
 - [0245] 17a, 17b, 17c, 17d gate signal line
 - [0246] 18 source signal line
 - [0247] 19a capacitor
 - [0248] 20 display screen
 - [0249] 41 current detecting circuit (current amount obtaining circuit)
 - [0250] 43 on-voltage generating circuit
 - [0251] 70 control circuit (control voltage generating circuit)
 - [0252] 70a FB control line
 - [0253] 121 scanning and output buffer circuit
 - [0254] 123 input terminal
 - [0255] 131 switching circuit
 - [0256] 151 EL display panel (EL display device)
 - [0257] 152 casing
 - [0258] 153 holding base
 - [0259] 161 shutter
 - [0260] 162 view finder
 - [0261] 163 cursor
 - [0262] 171 keyboard
 - [0263] 172 touch-pad
 - [0264] 191 operational circuit (current amount obtaining circuit)
1. An electroluminescent (EL) display device comprising:
 - a display screen including a plurality of pixels arranged in rows and columns;
 - a first gate signal line and a second gate signal line which are disposed for each of the rows of the plurality of pixels;
 - a gate driver circuit which outputs a first control voltage to the first gate signal line and a second control voltage to the second gate signal line;
 - a current generating circuit which supplies a current to the plurality of pixels of the display screen;
 - a current amount obtaining circuit which obtains a magnitude of a current flowing through the plurality of pixels; and
 - a control voltage generating circuit which generates the first control voltage output by the gate driver circuit to the first gate signal line,

wherein each of the plurality of pixels includes:

- an EL element;
- a driving transistor which supplies a driving current to the EL element;
- a first switching transistor disposed in a path of the driving current, the first switching transistor having a voltage applied across a channel and adjusted based on the first control voltage supplied from the first gate signal line; and

- a second switching transistor which switches between a conducting state and a non-conducting state based on the second control voltage supplied from the second gate signal line, the second switching transistor applying a video signal to the driving transistor, and

wherein the control voltage generating circuit adjusts a magnitude of the first control voltage based on an output result from the current amount obtaining circuit.

2. The EL display device according to claim 1, wherein the current amount obtaining circuit obtains the magnitude of the current flowing through the display screen, by performing an operation on a video signal input to the EL display device.

3. The EL display device according to claim 1, wherein the current amount obtaining circuit obtains the magnitude of the current flowing through the display screen, by detecting a magnitude of the current flowing from the current generating circuit into the display screen.

4. The EL display device according to claim 1, wherein the second control voltage includes an on-voltage for turning on the second switching transistor, and a plurality of off-voltages for turning off the second switching transistor.

5. A method for driving an electroluminescent (EL) display device including a display screen including a plurality of pixels arranged in rows and columns, each of the plurality of pixels including an EL element, a driving transistor which supplies a current to the EL element, and a switching transistor disposed in a path of the current flowing through the EL element, the method comprising

- varying a magnitude of the current by adjusting a value of a voltage applied to a gate terminal of the switching transistor.

6. The method according to claim 5, wherein the EL display device includes a current amount obtaining circuit, and

- in the varying, the magnitude of the current flowing through the display screen is obtained by performing an operation on a video signal input to the EL display device, and the voltage applied to the gate terminal of the switching transistor is varied based on the obtained current.

7. The method according to claim 5, wherein the EL display device includes a current amount obtaining circuit, and

- in the varying, the magnitude of the current flowing through the display screen is detected to vary the voltage applied to the gate terminal of the switching transistor.

* * * * *

专利名称(译)	EI显示装置和用于驱动el显示装置的方法		
公开(公告)号	US20160372035A1	公开(公告)日	2016-12-22
申请号	US14/902101	申请日	2014-06-05
申请(专利权)人(译)	JOLED INC.		
当前申请(专利权)人(译)	JOLED公司		
[标]发明人	NAKATANI TOSHIKUNI		
发明人	NAKATANI, TOSHIKUNI		
IPC分类号	G09G3/3233 G09G3/3266		
CPC分类号	G09G3/3233 G09G3/3266 G09G2320/041 G09G2330/021 G09G2330/045 G09G2300/0842 G09G2330/028 G09G2300/0861 G09G2310/0256 G09G2310/0262 G09G2320/0214 G09G2320/029 G09G2330/00 G09G2330/025 G09G2360/16		
优先权	2013142167 2013-07-05 JP		
其他公开文献	US10460657		
外部链接	Espacenet USPTO		

摘要(译)

EL显示装置包括显示屏;第一栅极信号线;第二栅极信号线;栅极驱动器IC (电路);电流产生电路,向EL元件提供电流;电流量获得电路,其获得流过多个像素的电流的大小;以及导通电压产生电路,其产生由栅极驱动器IC (电路)输出到第一栅极信号线的控制电压。每个像素包括第一开关晶体管。控制电压是使第一开关晶体管处于导通状态的电压。导通电压产生电路基于来自电流量获得电路的输出结果改变第一控制电压。

