



US 20160315126A1


(19) **United States**(12) **Patent Application Publication**
HUANG et al.(10) **Pub. No.: US 2016/0315126 A1**(43) **Pub. Date: Oct. 27, 2016**(54) **OLED DISPLAY****Publication Classification**(71) Applicant: **InnoLux Corporation**, Miao-Li County (TW)(72) Inventors: **Hao-Jung HUANG**, Miao-Li County (TW); **Chia-Pin KANG**, Miao-Li County (TW); **Che-Wei LIN**, Miao-Li County (TW); **Hao-Yu CHOU**, Miao-Li County (TW)(51) **Int. Cl.****H01L 27/32** (2006.01)**H01L 51/00** (2006.01)(52) **U.S. Cl.**CPC **H01L 27/3216** (2013.01); **H01L 51/001** (2013.01); **H01L 51/0011** (2013.01); **H01L 27/3218** (2013.01)(21) Appl. No.: **15/202,030**(22) Filed: **Jul. 5, 2016**(57) **ABSTRACT****Related U.S. Application Data**


(63) Continuation of application No. 14/699,368, filed on Apr. 29, 2015, now Pat. No. 9,412,795, which is a continuation of application No. 14/132,247, filed on Dec. 18, 2013, now Pat. No. 9,117,782.

Foreign Application Priority Data

Mar. 4, 2013 (TW) 102107438

An OLED display is disclosed, which includes a substrate and a plurality of pixel groups arranged on the substrate. Each pixel group includes a first, a second, a third and a fourth sub-pixel. Arrangements of the first, second, third and fourth sub-pixels in two neighboring pixel groups are symmetrical with each other. In addition, the distance between the third sub-pixels and the distance between the fourth sub-pixels in two neighboring pixel group are greater than the distance between the first sub-pixels in the two neighboring pixel group.

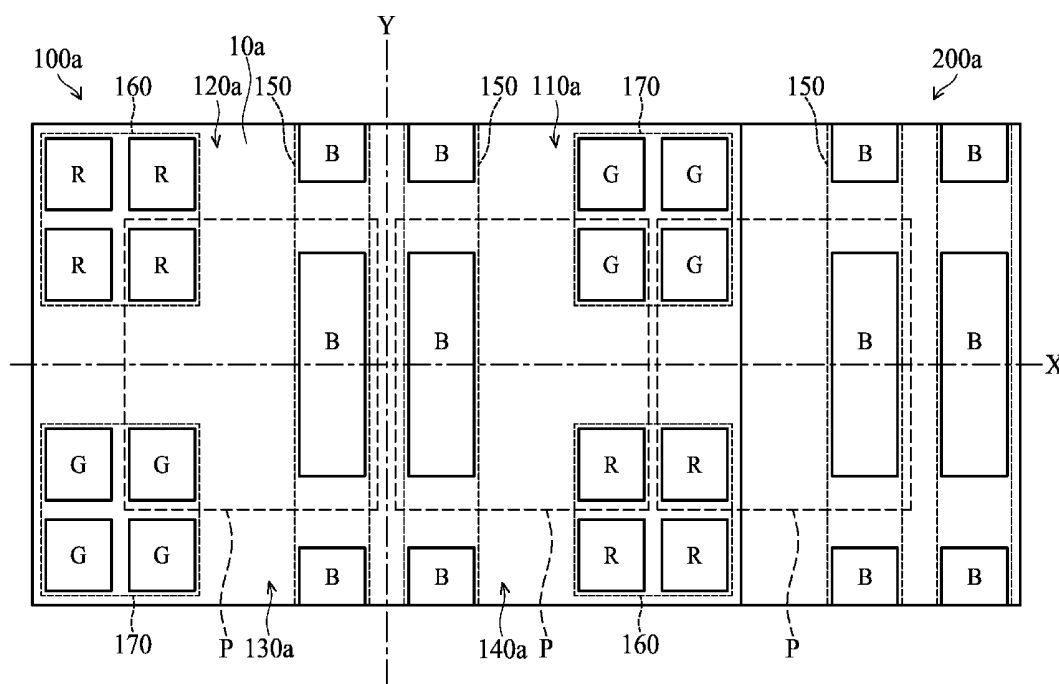

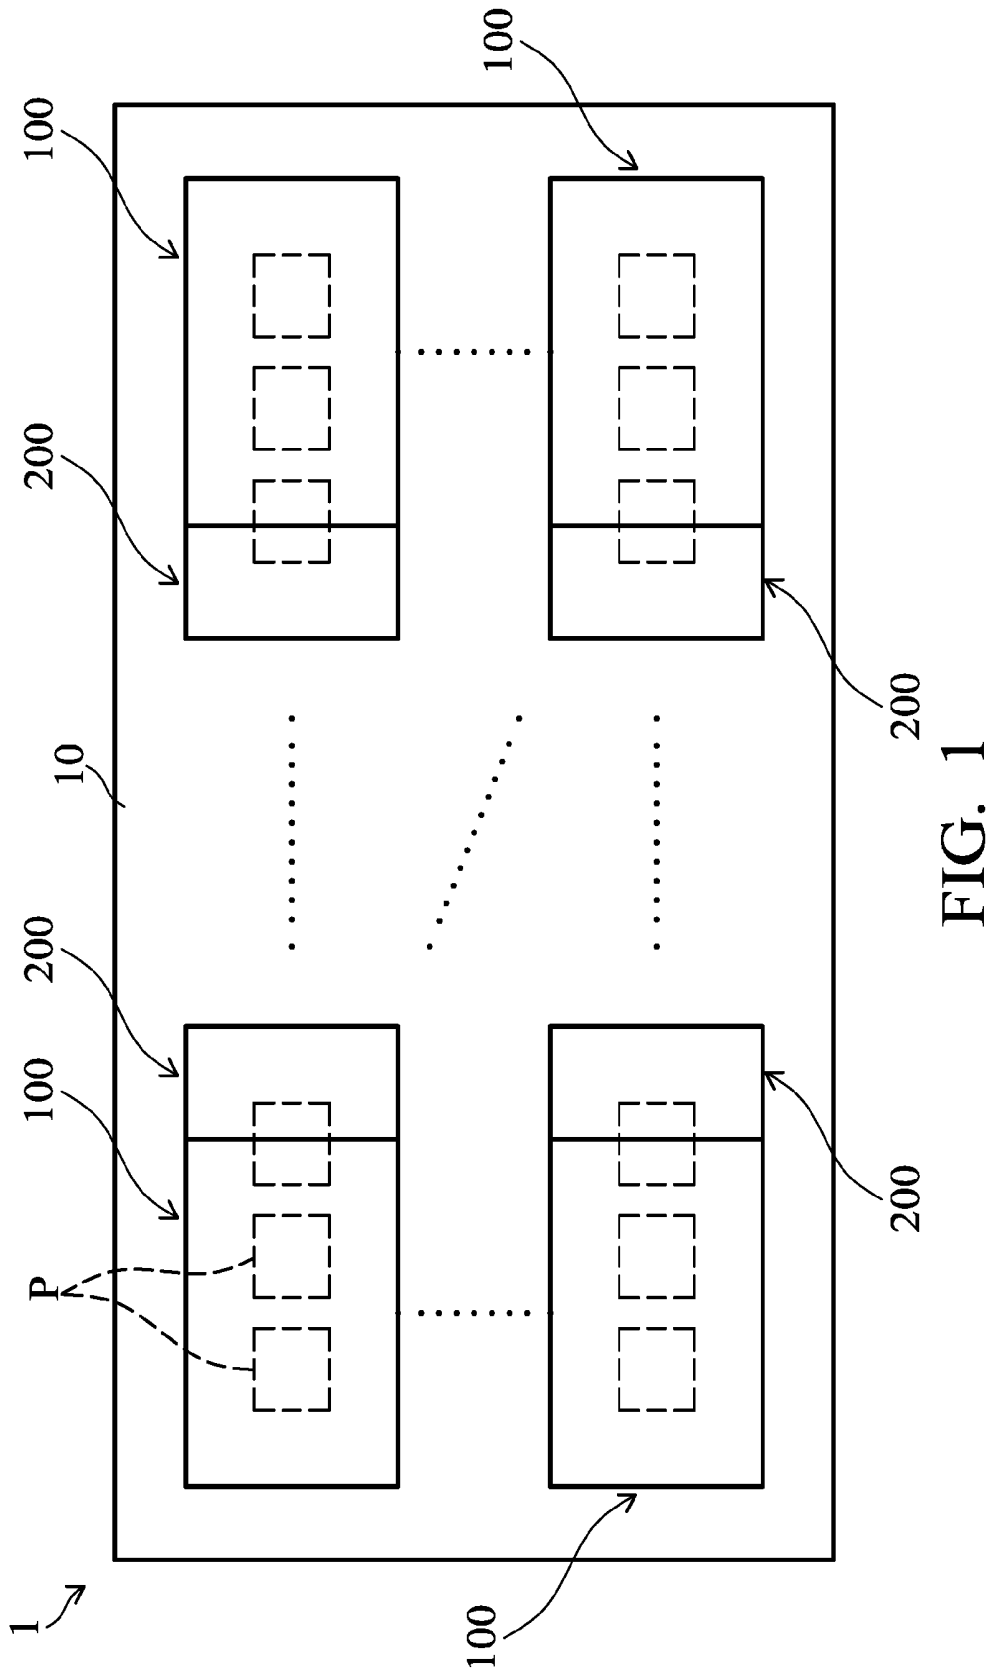

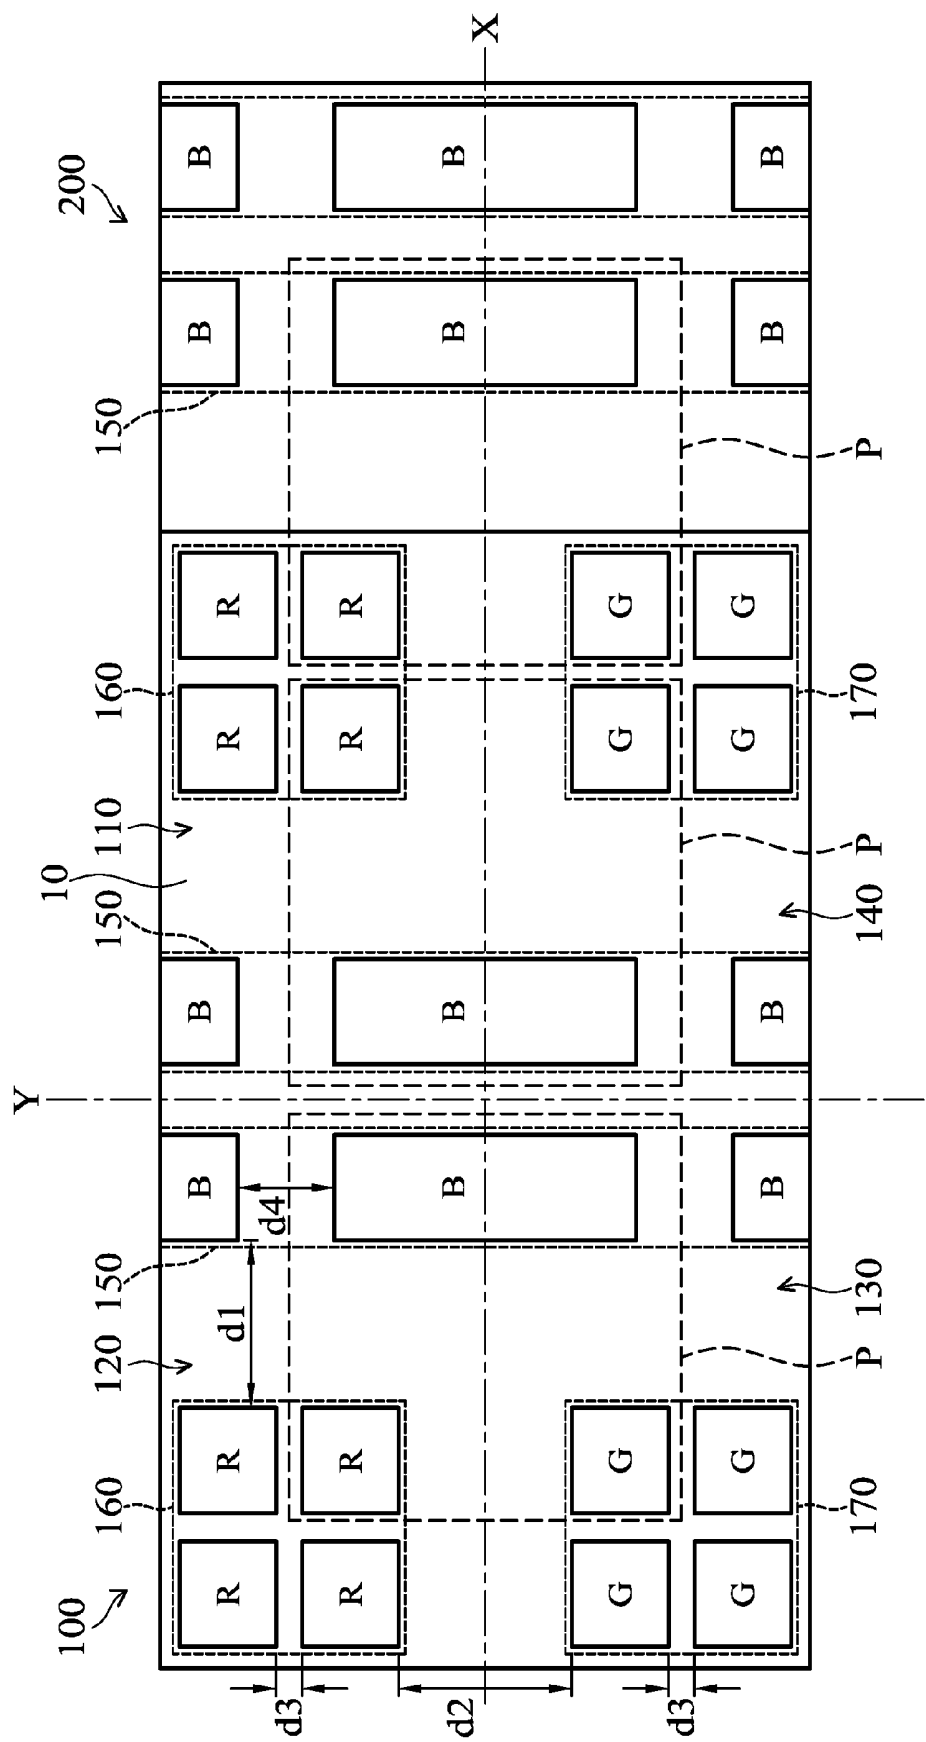
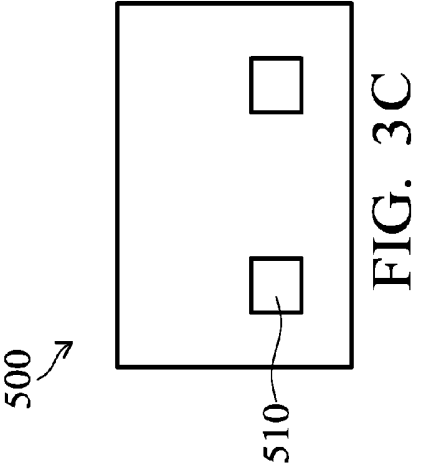
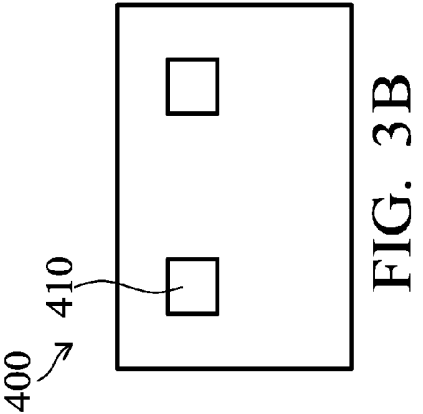
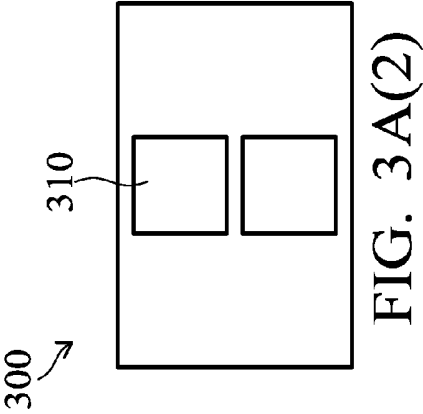
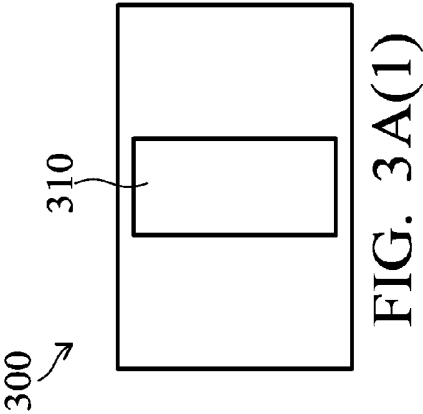


FIG. 2



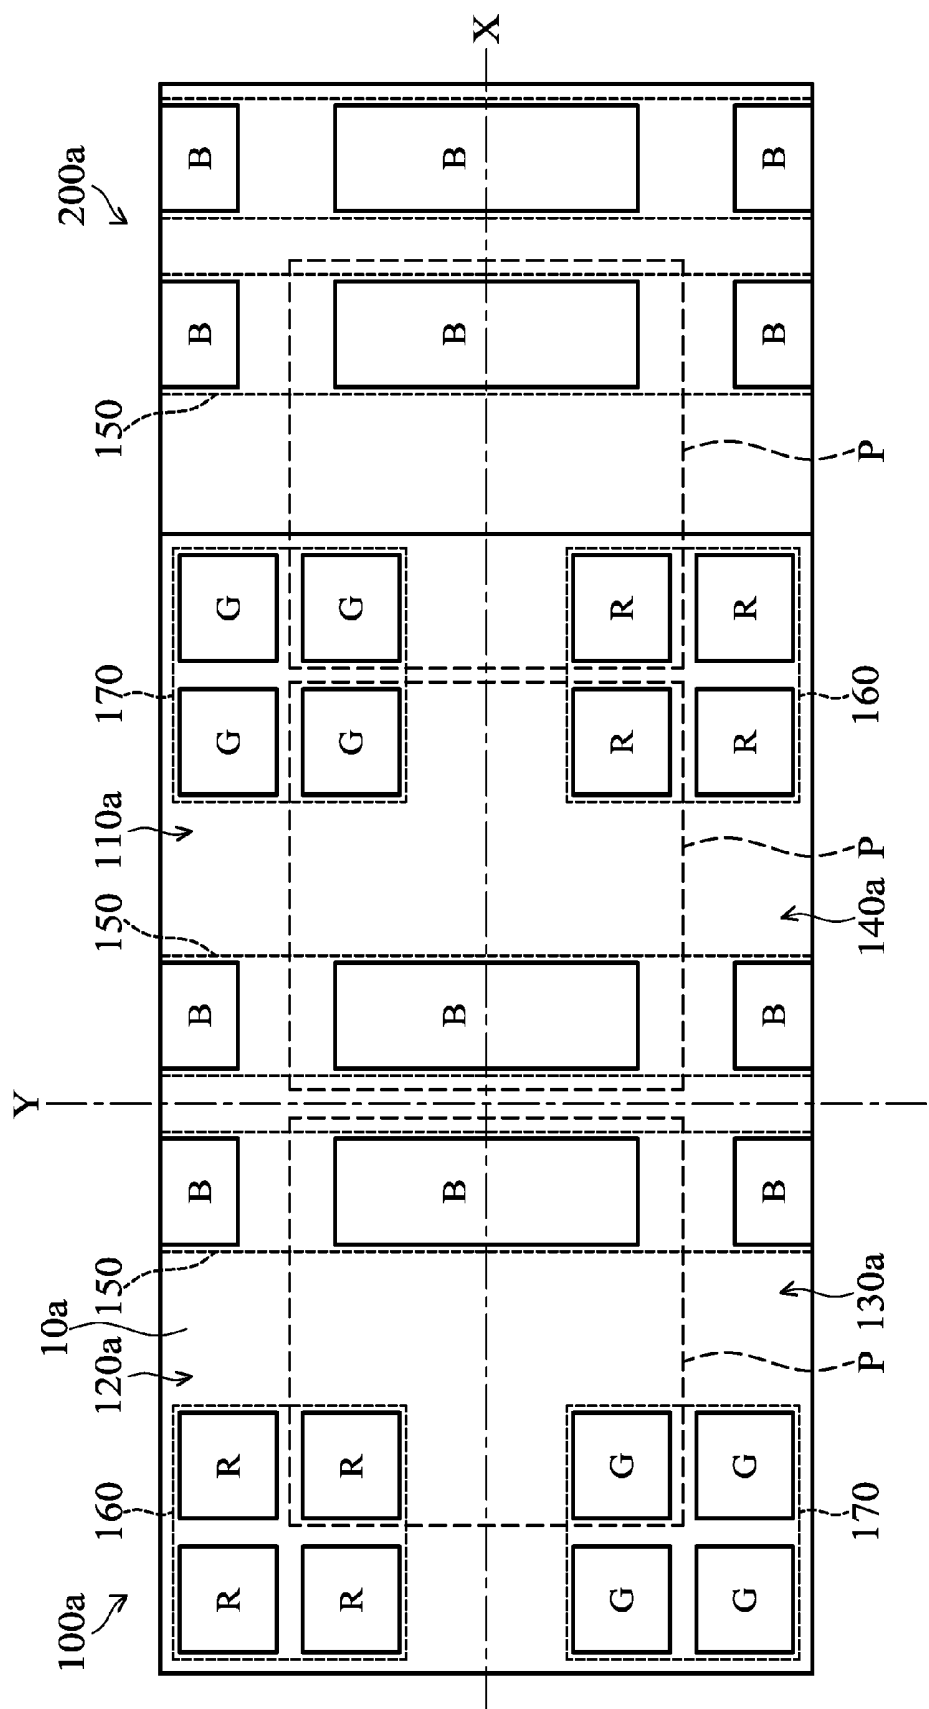


FIG. 4

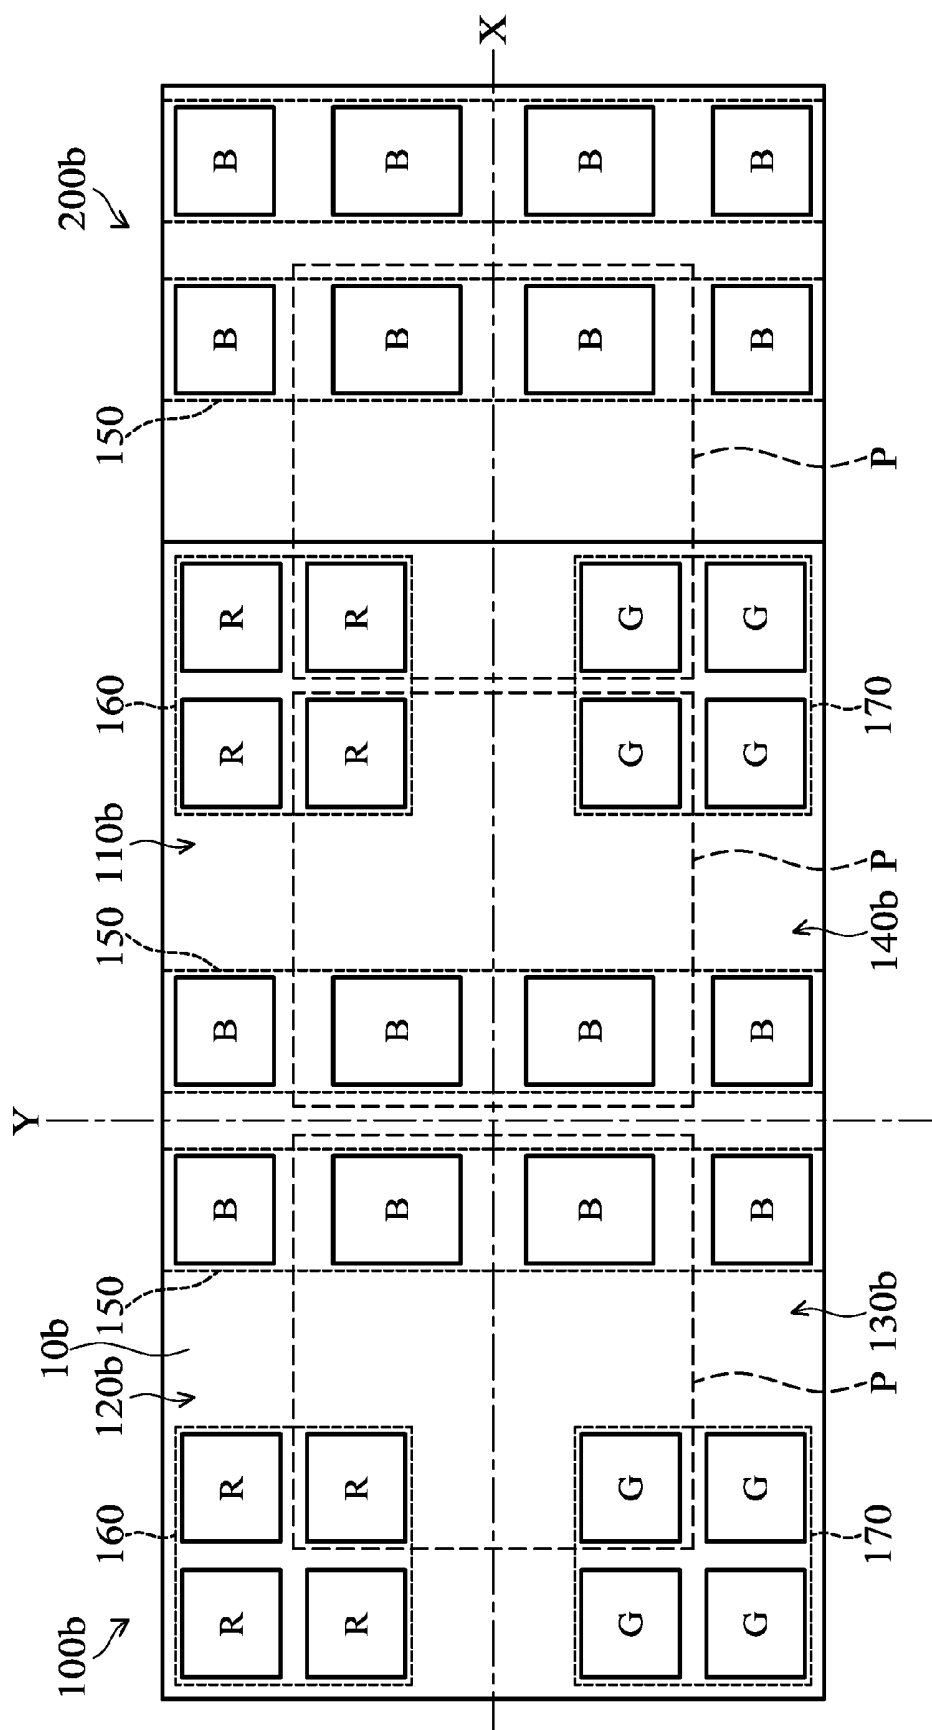


FIG. 5

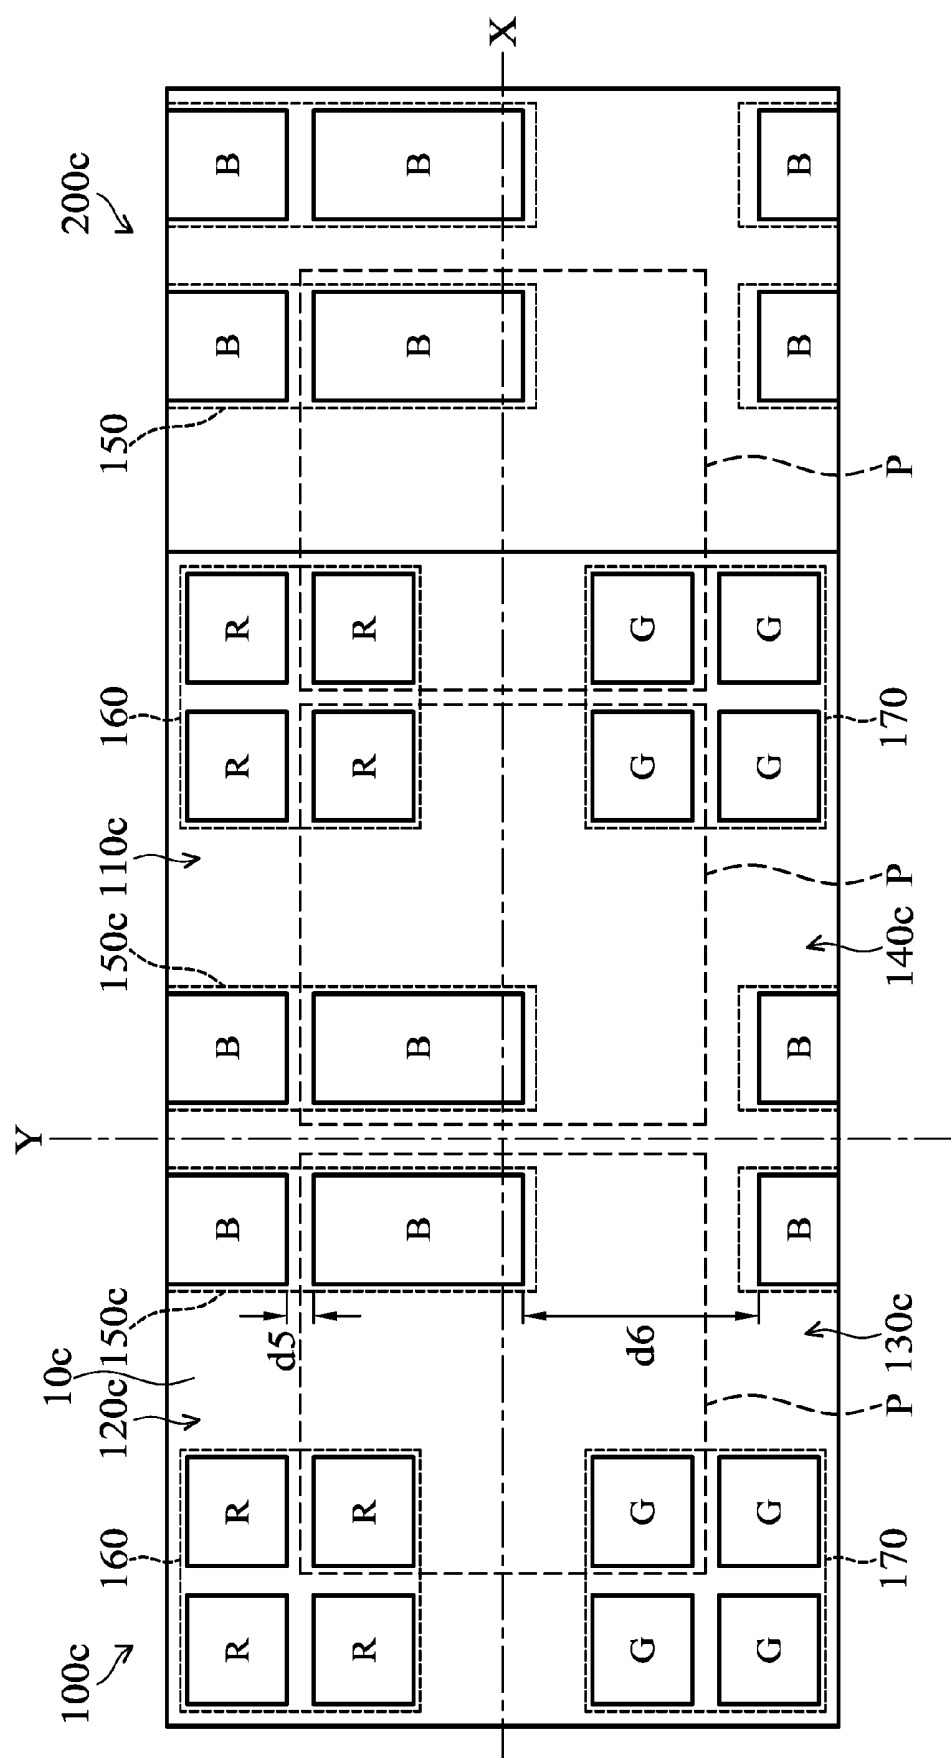


FIG. 6

OLED DISPLAY

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This Application is a continuation of U.S. patent application Ser. No. 14/699,368, filed on Apr. 29, 2015, which is a continuation of U.S. patent application Ser. No. 14/132,247, filed on Dec. 18, 2013 (now U.S. Pat. No. 9,117,782, issued on Aug. 25, 2015), which claims priority to Taiwan Patent Application No. 102107438, filed on Mar. 4, 2013. The contents of these prior applications are incorporated herein by reference.

BACKGROUND

[0002] 1. Field of the Invention

[0003] The disclosure relates to a color organic light emitting diode (OLED) display, and in particular relates to an OLED display having better display resolution by adjusting an arrangement of pixel units thereof.

[0004] 2. Description of the Related Art

[0005] An organic light emitting diode (OLED) generally includes a cathode, and an anode and organic materials disposed between the cathode and the anode. The illuminance of the OLED is determined by the electric current flowing from the anode to the cathode. Therefore, in order to improve the illuminance of an OLED, a large driving voltage should be applied thereto so as to increase the electric current passing therethrough and enable the formation of an exciton, i.e. a recombination of the "electron-hole".

[0006] The manufacturing of an OLED display involves the use of a metal mask when evaporating organic materials. However, as the precision of the metal mask cannot be improved, the current technology can only produce products with display resolution of 200-250 pixels per inch (PPI). Therefore, the competitiveness of OLED products is hindered due to limitation in display resolution.

SUMMARY

[0007] In light of the foregoing, one of the disclosed embodiments provides an OLED display in which a conventional metal mask is used to evaporate organic materials on a substrate which is arranged with pixel electrodes to define sub-pixels with special patterns so as to improve display resolution.

[0008] According to one embodiment, the OLED display includes a substrate and a plurality of pixel groups arranged in a number of directions on the substrate. Each of the plurality of pixel groups includes a first sub-pixel, a second sub-pixel, a third sub-pixel, and a fourth sub-pixel. The first sub-pixel and the second sub-pixel correspond to the same color, the third sub-pixel and the fourth sub-pixel respectively correspond to two different colors. Arrangements of the first, second, third and fourth sub-pixels in two neighboring pixel groups of the plurality of pixel groups are symmetrical with each other. There is a first distance between the first sub-pixels in the two neighboring pixel groups, there is a second distance between the second sub-pixels in the two neighboring pixel groups, there is a third distance between the third sub-pixels in the two neighboring pixel groups, and there is a fourth distance between the fourth sub-pixels in the two neighboring pixel groups.

[0009] In the above-mentioned embodiment, the first sub-pixel is arranged closer to the third sub-pixel than the second sub-pixel, and the second sub-pixel is arranged closer to the fourth sub-pixel than the first sub-pixel. Both the third distance and the fourth distance are greater than the first distance. Alternatively, both the third distance and the fourth distance are greater than the second distance.

[0010] In the above-mentioned embodiment, colors of the first, second, third and fourth sub-pixels in the two neighboring pixel groups are symmetrical with each other.

[0011] In the above-mentioned embodiment, the first sub-pixel, the second sub-pixel, the third sub-pixel and the fourth sub-pixel respectively correspond to a first pixel electrode, a second pixel electrode, a third pixel electrode, and a fourth pixel electrode.

[0012] In the above-mentioned embodiment, the first distance is between a first boundary of the first sub-pixel in a first of the two neighboring pixel groups and a second boundary of the first sub-pixel in a second of the two neighboring pixel groups; the second distance is between a third boundary of the second sub-pixel in the first of the two neighboring pixel groups and a fourth boundary of the second sub-pixel in the second of the two neighboring pixel groups; the third distance is between a fifth boundary of the third sub-pixel in the first of the two neighboring pixel groups and a sixth boundary of the third sub-pixel in the second of the two neighboring pixel groups; and the fourth distance is between a seventh boundary of the fourth sub-pixel in the first of the two neighboring pixel groups and an eighth boundary of the fourth sub-pixel in the second of the two neighboring pixel groups.

[0013] In the above-mentioned embodiment, regions inside the first, second, third, fourth, fifth, sixth, seventh and eighth boundaries are capable of emitting light.

[0014] In the above-mentioned embodiment, the first sub-pixel is arranged closer to the third sub-pixel than the second sub-pixel.

[0015] In the above-mentioned embodiment, the light emitted from the first sub-pixel and the second sub-pixel in an excited state is blue light, the light emitted from the third sub-pixel in an excited state is red light, and the light emitted from the fourth sub-pixel in an excited state is green light.

[0016] In the above-mentioned embodiment, an area of the first sub-pixel is substantially equal to an area of the second sub-pixel.

[0017] In the above-mentioned embodiment, an area of the third sub-pixel is substantially equal to an area of the fourth sub-pixel.

[0018] In the above-mentioned embodiment, the first, second, third and fourth sub-pixels in the two neighboring pixel groups are symmetrical with each other with respect to a longitudinal axis that is orthogonal with a direction along which the two neighboring pixel groups are arranged.

[0019] According to one another embodiment, the OLED display includes the OLED display includes a substrate and a plurality of pixel groups arranged in a number of directions on the substrate. Each of the plurality of pixel groups includes a first sub-pixel, a second sub-pixel, a third sub-pixel, and a fourth sub-pixel. The first sub-pixel and the second sub-pixel correspond to the same color, the third sub-pixel and the fourth sub-pixel respectively correspond to two different colors. Along a first of the directions, arrangements of the first, second, third and fourth sub-pixels in two pixel groups of the plurality of pixel groups are symmetrical

with each other. A first distance between the first sub-pixels in the two pixel groups is different from a second distance between the third sub-pixels in the two pixel groups. A reference line is defined to be orthogonal with the first of the directions and between the third sub-pixel and the fourth sub-pixel. There is a third distance between the third sub-pixel and the reference line, there is a fourth distance between the first sub-pixel and the reference line, and there is a fifth distance between the second sub-pixel and the reference line. The third distance is greater than the fourth distance, and the third distance is greater than the fifth distance.

[0020] In the above-mentioned embodiment, one of the two pixel groups is adjacent to another one of the two pixel groups.

[0021] In the above-mentioned embodiment, along the first of the directions, colors of the two pixel groups are symmetrical with each other.

[0022] In the above-mentioned embodiment, the first distance is between a first boundary of the first sub-pixel in a first of the two pixel groups and a second boundary of the first sub-pixel in a second of the two pixel groups, and the second distance is between a third boundary of the third sub-pixel in the first of the two pixel groups and a fourth boundary of the third sub-pixel in the second of the two pixel groups.

[0023] In the above-mentioned embodiment, the third distance is between the third boundary and the reference line, a fourth distance is between the first boundary and the reference line, and a fifth distance is between a fifth boundary of the second sub-pixel and the reference line.

[0024] In the above-mentioned embodiment, regions inside the first, second, third, fourth and fifth boundaries are capable of emitting light.

[0025] In the above-mentioned embodiment, the reference line is separated from the first sub-pixel and the second sub-pixel by a distance.

[0026] In the above-mentioned embodiment, a sixth distance between the fourth sub-pixels in the two pixel groups is the same as the second distance.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] The present invention is more fully understood by reading the subsequent detailed description and examples with references made to the accompanying drawings, wherein:

[0028] FIG. 1 shows a top view of an OLED display of an embodiment of the present disclosure;

[0029] FIG. 2 shows a schematic view of a first and a second lighting element of the OLED display of the embodiment of the present disclosure;

[0030] FIGS. 3A(1), 3A(2), 3B and 3C show masks of some embodiments of the present disclosure;

[0031] FIG. 4 shows a schematic view of a first and a second lighting element of the other embodiment of the present disclosure;

[0032] FIG. 5 shows a schematic view of a first and a second lighting element of the other embodiment of the present disclosure; and

[0033] FIG. 6 shows a schematic view of a first and a second lighting element of the other embodiment of the present disclosure.

DETAILED DESCRIPTION

[0034] Several exemplary embodiments of the application are described with reference to FIGS. 1 through 6. It is to be understood that the following disclosure provides various different embodiments as examples for implementing different features of the application. This description is made for the purpose of illustrating the general principles of the invention and should not be taken in a limiting sense.

[0035] Referring to FIG. 1, in accordance with one embodiment of the present disclosure, the OLED display 1 includes a substrate 10, a plurality of first light-emitting units 100 and a plurality of second light-emitting units 200. Before the plurality of first light-emitting units 100 and plurality second light-emitting units 200 are disposed on the substrate 10, a plurality of pixel electrodes (not shown in figure) are disposed on the substrate 10 in advance, wherein the pixel electrodes are controlled by suitable means so as to implement the operation of the pixels of the OLED display 1.

[0036] In the embodiment, the plurality of first light-emitting units 100 and plurality second light-emitting units 200 arranged in a matrix are formed on the electrode pixels of the substrate 10 by vaporizing, wherein the plurality of first light-emitting units 100 and plurality second light-emitting units 200 are arranged alternatively in a traversal direction to successively define a plurality of pixel unit P on the substrate 10.

[0037] Specifically, referring to FIG. 2, a transverse axis X and a longitudinal axis Y orthogonal to the transverse axis X divide each of the plurality of first light-emitting units 100 into a first region 110, a second region 120, a third region 130 and a fourth region 140, wherein the first and third regions 110, 130 are located at opposite corners of each of the plurality of first light-emitting units 100, and the second and fourth regions 120, 140 are diagonally located at the other opposite corners of the plurality of first light-emitting units 100.

[0038] The plurality of first light-emitting units 100 each include a first light-emissive layer 150, two second light-emissive layers 160 and two third light-emissive layers 170, and the second light-emitting units 200 each include a first light-emissive layer 150. The first light-emissive layer 150 of the plurality of first light-emitting units 100 overlaps with the longitudinal axis Y. The two second light-emissive layers 160 are disposed in the first and second regions 110, 120 and spaced apart from the first light-emissive layer 150 by a distance d1. The two third light-emissive layers 170 are disposed in the third and fourth regions 130, 140 and spaced apart from the first light-emissive layer 150 at a distance d1. Additionally, each second light-emissive layer 160 and each of third light-emissive layer 170 are spaced apart from each other at a distance d2 in a direction parallel to the longitudinal axis Y. The first light-emissive layer 150 of each of the plurality of second light-emitting units 200 has the same arrangement as that of the first light-emissive layer 150 of each of the plurality of first light-emitting units 100 and are adjacent to one of the plurality of first light-emitting units 100 in a direction parallel to the transverse axis X.

[0039] As shown in FIG. 2, the first, second and third light-emissive layers 150, 160 and 170 of each of the plurality of first light-emitting units 100 and the first light-emissive layer 150 of each of the plurality of second light-emitting units 200, respectively, correspond to a plurality of first, second and third sub-pixels B, R and G,

wherein each of the first light-emissive layer **150** corresponds to a plurality of first sub-pixels B which are spaced apart at a distance **d4**, and each second light-emissive layer **160** corresponds to four second sub-pixels R which are spaced apart at a distance **d3**, and each of third light-emissive layer **170** corresponds to four third sub-pixels G which are spaced apart at a distance **d3**. In the embodiment, the light emitted from the first light-emissive layers **150** in an excited state is blue light, the light emitted from the second light-emissive layers **160** in an excited state is red light, and the light emitted from the third light-emissive layers **170** in an excited state is green light.

[0040] One skilled in the art will appreciate that while the first, second and third light-emissive layers **150**, **160** and **170** are successively extended on the regions of the substrate **10**, lights with specific wavelengths can only be able to be emitted from the first, second and third sub-pixels B, R and G when the first, second and third sub-pixels B, R and G, which corresponds to the pixel electrodes (not shown in figure) of the substrate **10**, are excited by electric current. Thus, in FIG. 2, the first, second and third light-emissive layers **150**, **160** and **170** are shown in dashed line, and the first, second and third sub-pixels B, R and G which are capable of emitting light is shown in solid line.

[0041] In this regard, in each of the plurality of first light-emitting units **100** the sub-pixels in the first and fourth regions **110**, **140** and the sub-pixels in the second and third regions **120**, **130** are symmetrical with each other with respect to the longitudinal axis Y, thereby defining two pixel units P in each side of the longitudinal axis Y, wherein each pixel unit P includes one first sub-pixel B, one second sub-pixel R and one third sub-pixel G. Additionally, referring to FIGS. 1 and 2, a plurality of pixel units are defined in between each of the plurality of first light-emitting units **100** and the neighboring first light-emitting unit **100** in a longitudinal axis Y and in between each of the plurality of first light-emitting units **100** and the neighboring second light-emitting unit **200** in a transverse axis X. Moreover, the arrangements of the first, second and third sub-pixels B, R and G in two neighboring pixel units P are symmetrical with each other in the direction parallel to the longitudinal axis Y.

[0042] Due to drawbacks where the blue light-emissive layers tend to malfunction when operating with high electric currents, a method is provided in the embodiment. As shown in FIG. 2, a length of the first sub-pixels B in the direction parallel to the longitudinal axis Y is larger than a length of the second sub-pixels G or a length of the third sub-pixels R in the direction parallel to the longitudinal axis Y. In a single pixel unit P an area of the first sub-pixel B is larger than an area of the second sub-pixel G, and the area of the first sub-pixel is larger than an area of the third sub-pixel R. Thus, a smaller electric current is applied to the first sub-pixels B than that applied to the second and third sub-pixels R and G, and the first, second and third sub-pixels B, R and G may emit lights with same illuminance.

[0043] The manufacturing method of the OLED display **1** is described in detail. Firstly, driving circuits and pixel electrodes (not shown in figures) are formed on the substrate **10**, and metal masks **300**, **400** and **500** shown in FIG. 3A(1)-3C are configured to evaporate organic materials on the substrate **10**. Specifically, the metal mask **300** includes an opening **310** with a rectangular shape, wherein the size and position of the opening **310** are determined according to the size and positions of the first light-emissive layers **150**.

The metal mask **400** includes two rectangular shaped openings **410** and, the sizes and positions of the openings **410** are determined according to the size and positions of the second light-emissive layers **160**. The metal mask **500** includes two rectangular shapes openings **510**, and the sizes and positions of the openings **510** are determined according to the size and positions of the third light-emissive layers **170**.

[0044] In order to allow for tolerance during alignment, the distances between the first, second and third light-emissive layers **150**, **160** and **170** are larger than the distance between the sub-pixels in corresponding light-emissive layers. Specifically, the distance **d2** between one of the second light-emissive layers **160** and one of the third light-emissive layers **170** in a direction parallel to the longitudinal axis Y is larger than the distance **d3** between the second sub-pixels R in each of the second light-emissive layer **160** and is larger than the distance **d3** between the third sub-pixels G in each of the third light-emissive layer **170**. Additionally, the distance **d1** between each of the second light-emissive layer **160** and one of the closest first light-emissive layers **150** in the direction parallel to the transverse axis X or the distance **d1** between each of the third light-emissive layers **170** and one of the closest first light-emissive layers **150** in the direction parallel to the transverse axis X is larger than the distance **d3** between the second sub-pixels R in each of the second light-emissive layer **160** and is larger than the distance **d3** between the third sub-pixels G in each of the third light-emissive layer **170** and is larger than a distance **d4** between the first sub-pixels B in each of the first light-emissive layer **150**.

[0045] Note that, the metal masks **300**, **400** and **500** each have a resolution of 200 pixels per inch (PPI), which are commercially available. In one exemplary embodiment, the distance **d1** ranges about 24.3 ± 12 mm, the distance **d2** ranges about 23.0 ± 12 mm, the distance **d3** ranges about 8 ± 12 mm, and the distance **d4** ranges about 14 ± 12 mm. A width of each pixel unit P ranges about 55 ± 12 mm, such that a display resolution of the OLED display **1** is 460 PPI.

[0046] Referring to FIG. 4, a schematic view of a first and a second light-emitting unit **100a**, **200a** of an OLED display in accordance with another embodiment is shown in FIG. 4, in which elements similar with that of the first and second light-emitting units **100**, **200** shown in FIG. 2 are provided with the same reference numbers, and the features thereof are not reiterated in the interest of brevity. The plurality of first and second light-emitting units **100a**, **200a** differ from the plurality of first and second light-emitting units **100**, **200** in that the two second light-emissive layers **160** are disposed in the second and fourth regions **120a** and **140a**, and the two third light-emissive layers **170** are disposed in the first and third regions **110a** and **130a**. That is, the sub-pixels in the first region **110a** and the sub-pixels in the third region **130a** are point symmetric to a center of each of the plurality of first light-emitting units **100a** and arranged such that the metal mask for vaporizing the organic material may have a better mechanical strength.

[0047] Referring to FIG. 5, a schematic view of a first and a second light-emitting unit **100b**, **200b** of an OLED display in accordance with another embodiment is shown in FIG. 5, in which elements similar with that of the plurality of first and second light-emitting units **100**, **200** shown in FIG. 2 are provided with the same reference numbers, and the features thereof are not reiterated in the interest of brevity. The plurality of first and second light-emitting units **100b**, **200b**

differ from the plurality of first and second light-emitting units **100**, **200** in that each pixel unit P includes two first sub-pixels B, one second sub-pixel R and one sub-pixel G, thereby improving uniformity of illuminance of each pixel unit.

[0048] Referring to FIG. 6, a schematic view of a first and a second light-emitting unit **100c**, **200c** of an OLED display in accordance with another embodiment is shown in FIG. 6, in which elements similar with that of the plurality of first and second light-emitting units **100**, **200** shown in FIG. 2 are provided with the same reference numbers, and the features thereof are not reiterated in the interest of brevity. The plurality of first and second light-emitting units **100c**, **200c** differ from the plurality of first and second light-emitting units **100**, **200** in that in the direction parallel to the longitudinal axis Y the first sub-pixels **150c** are spaced by a first distance d5 and a second distance d6 different from the first distance d5, periodically. While being manufactured, the first light-emissive layers **150c** of the embodiment are evaporated by using a metal mask as shown in FIG. 3A(2).

[0049] By the arrangement of the sub-pixels, the OLED display manufactured by the same processing means as that of a conventional one may have a better display resolution, so as to improve the competitiveness of the OLED display.

[0050] While the invention has been described by way of example and in terms of the embodiment, it is to be understood that the invention is not limited thereto. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:

1. An OLED display, comprising:

a substrate; and

a plurality of pixel groups, arranged in a number of directions on the substrate, wherein each of the plurality of pixel groups comprises:

a first sub-pixel;

a second sub-pixel;

a third sub-pixel; and

a fourth sub-pixel, wherein the first sub-pixel and the second sub-pixel correspond to the same color, the third sub-pixel and the fourth sub-pixel respectively correspond to two different colors,

wherein arrangements of the first, second, third and fourth sub-pixels in two neighboring pixel groups of the plurality of pixel groups are symmetrical with each other, and

wherein there is a first distance between the first sub-pixels in the two neighboring pixel groups, there is a second distance between the second sub-pixels in the two neighboring pixel groups, there is a third distance between the third sub-pixels in the two neighboring pixel groups, and there is a fourth distance between the fourth sub-pixels in the two neighboring pixel groups, and

wherein both the third distance and the fourth distance are greater than the first distance.

2. The OLED display as claimed in claim 1, wherein colors of the first, second, third and fourth sub-pixels in the two neighboring pixel groups are symmetrical with each other.

3. The OLED display as claimed in claim 1, wherein the first sub-pixel, the second sub-pixel, the third sub-pixel and the fourth sub-pixel respectively correspond to a first pixel electrode, a second pixel electrode, a third pixel electrode, and a fourth pixel electrode.

4. The OLED display as claimed in claim 1, wherein the first distance is between a first boundary of the first sub-pixel in a first of the two neighboring pixel groups and a second boundary of the first sub-pixel in a second of the two neighboring pixel groups;

the second distance is between a third boundary of the second sub-pixel in the first of the two neighboring pixel groups and a fourth boundary of the second sub-pixel in the second of the two neighboring pixel groups;

the third distance is between a fifth boundary of the third sub-pixel in the first of the two neighboring pixel groups and a sixth boundary of the third sub-pixel in the second of the two neighboring pixel groups; and

the fourth distance is between a seventh boundary of the fourth sub-pixel in the first of the two neighboring pixel groups and an eighth boundary of the fourth sub-pixel in the second of the two neighboring pixel groups.

5. The OLED display as claimed in claim 4, wherein regions inside the first, second, third, fourth, fifth, sixth, seventh and eighth boundaries are capable of emitting light.

6. The OLED display as claimed in claim 1, wherein the first sub-pixel is arranged closer to the third sub-pixel than the second sub-pixel.

7. An OLED display, comprising:

a substrate; and

a plurality of pixel groups, arranged in a number of directions on the substrate, wherein each of the plurality of pixel groups comprises:

a first sub-pixel;

a second sub-pixel;

a third sub-pixel; and

a fourth sub-pixel, wherein the first sub-pixel and the second sub-pixel correspond to the same color, the third sub-pixel and the fourth sub-pixel respectively correspond to two different colors,

wherein arrangements of the first, second, third and fourth sub-pixels in two neighboring pixel groups of the plurality of pixel groups are symmetrical with each other, and

wherein there is a first distance between the first sub-pixels in the two neighboring pixel groups, there is a second distance between the second sub-pixels in the two neighboring pixel groups, there is a third distance between the third sub-pixels in the two neighboring pixel groups, and there is a fourth distance between the fourth sub-pixels in the two neighboring pixel groups, and

wherein both the third distance and the fourth distance are greater than the second distance.

8. The OLED display as claimed in claim 7, wherein an area of the first sub-pixel is substantially equal to an area of the second sub-pixel.

9. The OLED display as claimed in claim 7, wherein an area of the third sub-pixel is substantially equal to an area of the fourth sub-pixel.

10. The OLED display as claimed in claim 7, wherein the first, second, third and fourth sub-pixels in the two neighboring pixel groups are symmetrical with each other with

respect to a longitudinal axis that is orthogonal with a direction along which the two neighboring pixel groups are arranged.

11. The OLED display as claimed in claim 7, wherein the second sub-pixel is arranged closer to the fourth sub-pixel than the first sub-pixel.

12. An OLED display, comprising:

a substrate;

a plurality of pixel groups, arranged in a number of directions on the substrate, wherein each of the plurality of pixel groups comprises:

a first sub-pixel;

a second sub-pixel;

a third sub-pixel; and

a fourth sub-pixel, wherein the first sub-pixel and the second sub-pixel correspond to the same color, the third sub-pixel and the fourth sub-pixel respectively correspond to two different colors;

wherein along a first of the directions, arrangements of the first, second, third and fourth sub-pixels in two pixel groups of the plurality of pixel groups are symmetrical with each other, and

wherein a first distance between the first sub-pixels in the two pixel groups is different from a second distance between the third sub-pixels in the two pixel groups;

wherein a reference line is defined to be orthogonal with the first of the directions and between the third sub-pixel and the fourth sub-pixel;

wherein there is a third distance between the third sub-pixel and the reference line, there is a fourth distance between the first sub-pixel and the reference line, and there is a fifth distance between the second sub-pixel and the reference line;

wherein the third distance is greater than the fourth distance, and the third distance is greater than the fifth distance.

13. The OLED display as claimed in claim 12, wherein one of the two pixel groups is adjacent to another one of the two pixel groups.

14. The OLED display as claimed in claim 12, wherein along the first of the directions, colors of the two pixel groups are symmetrical with each other.

15. The OLED display as claimed in claim 12, wherein the first distance is between a first boundary of the first sub-pixel in a first of the two pixel groups and a second boundary of the first sub-pixel in a second of the two pixel groups, and the second distance is between a third boundary of the third sub-pixel in the first of the two pixel groups and a fourth boundary of the third sub-pixel in the second of the two pixel groups.

16. The OLED display as claimed in claim 15, wherein the third distance is between the third boundary and the reference line, a fourth distance is between the first boundary and the reference line, and a fifth distance is between a fifth boundary of the second sub-pixel and the reference line.

17. The OLED display as claimed in claim 16, wherein regions inside the first, second, third, fourth and fifth boundaries are capable of emitting light.

18. The OLED display as claimed in claim 12, wherein the reference line is separated from the first sub-pixel and the second sub-pixel by a distance.

19. The OLED display as claimed in claim 12, wherein a sixth distance between the fourth sub-pixels in the two pixel groups is the same as the second distance.

* * * * *

专利名称(译)	OLED显示屏		
公开(公告)号	US20160315126A1	公开(公告)日	2016-10-27
申请号	US15/202030	申请日	2016-07-05
[标]申请(专利权)人(译)	群创光电股份有限公司		
申请(专利权)人(译)	群创光电		
当前申请(专利权)人(译)	群创光电		
[标]发明人	HUANG HAO JUNG KANG CHIA PIN LIN CHE WEI CHOU HAO YU		
发明人	HUANG, HAO-JUNG KANG, CHIA-PIN LIN, CHE-WEI CHOU, HAO-YU		
IPC分类号	H01L27/32 H01L51/00		
CPC分类号	H01L27/3216 H01L27/3218 H01L51/0011 H01L51/001 H01L27/3209 H01L27/326 H01L51/0068 H01L51/0545 H01L51/50 H01L51/504		
优先权	102107438 2013-03-04 TW		
其他公开文献	US9859341		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种OLED显示器，其包括衬底和布置在衬底上的多个像素组。每个像素组包括第一，第二，第三和第四子像素。两个相邻像素组中的第一，第二，第三和第四子像素的排列彼此对称。另外，两个相邻像素组中的第三子像素之间的距离和第四子像素之间的距离大于两个相邻像素组中的第一子像素之间的距离。

