



US 20200075881A1

(19) **United States**

(12) **Patent Application Publication**
Quan

(10) **Pub. No.: US 2020/0075881 A1**
(43) **Pub. Date: Mar. 5, 2020**

(54) **ELECTROLUMINESCENT DEVICE,
DISPLAY PANEL AND DISPLAY APPARATUS**

(52) **U.S. Cl.**
CPC *H01L 51/5206* (2013.01); *H04N 9/31*
(2013.01); *H01L 27/3209* (2013.01); *H01L*
51/5221 (2013.01)

(71) Applicant: **BOE TECHNOLOGY GROUP CO.,
LTD.**, Beijing (CN)

(72) Inventor: **Wei Quan**, Beijing (CN)

(21) Appl. No.: **16/434,070**

(22) Filed: **Jun. 6, 2019**

(30) **Foreign Application Priority Data**


Aug. 31, 2018 (CN) 201811012798.6

Publication Classification

(51) **Int. Cl.**
H01L 51/52 (2006.01)
H01L 27/32 (2006.01)
H04N 9/31 (2006.01)

(57) **ABSTRACT**

An electroluminescent device, a display panel and a display apparatus are disclosed. The electroluminescent device includes: a substrate; an anode on the substrate; a luminescent layer on a side of the anode facing away from the substrate; and a cathode on a side of the luminescent layer facing away from the substrate. The cathode includes a transmissive layer on the side of the luminescent layer facing away from the substrate; and a light-emission enhancement layer on a side of the transmissive layer facing away from the substrate. The anode is configured to reflect light incident thereon, a material of the transmissive layer includes metal, and the transmissive layer is configured to transmit a first portion of light incident thereon and to reflect a second portion of the light incident thereon.

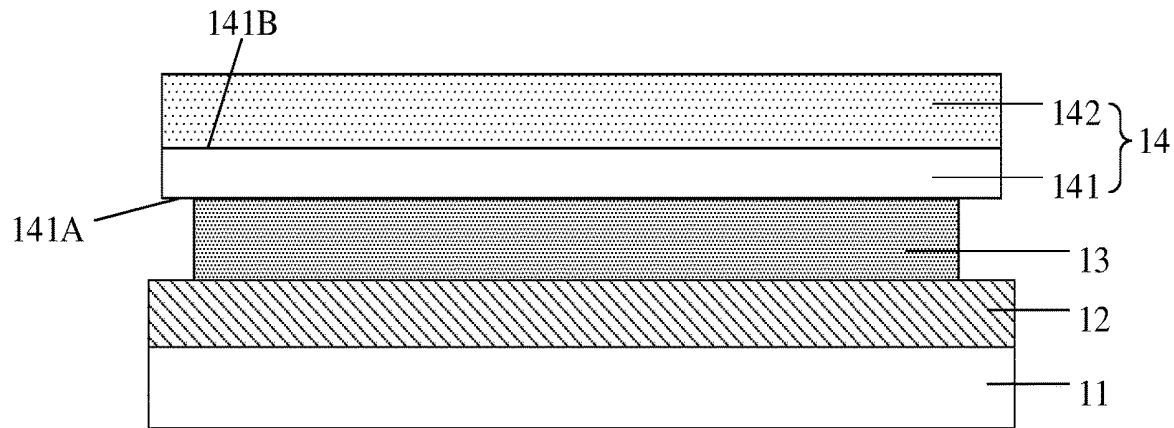

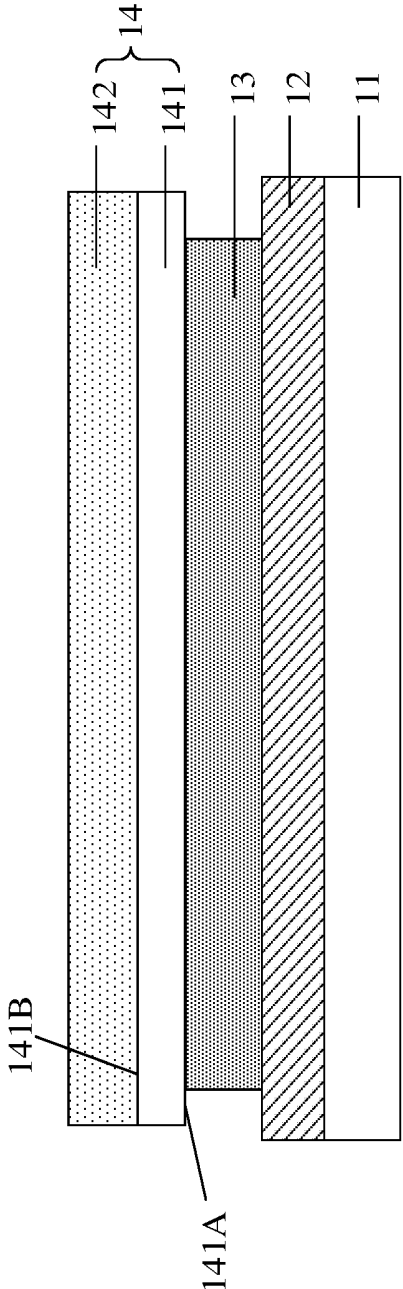


FIG. 1

13



FIG. 2

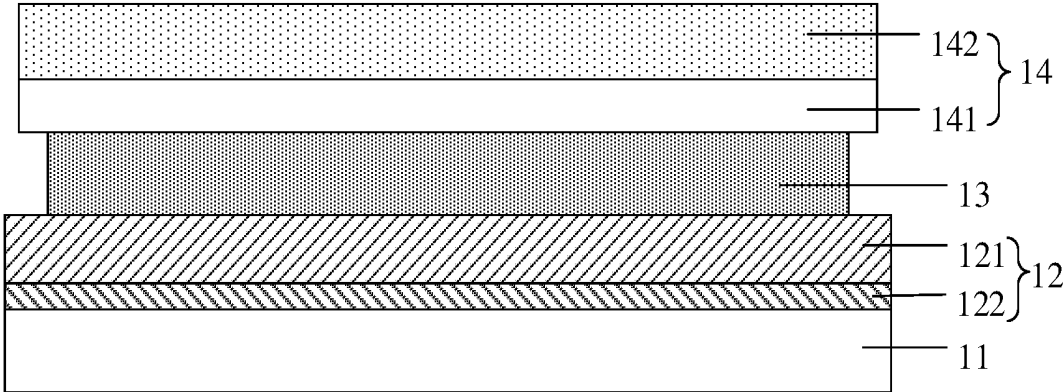


FIG. 3

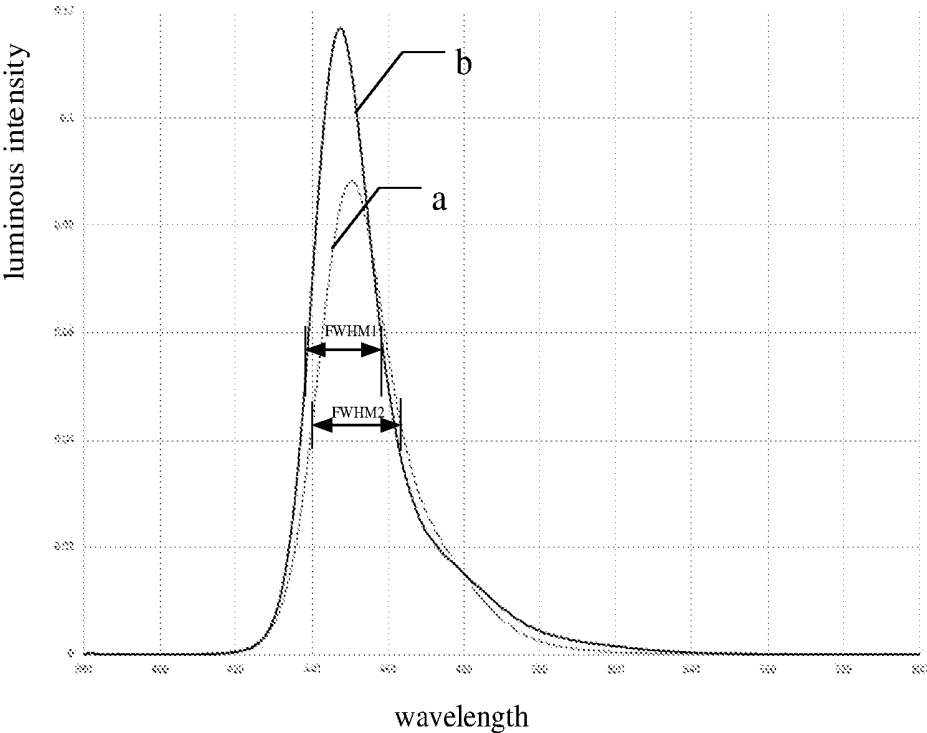


FIG. 4

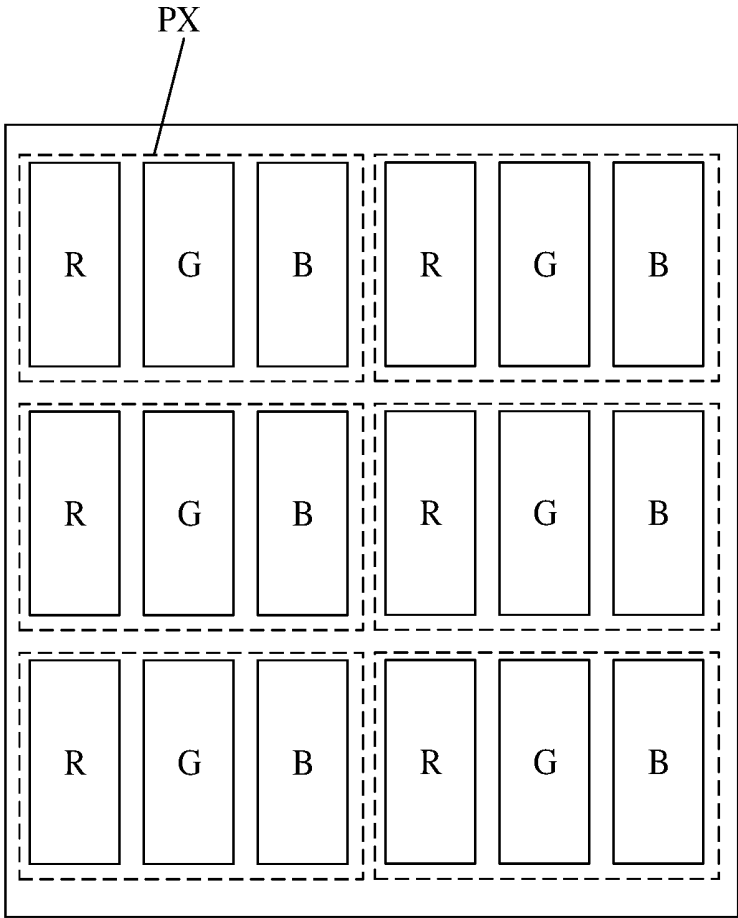


FIG. 5

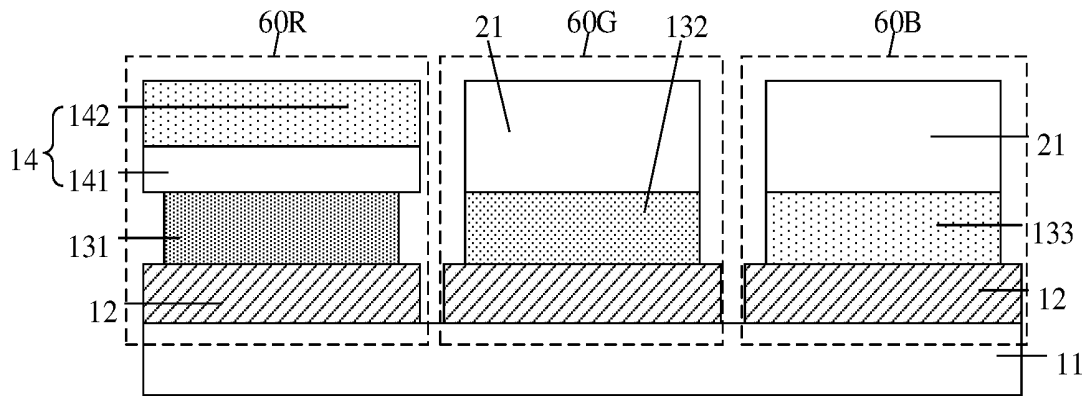


FIG. 6

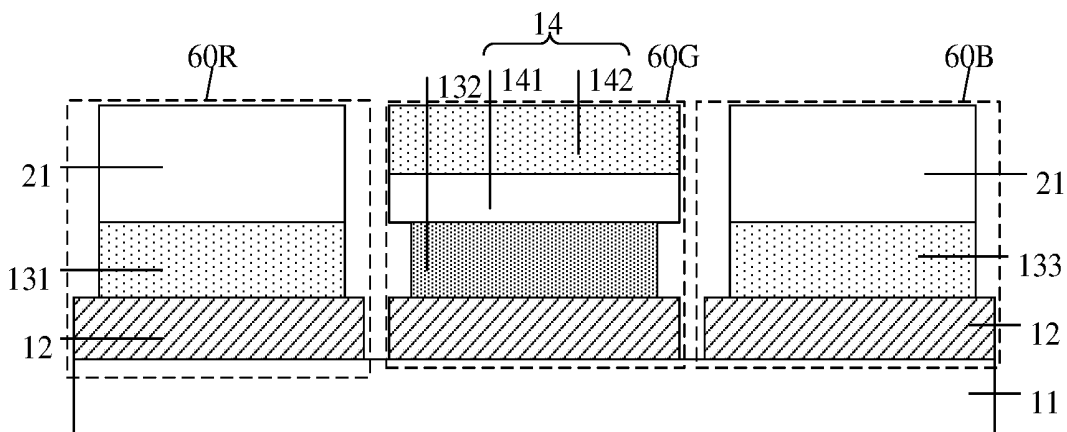


FIG. 7

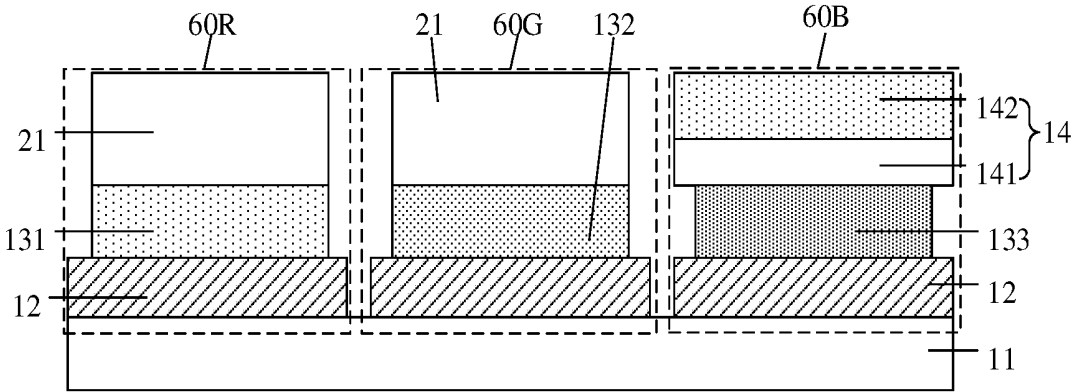


FIG. 8

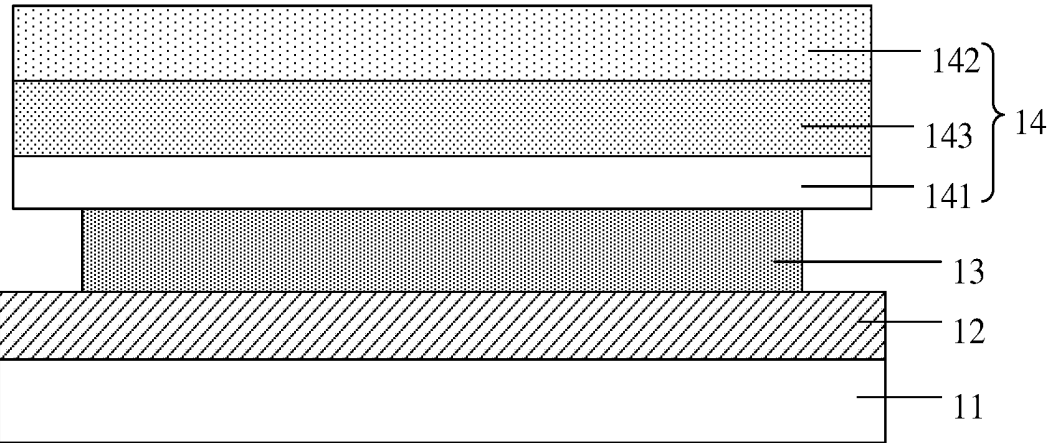


FIG. 9

ELECTROLUMINESCENT DEVICE, DISPLAY PANEL AND DISPLAY APPARATUS

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims the benefit of Chinese Patent Application No. 201811012798.6 filed on Aug. 31, 2018 in the State Intellectual Property Office of China, the whole disclosure of which is incorporated herein by reference.

TECHNICAL FIELD

[0002] The present disclosure relates to the field of display technologies, and in particular, to an electroluminescent device, a display panel and a display apparatus.

BACKGROUND

[0003] Organic light emitting diode (abbreviated as OLED) devices have many advantages such as active illumination, high brightness, high contrast, ultra-thin characteristic, low power consumption, flexibility and wide operating temperature range, so that they have become an extremely competitive and most promising technology in next-generation display technologies.

[0004] Due to factors such as the manufacturing process, a manufactured organic electroluminescent device is usually subjected to a situation in which light emitted therefrom of a certain color does not meet an actual requirement. For example, actually required color is dark blue, but the light emitted from the manufactured organic electroluminescent device is light blue, so that the light emitted from the organic electroluminescent device does not meet the requirement, thereby affecting display effect adversely.

SUMMARY

[0005] In an aspect, an electroluminescent device is provided including: a substrate; an anode on the substrate; a luminescent layer on a side of the anode facing away from the substrate; and a cathode on a side of the luminescent layer facing away from the substrate, the cathode including: a transfective layer on the side of the luminescent layer facing away from the substrate; and a light-emission enhancement layer on a side of the transfective layer facing away from the substrate, wherein the anode is configured to reflect light incident thereon, a material of the transfective layer includes metal, and the transfective layer is configured to transmit a first portion of light incident thereon and to reflect a second portion of the light incident thereon.

[0006] Optionally, the material of the transfective layer includes a magnesium-silver alloy.

[0007] Optionally, a thickness of the light-emission enhancement layer is related to a material of the luminescent layer.

[0008] Optionally, the luminescent layer is a luminescent layer that emits red light, and the thickness of the light-emission enhancement layer is in a range of 110 nm to 120 nm. Alternatively or additionally, the luminescent layer is a luminescent layer that emits green light, and the thickness of the light-emission enhancement layer is in a range of 90 nm to 100 nm. Alternatively or additionally, the luminescent layer is a luminescent layer that emits blue light, and the thickness of the light-emission enhancement layer is in a range of 80 nm to 90 nm.

[0009] Optionally, a material of the light-emission enhancement layer includes a transparent oxide.

[0010] Optionally, the transfective layer has a thickness greater than 8 nm.

[0011] Optionally, the cathode further includes an electrode layer between the transfective layer and the light-emission enhancement layer.

[0012] Optionally, an orthographic projection of each of the anode, the transfective layer and the light-emission enhancement layer on the substrate covers an orthographic projection of the luminescent layer on the substrate.

[0013] Optionally, a thickness of the electrode layer is determined according to a design resistance value of the cathode, a thickness of the transfective layer, and a thickness of the light-emission enhancement layer.

[0014] Optionally, the electrode layer includes the same material as the light-emission enhancement layer.

[0015] Optionally, a material of the electrode layer includes a transparent oxide.

[0016] Optionally, the anode includes: a conductive anode layer on the substrate; and a reflective layer between the conductive anode layer and the substrate.

[0017] Optionally, a material of the reflective layer includes silver.

[0018] Optionally, the luminescent layer includes an organic electroluminescent material.

[0019] In another aspect, a display panel is further provided including the electroluminescent device as described above.

[0020] In a further aspect, a display apparatus is further provided including the display panel as described above.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] FIG. 1 is a schematic structural view of an organic electroluminescent device according to some embodiments of the present disclosure;

[0022] FIG. 2 is a schematic structural view of a luminescent layer of an organic electroluminescent device;

[0023] FIG. 3 is a schematic structural view of an organic electroluminescent device according to some embodiments of the present disclosure;

[0024] FIG. 4 is a spectrogram of light emitted from the organic electroluminescent device according to some embodiments of the present disclosure;

[0025] FIG. 5 is a plan view of an electroluminescent display panel according to some embodiments of the present disclosure;

[0026] FIGS. 6-8 are schematic structural views of organic electroluminescent devices in a pixel according to some embodiments of the present disclosure; and

[0027] FIG. 9 is a schematic structural view of an organic electroluminescent device according to some embodiments of the present disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

[0028] In order to make objectives, characteristics and advantages of the present disclosure become more apparent, the present disclosure will be described in detail in conjunction with the accompanying drawings and specific embodiments.

[0029] Referring to FIG. 1, a schematic structural view of an organic electroluminescent device according to some embodiments of the present disclosure is shown. The

organic electroluminescent device according to some embodiments of the present disclosure includes a substrate **11**, an anode **12**, a luminescent layer **13**, and a cathode **14** which are sequentially formed on the substrate **11**. The cathode **14** includes a transfective layer **141** and a light-emission enhancement layer **142** which are sequentially formed on the luminescent layer **13**. In other words, the luminescent layer **13** is disposed on a side of the anode **12** facing away from the substrate **11**, the transfective layer **141** is disposed on a side of the luminescent layer **13** facing away from the substrate **11**, and the light-emission enhancement layer **142** is disposed on a side of the transfective layer **141** facing away from the substrate **11**.

[0030] For example, referring to FIG. 2, the luminescent layer **13** may include a plurality of functional layers such as a hole injection layer **134**, a hole transport layer **135**, an organic luminescent material layer **136**, an electron transport layer **137**, and an electron injection layer **138**. When a voltage applied between the anode and the cathode of the organic electroluminescent device is greater than a threshold voltage of the device, holes are injected into the organic luminescent material layer from the anode through the hole injection layer and the hole transport layer, meanwhile, electrons are injected into the organic luminescent material layer from the cathode through the electron injection layer and the electron transport layer. In the organic luminescent material layer, electrons and holes meet to form excitons under Coulomb force. The excitons have energy and are typically unstable, so that they release energy in the form of light energy, thereby emitting light. It should be noted that, depending on the energy of the excitons, photons of different energies may be emitted so as to emit light of different colors.

[0031] Herein, the transfective layer **141** may be understood as transmitting a portion of light incident thereon and reflecting the other portion of the light incident thereon. For example, an amount of the transmitted portion of the light incident on the transfective layer **141** is equal to an amount of the reflected portion of the light incident on the transfective layer **141**, that is, about a half of the light incident on the transfective layer **141** is transmitted through the transfective layer **141** while the other half of the light incident on the transfective layer **141** is reflected by the transfective layer **141**. In the embodiment, the transfective layer **141** may transmit a portion of light which is emitted from the luminescent layer **13** and incident on the transfective layer **141** and reflect the other portion of the light which is emitted from the luminescent layer **13** and incident on the transfective layer **141**. For example, about 50% of the light which is emitted from the luminescent layer **13** and incident on the transfective layer **141** is transmitted through the transfective layer **141** and about 50% of the light which is emitted from the luminescent layer **13** and incident on the transfective layer **141** is reflected by the transfective layer **141**.

[0032] For example, the transfective layer **141** may have a thickness greater than 8 nm to achieve a better transfective effect. Through a lot of experiments, the inventors have found that when the thickness of the transfective layer **141** is less than 8 nm, most of the light which is emitted from the luminescent layer **13** and incident on the transfective layer **141** is transmitted through the transfective layer **141**, so that it is disadvantageous to achieve a transfective effect.

[0033] Referring again to FIG. 1, the anode **12** may be of reflective so as to reflect light incident thereon, for example, to reflect light which is emitted from the luminescent layer **13** and incident on the anode. The anode **12** is capable of reflecting almost all of the light incident thereon. For example, the anode **12** itself may be a reflective anode. For another example, referring to FIG. 3, the anode **12** may further include a conductive anode layer **121** and a reflective layer **122**. For example, the conductive anode layer **121** may be composed of a transparent oxide such as indium tin oxide (ITO) or indium zinc oxide (IZO), and the reflective layer **122** may be composed of metal such as silver.

[0034] As shown in FIG. 1, an orthographic projection of the anode **12** on the substrate **11** covers an orthographic projection of the luminescent layer **13** on the substrate **11**, and an orthographic projection of the transfective layer **141** on the substrate **11** covers the orthographic projection of the luminescent layer **13** on the substrate **11**. When a voltage is applied between the anode **12** and the cathode **14** so that the luminescent layer **13** emits light, since the luminescent layer **13** is located between the transfective layer **141** and the anode **12**, almost all of light is reflected back by the anode **12** when the light is emitted from the luminescent layer **13** and incident on the anode **12**, and about 50% of light is reflected back by the transfective layer **141** when the light is emitted from the luminescent layer **13** and incident on the transfective layer **141**. As a result, a microcavity is formed between the transfective layer **141** and the anode **12**. The light emitted from the luminescent layer **13** may interfere with each other in the microcavity through refraction and reflection, thereby generating a microcavity resonance effect. In this way, a portion, at a specific wavelength, of the light emitted from the luminescent layer **13** is emitted out, thereby narrowing an emission spectrum and enhancing a luminous intensity of light at the specific wavelength.

[0035] Further, in the embodiment of the present disclosure, the transfective layer **141** is composed of metal material, so that surface plasmons are generated when the light emitted from the luminescent layer **13** is incident on the transfective layer **141**. The so-called surface plasmons (SPs) refer to an electromagnetic wave which is generated under an interaction between electrons vibrating free on a metal surface and photons and propagates along the metal surface. Typically, the electromagnetic wave has the largest field strength at an interface between a metal and a medium, and the field strength of the electromagnetic wave exponentially decays in a direction perpendicular to the interface. For example, in the organic electroluminescent device provided by the above embodiments, the generated excitons interact with a metal electrode (e.g., the transfective layer **141**) so as to generate the surface plasmons.

[0036] For example, a material of the transfective layer **141** may include a magnesium-silver alloy so as to achieve both a transfective effect and a surface plasmon effect. The light-emission enhancement layer **142** may be composed of a transparent oxide such as indium tin oxide (ITO) or indium zinc oxide (IZO).

[0037] Specifically, the excitons in the luminescent layer **13** may couple energy to an upper interface and a lower interface of the cathode metal (e.g., the transfective layer **141**). Referring to FIG. 1, the upper interface and the lower interface herein may be a first interface **141A** of the transfective layer **141** facing towards the luminescent layer **13** and a second interface **141B** of the transfective layer **141**

facing away from the luminescent layer 13, respectively. By modeling an exciton radiation as electric dipole radiation, the inventors have found through research that the surface plasmon loss at the first interface 141A is large, so that it is disadvantageous for the light emitted from the luminescent layer 13 to be emitted through the transfective layer 141. In the embodiments of the present disclosure, the light-emission enhancement layer 142 is disposed on a side of the transfective layer 141 facing away from the luminescent layer 13, so that two medium layers, i.e., the luminescent layer 13 and the light-emission enhancement layer 142, are respectively disposed on both sides of the transfective layer 141. When effective refractive indices of the medium layers on both sides of the transfective layer 141 match with each other, the surface plasmon effects at the two interfaces are coupled to each other, so that an electric field of the surface plasmons is capable of passing through the transfective layer 141.

[0038] Therefore, in the embodiments of the present disclosure, by designing a thickness of the light-emission enhancement layer 142, the effective refractive indices of the medium layers on both sides of the transfective layer 141 are better matched, so that the surface plasmon effects at the two interfaces are mutually coupled to the maximum extent. In this way, the light at the specific wavelength which is transmitted through the transfective layer 141 may be further narrowed, and the luminous intensity of the light at the specific wavelength may be further enhanced.

[0039] In the embodiments of the present disclosure, a first microcavity is formed between the transfective layer 141 and the reflective anode 12, and a portion, at the specific wavelength, of light emitted from the luminescent layer 13 is emitted out under the microcavity resonance effect, thereby narrowing the emission spectrum and enhancing the luminous intensity of the light at the specific wavelength. Further, by providing the light-emission enhancement layer 142 on the metal transfective layer 141, the light at the specific wavelength transmitted through the transfective layer 141 may be further narrowed and the luminous intensity of the light at the specific wavelength may be further enhanced by using the energy coupling of the surface plasmons. Therefore, the light-emission enhancement layer 142 may achieve an effect similar to a second microcavity.

[0040] For example, the anode 12 may be formed on the substrate 11 by a sputtering process, the luminescent layer 13 may be formed on the anode 12 by a process such as vacuum evaporation or printing, the transfective layer 141 may be formed on the luminescent layer 13 by an evaporation process, and the light-emission enhancement layer 142 may be formed on the transfective layer 141 by a sputtering process.

[0041] Referring to FIG. 4, a spectrogram of light emitted from the organic electroluminescent device according to some embodiments of the present disclosure is illustrated.

[0042] In FIG. 4, the abscissa represents the wavelength of light emitted from the organic electroluminescent device, the ordinate represents the luminous intensity of the light emitted from the organic electroluminescent device, curve a represents a spectrogram of light emitted from an organic electroluminescent device in the related art, and curve b represents a spectrogram of light emitted from the organic electroluminescent device according to some embodiments of the present disclosure. It can be seen that the full width at half maximum (abbreviated as FWHM) of the light

emitted from the organic electroluminescent device according to the embodiments of the present disclosure has a narrower wavelength range, as shown in FIG. 4, $FWHM1 < FWHM2$. Also, the light emitted from the organic electroluminescent device according to the embodiments of the present disclosure has a larger luminous intensity. In other words, with the organic electroluminescent device according to the embodiments of the present disclosure, it is possible to narrow the light at the specific wavelength and enhance the luminous intensity of light at the specific wavelength, so that the color gamut may be improved, and the light emitted from the organic electroluminescent device may meet an actual requirement.

[0043] FIG. 5 is a plan view of an electroluminescent display panel according to some embodiments of the present disclosure. As shown in FIG. 5, the electroluminescent display panel may include a plurality of pixels PX, each of which may include a plurality of sub-pixels, for example, one pixel may include a red sub-pixel R, a green sub-pixel G, and a blue sub-pixel B.

[0044] FIGS. 6-8 are schematic structural views of organic electroluminescent devices in a pixel according to some embodiments of the present disclosure. As shown in FIGS. 6-8, an organic electroluminescent device may be disposed in each sub-pixel, that is, the red sub-pixel R, the green sub-pixel G, and the blue sub-pixel B are respectively provided with an organic electroluminescent device 60R that emits red light, an organic electroluminescent device 60G that emits green light, and an organic electroluminescent device 60B that emits blue light.

[0045] Due to factors such as the actual manufacturing process, it may happen that the color of light emitted from one of the organic electroluminescent devices 60R, 60G, and 60B does not meet the actual requirement. In this case, even if thicknesses of both the anode 12 and the luminescent layer 13 of the organic electroluminescent device cannot be adjusted, the cathode 14 may be adjusted to narrow the emission spectrum and enhance the luminous intensity of the light at the specific wavelength, so that the light emitted through the cathode 14 meets the actual requirement, thereby improving the display effect.

[0046] Referring to FIG. 6, the organic electroluminescent device 60R which emits red light may adopt the structure described in the embodiments of the present disclosure. Specifically, the organic electroluminescent device 60R may include an anode 12, a luminescent layer 131 for emitting red light, and a cathode 14 which are sequentially formed on the substrate 11, and the cathode 14 includes the transfective layer 141 and the light-emission enhancement layer 142 which are sequentially formed on the luminescent layer 131. An orthographic projection of each of the anode 12, the transfective layer 141, and the light-emission enhancement layer 142 on the substrate 11 covers an orthographic projection of the luminescent layer 131 on the substrate 11. As described above, the first microcavity is formed between the anode 12 and the transfective layer 141, and a portion, at the specific wavelength, of light emitted from the luminescent layer 131 is emitted out under the microcavity resonance effect, so as to narrow the emission spectrum and enhance the luminous intensity of light at the specific wavelength, that is, to narrow the spectrum of the emitted red light and enhance the luminous intensity of the red light.

[0047] Further, since materials of the luminescent layers for emitting red light, green light, and blue light are differ-

ent, the thicknesses of the light-emission enhancement layers **142** in the organic electroluminescent devices that emit different colors need to be designed differently so as to achieve matching of effective refractive indices. That is to say, the thickness of the light-emission enhancement layer **142** is related to the material of the luminescent layer, so that it is necessary to design the thickness of the light-emission enhancement layer **142** according to the material of the luminescent layer. In the embodiments, the thickness of the light-emission enhancement layer **142** is designed to be in a range of 110 nm to 120 nm, so that the effective refractive indices of the luminescent layer **131** for emitting red light and the light-emission enhancement layer **142** on both sides of the transfective layer **141** are better matched with each other, so that it is possible to further narrow the red light transmitted through the transfective layer **141** and further enhance the luminous intensity of the red light.

[0048] For example, the organic electroluminescent device **60G** that emits green light may include an anode **12**, a luminescent layer **132** for emitting green light, and a cathode **21** which are sequentially formed on the substrate **11**. The organic electroluminescent device **60B** that emits blue light may include an anode **12**, a luminescent layer **133** for emitting blue light, and a cathode **21** which are sequentially formed on the substrate **11**. For example, the cathode **21** may be a transparent cathode composed of a transparent oxide such as indium tin oxide (ITO) or indium zinc oxide (IZO). The anode **12** is still a reflective anode. The light emitted from the luminescent layers **132** and **133** is transmitted through the transparent cathode **21** to be emitted out.

[0049] Similarly, referring to FIG. 7, the organic electroluminescent device **60G** that emits green light may adopt the structure described in the embodiments of the present disclosure. Specifically, the organic electroluminescent device **60G** may include an anode **12**, a luminescent layer **132** for emitting green light, and a cathode **14** which are sequentially formed on the substrate **11**, and the cathode **14** includes a transfective layer **141** and a light-emission enhancement layer **142** which are sequentially formed on the luminescent layer **132**. The orthographic projection of each of the anode **12**, the transfective layer **141**, and the light-emission enhancement layer **142** on the substrate **11** covers the orthographic projection of the luminescent layer **132** on the substrate **11**. As described above, the first microcavity is formed between the anode **12** and the transfective layer **141**, and a portion, at the specific wavelength, of light emitted from the luminescent layer **132** is emitted out under the microcavity resonance effect, so as to narrow the emission spectrum and enhance the luminous intensity of light at the specific wavelength, that is, to narrow the spectrum of the emitted green light and enhance the luminous intensity of the green light.

[0050] Further, in the embodiments, the thickness of the light-emission enhancement layer **142** is designed to be in a range of 90 nm to 100 nm, so that the effective refractive indices of the luminescent layer **132** for emitting green light and the light-emission enhancement layer **142** on both sides of the transfective layer **141** are better matched with each other, so that it is possible to further narrow the green light transmitted through the transfective layer **141** and further enhance the luminous intensity of the green light.

[0051] Similarly, referring to FIG. 8, the organic electroluminescent device **60B** that emits blue light may adopt the structure described in the embodiments of the present dis-

closure. Specifically, the organic electroluminescent device **60B** may include an anode **12**, a luminescent layer **133** for emitting blue light, and a cathode **14** which are sequentially formed on the substrate **11**, and the cathode **14** includes a transfective layer **141** and a light-emission enhancement layer **142** which are sequentially formed on the luminescent layer **133**. The orthographic projection of each of the anode **12**, the transfective layer **141**, and the light-emission enhancement layer **142** on the substrate **11** covers the orthographic projection of the luminescent layer **133** on the substrate **11**. As described above, the first microcavity is formed between the anode **12** and the transfective layer **141**, and a portion, at the specific wavelength, of light emitted from the luminescent layer **133** is emitted out under the microcavity resonance effect, so as to narrow the emission spectrum and enhance the luminous intensity of light at the specific wavelength, that is, to narrow the spectrum of the emitted blue light and enhance the luminous intensity of the blue light.

[0052] Further, in the embodiments, the thickness of the light-emission enhancement layer **142** is designed to be in a range of 80 nm to 90 nm, so that the effective refractive indices of the luminescent layer **133** for emitting blue light and the light-emission enhancement layer **142** on both sides of the transfective layer **141** are better matched with each other, so that it is possible to further narrow the blue light transmitted through the transfective layer **141** and further enhance the luminous intensity of the blue light.

[0053] For example, in an actual manufacturing process, it is first determined which color of light in a pixel needs to be improved. As shown in FIG. 6, when the red light in the pixel needs to be improved, the transfective layer **141** and the light-emission enhancement layer **142** are sequentially formed on the luminescent layer **131** for emitting red light, and the thickness of the light-emission enhancement layer **142** is in a range of 110 nm to 120 nm, so that the luminous intensity of the red light emitted from the luminescent layer **131** is improved. Also, each of the luminescent layer **132** for emitting green light and the luminescent layer **133** for emitting blue light may merely adopt the structure of the cathode **21**. As shown in FIG. 7, when the green light in the pixel needs to be improved, the transfective layer **141** and the light-emission enhancement layer **142** are sequentially formed on the luminescent layer **132** for emitting green light, and the thickness of the light-emission enhancement layer **142** is in a range of 90 nm to 100 nm, so that the luminous intensity of the green light emitted from the luminescent layer **132** is improved. Also, each of the luminescent layer **131** for emitting red light and the luminescent layer **133** for emitting blue light may merely adopt the structure of the cathode **21**. As shown in FIG. 8, when the blue light in the pixel needs to be improved, the transfective layer **141** and the light-emission enhancement layer **142** are sequentially formed on the luminescent layer **133** for emitting blue light, and the thickness of the light-emission enhancement layer **142** is in a range of 80 nm to 90 nm, so that the luminous intensity of the blue light emitted from the luminescent layer **133** is improved. Also, each of the luminescent layer **131** for emitting red light and the luminescent layer **132** for emitting green light may merely adopt the structure of the cathode **21**.

[0054] In the embodiments of the present disclosure, by sequentially forming the transfective layer **141** and the light-emission enhancement layer **142** on the luminescent

layer **133** for emitting blue light, the wavelength range of the blue light emitted from the luminescent layer **133** for emitting blue light is narrowed, and the luminous intensity of the blue light is enhanced, thereby increasing the color gamut. In this way, the blue light emitted from the organic electroluminescent device may meet the actual requirement. For example, the actual required color is dark blue, if the cathode **21** is formed directly on the luminescent layer **133** for emitting blue light, then the emitted blue light has a wide wavelength range and the luminous intensity is small, so that the actually emitted blue light is light blue, which is not consistent with the actually required color. By using the cathode structure according to the embodiments of the present disclosure, the wavelength range of the emitted blue light is narrowed, and the luminous intensity of the blue light is enhanced, so that the actually emitted blue light is dark blue, which is consistent with the actual requirement.

[0055] Correspondingly, by sequentially forming the transfective layer **141** and the light-emission enhancement layer **142** on the luminescent layer **131** for emitting red light, the wavelength range of the red light emitted from the luminescent layer **131** for emitting red light is narrowed, and the luminous intensity of the red light is enhanced, thereby increasing the color gamut. In this way, the red light emitted from the organic electroluminescent device may meet the actual requirement. By sequentially forming the transfective layer **141** and the light-emission enhancement layer **142** on the luminescent layer **132** for emitting green light, the wavelength range of the green light emitted from the luminescent layer **132** for emitting green light is narrowed, and the luminous intensity of the green light is enhanced, thereby increasing the color gamut. In this way, the green light emitted from the organic electroluminescent device may meet the actual requirement.

[0056] Referring to FIG. 9, a schematic structural view of an organic electroluminescent device according to some embodiments of the present disclosure is illustrated. As shown in FIG. 9, the organic electroluminescent device may include a substrate **11**, an anode **12**, a luminescent layer **13**, and a cathode **14** which are sequentially formed on the substrate **11**, and the cathode **14** includes a transfective layer **141**, an electrode layer **143**, and a light-emission enhancement layer **142** which are sequentially formed on the luminescent layer **13**. The electrode layer **143** is located between the transfective layer **141** and the light-emission enhancement layer **142**. The electrode layer **143** may be composed of the same material as the light-emission enhancement layer **142**. For example, the material of the electrode layer **143** may also include the transparent oxide such as indium tin oxide or indium zinc oxide. Thus, the electrode layer **143** does not affect the surface plasmon effect described above, and it is also advantageous to manufacture the electrode layer.

[0057] For example, the thickness of the electrode layer **143** may be determined according to a design resistance value of the cathode as well as the thicknesses of both the transfective layer **141** and the light-emission enhancement layer **142**. After the thicknesses of both the transfective layer **141** and the light-emission enhancement layer **142** are determined, the resistance values of both the transfective layer **141** and the light-emission enhancement layer **142** are obtained. By subtracting an actually required cathode resistance value from a sum of the resistance values of both the transfective layer **141** and the light-emission enhancement

layer **142**, a resistance value of the electrode layer **143** is obtained, so that the thickness of the electrode layer **143** is determined.

[0058] For example, the sum of the resistance values of both the transfective layer **141** and the light-emission enhancement layer **142** may be 7Ω , and the actually required cathode resistance value may be 5Ω , thus the resistance value of the electrode layer **143** is 2Ω . Further, the thickness of the electrode layer **143** is determined according to the resistance value of the electrode layer **143**.

[0059] The electrode layer **143** is mainly used to adjust the resistance value of the cathode **14** such that the resistance value of the cathode **14** meets the display requirement. Moreover, by adding the electrode layer **143**, the total thickness of the cathode **14** may be increased, so that the resistivity of the cathode may be lowered, and the problem of IR Drop occurring in a large-sized display apparatus may be prevented.

[0060] For example, the anode **12** may be formed on the substrate **11** by a sputtering process, the luminescent layer **13** may be formed on the anode **12** by a process such as vacuum evaporation or printing, the transfective layer **141** may be formed on the luminescent layer **13** by an evaporation process, the electrode layer **143** may be formed on the transfective layer **141** by a sputtering process, and then the light-emission enhancement layer **142** may be formed on the electrode layer **143** by a sputtering process.

[0061] It should be noted that the organic electroluminescent device in the embodiments of the present disclosure is a top emission organic electroluminescent device, and the light emitted from the luminescent layer **13** is emitted out through the cathode **14**.

[0062] In the embodiments of the present disclosure, the anode, the luminescent layer, and the cathode are sequentially formed on the substrate, and the cathode includes the transfective layer and the light-emission enhancement layer which are sequentially formed on the luminescent layer. By forming the transfective layer on the luminescent layer, the microcavity resonance effect is generated between the anode and the transfective layer, so that a portion, at the specific wavelength, of light emitted from the luminescent layer is emitted out. By forming the light-emission enhancement layer on the transfective layer, the luminous intensity of the light at the specific wavelength is further enhanced. In this way, the light emitted from the organic electroluminescent device meets the requirement, thus the display effect is improved.

[0063] Referring back to FIGS. 5-8, embodiments of the present disclosure provide a display panel including the above-described organic electroluminescent device. For a detailed description of the organic electroluminescent device, references may be made to the above descriptions, and details are not described herein again.

[0064] Some embodiments of the present disclosure further provide a display apparatus including the above-described display panel, and the display panel may be a top emission OLED display panel. For example, the display apparatus may be any product or component having a display function, such as a mobile phone, a tablet computer, a television, a display, a notebook computer, a navigator, and the like.

[0065] In some embodiments of the present disclosure, the display panel includes an organic electroluminescent device, the anode, the luminescent layer, and the cathode are

sequentially formed on the substrate, and the cathode includes the transfective layer and the light-emission enhancement layer which are sequentially formed on the luminescent layer. By forming the transfective layer on the luminescent layer, the microcavity resonance effect is generated between the anode and the transfective layer, so that a portion, at the specific wavelength, of light emitted from the luminescent layer is emitted out. By forming the light-emission enhancement layer on the transfective layer, the luminous intensity of the light at the specific wavelength is further enhanced. In this way, the light emitted from the organic electroluminescence device meets the requirement, thus the display effect is improved.

[0066] The embodiments of the present disclosure have been described by taking an OLED device as an example, but the embodiments of the present disclosure may also be applied to other types of electroluminescent devices, such as inorganic electroluminescent devices, quantum dot electroluminescent devices.

[0067] It should be noted that various embodiments herein are described in a progressive manner, and each embodiment is described by focusing on differences from other embodiments, and the same or similar parts between any two embodiments may be referred to each other.

[0068] It should also be noted that, relational terms such as first, second or the like are used merely to distinguish one entity or operation from another entity or operation, without necessarily requiring or implying these entities or operations have any such actual relationships or orders. Furthermore, terms “comprise”, “comprising” or any other variations are intended to encompass a non-exclusive inclusion, such that a process, a method, an item or an apparatus comprising a series of elements not only includes these elements, but also includes other elements which are not clearly listed, also includes elements that are inherent to such a process, method, item, or apparatus. Unless otherwise stated, a phrase “comprising an element . . .” does not exclude the presence of additional equivalent elements in the process, method, item, or apparatus including the element.

[0069] The electroluminescent device, the display panel and the display apparatus provided by the present disclosure are described in detail above. The principles and implementations of the present disclosure are described herein by taking specific examples. The above embodiments are only used to help understand the present disclosure and the inventive concept thereof. Moreover, according to the concept of the present disclosure, there will be changes to the specific embodiments and application scopes for those skilled in the art. Therefore, the contents of the specification are not to be construed as limiting the present disclosure.

What is claimed is:

1. An electroluminescent device comprising:

a substrate;

an anode on the substrate;

a luminescent layer on a side of the anode facing away from the substrate; and

a cathode on a side of the luminescent layer facing away from the substrate, the cathode comprising:

a transfective layer on the side of the luminescent layer facing away from the substrate; and

a light-emission enhancement layer on a side of the transfective layer facing away from the substrate,

wherein the anode is configured to reflect light incident thereon, a material of the transfective layer comprises metal, and the transfective layer is configured to transmit a first portion of light incident thereon and to reflect a second portion of the light incident thereon.

2. The electroluminescent device according to claim 1, wherein the material of the transfective layer comprises a magnesium-silver alloy.

3. The electroluminescent device according to claim 1, wherein a thickness of the light-emission enhancement layer is related to a material of the luminescent layer.

4. The electroluminescent device according to claim 3, wherein:

the luminescent layer is a luminescent layer that emits red light, and the thickness of the light-emission enhancement layer is in a range of 110 nm to 120 nm; or

the luminescent layer is a luminescent layer that emits green light, and the thickness of the light-emission enhancement layer is in a range of 90 nm to 100 nm; or

the luminescent layer is a luminescent layer that emits blue light, and the thickness of the light-emission enhancement layer is in a range of 80 nm to 90 nm.

5. The electroluminescent device according to claim 1, wherein a material of the light-emission enhancement layer comprises a transparent oxide.

6. The electroluminescent device according to claim 1, wherein the transfective layer has a thickness greater than 8 nm.

7. The electroluminescent device according to claim 1, wherein the cathode further comprises an electrode layer between the transfective layer and the light-emission enhancement layer.

8. The electroluminescent device according to claim 1, wherein an orthographic projection of each of the anode, the transfective layer and the light-emission enhancement layer on the substrate covers an orthographic projection of the luminescent layer on the substrate.

9. The electroluminescent device according to claim 7, wherein a thickness of the electrode layer is determined according to a design resistance value of the cathode, a thickness of the transfective layer, and a thickness of the light-emission enhancement layer.

10. The electroluminescent device according to claim 7, wherein the electrode layer comprises the same material as the light-emission enhancement layer.

11. The electroluminescent device according to claim 10, wherein a material of the electrode layer comprises a transparent oxide.

12. The electroluminescent device according to claim 1, wherein the anode comprises:

a conductive anode layer on the substrate; and

a reflective layer between the conductive anode layer and the substrate.

13. The electroluminescent device according to claim 12, wherein a material of the reflective layer comprises silver.

14. The electroluminescent device according to claim 1, wherein the luminescent layer comprises an organic electroluminescent material.

15. A display panel comprising the electroluminescent device according to claim 1.

16. A display apparatus comprising the display panel according to claim 15.

* * * * *

专利名称(译)	电致发光装置，显示面板和显示装置		
公开(公告)号	US20200075881A1	公开(公告)日	2020-03-05
申请号	US16/434070	申请日	2019-06-06
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	QUAN WEI		
发明人	QUAN, WEI		
IPC分类号	H01L51/52 H01L27/32 H04N9/31		
CPC分类号	H01L51/5206 H04N9/31 H01L51/5221 H01L27/3209 H01L51/5265 H01L27/3211 H01L51/5234 H01L51/5262 H01L2251/5315 H01L2251/558		
优先权	201811012798.6 2018-08-31 CN		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种电致发光器件，显示面板和显示设备。该电致发光器件包括：基板；基板上的阳极；阳极背离基板的一侧上的发光层；发光层背离基板的一侧上的阴极。阴极在发光层的背向衬底的一侧上包括透反射层。透射反射层的背向基板的一侧具有发光增强层。阳极被构造造成反射入射在其上的光，透反射层的材料包括金属，并且透反射层被构造造成透射入射在其上的光的第一部分并反射入射在其上的光的第二部分。

