


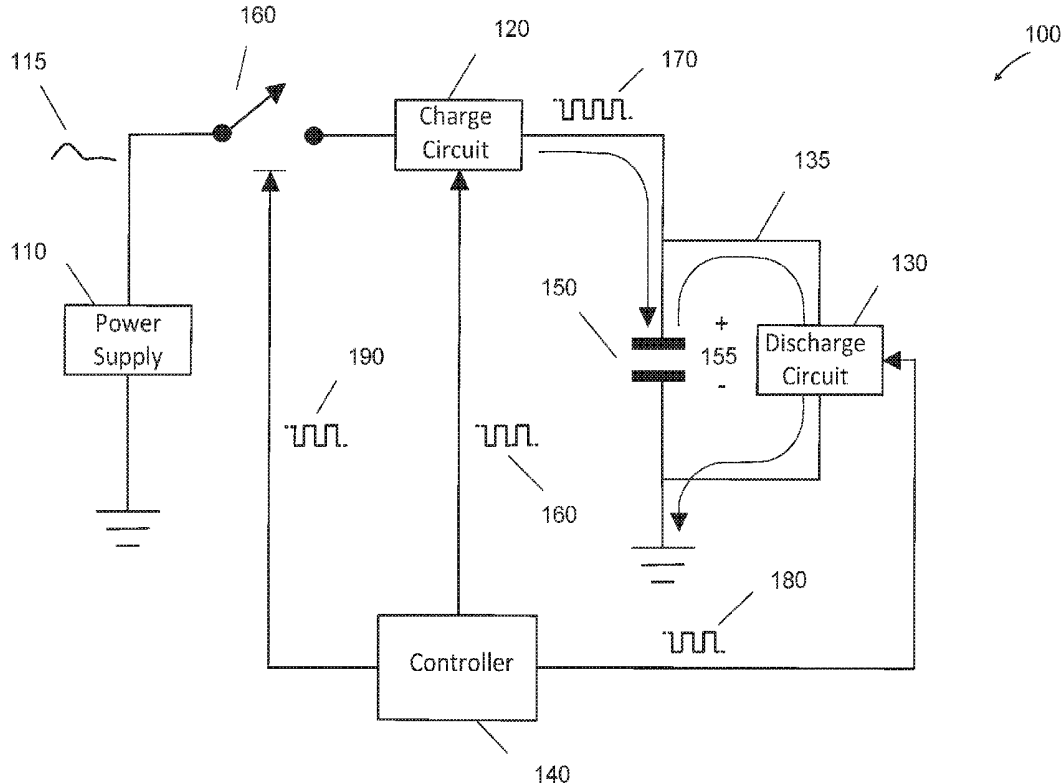

US 20160379536A1

(19) **United States**(12) **Patent Application Publication**
Pietro et al.(10) **Pub. No.: US 2016/0379536 A1**(43) **Pub. Date: Dec. 29, 2016**(54) **INTEGRATED DRIVE CIRCUIT FOR
MULTI-SEGMENT ELECTROLUMINESCENT
DISPLAYS****Publication Classification**(51) **Int. Cl.**
G09G 3/12 (2006.01)(52) **U.S. Cl.**
CPC **G09G 3/12** (2013.01); **G09G 2310/061**
(2013.01); **G09G 2330/028** (2013.01)(71) Applicant: **Scobil Industries Corp.**, Brampton
(CA)(72) Inventors: **Patrick D. Pietro**, Grand Island, NY
(US); **William J. Pietro**, Toronto (CA);
Paul Savel, Pickering (CA)(57) **ABSTRACT**

An integrated drive circuit for multi-segment electroluminescent displays is provided. During a charging phase, the electroluminescent segments are charged by a common charge circuit, and partially discharged using separate discharge circuits associated with individual electroluminescent segments. A controller provides essentially independent control over the respective discharge circuits so, by the end of the charging phase, the EL segments can be charged to correspondingly different final voltages. Then during a discharging phase following the charging phase, the electroluminescent segments are completely discharged, thereby emitting an intensity of light that varies roughly in proportion to the final accumulated voltage. The controller can be pre-programmed with a spatial-temporal light pattern so that, using the disclosed integrated drive circuit, the electroluminescent display can be operated to generate rudimentary animations.

(21) Appl. No.: **15/194,615**(22) Filed: **Jun. 28, 2016****Related U.S. Application Data**(63) Continuation of application No. 13/859,211, filed on
Apr. 9, 2013, now Pat. No. 9,406,256, which is a
continuation of application No. PCT/CA2011/
001137, filed on Oct. 7, 2011.(60) Provisional application No. 61/391,927, filed on Oct.
11, 2010.

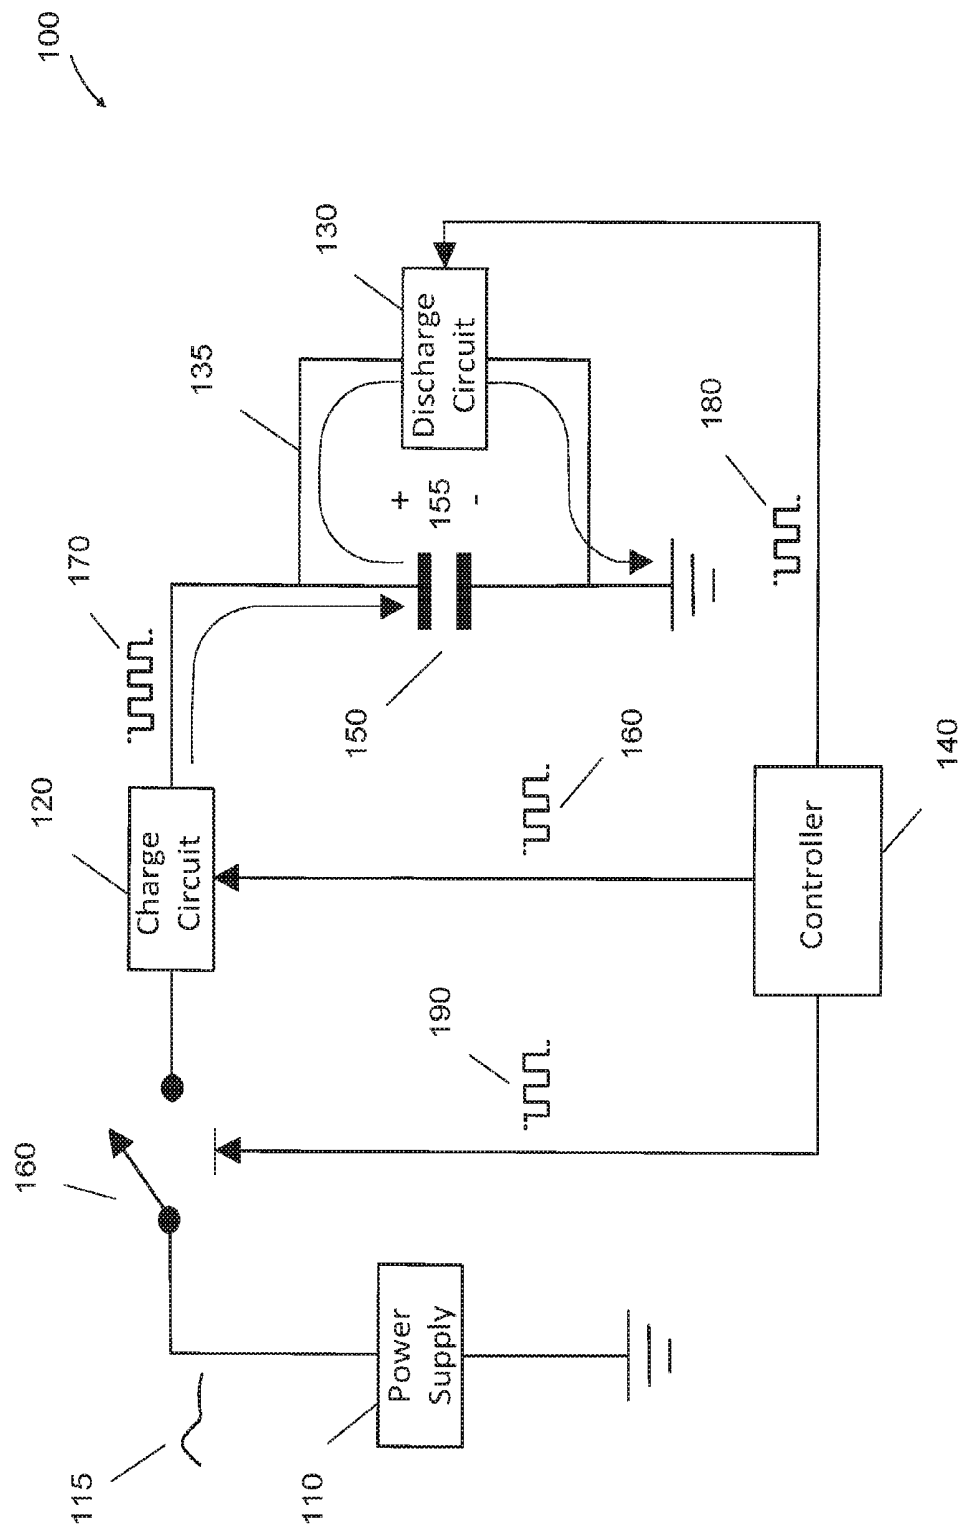


Figure 1

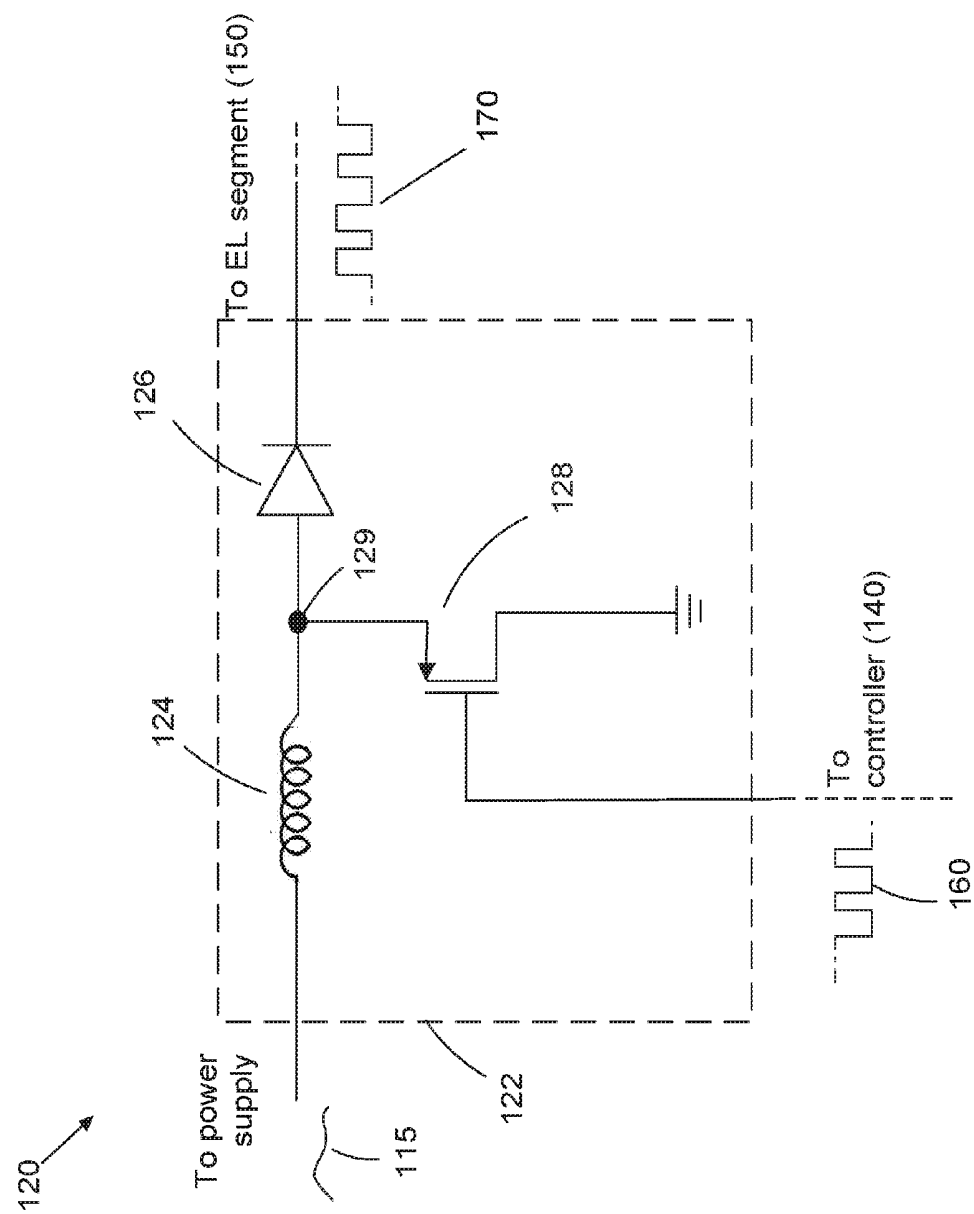


Figure 2

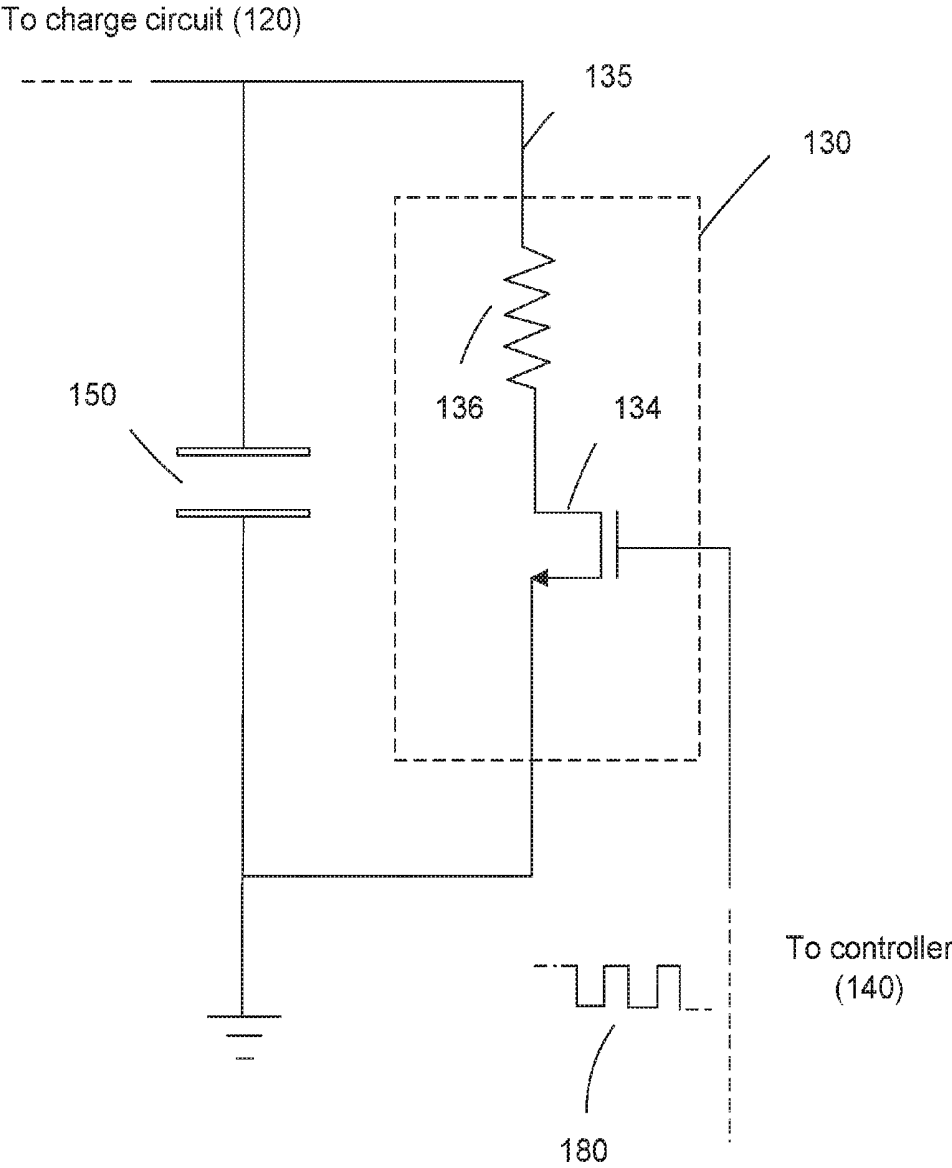


Figure 3

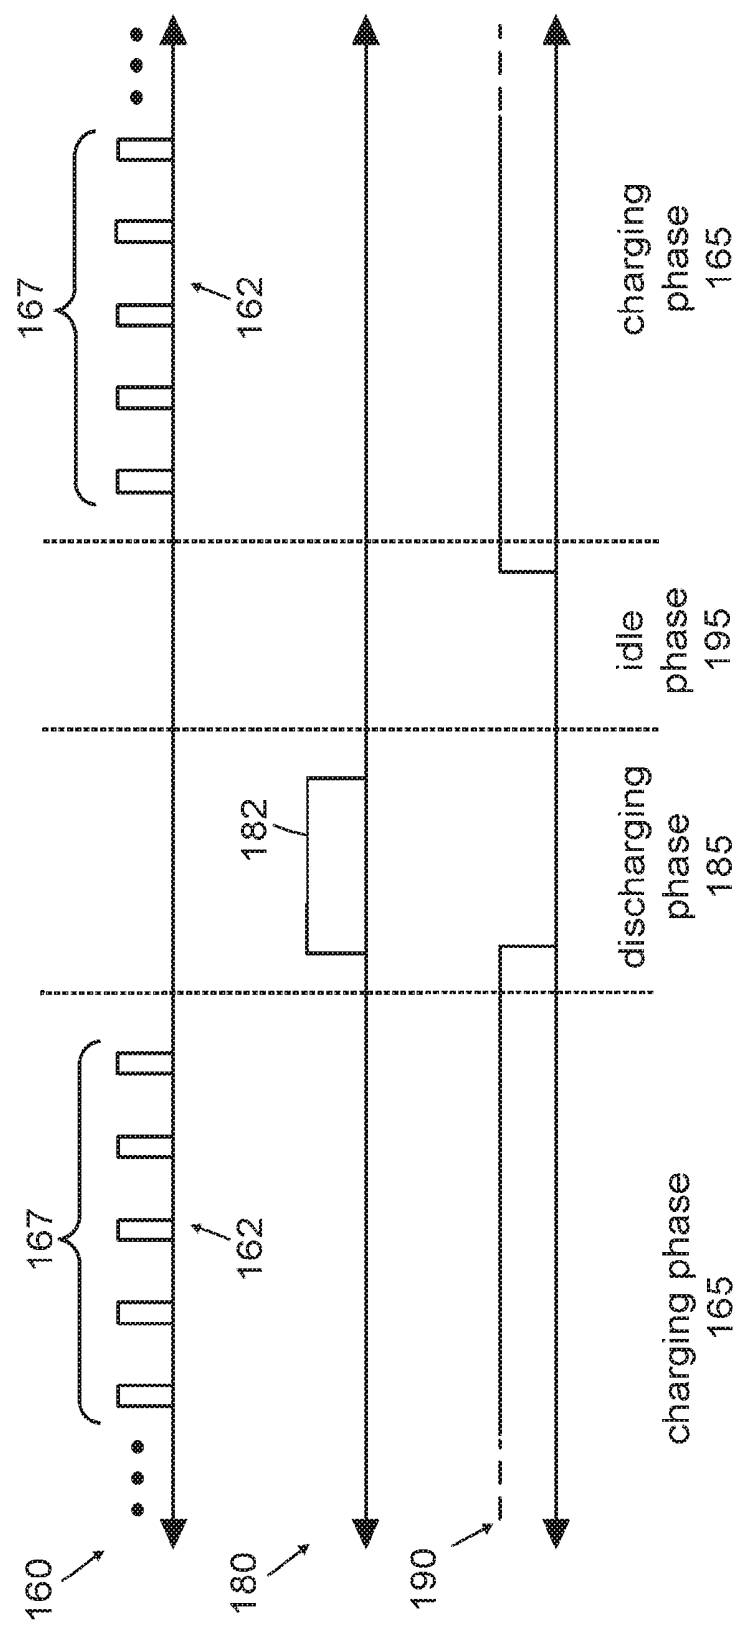


Figure 4

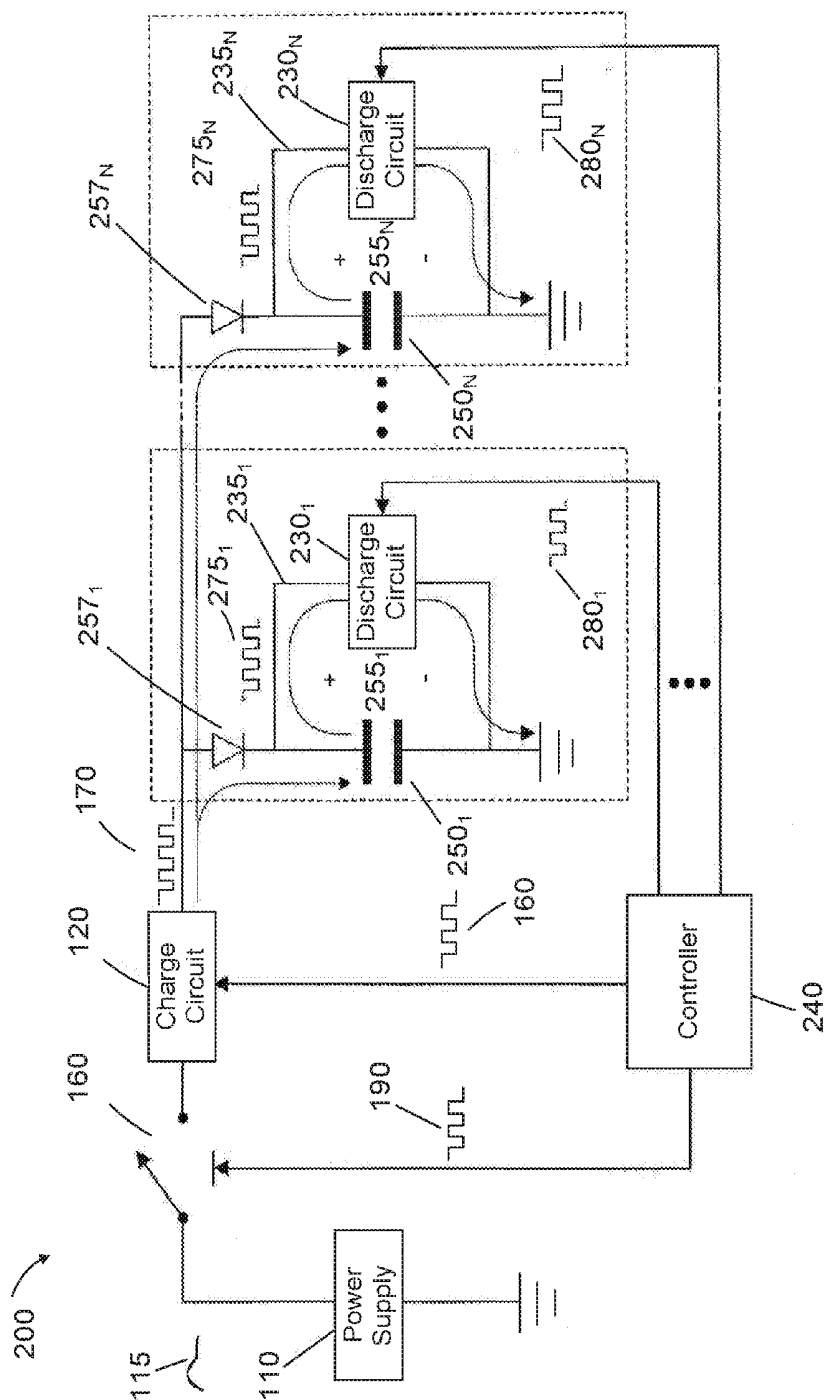


Figure 5

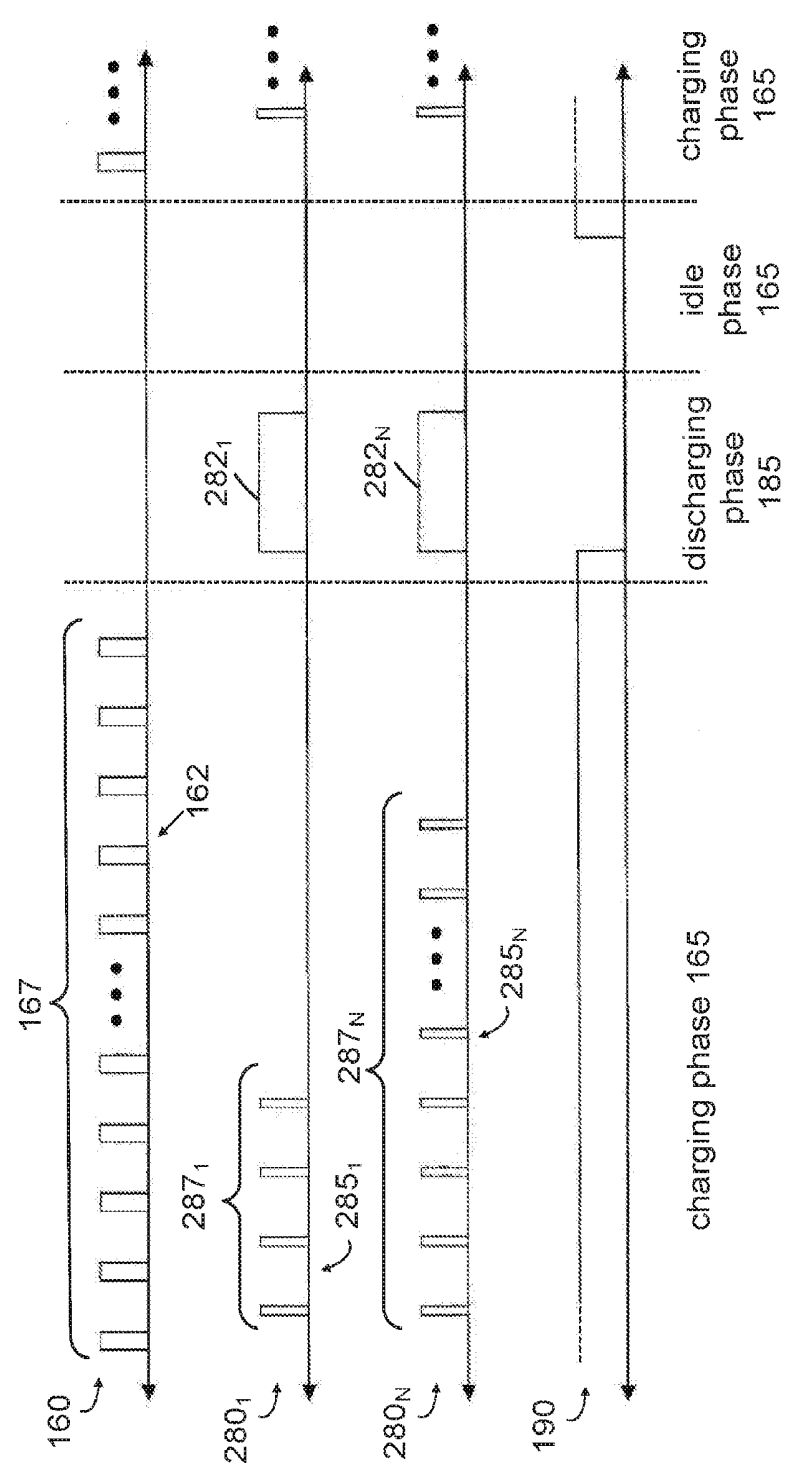


Figure 6

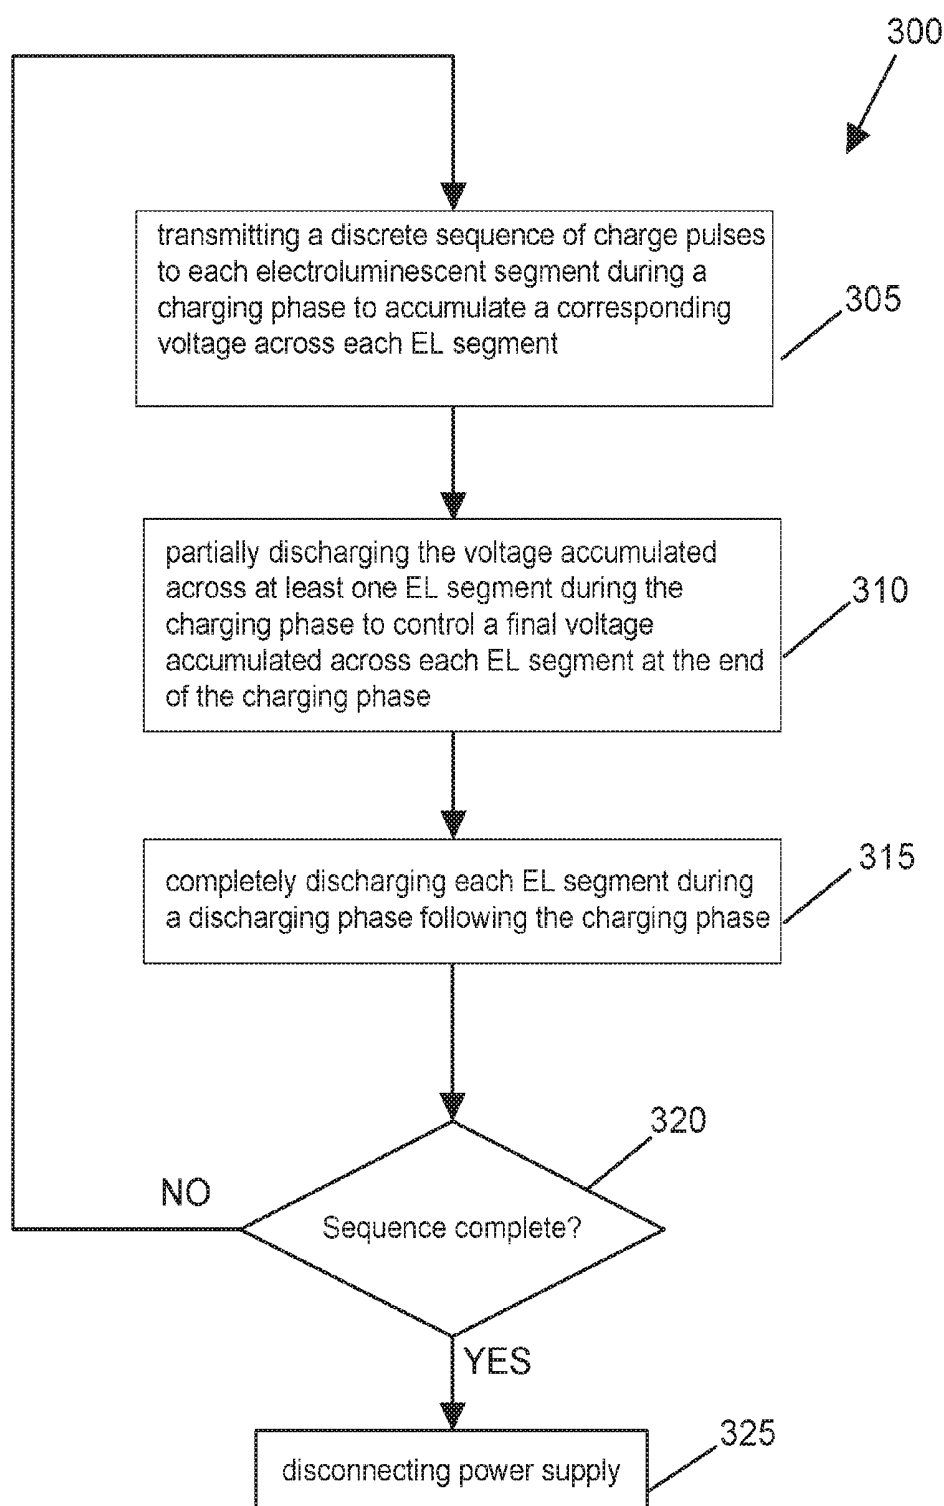


Figure 7

INTEGRATED DRIVE CIRCUIT FOR MULTI-SEGMENT ELECTROLUMINESCENT DISPLAYS

CROSS-REFERENCE TO RELATED PATENT APPLICATIONS

[0001] The application is a continuation of U.S. patent application Ser. No. 13/859,211 filed on Apr. 9, 2013, which is a continuation of International Application No. PCT/CA2011/001137 filed on Oct. 7, 2011, which claims the benefit of U.S. Provisional Application No. 61/391,927, filed on Oct. 11, 2010.

FIELD

[0002] The described embodiments relate generally to an integrated drive circuit for multi-segment electroluminescent displays and, more particularly, to an integrated drive circuit for producing animated illumination of multi-segment electroluminescent displays.

BACKGROUND

[0003] Electroluminescent ("EL") cells or segments generally comprise a layer of phosphor material, such as a zinc sulphide powder, housed between two electrodes. Typically although not in every case, one of the cell electrodes can be composed of a transparent material, such as indium tin oxide, deposited onto a transparent substrate, which provides the front surface for the electroluminescent segment. The phosphor layer housed between the two conductors behaves generally like a capacitor, in which the phosphor layer acts as a dielectric insulator. Depending on its size, the effective capacitance of the electroluminescent segment can range anywhere from picofarads to microfarads. Light is radiated from the electroluminescent cell by subjecting the phosphor layer to a strong electric field, causing photoemission as electron-hole pairs separated in the phosphor layer recombine.

[0004] To produce light from the electroluminescent cell, a large voltage is applied across its electrodes. In the resulting current flow, charge is accumulated on the cell electrodes due to the capacitive nature of the electroluminescent segment. To prevent the long-term buildup of charge on the cell electrodes, the applied voltage is typically alternated between positive and negative polarities. Any charge that is accumulated across the electroluminescent segment electrodes during a charging phase is subsequently dissipated during a discharging phase and, through alternation of the two discrete phases, effectively continuous photoemission can be maintained within the phosphor layer. Depending on the size of the electroluminescent segment and the desired illumination intensity, an alternating voltage in the range of 100-150 V, and having a frequency in the range of 100-400 Hz, may be appropriate.

[0005] Because of their compact size and relatively low current consumption, electroluminescent cells are widely used in small battery operated electronic devices. For example, liquid crystal displays can be backlight using electroluminescent cells in portable communication devices, such as mobile phones, personal data assistants, portable music players, and the like. The output of the batteries used in these electronic devices, however, is commonly a low-level DC voltage in the range of about 1-5 V. Accordingly, some form of voltage converter is often used to convert the

low-voltage DC output of the battery into the high-voltage AC current used to driving the electroluminescent cell.

SUMMARY

[0006] In a first broad aspect, at least some of the described embodiments provide an integrated drive circuit for an electroluminescent display that has at least one electroluminescent segment. The integrated drive circuit includes a charge circuit coupled to the electroluminescent segment and configured to transmit energy received from a power supply to the electroluminescent segment as a discrete sequence of charge pulses to accumulate a voltage across the electroluminescent segment, and a discharge circuit coupled to the electroluminescent segment and configured to dissipate the accumulated voltage by selectively forming a shunt path across the electroluminescent segment to drain energy stored in the electroluminescent segment.

[0007] In some embodiments, the integrated drive circuit includes a controller configured to control the voltage across the electroluminescent segment by generating a charge control signal for the charge circuit and a discharge control signal for the discharge circuit. The charge circuit can be configured to generate and transmit the discrete sequence of charge pulses to the electroluminescent segment in response to the charge control signal. The discharge circuit can be configured to selectively form the shunt path across the electroluminescent segment in response to the discharge control signal.

[0008] The controller can be configured to control a final voltage accumulated across the electroluminescent segment at the end of a charging phase by controlling the charge circuit to transmit the discrete sequence of charge pulses during the charging phase, and determining a number of charge pulses to be transmitted in the discrete sequence of charge pulses.

[0009] The controller can be configured to reset the voltage across the electroluminescent segment by controlling the discharge circuit to completely discharge the electroluminescent segment during a discharging phase succeeding the charging phase.

[0010] In some embodiments, the charge circuit includes a charge pump coupled across the electroluminescent segment, which is used to generate the discrete sequence of charge pulses. The charge pump can be implemented using a storage element for coupling to the power supply, an output element coupled to the storage element, and a gating switch that is controllable by the charge control signal to selectively accumulate energy received from the power supply in the storage element, and release energy from the storage element to the output element for transmission to the electroluminescent segment.

[0011] In some embodiments, the discharge circuit includes a shunt switch connected across the electroluminescent segment, which is controllable by the discharge control signal to provide a short circuit across the electroluminescent segment.

[0012] In some embodiments, the integrated drive circuit includes an isolation switch for coupling the charge circuit to the power supply, and which is controllable to selectively connect and disconnect the power supply to and from the charge circuit.

[0013] In some embodiments, the electroluminescent display has a plurality of parallel-connected electroluminescent segments, in which case the charge circuit can be coupled to

each electroluminescent segment, and can be configured to transmit the discrete sequence of charge pulses to the plurality of electroluminescent segments to accumulate a corresponding voltage across each electroluminescent segment. A corresponding discharge circuit can also be coupled to each electroluminescent segment, with each corresponding discharge circuit configured to selectively form a corresponding shunt path across that electroluminescent segment to dissipate the corresponding accumulated voltage. The controller can be also configured to control the corresponding voltage accumulated across each electroluminescent segment by generating a corresponding discharge control signal for each corresponding discharge circuit.

[0014] The controller can be configured to control a corresponding final voltage accumulated by each electroluminescent segment at the end of a charging phase by controlling at least one corresponding discharge circuit to partially discharge the corresponding voltage accumulated across that electroluminescent segment during the charging phase.

[0015] The controller can be configured to control the at least one corresponding discharge circuit to partially discharge the corresponding accumulated voltage by controlling the charge circuit to transmit the discrete sequence of charge pulses having a number of charge pulses during the charging phase, controlling the at least one corresponding discharge circuit to drain a discrete sequence of partial discharge pulses from that electroluminescent segment during the charging phase and, for the at least one corresponding discharge circuit, determining a number of partial discharge pulses to be drained in the discrete sequence of partial discharge pulses based upon the number of charge pulses in the discrete sequence of charge pulses.

[0016] The controller can be configured to control a timing of the discrete sequence of partial discharge pulses to coincide with intervals between successive charge pulses in the discrete sequence of charge pulses.

[0017] The controller can be configured to control the corresponding final voltage accumulated by each electroluminescent segment at the end of the charging phase independently of other electroluminescent segments, so that the corresponding final voltage of at least two electroluminescent segments differs.

[0018] The controller can be configured to reset the voltage across each electroluminescent segment by controlling each corresponding discharge circuit to completely discharge that electroluminescent segment during a discharging phase succeeding the charging phase.

[0019] In a second broad aspect, at least some of the described embodiments provide a method of supplying power to an electroluminescent display that has at least one electroluminescent segment. The method involves accumulating a voltage across the electroluminescent segment during a charging phase by transmitting energy from a power supply to the electroluminescent segment as a discrete sequence of charge pulses, and dissipating the voltage accumulated across the electroluminescent segment during a discharging phase succeeding the charging phase by forming a shunt path across the electroluminescent segment.

[0020] In some embodiments, the method can involve controlling a final voltage accumulated across the electroluminescent segment at the end of the charging phase. The final voltage accumulated across the electroluminescent segment can be controlled by determining a number of

charge pulses in the discrete sequence of charge pulses to be transmitted to the electroluminescent segment.

[0021] In some embodiments, the electroluminescent display has a plurality of parallel-connected electroluminescent segments, in which case the method can involve accumulating a corresponding voltage across each electroluminescent segment during the charging phase by transmitting the discrete sequence of charge discrete pulses to each electroluminescent segment, and dissipating the corresponding voltage accumulated across each electroluminescent segment during the discharging phase by connecting a corresponding shunt path across that electroluminescent segment.

[0022] The method can involve controlling a corresponding final voltage accumulated across each electroluminescent segment at the end of the charging phase by partially discharging the corresponding voltage accumulated across at least one electroluminescent segment during the charging phase. The corresponding final voltage accumulated across each electroluminescent segment can be controlled by transmitting the discrete sequence of charge pulses having a number of charge pulses during the charging phase, draining a discrete sequence of partial discharge pulses from that electroluminescent segment during the charging phase and, for the at least one corresponding discharge circuit, determining a number of partial discharge pulses to be drained in the discrete sequence of partial discharge pulses based upon the number of charge pulses in the discrete sequence of charge pulses.

[0023] In some embodiments, the method can involve timing the discrete sequence of partial discharge pulses to coincide with intervals between successive charge pulses in the discrete sequence of charge pulses.

[0024] In some embodiments, the method can involve controlling the corresponding final voltage accumulated by each electroluminescent segment at the end of the charging phase independently of other electroluminescent segments, so that the corresponding final voltage of at least two electroluminescent segments differs.

[0025] In some embodiments, the method can involve completely discharging each electroluminescent segment during the discharging phase.

[0026] These and other aspects of the described embodiments are set forth herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] A detailed description of various embodiments of the invention, including at least one preferred embodiment, is provided herein below with reference to the following drawings, by way of example only, and in which:

[0028] FIG. 1 is a simplified schematic diagram of an integrated drive circuit for an electroluminescent display having at least one electroluminescent segment;

[0029] FIG. 2 is a simplified schematic diagram of a charge circuit included in the integrated drive circuit shown in FIG. 1;

[0030] FIG. 3 is a simplified schematic diagram of a discharge circuit included in the integrated drive circuit shown in FIG. 1;

[0031] FIG. 4 is a timing diagram illustrating operation of the integrated drive circuit shown in FIG. 1;

[0032] FIG. 5 is a simplified schematic diagram of an integrated drive circuit for an electroluminescent display having multiple parallel-connected electroluminescent segments;

[0033] FIG. 6 is a timing diagram illustrating operation of the integrated drive circuit shown in FIG. 5; and

[0034] FIG. 7 is a flow chart illustrating a method of supplying power to an electroluminescent display having multiple parallel-connected electroluminescent segments.

[0035] It will be understood that reference to the drawings is made for illustrative purposes only, and is not intended to limit the scope of the described embodiments in any way. For clarity and convenience, reference numerals may be repeated throughout the drawings (with or without an offset) to indicate analogous components or features.

DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0036] Electroluminescent displays are often divided into a grid of electroluminescent segments that can be individually illuminated. The illumination emitted by each individual EL segment can be maintained at a constant intensity to provide an overall static, or time-invariant, display output. Alternatively, to provide the appearance of animation, the illuminations emitted by different EL segments within the grid can be varied according to a pre-programmed sequence to form a mixed temporal-spatial pattern of light, (i.e., light intensity that is modulated both spatially and temporally). For example, the EL display can be operated so as to produce flashing or scrolling text, rudimentary graphics, and other forms of animations. The described embodiments provide an integrated drive circuit for a multi-segment EL display that provides independent control over individual segments within the EL display.

[0037] Reference is made initially to FIG. 1, which illustrates a schematic diagram of an integrated drive circuit 100 for an electroluminescent display. The integrated drive circuit 100 includes a power supply 110, charge circuit 120, discharge charge circuit 130, controller 140, electroluminescent ("EL") segment 150, and isolation switch 160. A single EL segment 150 is shown in FIG. 1, although as will be described in more detail below, in an alternative configuration, the integrated drive circuit 100 can be adapted to drive a plurality of paralleled-connected EL segments contained within the EL display.

[0038] The positive terminal of the power supply 110 is coupled to the charge circuit 120 via the isolation switch 160 and provides a supply voltage signal 115, which can be low-voltage DC, to the charge circuit 120. The negative terminal of the power supply 110 can be connected to ground. In some cases, the power supply 110 is implemented using a DC source, such as a battery or solar panel, to generate low-voltage DC for supplying the charge circuit 120. However, the power supply 110 is not limited to low-voltage DC sources and alternatively can be implemented using an AC power supply, such as a 50-Hz or 60-Hz utility connection, together with a rectifier or voltage converter to generate the supply voltage signal 115 for the charge circuit 120. If desired, a voltage regulator can also be implemented in the power supply 110 to provide a temperature-stabilization of the supply voltage signal 115.

[0039] Charge circuit 120 is configured to absorb energy from the supply voltage signal 115 received from the power supply 110 and, in response to a charge control signal 160 provided by the controller 140, charge the EL segment 150 by generating a discrete sequence of charge pulses 170. As the sequence of charge pulses 170 is pumped to the EL segment 150, some energy is dissipated as waste heat, but

most of the transferred charge is stored in the EL segment 150, resulting in the incremental accumulation of a voltage 155 across the positive and negative electrodes of the EL segment 150. When subsequent activation of the discharge circuit 130 causes the accumulated voltage 155 to dissipate, the resulting re-polarization of the electric field formed within the phosphor layer (i.e., due to the accumulated voltage) causes photoemissive recombination of electron-hole pairs.

[0040] The controller 140 controls the charge circuit 120, as will be explained in more detail below, so that each individual pulse in the sequence of charge pulses 170 delivers approximately the same incremental charge ΔQ to the EL segment 150. Since each incremental charge ΔQ accumulates a corresponding incremental voltage ΔV across the EL segment 150, related proportionally to the incremental charge ΔQ by the effective capacitance of the EL segment 150, the total accumulated voltage 155 is roughly proportionate to the number of charge pulses 170 delivered by the charge circuit 120. The intensity of the illumination emitted by the EL segment 150 is then in turn related proportionately to the accumulated voltage 155.

[0041] The capacitive characteristics of the EL segment 150 can vary depending on different properties of the EL segment 150, such as the material characteristics and thickness of the phosphor layer, and the effective area of the EL segment 150. By testing the electroluminescent performance of the EL segment 150 during design of the EL display, the electroluminescent performance of the EL segment 150 can be characterized for a range of different accumulated voltages 155. Using this information, a relationship between light intensity and the total accumulated voltage 155 can be formulated and subsequently used to program different charge pulse sequences in the controller 140 corresponding to different light intensities. In this way, the intensity of light generated by the EL segment 150 is controllable based upon the characterization of the EL segment 150, the number and duration of charge pulses delivered by the charge circuit 120 and other parameters of the integrated drive circuit 100 as will be apparent.

[0042] Referring now to FIG. 2, the charge circuit 120 can be implemented using a modified form of a charge pump 122, in which the EL segment 150 replaces the capacitive element normally associated with the charge pump 122. In the exemplary configuration shown, the charge pump 122 includes the inductor 124, diode 126 and gating switch 128 coupled together in boost configuration. One terminal of the inductor 124 is coupled to the positive terminal of the power supply 110 and, depending on the state of the gating switch 128, either stored energy absorbed from the voltage supply signal 115, releases some of that stored energy to the diode 126 for transmission to the EL segment 150.

[0043] The gating switch 128 is implemented, for example, using a semiconductor switch, such as a metal oxide semiconductor field effect transistor (MOSFET), bipolar junction transistor (BJT), or junction field effect transistor (JFET). As shown in FIG. 2, gating switch 128 is implemented using a PMOS transistor driven by the charge control signal 170, although other types or configurations of gating switches may be apparent.

[0044] When the gating switch 128 is closed and conducting, the voltage drop across the gating switching 128 is minimal, pulling the common node 129 of the charge pump 122 down near to ground potential. Current flow in the

inductor 124 ramps up in proportion to the internal field generated as energy from the power supply 110 is absorbed. Reversing biasing of the diode 126 also prevents the accumulated voltage 155 across the EL segment 150 from dissipating (unless through the discharge circuit 130, as will be explained more below). When the gating switch 128 is opened and no longer conducting, current flowing through the inductor 124 is forced out through the diode 126 to the EL segment 150 until either the gating switch 128 is closed again or all the energy stored in the inductor 124 is released.

[0045] By modulating the charge control signal 160 between high and low voltage states, the gating switch 128 is alternately opened and closed, causing the charge circuit 120 to pump charge intermittently to the EL segment 150. In order to generate the sequence of charge pulses 170 having approximately equally weighted charge pulses, the controller 140 can apply a pulse width modulation (PWM) or pulse density modulation (PDM) scheme, for example, but other suitable schemes may be apparent as well. Moreover, as will be appreciated, with this particular arrangement of the inductor 124, diode 126 and gating switching 128, the effective voltage applied across the EL segment 150 can be made to be substantially larger than the magnitude of the supply voltage signal 115, if the duty cycle of the charge control signal 160 is sufficiently large.

[0046] Referring now to FIG. 3, the discharge circuit 130 is parallel-coupled to the EL segment 150 and, in response to a discharge control signal 180 provided by the controller 140, selectively forms a shunt path 135 connecting the positive and negative electrodes of the EL segment 150. The discharge circuit 130 is controllable using the discharge control signal 180, so that the shunt path 135 can be formed only when the charge circuit 120 is not delivering charge pulses to the EL segment 150. Accordingly, when the charge circuit 120 is active, the shunt path 135 can be broken so that the only path to ground from the output of the charge circuit 120 includes the EL segment 150. However, when formed, the shunt path 135 provides an alternate path to ground for draining any charge stored in the EL segment 150 and thereby dissipating any voltage that had accumulated across the EL segment 150. As mentioned above, the field re-polarization caused by draining the EL segment 150 results in photoemission within the phosphor layer.

[0047] The discharge circuit 130 is implemented using a switching transistor 134, which is an NMOS transistor in the exemplary configuration shown in FIG. 3, and an optional shunt resistor 136. The source of the switching transistor 134 is coupled to the negative terminal of the EL segment 150, while the gate of switching transistor 134 is driven by the discharge control signal 180. When implemented using an NMOS transistor, as will be appreciated, the switching transistor 134 is closed and conducting when driven with a gate voltage that exceeds the threshold voltage of the switching transistor 136, but is open and not conducting when the gate voltage is less than the transistor threshold voltage.

[0048] In some cases, the drain of the switching transistor 134 is coupled directly to the positive terminal of the EL segment 150, but alternatively (as shown) can be coupled using the shunt resistor 136. The shunt transistor 136 is optional and can be included in the discharge circuit 130 to adjust the rate at which the EL segment 150 drains through the shunt path 132 when formed (i.e., by changing the effective time constant of the shunt path 135).

[0049] Referring back to FIG. 1, isolation switch 160 couples the charge circuit 120 to the power supply 110, and is controllable using the isolation switch control signal 190 generated by the controller 140. When the isolation switch 160 is closed and conducting, the charge circuit 120 is connected to the power supply 110 and absorbing the voltage supply signal 115 received from the power supply 110. However, when the isolation switch 160 is opened, the power supply 110 is disconnected from the charge circuit 120 and effectively isolated from the rest of the integrated drive circuit 100. Depending on the current handling requirements of the isolation switch 190, different semiconductor devices can be used to implement the isolation switch 190, as will be appreciated, which MOSFETs, BJTs and JFETs, for example.

[0050] The isolation switch 160 can be used by the controller 140 as a form of ON/OFF switch for the EL segment 150 within the integrated drive circuit 100. By disconnecting its source of power, opening the isolation switch 160 effectively turns off the EL segment 150. In the reverse situation, closing the isolation switch 160 effectively turns on the EL segment 150 by connecting the power supply 110 and thereby re-establishing a source of power for the EL segment 150.

[0051] The controller 140 generates the isolation switch control signal 190 for the isolation switch 160 based on sensor data generated by one or more sensors associated with the EL display. For example, an associated light sensor can detect a level of ambient light in the vicinity of the EL display and, if the detected ambient light falls below a threshold level, the controller 140 can decide to connect the power supply 110 by closing the isolation switch 160. As other examples, the controller 140 can generate the isolation switch control signal 190 based upon sensor data provided by one or both of a motion sensor (which detects relative motion of the EL display) and a noise sensor (which detects an ambient level of noise in the vicinity of the EL display). Alternatively, the isolation switch 160 can be implemented using a tumbler switch (i.e., a Mercury switch) that closes when the EL display is in certain relative orientations.

[0052] In some configurations, a real-time clock can also be associated with the EL display, so that the controller 140 can execute programmed device turn on or turn off. For example, the controller 140 can be programmed to turn the device off, by opening the isolation switch 160, if a maximum idle time has been exceeded or after a pre-programmed duration following the EL display being turned on. Scheduled turn on and turn off is also possible in some configurations of the integrated drive circuit 100.

[0053] The controller 140 is coupled to the charge circuit 120 and the discharge circuit 130 for providing corresponding signals used to control to each component. Thus, as mentioned above, controller 140 is programmed to generate the charge control signal 160 for the charge circuit 120 and the discharge control signal 180 for the discharge circuit 130.

[0054] Referring now to FIGS. 1 and 4, the integrated drive circuit 100 operates under the direction of the controller 140 as follows. A charging phase 165 commences shortly after the isolation switch control signal 190, which had previously been driven to the low-voltage state, is re-asserted to a high-voltage state, thereby closing the isolation switch 160 and connecting the charge circuit 120 to the power supply 110. As mentioned before, with the iso-

lation switch **160** closed and connecting, the integrated drive circuit **100** is in an active mode. Throughout the charging phase **165**, the discharge control signal **180** is also drive to the low-voltage state to open the shunt path **135** and force current flowing out of the charge circuit **120** to accumulate in the EL segment **150**. Shortly after the charging phase **165** commences, the controller **140** provides a sequence of gating signals **162** to the charge circuit **120** to begin charging the EL segment **150**.

[0055] The controller **140** determines the sequence of gating signals **162** so that the charge circuit **120** outputs the sequence of charge pulses **170**. For example, the controller **140** determines (or alternatively has been pre-programmed with) the total number of charge pulses **167** in the sequence of charge pulses **162** based on the characterization of the EL segment **150** and the desired final voltage **155** to be accumulated across the EL segment at the end of the charging phase **165**. The controller **140** also determines (or is pre-programmed with) the duration of each individual charge pulse in the sequence of charge pulses **162**, in terms of the pulse duty cycle, so that approximately the same incremental charge ΔQ is contained within each pulse. Although the sequence of gating signals **162** is illustrated for convenience having a constant duty cycle, it should be appreciated that the controller **140** may implement a more complex modulation scheme, such as PWM or PDM, in which the duty cycle of the sequence of gating signals **162** varies with time.

[0056] The charging phase **165** ends once the voltage **155** accumulated across the EL segment **150** reaches its desired final voltage. At that point the charging phase **165** ends and is succeeded by a discharging phase **185**. Shortly after the start of the discharging phase **185**, the isolation switch control signal **190** is lowered to the low-voltage state in order to isolate the power supply **110** from the rest of the integrated drive circuit **100**. Temporarily disconnecting the power supply **110** during the discharging phase **185** increases the overall efficiency of the integrated drive circuit **100** by reducing losses in the power supply **110** and charge circuit **120** when these components are not actively operating.

[0057] At or near the same time as the isolation switch **160** is opened, the controller **140** also generates a discharge signal **182**, in response to which the discharge circuit **130** forms the shunt path **135** across the EL segment **150**. Due to the reverse isolation of the charge circuit **120** (i.e. provided by the diode **126** in FIG. 2), any charge stored in the EL segment **150** during the charging phase **165** is completely drained through the shunt path **135**. The length of the discharge signal **182** is variable and can depend on the magnitude of the final accumulated voltage **155**, as well as the discharge rate of the shunt path **132**, but should be sufficiently long that the EL segment **150** completely discharges. Thus, by the end of the discharging phase **185**, the final voltage **155** accumulated across the EL segment **150** during the charging phase **165** will have been completely dissipated and the EL segment **150** reset for a new charging phase **165**.

[0058] An optional idle phase **195** can be added between the end of the discharging phase **185** and the start of a new charging phase **165**. During the optional idle phase **195**, the EL segment **150** is being neither charged nor discharged, while the power supply **110** remains isolated from the rest of the integrated drive circuit **100** by opening of the isolation switch **160**. The optional idle phase **195** ends shortly after

the controller **140** asserts the isolation switch control signal **190** in order to re-connect the power supply **110** and begin a new charging phase **165**. The optional idle phase **195** has a variable duration and, in some configurations, can be eliminated altogether. In that case, the isolation switch control signal **190** can be asserted at or near the end of the discharge signal **182** to mark the start of the new charging phase **165** immediately following the end of the discharging phase **185**.

[0059] By charging the EL segment **150** to the same final voltage **155** at the end of each charging phase **165**, followed alternately with the discharging phase **185** and optional idle phase **195**, the EL segment **150** will produce an essentially constant intensity of light. As mentioned above, the intensity of illumination produced can be controlled based on the magnitude of the final accumulated voltage **155**. The intensity is also adjustable by the controller **140** determining the number of charge pulses in the sequence of charge pulses **170** to pump into the EL segment **150**. But in general, the intensity of light produced by the EL segment **150** can be made to vary as a function of time by controlling the number of charge pulses delivered to the EL segment **150** in successive charging phases **165**.

[0060] Referring now to FIG. 5, there is illustrated an integrated drive circuit **200** for an electroluminescent display. The integrated drive circuit **200** is similar to the integrated drive circuit **100** shown in FIG. 1, but is adapted for an electroluminescent display having multiple parallel-connected EL segments 250_{1-N} . Although only two such parallel-connected EL segments 250_1 and 250_N are shown explicitly in FIG. 5, it should be appreciated that each parallel-connected EL segment 250_{1-N} can be identical. The parallel-connected EL segments 250_{1-N} can also be arranged physically within the EL display according to a grid or matrix distribution. For the sake of clarity, discussion of like elements or aspects of the two integrated drive circuits **100** and **200** may be abbreviated, while specific differences may be highlighted or emphasized.

[0061] Power supply **110** is coupled to the charge circuit **120** using isolation switch **160**, which selectively connects and disconnects power supply **110** to the charge circuit **120** in response to the isolation switch control signal **190**. Again the power supply **110** provides a supply voltage signal **115** to the charge circuit **120**, which can be relatively low-voltage DC. The charge circuit **120** is coupled to each respective parallel-connected EL segment 250_{1-N} through corresponding diodes 257_{1-N} , which provide reverse isolation for each respective EL segment 250_{1-N} not just from charge circuit **120**, but also from other respective EL segments 250_{1-N} . The charge circuit **120** can have the same configuration as shown in FIG. 2 and, as described above, deliver energy to each corresponding EL segment 250_{1-N} in response to the charge control signal **160** provided by controller **240**, by generating a discrete sequence of charge pulses **170**.

[0062] A corresponding discharge circuit 230_{1-N} , each having the general configuration shown in FIG. 3, for example, is coupled across the parallel-connected EL segments 250_{1-N} . Each discharge circuit 230_{1-N} is independently controllable, using a corresponding discharge control signal 280_{1-N} generated and provided by the controller **240**, to form corresponding shunt paths 235_{1-N} across the EL segments 250_{1-N} . As before the shunt paths 235_{1-N} can be controllably operated to dissipate corresponding voltages

255_{1-N} that accumulate across the EL segments **250_{1-N}** when charged by the discrete sequence of charge pulses **170**.

[0063] Referring now to FIGS. 5 and 6, the discharge circuits **230_{1-N}** are independently controllable by the controller **240**, so that each of the parallel-connected EL segments **250_{1-N}** can produce generally different light intensities. By also controlling the respective illuminations of the parallel-connected EL segments **250_{1-N}** as a function time, the electroluminescent display can produce pseudo-animations (i.e., in which the light intensity emitted by the electroluminescent display varies both spatially within the EL display, and as a function of time, according to a pre-programmed sequence).

[0064] As before, a charging phase **165** commences shortly after the controller **240** asserts the isolation switch control signal **190**, thereby closing the isolation switch **160** and reconnecting the charge circuit **120** to the power supply **110**. Shortly after the charging phase **165** commences, the controller **240** transmits a sequence of gating signals **162** to the charge circuit **120**, in response to which the charge circuit **120** begins transmitting the sequence of charge pulses **170** to the parallel-connected EL segments **250_{1-N}**. The controller **240** can generate the sequence of gating signals **162** (although not explicitly shown) according to a modulation scheme, such as PWM or PDM, so that each charge pulse in the sequence of charges pulses **170** delivers approximately the same incremental charge ΔQ to each of the parallel-connected EL segments **250_{1-N}**. In this way, because each of the parallel-connected EL segments **250_{1-N}** has the same effective capacitance, the voltages **255_{1-N}** across the parallel-connected EL segments **250_{1-N}** accumulate roughly in proportion to the number of charge pulses delivered.

[0065] However, unlike the integrated charge circuit **100** (FIG. 1), when the charging circuit **120** is delivering the sequence of charge pulses **170** to the EL segments **250_{1-N}**, simultaneously during the charging phase **165**, the controller **240** also generates respective gating signals **285_{1-N}** for each corresponding discharge circuit **230_{1-N}**. In response to the gating signals **285_{1-N}**, the corresponding discharge circuits **230_{1-N}** partially dissipate the voltages **255_{1-N}** that have been accumulating across the EL segments **250_{1-N}** during the charging phase **165** by draining sequences of partial discharge pulses **275_{1-N}** from the EL segments **250_{1-N}**. The controller **240** generates the gating signals **285_{1-N}** to coincide with time intervals between consecutive charge pulses in the sequence of charge pulses **170**, so that the control exerted over the charge circuit **120** is more or less decoupled from the control exerted over the discharge circuits **230_{1-N}**.

[0066] Looking only at the EL segment **250₁** for the moment, the controller **240** determines the final voltage **255₁** to be accumulated across the EL segment **250₁** at the end of the charging cycle **165** based on the characterization of the EL segment **250₁** and the desired light intensity for the EL segment **250₁**. As described above, the controller **240** can make this determination (or be pre-programmed) by characterizing the illumination response of the EL segment **250₁** for a range of different voltages. The controller **240** achieves the desired final voltage **255₁** by partially dissipating the total voltage accumulated during the charging phase **165** due to the sequence of charge pulses **170**.

[0067] Assuming each of the charge pulse **170** roughly accumulates an incremental voltage ΔV across the EL segment **250₁**, the controller **240** generates an estimate of the total accumulated voltage **255₁** at the end of the charging

cycle **165** based on the number of individual pulses in the sequence of charge pulses **170**. From the total accumulated voltage **255₁**, the controller **240** subtracts the desired final voltage to determine how much of the total accumulated voltage **255₁** should be dissipated using the sequence of partial discharge pulses **275₁** during the charging phase **165**. The controller **240** then determines how many partial discharge pulses **275** to drain from the EL segment **250₁** through the shunt path **235₁** to achieve the desired final voltage for the EL segment **250₁**. As each partial discharge pulse also drains approximately the same incremental charge ΔQ from the EL segment **250₁**, the controller **240** can determine the number of partial discharge pulses **275₁** that will achieve the desired final voltage based upon the number of charge pulses **170** delivered by the charge circuit **120**. The controller **240** can perform these calculations dynamically or, alternatively, as will be appreciated, the relationship between the number of charge pulses and discharge pulses can be pre-programmed into the controller **240**.

[0068] The controller **240** controls each of the EL segments **250_{1-N}** in the manner described above for the EL segment **250₁** specifically. Accordingly, for each of EL segments **250_{1-N}**, the controller **240** determines the corresponding number of partial discharge pulses **275_{1-N}** based on the number of charge pulses **170**, which will achieve a corresponding final voltage **255_{1-N}** for that EL segment **250_{1-N}**. As illustrated in FIG. 6, each corresponding sequence of partial discharge pulses **275_{1-N}** can have a different number of pulses, so that each of the EL segments **250_{1-N}** has a different final voltage at the end of the charging cycle **165**. For example, the gating signals **285₁** provided to discharge circuit **230₁** has a number **287₁** of individual gating signals, which is not necessarily the same number **287_N** of gating signals **285_N** provided to discharge circuit **230_N**. Due to the reverse isolation provides by the diodes **257_{1-N}**, the controller **240** can exert effectively independent control over each discharge circuit **230_{1-N}**, thereby allowing each of the EL segments **250_{1-N}** to produce different effective light intensities.

[0069] The charging phase **165** ends once the complete sequence of charging pulses **170** has been transmitted by the charging circuit **120**, at which point each of the EL segments **250_{1-N}** will be at corresponding final voltages **255_{1-N}**. (Depending on upon how much of the accumulated voltage **255_{1-N}** was partially dissipated during the charging phase **165**, the corresponding final voltages **255_{1-N}** can be arbitrarily different.) The discharging phase **185** again commences following the end of the charging phase **165**. The isolation switch control signal **190** is again driven to the low-voltage state in order to disconnect the power supply **110**. At or near the same time, the controller **240** also generates a complete discharge pulse **282_{1-N}** for each corresponding discharge circuit **230_{1-N}**, which is again of a suitably long duration to completely dissipate the final voltage **255_{1-N}** that was accumulated across each EL segment **250_{1-N}**. During discharge of the EL segments **250_{1-N}**, re-polarization of the fields within the respective phosphor layers generates photoemission roughly in proportion to the final accumulated voltages **255_{1-N}**. An optional idle phase **195** can again separate the end of the discharging phase **185** from the start of a new charging phase **165**.

[0070] Referring now to FIG. 7, there is shown a flow chart illustrating a method **300** of supplying power to an electroluminescent display having multiple parallel-con-

nected electroluminescent segments forming a grid or matrix of segments. The method **300** can be performed, for example, using the exemplary integrated drive circuit **200** (FIG. 5) in order to generate a pre-programmed, animated light sequence. For the sake of clarity, some details related to the integrated drive circuit **200** will not be repeated during discussion of the method **300**, which may be abbreviated.

[0071] At **305**, a discrete sequence of charge pulses is transmitted to each parallel-connected EL segment in the EL display to accumulate a corresponding voltage across each EL segment. The discrete sequence of charge pulses can be transmitted during a charging phase and contain a pre-determined number of individual charge pulses.

[0072] At **310**, the voltage accumulated across one or more of at least one EL segment can be partially dissipated. In this way, the final voltage accumulated across each of the parallel-connected segments at the end of the charging cycle is controlled, i.e. as the difference between the total accumulated voltage and the partially dissipated voltage.

[0073] In one variation of the method **300**, the EL segments are partially discharged by draining a discrete sequence of partial discharge pulses from respective EL segments during the charging phase. By controlling the incremental charge ΔQ accumulated or drained from the EL, to control the corresponding final voltage for a given EL segment, the number of partial discharge pulses to be drained is determined based upon the number of charge pulses in the discrete sequence of charge pulses. In some cases, the discrete sequence of partial discharge pulses is also timed to coincide with intervals between successive charge pulses in the discrete sequence of charge pulses, so that the charge and discharge pulses are non-overlapping in time.

[0074] At **315**, each EL segment is completely discharged during a discharging phase following the charging phase. For example, a respective shunt path can be formed across each EL segment through which to dissipate whatever final voltage had accumulated across the EL segments during the charging phase. During discharge, the EL segments emit light having an intensity that varies approximately in proportion to their final accumulated voltages at the end of the charging phase.

[0075] At **320**, it is checked whether the complete sequence has been performed. If the complete sequence has been performed, the method **300** branches to **325**, the source of power for the EL display is disconnected and the method **300** ends. However, if at **320**, it is determined that the sequence is not complete, the method **300** branches back to **305** and repeats until the complete sequence has been executed. During each successive iteration of the method **300**, the different EL segments are controlled in the manner described to produce light intensities that vary both spatially within the EL display, and as a function of time, according to the pre-programmed sequence. In this way, rudimentary animations can be generated by following the method **300**.

[0076] The present invention has been described herein by way of exemplary embodiments without limitation. Certain modifications and variations to these exemplary embodiments may be apparent without departing from the scope of the invention, which is limited only by the appended claims.

1.-25. (canceled)

26. An integrated drive circuit for an electroluminescent display comprising at least one electroluminescent segment, the integrated drive circuit comprising:

- a charge circuit coupled to the electroluminescent segment, the charge circuit configured to transmit energy received from a power supply to the electroluminescent segment to accumulate a voltage across the electroluminescent segment; and
- a discharge circuit coupled to the electroluminescent segment and configured to dissipate the accumulated voltage by selectively forming a shunt path across the electroluminescent segment to drain energy stored in the electroluminescent segment.

27. The integrated drive circuit of claim **26**, further comprising a controller configured to control the voltage across the electroluminescent segment by generating a charge control signal for the charge circuit and a discharge control signal for the discharge circuit.

28. The integrated drive circuit of claim **27**, wherein the charge circuit is configured to generate and transmit a continuous charge to the electroluminescent segment in response to the charge control signal.

29. The integrated drive circuit of claim **27**, wherein the discharge circuit is configured to selectively form the shunt path across the electroluminescent segment in response to the discharge control signal.

30. The integrated drive circuit of claim **29**, wherein the discharge circuit comprises a shunt switch connected across the electroluminescent segment, the shunt switch controllable by the discharge control signal to provide a short circuit across the electroluminescent segment.

31. The integrated drive circuit of claim **26**, further comprising an isolation switch for coupling the charge circuit to the power supply, the isolation switch controllable to selectively connect and disconnect the power supply to and from the charge circuit.

32. The integrated drive circuit of claim **27**, wherein the controller is configured to reset the voltage across the electroluminescent segment by controlling the discharge circuit to completely discharge the electroluminescent segment during a discharging phase succeeding the charging phase.

33. The integrated drive circuit of claim **27**, wherein the electroluminescent display comprises a plurality of parallel-connected electroluminescent segments; the charge circuit is coupled to each electroluminescent segment and is configured to transmit a continuous charge to the plurality of electroluminescent segments to accumulate a corresponding voltage across each electroluminescent segment;

- a corresponding discharge circuit is coupled to each electroluminescent segment, each corresponding discharge circuit configured to selectively form a corresponding shunt path across that electroluminescent segment to dissipate the corresponding accumulated voltage; and

the controller is configured to control the corresponding voltage accumulated across each electroluminescent segment by generating a corresponding discharge control signal for each corresponding discharge circuit.

34. The integrated drive circuit of claim **33**, wherein the controller is configured to control a corresponding final voltage accumulated by each electroluminescent segment at the end of a charging phase by controlling at least one corresponding discharge circuit to partially discharge the corresponding voltage accumulated across that electroluminescent segment during the charging phase.

35. The integrated drive circuit of claim **34**, wherein the controller is configured to control the corresponding final voltage accumulated by each electroluminescent segment at the end of the charging phase independently of other electroluminescent segments, so that the corresponding final voltage of at least two electroluminescent segments differs.

36. The integrated drive circuit of claim **34**, wherein the controller is configured to reset the voltage across each electroluminescent segment by controlling each corresponding discharge circuit to completely discharge that electroluminescent segment during a discharging phase succeeding the charging phase.

37. A method of supplying power to an electroluminescent display comprising at least one electroluminescent segment, the method comprising:

accumulating a voltage across the electroluminescent segment during a charging phase by transmitting energy from a power supply to the electroluminescent segment; and

dissipating the voltage accumulated across the electroluminescent segment during a discharging phase succeeding the charging phase by forming a shunt path across the electroluminescent segment.

38. The method of claim **37**, further comprising controlling a final voltage accumulated across the electroluminescent segment at the end of the charging phase.

39. The method of claim **37**, wherein the electroluminescent display comprises a plurality of parallel-connected electroluminescent segments, and wherein the method further comprises:

accumulating a corresponding voltage across each electroluminescent segment during the charging phase by transmitting a continuous charge to each electroluminescent segment; and

dissipating the corresponding voltage accumulated across each electroluminescent segment during the discharging phase by connecting a corresponding shunt path across that electroluminescent segment.

40. The method of claim **39**, further comprising controlling a corresponding final voltage accumulated across each electroluminescent segment at the end of the charging phase by partially discharging the corresponding voltage accumulated across at least one electroluminescent segment during the charging phase.

41. The method of claim **40**, further comprising controlling the corresponding final voltage accumulated by each electroluminescent segment at the end of the charging phase independently of other electroluminescent segments, so that the corresponding final voltage of at least two electroluminescent segments differs.

42. The method of claim **40**, further comprising completely discharging each electroluminescent segment during the discharging phase.

* * * * *

专利名称(译)	用于多段电致发光显示器的集成驱动电路		
公开(公告)号	US20160379536A1	公开(公告)日	2016-12-29
申请号	US15/194615	申请日	2016-06-28
[标]申请(专利权)人(译)	SCOBIL IND		
申请(专利权)人(译)	SCOBIL INDUSTRIES CORP.		
当前申请(专利权)人(译)	SCOBIL INDUSTRIES CORP.		
[标]发明人	PIETRO PATRICK D PIETRO WILLIAM J SAVEL PAUL		
发明人	PIETRO, PATRICK D. PIETRO, WILLIAM J. SAVEL, PAUL		
IPC分类号	G09G3/12		
CPC分类号	G09G3/12 G09G2330/028 G09G2310/061 G09G3/30 H05B33/08 Y02B20/32		
优先权	61/391927 2010-10-11 US		
其他公开文献	US9916784		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种用于多段电致发光显示器的集成驱动电路。在充电阶段期间，电致发光段由公共充电电路充电，并使用与各个电致发光段相关联的单独放电电路部分放电。控制器基本上独立地控制相应的放电电路，因此，在充电阶段结束时，EL段可以被充电到相应不同的最终电压。然后，在充电阶段之后的放电阶段期间，电致发光区段被完全放电，从而发出与最终累积电压成比例地大致变化的光强度。控制器可以用空间-时间光图案预编程，使得使用所公开的集成驱动电路，可以操作电致发光显示器以产生基本动画。

