

(12) **Patent Application Publication**
Yokoyama et al.

(10) **Pub. No.: US 2015/0155496 A1**
(43) **Pub. Date: Jun. 4, 2015**

51/0072 (2013.01); *H01L 51/0058* (2013.01);
H01L 51/0067 (2013.01); *H01L 51/508*
(2013.01)

(72) Inventors: **Norimasa Yokoyama**, Tokyo (JP); **Shuichi Hayashi**, Tsukuba-shi (JP); **Naoaki Kabasawa**, Tokyo (JP); **Daizou Kanda**, Tokyo (JP); **Shigeru Kusano**, Tsukuba-shi (JP)

(22) Filed: **Nov. 25, 2014**

Related U.S. Application Data

(63) Continuation of application No. 13/388,123, filed on Jan. 31, 2012, now Pat. No. 8,927,119, filed as application No. PCT/JP2010/004784 on Jul. 28, 2010.

(30) **Foreign Application Priority Data**

Aug. 5, 2009 (JP) 2009-182019

Publication Classification

(51) **Int. Cl.**
H01L 51/00 (2006.01)
C07D 519/00 (2006.01)
C07D 471/04 (2006.01)



(52) **U.S. Cl.**
CPC *H01L 51/0052* (2013.01); *C07D 471/04*
(2013.01); *C07D 519/00* (2013.01); *H01L*

(57)


ABSTRACT

There is provided an organic compound having excellent characteristics, including excellent electron-injecting/transporting performance, hole blocking ability, and high stability in the thin-film state, for use as material of an organic electroluminescent device having high efficiency and high durability. There is also provided a high-efficient and high-durable organic electroluminescent device using the compound. The compound is represented by general formula (1) having a substituted anthracene ring structure and a pyridindole ring structure. The organic electroluminescent device includes a pair of electrodes, and one or more organic layers sandwiched between the pair of electrodes, and the compound is used as a constituent material of at least one organic layer.


[Chemical Formula 1]

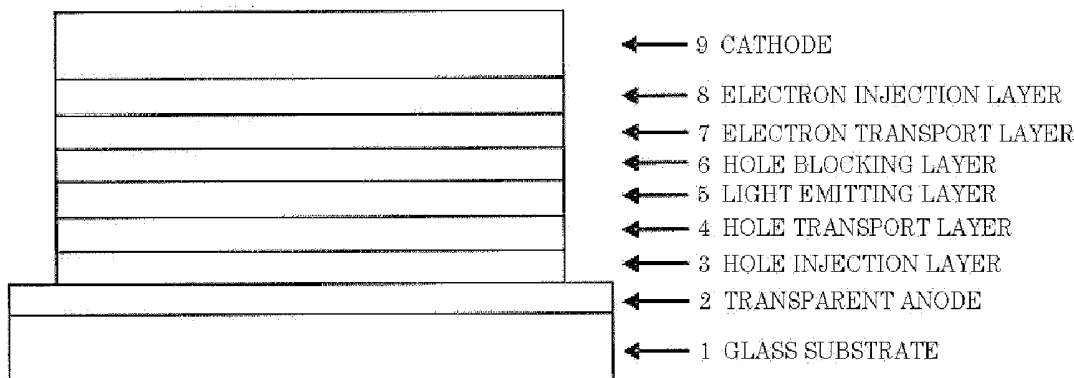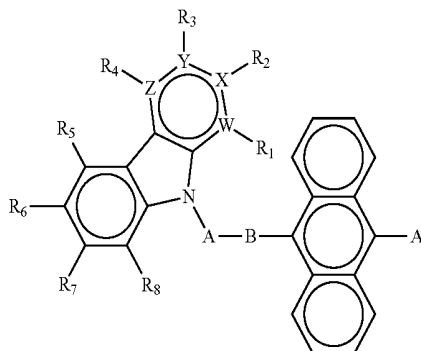


【FIG.1】

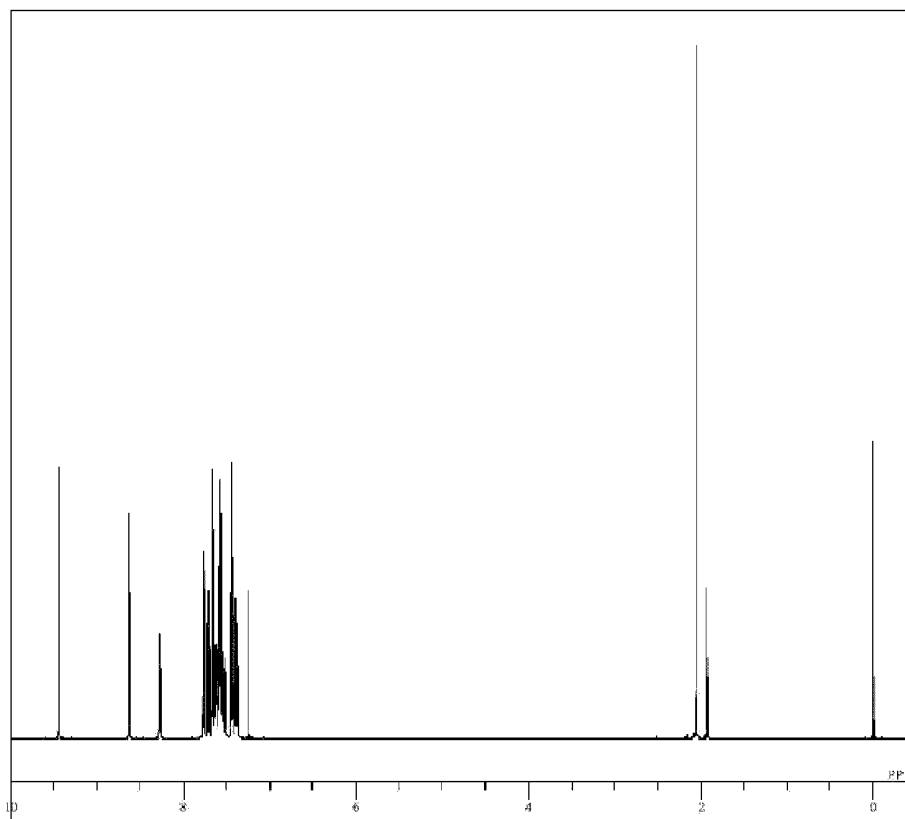


【FIG.2】

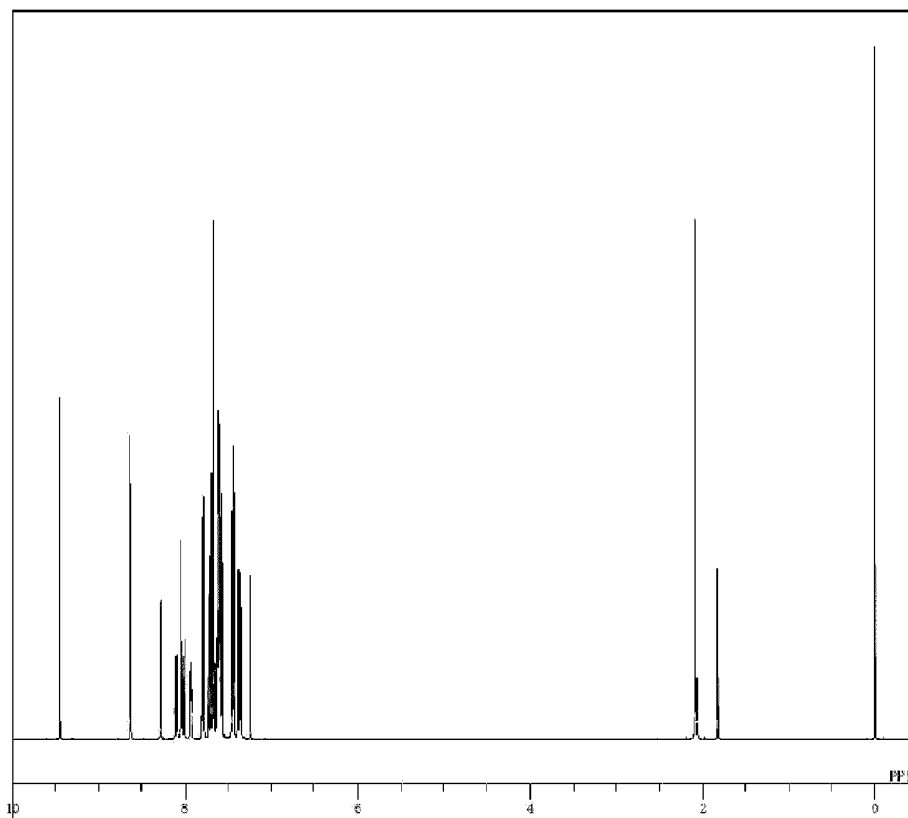


【FIG.3】

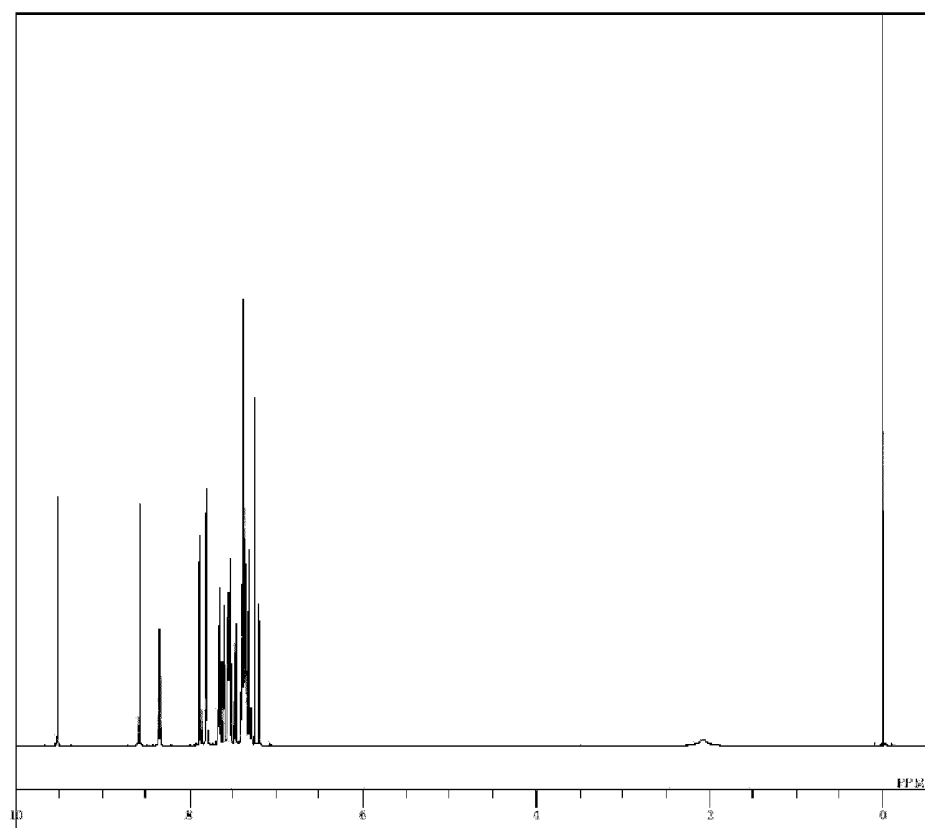


【FIG.4】

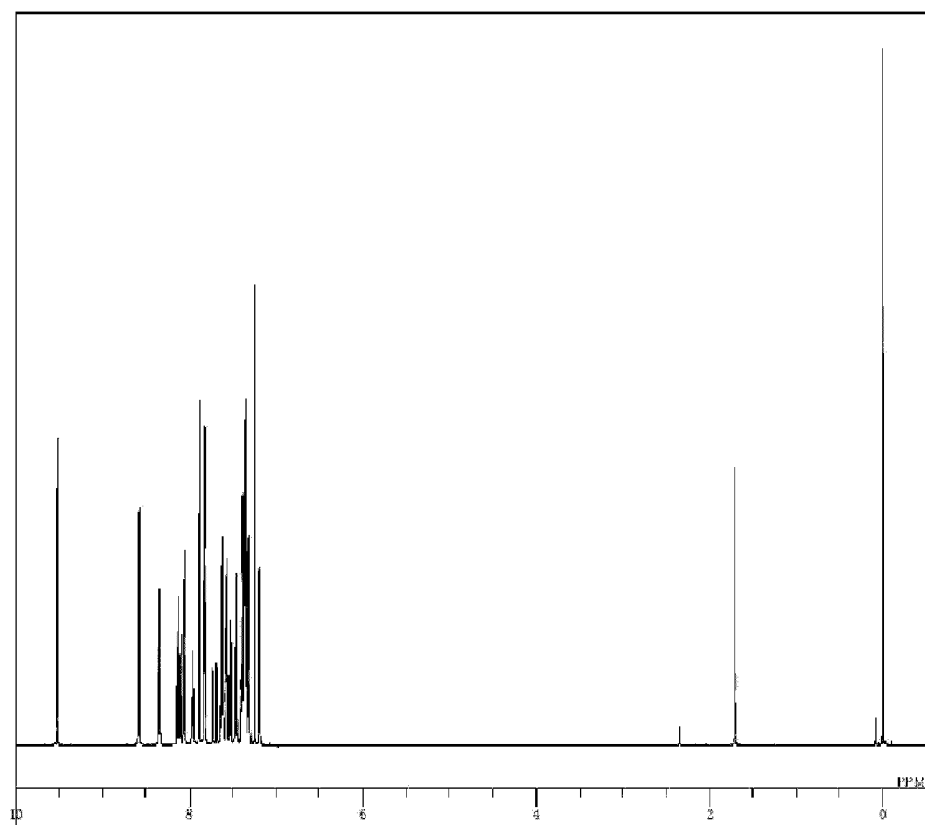


【FIG.5】

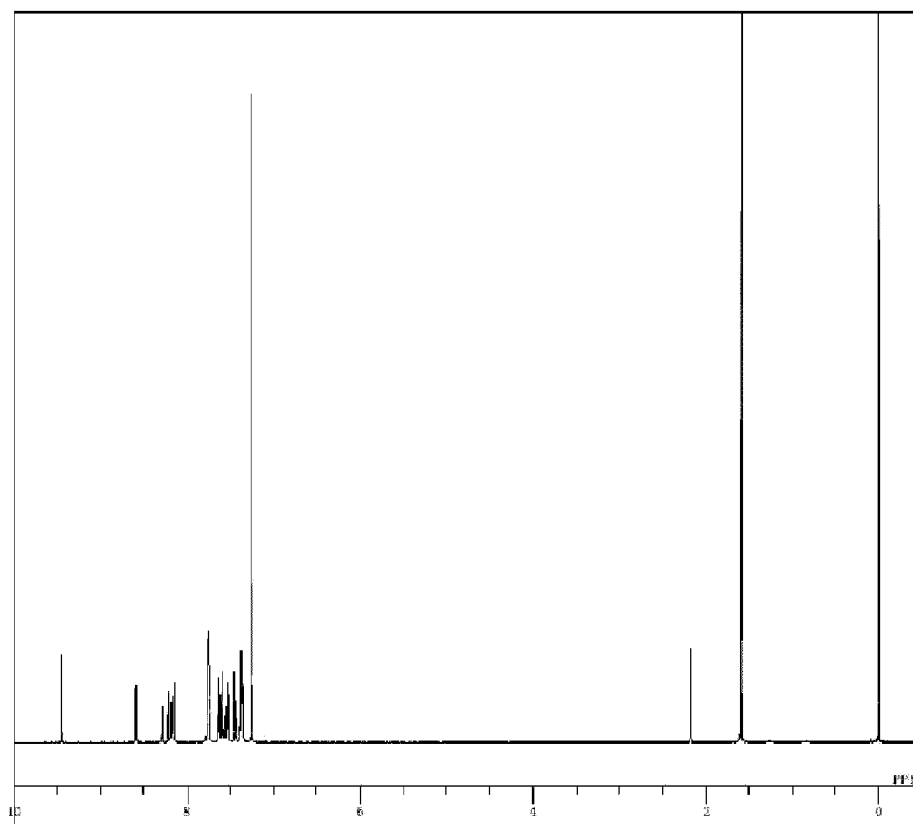


【FIG.6】

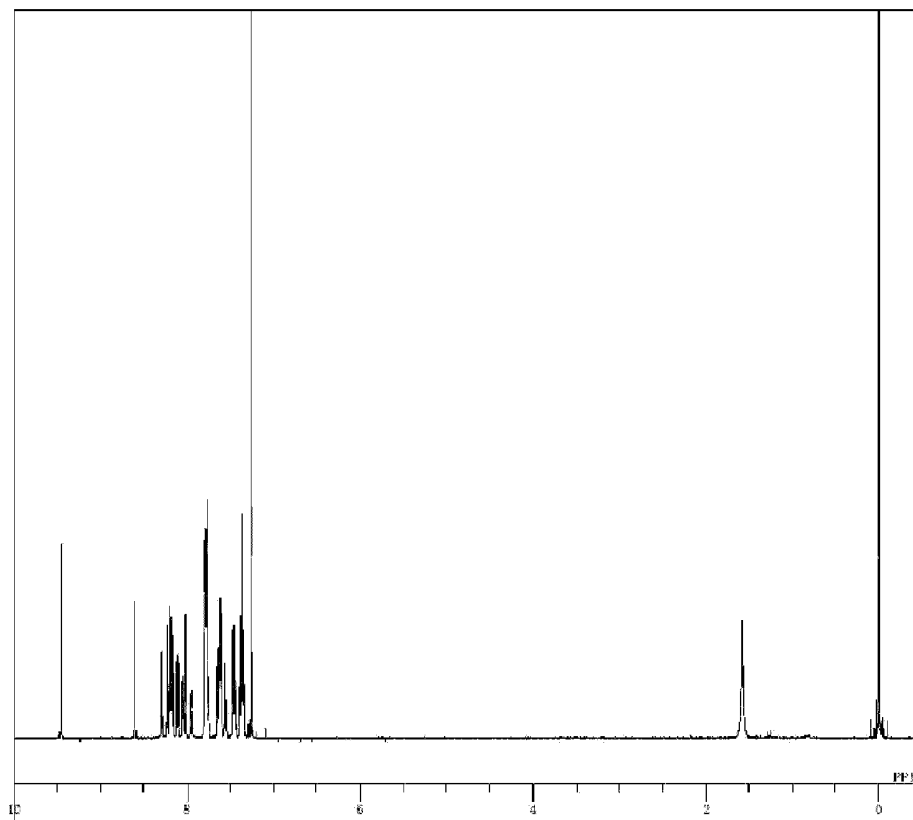


【FIG.7】

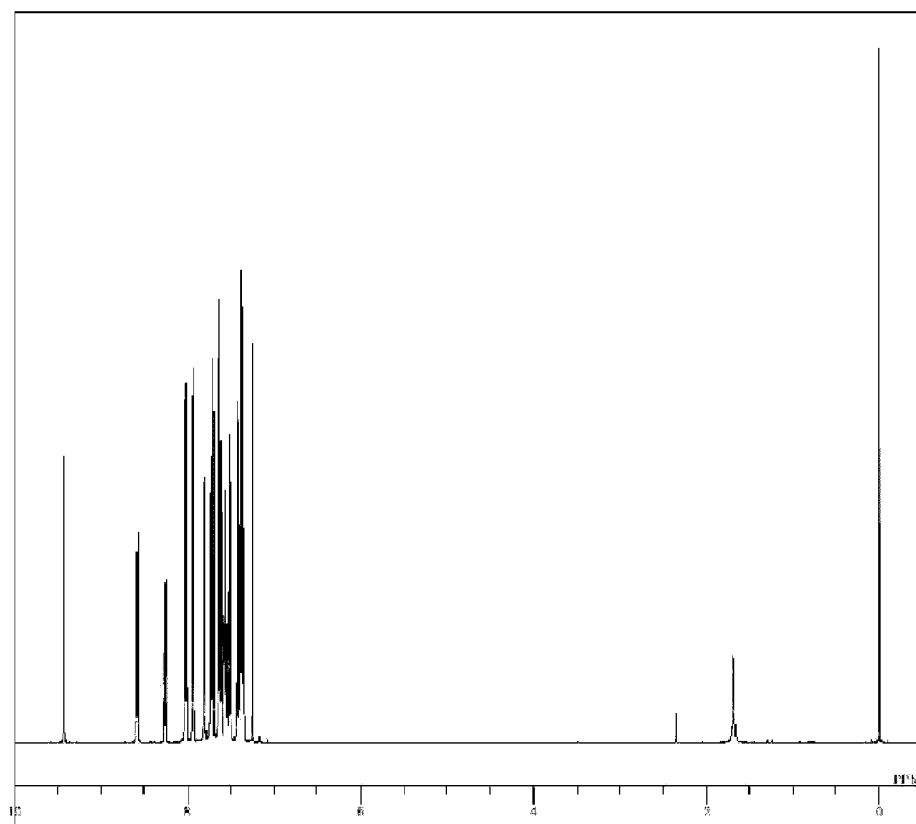


【FIG.8】

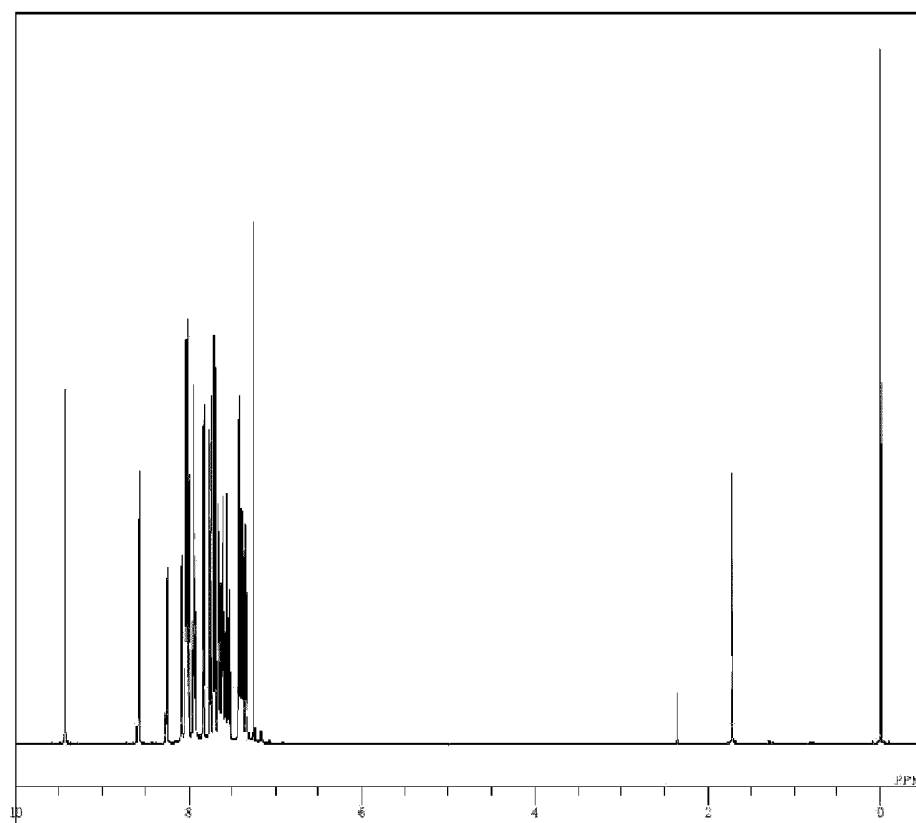


【FIG.9】

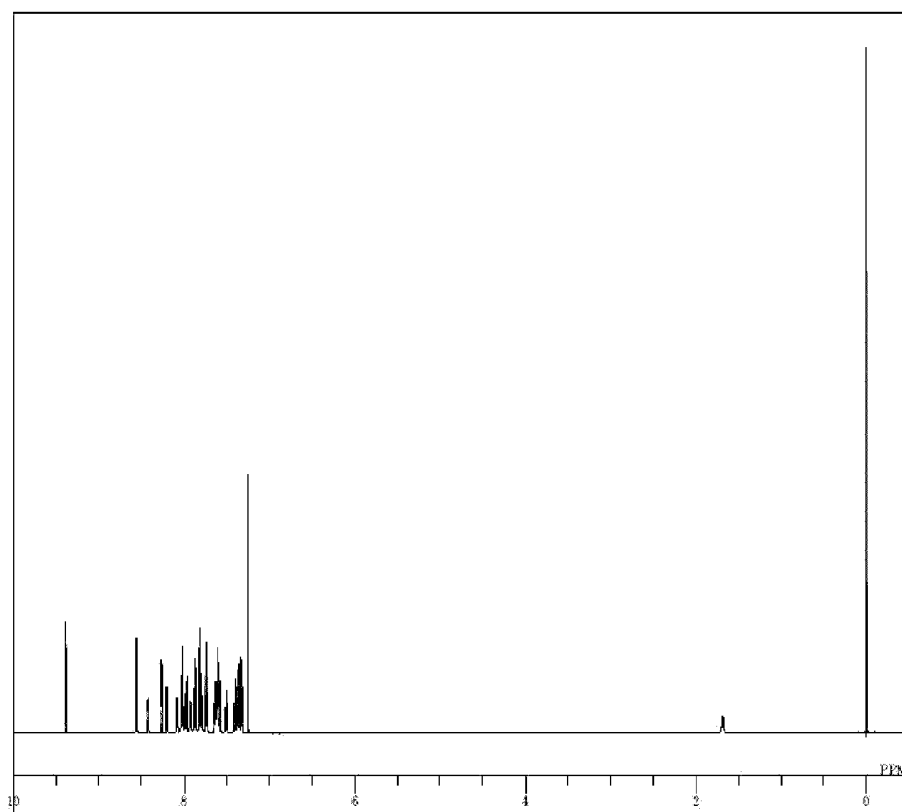


【FIG.10】

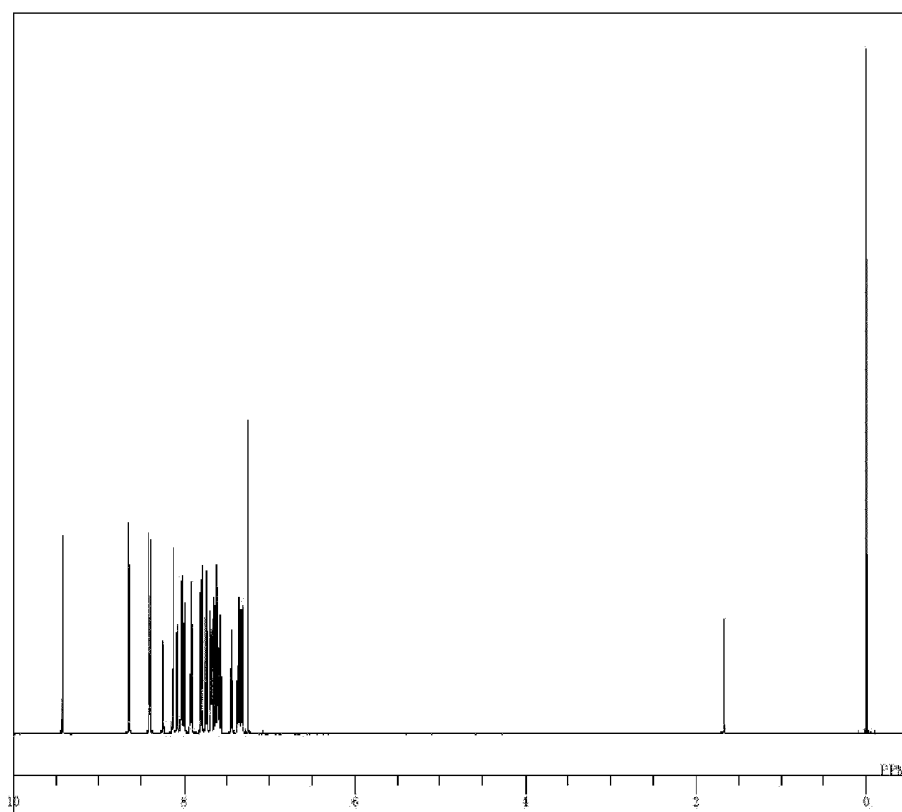


【FIG.11】

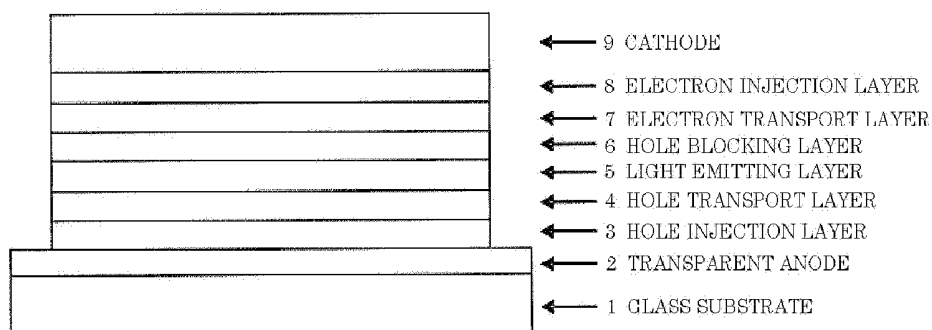


【FIG.12】

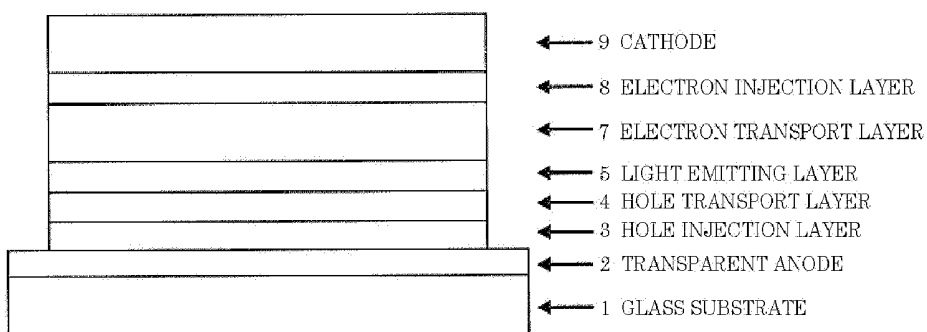

【FIG.13】

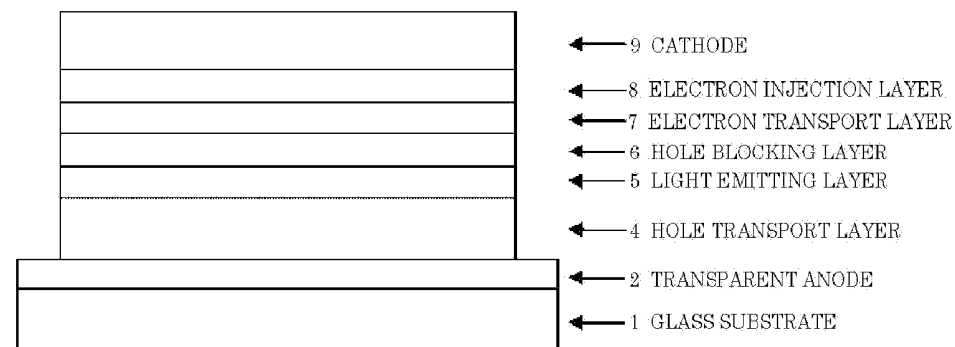

【FIG.14】

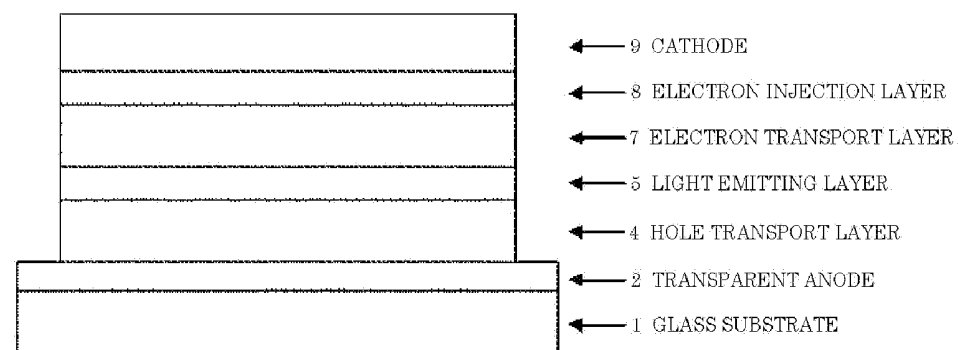

**COMPOUND HAVING SUBSTITUTED
ANTHRACENE RING STRUCTURE AND
PYRIDOINDOLE RING STRUCTURE, AND
ORGANIC ELECTROLUMINESCENT
DEVICE**

TECHNICAL FIELD

[0001] The present invention relates to compounds suited for an organic electroluminescent device, a preferred self light-emitting device for various display devices, and to the device. Specifically, the invention relates to compounds having a substituted anthracene ring structure and a pyridoindole ring structure, and organic electroluminescent devices using such compounds.

BACKGROUND ART

[0002] The organic electroluminescent device is a self-emitting device, and has been actively studied for their brighter, superior viewability and the ability to display clearer images compared with the liquid crystal device.

[0003] In 1987, C. W. Tang and colleagues at Eastman Kodak developed a laminated structure device using materials assigned with different roles, realizing practical applications of an organic electroluminescent device with organic materials. These researchers laminated an electron-transporting phosphor and a hole-transporting organic material, and injected the both charges into the phosphor layer to cause emission in order to obtain a high luminance of 1,000 cd/m² or more at a voltage of 10 V or less (see, for example, Patent Documents 1 and 2).

[0004] To date, various improvements have been made for practical applications of the organic electroluminescent device. In order to realize high efficiency and durability, various roles are further subdivided to provide an electroluminescence device that includes an anode, a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer, an electron injection layer, and a cathode successively formed on a substrate (see, for example, Non-Patent Document 1).

[0005] Further, there have been attempts to use triplet excitons for further improvements of luminous efficiency, and use of phosphorescent materials have been investigated (see, for example, Non-Patent Document 2).

[0006] The light emitting layer can be also fabricated by doping a charge-transporting compound, generally called a host material, with a phosphor or a phosphorescent material. As described in the foregoing lecture preprints, selection of organic materials in an organic electroluminescent device greatly influences various device characteristics, including efficiency and durability.

[0007] In an organic electroluminescent device, the charges injected from the both electrodes recombine at the light emitting layer to cause emission. However, because the hole mobility is faster than the electron mobility, some of the holes pass through the light emitting layer. This is problematic as it lowers efficiency. Accordingly, there is a need for an electron transport material with fast electron mobility.

[0008] Tris(8-hydroxyquinoline)aluminum (hereinafter, "Alq₃"), a representative light-emitting material, is generally used also as an electron transport material. However, with a work function of 5.8 eV, the material cannot be said as having hole blocking performance.

[0009] Insertion of a hole blocking layer is one method of preventing the passage of some of the holes through the light emitting layer and improving the probability of charge recombination at the light emitting layer. Examples of the hole blocking materials proposed so far include triazole derivatives (for example, see Patent Document 3), bathocuproin (hereinafter, "BCP"), and a mixed ligand complex of aluminum (BALq) (see, for example, Non-Patent Document 2).

[0010] On the other hand, 3-(4-biphenyl)-4-phenyl-5-(4-t-butylphenyl)-1,2,4-triazole (hereinafter, "TAZ") is proposed as an electron transport material having excellent hole blocking performance (see, for example, Patent Document 3).

[0011] TAZ has a large work function of 6.6 eV and a high hole blocking ability, and is thus used as an electron-transporting hole blocking layer laminated on the cathode side of a fluorescent layer or a phosphorescent layer produced by methods such as vacuum vapor deposition and coating. TAZ thus contributes to improving the efficiency of an organic electroluminescent device (see, for example, Non-Patent Document 3).

[0012] One big problem of TAZ, however, is the poor electron transportability, and the material is required to be combined with an electron transport material having higher electron transportability for the production of an organic electroluminescent device (see, for example, Non-Patent Document 4).

[0013] BCP has a large work function of 6.7 eV and a high hole blocking ability. However, the low glass transition point (T_g) of 83° C. makes the thin film stability poor, and the material cannot be said as being sufficiently functional as a hole blocking layer.

[0014] Either of the materials lacks film stability, or does not sufficiently serve to block the holes. In order to improve the characteristics of an organic electroluminescent device, there is a need for an organic compound that exhibits excellent electron-injecting/transporting performance with high hole blocking ability, and has high stability in the thin-film state.

CITATION LIST

Patent Documents

- [0015] Patent Document 1: JP-A-8-48656
- [0016] Patent Document 2: Japanese Patent No. 3194657
- [0017] Patent Document 3: Japanese Patent No. 2734341

Non-Patent Documents

- [0018] Non-Patent Document 1: The Japan Society of Applied Physics, 9th Lecture Preprints, pp. 55 to 61 (2001)
- [0019] Non-Patent Document 2: The Japan Society of Applied Physics, 9th Lecture Preprints, pp. 23 to 31 (2001)
- [0020] Non-Patent Document 3: The 50th Applied Physics-Associated Joint Lecture Presentation, 28p-A-6, Lecture Preprints, p. 1413 (2003)
- [0021] Non-Patent Document 4: The Japan Society of Applied Physics, Molecular Electronics and Bioelectronics Journal, Vol. 11, No. 1, pp. 13 to 19 (2000)
- [0022] Non-Patent Document 5: J. Chem. Soc., Perkin Trans. 1, 1505 (1999)
- [0023] Non-Patent Document 6: J. Org. Chem., 60, 7508 (1995)

[0024] Non-Patent Document 7: Synth. Commun., 11, 513 (1981)

SUMMARY OF THE INVENTION

Problems that the Invention is to Solve

[0025] It is an object of the present invention to provide an organic compound of excellent characteristics that exhibits excellent electron-injecting/transporting performance with hole blocking ability, and has high stability in the thin-film state, the organic compound being provided as material for an organic electroluminescent device having high efficiency and high durability. The invention also provides a high-efficient, high-durable organic electroluminescent device using the compound.


[0026] Some of the physical properties of the organic compound to be provided by the present invention include (1) good electron injection characteristics, (2) fast electron mobility, (3) excellent hole blocking ability, (4) stability in the thin-film state, and (5) excellent heat resistance. Some of the physical properties of the organic electroluminescent device to be provided by the present invention include (1) high luminous efficiency and high power efficiency, (2) low turn on voltage, and (3) low actual driving voltage.

Means for Solving the Problems

[0027] In order to achieve the foregoing objects, the present inventors focused on the high electron transporting ability and the excellent heat resistance of a pyridoindole ring structure, and produced various test organic electroluminescent devices using compounds designed and chemically synthesized to have a substituted anthracene ring structure and a pyridoindole ring structure. The present invention was completed after thorough evaluations of the device characteristics.

[0028] Specifically, the present invention is a compound having a substituted anthracene ring structure and a pyridoindole ring structure, represented by the general formula (1) below. Further, the present invention is an organic electroluminescent device that includes a pair of electrodes and one or more organic layers sandwiched between the electrodes, wherein the compound is used as a constituent material of at least one organic layer.

[Chemical Formula 1]

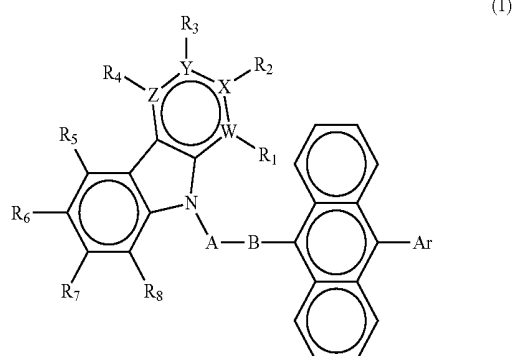

(In the formula, Ar represents substituted or unsubstituted aromatic hydrocarbon, or substituted or unsubstituted con-

densed polycyclic aromatic, A represents a divalent group of substituted or unsubstituted aromatic hydrocarbon, a divalent group of a substituted or unsubstituted aromatic heterocyclic ring, or a divalent group of substituted or unsubstituted condensed polycyclic aromatic, B represents a single bond, a divalent group of substituted or unsubstituted aromatic hydrocarbon, a divalent group of a substituted or unsubstituted aromatic heterocyclic ring, or a divalent group of substituted or unsubstituted condensed polycyclic aromatic, R1 to R8 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, and W, X, Y, and Z represent a carbon atom or a nitrogen atom. Here, only one of W, X, Y, and Z is a nitrogen atom, and, in this case, the nitrogen atom does not have the substituents R1 to R4.)

[0029] Specific examples of “aromatic hydrocarbon” or “condensed polycyclic aromatic” in the “substituted or unsubstituted aromatic hydrocarbon” or “substituted or unsubstituted condensed polycyclic aromatic” represented by Ar in general formula (1) include phenyl, biphenyl, terphenyl, naphthyl, anthryl, phenanthryl, fluorenyl, indenyl, and pyrenyl.

[0030] Specific examples of “substituent” in the “substituted aromatic hydrocarbon” or “substituted condensed polycyclic aromatic” represented by Ar in general formula (1) include a deuterium atom, a fluorine atom, a chlorine atom, cyano, hydroxyl, nitro, linear or branched alkyl of 1 to 6 carbon atoms, cyclopentyl, cyclohexyl, linear or branched alkoxy of 1 to 6 carbon atoms, dialkylamino substituted with linear or branched alkyl of 1 to 6 carbon atoms, phenyl, naphthyl, anthryl, fluorenyl, styryl, pyridyl, pyridoindolyl, quinolyl, and benzothiazolyl. These substituents may be further substituted.

[0031] Specific examples of “aromatic hydrocarbon”, “aromatic heterocyclic group”, or “condensed polycyclic aromatic” in the “substituted or unsubstituted aromatic hydrocarbon”, “substituted or unsubstituted aromatic heterocyclic group”, or “substituted or unsubstituted condensed polycyclic aromatic” represented by R1 to R8 in general formula (1) include phenyl, biphenyl, terphenyl, tetrakisphenyl, styryl, naphthyl, anthryl, acenaphthenyl, fluorenyl, phenanthryl, indenyl, pyrenyl, pyridyl, triazyl, pyrimidyl, furanyl, pyrrolyl, thienyl, quinolyl, isoquinolyl, benzofuranyl, benzothienyl, indolyl, carbazolyl, benzooxazolyl, benzothiazolyl, quinoxalyl, benzoimidazolyl, pyrazolyl, dibenzofuran, dibenzothienyl, naphthyridinyl, phenanthrolinyl, acridinyl, and pyridoindolyl.

[0032] Specific examples of “substituent” in the “substituted aromatic hydrocarbon”, “substituted aromatic heterocyclic group”, or “substituted condensed polycyclic aromatic” represented by R1 to R8 in general formula (1) include a deuterium atom, a fluorine atom, a chlorine atom, trifluoromethyl, linear or branched alkyl of 1 to 6 carbon atoms, phenyl, biphenyl, terphenyl, tetrakisphenyl, styryl, naphthyl, fluorenyl, phenanthryl, indenyl, pyrenyl, and pyridoindolyl. These substituents may be further substituted.

[0033] Specific examples of “linear or branched alkyl of 1 to 6 carbon atoms” in the “linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent” represented by R1

to R8 in general formula (1) include methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl, t-butyl, n-pentyl, i-pentyl, t-pentyl, n-hexyl, i-hexyl, and t-hexyl.

[0034] Specific examples of “substituent” in the “linear or branched alkyl of 1 to 6 carbon atoms having a substituent” represented by R1 to R8 in general formula (1) include a deuterium atom, a fluorine atom, a chlorine atom, phenyl, biphenyl, terphenyl, tetrakisphenyl, naphthyl, fluorenyl, phenanthryl, indenyl, pyrenyl, and pyridindolyl. These substituents may be further substituted.

[0035] Specific examples of “divalent group of aromatic hydrocarbon”, “divalent group of an aromatic heterocyclic ring”, or “divalent group of condensed polycyclic aromatic” in the “divalent group of substituted or unsubstituted aromatic hydrocarbon”, “divalent group of a substituted or unsubstituted aromatic heterocyclic ring”, or “divalent group of substituted or unsubstituted condensed polycyclic aromatic” represented by A or B in general formula (1) include phenylene, biphenylene, terphenylene, tetrakisphenylene, naphthylene, anthrylene, phenanthrylene, fluorenylene, phenanthrolylene, indenylene, pyrenylene, pyridinylene, pyrimidinylene, quinolyene, isoquinolyene, indolyene, carbazolyene, quinoxalyene, benzoimidazolylene, pyrazolyene, naphthyridinylene, phenanthrolinylene, and acridinylene.

[0036] Specific examples of “substituent” in the “divalent group of substituted aromatic hydrocarbon”, “divalent group of a substituted aromatic heterocyclic ring”, or “divalent group of substituted condensed polycyclic aromatic” represented by A or B in general formula (1) include a deuterium atom, a fluorine atom, a chlorine atom, trifluoromethyl, linear or branched alkyl of 1 to 6 carbon atoms, phenyl, biphenyl, terphenyl, tetrakisphenyl, styryl, naphthyl, fluorenyl, phenanthryl, indenyl, pyrenyl, and pyridindolyl. These substituents may be further substituted.

[0037] The compound of general formula (1) having a substituted anthracene ring structure and a pyridindole ring structure of the present invention is a novel compound that has faster electron movement and superior hole blocking ability than conventional electron transport materials, and that remains thermally stable under high temperature conditions while having a stable thin-film state.

[0038] The compound of general formula (1) having a substituted anthracene ring structure and a pyridindole ring structure of the present invention can be used as a constituent material of the electron injection layer and/or electron transport layer of an organic electroluminescent device (hereinafter, simply “organic EL device”). With the material having higher electron injectability and mobility than the conventional materials, the electron transport efficiency from the electron transport layer to the light emitting layer improves. This improves the luminous efficiency, and lowers driving voltage and thus improves the durability of the organic EL device.

[0039] The compound of general formula (1) having a substituted anthracene ring structure and a pyridindole ring structure of the present invention also can be used as a constituent material of the hole blocking layer of an organic EL device. With the material having an excellent hole blocking ability and superior electron transportability and higher stability in the thin-film state than the conventional materials, the driving voltage lowers and the current resistance improves

while maintaining high luminous efficiency. As a result, the maximum emission luminance of the organic EL device improves.

[0040] The compound of general formula (1) having a substituted anthracene ring structure and a pyridindole ring structure of the present invention also can be used as a constituent material of the light emitting layer of an organic EL device. The material of the present invention has superior electron transportability and a wider band gap than the conventional materials, and can thus be used as the host material of the light emitting layer, and to form the light emitting layer by carrying a fluorescent material or phosphorescent material called a dopant. In this way, an organic EL device can be realized that has a low driving voltage and improved luminous efficiency.

[0041] The organic EL device of the present invention uses the compound having a substituted anthracene ring structure and a pyridindole ring structure, wherein the compound has faster electron movement and superior hole blocking ability than the conventional electron transport materials, and remains thermally stable under high temperature conditions while having a stable thin-film state. In this way, high efficiency and high durability were realized.

Advantage of the Invention

[0042] The compound having a substituted anthracene ring structure and a pyridindole ring structure of the present invention is useful as a constituent material of the electron injection layer, electron transport layer, hole blocking layer, or light emitting layer of an organic EL device. The compound has an excellent hole blocking ability, and excels in heat resistance while having a stable thin-film state. The organic EL device of the present invention has high luminous efficiency and high power efficiency, and can thus lower the actual driving voltage of the device. Further, the turn on voltage can be reduced to improve durability.

BRIEF DESCRIPTION OF THE DRAWINGS

[0043] FIG. 1 is a ¹H-NMR chart of the compound of Example 1 of the present invention (Compound 9).

[0044] FIG. 2 is a ¹H-NMR chart of the compound of Example 2 of the present invention (Compound 10).

[0045] FIG. 3 is a ¹H-NMR chart of the compound of Example 3 of the present invention (Compound 42).

[0046] FIG. 4 is a ¹H-NMR chart of the compound of Example 4 of the present invention (Compound 45).

[0047] FIG. 5 is a ¹H-NMR chart of the compound of Example 5 of the present invention (Compound 52).

[0048] FIG. 6 is a ¹H-NMR chart of the compound of Example 6 of the present invention (Compound 55).

[0049] FIG. 7 is a ¹H-NMR chart of the compound of Example 7 of the present invention (Compound 59).

[0050] FIG. 8 is a ¹H-NMR chart of the compound of Example 8 of the present invention (Compound 61).

[0051] FIG. 9 is a ¹H-NMR chart of the compound of Example 9 of the present invention (Compound 87).

[0052] FIG. 10 is a ¹H-NMR chart of the compound of Example 10 of the present invention (Compound 89).

[0053] FIG. 11 is a diagram illustrating the configuration of the EL devices of Examples 27 to 38.

[0054] FIG. 12 is a diagram illustrating the configuration of the EL device of Comparative Example 1.

[0055] FIG. 13 is a diagram illustrating the configuration of the EL device of Examples 39 to 44.

[0056] FIG. 14 is a diagram illustrating the configuration of the EL device of Comparative Example 2.


MODE FOR CARRYING OUT THE INVENTION

[0057] The compounds having a substituted anthracene ring structure and a pyridoindole ring structure of the present invention are novel compounds, and may be synthesized, for example, as follows. First, a corresponding halogenoanilino-pyridine is subjected to a cyclization reaction using a palladium catalyst to synthesize a pyridoindole ring (see, for example, Non-Patent Document 5), and condensed with halides of various aromatic hydrocarbon compounds, con-


densed polycyclic aromatic compounds, or aromatic heterocyclic compounds to synthesize a compound having a corresponding pyridoindole ring structure. The compound having a corresponding pyridoindole ring structure is then subjected to a cross-coupling reaction, such as Suzuki coupling (see, for example, Non-Patent Document 7), with boronic acid or borate having an anthracene ring structure synthesized using a known method (see, for example, Non-Patent Document 6), so as to synthesize a compound having a substituted anthracene ring structure and a pyridoindole ring structure.

[0058] The following presents specific examples of preferred compounds among the compounds of general formula (1) having a substituted anthracene ring structure and a pyridoindole ring structure. The present invention, however, is not restricted to these compounds.


[Chemical Formula 2]

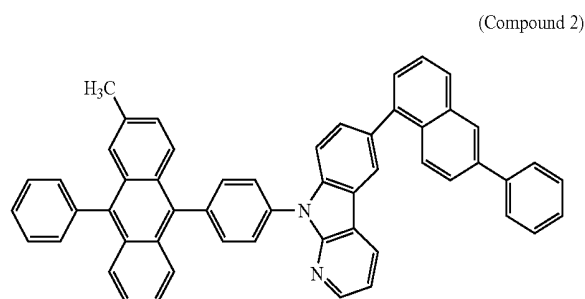


[Chemical Formula 3]

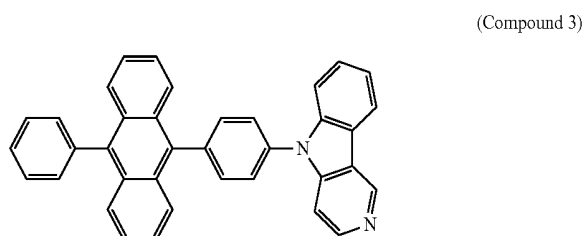


[Chemical Formula 4]

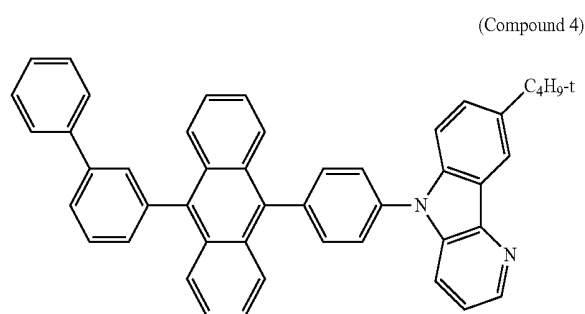


[Chemical Formula 5]

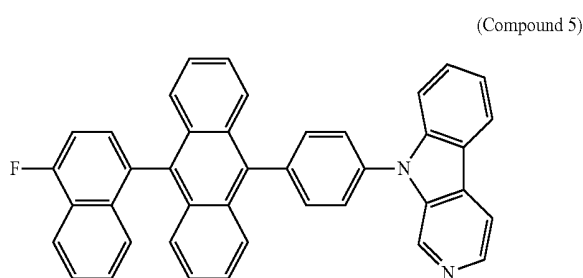

[Chemical Formula 6]

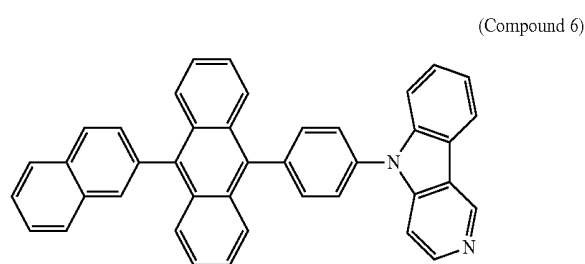

[Chemical Formula 7]

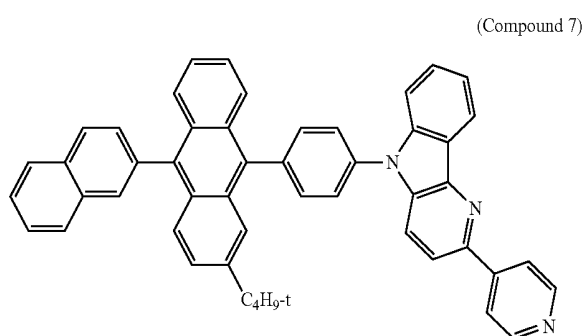



-continued

[Chemical Formula 8]

[Chemical Formula 9]

(Compound 8)

(Compound 9)

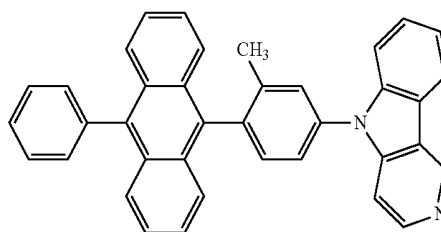
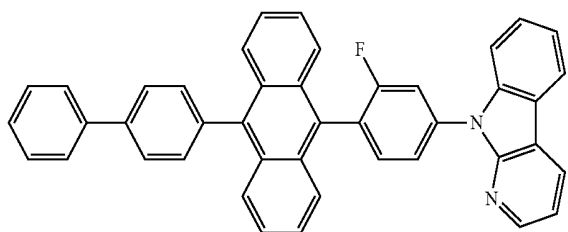


[Chemical Formula 10]

[Chemical Formula 11]

(Compound 10)

(Compound 11)

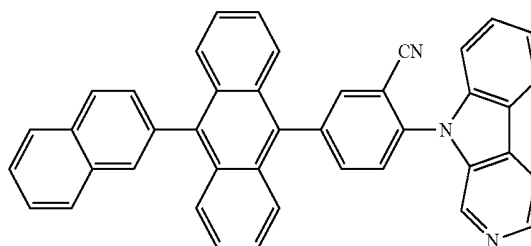
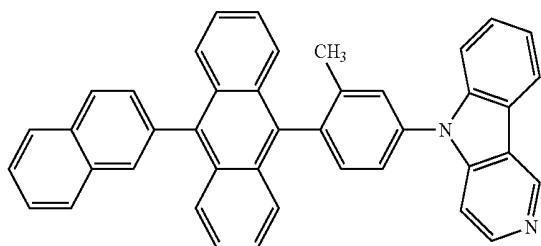


[Chemical Formula 12]

[Chemical Formula 13]

(Compound 12)

(Compound 13)

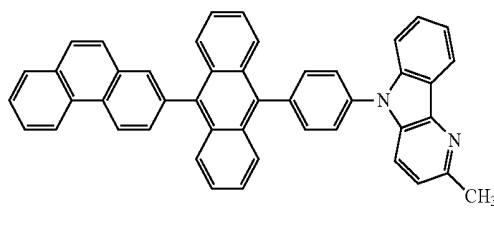
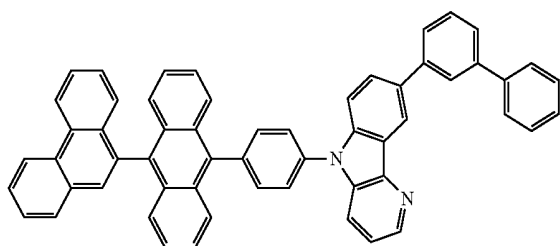


[Chemical Formula 14]

[Chemical Formula 15]

(Compound 14)

(Compound 15)

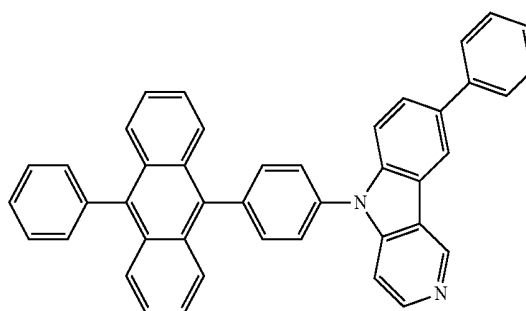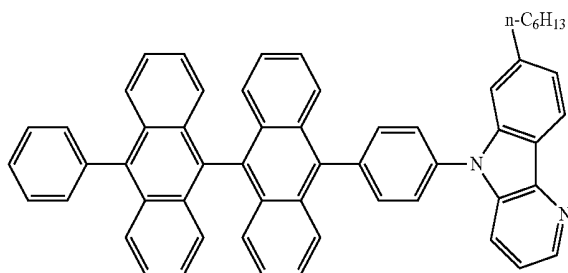



-continued

[Chemical Formula 16]

[Chemical Formula 17]

(Compound 16)

(Compound 17)

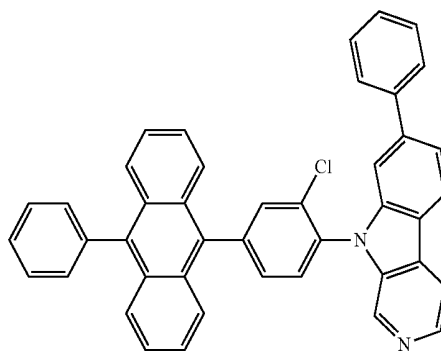
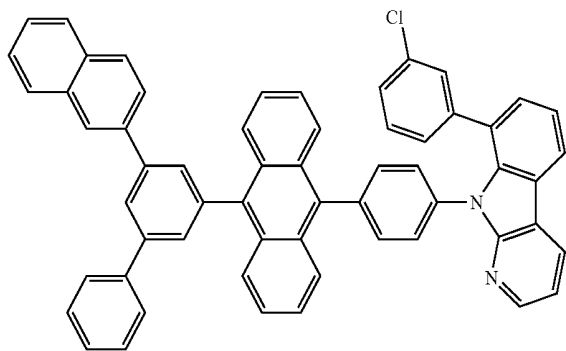


[Chemical Formula 18]

[Chemical Formula 19]

(Compound 18)

(Compound 19)

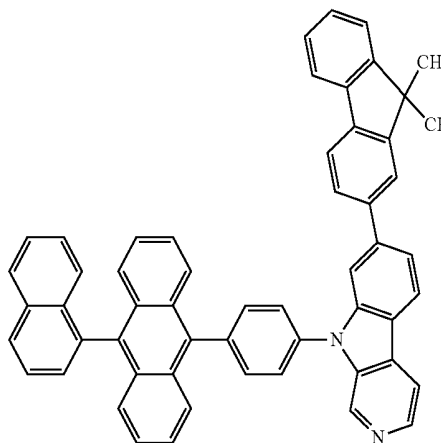
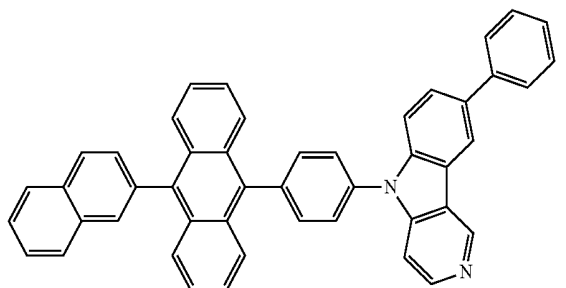


[Chemical Formula 20]

[Chemical Formula 21]

(Compound 20)

(Compound 21)

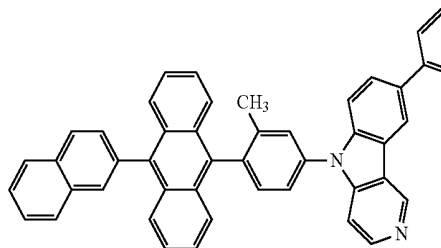
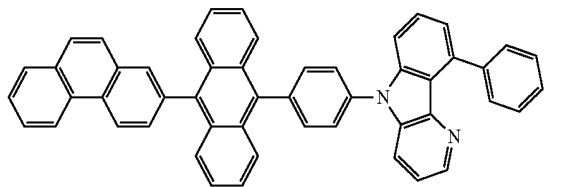


[Chemical Formula 22]

[Chemical Formula 23]

(Compound 22)

(Compound 23)

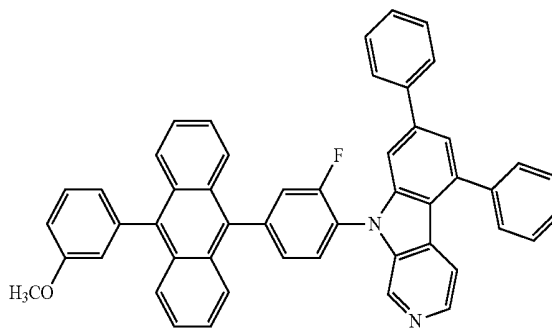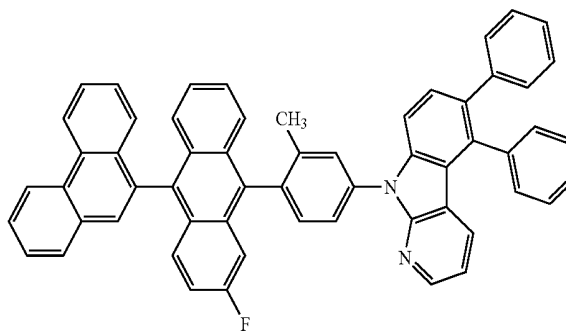



-continued

[Chemical Formula 24]

[Chemical Formula 25]

(Compound 24)

(Compound 25)

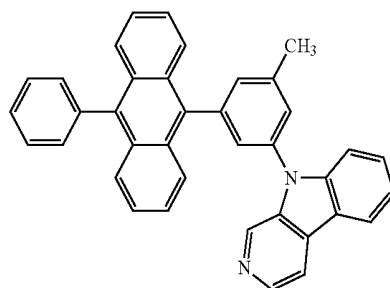
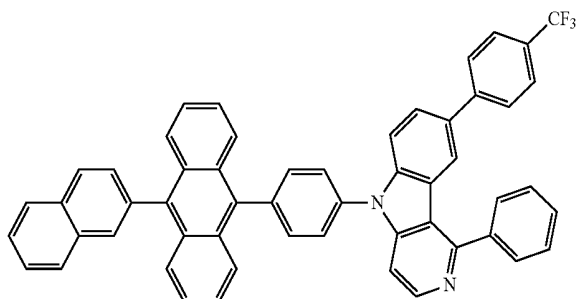


[Chemical Formula 26]

[Chemical Formula 27]

(Compound 26)

(Compound 27)

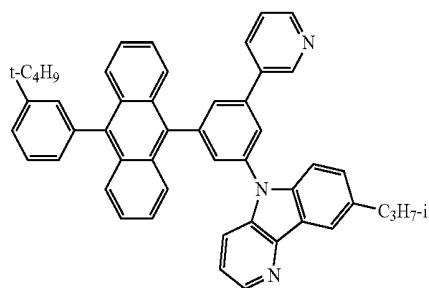
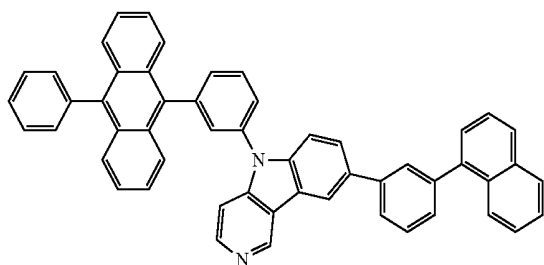


[Chemical Formula 28]

[Chemical Formula 29]

(Compound 28)

(Compound 29)

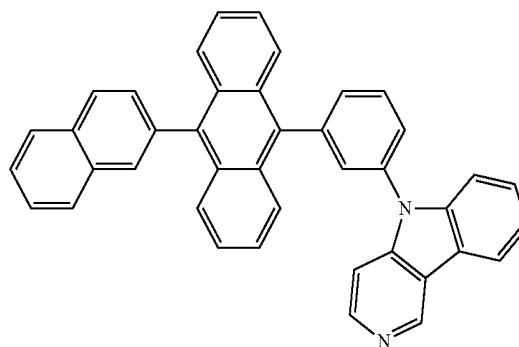
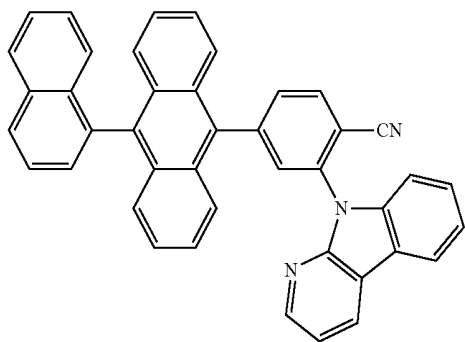


[Chemical Formula 30]

[Chemical Formula 31]

(Compound 30)

(Compound 31)

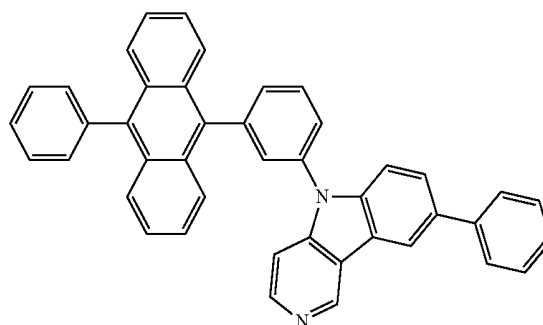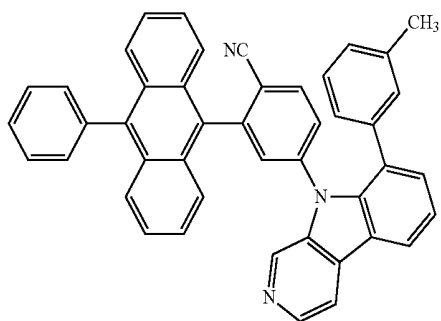



-continued

[Chemical Formula 32]

[Chemical Formula 33]


(Compound 32)

(Compound 33)

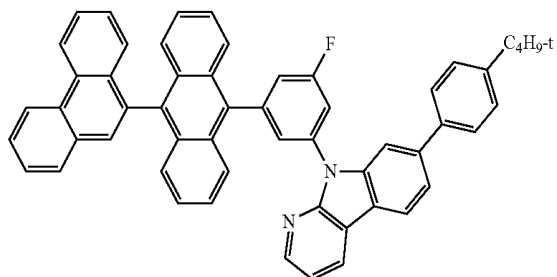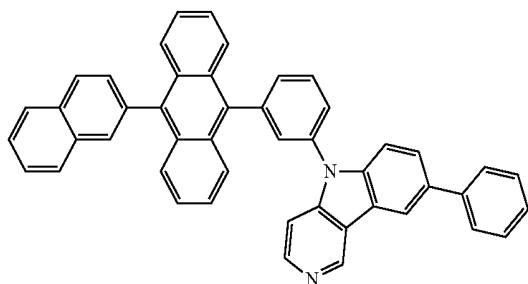

[Chemical Formula 34]

(Compound 34)


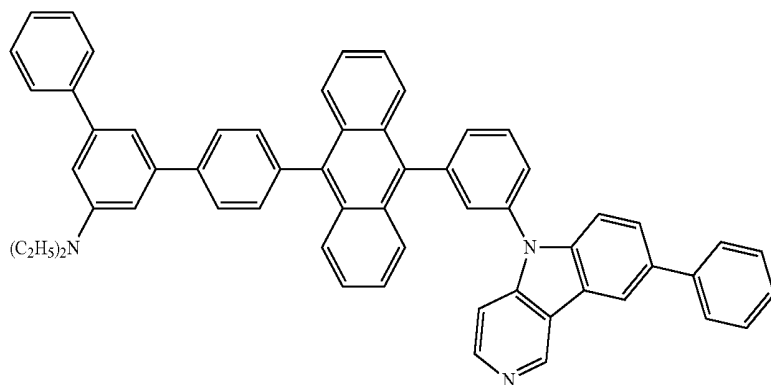


[Chemical Formula 35]

[Chemical Formula 36]

(Compound 35)

(Compound 36)

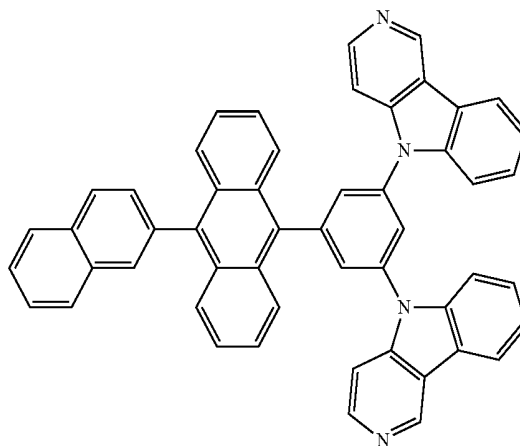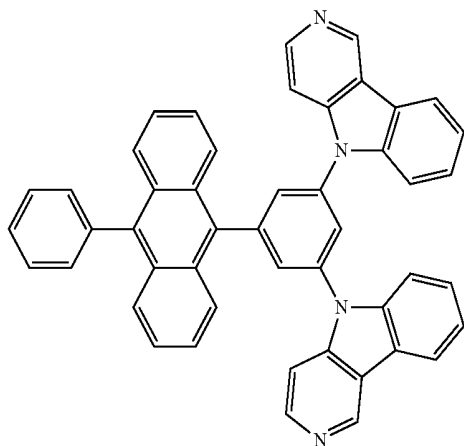



-continued

[Chemical Formula 37]

[Chemical Formula 38]

(Compound 37)

(Compound 38)

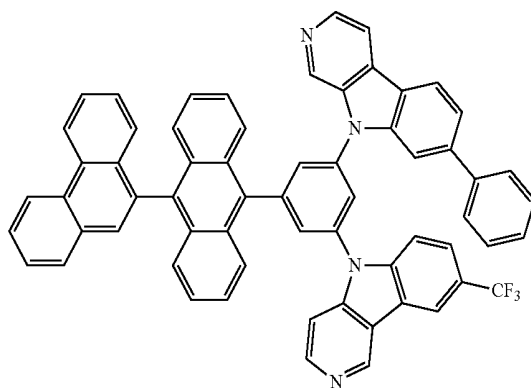
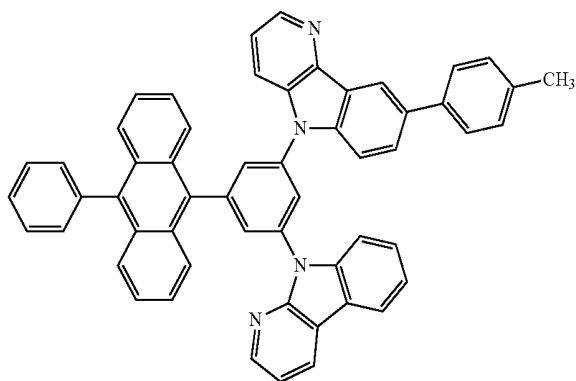


[Chemical Formula 39]

[Chemical Formula 40]

(Compound 39)

(Compound 40)

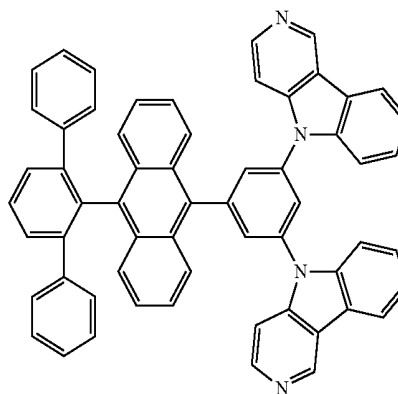
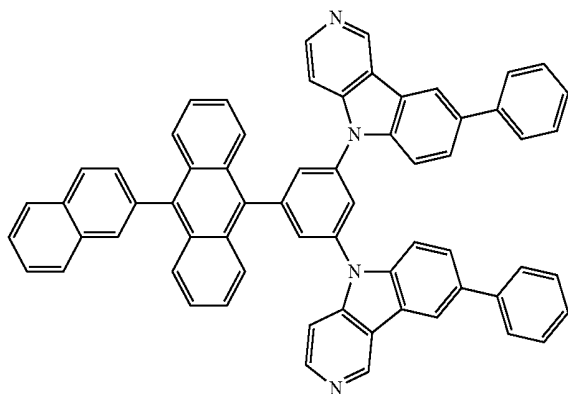


[Chemical Formula 41]

[Chemical Formula 42]

(Compound 41)

(Compound 42)

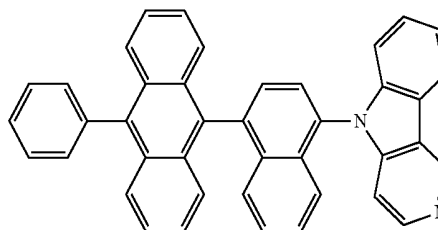
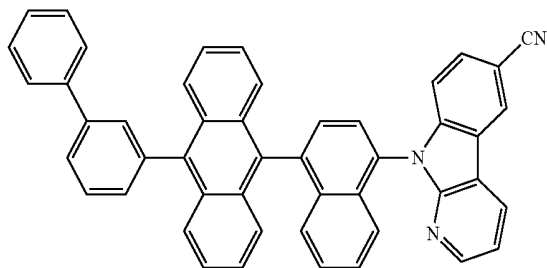


[Chemical Formula 43]

[Chemical Formula 44]

(Compound 43)

(Compound 44)

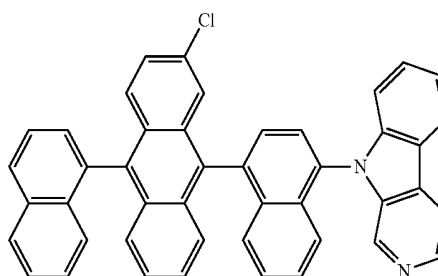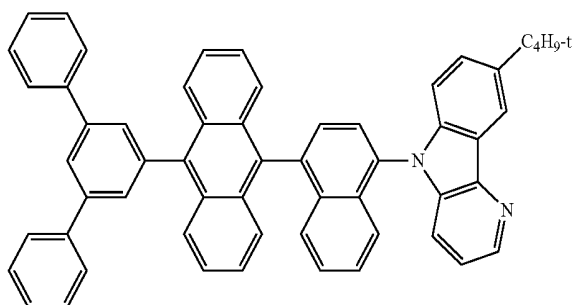



-continued

[Chemical Formula 45]

[Chemical Formula 46]

(Compound 45)

(Compound 46)

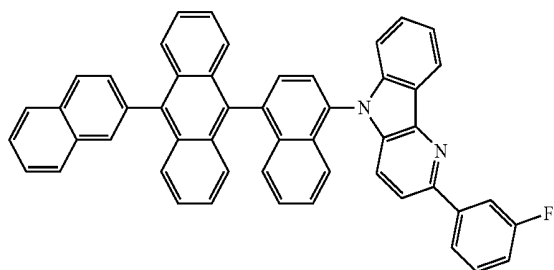
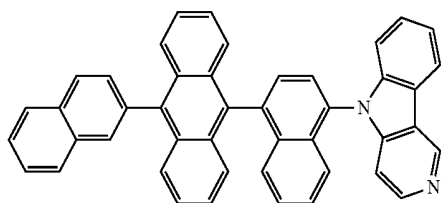


[Chemical Formula 47]

[Chemical Formula 48]

(Compound 47)

(Compound 48)

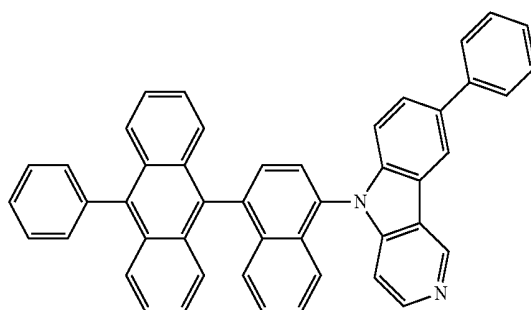
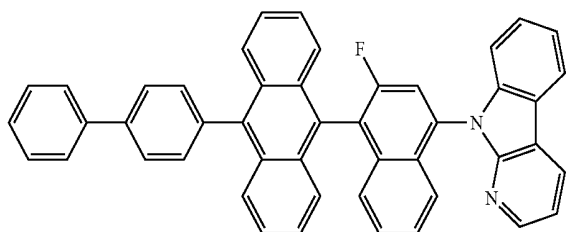


[Chemical Formula 49]

[Chemical Formula 50]

(Compound 49)

(Compound 50)

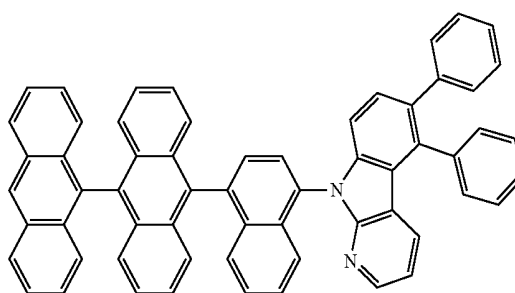
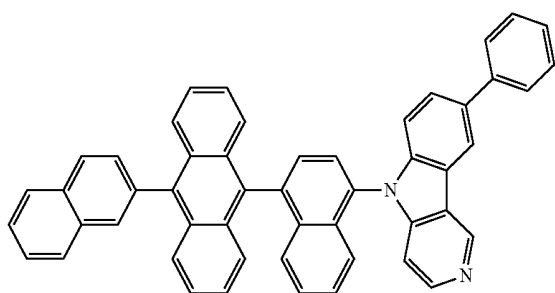


[Chemical Formula 51]

[Chemical Formula 52]

(Compound 51)



(Compound 52)

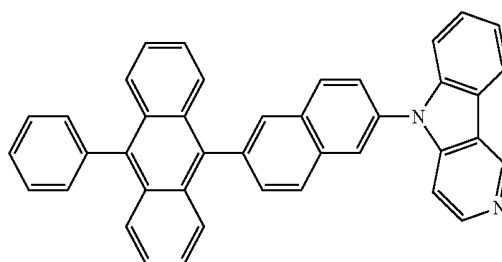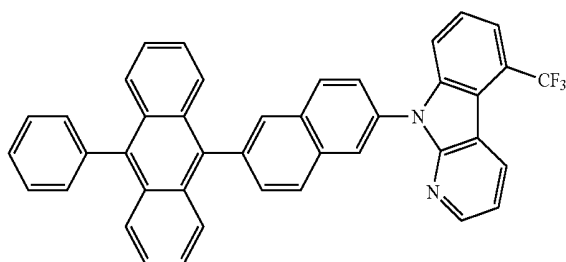

-continued



[Chemical Formula 53]

[Chemical Formula 54]

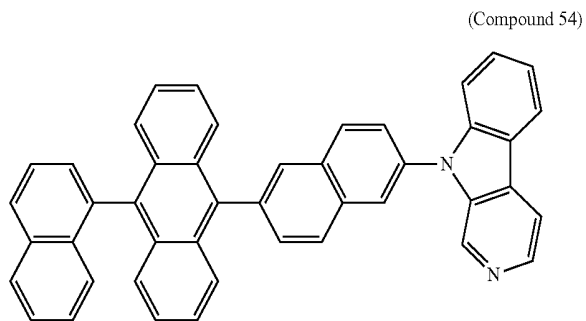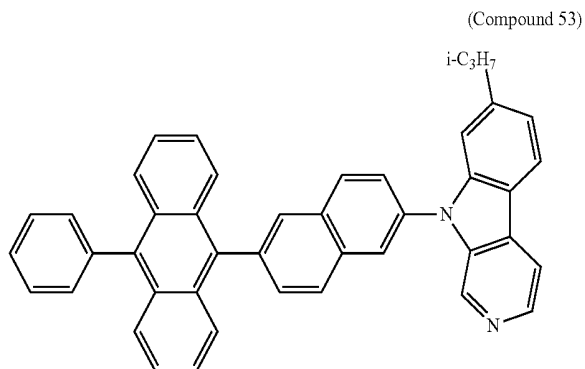



[Chemical Formula 55]

[Chemical Formula 56]

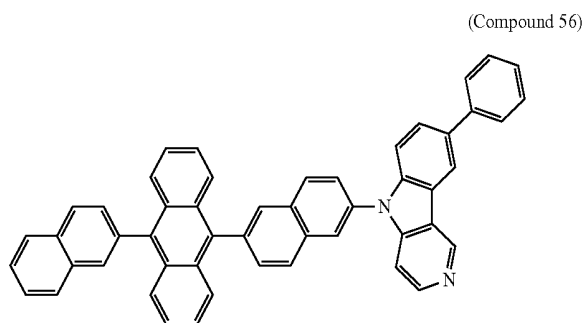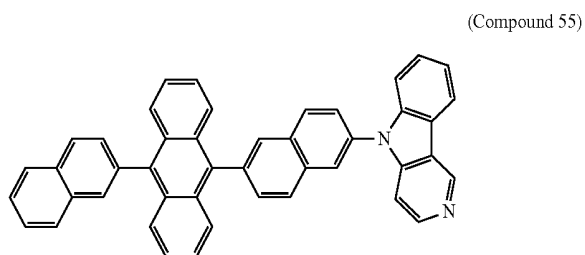



[Chemical Formula 57]

[Chemical Formula 58]

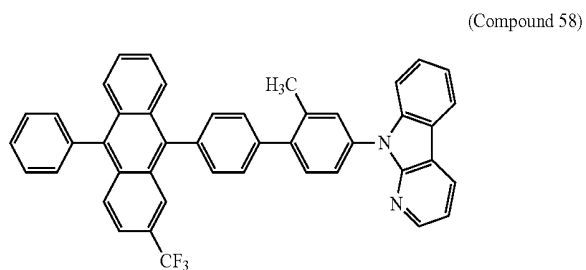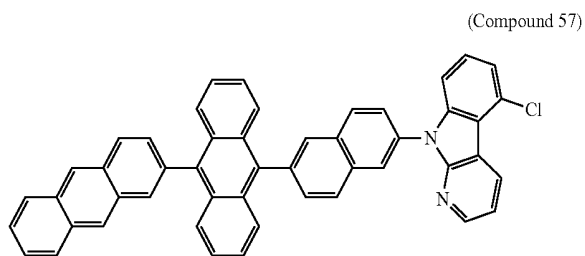



[Chemical Formula 59]

[Chemical Formula 60]

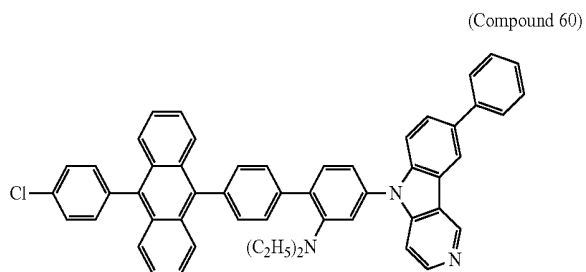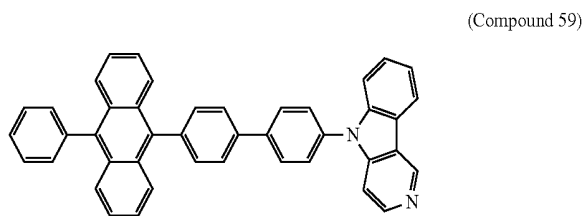

[Chemical Formula 61]


[Chemical Formula 62]

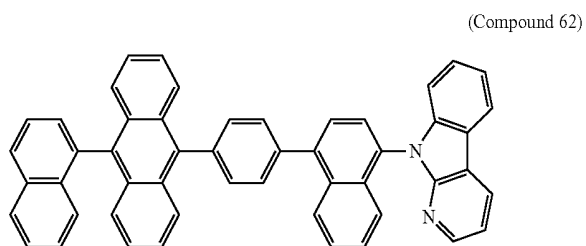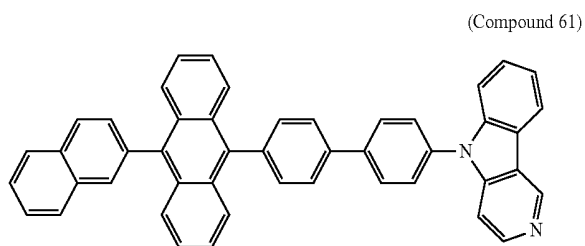

-continued

[Chemical Formula 63]

(Compound 63)


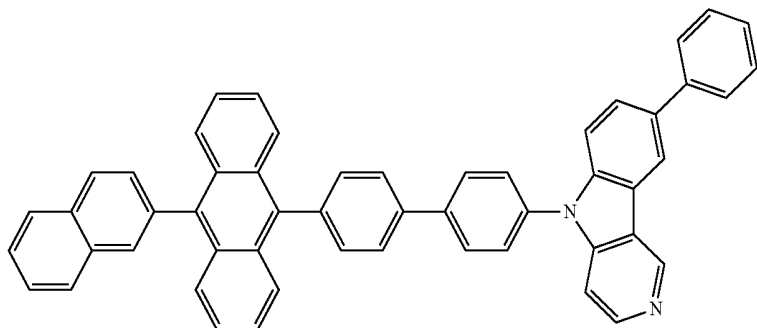


[Chemical Formula 64]

[Chemical Formula 65]

(Compound 64)

(Compound 65)

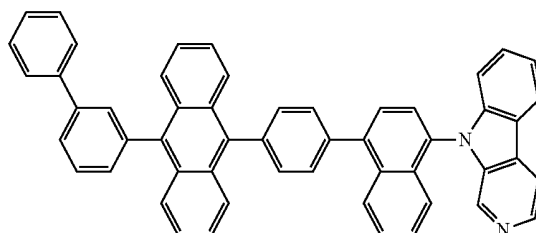
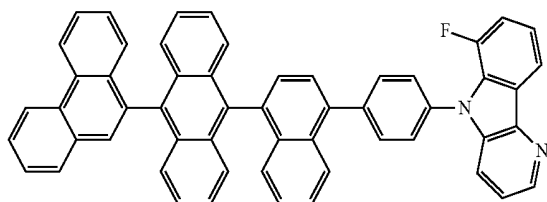


[Chemical Formula 66]

[Chemical Formula 67]

(Compound 66)

(Compound 67)

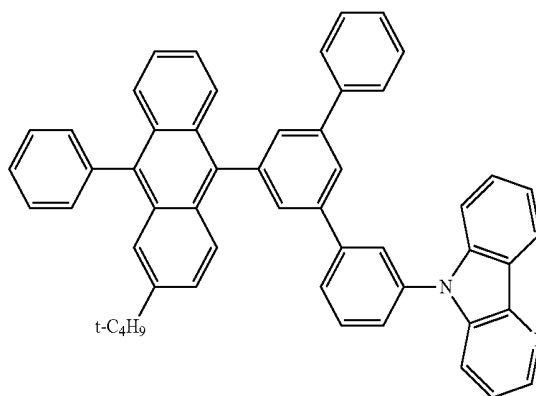
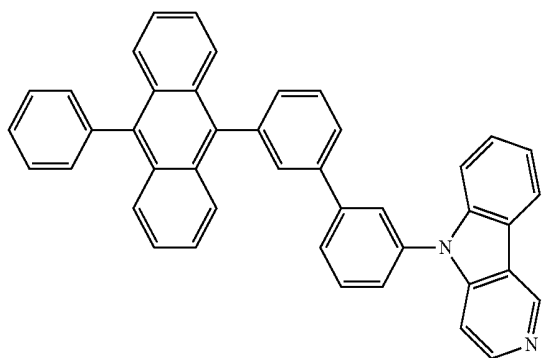


[Chemical Formula 68]

[Chemical Formula 69]

(Compound 68)

(Compound 69)

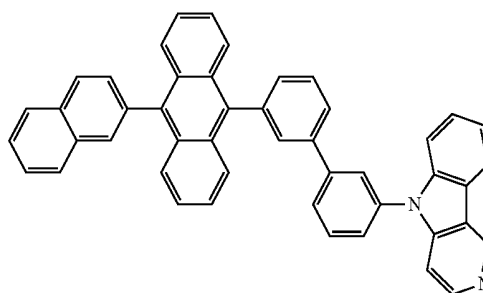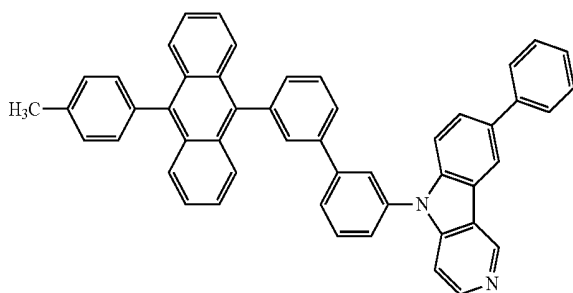



-continued

[Chemical Formula 70]

[Chemical Formula 71]

(Compound 70)

(Compound 71)

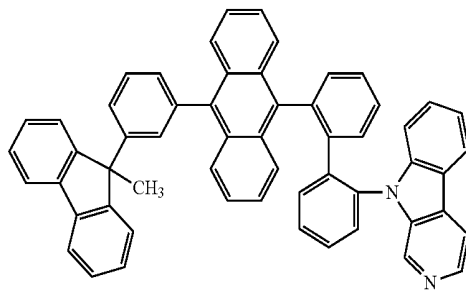
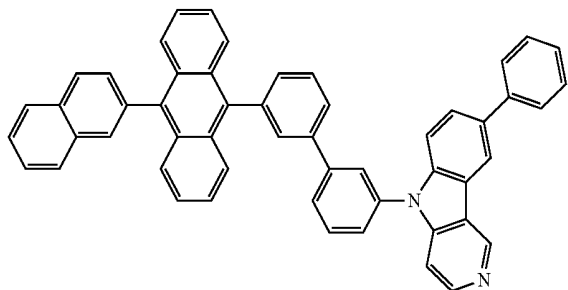


[Chemical Formula 72]

[Chemical Formula 73]


(Compound 72)

(Compound 73)

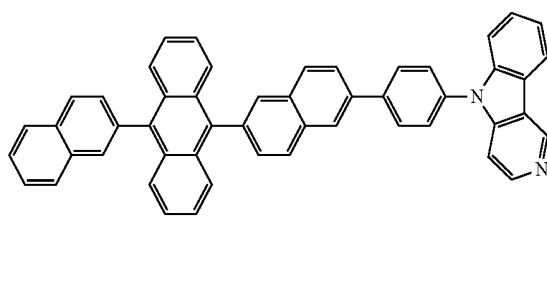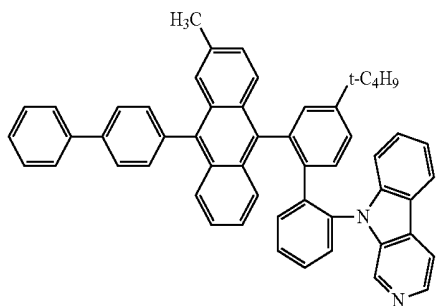


[Chemical Formula 74]

(Compound 74)

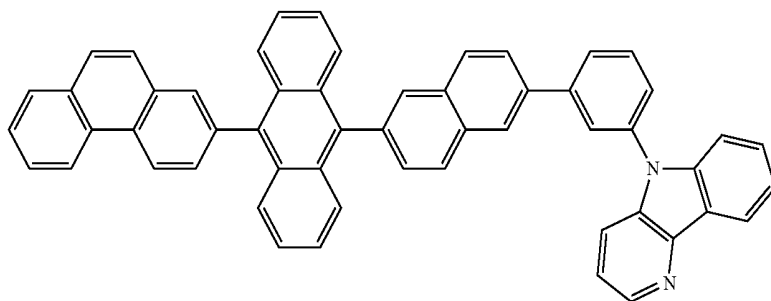

[Chemical Formula 75]

(Compound 75)


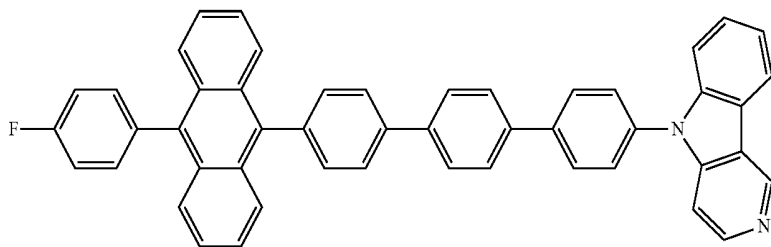


[Chemical Formula 76]

[Chemical Formula 77]

(Compound 76)


(Compound 77)

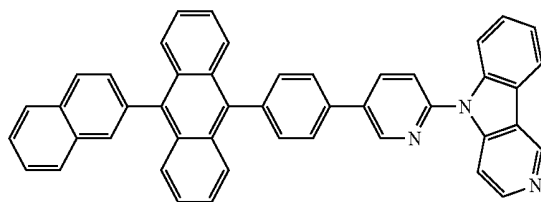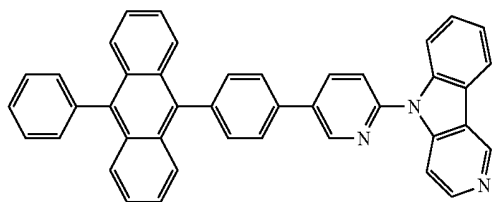

-continued


[Chemical Formula 78]

(Compound 78)

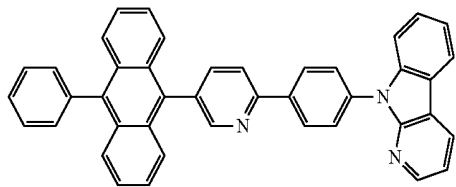


[Chemical Formula 80]

(Compound 80)

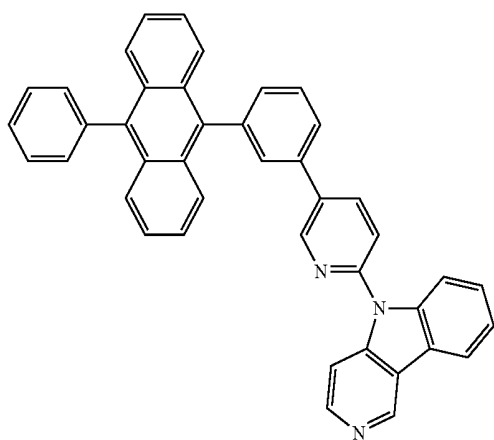


[Chemical Formula 82]

(Compound 82)

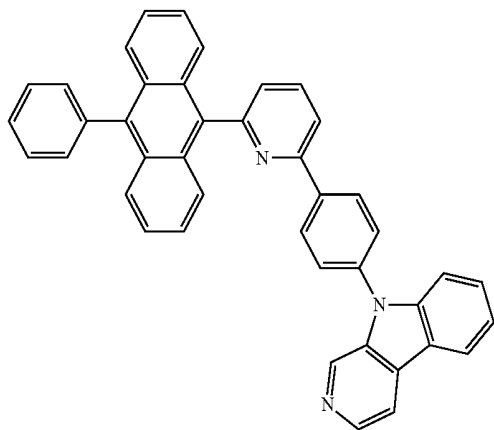


[Chemical Formula 84]

(Compound 84)

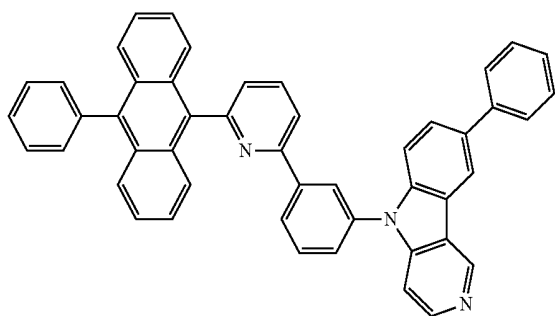


[Chemical Formula 79]

(Compound 79)

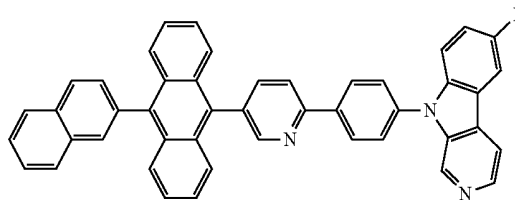


[Chemical Formula 81]

(Compound 81)

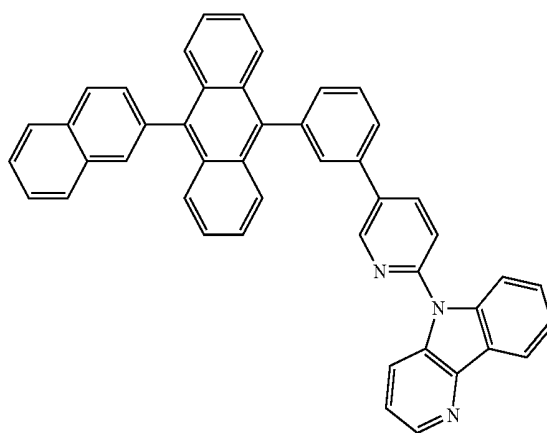


[Chemical Formula 83]

(Compound 83)

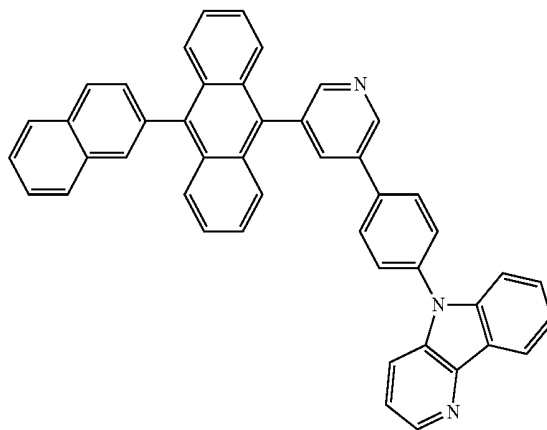

[Chemical Formula 85]


(Compound 85)

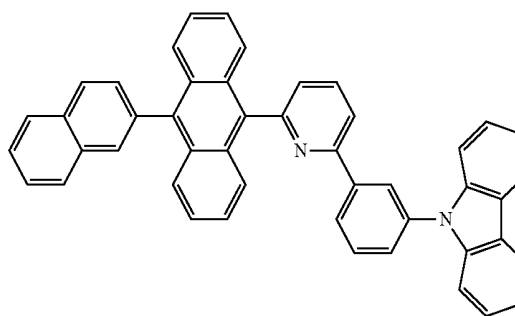

-continued


[Chemical Formula 86]

(Compound 86)

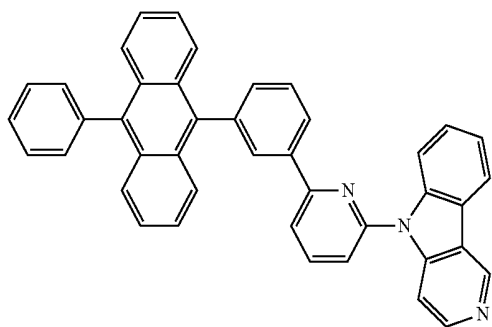


[Chemical Formula 87]

(Compound 87)

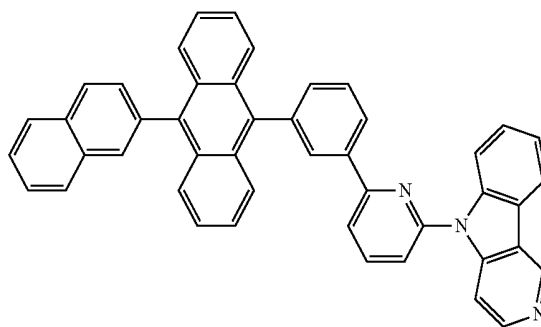


[Chemical Formula 88]

(Compound 88)

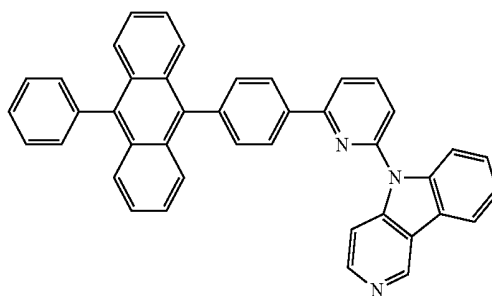


[Chemical Formula 89]

(Compound 89)

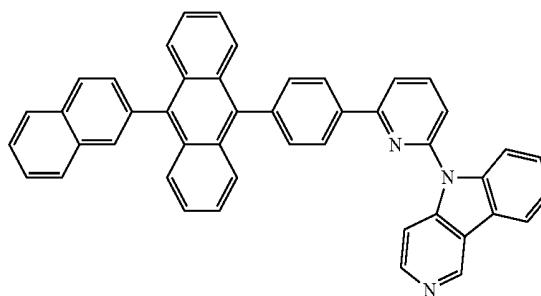


[Chemical Formula 90]

(Compound 90)

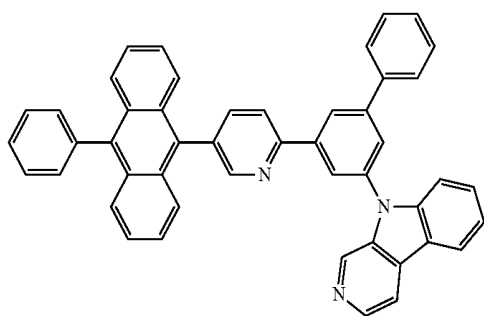


[Chemical Formula 91]

(Compound 91)

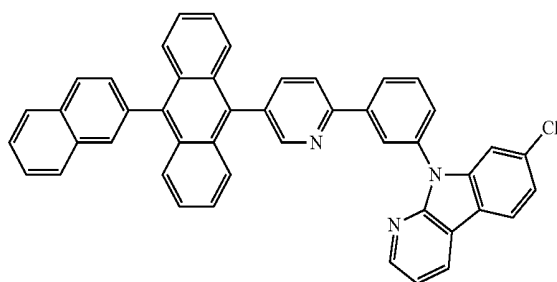


[Chemical Formula 92]

(Compound 92)

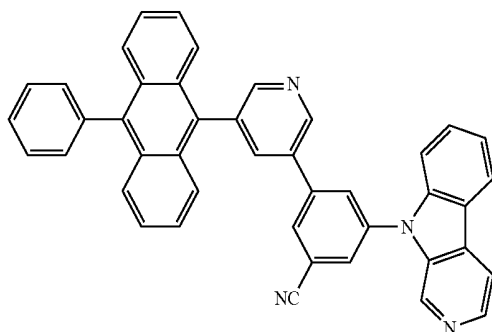

[Chemical Formula 93]


(Compound 93)

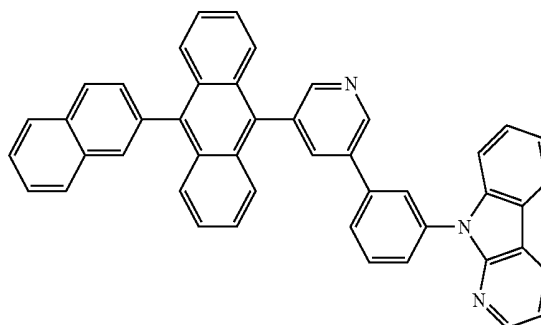

-continued


[Chemical Formula 94]

(Compound 94)

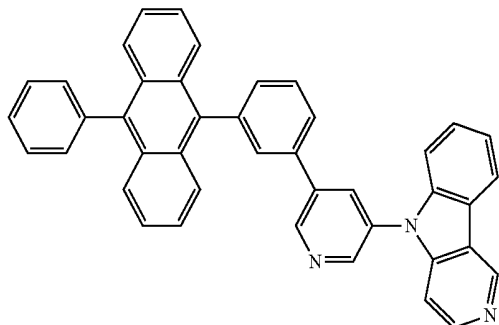


[Chemical Formula 95]

(Compound 95)

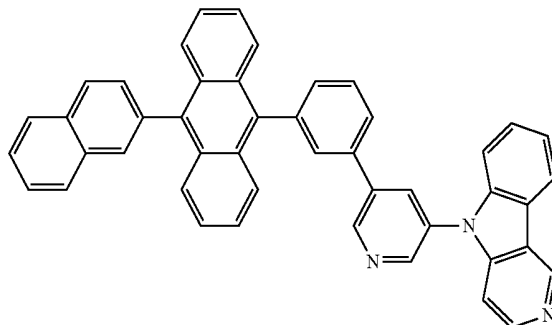


[Chemical Formula 96]

(Compound 96)

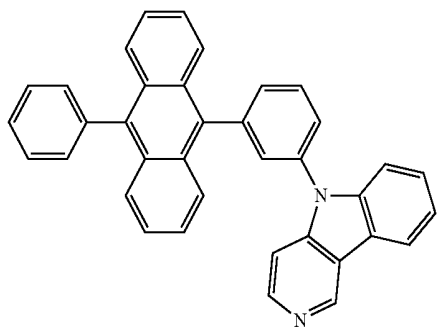


[Chemical Formula 97]

(Compound 97)

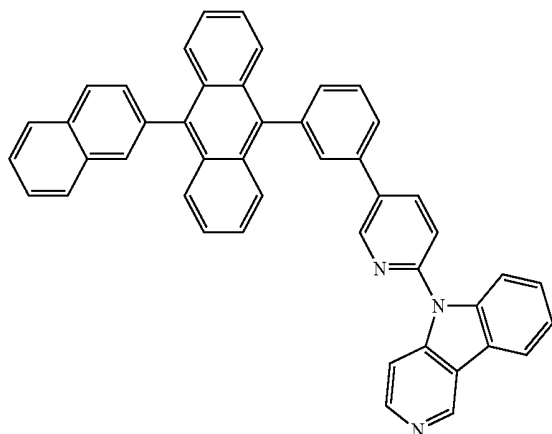


[Chemical Formula 98]

(Compound 98)

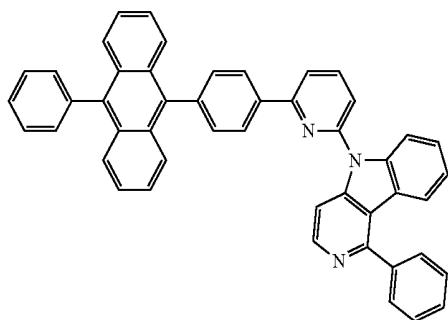


[Chemical Formula 99]

(Compound 99)

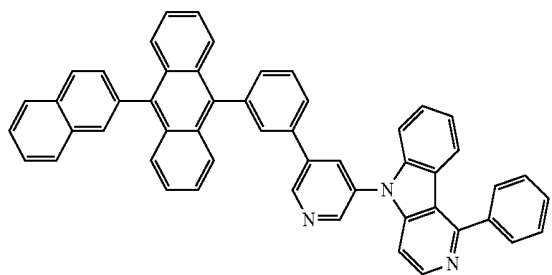


[Chemical Formula 100]

(Compound 100)

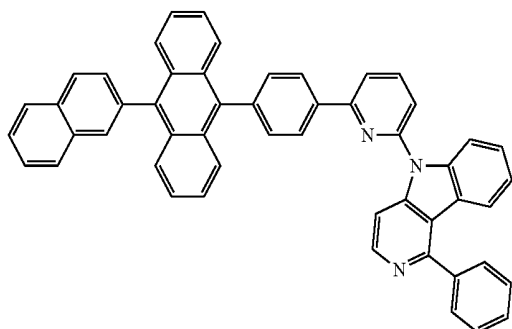

[Chemical Formula 101]


(Compound 101)

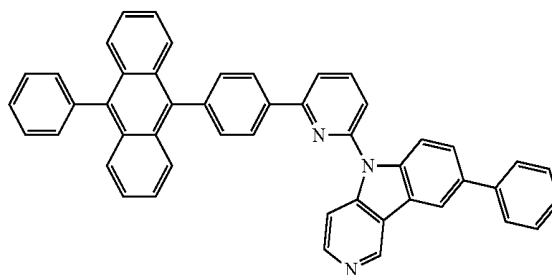

-continued


[Chemical Formula 102]

(Compound 102)

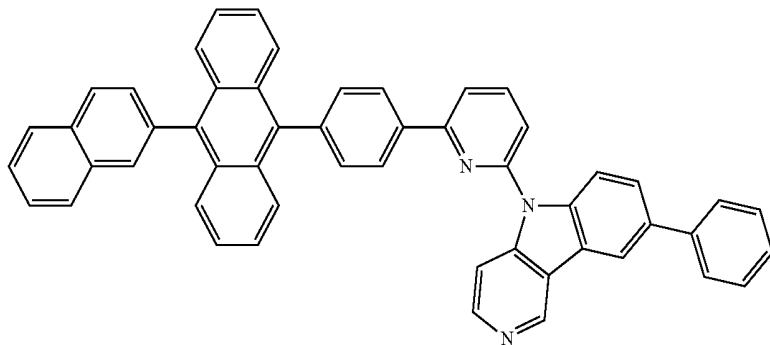


[Chemical Formula 103]

(Compound 103)

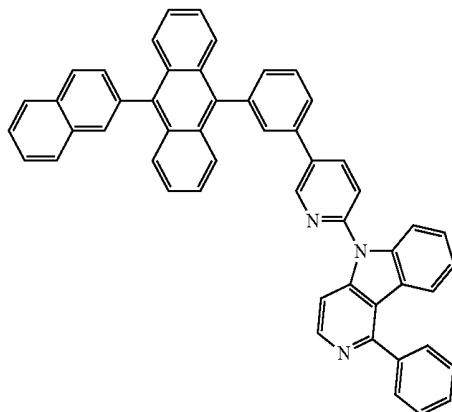


[Chemical Formula 104]

(Compound 104)

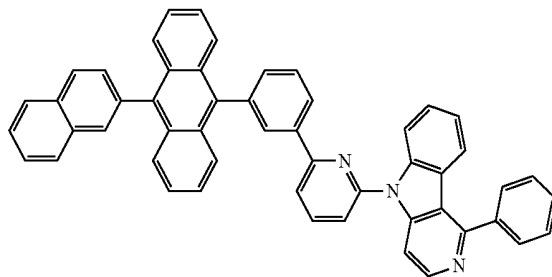


[Chemical Formula 105]

(Compound 105)

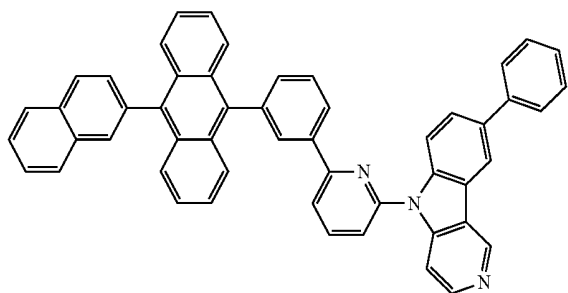


[Chemical Formula 106]

(Compound 106)

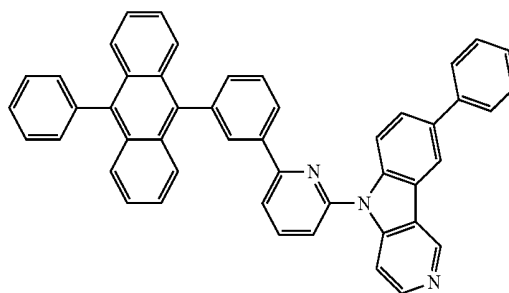


[Chemical Formula 107]

(Compound 107)

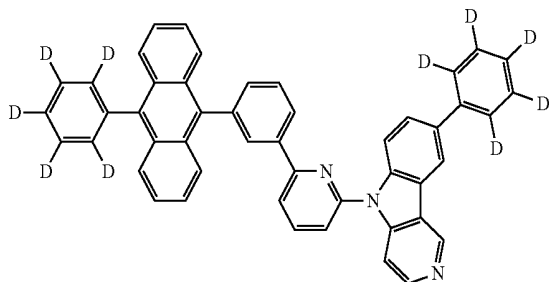

[Chemical Formula 108]


(Compound 108)

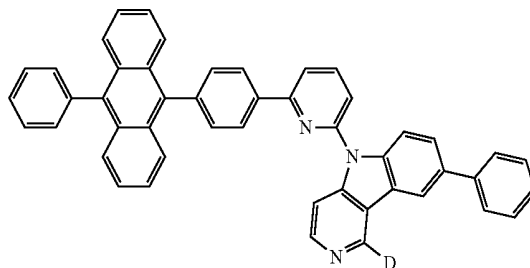

-continued


[Chemical Formula 109]

(Compound 109)

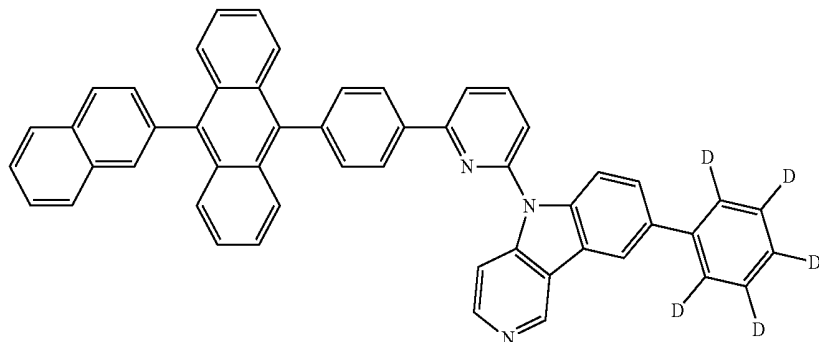


[Chemical Formula 110]

(Compound 110)

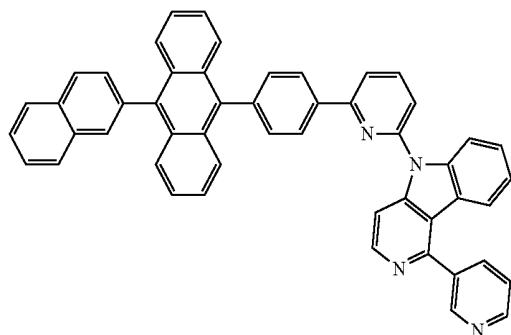


[Chemical Formula 111]

(Compound 111)

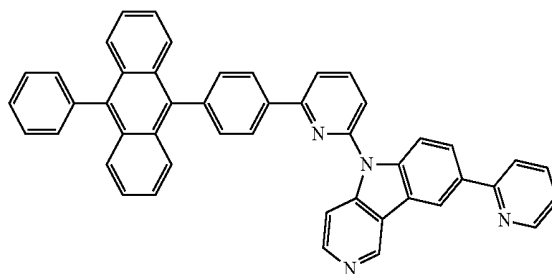


[Chemical Formula 112]

(Compound 112)

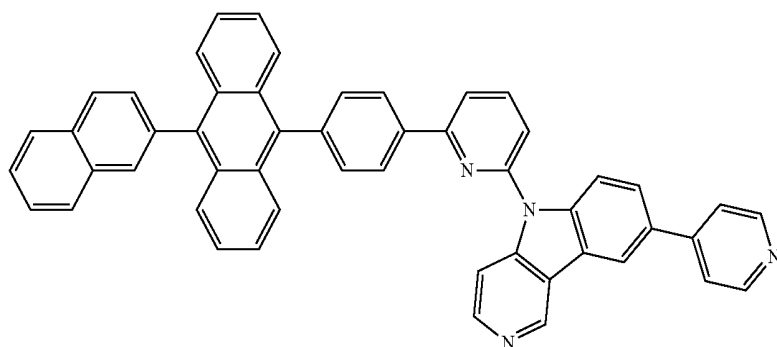


[Chemical Formula 113]

(Compound 113)

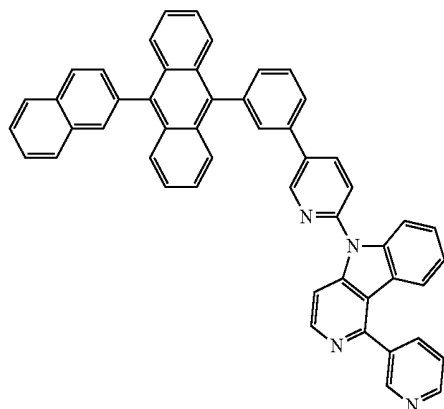

[Chemical Formula 114]


(Compound 114)

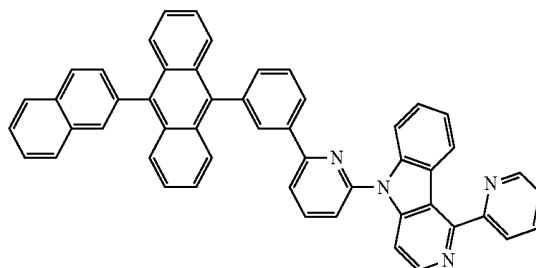

-continued


[Chemical Formula 115]

(Compound 115)

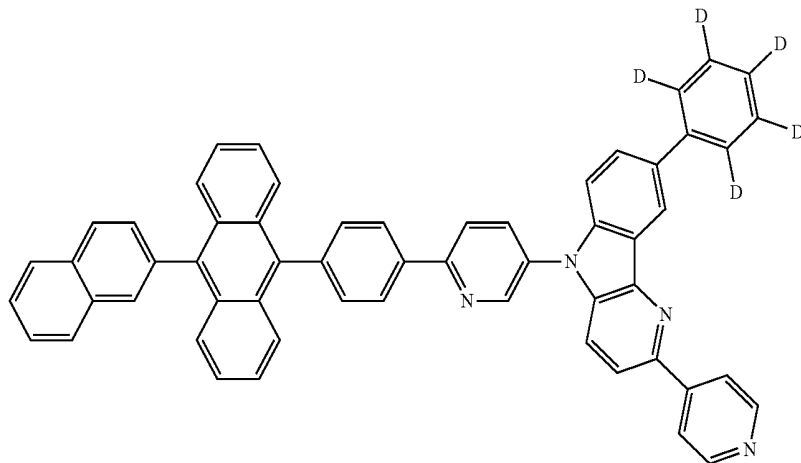


[Chemical Formula 116]

(Compound 116)

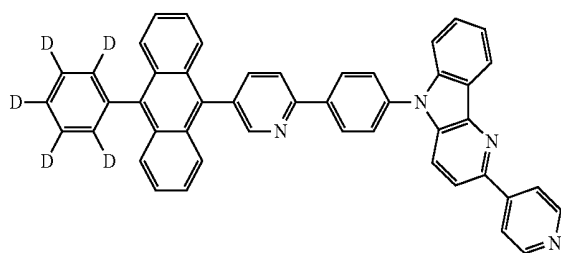


[Chemical Formula 118]

(Compound 118)

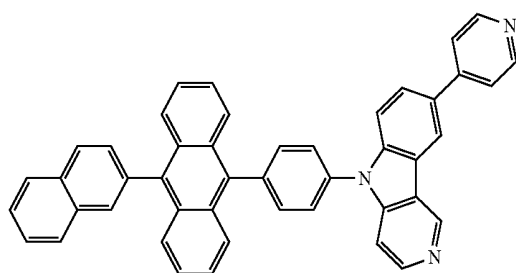


[Chemical Formula 117]

(Compound 117)

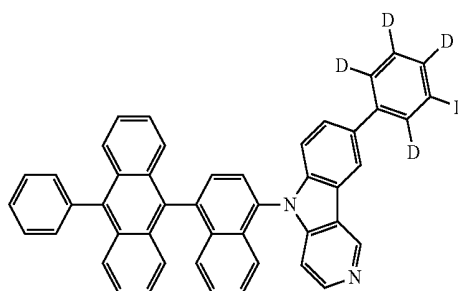

[Chemical Formula 119]

(Compound 119)

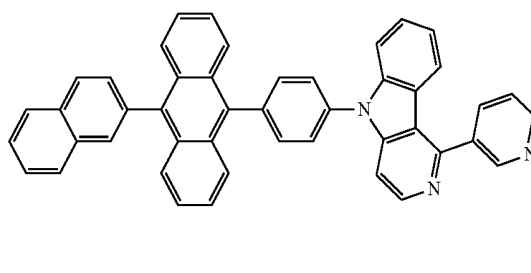

[0059] These compounds were purified by methods such as column chromatography, adsorption using, for example, a silica gel, activated carbon, or activated clay, and recrystallization or crystallization using a solvent. The compounds were identified by NMR analysis. Glass transition point (T_g) and melting point were taken for the measurement of physical properties. Melting point can be used as an index of vapor deposition, and glass transition point (T_g) as an index of stability in the thin-film state.

[0060] Melting point and glass transition point were measured using a powder, using a high-sensitive differential scanning calorimeter DSC3100S produced by Bruker AXS.

[0061] For the measurement of work function, a 100 nm-thick thin film was fabricated on an ITO substrate, and an atmosphere photoelectron spectrometer AC-3 produced by

Riken Rad Co., Ltd. was used. The work function can be used as an index of hole blocking ability.

[0062] For the measurement of stability under high temperature conditions, the purity of samples prepared as a powder sealed under vacuum conditions was measured using an analytical device such as a high-performance liquid chromatography device before and after the samples were allowed to stand for one week in a constant-temperature vessel of a predetermined temperature, and changes in the purity of the samples were evaluated. Stability under high temperature conditions can be used as an index of the organic EL device durability during the fabrication or driving process.

[0063] The organic EL device of the present invention may have a structure including an anode, a hole transport layer, a light emitting layer, a hole blocking layer, an electron transport layer, and a cathode successively formed on a substrate,

optionally with a hole injection layer between the anode and the hole transport layer, or with an electron injection layer between the electron transport layer and the cathode. In such multilayer structures, some of the organic layers may be omitted. For example, the device may be configured to include an anode, a hole transport layer, a light emitting layer, an electron transport layer, and a cathode successively formed on a substrate.

[0064] Electrode materials with a large work function, such as ITO and gold, are used as the anode of the organic EL device. The hole injection layer may be made of material such as copper phthalocyanine, starburst-type triphenylamine derivatives, various triphenylamine tetramers, and coating-type polymer materials.

[0065] Examples of the material used for the hole transport layer include benzidine derivatives such as N,N'-diphenyl-N,N'-di(m-tolyl)-benzidine (hereinafter, simply "TPD"), N,N'-diphenyl-N,N'-di(α -naphthyl)-benzidine (hereinafter, simply "NPD"), and N,N,N',N'-tetrabiphenylbenzidine, and various triphenylamine tetramers. Examples of the material used for the hole injection/transport layer include coating-type polymer materials such as poly(3,4-ethylenedioxythiophene) (hereinafter, simply "PEDOT")/poly(styrene sulfonate) (hereinafter, simply "PSS").

[0066] Aside from the compounds having a substituted anthracene ring structure and a pyridoindole ring structure of the present invention, compounds having a hole blocking effect, including aluminum complexes, thiazole derivatives, oxazole derivatives, carbazole derivatives, polydialkylfluorene derivatives, phenanthroline derivatives such as BCP, and triazole derivatives such as TAZ may also be used for the light emitting layer, the hole blocking layer, and the electron transport layer of the organic EL device of the present invention.

[0067] A high-performance organic EL device can be fabricated by using conventional light-emitting materials such as aluminum complexes and styryl derivatives for the light emitting layer, and by using the compounds having a substituted anthracene ring structure and a pyridoindole ring structure of the present invention for the hole blocking layer or the electron transport layer. Phosphors, for example, such as quinaclidone, coumalin, and rubrene may be used as the host material of the light emitting layer. Examples of phosphorescent material include green phosphorescent materials such as phenylpyridine iridium complex Ir(ppy)₃, blue phosphorescent materials such as FIrrpic and FIr6, and red phosphorescent materials such as Btp,Ir(acac). Here, the host material may be hole injecting and transporting host materials such as carbazole derivatives, including 4,4'-di(N-carbazolyl)biphenyl (hereinafter, simply "CBP"), 4,4',4"-tri(N-carbazolyl)triphenylamine (hereinafter, simply "TCTA"), and 1,3-bis(carbazol-9-yl)benzene (hereinafter, simply "mCP"). As electron transporting host material, material such as 2,2',2"-(1,3,5-phenylene)-tris(1-phenyl-1H-benzimidazole) (hereinafter, simply "TPBI") may be used. A high-performance organic EL device can be fabricated with the use of these materials.

[0068] Further, a conventional electron transporting material may be overlaid or co-vapor deposited on the compounds having a substituted anthracene ring structure and a pyridoindole ring structure of the present invention to form an electron transport layer.

[0069] The organic EL device of the present invention may include an electron injection layer. Material such as lithium fluoride may be used for the electron injection layer. The cathode may be made of electrode materials having a low

work function (such as aluminum), or alloys of electrode materials having an even lower work function (such as aluminum-magnesium).

[0070] The following describes an embodiment of the present invention in more detail based on Examples. The present invention, however, is not restricted to the following Examples, as long as such departures are within the scope of the invention.

Example 1

Synthesis of 5-[3-methyl-4-(10-phenylanthracen-9-yl)phenyl]-5H-pyrido[4,3-b]indole (Compound 9)

[0071] 5-(4-Bromo-3-methylphenyl)-5H-pyrido[4,3-b]indole (3.3 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-phenylanthracene (3.7 g), tetrakis(triphenylphosphine)palladium (0.57 g), a 2 M potassium carbonate aqueous solution (24 ml), toluene (80 ml), and ethanol (20 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 16 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel; eluent: toluene/hexane) to obtain a pale yellow powder of 5-[3-methyl-4-(10-phenylanthracen-9-yl)phenyl]-5H-pyrido[4,3-b]indole (Compound 9; 2.8 g; yield 56%).

[0072] The structure of the resulting pale yellow powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 1.

[0073] ¹H-NMR (CDCl₃) detected 26 hydrogen signals, as follows. δ (ppm)=9.45 (1H), 8.63 (1H), 8.27 (1H), 7.77 (2H), 7.71 (1H), 7.50-7.67 (12H), 7.44 (3H), 7.39 (2H), 2.06 (3H).

Example 2

Synthesis of 5-[3-methyl-4-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]-5H-pyrido[4,3-b]indole (Compound 10)

[0074] 5-(4-Bromo-3-methylphenyl)-5H-pyrido[4,3-b]indole (2.4 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-(naphthalen-2-yl)anthracene (3.7 g), tetrakis(triphenylphosphine)palladium (0.41 g), a 2 M potassium carbonate aqueous solution (18 ml), toluene (64 ml), and ethanol (16 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 16 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel; eluent: toluene/cyclohexane) to obtain a pale yellow powder of 5-[3-methyl-4-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]-5H-pyrido[4,3-b]indole (Compound 10; 2.6 g; yield 65%).

[0075] The structure of the resulting pale yellow powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 2.

[0076] ¹H-NMR (CDCl₃) detected 28 hydrogen signals, as follows.

[0077] δ (ppm)=9.46 (1H), 8.63 (1H), 8.28 (1H), 8.10 (1H), 8.03 (2H), 7.94 (1H), 7.79 (2H), 7.72 (1H), 7.57-7.70 (10H), 7.45 (3H), 7.37 (2H), 2.08 (3H).

Example 3

Synthesis of 5-[4-(10-phenylanthracen-9-yl)naphthalen-1-yl]-5H-pyrido[4,3-b]indole (Compound 42)

[0078] 5-(4-Bromonaphthalen-1-yl)-5H-pyrido[4,3-b]indole (3.1 g), 10-phenylanthracene-9-boronic acid (3.0 g), tetrakis(triphenylphosphine)palladium (0.48 g), a 2 M potassium carbonate aqueous solution (21 ml), toluene (70 ml), and ethanol (18 ml) were added to a nitrogen-substituted reaction vessel, heated, refluxed for 6 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by o-dichlorobenzene/ethyl acetate recrystallization to obtain a yellow powder of 5-[4-(10-phenylanthracen-9-yl)naphthalen-1-yl]-5H-pyrido[4,3-b]indole (Compound 42; 1.6 g; yield 36%).

[0079] The structure of the resulting yellow powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 3.

[0080] ¹H-NMR (CDCl₃) detected 26 hydrogen signals, as follows. δ (ppm)=9.53 (1H), 8.58 (1H), 8.35 (1H), 7.87 (1H), 7.80 (3H), 7.66 (2H), 7.61 (2H), 7.54 (4H), 7.47 (1H), 7.29-7.40 (9H), 7.20 (1H).

Example 4

Synthesis of 5-[4-{10-(naphthalen-2-yl)anthracen-9-yl}naphthalen-1-yl]-5H-pyrido[4,3-b]indole (Compound 45)

[0081] 5-(4-Bromonaphthalen-1-yl)-5H-pyrido[4,3-b]indole (3.2 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-(naphthalen-2-yl)anthracene (4.4 g), tetrakis(triphenylphosphine)palladium (0.50 g), a 2 M potassium carbonate aqueous solution (21 ml), toluene (70 ml), and ethanol (18 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 9 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by toluene/hexane recrystallization to obtain a yellow powder of 5-[4-{10-(naphthalen-2-yl)anthracen-9-yl}naphthalen-1-yl]-5H-pyrido[4,3-b]indole (Compound 45; 1.7 g; yield 33%).

[0082] The structure of the resulting yellow powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 4.

[0083] ¹H-NMR (CDCl₃) detected 28 hydrogen signals, as follows.

[0084] δ (ppm)=9.53 (1H), 8.58 (1H), 8.35 (1H), 8.10 (3H), 7.96 (1H), 7.88 (1H), 7.83 (3H), 7.68-7.74 (1H), 7.63 (2H), 7.57 (2H), 7.53 (1H), 7.46 (1H), 7.30-7.40 (9H), 7.19 (1H).

Example 5

Synthesis of 5-[6-(10-phenylanthracen-9-yl)naphthalen-2-yl]-5H-pyrido[4,3-b]indole (Compound 52)

[0085] 5-(6-Bromonaphthalen-2-yl)-5H-pyrido[4,3-b]indole (2.7 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-phenylanthracene (3.3 g), tetrakis(triphenylphosphine)palladium (0.42 g), a 2 M potassium carbonate aqueous solution (18 ml), toluene (60 ml), and ethanol (15 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 12 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by o-dichlorobenzene/ethyl acetate recrystallization to obtain a brownish white powder of 5-[6-(10-phenylanthracen-9-yl)naphthalen-2-yl]-5H-pyrido[4,3-b]indole (Compound 52; 1.5 g; yield 38%).

[0086] The structure of the resulting brownish white powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 5.

[0087] ¹H-NMR (CDCl₃) detected 26 hydrogen signals, as follows.

[0088] δ (ppm)=9.46 (1H), 8.59 (1H), 8.29 (1H), 8.22 (1H), 8.18 (2H), 8.14 (1H), 7.76 (6H), 7.52-7.65 (7H), 7.45 (2H), 7.37 (4H).

Example 6

Synthesis of 5-[6-{10-(naphthalen-2-yl)anthracen-9-yl}naphthalen-2-yl]-5H-pyrido[4,3-b]indole (Compound 55)

[0089] 5-(6-Bromonaphthalen-2-yl)-5H-pyrido[4,3-b]indole (3.6 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-(naphthalen-2-yl)anthracene (5.0 g), tetrakis(triphenylphosphine)palladium (0.56 g), a 2 M potassium carbonate aqueous solution (24 ml), toluene (80 ml), and ethanol (20 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 12 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by o-dichlorobenzene/ethyl acetate recrystallization to obtain a yellowish green powder of 5-[6-{10-(naphthalen-2-yl)anthracen-9-yl}naphthalen-2-yl]-5H-pyrido[4,3-b]indole (Compound 55; 2.3 g; yield 40%).

[0090] The structure of the resulting yellowish green powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 6.

[0091] ¹H-NMR (CDCl₃) detected 28 hydrogen signals, as follows.

[0092] δ (ppm)=9.46 (1H), 8.60 (1H), 8.29 (1H), 8.23 (1H), 8.19 (3H), 8.11 (1H), 8.05 (1H), 8.03 (1H), 7.95 (1H), 7.78 (6H), 7.64 (4H), 7.56 (1H), 7.45 (2H), 7.36 (4H).

Example 7

Synthesis of 5-[4'-(10-phenylanthracen-9-yl)biphenyl-4-yl]-5H-pyrido[4,3-b]indole (Compound 59)

[0093] 5-(4'-Bromobiphenyl-4-yl)-5H-pyrido[4,3-b]indole (3.5 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-

yl)-10-phenylanthracene (4.7 g), tetrakis(triphenylphosphine)palladium (0.51 g), a 2 M potassium carbonate aqueous solution (22 ml), toluene (112 ml), and ethanol (28 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 8 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by being dispersed and washed with toluene under heat to obtain a yellowish white powder of 5-[4'-(10-phenylanthracen-9-yl)biphenyl-4-yl]-5H-pyrido[4,3-b]indole (Compound 59; 3.1 g; yield 62%).

[0094] The structure of the resulting yellowish white powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 7.

[0095] ¹H-NMR (CDCl₃) detected 28 hydrogen signals, as follows.

[0096] δ (ppm)=9.43 (1H), 8.58 (1H), 8.26 (1H), 8.03 (2H), 7.94 (2H), 7.81 (2H), 7.72 (4H), 7.63 (4H), 7.50-7.58 (5H), 7.35-7.43 (6H).

Example 8

Synthesis of 5-[4'-(10-(naphthalen-2-yl)anthracen-9-yl)biphenyl-4-yl]-5H-pyrido[4,3-b]indole (Compound 61)

[0097] 5-(4'-Bromobiphenyl-4-yl)-5H-pyrido[4,3-b]indole (3.2 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-(naphthalen-2-yl)anthracene (5.2 g), tetrakis(triphenylphosphine)palladium (0.47 g), a 2 M potassium carbonate aqueous solution (20 ml), toluene (104 ml), and ethanol (26 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 8 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by being dispersed and washed with toluene under heat to obtain a yellowish white powder of 5-[4'-(10-(naphthalen-2-yl)anthracen-9-yl)biphenyl-4-yl]-5H-pyrido[4,3-b]indole (Compound 61; 2.5 g; yield 49%).

[0098] The structure of the resulting yellowish white powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 8.

[0099] ¹H-NMR (CDCl₃) detected 30 hydrogen signals, as follows.

[0100] δ (ppm)=9.43 (1H), 8.58 (1H), 8.26 (1H), 8.09 (1H), 8.02 (4H), 7.94 (3H), 7.83 (2H), 7.76 (2H), 7.71 (2H), 7.52-7.67 (7H), 7.37-7.43 (4H), 7.34 (2H).

Example 9

Synthesis of 5-[6-[3-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 87)

[0101] 5-[6-(3-Bromophenyl)pyridin-2-yl]-5H-pyrido[4,3-b]indole (2.7 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-(naphthalen-2-yl)anthracene (2.2 g), tetrakis(triphenylphosphine)palladium (0.32 g), a 2 M potassium carbonate aqueous solution (8 ml), toluene (16 ml), and ethanol (4 ml) were added to a nitrogen-substituted reaction ves-

sel, heated, and refluxed for 9 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by being dispersed and washed with ethyl acetate under heat to obtain a yellowish white powder of 5-[6-[3-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 87; 1.6 g; yield 47%).

[0102] The structure of the resulting yellowish white powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 9.

[0103] ¹H-NMR (CDCl₃) detected 29 hydrogen signals, as follows.

[0104] δ (ppm)=9.39 (1H), 8.56 (1H), 8.42 (1H), 8.26 (1H), 8.20 (1H), 8.09 (1H), 7.97-8.04 (4H), 7.93 (1H), 7.79-7.89 (5H), 7.74 (2H), 7.58-7.65 (5H), 7.51 (1H), 7.31-7.42 (5H).

Example 10

Synthesis of 5-[6-[4-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 89)

[0105] 5-[6-(4-Bromophenyl)pyridin-2-yl]-5H-pyrido[4,3-b]indole (3.0 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-(naphthalen-2-yl)anthracene (3.9 g), tetrakis(triphenylphosphine)palladium (0.43 g), a 2 M potassium carbonate aqueous solution (19 ml), toluene (60 ml), and ethanol (15 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 11 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by being dispersed and washed with ethyl acetate under heat to obtain a yellowish white powder of 5-[6-[4-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 89; 2.0 g; yield 42%).

[0106] The structure of the resulting yellowish white powder was identified by NMR. The ¹H-NMR measurement result is presented in FIG. 10.

[0107] ¹H-NMR (CDCl₃) detected 29 hydrogen signals, as follows.

[0108] δ (ppm)=9.43 (1H), 8.65 (1H), 8.40 (2H), 8.25 (1H), 8.13 (1H), 8.09 (1H), 7.99-8.04 (4H), 7.92 (2H), 7.80 (2H), 7.74 (2H), 7.57-7.69 (7H), 7.45 (1H), 7.31-7.37 (4H).

Example 11

Synthesis of 5-[4-(10-phenylanthracen-9-yl)phenyl]-5H-pyrido[4,3-b]indole (Compound 3)

[0109] 5-(4-Bromophenyl)-5H-pyrido[4,3-b]indole (2.5 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-phenylanthracene (3.8 g), tetrakis(triphenylphosphine)palladium (0.45 g), a 2 M potassium carbonate aqueous solution (40 ml), toluene (240 ml), and ethanol (60 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 16 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude

product. The crude product was purified by being dispersed and washed with toluene under heat to obtain a yellowish white powder of 5-[4-(10-phenylanthracen-9-yl)phenyl]-5H-pyrido[4,3-b]indole (Compound 3; 1.9 g; yield 49%).

[0110] The structure of the resulting yellowish white powder was identified by NMR.

[0111] ¹H-NMR (CDCl₃) detected 24 hydrogen signals, as follows.

[0112] δ (ppm)=9.45 (1H), 8.62 (1H), 8.28 (1H), 7.81 (4H), 7.76 (4H), 7.71 (1H), 7.63 (2H), 7.58 (3H), 7.51 (2H), 7.38-7.46 (5H).

Example 12

Synthesis of 5-[4-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]-5H-pyrido[4,3-b]indole (Compound 6)

[0113] 5-(4-Bromophenyl)-5H-pyrido[4,3-b]indole (3.0 g), 9-(4,4,5,5-tetramethyl-1,3,2)dioxabororan-2-yl)-10-(naphthalen-2-yl)anthracene (4.0 g), tetrakis(triphenylphosphine)palladium (0.54 g), a 2 M potassium carbonate aqueous solution (46 ml), toluene (240 ml), and ethanol (60 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 10 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by being dispersed and washed with toluene under heat to obtain a yellow powder of 5-[4-10-(naphthalen-2-yl)anthracen-9-yl]phenyl]-5H-pyrido[4,3-b]indole (Compound 6; 1.3 g; yield 26%).

[0114] The structure of the resulting yellow powder was identified by NMR.

[0115] ¹H-NMR (CDCl₃) detected 26 hydrogen signals, as follows.

[0116] δ (ppm)=9.46 (1H), 8.64 (1H), 8.29 (1H), 8.11 (1H), 8.05 (1H), 8.01 (1H), 7.94 (1H), 7.83 (4H), 7.79 (4H), 7.73 (1H), 7.57-7.65 (5H), 7.46 (3H), 7.37 (2H).

Example 13

Synthesis of 5-[4-(10-phenylanthracen-9-yl)phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 15)

[0117] 5-(4-Bromophenyl)-8-phenyl-5H-pyrido[4,3-b]indole (3.5 g), 10-phenylanthracene-9-boronic acid (3.1 g), tetrakis(triphenylphosphine)palladium (0.30 g), a 2 M potassium carbonate aqueous solution (21 ml), toluene (56 ml), and ethanol (14 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 12 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel; eluent: toluene) to obtain a yellowish white powder of 5-[4-(10-phenylanthracen-9-yl)phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 15; 3.3 g; yield 66%).

[0118] The structure of the resulting yellowish white powder was identified by NMR.

[0119] ¹H-NMR (CDCl₃) detected 28 hydrogen signals, as follows.

[0120] δ (ppm)=9.50 (1H), 8.65 (1H), 8.48 (1H), 7.83 (5H), 7.77 (7H), 7.63 (2H), 7.58 (2H), 7.52 (4H), 7.45 (2H), 7.39 (3H).

Example 14

Synthesis of 5-[4-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 18)

[0121] 5-(4-Bromophenyl)-8-phenyl-5H-pyrido[4,3-b]indole (3.2 g), 10-(naphthalen-2-yl)anthracene-9-boronic acid (3.4 g), tetrakis(triphenylphosphine)palladium (0.28 g), a 2 M potassium carbonate aqueous solution (18 ml), toluene (52 ml), and ethanol (13 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 11 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel; eluent: toluene) to obtain a yellow powder of 5-[4-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 18; 3.7 g; yield 74%).

[0122] The structure of the resulting yellow powder was identified by NMR.

[0123] ¹H-NMR (CDCl₃) detected 30 hydrogen signals, as follows.

[0124] δ (ppm)=9.51 (1H), 8.65 (1H), 8.49 (1H), 8.11 (1H), 8.05 (1H), 8.02 (1H), 7.94 (1H), 7.81 (12H), 7.62 (4H), 7.53 (2H), 7.46 (2H), 7.39 (3H).

Example 15

Synthesis of 5-[3-(10-phenylanthracen-9-yl)phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 31)

[0125] 5-(3-Bromophenyl)-8-phenyl-5H-pyrido[4,3-b]indole (3.2 g), 10-phenylanthracene-9-boronic acid (3.1 g), tetrakis(triphenylphosphine)palladium (0.31 g), a 2 M potassium carbonate aqueous solution (21 ml), toluene (56 ml), and ethanol (14 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 7 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by toluene/hexane recrystallization to obtain a yellow powder of 5-[3-(10-phenylanthracen-9-yl)phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 31; 3.6 g; yield 72%).

[0126] The structure of the resulting yellow powder was identified by NMR.

[0127] ¹H-NMR (CDCl₃) detected 28 hydrogen signals, as follows.

[0128] δ (ppm)=9.43 (1H), 8.55 (1H), 8.40 (1H), 7.90 (1H), 7.81 (3H), 7.74 (4H), 7.68 (4H), 7.61 (2H), 7.56 (1H), 7.43-7.50 (7H), 7.37 (3H).

Example 16

Synthesis of 5-[3-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 32)

[0129] 5-(3-Bromophenyl)-8-phenyl-5H-pyrido[4,3-b]indole (3.2 g), 10-(naphthalen-2-yl)anthracene-9-boronic acid (3.4 g), tetrakis(triphenylphosphine)palladium (0.28 g), a 2 M potassium carbonate aqueous solution (20 ml), toluene (52 ml), and ethanol (13 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 7 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by toluene/methanol recrystallization to obtain a yellow powder of 5-[3-{10-(naphthalen-2-yl)anthracen-9-yl}phenyl]-8-phenyl-5H-pyrido[4,3-b]indole (Compound 32; 2.2 g; yield 44%).

[0130] The structure of the resulting yellow powder was identified by NMR.

[0131] ¹H-NMR (CDCl₃) detected 30 hydrogen signals, as follows.

[0132] δ (ppm)=9.44 (1H), 8.57 (1H), 8.42 (1H), 8.08 (1H), 8.02 (1H), 7.91 (2H), 7.85 (2H), 7.82 (1H), 7.75 (4H), 7.70 (4H), 7.60 (3H), 7.43-7.51 (6H), 7.36 (3H).

Example 17

Synthesis of 3,5-bis(5H-pyrido[4,3-b]indol-5-yl)-(10-phenylanthracen-9-yl)benzene (Compound 35)

[0133] 3,5-Bis {5H-pyrido[4,3-b]indol-5-yl}-bromobenzene (3.7 g), 9-(4,4,5,5-tetramethyl-1,3,2)dioxabororan-2-yl)-10-phenylanthracene (2.9 g), tetrakis(triphenylphosphine)palladium (0.44 g), a 2 M potassium carbonate aqueous solution (19 ml), toluene (72 ml), and ethanol (18 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 21 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel; eluent: toluene/ethyl acetate) to obtain a yellow powder of 3,5-bis(5H-pyrido[4,3-b]indol-5-yl)-(10-phenylanthracen-9-yl)benzene (Compound 35; 2.9 g; yield 58%).

[0134] The structure of the resulting yellow powder was identified by NMR.

[0135] ¹H-NMR (CDCl₃) detected 30 hydrogen signals, as follows.

[0136] δ (ppm)=9.41 (2H), 8.60 (2H), 8.24 (2H), 8.05 (1H), 7.95 (2H), 7.91 (2H), 7.77 (4H), 7.53-7.64 (9H), 7.48 (2H), 7.43 (4H).

Example 18

Synthesis of 3,5-bis(5H-pyrido[4,3-b]indol-5-yl)-{10-(naphthalen-2-yl)anthracen-9-yl}benzene (Compound 36)

[0137] 3,5-Bis {5H-pyrido[4,3-b]indol-5-yl}-bromobenzene (3.5 g), 9-(4,4,5,5-tetramethyl-1,3,2)dioxabororan-2-

yl)-10-(naphthalen-2-yl)anthracene (3.1 g), tetrakis(triphenylphosphine)palladium (0.41 g), a 2 M potassium carbonate aqueous solution (21 ml), toluene (72 ml), and ethanol (18 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 17 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel; eluent: toluene) to obtain a yellow powder of 3,5-bis(5H-pyrido[4,3-b]indol-5-yl)-{10-(naphthalen-2-yl)anthracen-9-yl}benzene (Compound 36; 1.2 g; yield 24%).

[0138] The structure of the resulting yellow powder was identified by NMR.

[0139] ¹H-NMR (CDCl₃) detected 32 hydrogen signals, as follows.

[0140] δ (ppm)=9.43 (2H), 8.60 (2H), 8.25 (2H), 7.92-8.10 (9H), 7.78 (4H), 7.55-7.64 (9H), 7.39-7.45 (4H).

Example 19

Synthesis of 5-{5-[4-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl}-5H-pyrido[4,3-b]indole (Compound 76)

[0141] 5-[5-(4-Bromophenyl)pyridin-2-yl]-5H-pyrido[4,3-b]indole (1.8 g), 10-phenylanthracene-9-boronic acid (1.3 g), tetrakis(triphenylphosphine)palladium (0.26 g), a 2 M potassium carbonate aqueous solution (7 ml), toluene (32 ml), and ethanol (8 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 14 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by o-dichlorobenzene recrystallization to obtain a yellow powder of 5-{5-[4-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl}-5H-pyrido[4,3-b]indole (Compound 76; 1.0 g; yield 39%).

[0142] The structure of the resulting yellow powder was identified by NMR.

[0143] ¹H-NMR (CDCl₃) detected 27 hydrogen signals, as follows.

[0144] δ (ppm)=9.42 (1H), 9.14 (1H), 8.64 (1H), 8.32 (1H), 8.24 (1H), 7.92-7.97 (3H), 7.84 (1H), 7.73-7.80 (5H), 7.68 (2H), 7.56-7.63 (4H), 7.50 (2H), 7.35-7.45 (5H).

Example 20

Synthesis of 5-{5-[3-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl}-5H-pyrido[4,3-b]indole (Compound 80)

[0145] 5-[5-(3-Bromophenyl)pyridin-2-yl]-5H-pyrido[4,3-b]indole (1.0 g), 10-phenylanthracene-9-boronic acid (1.0 g), tetrakis(triphenylphosphine)palladium (0.15 g), a 2 M potassium carbonate aqueous solution (4 ml), toluene (16 ml), and ethanol (4 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 8 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under

reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel; eluent: toluene) to obtain a yellow powder of 5-[5-[3-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 80; 1.1 g; yield 77%).

[0146] The structure of the resulting yellow powder was identified by NMR.

[0147] ¹H-NMR (CDCl₃) detected 27 hydrogen signals, as follows.

[0148] δ (ppm)=9.38 (1H), 9.06 (1H), 8.58 (1H), 8.23 (1H), 8.19 (1H), 7.88 (2H), 7.83 (1H), 7.72-7.82 (6H), 7.70 (1H), 7.48-7.65 (7H), 7.33-7.42 (5H).

Example 21

Synthesis of 5-[6-[3-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 86)

[0149] 5-[6-(3-Bromophenyl)pyridin-2-yl]-5H-pyrido[4,3-b]indole (2.5 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-phenylanthracene (2.7 g), tetrakis(triphenylphosphine)palladium (0.21 g), a 2 M potassium carbonate aqueous solution (9 ml), toluene (16 ml), and ethanol (4 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 15 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by o-dichlorobenzene/ethyl acetate recrystallization to obtain a yellow powder of 5-[6-[3-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 86; 2.2 g; yield 61%).

[0150] The structure of the resulting yellow powder was identified by NMR.

[0151] ¹H-NMR (CDCl₃) detected 27 hydrogen signals, as follows.

[0152] δ (ppm)=9.38 (1H), 8.55 (1H), 8.41 (1H), 8.23 (1H), 8.19 (1H), 7.99 (1H), 7.96 (1H), 7.85 (2H), 7.76-7.80 (3H), 7.72 (2H), 7.61 (3H), 7.56 (2H), 7.49 (3H), 7.33-7.40 (5H).

Example 22

Synthesis of 5-[6-[4-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 88)

[0153] 5-[6-(4-Bromophenyl)pyridin-2-yl]-5H-pyrido[4,3-b]indole (2.4 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-phenylanthracene (3.4 g), tetrakis(triphenylphosphine)palladium (0.35 g), a 2 M potassium carbonate aqueous solution (15 ml), toluene (48 ml), and ethanol (12 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 12 hours while being stirred. The mixture was cooled to room temperature, and the deposit was collected by filtration. The deposit was dissolved under heat in o-dichlorobenzene, and, after removing the insolubles by filtration, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by o-dichlorobenzene/ethyl acetate recrystallization to obtain a yellowish white powder of 5-[6-[4-(10-phenylanthracen-9-yl)phenyl]pyridin-2-yl]-5H-pyrido[4,3-b]indole (Compound 88; 2.2 g; yield 64%).

[0154] The structure of the resulting yellowish white powder was identified by NMR.

[0155] ¹H-NMR (CDCl₃) detected 27 hydrogen signals, as follows.

[0156] δ (ppm)=9.42 (1H), 8.64 (1H), 8.39 (2H), 8.24 (1H), 8.12 (1H), 7.99-8.03 (2H), 7.90 (1H), 7.71-7.76 (4H), 7.57-7.66 (7H), 7.49 (2H), 7.44 (1H), 7.35 (4H).

Example 23

Synthesis of 5-[3-(10-phenylanthracen-9-yl)phenyl]-5H-pyrido[4,3-b]indole (Compound 96)

[0157] 5-(3-Bromophenyl)-5H-pyrido[4,3-b]indole (1.7 g), 9-(4,4,5,5-tetramethyl-[1,3,2]dioxabororan-2-yl)-10-phenylanthracene (2.0 g), tetrakis(triphenylphosphine)palladium (0.30 g), a 2 M potassium carbonate aqueous solution (26 ml), toluene (160 ml), and ethanol (40 ml) were added to a nitrogen-substituted reaction vessel, heated, and refluxed for 20 hours while being stirred. The mixture was cooled to room temperature, and stirred after adding toluene (100 ml) and water (100 ml) to separate the organic layer. The organic layer was dehydrated with anhydrous magnesium sulfate, and concentrated under reduced pressure to obtain a crude product. The crude product was purified by toluene/hexane recrystallization to obtain a yellowish white powder of 5-[3-(10-phenylanthracen-9-yl)phenyl]-5H-pyrido[4,3-b]indole (Compound 96; 1.1 g; yield 42%).

[0158] The structure of the resulting yellow powder was identified by NMR.

[0159] ¹H-NMR (CDCl₃) detected 24 hydrogen signals, as follows.

[0160] δ (ppm)=9.39 (1H), 8.54 (1H), 8.22 (1H), 7.89 (1H), 7.80 (3H), 7.73 (3H), 7.55-7.67 (5H), 7.36-7.52 (9H).

Example 24

[0161] The melting point and glass transition point of the compounds of the present invention were determined using a high-sensitive differential scanning calorimeter (DSC 31005 produced by Bruker AXS).

	Melting point	Glass transition point
Compound of Example 1 of the present invention (Compound 9)	286° C.	132° C.
Compound of Example 2 of the present invention (Compound 10)	316° C.	157° C.
Compound of Example 3 of the present invention (Compound 42)	376° C.	164° C.
Compound of Example 4 of the present invention (Compound 45)	317° C.	182° C.
Compound of Example 5 of the present invention (Compound 52)	398° C.	None
Compound of Example 6 of the present invention (Compound 55)	434° C.	140° C.
Compound of Example 7 of the present invention (Compound 59)	404° C.	None
Compound of Example 8 of the present invention (Compound 61)	409° C.	None
Compound of Example 9 of the present invention (Compound 87)	269° C.	150° C.
Compound of Example 10 of the present invention (Compound 89)	310° C.	159° C.
Compound of Example 11 of the present invention (Compound 3)	299° C.	130° C.
Compound of Example 12 of the present invention (Compound 6)	280° C.	155° C.

-continued

	Melting point	Glass transition point
Compound of Example 13 of the present invention (Compound 15)	330° C.	148° C.
Compound of Example 14 of the present invention (Compound 18)	312° C.	164° C.
Compound of Example 15 of the present invention (Compound 31)	292° C.	134° C.
Compound of Example 16 of the present invention (Compound 32)	306° C.	152° C.
Compound of Example 17 of the present invention (Compound 35)	359° C.	173° C.
Compound of Example 18 of the present invention (Compound 36)	412° C.	192° C.
Compound of Example 19 of the present invention (Compound 76)	339° C.	140° C.
Compound of Example 20 of the present invention (Compound 80)	165° C.	138° C.
Compound of Example 21 of the present invention (Compound 86)	286° C.	132° C.
Compound of Example 22 of the present invention (Compound 88)	331° C.	149° C.
Compound of Example 23 of the present invention (Compound 96)	265° C.	115° C.

[0162] The compounds of the present invention had glass transition points of 100° C. or higher, or did not show any recognizable glass transition point. These results suggest that the compounds of the present invention have a stable thin-film state.

Example 25

[0163] A 100 nm-thick vapor-deposited film was fabricated on an ITO substrate using the compounds of the present invention, and the work function was measured using an atmosphere photoelectron spectrometer (Model AC-3, produced by Riken Keiki Co., Ltd.).

	Work function
Compound of Example 1 of the present invention (Compound 9)	5.89 eV
Compound of Example 2 of the present invention (Compound 10)	5.94 eV
Compound of Example 3 of the present invention (Compound 42)	5.91 eV
Compound of Example 4 of the present invention (Compound 45)	5.96 eV
Compound of Example 5 of the present invention (Compound 52)	5.96 eV
Compound of Example 6 of the present invention (Compound 55)	5.90 eV
Compound of Example 7 of the present invention (Compound 59)	5.90 eV
Compound of Example 8 of the present invention (Compound 61)	5.91 eV
Compound of Example 9 of the present invention (Compound 87)	5.89 eV
Compound of Example 10 of the present invention (Compound 89)	5.80 eV
Compound of Example 11 of the present invention (Compound 3)	5.89 eV
Compound of Example 12 of the present invention (Compound 6)	6.34 eV
Compound of Example 13 of the present invention (Compound 15)	5.92 eV
Compound of Example 14 of the present invention (Compound 18)	5.91 eV

-continued

	Work function
Compound of Example 15 of the present invention (Compound 31)	5.99 eV
Compound of Example 16 of the present invention (Compound 32)	6.01 eV
Compound of Example 17 of the present invention (Compound 35)	6.24 eV
Compound of Example 18 of the present invention (Compound 36)	6.36 eV
Compound of Example 19 of the present invention (Compound 76)	5.89 eV
Compound of Example 20 of the present invention (Compound 80)	5.99 eV
Compound of Example 21 of the present invention (Compound 86)	5.92 eV
Compound of Example 22 of the present invention (Compound 88)	5.92 eV
Compound of Example 23 of the present invention (Compound 96)	5.96 eV

[0164] As these results show, the compounds of the present invention have greater work functions than the work function 5.4 eV of common hole transport materials such as NPD and TPD, and thus possess a high hole blocking ability.

Example 26

[0165] The compounds of the present invention were used to perform a heat test for confirming stability under high temperature conditions. The heat test was performed as follows. The compounds of the present invention (10 mg each) were placed in a glass test tube, and the end of the glass test tube was sealed after creating a vacuum using a diaphragm pump. The sealed glass test tube was placed in a constant-temperature vessel of a predetermined temperature set to 300° C. to 350° C. The seal was removed after a 1-week static period to prepare test samples. Each sample was subjected to HPLC measurement before and after the heat test under the following conditions.

Measurement Conditions

[0166] Column: GL Sciences Inc., Inertsil ODS-SP, inner diameter 4.6 mm, length 250 mm

[0167] Eluent: acetonitrile/0.05% (v/v) trifluoroacetic acid aqueous solution=8/2 (v/v)

[0168] Flow rate: 1.0 ml/min

[0169] Column temperature: 40° C.

[0170] Measurement wavelength: 254 nm

[0171] The HPLC purity (peak area percentage, %) of the compound of the present invention in each sample was calculated from the resulting HPLC chart using a data processor. Samples with a purity decrease of less than 5% in terms of peak area percentage before and after the heat test were determined as “Good (with heat resistance)”, and a purity decrease of 5% or more was determined as “Poor (no heat resistance)”. The results of the heat test for each sample are as follows.


	Result of heat test	Test temperature
Compound of Example 1 of the present invention (Compound 9)	Good	300° C.
Compound of Example 3 of the present invention (Compound 42)	Good	350° C.

-continued

	Result of heat test	Test temperature
Compound of Example 4 of the present invention (Compound 45)	Good	330° C.
Compound of Example 5 of the present invention (Compound 52)	Good	350° C.
Compound of Example 6 of the present invention (Compound 55)	Good	350° C.
Compound of Example 8 of the present invention (Compound 61)	Good	350° C.
Compound of Example 9 of the present invention (Compound 87)	Good	330° C.
Compound of Example 10 of the present invention (Compound 89)	Good	340° C.
Compound of Example 22 of the present invention (Compound 88)	Good	340° C.
BCP (Comparative Compound)	Poor	300° C.


[0172] As can be seen from these results, the compounds of the present invention are stable, as demonstrated by a purity decrease of less than 5% in terms of peak area percentage under high temperature conditions. On the other hand, a purity decrease in terms of peak area percentage was 5% or more in Comparative Compound BCP (Compound 120 with the structural formula below). It can be said from this that the compounds of the present invention have superior heat resistance.

[Chemical Formula 120]



(Compound 120)

[Chemical Formula 121]

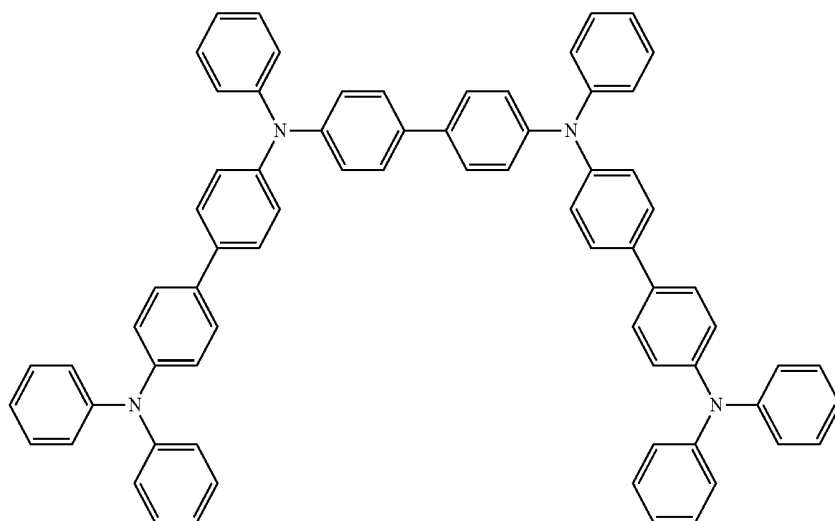

(Compound 121)

Example 27

[0173] The organic EL device, as illustrated in FIG. 11, was fabricated from a hole injection layer 3, a hole transport layer 4, a light emitting layer 5, a hole blocking layer 6, an electron transport layer 7, an electron injection layer 8, a cathode (aluminum electrode) 9 successively formed by vapor deposition on a glass substrate 1 that had been provided beforehand with an ITO electrode as a transparent anode 2.

[0174] Specifically, the glass substrate 1 having ITO (thickness 150 nm) formed thereon was washed with an organic solvent, and subjected to an oxygen plasma treatment to wash the surface. The glass substrate with the ITO electrode was then installed in a vacuum vapor deposition apparatus, and the pressure was reduced to 0.001 Pa or less. This was followed by formation of the hole injection layer 3 by forming Compound 121 of the structural formula below over the transparent anode 2 in a thickness of 20 nm at a deposition rate of 6 nm/min. The hole transport layer 4 was then formed on the hole injection layer 3 by forming Compound 122 of the structural formula below in a thickness of 40 nm at a deposition rate of 6 nm/min. Thereafter, the light emitting layer 5 was formed on the hole transport layer 4 by forming Compounds 123 and 124 of the structural formulae below in a thickness of 30 nm using dual vapor deposition at a deposition rate ratio of compound 123:compound 124=5:95. The hole blocking layer-electron transport layer 6 and 7 were then formed on the light emitting layer 5 by forming the compound of Example 1 of the present invention (Compound 9) in a thickness of 30 nm at a deposition rate of 6 nm/min. Then, the electron injection layer 8 was formed on the hole blocking layer-electron transport layer 6 and 7 by forming lithium fluoride in a thickness of 0.5 nm at a deposition rate of 0.6 nm/min. Finally, the cathode 9 was formed by vapor depositing aluminum in a thickness of 150 nm. The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature.

[0175] Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device fabricated with the compound of Example 1 of the present invention (Compound 9).


-continued

[Chemical Formula 122]


[Chemical Formula 123]

(Compound 122)


(Compound 123)

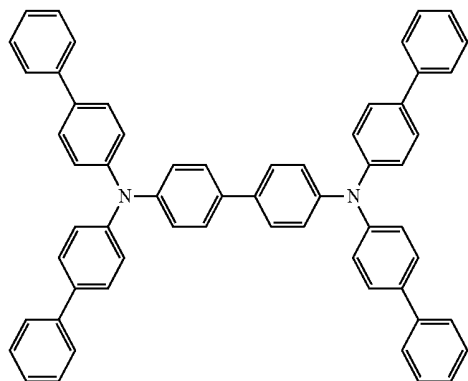

[Chemical Formula 124]

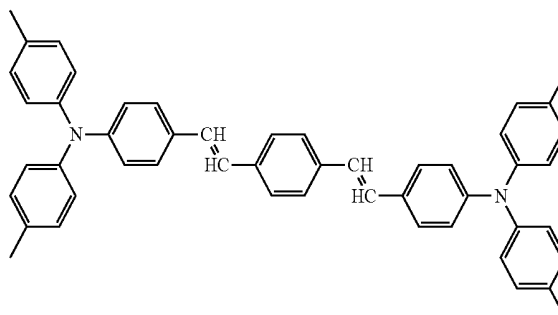

(Compound 124)

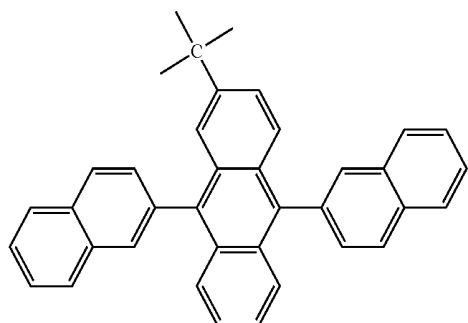

Example 28

[0176] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 2 of the present invention (Compound 10) was used as the material of the hole blocking layer-electron transport layer **6** and **7** and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 29

[0177] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 3 of the present invention (Compound 42) was used as the material of the hole blocking layer-electron transport layer **6** and **7** and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 30

[0178] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of

Example 4 of the present invention (Compound 45) was used as the material of the hole blocking layer-electron transport layer **6** and **7** and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 31

[0179] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 5 of the present invention (Compound 52) was used as the material of the hole blocking layer-electron transport layer **6** and **7** and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 32

[0180] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 6 of the present invention (Compound 55) was used as the material of the hole blocking layer-electron transport layer **6** and **7** and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Com-

pound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 33

[0181] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 7 of the present invention (Compound 59) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 34

[0182] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 8 of the present invention (Compound 61) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 35

[0183] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 9 of the present invention (Compound 87) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 36

[0184] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of

Example 10 of the present invention (Compound 89) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 37

[0185] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 21 of the present invention (Compound 86) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 38

[0186] An organic EL device was fabricated under the same conditions used in Example 27, except that the compound of Example 22 of the present invention (Compound 88) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 1 of the present invention (Compound 9). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Comparative Example 1

[0187] For comparison, an organic EL device was fabricated under the same conditions used in Example 27, except that Alq_3 was used as the material of the electron transport layer 7, instead of forming the hole blocking layer-electron transport layer 6 and 7. The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 1 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

TABLE 1

Compound		Voltage [V] (@ 10 mA/cm ²)	Luminance [cd/m ²] (@ 10 mA/cm ²)	Luminous current efficiency [cd/A] (@ 10 mA/cm ²)	Power efficiency [lm/W] (@ 10 mA/cm ²)
Example 27	Compound 9	4.95	1038	10.38	6.57
Example 28	Compound 10	4.35	1131	11.31	8.18
Example 29	Compound 42	4.66	925	9.25	6.24
Example 30	Compound 45	4.55	1190	11.90	8.23
Example 31	Compound 52	5.55	960	9.60	5.45
Example 32	Compound 55	5.21	1058	10.58	6.38
Example 33	Compound 59	4.50	980	9.80	6.83
Example 34	Compound 61	4.81	1290	12.90	8.40
Example 35	Compound 87	5.05	1485	14.85	9.24
Example 36	Compound 89	3.90	1180	11.80	9.50

TABLE 1-continued

Compound	Voltage [V] (@ 10 mA/cm ²)	Luminance [cd/m ²] (@ 10 mA/cm ²)	Luminous current efficiency [cd/A] (@ 10 mA/cm ²)	Power efficiency [lm/W] (@ 10 mA/cm ²)
Example 37	Compound 86	4.28	960	9.60
Example 38	Compound 88	3.78	1093	10.93
Comparative Example 1	Alq ₃	5.80	820	8.25
				4.40

[0188] As can be seen in Table 1, the driving voltage at a current density of 10 mA/cm² was as low as 3.78 to 5.55 V in Examples 27 to 38, compared to 5.80 V for Alq₃. There were also improvements in the luminance, luminous current efficiency, and power efficiency measured at a current density of 10 mA/cm².

[0189] The measurement results of turn on voltage are as follows.

Organic EL device	Compound	Turn on voltage [V]
Example 27	Compound 9	3.0
Example 28	Compound 10	2.9
Example 29	Compound 42	2.9
Example 30	Compound 45	2.8
Example 31	Compound 52	2.9
Example 32	Compound 55	2.9
Example 33	Compound 59	2.8
Example 34	Compound 61	2.9
Example 35	Compound 87	2.9
Example 36	Compound 89	2.8
Example 37	Compound 86	2.8
Example 38	Compound 88	2.8
Comparative Example 1	Alq ₃	3.2

[0190] It can be seen that the turn on voltage was lower in Examples 27 to 38 than in Comparative Example 1 that used Alq₃.

Example 39

[0191] An organic EL device, as illustrated in FIG. 13, was fabricated from a hole transport layer 4, a light emitting layer 5, a hole blocking layer 6, an electron transport layer 7, an electron injection layer 8, and a cathode (aluminum electrode) 9 successively formed by vapor deposition on a glass substrate 1 that had been provided with an ITO electrode as a transparent anode 2.

[0192] Specifically, the glass substrate 1 having ITO (thickness 150 nm) formed thereon was washed with an organic solvent, and subjected to an oxygen plasma treatment to wash the surface. The glass substrate with the ITO electrode was then installed in a vacuum vapor deposition apparatus, and the pressure was reduced to 0.001 Pa or less. This was followed by formation of the hole transport layer 4 by forming Compound 122 of the structural formula below over the transparent anode 2 in a thickness of 60 nm at a deposition rate of 6 nm/min. Thereafter, the light emitting layer 5 was formed on the hole transport layer 4 by forming Compounds 123 and 124 of the structural formulae below in a thickness of 30 nm using dual vapor deposition at a deposition rate ratio of compound 123:compound 124=5:95. The hole blocking layer-electron transport layer 6 and 7 were then formed on the light emitting

layer 5 by forming the compound of Example 13 of the present invention (Compound 15) in a thickness of 30 nm at a deposition rate of 6 nm/min. Then, the electron injection layer 8 was formed on the hole blocking layer-electron transport layer 6 and 7 by forming lithium fluoride in a thickness of 0.5 nm at a deposition rate of 0.6 nm/min. Finally, the cathode 9 was formed by vapor depositing aluminum in a thickness of 150 nm. The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature.

[0193] Table 2 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device fabricated with the compound of Example 13 of the present invention (Compound 15).

Example 40

[0194] An organic EL device was fabricated under the same conditions used in Example 39, except that the compound of Example 14 of the present invention (Compound 18) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 13 of the present invention (Compound 15). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 2 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 41

[0195] An organic EL device was fabricated under the same conditions used in Example 39, except that the compound of Example 15 of the present invention (Compound 31) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 13 of the present invention (Compound 15). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 2 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 42

[0196] An organic EL device was fabricated under the same conditions used in Example 39, except that the compound of Example 16 of the present invention (Compound 32) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 13 of the present invention (Compound 15). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 2 summarizes the results of the emission

characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 43

[0197] An organic EL device was fabricated under the same conditions used in Example 39, except that the compound of Example 20 of the present invention (Compound 80) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 13 of the present invention (Compound 15). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 2 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Example 44

[0198] An organic EL device was fabricated under the same conditions used in Example 39, except that the compound of Example 22 of the present invention (Compound 88) was used as the material of the hole blocking layer-electron transport layer 6 and 7 and formed in a thickness of 30 nm, instead of the compound of Example 13 of the present invention (Compound 15). The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 2 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

Comparative Example 2

[0199] For comparison, an organic EL device was fabricated under the same conditions used in Example 39, except that Alq₃ was used as the material of the electron transport layer 7, instead of forming the hole blocking layer-electron transport layer 6 and 7. The characteristics of the organic EL device thus fabricated were measured in an atmosphere at ordinary temperature. Table 2 summarizes the results of the emission characteristics measurements performed by applying a DC voltage to the organic EL device thus fabricated.

TABLE 2

		Voltage [V] (@ 10 mA/cm ²)	Luminance [cd/m ²] (@ 10 mA/cm ²)	Luminous current efficiency [cd/A] (@ 10 mA/cm ²)	Power efficiency [lm/W] (@ 10 mA/cm ²)
	Compound				
Example 39	Compound 15	4.95	1038	10.38	6.57
Example 40	Compound 18	4.35	1131	11.31	8.18
Example 41	Compound 31	4.66	925	9.25	6.24
Example 42	Compound 32	4.55	1190	11.90	8.23
Example 43	Compound 80	5.55	960	9.60	5.45
Example 44	Compound 88	5.21	1058	10.58	6.38
Comparative Example 1	Alq ₃	5.80	820	8.25	4.40

[0200] As can be seen in Table 2, the driving voltage at a current density of 10 mA/cm² was as low as 3.74 to 5.22 V in Examples 39 to 44, compared to 5.26 V for Alq₃. There were also improvements in the luminance, luminous current efficiency, and power efficiency measured at a current density of 10 mA/cm².

[0201] The measurement results of turn on voltage are as follows.

Organic EL device	Compound	Turn on voltage [V]
Example 39	Compound 9	2.9
Example 40	Compound 10	3.0
Example 41	Compound 42	2.8
Example 42	Compound 45	2.9
Example 43	Compound 52	2.8
Example 44	Compound 55	2.7
Comparative Example 2	Alq ₃	3.1

[0202] It can be seen that the turn on voltage was lower in Examples 39 to 44 than in Comparative Example 2 that used Alq₃.

[0203] It was therefore found that the organic EL device of the present invention had superior luminous efficiency compared with the devices that used the common electron transport material Alq₃, and could greatly lower the actual driving voltage.

INDUSTRIAL APPLICABILITY

[0204] The compound having a substituted anthracene ring structure and a pyridoindole ring structure of the present invention has good electron injection characteristics, excels in hole blocking ability and heat resistance, and thus has a stable thin-film state. The compound is therefore excellent as a compound for organic EL devices. The organic EL device fabricated with the compound can have high efficiency, a low driving voltage, and thus improved durability. There are potential applications for, for example, home electronic appliances and illuminations.

DESCRIPTION OF REFERENCE NUMERALS AND SIGNS


- [0205] 1 Glass substrate
- [0206] 2 Transparent anode
- [0207] 3 Hole injection layer
- [0208] 4 Hole transport layer
- [0209] 5 Light emitting layer

- [0210] 6 Hole blocking layer
- [0211] 7 Electron transport layer
- [0212] 8 Electron injection layer
- [0213] 9 Cathode

1-11. (canceled)

12. A compound of the following general formula (1) having a substituted anthracene ring structure and a pyridoindole ring structure

[Chemical Formula 1]

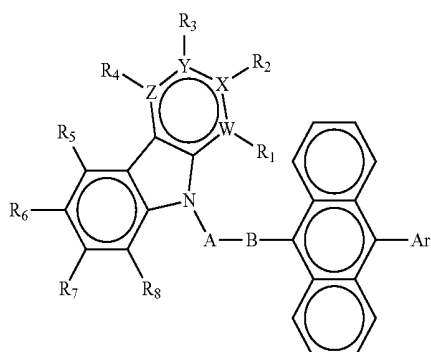

wherein, Ar represents substituted or unsubstituted aromatic hydrocarbon, or substituted or unsubstituted condensed polycyclic aromatic,

A represents a divalent group of substituted or unsubstituted aromatic hydrocarbon, a divalent group of a substituted or unsubstituted aromatic heterocyclic ring, or a divalent group of substituted or unsubstituted condensed polycyclic aromatic,


B represents a single bond, a divalent group of substituted or unsubstituted aromatic hydrocarbon, a divalent group of a substituted or unsubstituted aromatic heterocyclic ring, or a divalent group of substituted or unsubstituted condensed polycyclic aromatic,

R1 to R8 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, and

W, X, and Z represent a carbon atom; Y represents a nitrogen atom; and the nitrogen atom does not have the substituents R3.

13. A compound of the following general formula (1) having a substituted anthracene ring structure and a pyridoindole ring structure

[Chemical Formula 1]

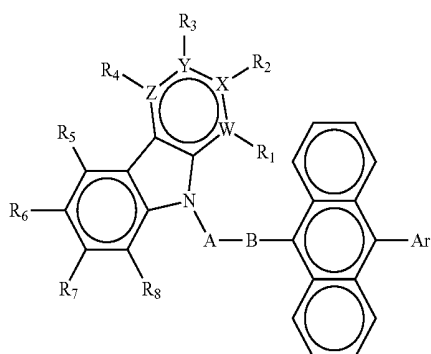

wherein, Ar represents substituted or unsubstituted aromatic hydrocarbon, or substituted or unsubstituted condensed polycyclic aromatic,

A represents a divalent group of substituted or unsubstituted aromatic hydrocarbon,


B represents a divalent group of substituted or unsubstituted aromatic hydrocarbon, or a divalent group of substituted or unsubstituted condensed polycyclic aromatic,

R1 to R8 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, and

W, X, Y, and Z represent a carbon atom or a nitrogen atom, where only one of W, X, Y, and Z is a nitrogen atom, and, in this case, the nitrogen atom does not have the substituents R1 to R4.

14. A compound of the following general formula (1) having a substituted anthracene ring structure and a pyridoindole ring structure

[Chemical Formula 1]

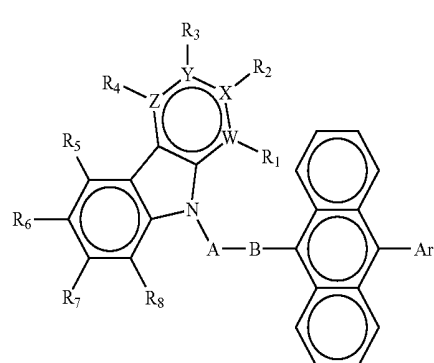

wherein, Ar represents substituted or unsubstituted aromatic hydrocarbon, or substituted or unsubstituted condensed polycyclic aromatic,

A represents a divalent group of a substituted or unsubstituted aromatic heterocyclic ring,


B represents a single bond or a divalent group of a substituted or unsubstituted aromatic heterocyclic ring,

R1 to R8 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, and

W, X, Y, and Z represent a carbon atom or a nitrogen atom, where only one of W, X, Y, and Z is a nitrogen atom, and, in this case, the nitrogen atom does not have the substituents R1 to R4.

15. A compound of the following general formula (1) having a substituted anthracene ring structure and a pyridoindole ring structure

[Chemical Formula 1]

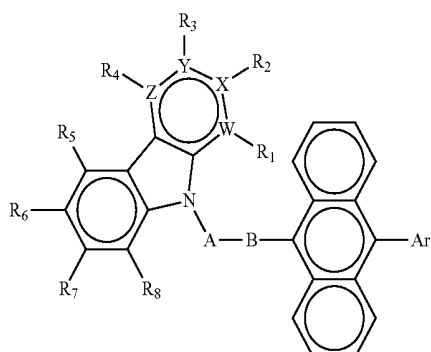

(1)

wherein, Ar represents substituted or unsubstituted aromatic hydrocarbon, or substituted or unsubstituted condensed polycyclic aromatic,

A represents a divalent group of substituted or unsubstituted condensed polycyclic aromatic,


B represents a divalent group of substituted or unsubstituted aromatic hydrocarbon, or a divalent group of substituted or unsubstituted condensed polycyclic aromatic,

R1 to R8 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, and

W, X, Y, and Z represent a carbon atom or a nitrogen atom, where only one of W, X, Y, and Z is a nitrogen atom, and, in this case, the nitrogen atom does not have the substituents R1 to R4.

16. A compound of the following general formula (1')

[Chemical Formula 2]

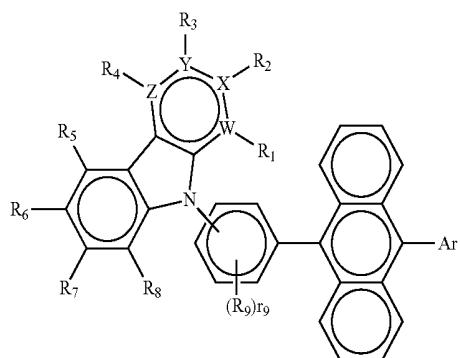


(1')

wherein Ar represents substituted or unsubstituted aromatic hydrocarbon, or substituted or unsubstituted condensed polycyclic aromatic, R1 to R8 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic,

substituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, R9 represents a deuterium atom, a fluorine atom, a chlorine atom, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, R9 is an integer of 1 to 4, where a plurality of R9 may be the same or different, and W, X, Y, and Z represent a carbon atom or a nitrogen atom, where only one of W, X, Y, and Z is a nitrogen atom, and, in this case, the nitrogen atom does not have the substituents R1 to R4.

17. A compound of the following general formula (1) having a substituted anthracene ring structure and a pyridoindole ring structure

[Chemical Formula 1]

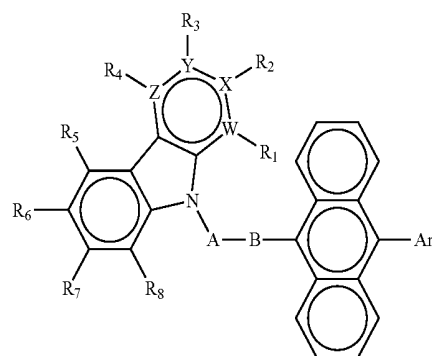

(1)

wherein, Ar represents substituted or unsubstituted aromatic hydrocarbon, or substituted or unsubstituted condensed polycyclic aromatic,

A represents one selected from a group consisting of substituted or unsubstituted biphenylene, terphenylene, tetrakisphenylene, naphthylene, anthrylene, phenanthrylene, fluorenylene, and phenanthrolylene,

B represents a single bond,

R1 to R8 may be the same or different, and represent a hydrogen atom, a deuterium atom, a fluorine atom, a chlorine atom, cyano, linear or branched alkyl of 1 to 6 carbon atoms that may have a substituent, substituted or unsubstituted aromatic hydrocarbon, a substituted or unsubstituted aromatic heterocyclic group, or substituted or unsubstituted condensed polycyclic aromatic, and

W, X, Y, and Z represent a carbon atom or a nitrogen atom, where only one of W, X, Y, and Z is a nitrogen atom, and, in this case, the nitrogen atom does not have the substituents R1 to R4.

18. An organic electroluminescent device that comprises a pair of electrodes, and one or more organic layers sandwiched between the pair of electrodes, wherein the compound of claim 12 is used as a constituent material of at least one of the organic layers.

19. The organic electroluminescent device according to claim 18, wherein the organic layer is an electron transport layer, and the compound of the general formula (1) is used as at least one of the constituent materials in the electron transport layer.

20. The organic electroluminescent device according to claim **18**, wherein the organic layer is a hole blocking layer, and the compound of the general formula (1) is used as at least one of the constituent materials in the hole blocking layer.

21. The organic electroluminescent device according to claim **18**, wherein the organic layer is a light emitting layer, and the compound of the general formula (1) is used as at least one of the constituent materials in the light emitting layer.

22. The organic electroluminescent device according to claim **18**, wherein the organic layer is an electron injection layer, and the compound of the general formula (1) is used as at least one of the constituent materials in the electron injection layer.

23. An organic electroluminescent device that comprises a pair of electrodes, and one or more organic layers sandwiched between the pair of electrodes, wherein the compound of claim **14** is used as a constituent material of at least one of the organic layers.

24. An organic electroluminescent device that comprises a pair of electrodes, and one or more organic layers sandwiched between the pair of electrodes, wherein the compound of claim **16** is used as a constituent material of at least one of the organic layers.

25. An organic electroluminescent device that comprises a pair of electrodes, and one or more organic layers sandwiched between the pair of electrodes, wherein the compound of claim **17** is used as a constituent material of at least one of the organic layers.

* * * * *

专利名称(译)	具有取代的萘环结构和吡啶并喹啉环结构的化合物，以及有机电致发光器件		
公开(公告)号	US20150155496A1	公开(公告)日	2015-06-04
申请号	US14/552576	申请日	2014-11-25
[标]申请(专利权)人(译)	保土谷化学工业株式会社		
申请(专利权)人(译)	HODOGAYA化学有限公司.		
当前申请(专利权)人(译)	HODOGAYA化学有限公司.		
[标]发明人	YOKOYAMA NORIMASA HAYASHI SHUICHI KABASAWA NAOAKI KANDA DAIZOU KUSANO SHIGERU		
发明人	YOKOYAMA, NORIMASA HAYASHI, SHUICHI KABASAWA, NAOAKI KANDA, DAIZOU KUSANO, SHIGERU		
IPC分类号	H01L51/00 C07D519/00 C07D471/04		
CPC分类号	H01L51/0052 C07D471/04 C07D519/00 H01L51/0072 H01L51/5092 H01L51/0067 H01L51/508 H01L51/5096 H01L51/5012 H01L51/0058 H01L51/5048 Y10S428/917		
优先权	PCT/JP2010/004784 2010-07-28 WO 2009182019 2009-08-05 JP		
其他公开文献	US9755152		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种具有优异特性的有机化合物，其具有优异的电子注入/传输性能，空穴阻挡能力和薄膜状态下的高稳定性，用作具有高效率和高耐久性的有机电致发光器件的材料。还提供了使用该化合物的高效且高耐用的有机电致发光器件。该化合物由通式(1)表示，其具有取代的萘环结构和吡啶并喹啉环结构。有机电致发光器件包括一对电极，以及夹在该对电极之间的一个或多个有机层，并且该化合物用作至少一个有机层的构成材料。

