



US 20170148996A1

(19) **United States**(12) **Patent Application Publication**
REN et al.(10) **Pub. No.: US 2017/0148996 A1**(43) **Pub. Date: May 25, 2017**(54) **ORGANIC ELECTROLUMINESCENT
COMPOUNDS AND ORGANIC
OPTOELECTRONIC DEVICES COMPRISING
THE SAME**(71) Applicants: **SHANGHAI TIANMA AM-OLED
CO., LTD.**, Shanghai (CN); **TIANMA
MICRO-ELECTRONICS CO., LTD.**,
Shenzhen (CN)(72) Inventors: **Hongyang REN**, Shanghai (CN);
Xiangcheng WANG, Shanghai (CN);
Wei HE, Shanghai (CN)(21) Appl. No.: **15/198,177**(22) Filed: **Jun. 30, 2016**(30) **Foreign Application Priority Data**

Nov. 20, 2015 (CN) 201510810708.8


Publication Classification

(51) **Int. Cl.**
H01L 51/00 (2006.01)
C09K 11/02 (2006.01)
C07D 471/04 (2006.01)
C07D 417/14 (2006.01)
C07D 498/04 (2006.01)
C09K 11/06 (2006.01)
C07D 413/14 (2006.01)

(52) **U.S. Cl.**
CPC *H01L 51/0071* (2013.01); *C09K 11/06*
(2013.01); *C09K 11/025* (2013.01); *C07D*
413/14 (2013.01); *C07D 417/14* (2013.01);
C07D 498/04 (2013.01); *H01L 51/0072*
(2013.01); *H01L 51/0052* (2013.01); *C07D*
471/04 (2013.01); *H01L 51/0061* (2013.01);
H01L 51/5012 (2013.01)

(57) **ABSTRACT**

The present application provides an organic electroluminescent compound, use thereof in organic optoelectronic device, and an organic photoelectric device comprising the same.

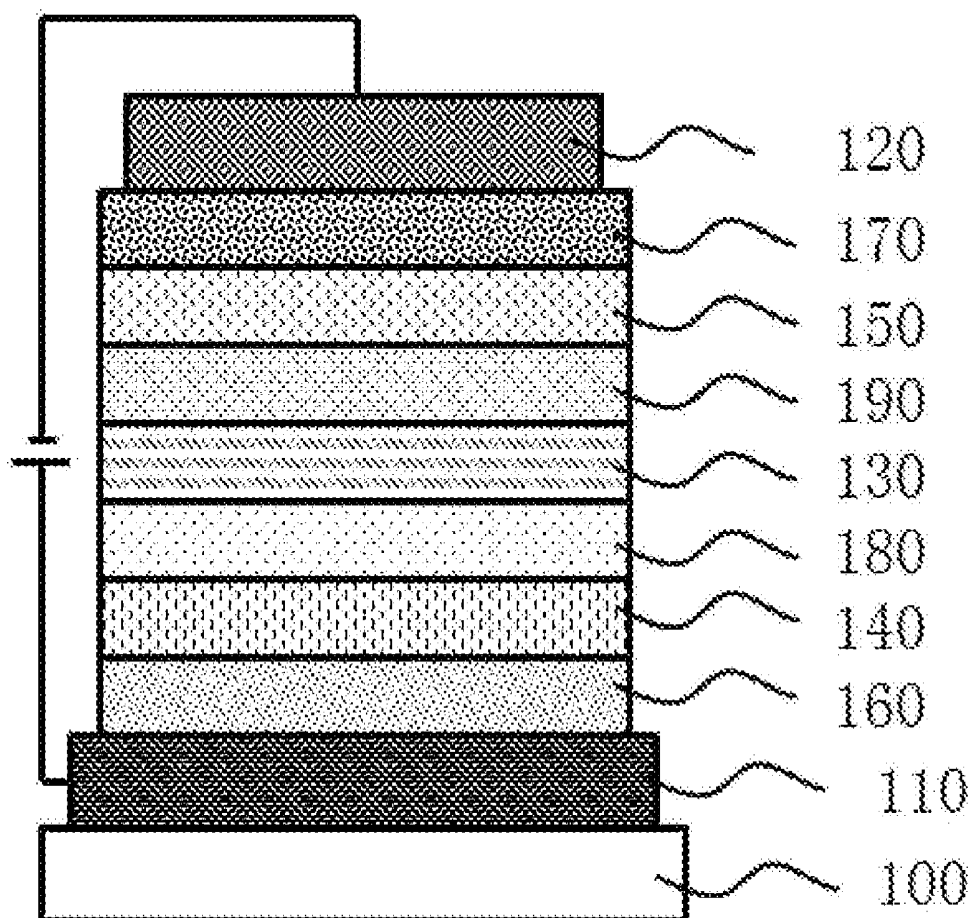

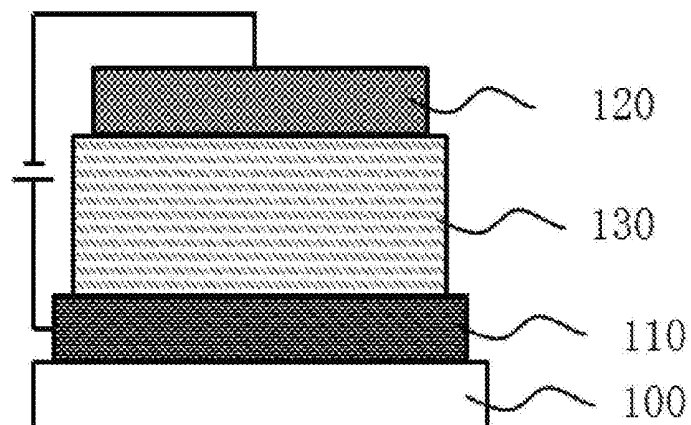


Fig. 1

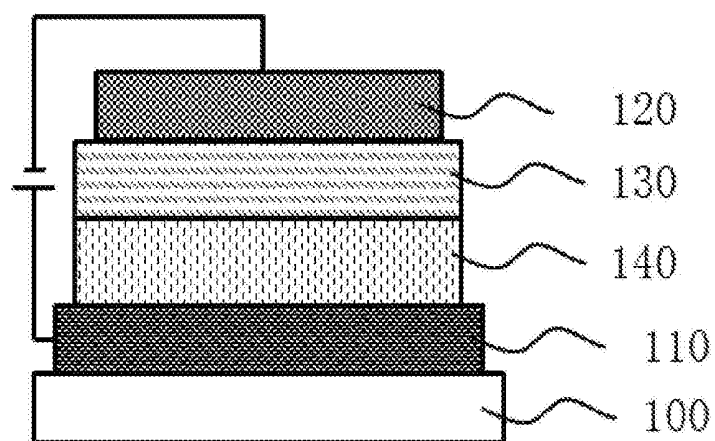


Fig. 2

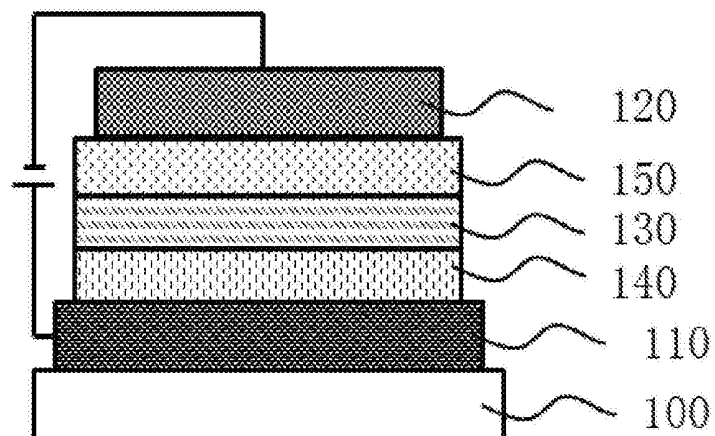


Fig. 3

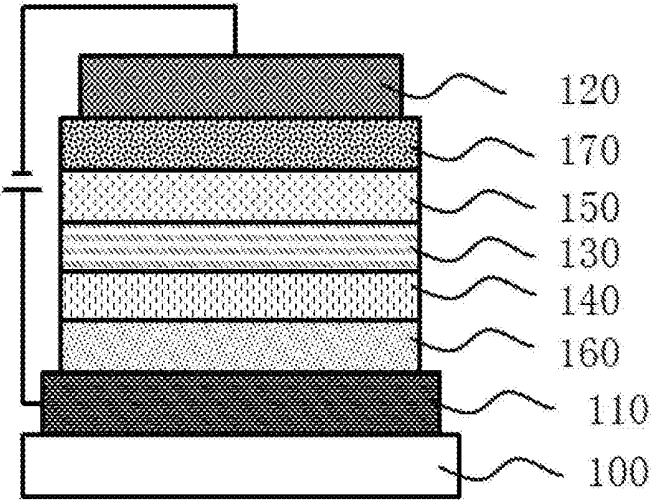


Fig. 4

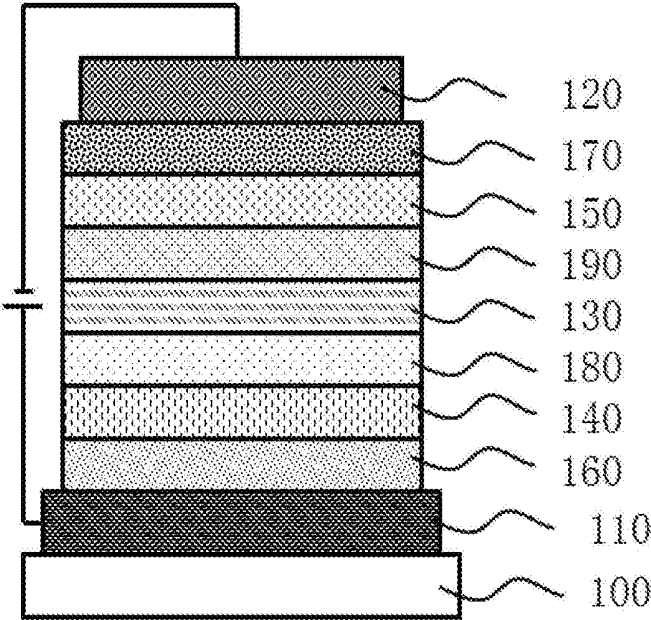


Fig. 5

ORGANIC ELECTROLUMINESCENT COMPOUNDS AND ORGANIC OPTOELECTRONIC DEVICES COMPRISING THE SAME

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of Chinese patent application No. 201510810708.8, filed on Nov. 20, 2015, of which the disclosure is incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The present application relates to the field of organic electroluminescent material, and particularly to an organic electroluminescent material, and application of the material in organic photoelectric device.

BACKGROUND


[0003] In recent years, organic light emitting diode (OLED) becomes a very popular new generation display products domestically and abroad due to its advantages of self-illumination, high efficiency, wide color gamut, wide viewing angle, etc. Meanwhile, organic materials for preparing OLED play a crucial role.

[0004] Wherein, the material for OLED luminescent layer produces singlet excited state (S_1) excitons and triplet excited state (T_1) excitons upon electroexcitation, and the numerical ratio of the two excitons is 1:3 according to spin statistics. Depending on different luminescent mechanisms, the materials which can be used in the luminescent layer of organic light emitting diode generally are the following kinds. Fluorescent materials, only utilizing 25% of the singlet state S_1 excitons, go back to the ground state S_0 by radiative transition, thus the largest external quantum efficiency of OLED applying such materials can not break this limit. The second kind is phosphorescent materials, utilizing not only 25% of the singlet state S_1 excitons but also 75% of the triplet state T_1 excitons, thus the theoretical internal quantum efficiency can reach 100%, and the luminescent effect when applying to OLED is absolutely better than fluorescent materials. However, since most phosphorescent materials are rare metal complexes, the cost of the materials is higher, and the blue phosphorescent materials always have some problems, such as poor efficiency and lifetime, when being applied in OLED. In 2011, professor Adachi, et al., at Kyushu University in Japan reported that a thermally activated delayed fluorescence (TADF) materials have good luminescence performance. The energy gap between S_1 state and T_1 state of this material is small, and the lifetime of the T_1 state excitons is longer. T_1 state excitons can achieve the $T_1 \rightarrow S_1$ process by reverse intersystem crossing (RISC) and then the radiation attenuation from the S_1 state to the ground state S_0 under a certain temperature. Therefore, the luminescence efficiency of OLED devices using such materials as a luminescent layer can be comparable to that of phosphorescent materials, and rare metal elements are not required and the material cost is low. However, such materials are still rare currently, and there is an urgent need for developing novel high-performance TADF materials.

SUMMARY

[0005] The present application aims at providing a novel organic electroluminescent compound having thermally activated delayed fluorescence (TADF) property.

[0006] According to one embodiment of the present application, a compound having the structure of Formula (I) is provided

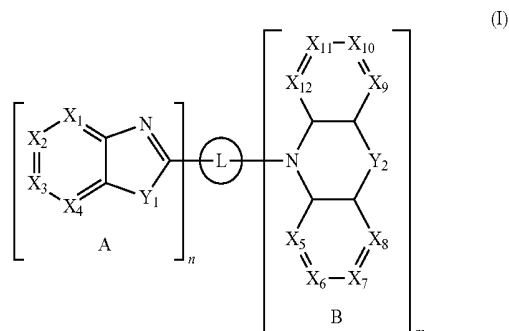

wherein

[0007] X_1 to X_{12} are each independently CR₁ or N;

[0008] Y1 is O, S or NR₂;

[0009] Y_2 is a single bond, O, S, CR_3R_4 , NR_5 or SiR_6R_7 ;

[0010] R₁ to R₇ are each independently hydrogen, deuterium, C₁₋₃₀ alkyl, C₆₋₃₀ aryl or C₂₋₂₀ heteroaryl;

[0011] L is a linking moiety which enables the structure of the Formula (I) to form a conjugated system:

[0012] n and m are each independently 1, 2 or 3;

[0013] if n is greater than 1, each Moiety A in the Formula (I) is the same as each other or different from each other; and

[0014] if m is greater than 1, each Moiety B in the Formula (I) is the same as each other or different from each other. According to one embodiment of the present application, use of the above-mentioned compounds in an organic optoelectronic device is provided.

[0015] According to one embodiment of the present application, an organic optoelectronic device is provided, the device comprises an anode, a cathode and one or more organic layers located between the anode and cathode, and the organic layers comprise the above-mentioned compound.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 illustrates an exemplary structure of an organic electroluminescent diode according to a first embodiment of the present invention.

[0017] FIG. 2 illustrates an exemplary structure of an organic electroluminescent diode according to a second embodiment of the present invention.


[0018] FIG. 3 illustrates an exemplary structure of an organic electroluminescent diode according to a third embodiment of the present invention.

[0019] FIG. 4 illustrates an exemplary structure of an organic electroluminescent diode according to a fourth embodiment of the present invention.

[0020] FIG. 5 illustrates an exemplary structure of an organic electroluminescent diode according to a fifth embodiment of the present invention.


DETAILED DESCRIPTION

[0021] In one embodiment, a compound having the structure of Formula (I) is provided:

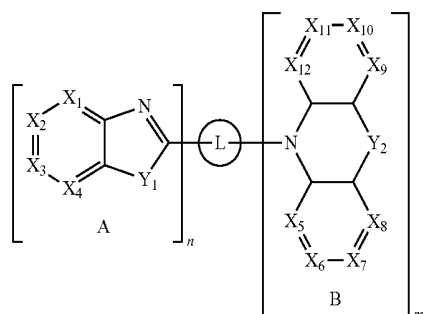


wherein

- [0022] X_1 to X_{12} are each independently CR_1 or N;
- [0023] Y_1 is O, S or NR_2 ;
- [0024] Y_2 is a single bond, O, S, CR_3R_4 , NR_5 or SiR_6R_7 ;
- [0025] R_1 to R_7 are each independently hydrogen, deuterium, C_{1-30} alkyl, C_{6-30} aryl or C_{2-20} heteroaryl;
- [0026] L is a linking moiety which enables the structure of Formula (I) to form a conjugated system;
- [0027] n and m are each independently 1, 2 or 3;
- [0028] if n is greater than 1, each Moiety A in Formula (I) is the same as each other or different from each other; and
- [0029] if m is greater than 1, each Moiety B in Formula (I) is the same as each other or different from each other.
- [0030] In the above embodiment, the C_{1-30} alkyl is a C_{1-20} alkyl.
- [0031] In the above embodiment, the C_{1-30} alkyl is a C_{1-10} alkyl.
- [0032] In the above embodiment, the C_{1-30} alkyl is a C_{1-6} alkyl.
- [0033] In the above embodiment, R_1 and R_7 are each independently hydrogen, deuterium, C_{1-6} alkyl.
- [0034] In one embodiment, wherein L in the structure of Formula (I) is C_{6-30} aryl or C_{2-30} heteroaryl.
- [0035] In one embodiment, wherein L in the structure of Formula (I) is C_{6-16} aryl.
- [0036] In one embodiment, wherein L in the structure of Formula (I) is C_{6-14} aryl.
- [0037] In one embodiment, wherein L in the structure of Formula (I) is C_{6-12} aryl.
- [0038] In one embodiment, wherein L in the structure of Formula (I) is selected from the following structures:







-continued



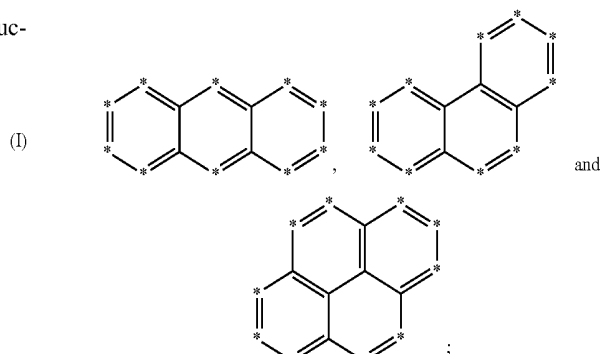


wherein, * represents CR_8 , N or a site linked to the Moiety A or Moiety B, the R_8 is each independently hydrogen, deuterium, C_{1-6} alkyl, C_{1-16} aryl or C_{2-6} heteroaryl. In the above embodiments, the substitution positions of the Moiety A and Moiety B on L are spaced by at least one atom.


[0039] In the above embodiment, the Moiety A is selected from the following groups:

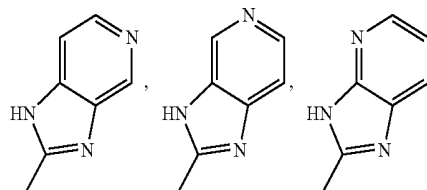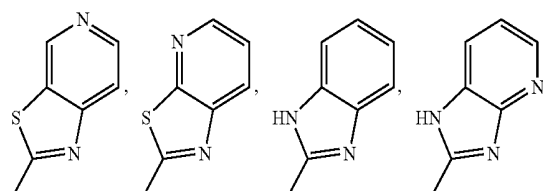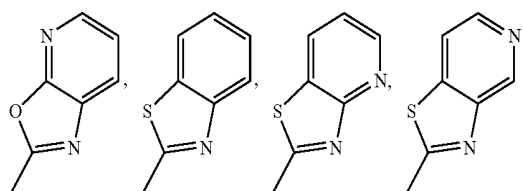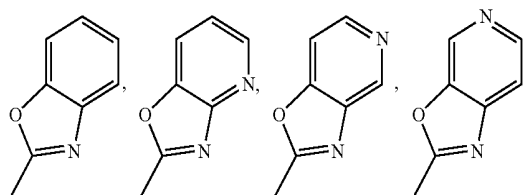

-continued

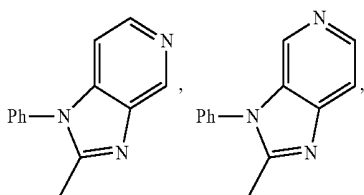

[0040] In the above embodiment, Moiety B is selected from the following groups:

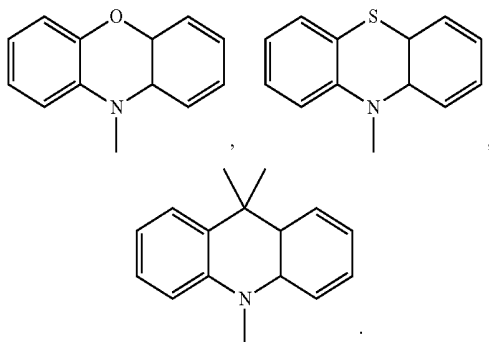

[0041] In the above embodiment, the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of the compound is less than or equal to 0.30 eV.

[0042] In the above embodiment, the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of the compound is less than or equal to 0.25 eV.

[0043] In the above embodiment, the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of the compound is less than or equal to 0.15 eV.




[0044] In the above embodiment, the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of the compound is less than or equal to 0.1 eV.

[0045] In the above embodiment, the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of the compound is less than or equal to 0.05 eV.


[0046] In the above embodiment, the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of the compound is less than or equal to 0.02 eV.

[0047] In the above embodiment, the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of the compound is less than or equal to 0.01 eV.

[0048] The present application provides the following compounds, and the structure and number of the compounds are shown in the table below.

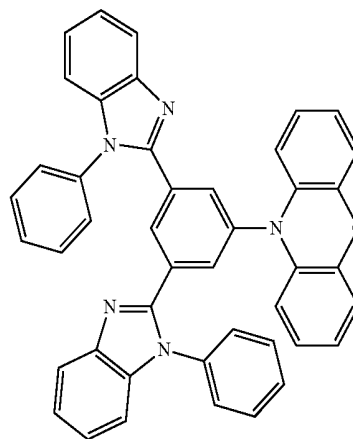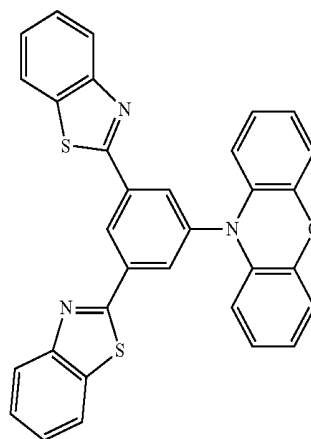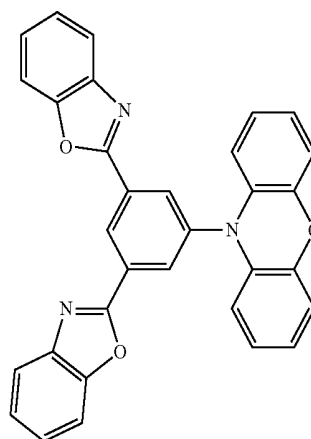


-continued

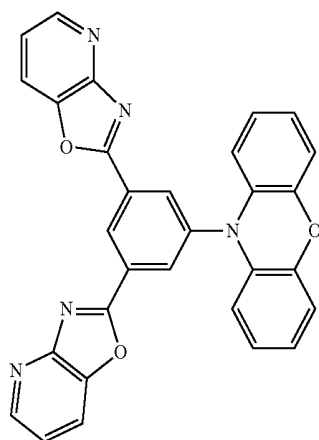


4


-continued

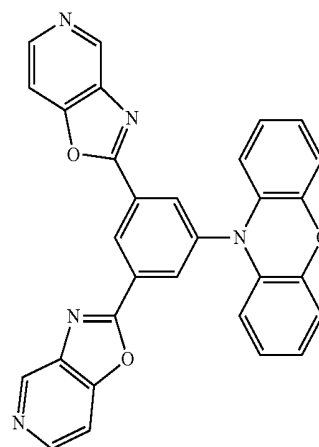


7

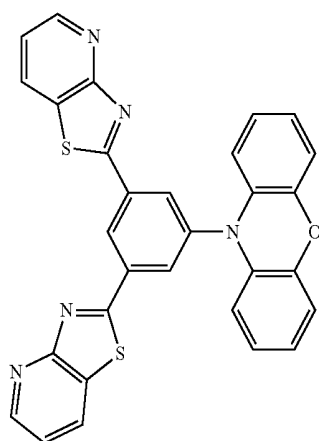


5

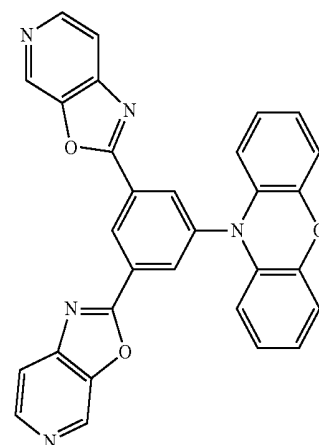

8

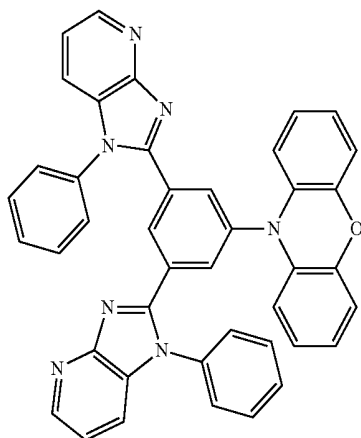


6

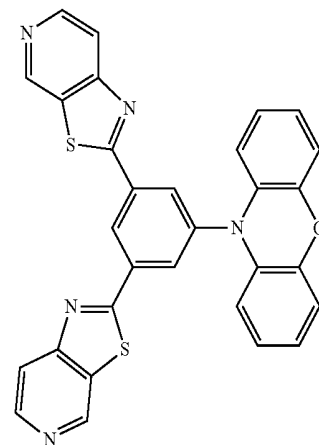


9

-continued

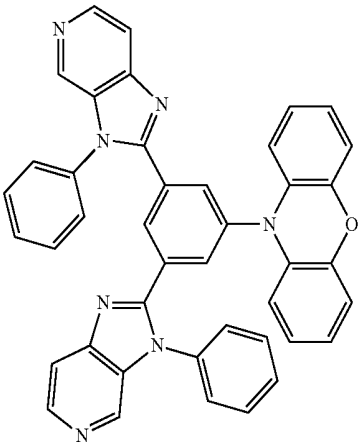


10


-continued

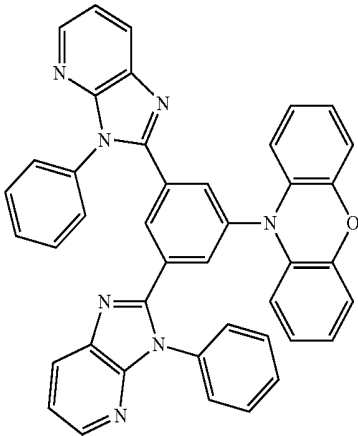


13

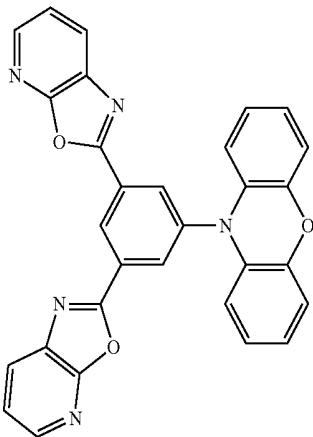


11

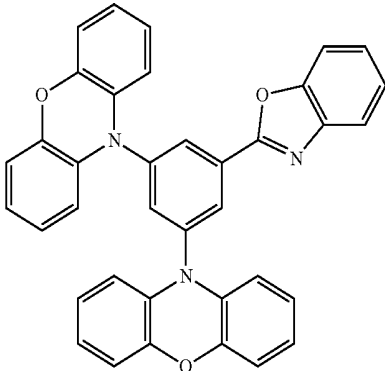


14

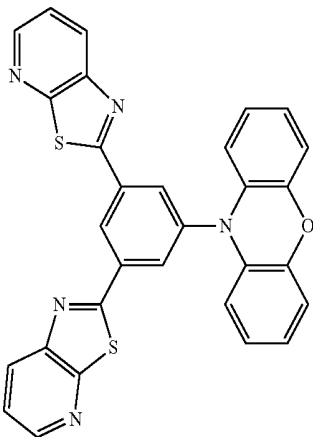

12

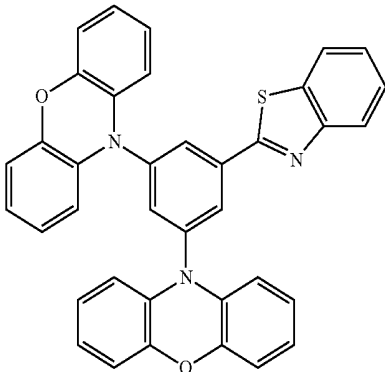


15

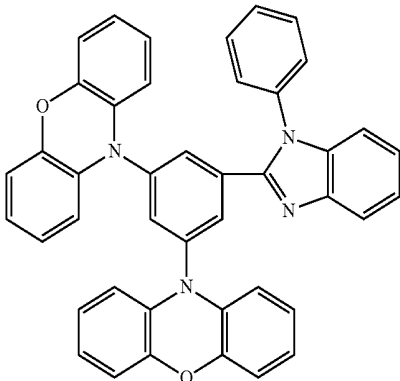


16

-continued

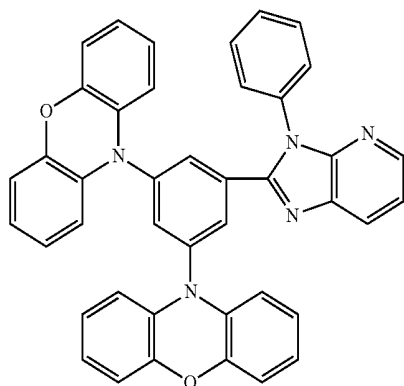


17


-continued

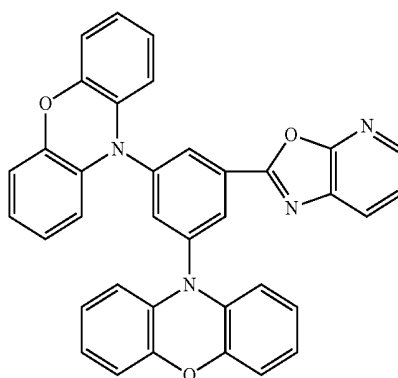


21

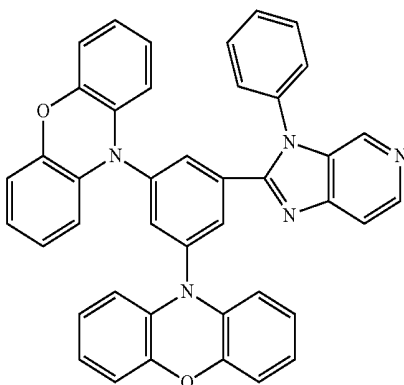


18

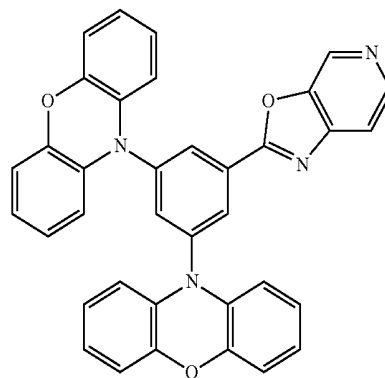


22

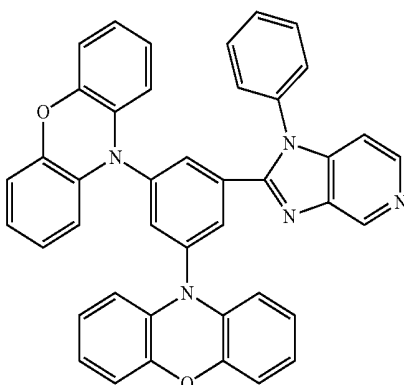


19

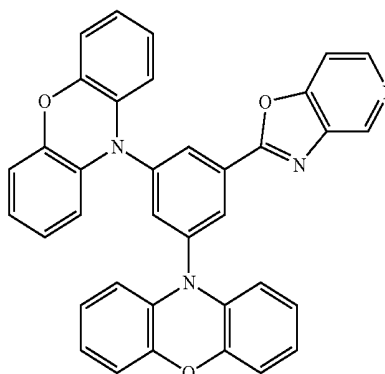

23

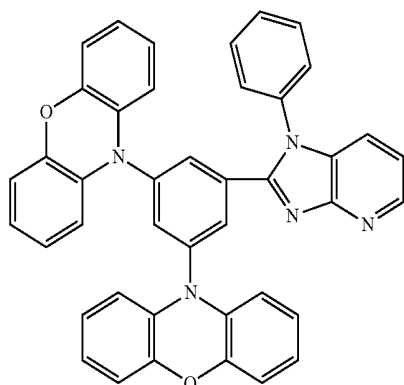


20

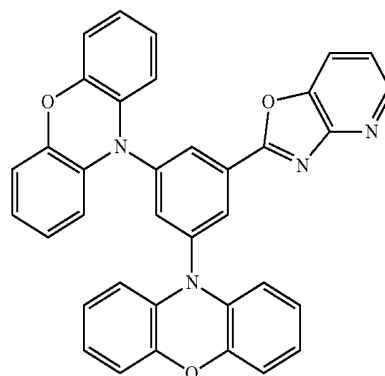


24


-continued

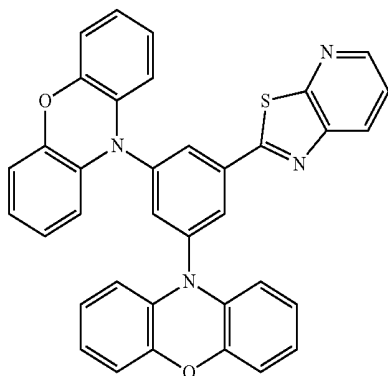


25

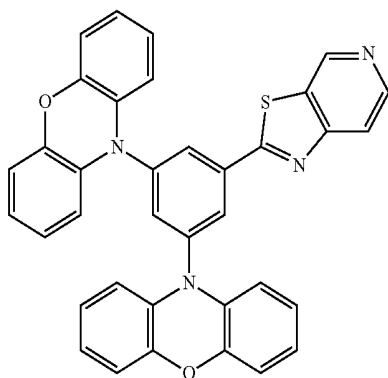

26

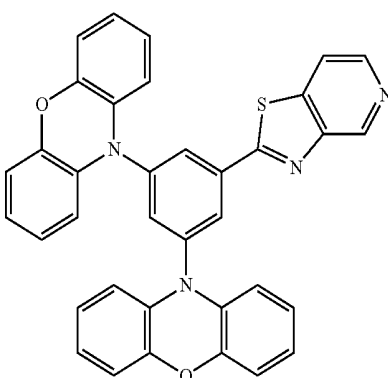


27

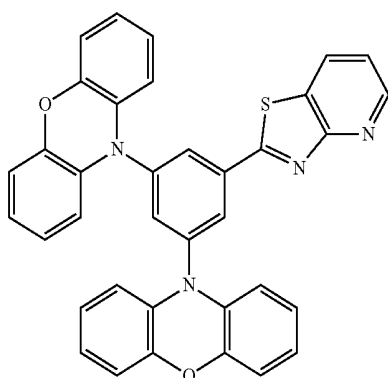


28


-continued

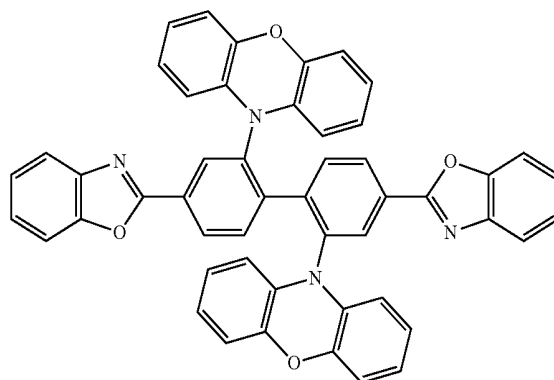


29

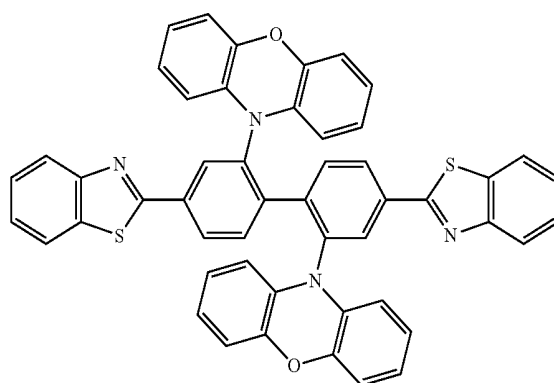

30

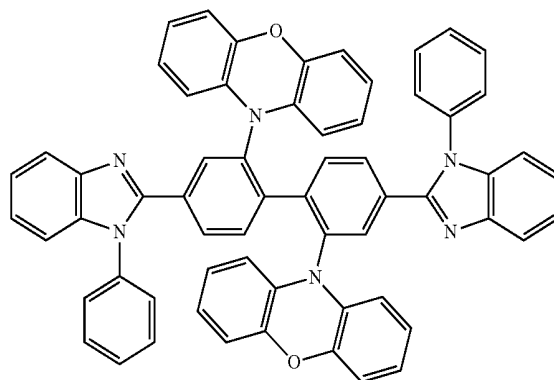


31

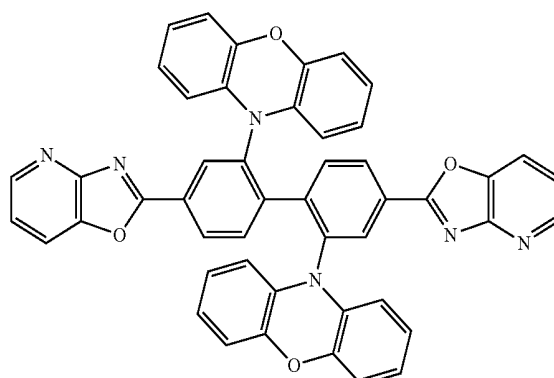


32

-continued


33

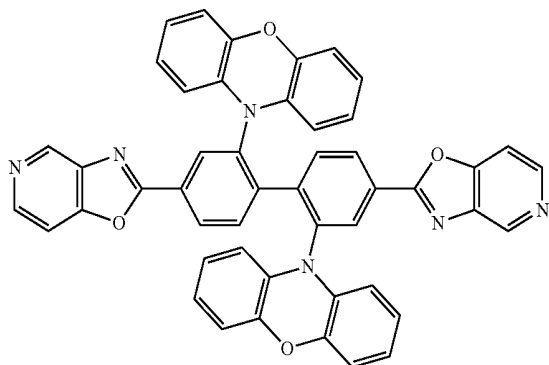


34

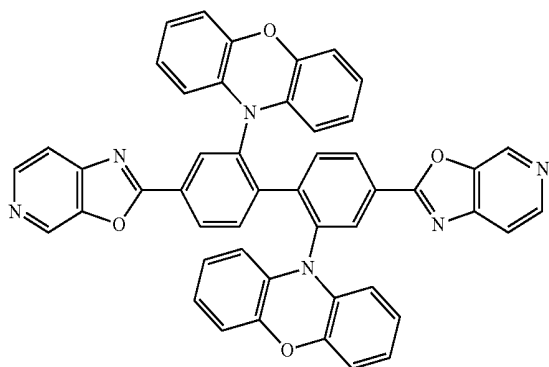

35

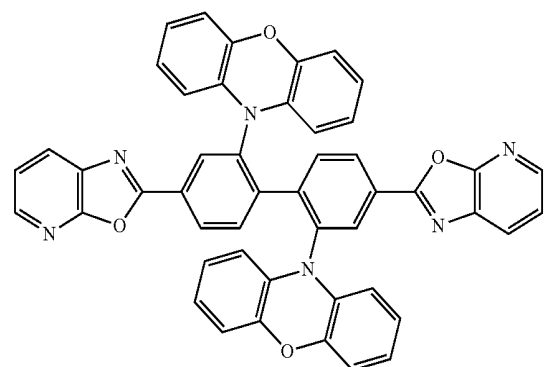


36

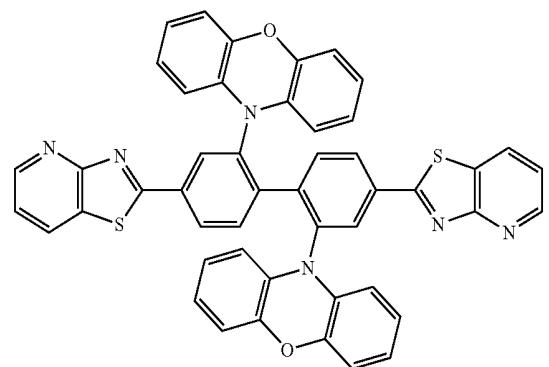


-continued


37

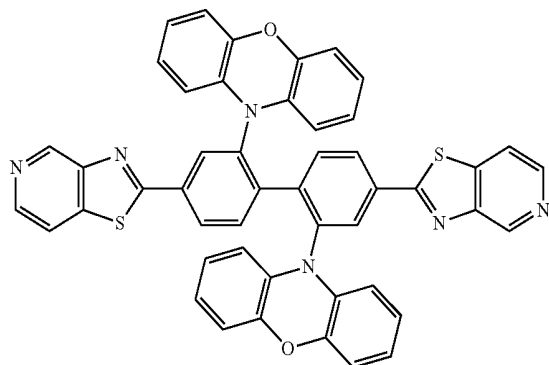


38

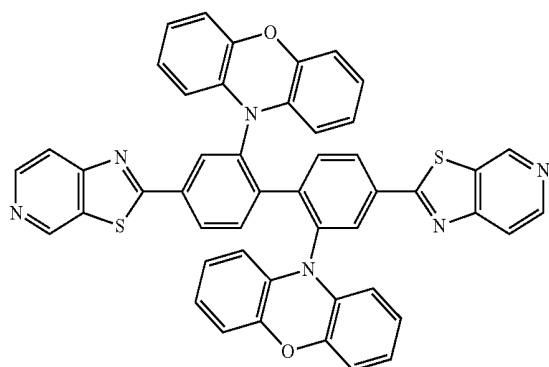

39

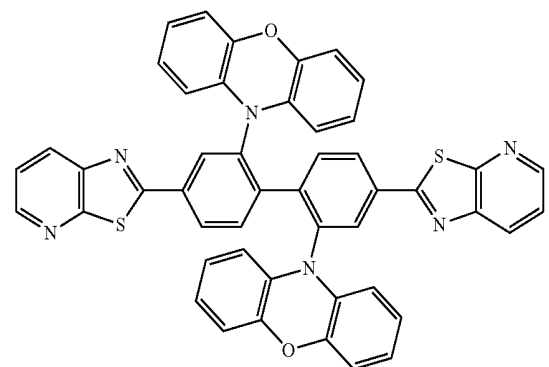


40

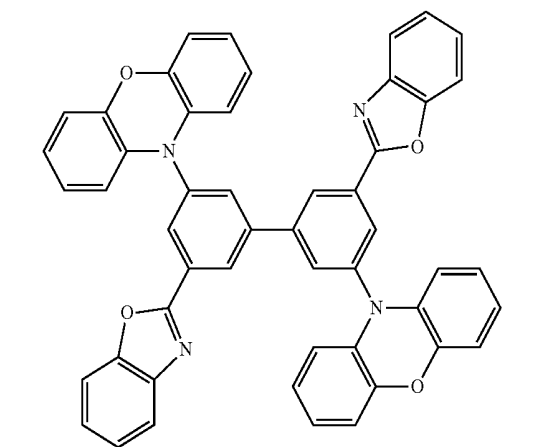


-continued

41

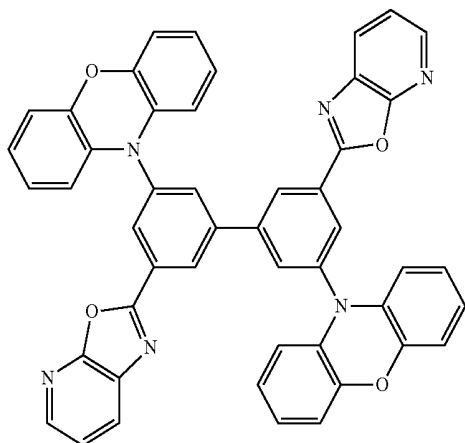


-continued


44

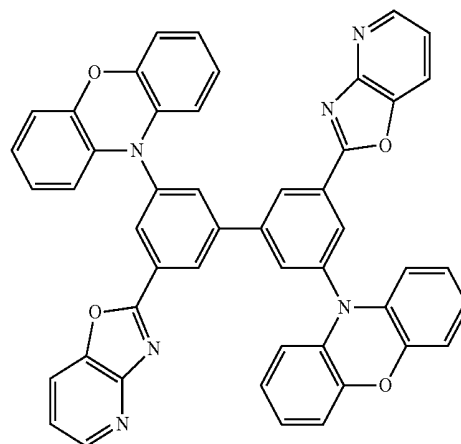


42

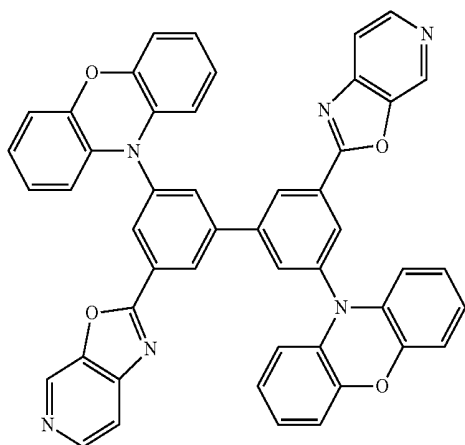


45

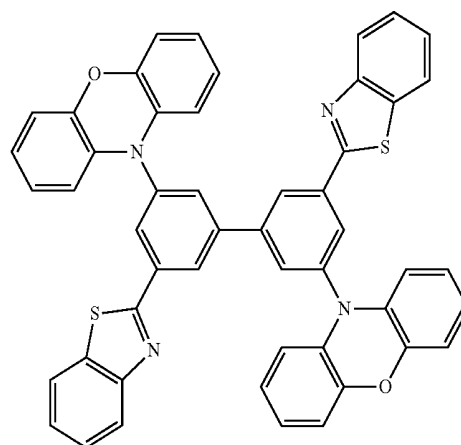


43

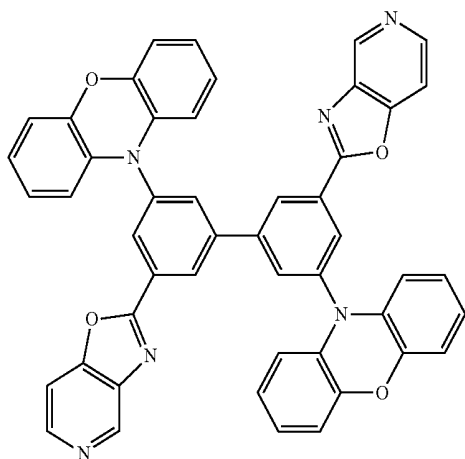


46

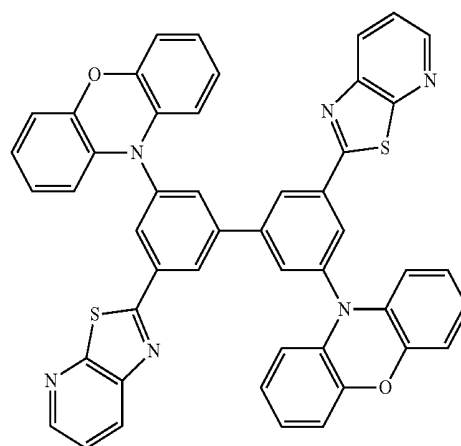


-continued

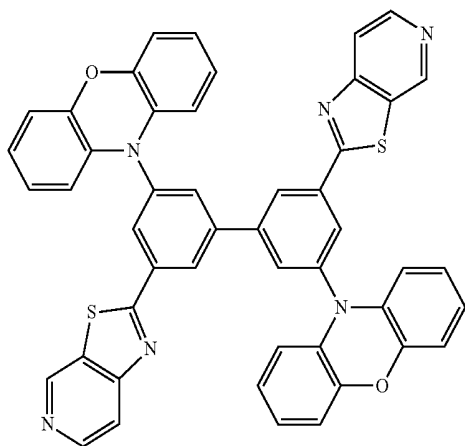


-continued

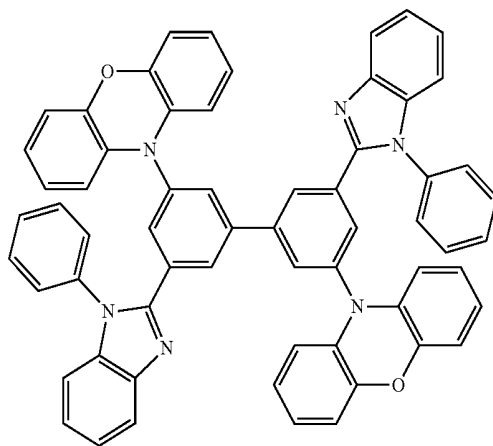


48

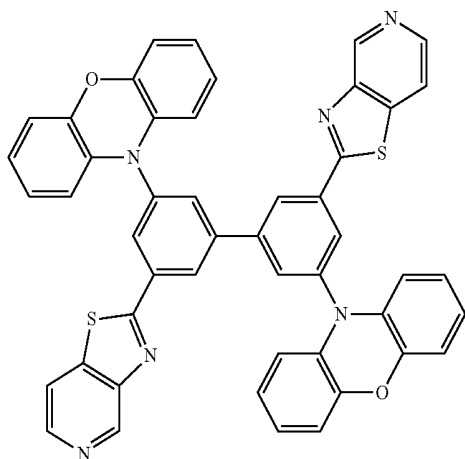


51

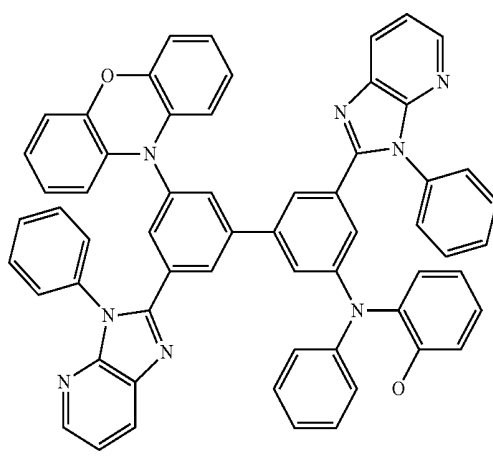


49

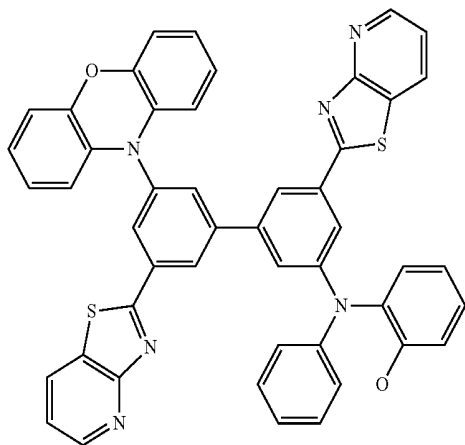

52

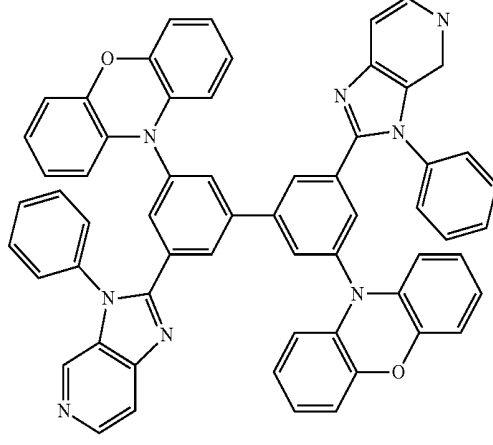


-continued

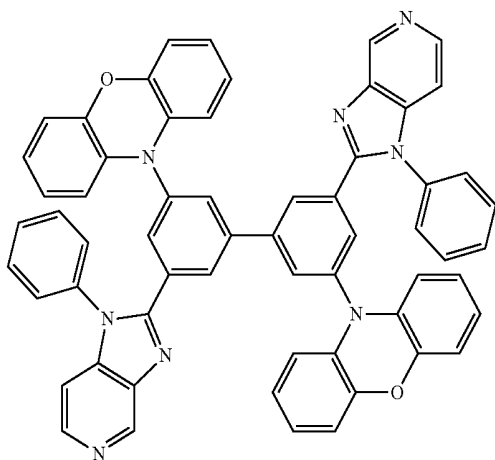


53


-continued

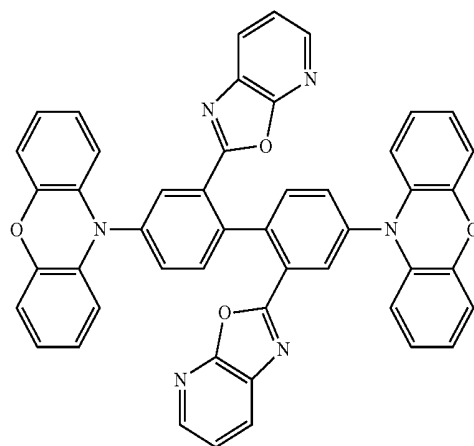


56

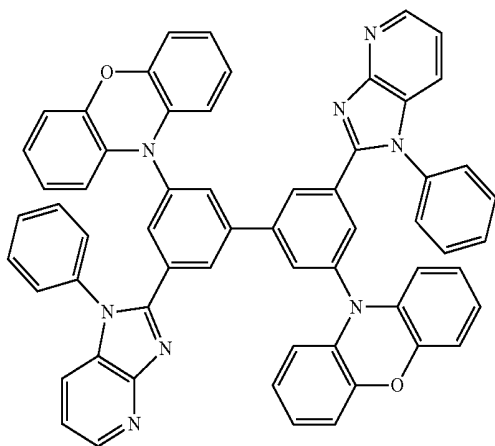


54

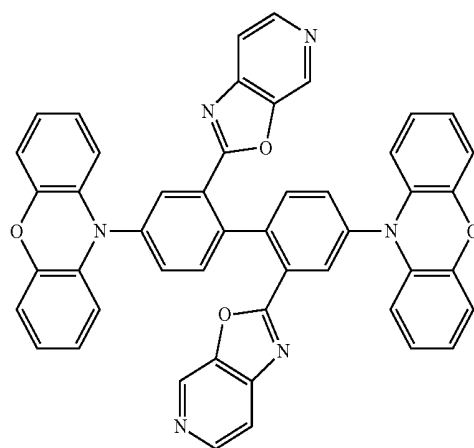

57

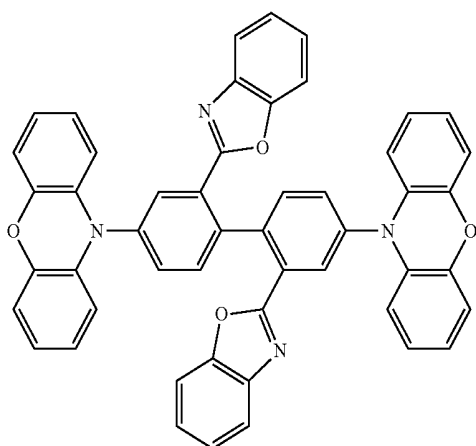


55

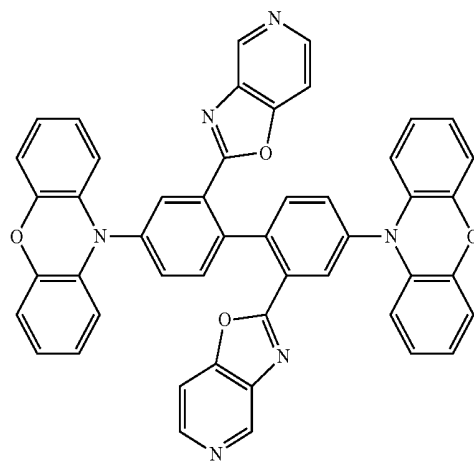

58


-continued

59

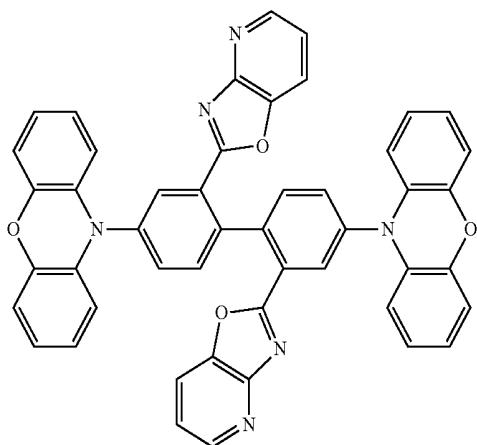


-continued


62

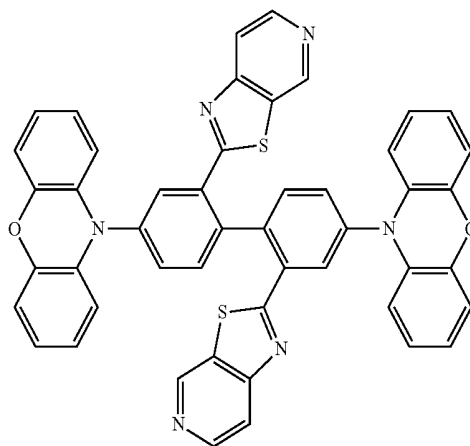


60

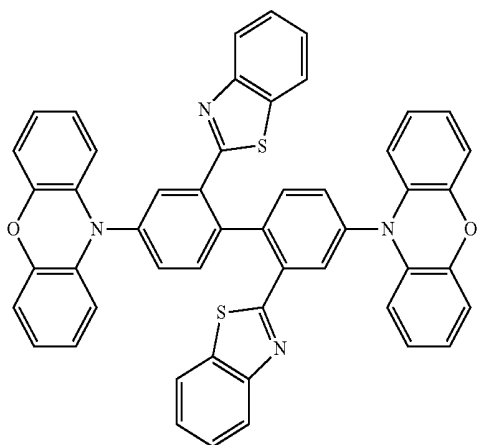


63

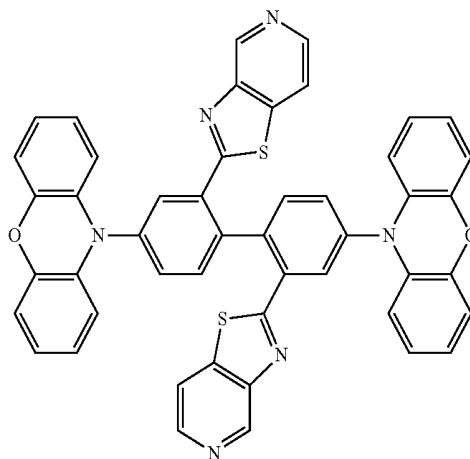


61

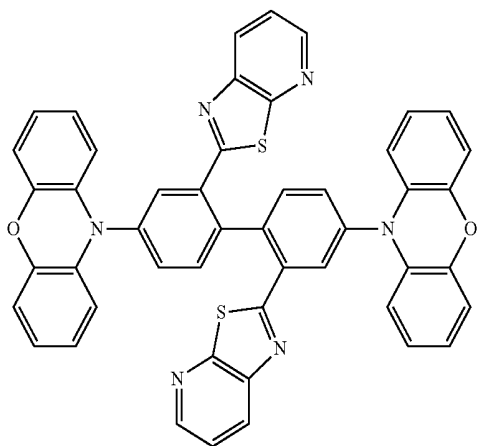


64

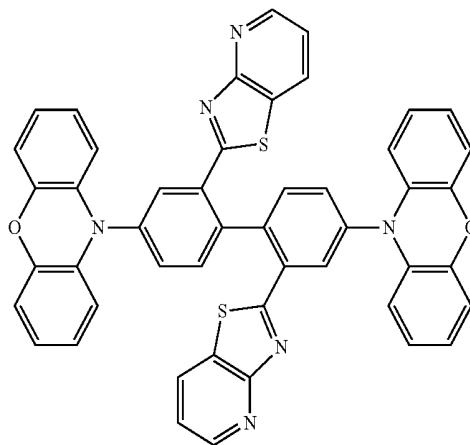


-continued

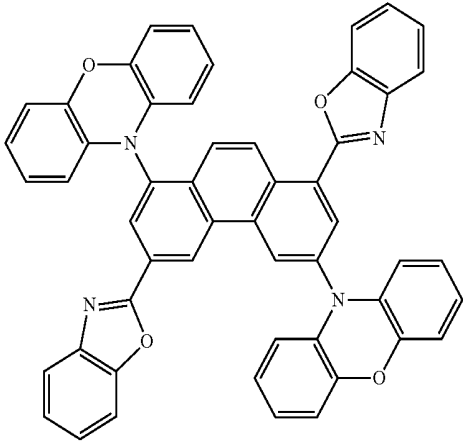


-continued

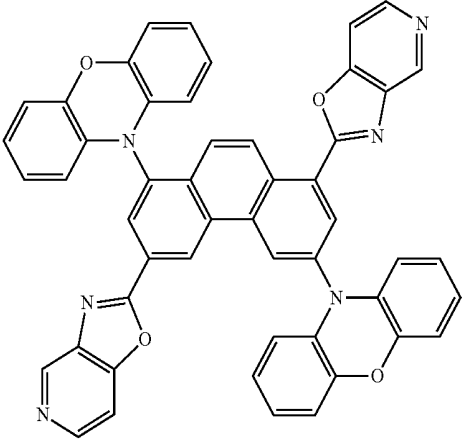


66

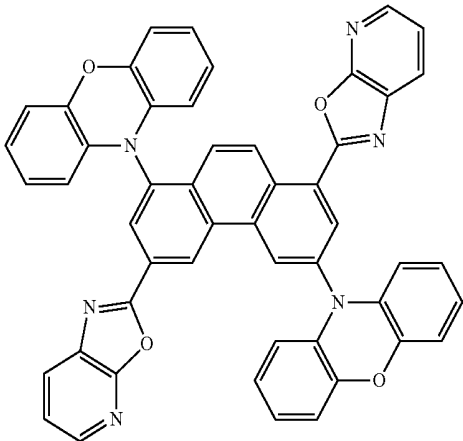


69

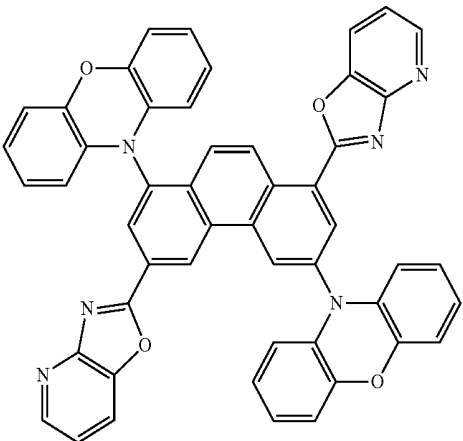


67

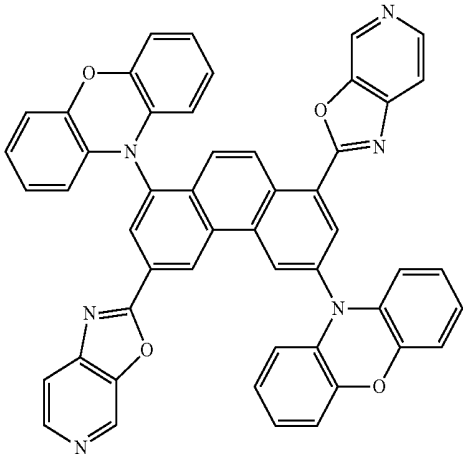

70

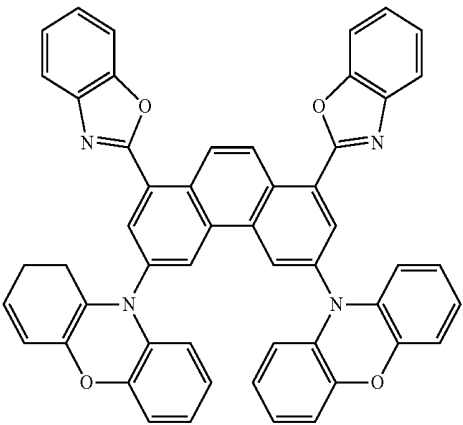


-continued

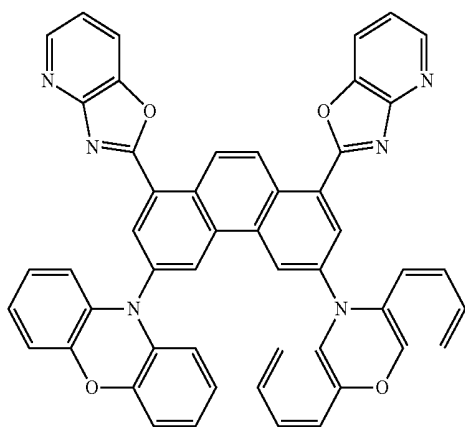


71


-continued

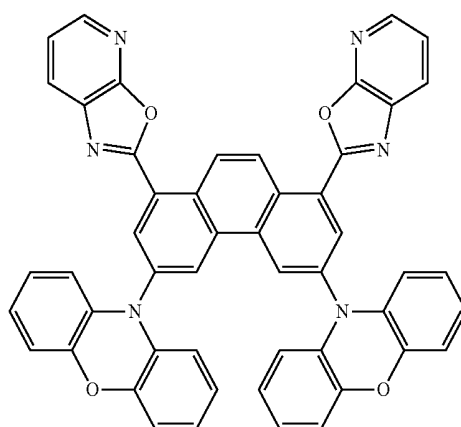


74

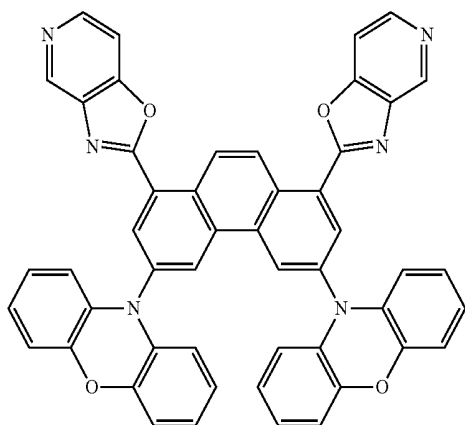


72

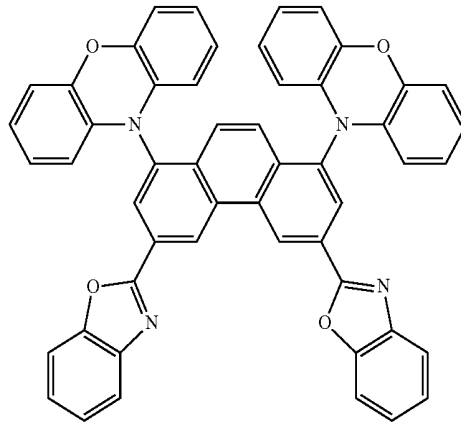

75

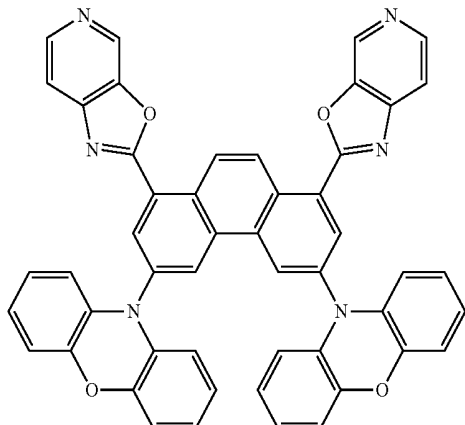


73

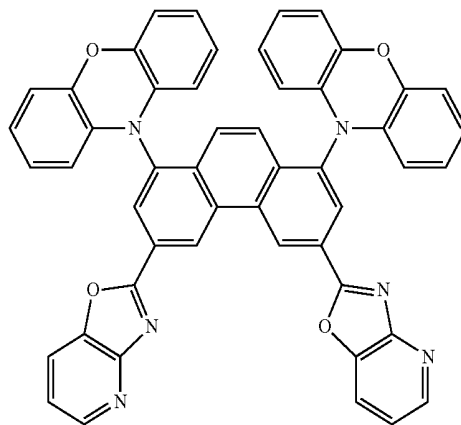


76


-continued

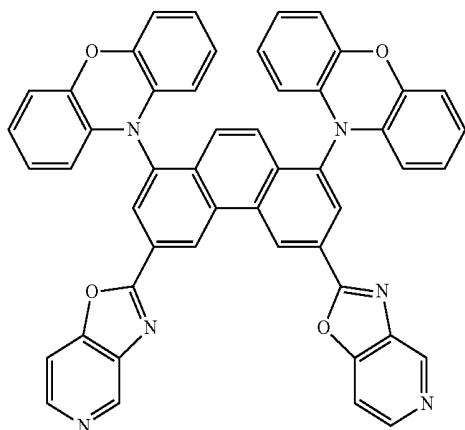


-continued

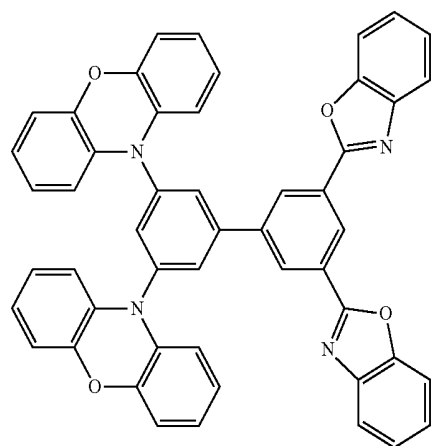


78

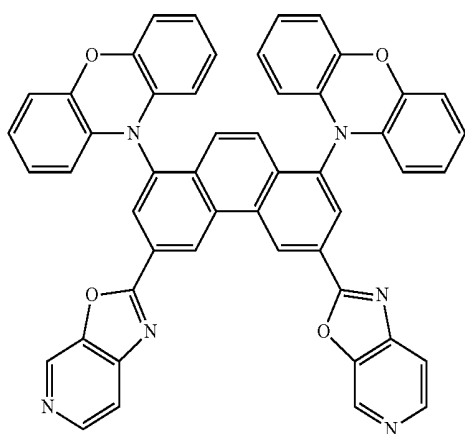


81

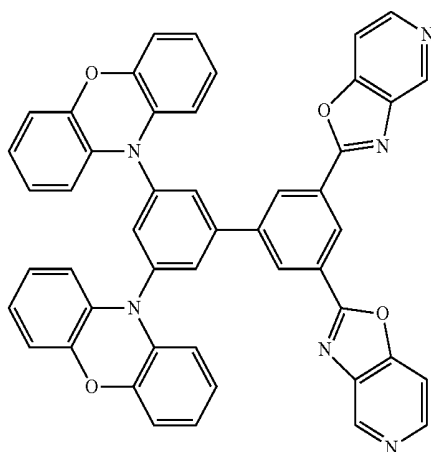


79

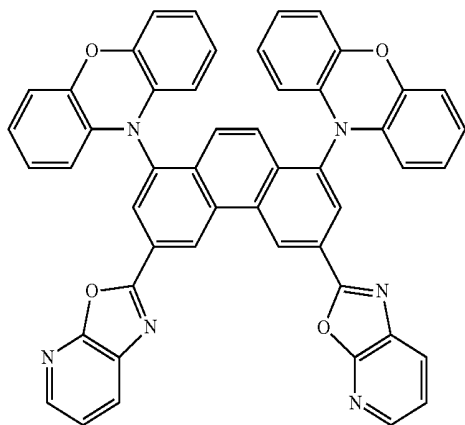

82

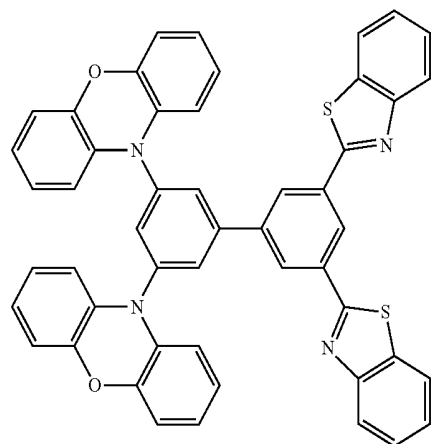


-continued

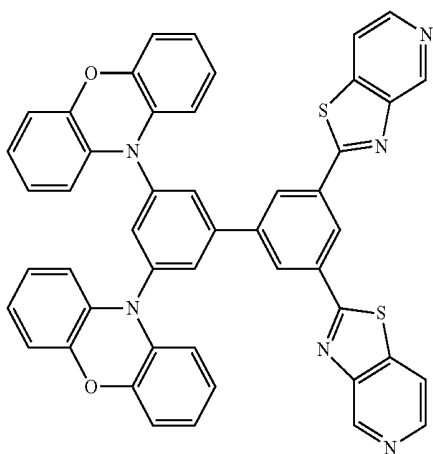


83


-continued

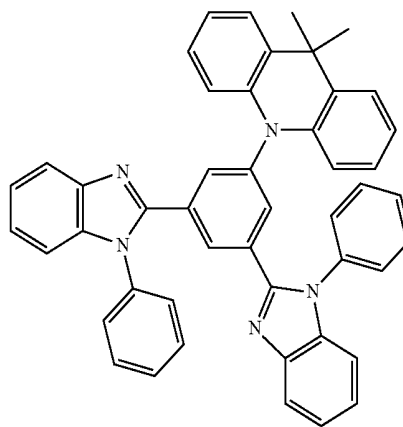


86

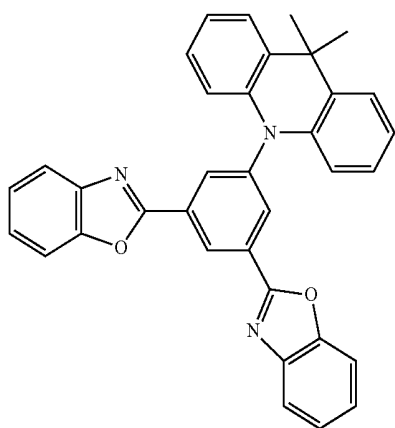


84

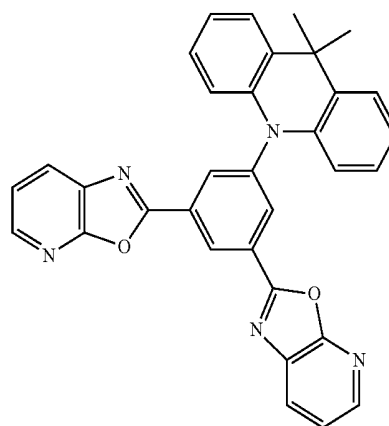

87

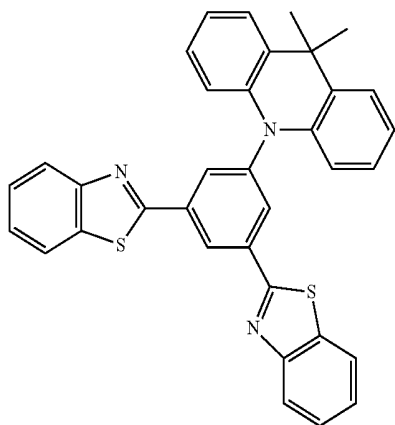


85

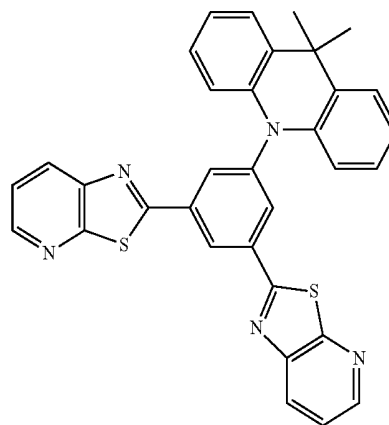


89

-continued

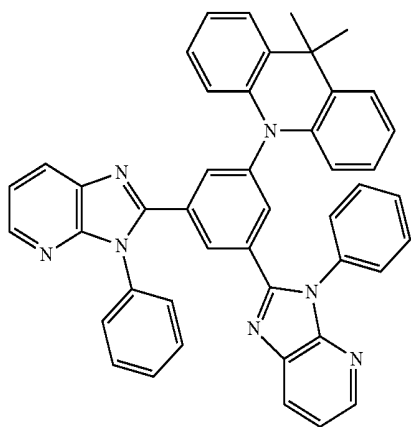


90


-continued

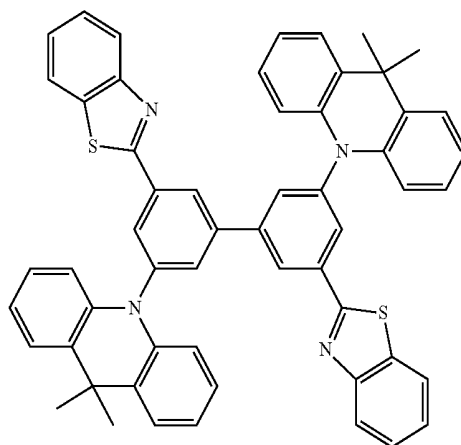


93

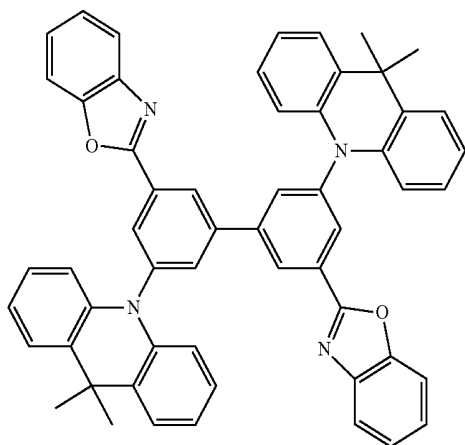


91

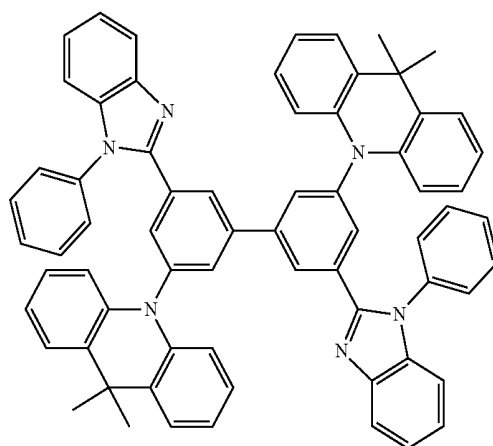

94

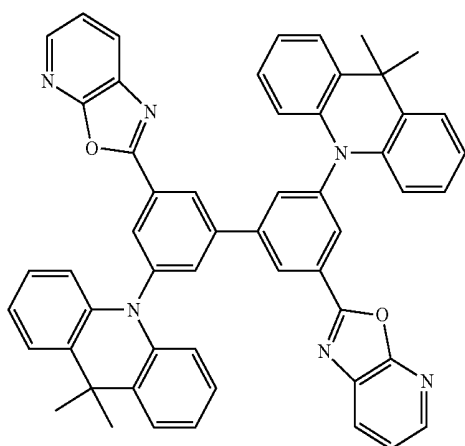


92

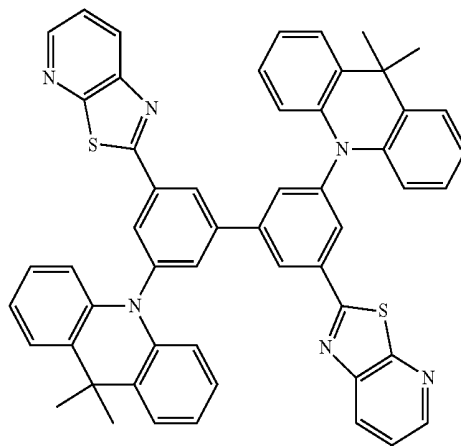

95


-continued

96

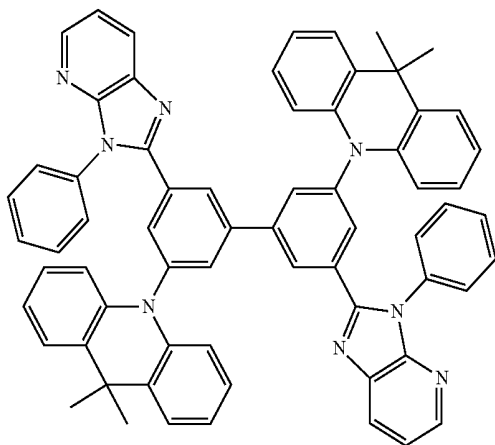


-continued


99

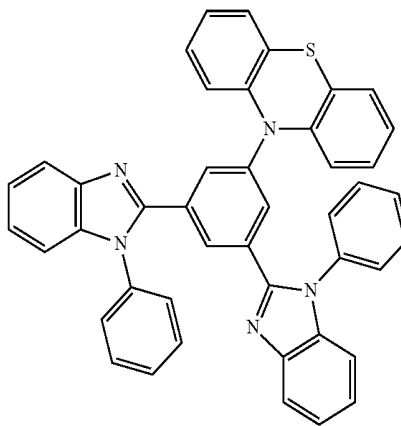


97

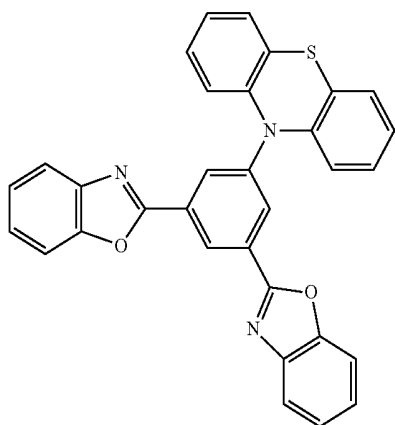


100

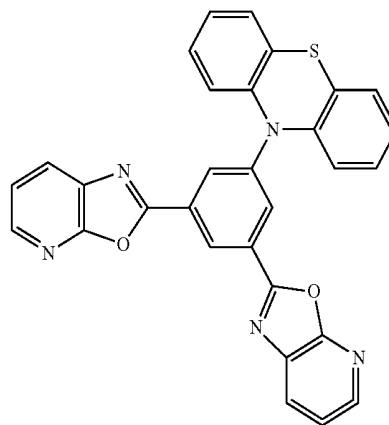


98

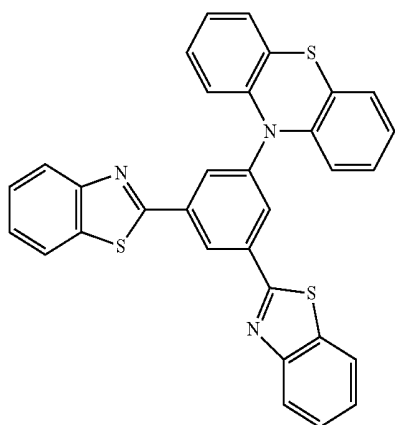

101

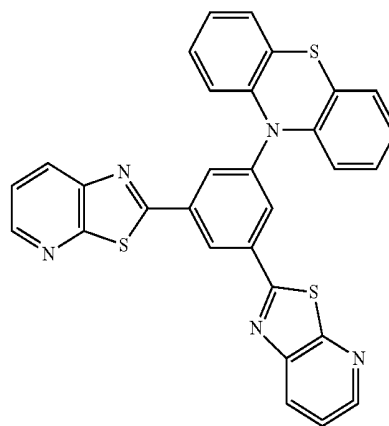


-continued

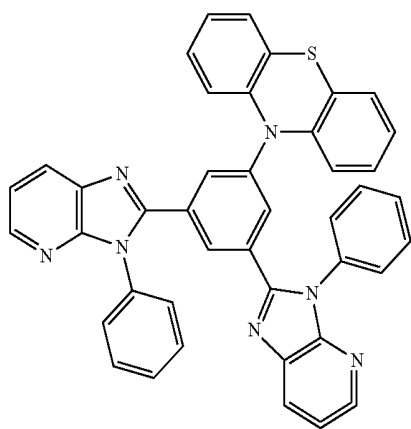


102

-continued

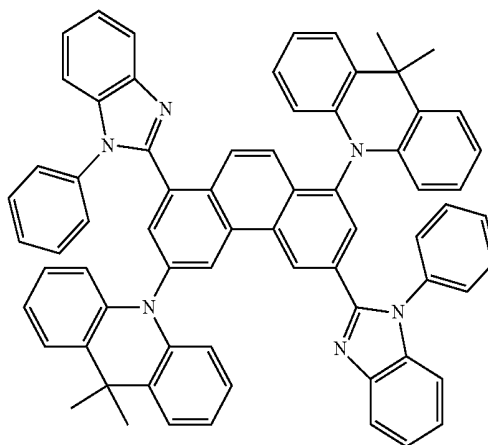


105


103

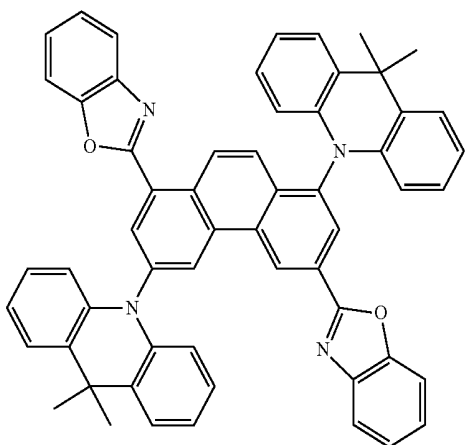


106

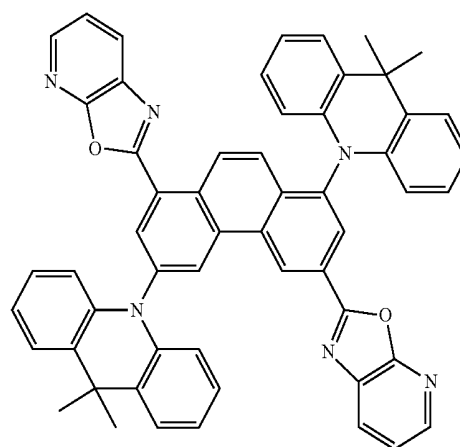


104

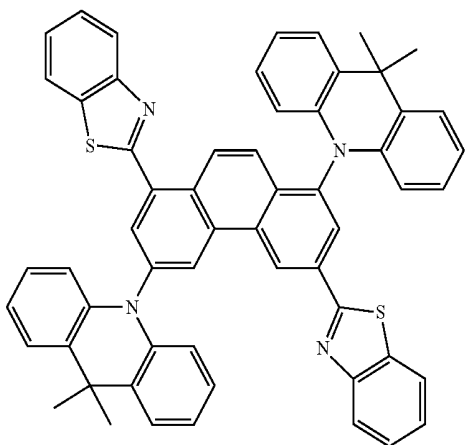

107

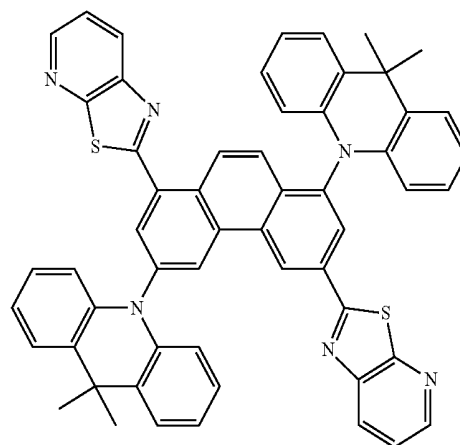


-continued

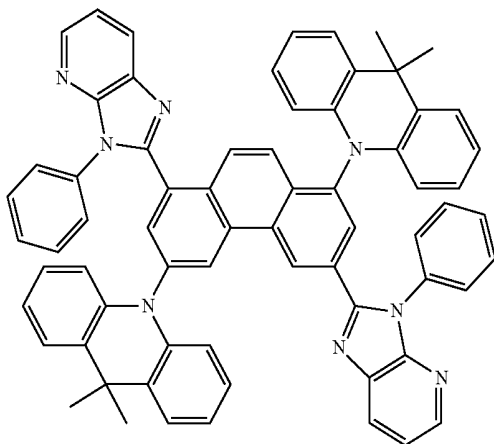


108


-continued

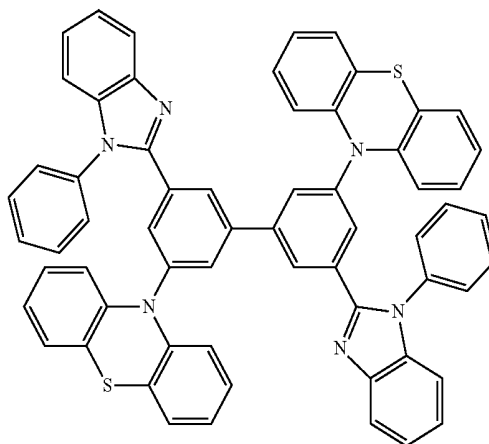


111

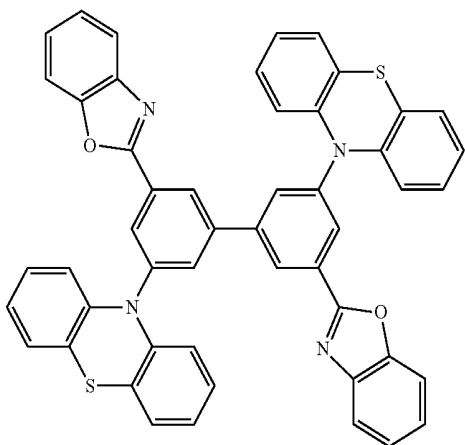


109

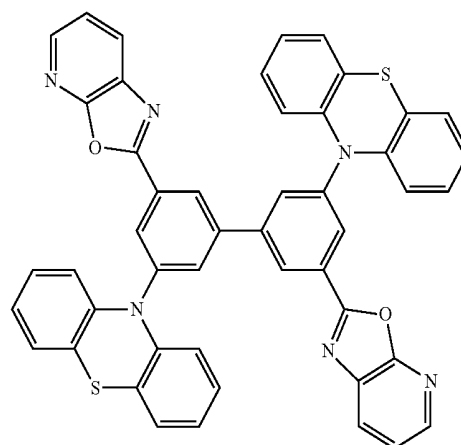

112

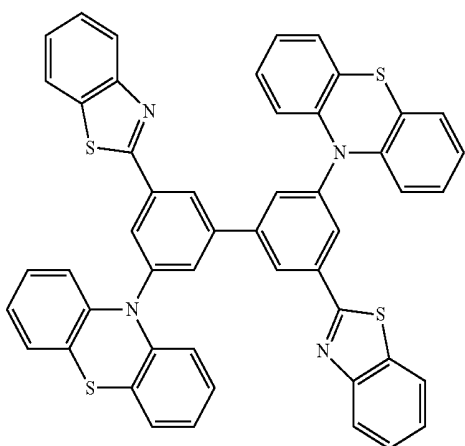


110

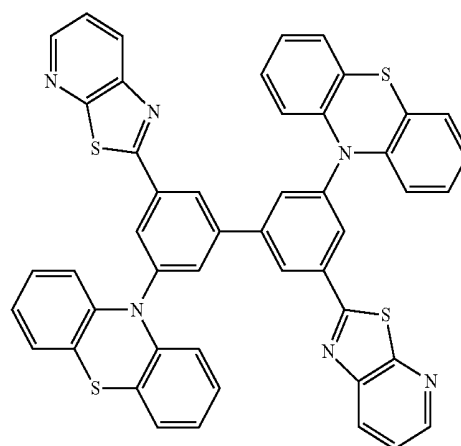


113

-continued

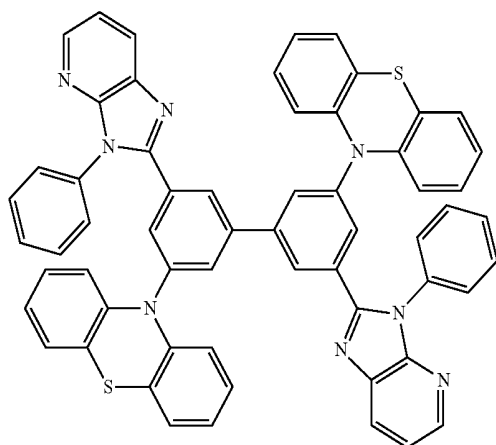


114


-continued

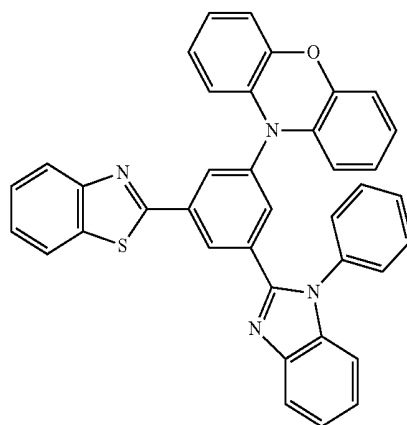


117

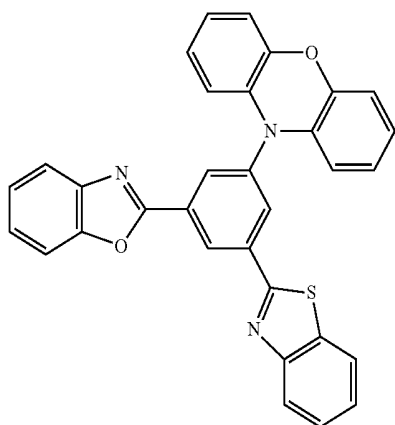


115

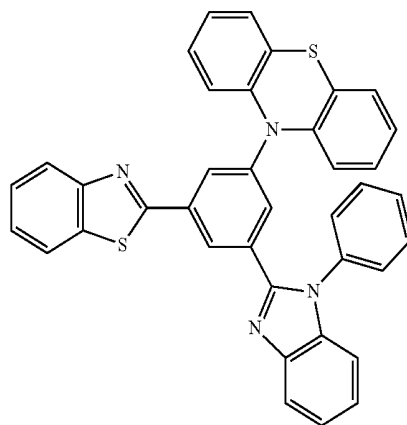

118

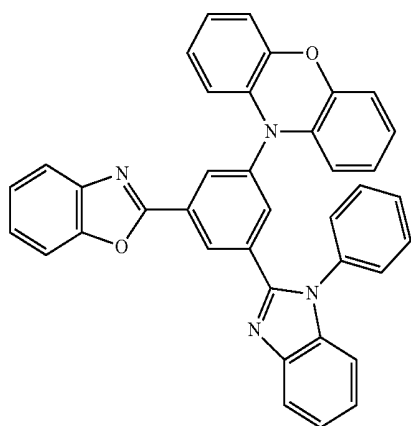


116

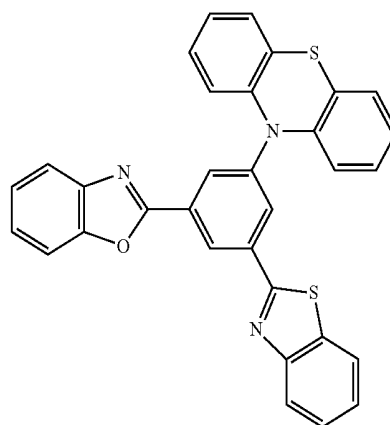


119

-continued

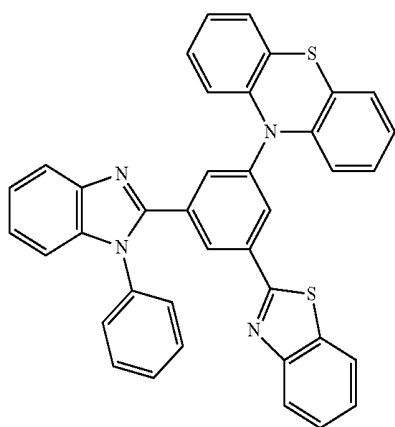


120


-continued

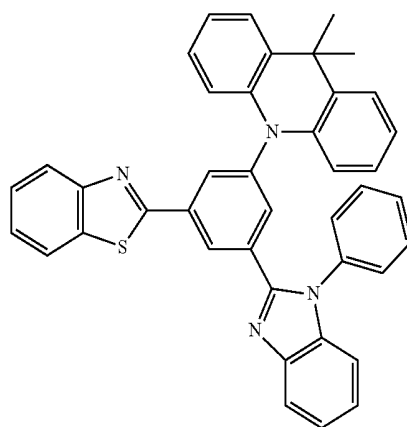


123

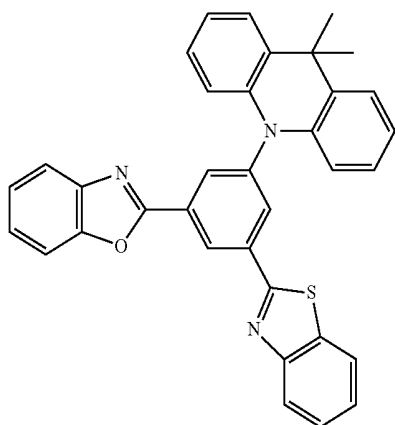


121

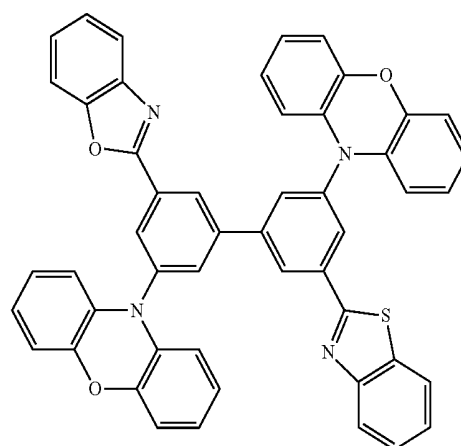

124

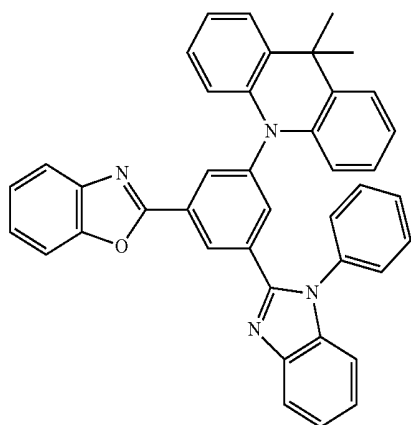


122

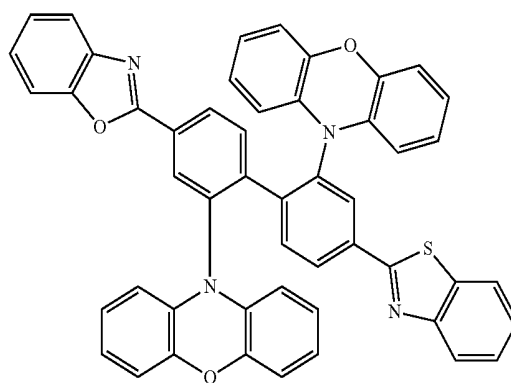

125


-continued

126

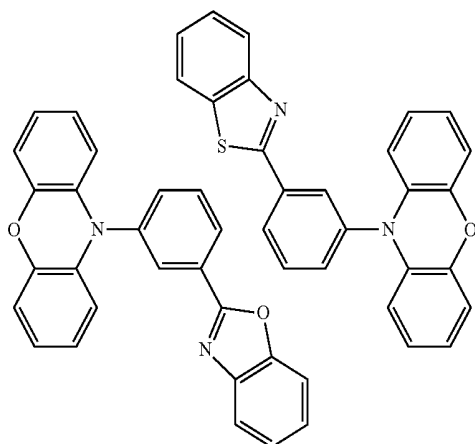


-continued


129

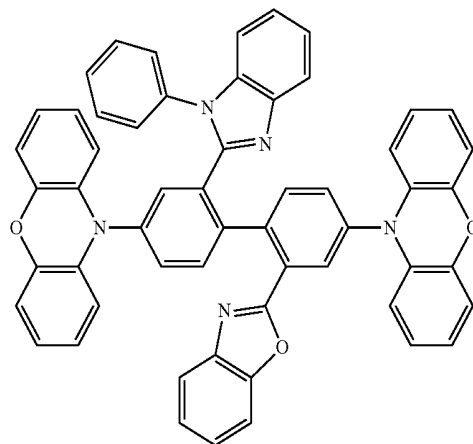


127

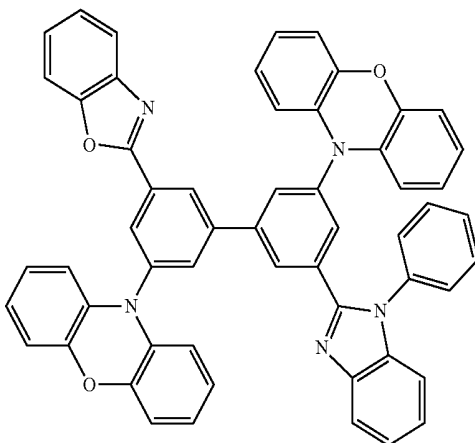


130

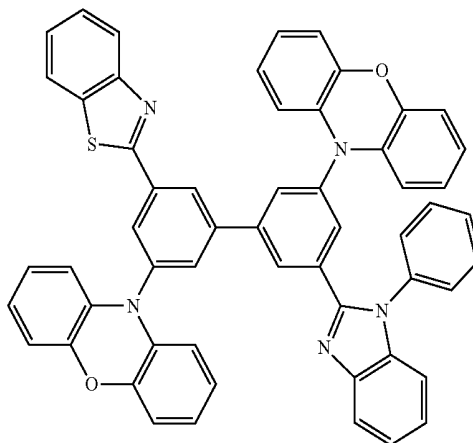


128

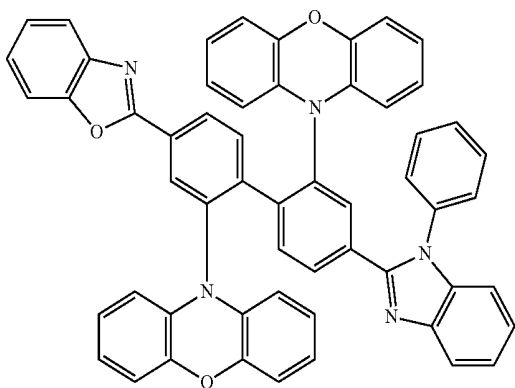

131

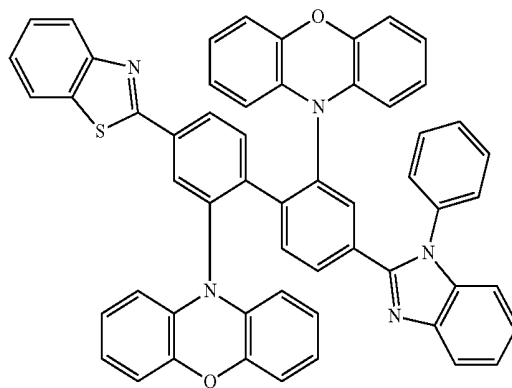


-continued

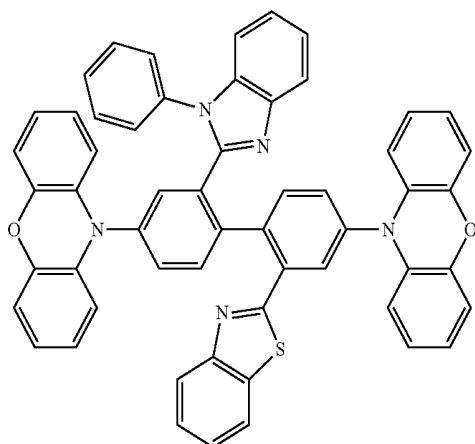


132


-continued

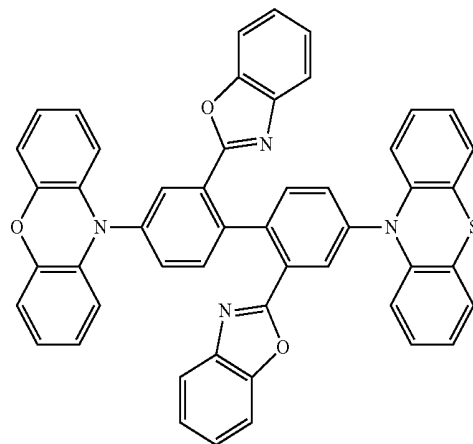


135

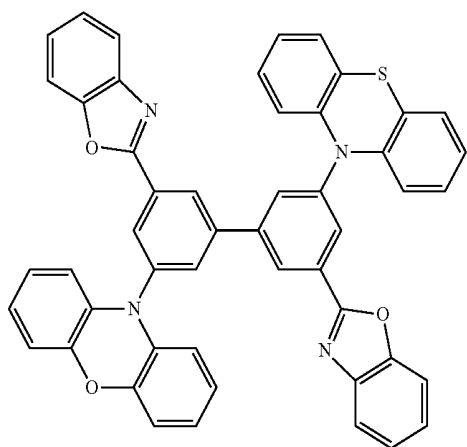


133

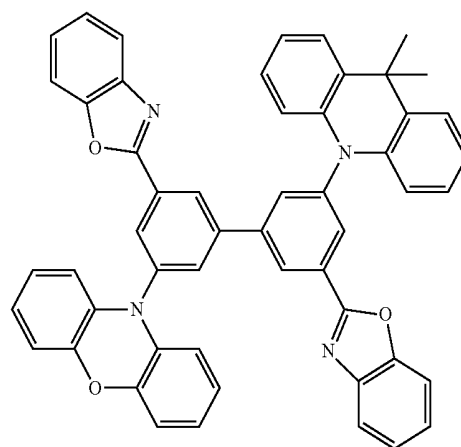

136

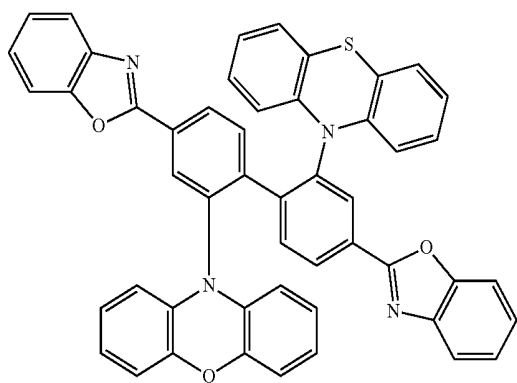


134

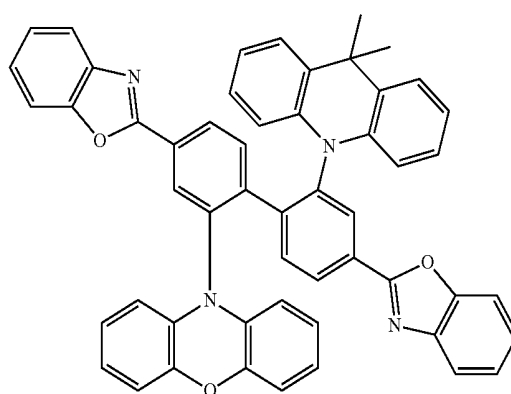

137


-continued

138

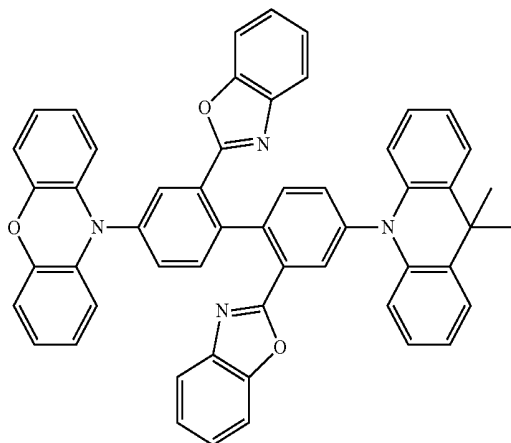


-continued

141

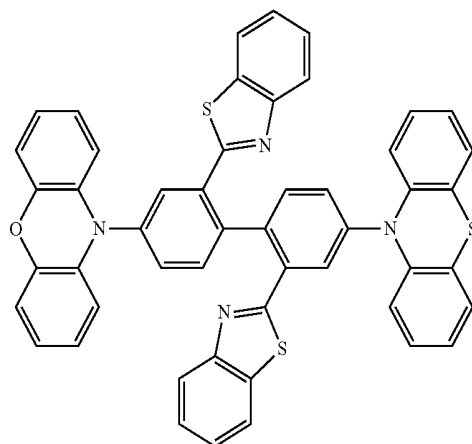


-continued

144

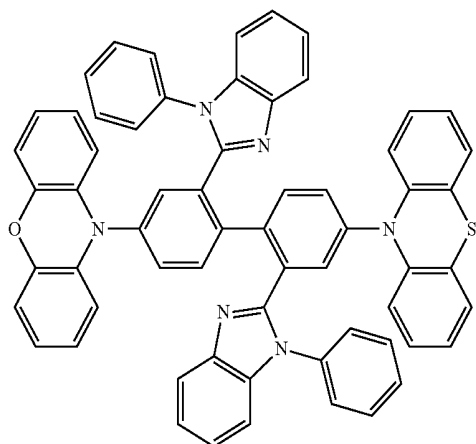


-continued


147

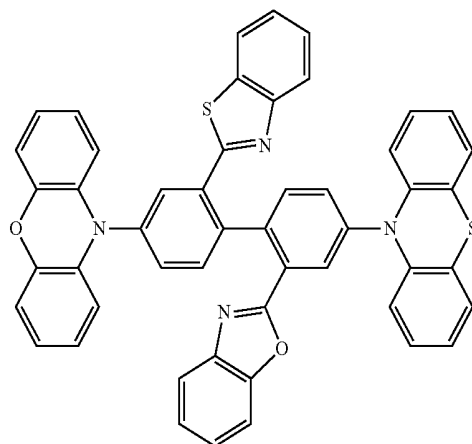


145

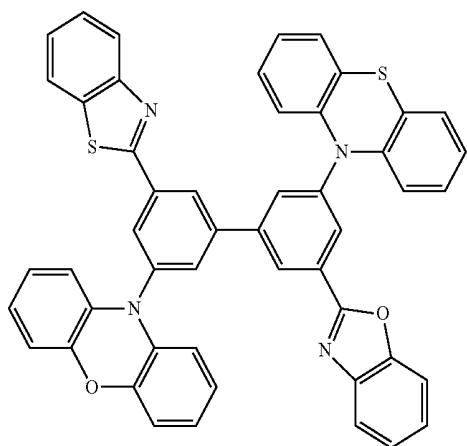


148

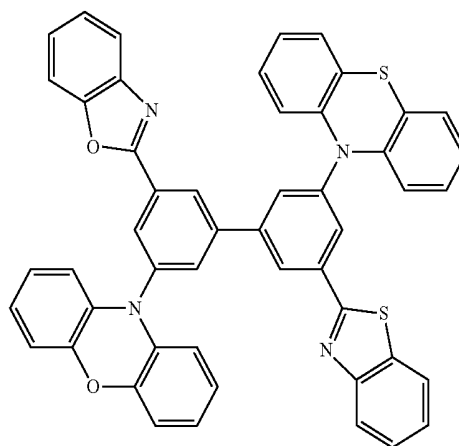


146

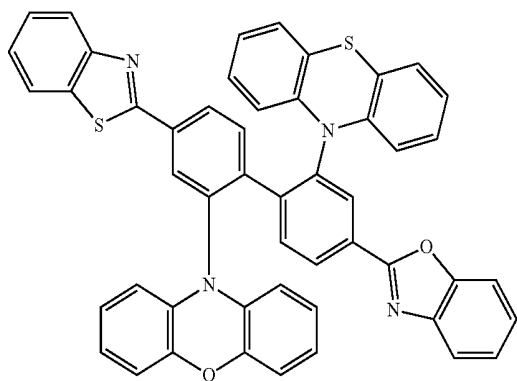

149

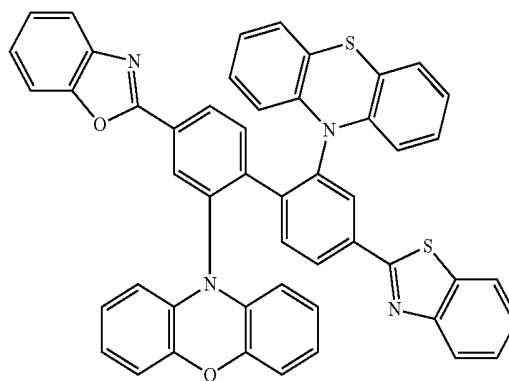


-continued

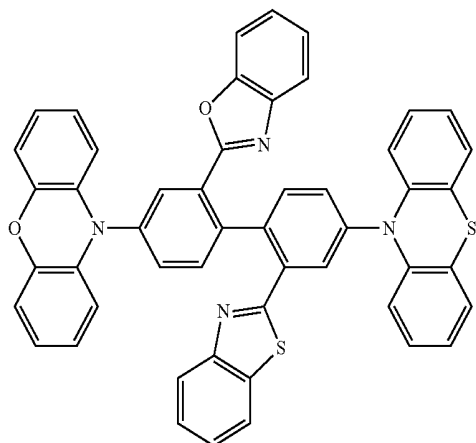


150


-continued

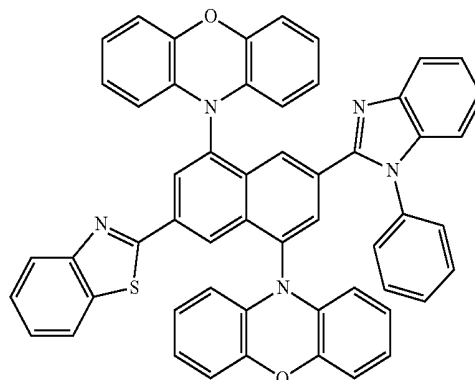


154

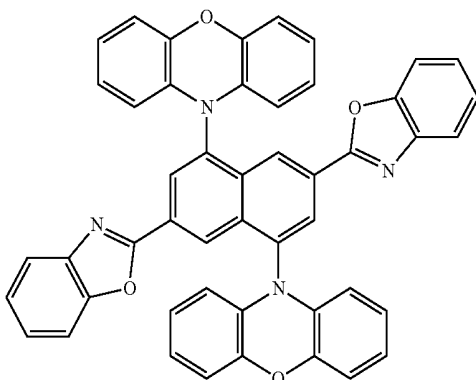


151

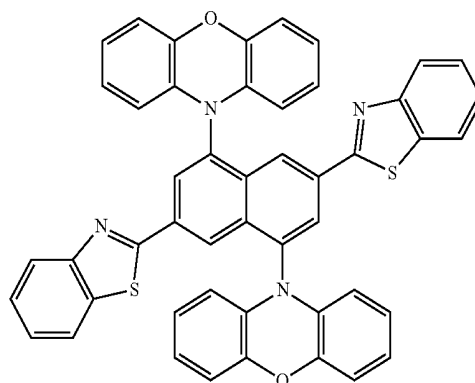


155

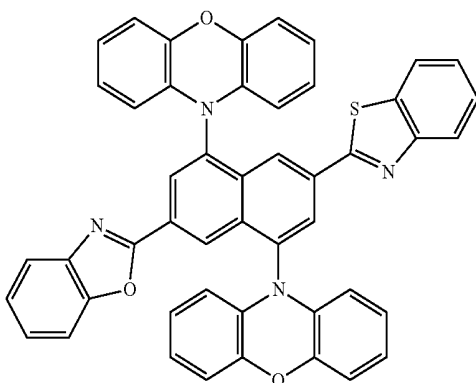


152

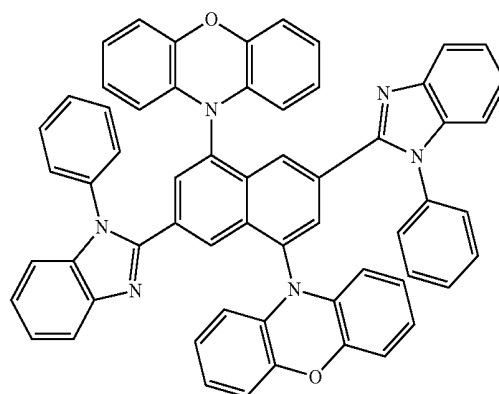

156

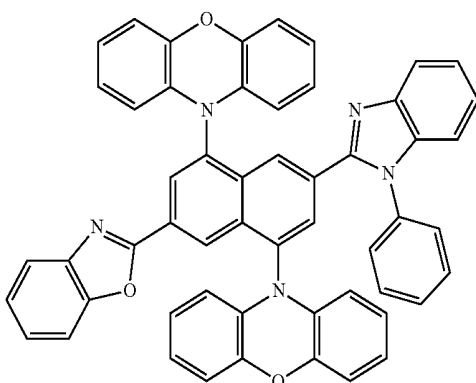


153

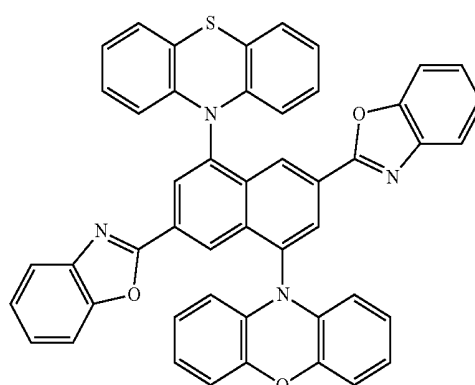


157

-continued

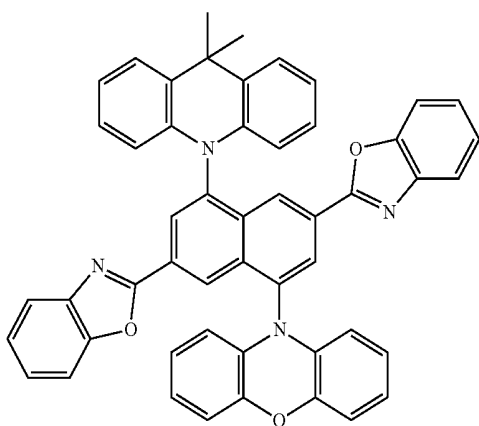


158


-continued

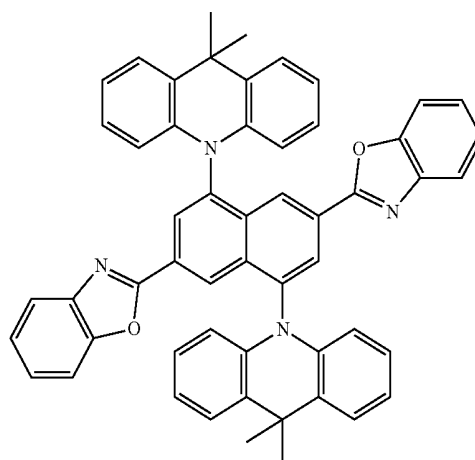


161

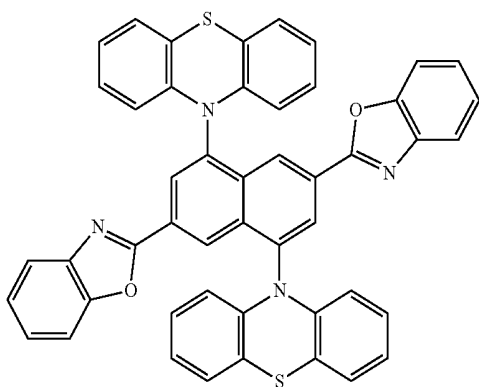


159

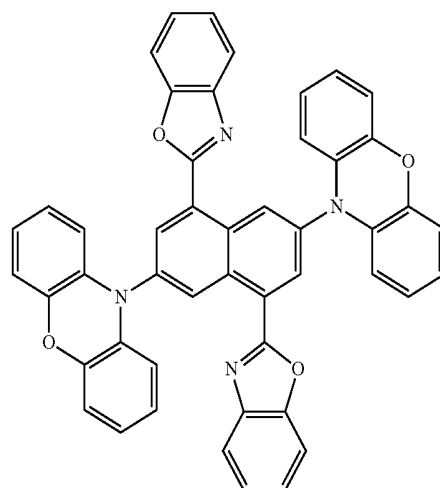

162

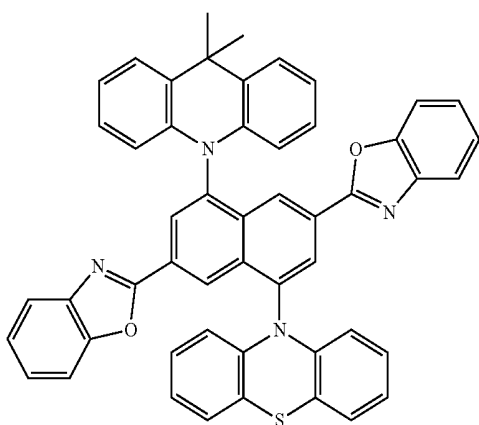


160

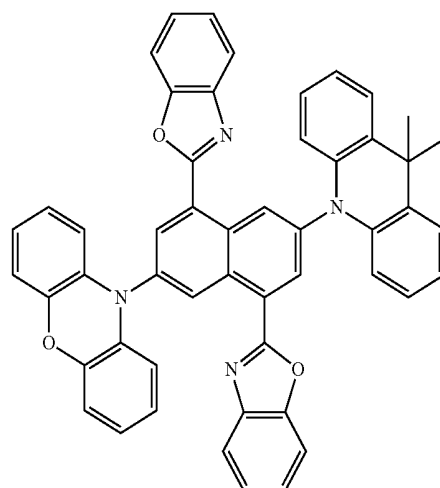


163



-continued

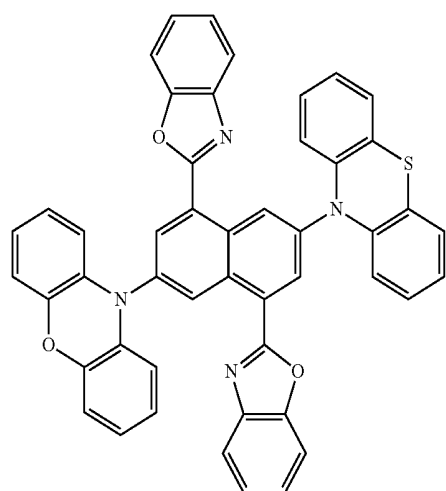



-continued

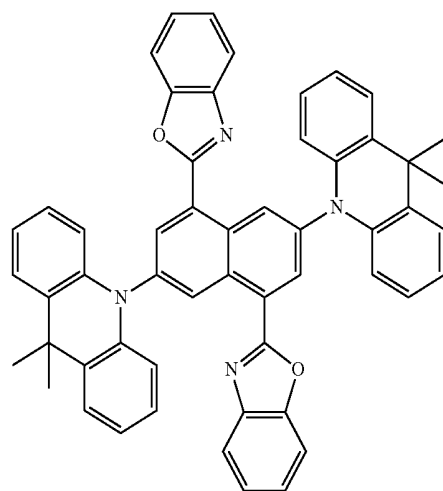


168

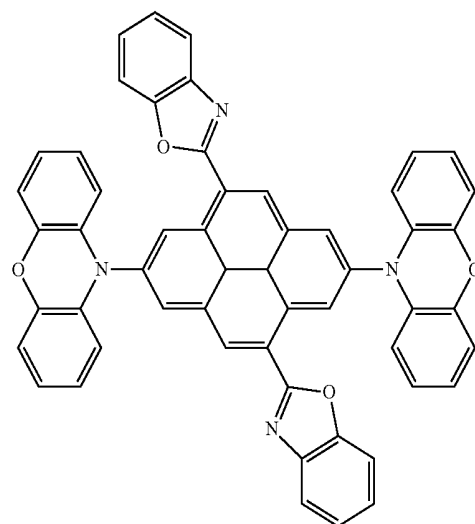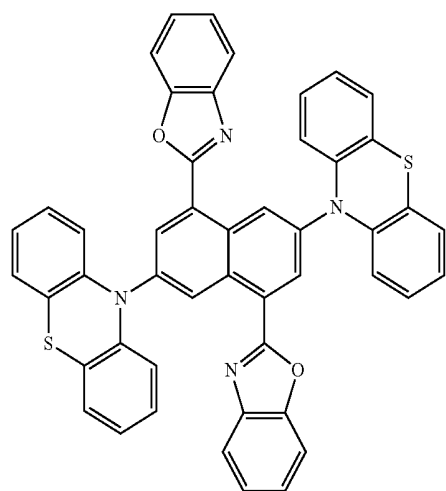

169

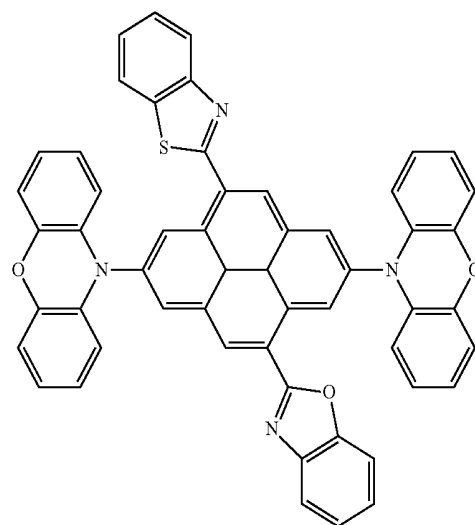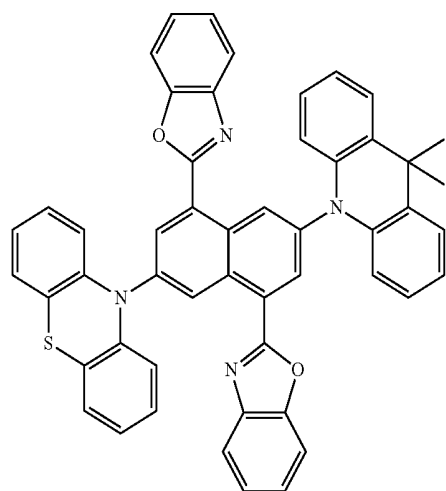


-continued

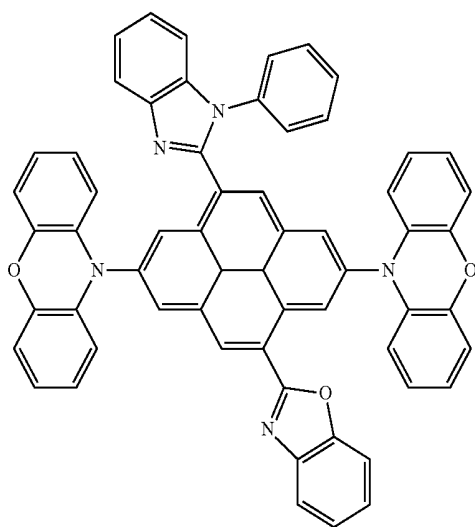


170


-continued

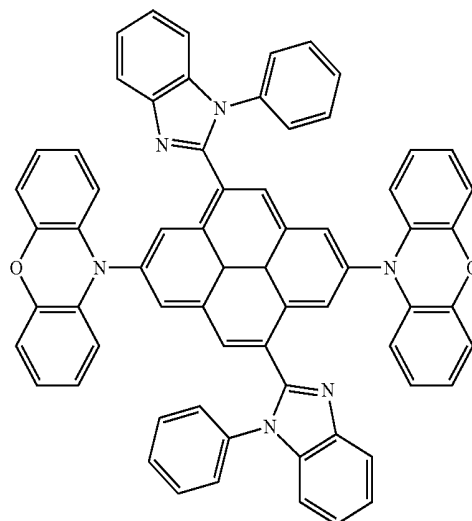


173

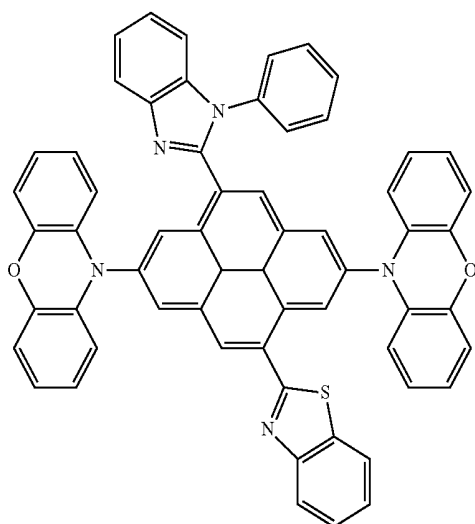

171

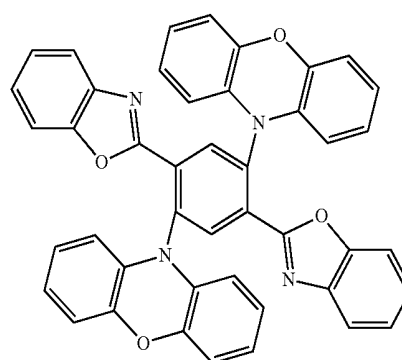

174

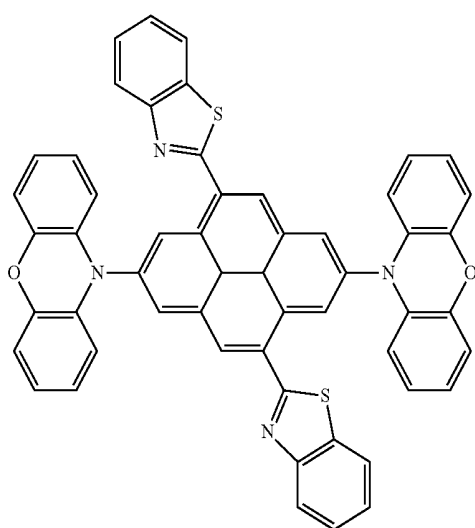

172

[0049] In one embodiment, use of the above-mentioned compounds in an organic optoelectronic device is provided.

[0050] In one embodiment, an organic optoelectronic device is provided, the device comprises an anode, a cathode and one or more organic layers located between the anode and the cathode, and at least one layer of the organic layers comprises one or more compounds in the table above.

[0051] In one embodiment, at least one layer of the organic layers is a luminescent layer, and the luminescent layer comprises the above-mentioned compound.

[0052] In one embodiment, the organic layer further comprises a hole transport layer, a hole injection layer, an electron blocking layer, a hole blocking layer, an electron transport layer, an electron injection layer or a combination thereof.

[0053] In one embodiment, materials for manufacture of the anode comprise the following materials: metals such as copper, gold, silver, iron, chromium, nickel, manganese, palladium, platinum, or a mixture thereof; an alloy of copper, gold, silver, iron, chromium, nickel, manganese, palladium, or platinum; metal oxides such as indium oxide, zinc oxide, indium tin oxide (ITO), indium zinc oxide (IZO), or a mixture thereof; conductive polymers such as polyaniline, polypyrrole, poly(3-methylthiophene), or a mixture thereof.

[0054] In one embodiment, materials for manufacture of the cathode comprise the following materials: metals such as aluminum, magnesium, silver, indium, tin, titanium, cal-

cium, sodium, potassium, lithium, ytterbium, lead or a mixture thereof; multilayer metallic materials such as LiF/Al, Liq(8-hydroxyquinoline)/Al or a mixture thereof.

[0055] In one embodiment, the above-mentioned compounds are present in the luminescent layer as a doped material or a co-doped material or a host material.

DEFINITIONS

[0056] Unless otherwise specified, the technical and scientific terms used in the present application have the same meaning as commonly understood by one of ordinary skill in the art. As to the terms which are defined in the present application, the definitions in the application shall prevail.

[0057] "Alkyl" refers to a fully saturated (no double or triple bonds) hydrocarbyl which may be straight-chain or branched-chain. Alkyl may contain 1-30 carbon atoms, 1-20 carbon atoms, 1-10 carbon atoms, or 1-6 carbon atoms. For example, the numerical range of "1-30" refers to all the integers in the range, including 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29 or 30. For example, the alkyl may be selected from methyl, ethyl, propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, pentyl and hexyl, etc. An alkyl may be substituted or unsubstituted. "Aryl" refers to a carbocyclic ring (all atoms are carbon atoms) having a completely delocalized π -electron system throughout all the rings, which includes monocyclic aryl or polycyclic aryl. The polycyclic aryl is a system containing two or more aromatic rings such as benzene ring, the two or more aromatic rings may be linked to each other by a single bond or fused to each other by a common bond. The number of carbon atoms in the aryl group is variable. For example, the aryl group may contain 6-30 carbon atoms. For example, the numerical range of "6-30" refers to all integers in the range, including 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29 or 30. Examples of the aryl group include, but are not limited to, phenyl, biphenyl, naphthyl, anthryl, phenanthryl or pyrenyl. The aryl group may be substituted or unsubstituted. "Heteroaryl" refers to a monocyclic or polycyclic aromatic ring system containing one or more heteroatoms, in which the heteroatom is an element other than carbon, including but not limited to, nitrogen, oxygen and sulfur. The number of carbon atoms in the heteroaryl ring can vary. For example, the heteroaryl group may contain 1-20 carbon atoms in the ring, the numerical range such as "1-20" refers to all integers in the range, including 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 or 20. For another example, the heteroaryl group may contain 1-30 cyclic backbone atoms in the ring, the numerical range such as "1-30" refers to all integers in the range, including 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29 or 30. Moreover, the term "Heteroaryl" comprises fused ring system, in which two rings (e.g., at least one aryl ring and at least one heteroaryl ring or at least two heteroaryl rings) share at least one chemical bond. Examples of heteroaryl rings include, but are not limited to, furan, furazan, thiophene, benzothiophene, phthalazine, pyrrole, oxazole, benzoxazole, 1,2,3-oxadiazole, 1,2,4-oxadiazole, thiazole, 1,2,3-thiadiazole, 1,2,4-thiadiazole, benzothiazole, imidazole, benzimidazole, indole, indazole, pyrazole, benzopyrazole, isoxazole, benzisoxazole, isothiazole, triazole, benzotriazole, thiadiazole, tetrazole, pyridine, pyridazine, pyrimidine, pyrazine, purine, pteridine, quinoline, isoquinoline, qui-

nazoline, quinoxaline, cinnoline and triazine. A heteroaryl group may be substituted or unsubstituted.

Organic Optoelectronic Device

[0058] The organic optoelectronic device in the present application comprises an organic electroluminescent diode, an organic solar cell, an organic photoelectric sensor, an organic memory device and the like. The organic electroluminescent diode will be explained below.

[0059] The organic electroluminescent diode comprises an anode, a cathode, and one or more organic layers located between the anode and the cathode. At least one layer of the organic layers is a luminescent layer, and the luminescent layer comprises the compounds of the present application. The organic electroluminescent diode further comprises a hole transport layer (HTL), a hole injection layer (HIL), an electron blocking layer (EBL), a hole blocking layer (HBL), an electron transport layer (ETL), an electron injection layer (EIL), or a combination thereof, and at least one layer of these layers comprises the organic compounds described in the present application. The compounds are present in the luminescent layer as a doped material, a co-doped material or a host material.

[0060] FIGS. 1 to 5 are structure schematic drawings of the organic electroluminescent diode comprising the compounds of the present application, wherein:

- [0061] 100, substrate;
- [0062] 110, anode;
- [0063] 120, cathode;
- [0064] 130, luminescent layer;
- [0065] 140, hole transport layer;
- [0066] 150, electron transport layer;
- [0067] 160, hole injection layer;
- [0068] 170, electron injection layer;
- [0069] 180, electron blocking layer;
- [0070] 190, hole blocking layer.

[0071] According to FIGS. 1 to 5, the structure of the organic electroluminescent diode comprises an anode layer 110 and a cathode layer 120 on the substrate layer 100. At least a luminescent layer 130 is comprised between the anode layer 110 and the cathode layer 120.

[0072] According to FIG. 1, the organic electroluminescent diode only comprises a luminescent layer 130 between the anode layer 110 and the cathode layer 120. Electrons and holes excite the luminescent layer to emit light after the luminescent layer is combined.

[0073] According to FIG. 2, the organic electroluminescent diode comprises a hole transport layer (HTL) 140 and a luminescent layer 130 between the anode layer 110 and the cathode layer 120. The hole transport layer mainly plays a role of transferring the holes to the luminescent layer.

[0074] According to FIG. 3, the organic electroluminescent diode comprises a hole transport layer (HTL) 140, a luminescent layer 130 and an electron transport layer (ETL) 150 between the anode layer 110 and the cathode layer 120. The electron transport layer mainly plays a role of transferring the electrons to the luminescent layer.

[0075] According to FIG. 4, the organic electroluminescent diode comprises a hole injection layer (HIL) 160, a hole transport layer (HTL) 140, a luminescent layer 130, an electron transport layer (ETL) 150 and an electron injection layer (EIL) 170 between the anode layer 110 and the cathode layer 120. The hole injection layer mainly improves the ability to transferring the holes to the organic layer from the

anode, and the electron injection layer mainly improves the ability to transferring the electrons to the organic layer from the cathode, so as to reduce the driving voltage of the diode.

[0076] According to FIG. 5, the organic electroluminescent diode comprises a hole injection layer (HIL) 160, a hole transport layer (HTL) 140, an electron blocking layer (EBL) 180, a luminescent layer 130, a hole blocking layer (HBL) 190 and an electron transport layer (ETL) 150 between the anode layer 110 and the cathode layer 120.

[0077] The materials of each layer are illustrated by examples below, and thus are not limited to the materials below.

[0078] The anode layer 110 can use electrode materials having a large work function. The materials which can be used as the anode may comprise: metals such as copper, gold, silver, iron, chromium, nickel, manganese, palladium, platinum, or a mixture thereof; an alloy of copper, gold, silver, iron, chromium, nickel, manganese, palladium, or platinum and the like; metal oxides such as indium oxide, zinc oxide, indium tin oxide (ITO), indium zinc oxide (IZO), or a mixture thereof; conductive polymers such as polyaniline, polypyrrole, poly(3-methylthiophene), or a mixture thereof. Preferably, indium tin oxide (ITO) is used in the examples comprising the organic compounds of the present application as the material of the anode layer.

[0079] The cathode layer 120 can use electrode materials having a low work function. The materials which can be used as the cathode may comprise: metals such as aluminum, magnesium, silver, indium, tin, titanium, calcium, sodium, potassium, lithium, ytterbium, lead or a mixture thereof; multilayer metallic materials comprising LiF/Al, Liq(8-hydroxyquinoline)/Al or a mixture thereof. Preferably, magnesium-silver alloy or LiF/Al bilayer material was used in the examples comprising the organic compounds of the present application as the material of the cathode layer.

[0080] The hole injection layer (HIL) 160 can use materials which benefit to increase the hole injection of the interface between the anode the organic layer and have good binding property with ITO anode surface. The materials which can be used as the hole injection layer may include: polymeric porphyrin compounds, such as copper phthalocyanine (CuPc); stellate triphenylamine derivatives containing naphthylenediamine, such as 4,4',4''-tris-N-naphthyl-N-phenylamino-triphenylamine (TNATA); polymer materials in which HOMO energy level matches the work function of ITO, such as poly(3,4-ethylenedioxythiophene); polystyrene sulfonate (PEDOT:PSS); electron-withdrawing nitrogen-containing heterocyclic compounds and the like, such as 2,3,6,7,10,11-hexacyano-1,4,5,8,9,12-hexaazatriphenylene (HATCN).

[0081] The hole transport layer (HTL) 140 and electron blocking layer (EBL) 180 can use materials having a high glass transition temperature and hole mobility. The materials which can be used as the hole transport layer and electron blocking layer comprise: biphenyldiamine derivatives, such as diphenyl naphthyl diamine (NPD); cross-structure diaminebiphenyl derivatives, such as 2,2',7,7'-tetrakis(diphenylamino)-9,9'-spirobifluorene (spiro-TAD); stellate triphenylamine derivatives and the like, such as 4,4',4''-tris(N-carbazolyl)triphenylamine (TCTA).

[0082] The hole blocking layer (HBL) 190 and electron transport layer (ETL) 150 can use materials having a low HOMO level and a high electron mobility. The materials which can be used as the hole blocking layer and electron

transport layer include: quinoline-based metal complexes, such as bis(8-hydroxy-2-methylquinoline)-aluminum diphenolate (BALq), tris(8-hydroxyquinoline) aluminum (Alq) and 8-hydroxyquinolinatolithium; phenanthroline derivatives, such as 4,7-diphenyl-1,10-phenanthroline (Bphen); imidazole derivatives, such as 1,3,5-tris(N-phenyl-benzimidazol-2-yl)benzene (TPBI); triazine derivatives, such as 2,4,6-tricarbazolyl-1,3,5-triazine.

[0083] The manufacture method of the organic electroluminescent diode is as follows: forming an anode on a transparent or opaque smooth substrate, forming an organic layer on the anode, and forming a cathode on the organic layer. The organic layer can be formed using well-known film forming method, such as vapor deposition, sputtering, spin coating, dipping, ion plating, etc.

[0084] Hereinafter, the present application will be explained in detail by the following examples in order to better understand the various aspects and advantages of the present application. However, it should be understood that the following examples are non-limiting and merely used to illustrate certain embodiments of the present application.

Examples

Simulation Calculation of the Compounds

[0085] The simulation calculation of the energy gap between the singlet state and triplet state of the organic material was accomplished by Guassian 09 software (Gaussian Inc.). The specific simulation method of the energy gap ΔE_{st} refers to J. Chem. Theory Comput., 2013, DOI: 10.1021/ct400415r, molecular structure optimization and excitation was accomplished using TD-DFT method "B3LYP" and basis set "6-31 g (d)".

Example 1

[0086] Compound 29 was simulated according to the above simulation scheme.

Example 2

[0087] Compound 30 was simulated according to the above simulation scheme.

Example 3

[0088] Compound 55 was simulated according to the above simulation scheme.

Example 4

[0089] Compound 40 was simulated according to the above simulation scheme.

Example 5

[0090] Compound 174 was simulated according to the above simulation scheme.

Example 6

[0091] Compound 1 was simulated according to the above simulation scheme.

Example 7

[0092] Compound 65 was simulated according to the above simulation scheme.

Example 8

[0093] Compound 70 was simulated according to the above simulation scheme.

Example 9

[0094] Compound 33 was simulated according to the above simulation scheme.

Example 10

[0095] Compound 80 was simulated according to the above simulation scheme.

Example 11

[0096] Compound 168 was simulated according to the above simulation scheme.

Example 12

[0097] Compound 151 was simulated according to the above simulation scheme.

Example 13

[0098] Compound 84 was simulated according to the above simulation scheme.

Example 14

[0099] Compound 91 was simulated according to the above simulation scheme.

Example 15

[0100] Compound 103 was simulated according to the above simulation scheme.

[0101] The simulation calculation results are shown in Table 1.

TABLE 1





	Compound	S1(eV)	T1(eV)	ΔE_{st} (eV)
Example 1	29	2.55	2.53	0.02
Example 2	30	2.51	2.45	0.06
Example 3	55	2.80	2.66	0.14
Example 4	40	2.66	2.61	0.05
Example 5	174	2.02	2.00	0.02
Example 6	1	2.55	2.52	0.03
Example 7	65	2.29	2.26	0.03
Example 8	70	2.34	2.28	0.06
Example 9	33	2.46	2.44	0.02
Example 10	80	2.91	2.61	0.30
Example 11	168	2.07	1.85	0.22
Example 12	151	2.07	2.06	0.03
Example 13	84	2.77	2.62	0.15
Example 14	91	2.90	2.69	0.21
Example 15	103	2.56	2.26	0.30


[0102] According to the results shown in Table 1, energy gap ΔE_{st} between the singlet state and triplet state in Examples 1-15 are small. This suggests that the compounds in Table 1 can achieve efficient reverse intersystem crossing and have TADF performance.

Preparation of the Compounds

Example 16: Synthesis of Compound 29

[0103]

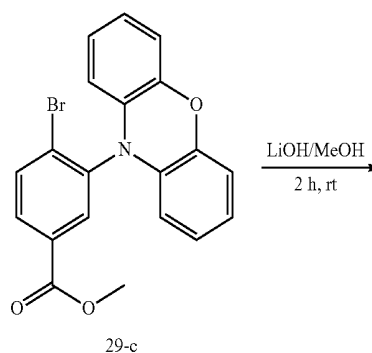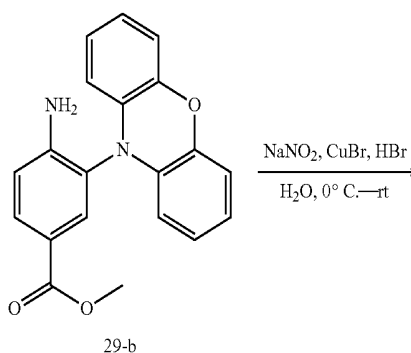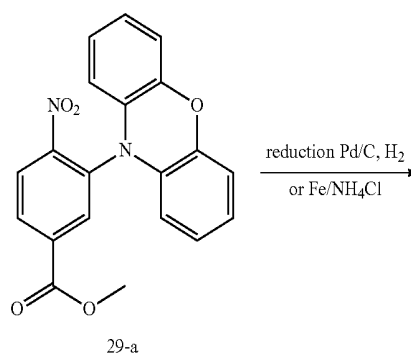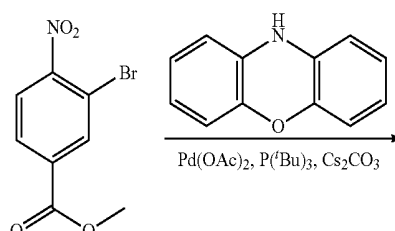

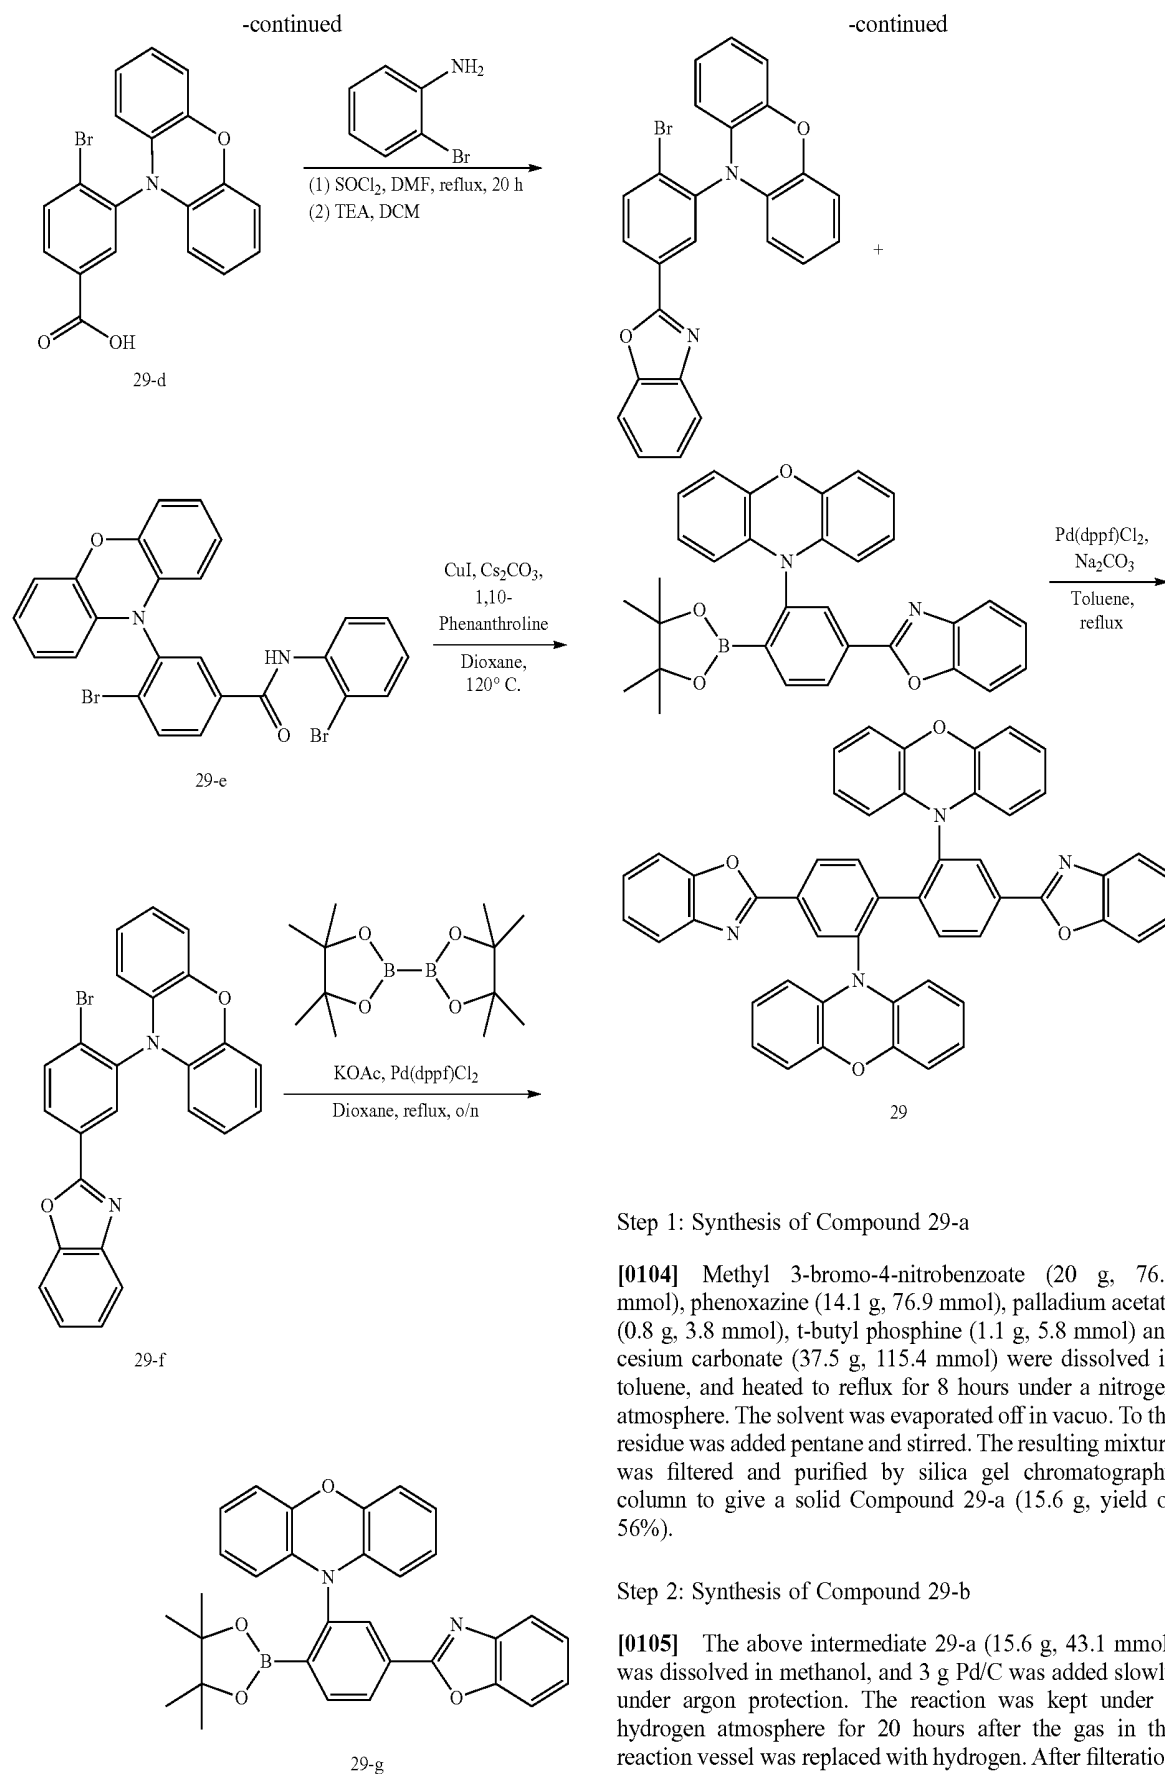

Step 1: Synthesis of Compound 29-a

[0104] Methyl 3-bromo-4-nitrobenzoate (20 g, 76.9 mmol), phenoxazine (14.1 g, 76.9 mmol), palladium acetate (0.8 g, 3.8 mmol), t-butyl phosphine (1.1 g, 5.8 mmol) and cesium carbonate (37.5 g, 115.4 mmol) were dissolved in toluene, and heated to reflux for 8 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 29-a (15.6 g, yield of 56%).

Step 2: Synthesis of Compound 29-b

[0105] The above intermediate 29-a (15.6 g, 43.1 mmol) was dissolved in methanol, and 3 g Pd/C was added slowly under argon protection. The reaction was kept under a hydrogen atmosphere for 20 hours after the gas in the reaction vessel was replaced with hydrogen. After filtration and evaporation of the solvent, an intermediate 29-b (13.3 g, yield of 93%) was obtained.

Step 3: Synthesis of Compound 29-c

[0106] Sodium nitrite (7.5 g, 108.7 mmol) was dissolved in 10 mL of water, and the solution was slowly added dropwise into the mixture of the intermediate 29-b (12.0 g, 36.1 mmol) and 11 mL of 48% hydrobromic acid (approximately 91.0 mmol) under an ice bath (0° C.), and stirred for 1 hour. To the above mixture was added 10 mL of cuprous bromide (5.4 g, 37.9 mmol) solution in hydrobromic acid under an ice bath. The mixture was reacted for 1 hour under an ice bath, and then heated to 60° C. for 2 hours. After being cooled, the resulting mixture was extracted with 50 mL of ethyl acetate. The organic layer was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation of the solvent, an intermediate 29-c (10.3 g, yield of 72%) was obtained.

Step 4: Synthesis of Compound 29-d

[0107] 29-c (10.3 g, 26.0 mmol) was dissolved in 30 mL of methanol, to this solution was added LiOH (3.1 g, 130.0 mmol), and stirred for 2 hours at room temperature. The methanol was evaporated, and the resulting mixture was extracted with 50 mL of ethyl acetate and 20 mL of water. The organic phase was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation of the solvent, an intermediate 29-d (8.4 g, yield of 85%) was obtained.

Step 5: Synthesis of Compound 29-e

[0108] The intermediate 29-d (8.4 g, 22.1 mmol) was dissolved in 100 mL of thionyl chloride. A few drops of DMF was added dropwise as catalyst, and heated to reflux for 20 hours. After the residual thionyl chloride was evaporated off in vacuo, the resulting mixture was dissolved in 300 mL of dichloromethane. 2-bromoaniline (7.6 g, 44.2 mmol) was added when being cooled in an ice bath, and 15 mL of triethylamine was slowly added dropwise. After completion of the addition, the mixture was stirred overnight at room temperature. The reaction suspension was filtered, and washed with dichloromethane twice to give the intermediate 29-e (10.6 g, yield of 73%).

Step 6: Synthesis of Compound 29-f

[0109] The above Compound 29-e (8.7 g, 16.1 mmol), cuprous iodide (0.3 g, 1.7 mmol), cesium carbonate (10.5 g, 32.2 mmol), and 1,10-phenanthroline (0.7 g, 3.3 mmol) were dissolved in 200 mL of dioxane under an argon stream protection, and reacted overnight at a constant temperature of 120° C. The resulting mixture was diluted with 300 mL of ethyl acetate and 500 mL of water after being cooled to room temperature. The suspension was filtered and washed with water and ethanol to give the intermediate 29-f (5.7 g, yield of 78%).

Step 7: Synthesis of Compound 29-g

[0110] Palladium catalyst Pd(dppf)Cl₂ (0.2 g, 0.3 mmol), potassium acetate (0.3 g, 3.0 mmol), bis(pinacolato)diboron (2.3 g, 8.9 mmol) were mixed into a reaction flask under a nitrogen stream. The intermediate 29-f (2.5 g, 5.5 mmol) solution dissolved in 150 mL of dioxane was added to the reaction flask and refluxed for 10 hours. After being cooled, the resulting mixture was extracted with toluene, washed with water for several times, and dried over anhydrous magnesium sulfate. After filtration and evaporation of the solvent, purification was carried out by silica gel chromatography column to give the intermediate 29-g (1.4 g, yield of 49%).


Step 8: Synthesis of Compound 29

[0111] The intermediate 29-g (1.4 g, 2.7 mmol), intermediate 29-f (1.2 g, 2.7 mmol), Pd(dppf)Cl₂ (0.04 g, 0.05 mmol), and 10 mL of 2M Na₂CO₃ aqueous solution were mixed into 100 mL of toluene under an argon stream, and heated to reflux for 10 hours. The resulting mixture was extracted with dichloromethane after being cooled. The organic phase was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation, purification was carried out by silica gel chromatography column to give a solid Compound 29 (0.7 g, yield of 33%).


[0112] ESI-MS(m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 751.2[M+H]⁺.

Example 17: Synthesis of Compound 30

[0113]

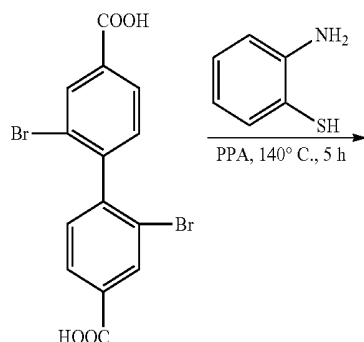


-continued

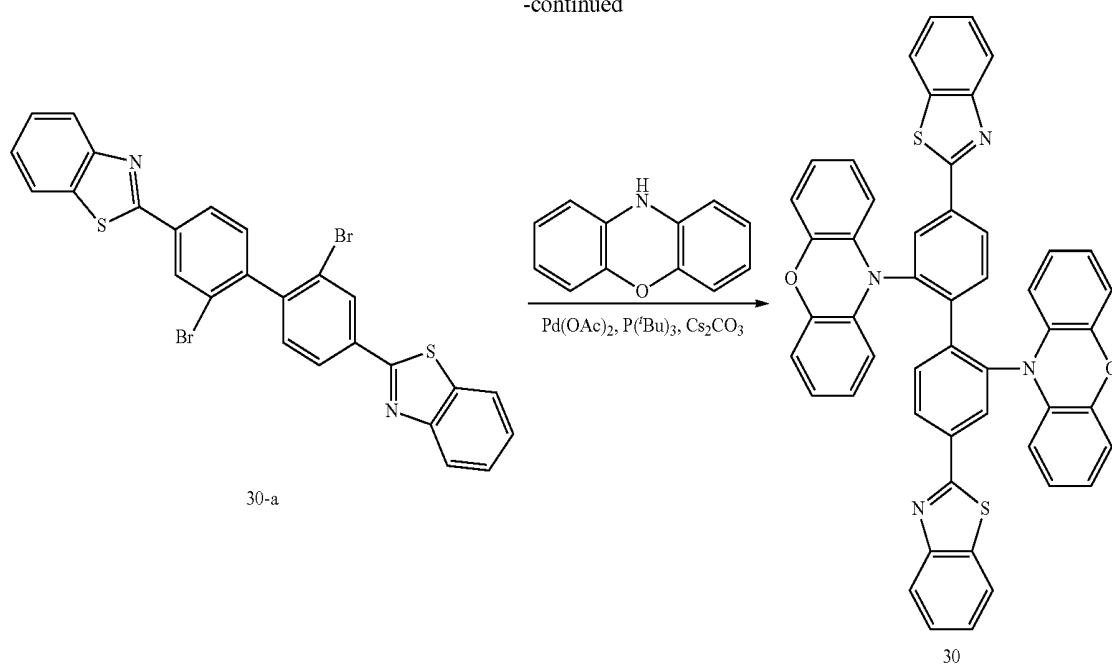

[0114] 2,2'-dibromo-4,4'-dicarboxybiphenyl (20 g, 50.0 mmol), 2-aminothiophenol (12.5 g, 100.0 mmol) and 100.0 g of polyphosphoric acid (PPA) were heated at 140° C. for 5 h with stirring, and then naturally cooled to room temperature. 100.0 ml of deionized water was slowly added for full hydrolyzation. After filtration, the filter residue was fully dissolved with dichloromethane and filtered. Then the filtrate was pumped to remove the solvent under vacuum and purified using silica gel chromatography column to give the intermediate 30-a (12.7 g, yield of 44%).


Example 18: Synthesis of Compound 55



[0116]

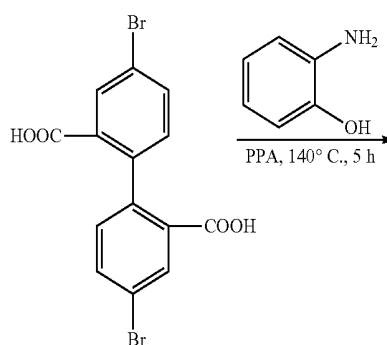

Step 2: Synthesis of Compound 30

[0115] The above intermediate 30-a (12.7 g, 22.0 mmol), phenoxazine (8.1 g, 44.0 mmol), palladium acetate (0.5 g, 2.2 mmol), t-butyl phosphine (0.7 g, 3.3 mmol) and cesium carbonate (21.5 g, 66.0 mmol) were dissolved in toluene, and heated to reflux for 10 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 30 (4.8 g, yield of 28%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 783.1[M+H]⁺.

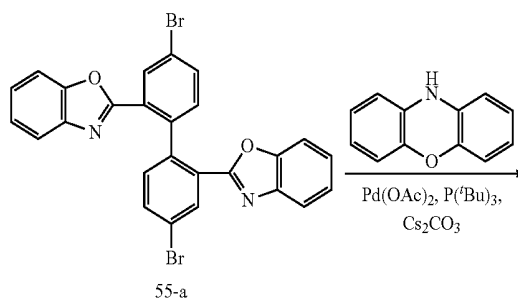

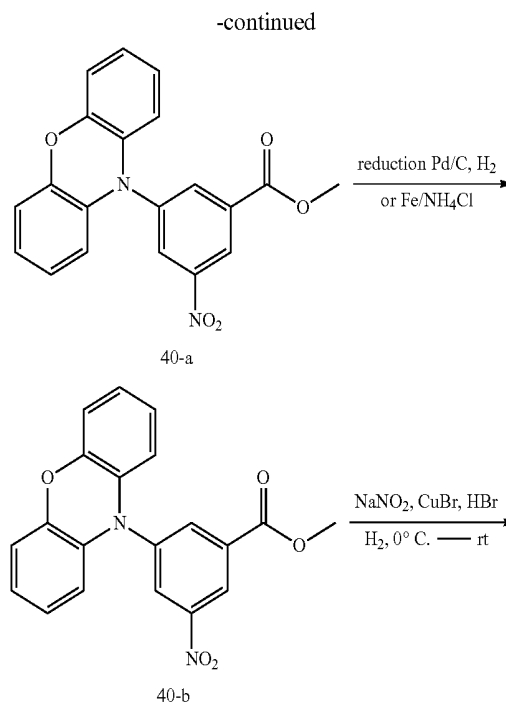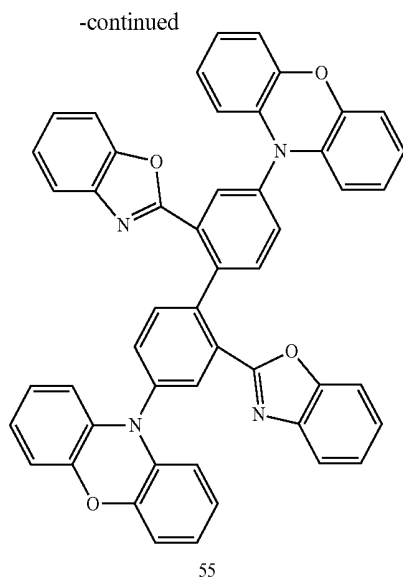

Step 1: Synthesis of Compound 55-a




[0117] A mixture of 2,2'-dicarboxy-4,4'-dibromobiphenyl (20 g, 50.0 mmol), 2-hydroxyaniline (10.9 g, 100.0 mmol) and 100.0 g of polyphosphoric acid (PPA) was heated at 140° C. for 5 h with stirring, and then naturally cooled to room temperature. 100.0 mL of deionized water was slowly added for full hydrolyzation. After filtration, the filter residue was fully dissolved with dichloromethane and filtered. Then the filtrate was pumped to remove the solvent under vacuum and purified using silica gel chromatography column to give the intermediate 55-a (6.8 g, yield of 25%).





Step 2: Synthesis of Compound 55

[0118] The above intermediate 55-a (6.8 g, 12.5 mmol), phenoxazine (4.6 g, 25.0 mmol), palladium acetate (0.3 g, 1.3 mmol), t-butyl phosphine (0.4 g, 1.9 mmol) and cesium carbonate (12.2 g, 37.5 mmol) were dissolved in toluene, and heated to reflux for 10 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 55 (2.9 g, yield of 31%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 751.2[M+H]⁺.

Example 19: Synthesis of Compound 40

[0119]

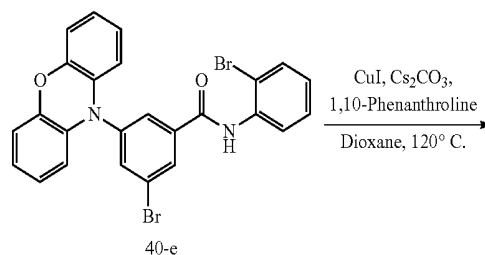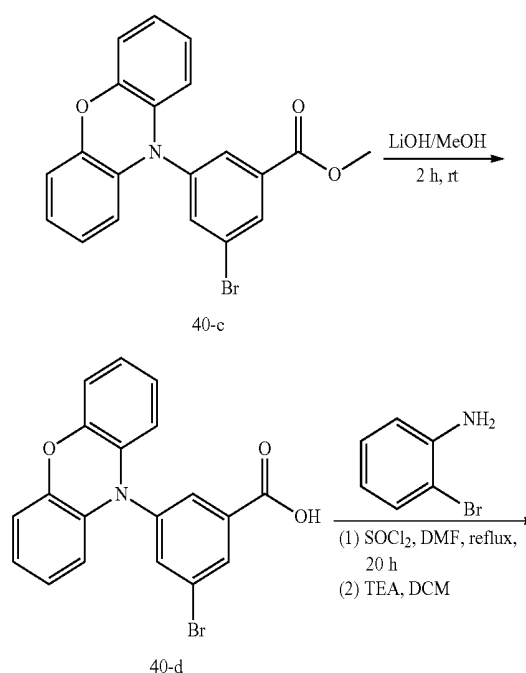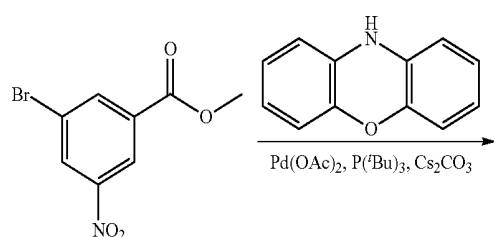

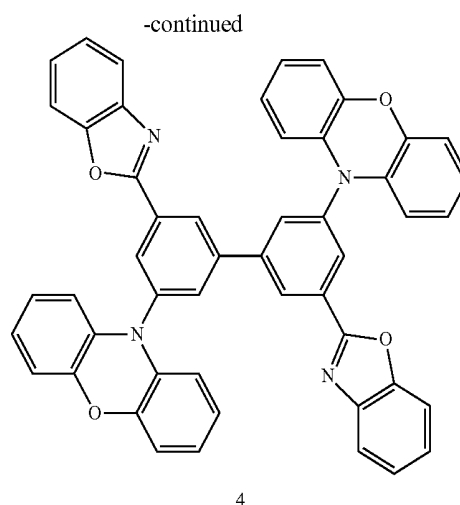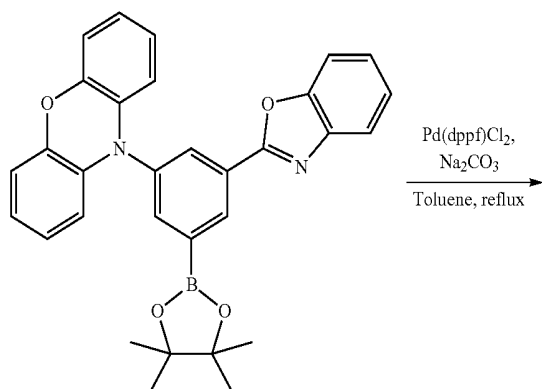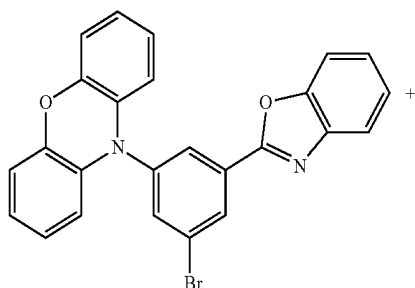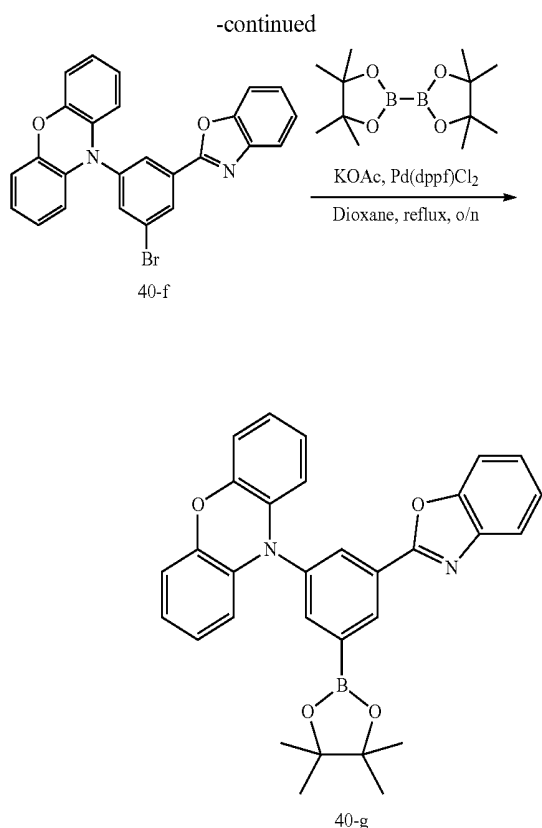

Step 1: Synthesis of Compound 40-a

[0120] 3-bromo-5-nitrobenzoate (20 g, 76.9 mmol), phenoxazine (14.1 g, 76.9 mmol), palladium acetate (0.8 g, 3.8 mmol), t-butyl phosphine (1.1 g, 5.8 mmol) and cesium carbonate (37.5 g, 115.4 mmol) were dissolved in toluene, and heated to reflux for 8 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 40-a (14.5 g, yield of 52%).

Step 2: Synthesis of Compound 40-b

[0121] The above intermediate 40-a (14.5 g, 40.0 mmol) was dissolved in methanol, and 3 g Pd/C was added slowly under argon protection. The reaction was kept under a hydrogen atmosphere for 20 hours after the gas in the reaction vessel was replaced with hydrogen. After filtration and evaporation of the solvent, an intermediate 40-b (12.0 g, yield of 90%) was obtained.

Step 3: Synthesis of Compound 40-c

[0122] Sodium nitrite (7.5 g, 108.7 mmol) was dissolved in 10 mL of water, and this solution was slowly added dropwise into the mixture of the intermediate 40-b (12.0 g, 36.1 mmol) and 11 mL of 48% hydrobromic acid (approximately 91.0 mmol) under an ice bath (0° C.), and stirred for 1 hour. To the above mixture was added 10 mL of cuprous bromide (5.4 g, 37.9 mmol) solution in hydrobromic acid under an ice bath. The mixture was reacted for 1 hour under an ice bath, and then heated to 60° C. for 2 hours. After being cooled, the resulting mixture was extracted with 50 mL of ethyl acetate. The organic layer was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation of the solvent, an intermediate 40-c (11.3 g, yield of 79%) was obtained.

Step 4: Synthesis of Compound 40-d

[0123] The intermediate 40-c (11.3 g, 28.5 mmol) was dissolved in 30 mL of methanol, to this solution was added LiOH (3.4 g, 142.5 mmol), and stirred for 2 hours at room temperature. The methanol was evaporated, and the resulting mixture was extracted with 50 mL of ethyl acetate and

20 mL of water. The organic phase was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation of the solvent, an intermediate 40-d (9.7 g, yield of 89%) was obtained.

Step 5: Synthesis of Compound 40-e

[0124] The intermediate 40-d (9.7 g, 25.4 mmol) was dissolved in 100 mL of thionyl chloride. A few drops of DMF was added dropwise as catalyst, and heated to reflux for 20 hours. After the residual thionyl chloride was evaporated off in vacuo, the resulting mixture was dissolved in 300 mL of dichloromethane. 2-bromoaniline (8.7 g, 50.8 mmol) was added when being cooled in an ice bath, and 15 mL of triethylamine was slowly added dropwise. After completion of the addition, the mixture was stirred overnight at room temperature. The reaction suspension was filtered, and washed with dichloromethane twice to give the intermediate 40-e (10.6 g, yield of 78%).

Step 6: Synthesis of Compound 40-f

[0125] The above Compound 40-e (10.6 g, 19.8 mmol), cuprous iodide (0.4 g, 2.1 mmol), cesium carbonate (12.9 g, 39.6 mmol), and 1,10-phenanthroline (0.8 g, 4.0 mmol) were dissolved in 200 mL of dioxane under an argon stream protection, and reacted overnight at a constant temperature of 120° C. The resulting mixture was diluted with 300 mL of ethyl acetate and 500 mL of water after being cooled to room temperature. The suspension was filtered and washed with water and ethanol to give the intermediate 40-f (7.5 g, yield of 83%).

Step 7: Synthesis of Compound 40-g


[0126] Catalyst Pd(dppf)Cl₂ (0.2 g, 0.3 mmol), potassium acetate (0.3 g, 3.0 mmol), bis(pinacolato)diboron (2.3 g, 8.9 mmol) were mixed into a reaction flask under a nitrogen stream. The intermediate 40-f (3.7 g, 8.1 mmol) solution dissolved in 150 mL of dioxane was added to the reaction flask and refluxed for 10 hours. After being cooled, the resulting mixture was extracted with toluene, washed with water for several times, and dried over anhydrous magnesium sulfate. After filtration and evaporation of the solvent, purification was carried out by silica gel chromatography column to give the intermediate 40-g (2.2 g, yield of 53%).

Step 8: Synthesis of Compound 40

[0127] The intermediate 40-g (2.2 g, 4.3 mmol), intermediate 40-f (2.0 g, 4.3 mmol), Pd(dppf)Cl₂ (0.06 g, 0.09 mmol), and 20 mL of 2M Na₂CO₃ aqueous solution were mixed into 100 mL of toluene under an argon stream, and heated to reflux for 10 hours. The resulting mixture was extracted with dichloromethane after being cooled. The organic phase was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation, purification was carried out by silica gel chromatography column to give a solid Compound 40 (1.2 g, yield of 36%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 751.1[M+H]⁺.

Example 20: Synthesis of Compound 1

[0128]

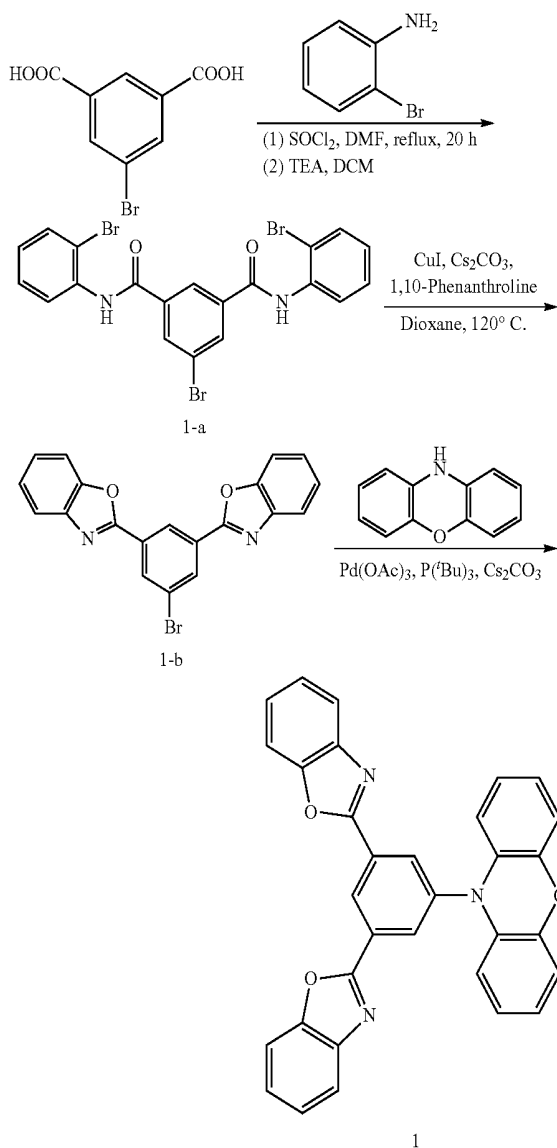

Step 1: Synthesis of Compound 1-a

[0129] 5-bromoisophthalic acid (20 g, 81.6 mmol) was dissolved in 100 mL of thionyl chloride. A few drops of DMF was added dropwise as catalyst, and heated to reflux for 20 hours. After the residual thionyl chloride was evaporated off in vacuo, the resulting mixture was dissolved in 300 mL of dichloromethane. After cooling in an ice bath, 2-bromoaniline (28.1 g, 163.2 mmol) was added, and 30 mL of triethylamine was slowly added dropwise. The mixture was stirred overnight at room temperature after the addition. The reaction suspension was filtered, and washed with dichloromethane twice to give the intermediate 1-a (38.4 g, yield of 85%).

Step 2: Synthesis of Compound 1-b

[0130] The above Compound 1-a (38.4 g, 69.4 mmol), cuprous iodide (1.3 g, 6.9 mmol), cesium carbonate (45.2 g,

138.7 mmol), and 1,10-phenanthroline (2.5 g, 13.9 mmol) were dissolved in 300 mL of dioxane under an argon stream protection, and reacted overnight at a constant temperature of 120° C. The resulting mixture was diluted with 500 mL of ethyl acetate and 700 mL of water after being cooled to room temperature. The suspension was filtered and washed with water and ethanol to give a white solid intermediate 1-b (19.8 g, yield of 73%).


Step 3: Synthesis of Compound 1

[0131] The above intermediate 1-b (19.8 g, 50.6 mmol), phenoxazine (9.3 g, 50.6 mmol), palladium acetate (0.6 g, 2.7 mmol), t-butyl phosphine (0.8 g, 3.8 mmol) and cesium carbonate (24.7 g, 75.9 mmol) were dissolved in toluene, and heated to reflux for 8 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 1 (8.1 g, yield of 31%).

[0132] ESI-MS (*m/z*) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 494.1[M+H]⁺.

Example 21: Synthesis of Compound 70

[0133]

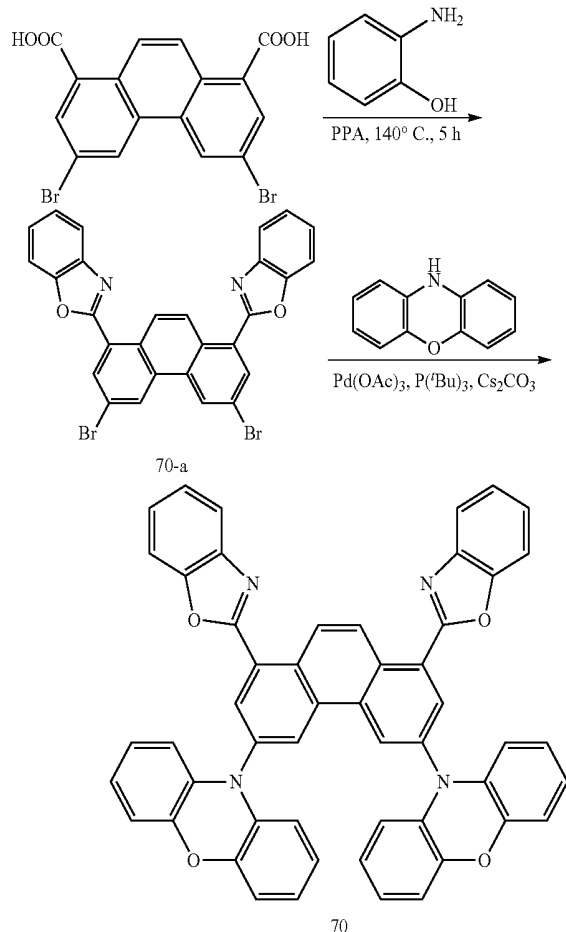

Step 1: Synthesis of Compound 70-a


[0134] 2,9-dibromophenanthrene-4,7-dicarboxylic acid (20 g, 47.2 mmol), 2-hydroxyaniline (10.4 g, 94.4 mmol) and 100.0 g of polyphosphoric acid (PPA) were heated at 140° C. for 5 h with stirring, and then naturally cooled to room temperature. 100.0 mL of deionized water was slowly added for full hydrolyzation. After filtration, a gray-green filter residue was obtained. The filter residue was fully dissolved with dichloromethane and filtered to obtain an orange-red clear filtrate. Then the solvent was pumped away under vacuum, and purification was carried out using silica gel chromatography column to give the intermediate 70-a (19.4 g, yield of 72%).


Step 2: Synthesis of Compound 70

[0135] The above intermediate 70-a (19.4 g, 34.0 mmol), phenoxazine (12.5 g, 68.0 mmol), palladium acetate (0.4 g, 1.8 mmol), t-butyl phosphine (0.5 g, 2.5 mmol) and cesium carbonate (16.6 g, 51.0 mmol) were dissolved in toluene, and heated to reflux for 8 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 70 (9.9 g, yield of 39%). ESI-MS (*m/z*) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 775.1[M+H]⁺.

Example 22: Synthesis of Compound 33

[0136]

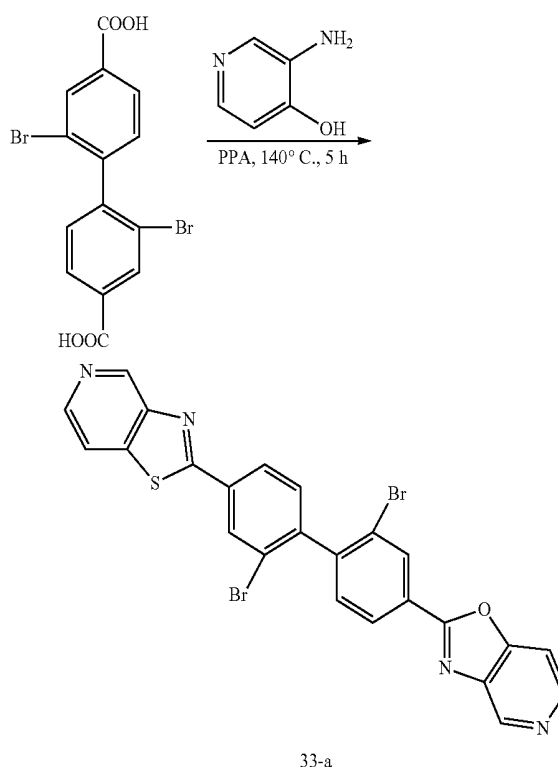

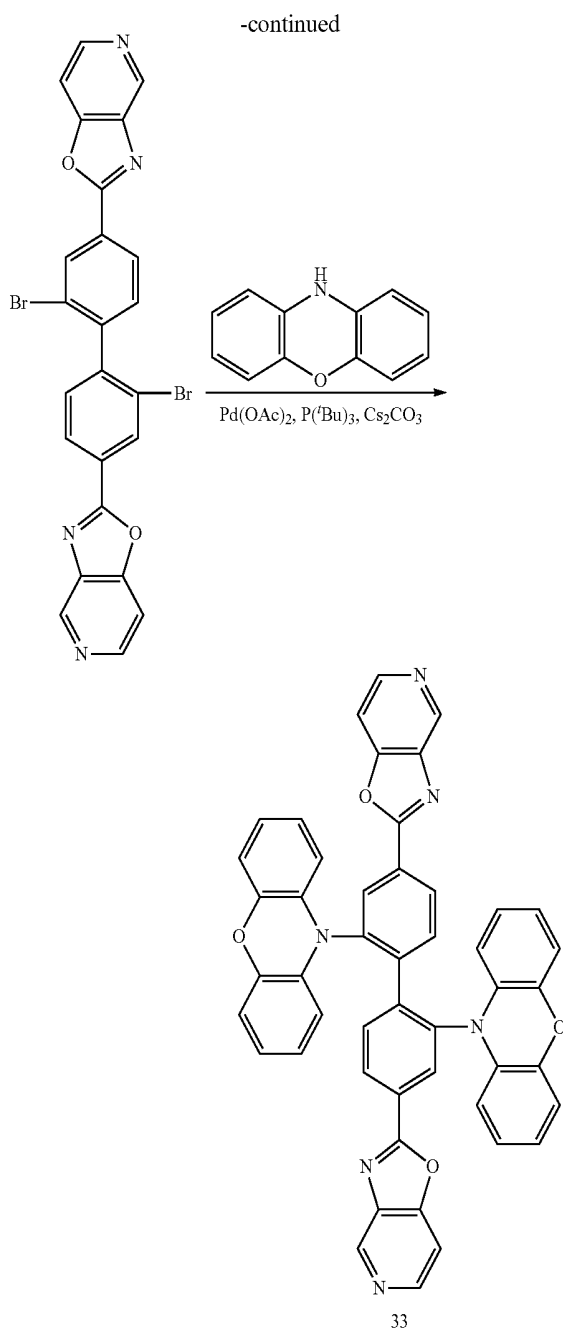

Step 1: Synthesis of Compound 33-a

[0137] 2,2'-dibromo-4,4'-dicarboxybiphenyl (20 g, 50.0 mmol), 3-amino-4-hydroxypyridine (11.0 g, 100.0 mmol) and 100.0 g of polyphosphoric acid (PPA) were heated at 140° C. for 5 h with stirring, and then naturally cooled to room temperature. 100.0 mL of deionized water was slowly added for full hydrolyzation. After filtration, the filter residue was fully dissolved with dichloromethane and filtered. Then the filtrate was pumped to remove the solvent under vacuum and purified using silica gel chromatography column to give the intermediate 33-a (18.9 g, yield of 69%).


Step 2: Synthesis of Compound 33

[0138] The above intermediate 33-a (18.9 g, 34.5 mmol), phenoxazine (12.6 g, 69.0 mmol), palladium acetate (0.4 g,

1.8 mmol), t-butyl phosphine (0.5 g, 2.5 mmol) and cesium carbonate (16.9 g, 51.9 mmol) were dissolved in toluene, and heated to reflux for 8 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 33 (8.8 g, yield of 34%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 753.1[M+H]⁺.

Example 23: Synthesis of Compound 80

[0139]

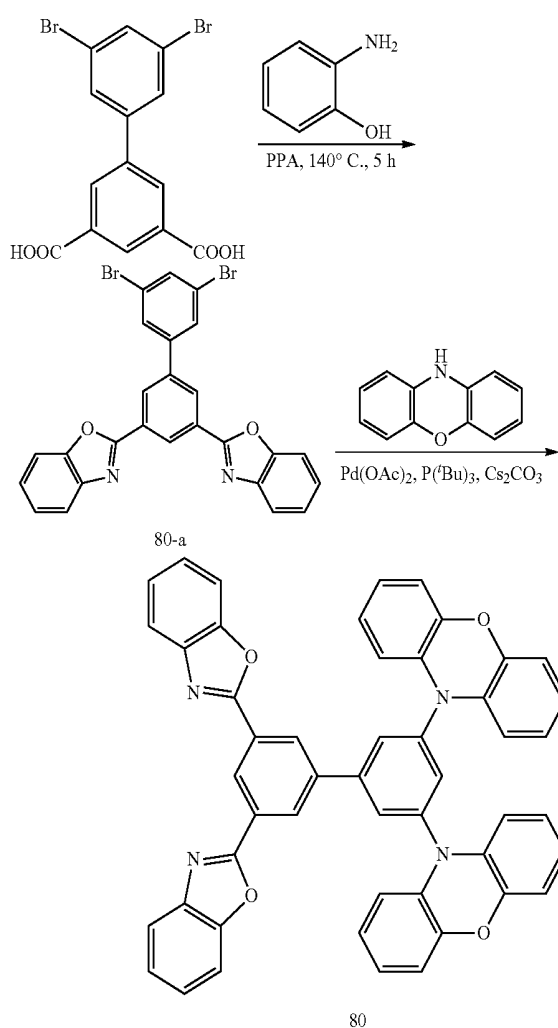

Step 1: Synthesis of Compound 80-a

[0140] 3,5-dibromo-3',5'-dicarboxybiphenyl (20 g, 50.0 mmol), 2-amino-1-naphthol (10.9 g, 100.0 mmol) and 100.0 g of polyphosphoric acid (PPA) were heated at 140° C. for 5 h with stirring, and then naturally cooled to room temperature. 100.0 mL of deionized water was slowly added for full hydrolyzation. After filtration, the filter residue was fully dissolved with dichloromethane and filtered. Then the filtrate was pumped to remove the solvent under vacuum and purified using silica gel chromatography column to give the intermediate 80-a (10.4 g, yield of 38%).


Step 2: Synthesis of Compound 80

[0141] The above intermediate 80-a (10.4 g, 19.0 mmol), phenoxazine (7.0 g, 38.0 mmol), palladium acetate (0.4 g, 1.9 mmol), t-butyl phosphine (0.6 g, 2.9 mmol) and cesium carbonate (18.6 g, 57.0 mmol) were dissolved in toluene, and heated to reflux for 10 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 80 (3.3 g, yield of 23%).

[0142] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 751.1[M+H]⁺.

Example 24: Synthesis of Compound 84

[0143]

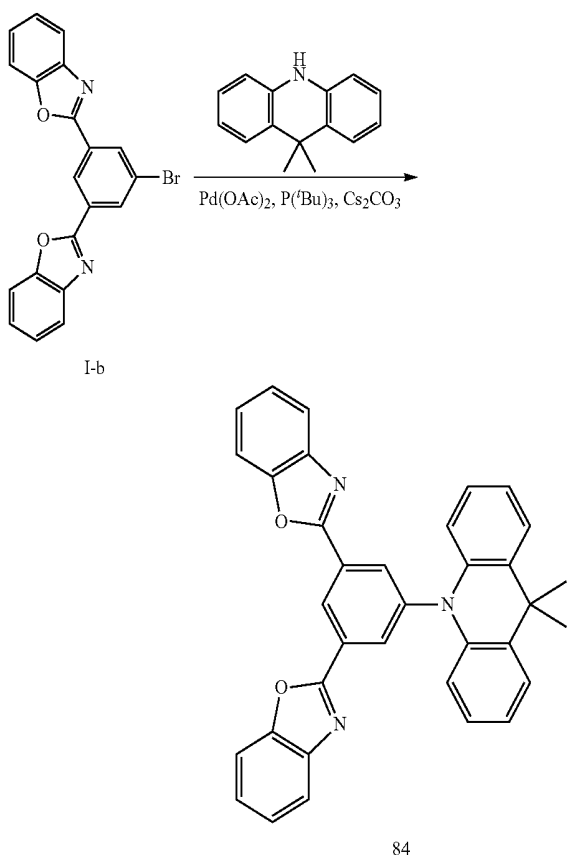


Step 1: Synthesis of Compound 84

[0144] The intermediate 1-b (5.0 g, 12.8 mmol), 9,9-dimethylacridan (5.4 g, 25.6 mmol), palladium acetate (0.3 g, 1.3 mmol), t-butyl phosphine (0.4 g, 1.9 mmol) and cesium carbonate (12.5 g, 38.4 mmol) were dissolved in toluene, and heated to reflux for 8 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 84 (1.9 g, yield of 28%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 520.1[M+H]⁺.

Example 25: Synthesis of Compound 91

[0145]

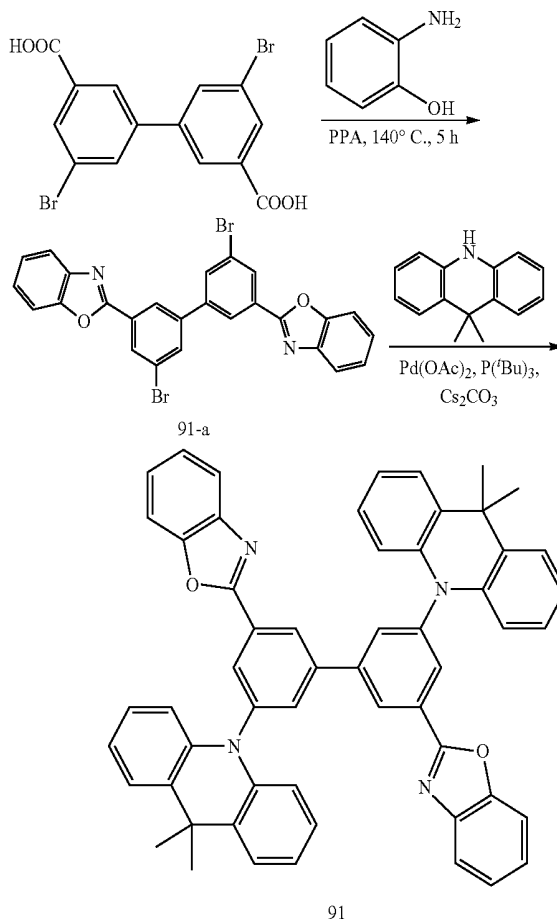

Step 1: Synthesis of Compound 91-a


[0146] 3,3'-dicarboxy-5,5'-dibromobiphenyl (20 g, 50.0 mmol), 2-hydroxyaniline (10.9 g, 100.0 mmol) and 100.0 g of polyphosphoric acid (PPA) were heated at 140° C. for 5 h with stirring, and then naturally cooled to room temperature. 100.0 mL of deionized water was slowly added for full hydrolyzation. After filtration, the filter residue was fully dissolved with dichloromethane and filtered. Then the filtrate was pumped to remove the solvent under vacuum, and purified using silica gel chromatography column to give the intermediate 91-a (10.1 g, yield of 37%).

Step 2: Synthesis of Compound 91

[0147] The above intermediate 91-a (10.1 g, 18.5 mmol), 9,9-dimethylacridan (7.7 g, 37.0 mmol), palladium acetate (0.4 g, 1.9 mmol), t-butyl phosphine (0.6 g, 2.8 mmol) and cesium carbonate (18.1 g, 55.5 mmol) were dissolved in toluene, and heated to reflux for 10 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 91 (4.2 g, yield of 28%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 803.2[M+H]⁺.

Example 26: Synthesis of Compound 103

[0148]

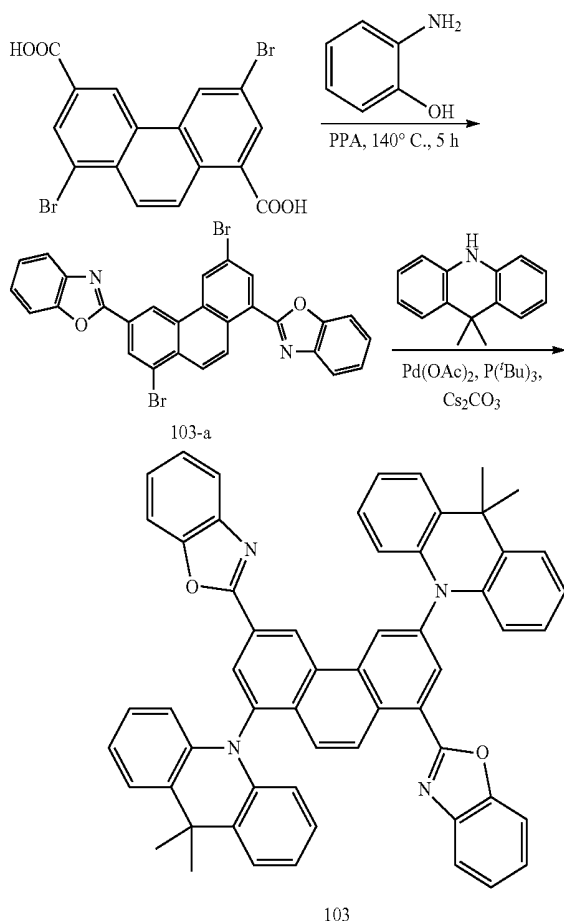

Step 1: Synthesis of Compound 103-a

[0149] 4,9-dibromophenanthrene-2,7-dicarboxylic acid (20 g, 47.2 mmol), 2-hydroxyaniline (10.3 g, 94.4 mmol) and 100.0 g of polyphosphoric acid (PPA) were heated at 140° C. for 5 h with stirring, and then naturally cooled to room temperature. 100.0 mL of deionized water was slowly added for full hydrolyzation. After filtration, the filter residue was fully dissolved with dichloromethane and filtered. Then the filtrate was pumped to remove the solvent under vacuum and purified using silica gel chromatography column to give the intermediate 103-a (5.7 g, yield of 21%).


Step 2: Synthesis of Compound 103

[0150] The above intermediate 103-a (5.7 g, 9.9 mmol), 9,9-dimethylacridan (4.1 g, 19.8 mmol), palladium acetate (0.2 g, 1.0 mmol), t-butyl phosphine (0.3 g, 1.5 mmol) and cesium carbonate (9.7 g, 29.7 mmol) were dissolved in toluene, and heated to reflux for 10 hours under a nitrogen atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 103 (2.2 g, yield of 27%).

[0151] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 827.3[M+H]⁺.

Example 27: Synthesis of Compound 6

[0152]

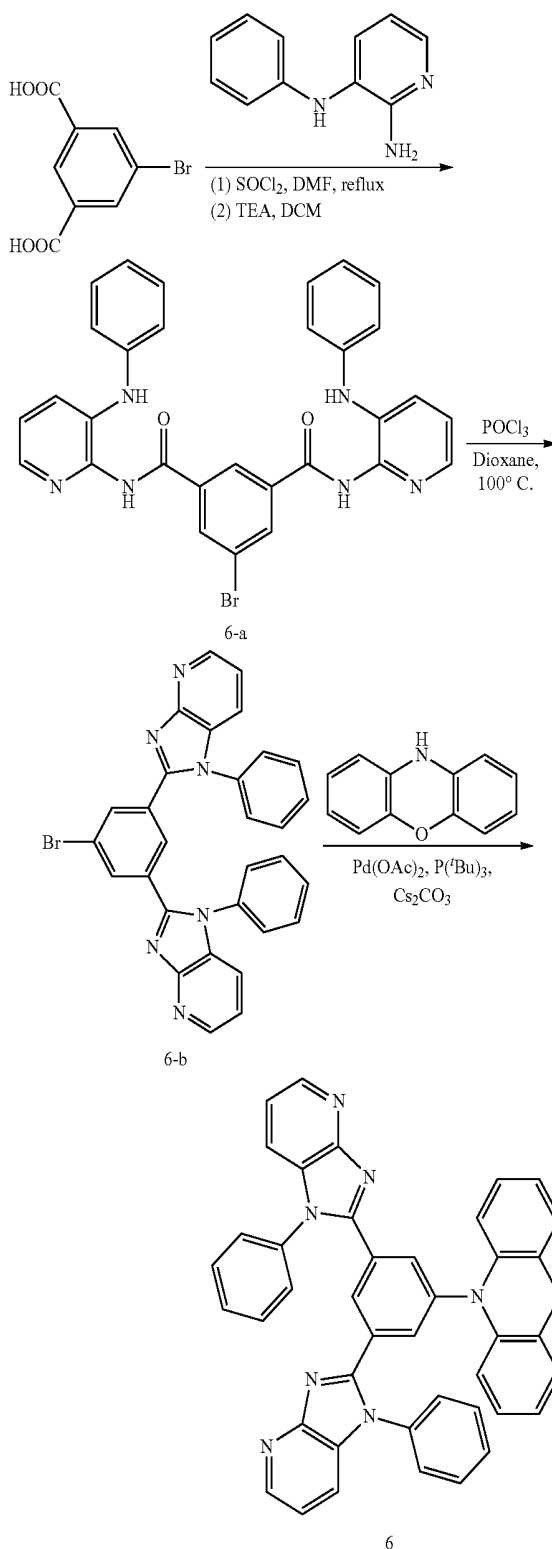

Step 1: Synthesis of a Intermediate 6-a

[0153] 5-bromoisophthalic acid (10 g, 40.8 mmol) was dissolved in 50 mL of thionyl chloride. A few drops of DMF

was added dropwise as catalyst, and heated to reflux overnight under an argon condition. After the residual thionyl chloride was evaporated off in vacuo, the resulting mixture was dissolved in 150 mL of dichloromethane. After being cooled in an ice bath, N'-3'-phenyl-2,3-diaminopyridine (15.1 g, 81.6 mmol) was added, and 15 mL of triethylamine was slowly added dropwise. After the addition, the mixture was stirred overnight at room temperature. The reaction suspension was filtered, and washed with dichloromethane twice to give the intermediate 6-a (19.6 g, yield of 83%).

Step 2: Synthesis of a Intermediate 6-b

[0154] POCl_3 (20.8 g, 135.6 mmol) was slowly added to the intermediate 6-a (19.6 g, 33.9 mmol) solution in dioxane when being cooled in a water bath. The mixture was heated to 100° C. and stirred overnight. Ice cubes were added after the mixture was cooled to room temperature, and the mixture was neutralized to be neutral with Na_2CO_3 solution. The resulting mixture was extracted twice with dichloromethane, and dried over anhydrous Na_2SO_4 . The organic phase was concentrated, and then purified using silica gel chromatography column to give the intermediate 6-b (13.6 g, yield of 74%).

Step 3: Synthesis of Compound 6

[0155] The above intermediate 6-b (13.6 g, 25.1 mmol), phenoxazine (5.1 g, 27.6 mmol), palladium acetate (0.3 g, 1.3 mmol), t-butyl phosphine (0.4 g, 1.9 mmol) and cesium carbonate (12.3 g, 37.7 mmol) were dissolved in toluene, and heated to reflux for 8 hours under an argon atmosphere. The solvent was evaporated off in vacuo. To the residue was added pentane and stirred. The resulting mixture was filtered and purified by silica gel chromatography column to give a solid Compound 6 (6.0 g, yield of 37%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 646.1[M+H]⁺.

Example 28: Synthesis of Compound 12

[0156] Except that 3-amino-4-hydroxypyridine was replaced with 3-aminopyridine-2-thiol and 2,2'-dibromo-4,4'-dicarboxybiphenyl was replaced with 5-bromoisophthalic acid, the other synthetic procedures are the same as those in Example 22. Purification was carried out by silica gel chromatography column to give a solid Compound 12 (9.0 g, yield of 21%).

[0157] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 528.1[M+H]⁺.

Example 29: Synthesis of Compound 17

[0158] Except that 5-bromoisophthalic acid was replaced with 3,5-dibromobenzoic acid and N'-3'-phenyl-2,3-diaminopyridine was replaced with N'-2'-phenyl-2,3-diaminopyridine, the other synthetic procedures are the same as those in Example 27. Purification was carried out by silica gel chromatography column to give a solid Compound 17 (5.4 g, yield of 24%).

[0159] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 634.2[M+H]⁺.

Example 30: Synthesis of Compound 24

[0160] Except that 3-aminopyridine-2-thiol was replaced with 2-amino-3-hydroxypyridine and 5-bromoisophthalic acid was replaced with 3,5-dibromobenzoic acid, the other synthetic procedures are the same as those in Example 22. Purification was carried out by silica gel chromatography column to give a solid Compound 24 (7.6 g, yield of 19%).

[0161] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 559.1[M+H]⁺.

Example 31: Synthesis of Compound 51

[0162] Except that 5-bromoisophthalic acid was replaced with 3,3'-dibromo-5,5'-dicarboxybiphenyl and N'-3'-phenyl-2,3-diaminopyridine was replaced with N'-2'-phenyl-2,3-diaminopyridine, the other synthetic procedures are the same as those in Example 27. Purification was carried out by silica gel chromatography column to give a solid Compound 51 (3.8 g, yield of 17%).

[0163] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 903.2[M+H]⁺.


Example 32: Synthesis of Compound 76

[0164] Except that 2,9-dibromophenanthrene-4,7-dicarboxylic acid was replaced with 4,7-dibromophenanthrene-2,9-dicarboxylic acid and 2-hydroxyaniline was replaced with 2-amino-3-hydroxypyridine, the other synthetic procedures are the same as those in Example 21. Purification was carried out by silica gel chromatography column to give a solid Compound 76 (8.8 g, yield of 24%).




[0165] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 777.2[M+H]⁺.

Example 33: Synthesis of Compound 128

[0166]

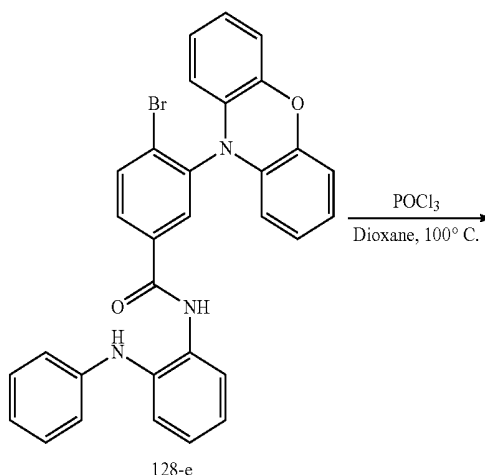

-continued

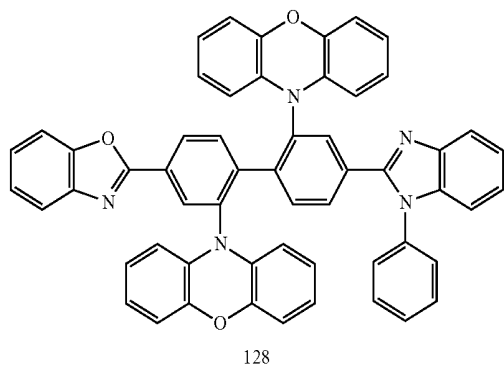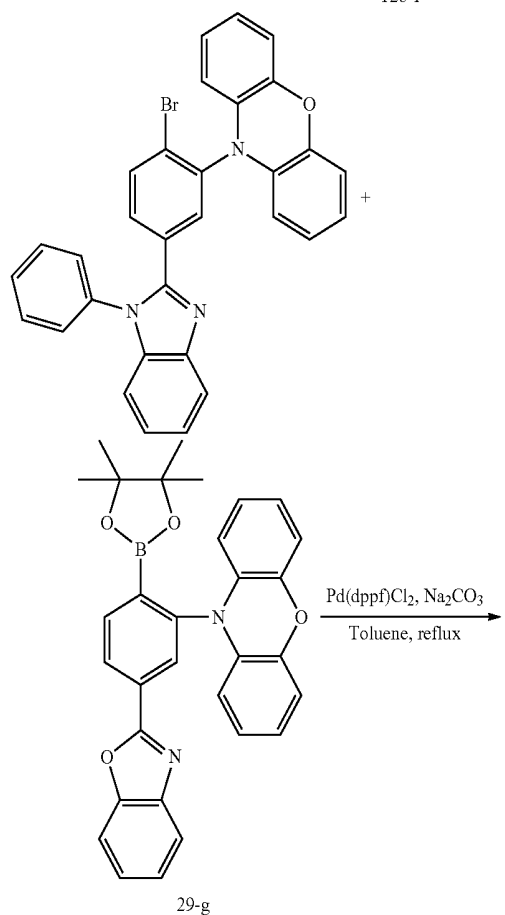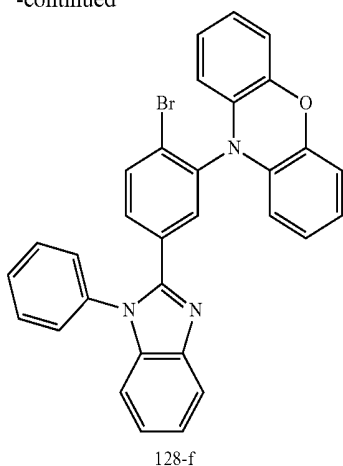

Step 1: Synthesis of a Intermediate 128-e

[0167] Except that 2-hydroxyaniline was replaced with N-phenylbenzene-1,2-diamine, the other synthetic procedures are the same as those of the intermediate 29-e in Example 16. A solid intermediate 128-e (9.7 g, yield of 23%) was obtained after purification.

Step 2: Synthesis of a Intermediate 128-f


[0168] POCl₃ (5.4 g, 35.4 mmol) was slowly added to the intermediate 128-e (9.7 g, 17.7 mmol) solution in dioxane when being cooled in a water bath. The mixture was heated to 100° C. and stirred overnight. Ice cubes were added after the mixture was cooled to room temperature, and the mixture was neutralized to be neutral with Na₂CO₃ solution. The resulting mixture was extracted twice with dichloromethane, and dried over anhydrous magnesium sulfate. The organic phase was concentrated, and then purified using silica gel chromatography column to give the intermediate 128-f (7.4 g, yield of 79%).


Step 3: Synthesis of Compound 128

[0169] The intermediate 29-g (7.0 g, 14.0 mmol), intermediate 128-f (7.4 g, 14.0 mmol), Pd(dppf)Cl₂ (0.2 g, 0.3 mmol), and 50 mL of 2M Na₂CO₃ aqueous solution were mixed into 200 mL of toluene under an argon stream, and heated to reflux for 10 hours. The resulting mixture was extracted with dichloromethane after being cooled. The organic phase was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation, purification was carried out by silica gel column chromatography to give a solid Compound 128 (3.0 g, yield of 26%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 826.2[M+H]⁺.

Example 34: Synthesis of Compound 138

[0170]

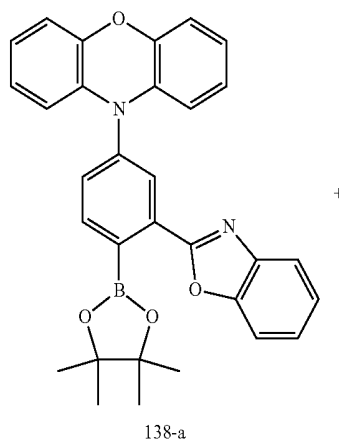

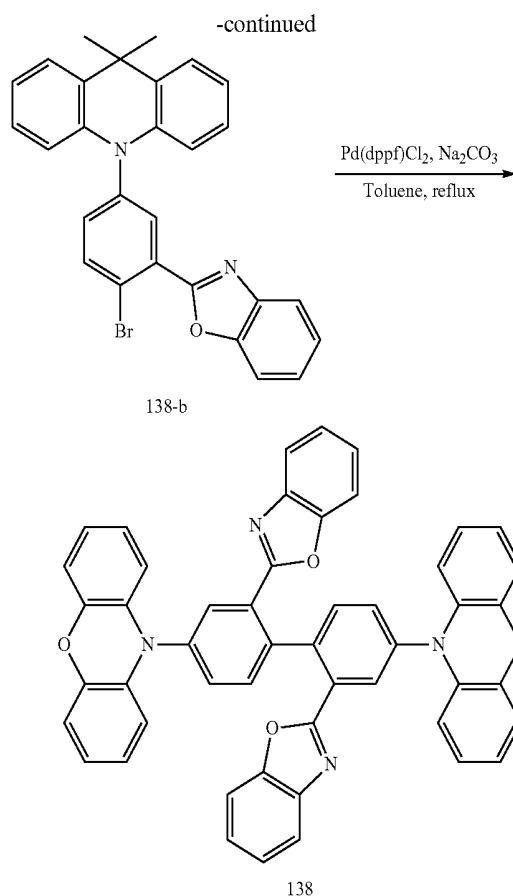

Step 1: Synthesis of a Intermediate 138-a

[0171] Methyl 3-bromo-4-nitrobenzoate was replaced with methyl 2-nitro-5-bromobenzoate, the other synthetic procedures are the same as those of the intermediate 29-g in Example 16. Purification was carried out by silica gel chromatography column to give a solid intermediate 138-a (3.1 g, yield of 8%).

Step 2: Synthesis of a Intermediate 138-b

[0172] Methyl 3-bromo-4-nitrobenzoate was replaced with methyl 2-nitro-5-bromobenzoate, and phenoxazine was replaced with 9,9-dimethylacridan, the other synthetic procedures are the same as those of the intermediate 29-f in Example 16. Purification was carried out by silica gel chromatography column to give a solid intermediate 138-b (5.9 g, yield of 16%).

Step 3: Synthesis of Compound 138

[0173] The intermediate 138-a (3.1 g, 6.1 mmol), intermediate 138-b (2.9 g, 6.1 mmol), Pd(dppf)Cl₂ (0.08 g, 0.11 mmol), and 25 mL of 2M Na₂CO₃ aqueous solution were mixed into 150 mL of toluene under an argon stream, and heated to reflux for 10 hours. The resulting mixture was extracted with dichloromethane after being cooled. The organic phase was washed with water for several times, dried over anhydrous magnesium sulfate and filtered. After evaporation, purification was carried out by silica gel column chromatography to give a solid Compound 138 (1.3 g,

yield of 27%). ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 777.1[M+H]⁺.

Example 35: Synthesis of Compound 162

[0174] Except that 2,9-dibromophenanthrene-4,7-dicarboxylic acid was replaced with 1,5-dinitro-3,7-dibromonaphthalene, the other synthetic procedures are the same as those of Example 21. Purification was carried out by silica gel chromatography column to give a solid Compound 162 (6.2 g, yield of 16%).

[0175] ESI-MS (m/z) was obtained by Liquid Chromatograph-Mass Spectrometer analysis: 725.1[M+H]⁺.

Example 36: Manufacture of Organic Optoelectronic Device

[0176] The anode substrate of ITO film with a film thickness of 100 nm was ultrasonically washed with distilled water, acetone and isopropanol, and placed in an oven to be dried. The surface thereof was treated by UV for 30 minutes, and then moved to the vacuum evaporation chamber. Each film was began to be evaporated at a vacuum degree of 2×10⁻⁶ Pa, diphenyl naphthyl diamine (NPD) with a thickness of 60 nm and then 4,4',4''-tris(N-carbazolyl)triphenylamine (TCTA) with a thickness of 10 nm were evaporated to form a hole transport layer (HTL). 6 wt % of Ir(ppy)₃ was used as a green phosphorescent dopant material and 94 wt % of Compound 29 was used as a host material on the hole transport layer. The green phosphorescent dopant material and the host material were evaporated simultaneously to form a luminescent layer with a thickness of 30 nm. Then a thick bis(8-hydroxy-2-methylquinoline)aluminum diphenolate (BALq) layer with a thickness of 5 nm was evaporated on the luminescent layer to form a hole blocking layer (HBL). 4,7-diphenyl-1,10-phenanthroline (Bphen) was evaporated on the hole blocking layer to form an electron transport layer (ETL) with a thickness of 20 nm. LiF with a thickness of 1 nm and Al with a thickness of 100 nm were evaporated in sequence on the electron transport layer as an electron injection layer (EIL) and a cathode. Thereby an organic optoelectronic device was produced.

[0177] The organic optoelectronic device has a structure of ITO(100 nm)/NPD(60 nm)/TCTA(10 nm)/Ir(ppy)₃:Compound 29(6 wt %:94 wt %,30 nm)/BALq(5 nm)/Bphen(20 nm)/LiF(1 nm)/Al(100 nm).

Example 37: Manufacture of Organic Optoelectronic Device

[0178] Except that Compound 29 was replaced with Compound 30 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 38: Manufacture of Organic Optoelectronic Device

[0179] Except that Compound 29 was replaced with Compound 55 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 39: Manufacture of Organic
Optoelectronic Device

[0180] Except that Compound 29 was replaced with Compound 40 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 40: Manufacture of Organic
Optoelectronic Device

[0181] Except that Compound 29 was replaced with Compound 1 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 41: Manufacture of Organic
Optoelectronic Device

[0182] Except that Compound 29 was replaced with Compound 33 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 42: Manufacture of Organic
Optoelectronic Device

[0183] Except that Compound 29 was replaced with Compound 80 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 43: Manufacture of Organic
Optoelectronic Device

[0184] Except that Compound 29 was replaced with Compound 84 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 44: Manufacture of Organic
Optoelectronic Device

[0185] Except that Compound 29 was replaced with Compound 91 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 45: Manufacture of Organic
Optoelectronic Device

[0186] Except that Compound 29 was replaced with Compound 6 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 46: Manufacture of Organic
Optoelectronic Device

[0187] Except that Compound 29 was replaced with Compound 12 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 47: Manufacture of Organic
Optoelectronic Device

[0188] Except that Compound 29 was replaced with Compound 17 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 48: Manufacture of Organic
Optoelectronic Device

[0189] Except that Compound 29 was replaced with Compound 24 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 49: Manufacture of Organic
Optoelectronic Device

[0190] Except that Compound 29 was replaced with Compound 51 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 50: Manufacture of Organic
Optoelectronic Device

[0191] Except that Compound 29 was replaced with Compound 76 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 51: Manufacture of Organic
Optoelectronic Device

[0192] Except that Compound 29 was replaced with Compound 128 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 52: Manufacture of Organic
Optoelectronic Device

[0193] Except that Compound 29 was replaced with Compound 138 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 53: Manufacture of Organic
Optoelectronic Device


[0194] Except that Compound 29 was replaced with Compound 162 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

Example 54: Manufacture of Organic
Optoelectronic Device

[0195] Except that the co-evaporated layer (wherein 1 wt % TBRb was used as the doped material, 25 wt % Compound 29 was used as the co-doped material and 74 wt % CBP was used as the host material) with a thickness of 30 nm was used as the luminescent layer, the organic optoelectronic device was manufactured according to the same method as that in Example 36.

[0196] The organic optoelectronic device has a structure of ITO(100 nm)/NPD(60 nm)/TCTA(10 nm)/TBRb: Com-

pound 29:CBP(1 wt %:25 wt %:74 wt %, 30 nm)/BAIq(5 nm)/Bphen(20 nm)/LiF(1 nm)/Al(100 nm).

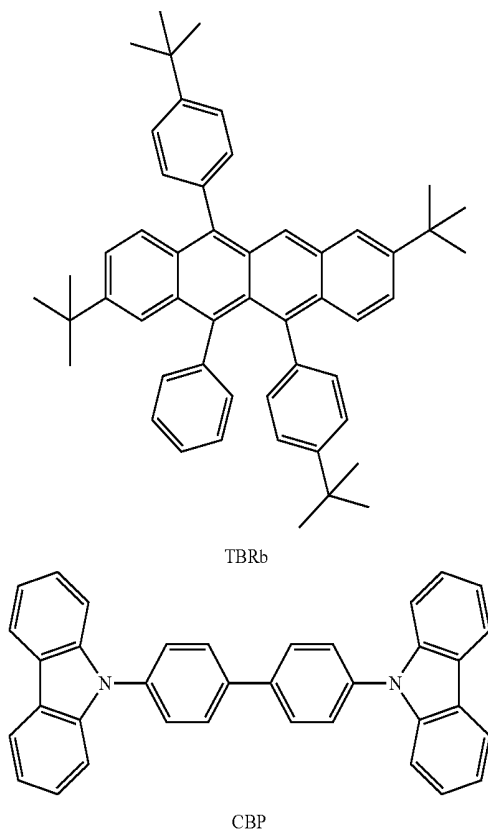

Example 55: Manufacture of Organic Optoelectronic Device

[0197] Except that Compound 29 was replaced with Compound 30 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 54.

Example 56: Manufacture of Organic Optoelectronic Device

[0198] Except that Compound 29 was replaced with Compound 1 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 54.

Example 57: Manufacture of Organic Optoelectronic Device

[0199] Except that Compound 29 was replaced with Compound 33 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 54.

Example 58: Manufacture of Organic Optoelectronic Device

[0200] Except that Compound 29 was replaced with Compound 103 as the host material, the organic optoelectronic device was manufactured according to the same method as that in Example 54.

Comparative Example 1: Manufacture of Organic Optoelectronic Device

[0201] Except that the co-evaporated layer (wherein 1 wt % TBRb was used as the doped material and 99 wt % CBP was used as the host material) with a thickness of 30 nm was used as the luminescent layer, the organic optoelectronic device was manufactured according to the same method as that in Example 54.

Performance Evaluation of the Organic Optoelectronic Devices

[0202] Currents of the organic optoelectronic devices manufactured in Examples 36-58 and Comparative Example 1 were tested at different voltages using Keithley 2365A digital nanovoltmeter, and then the current density of the organic optoelectronic devices at different voltages were obtained by dividing the currents by luminescence areas. Brightness and radiant energy flux density of the organic optoelectronic devices manufactured in Examples 36-58 and Comparative Example 1 were tested at different voltages using Konicaminolta CS-2000 Spectroradiometer. Current efficiency (Cd/A) and external quantum efficiency (EQE) at the same current density (10 mA/cm²) were obtained according to the current density and brightness of the organic optoelectronic devices at different voltages.

[0203] As shown in the experiments, as for the compounds in Examples 36-53, the test voltage is less than 5V, the current efficiency is higher than or equal to 39 Cd/A and EQE is higher than 15, which indicates that the tested compounds have a function as a host material. The results of Examples 36-44 are shown in Table 2.

[0204] The results of Examples 54-58 and Comparative Example 1 are shown in Table 3.

TABLE 2

The tested compounds used as a host material			
	Voltage (V)	Current efficiency (Cd/A)	EQE
Example 36	4.5	42.8	17.2
Example 37	4.6	43.1	16.9
Example 38	4.0	48.6	18.8
Example 39	4.2	45.1	17.9
Example 40	4.4	46.2	17.4
Example 41	4.3	47.8	18.4
Example 42	4.7	41.4	16.7
Example 43	4.7	40.9	15.8
Example 44	4.9	39.0	15.2

TABLE 3

The tested compounds used as the co-doped material			
	Voltage (V)	Current efficiency (Cd/A)	EQE
Example 54	6.9	35.4	9.5
Example 55	8.2	25.2	8.1
Example 56	7.6	32.2	9.3
Example 57	7.4	38.9	10.7
Example 58	8.5	19.2	7.2
Comparative Example 1	9.3	7.9	2.5

[0205] According to the test results of the compounds in Examples 36-53, at the same current density of 10 mA/cm², the driving voltages of these compounds are less than 5V, the current efficiencies are higher than 39Cd/A, and EQEs are higher than 15. Therefore, all the compounds tested in Examples 36-53 have a lower driving voltage, higher current efficiency and higher external quantum efficiency, which indicates that the compounds of the present application have a function as a host material.


[0206] The test results in Table 3 show that the compounds tested in Examples 54-58 have lower driving voltage, higher current efficiency and higher external quantum efficiency with respect to comparative Example 1, which indicates that the compounds of the present application have a function as a co-doped material or a doped material.

[0207] In view of the above, the organic photoelectric devices comprising the compounds of the present application have excellent luminescence performance.

[0208] The above general description of the technical solutions involved in present application and the description of the specific embodiments thereof should not be construed as constituting any limitation to the technical solutions of the present application. According to the present application, one of ordinary skill in the art could add, delete or combine the technical features disclosed in the above general description or/and the specific embodiments (comprising the examples) to form other technical solutions belonging to the present application without departing from the inventive concept involved.

What is claimed is:

1. A compound of Formula (I):

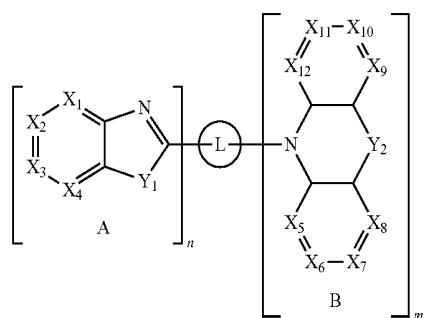

wherein

X_1 to X_{12} are each independently CR_1 or N ;

Y₁ is O, S or NR₂;

Y_2 is a single bond, O, S, CR_3R_4 , NR_5 or SiR_6R_7 ;

R₁ to R₇ are each independently hydrogen, deuterium, C₁₋₃₀ alkyl, C₆₋₃₀ aryl or C₂₋₂₀ heteroaryl;


L is a linking moiety which enables the structure of Formula (I) to form a conjugated system;

n and m are each independently 1, 2 or 3;

if n is greater than 1, each Moiety A in Formula (I) is the same as each other or different from each other; and
if m is greater than 1, each Moiety B in Formula (I) is the same as each other or different from each other.

2. The compound according to claim 1, wherein said L is C₆₋₃₀ aryl or C₂₋₃₀ heteroaryl.


3. The compound according to claim 1, wherein said L is selected from the following structures:

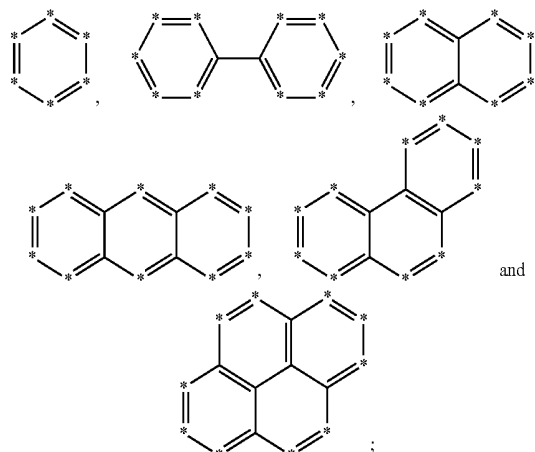


wherein, * represents CR₈, N or a site linked to said Moiety A or said Moiety B, and said R₈ is each independently hydrogen, deuterium, C₁₋₆ alkyl, C₆₋₁₆ aryl or C₂₋₆ heteroaryl.


4. The compound according to claim 3, wherein substitution positions of said Moiety A and said Moiety B on said L are spaced by at least one atom.

5. The compound according to claim 1, wherein said Moiety A is selected from the following groups:

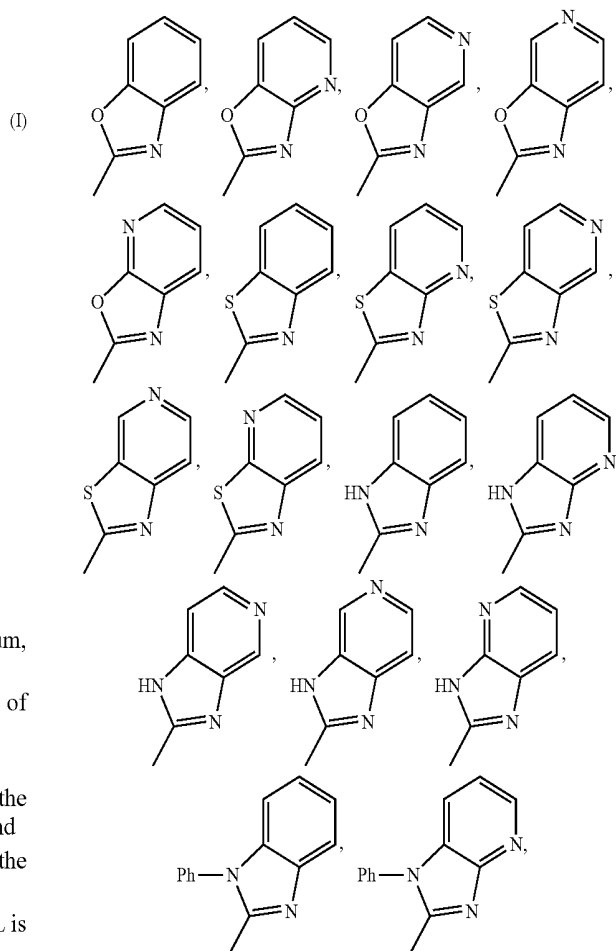

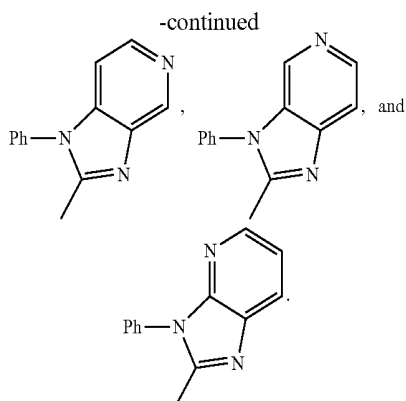

6. The compound according to claim 1, wherein said Moiety B is selected from the following groups:

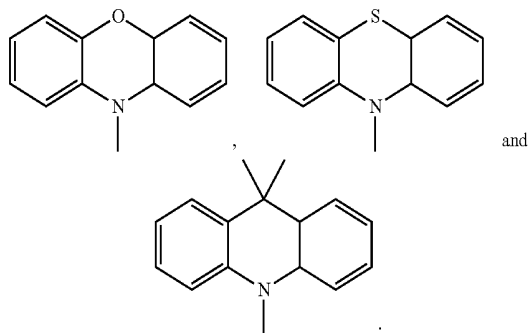

7. The compound according to claim 1, wherein the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of said compound is less than or equal to 0.30 eV.

8. The compound according to claim 7, wherein the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of said compound is less than or equal to 0.25 eV.

9. The compound according to claim 7, wherein the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of said compound is less than or equal to 0.15 eV.




10. The compound according to claim 7, wherein the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of said compound is less than or equal to 0.1 eV.

11. The compound according to claim 7, wherein the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of said compound is less than or equal to 0.05 eV.


12. The compound according to claim 7, wherein the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of said compound is less than or equal to 0.02 eV.

13. The compound according to claim 7, wherein the energy gap ΔE_{st} between the lowest singlet state and the lowest triplet state of said compound is less than or equal to 0.01 eV.

14. The compound according to claim 1, selected from:

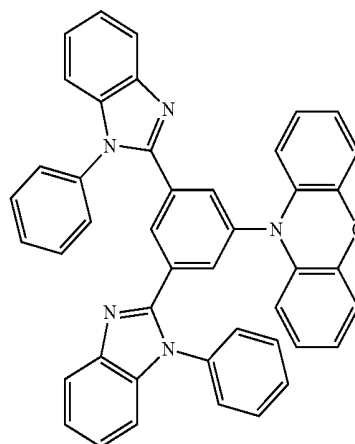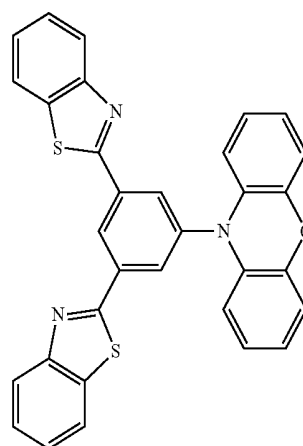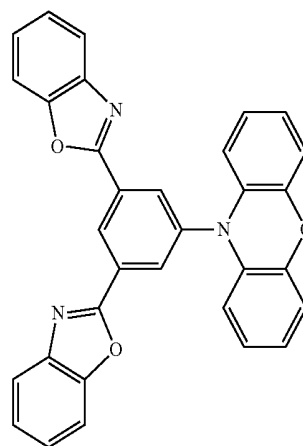


-continued

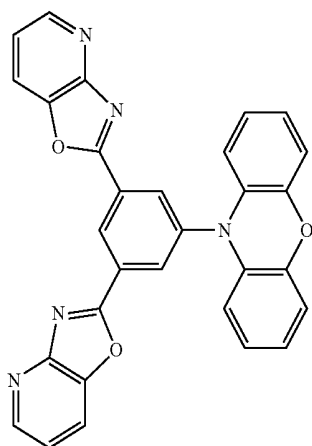


4


-continued

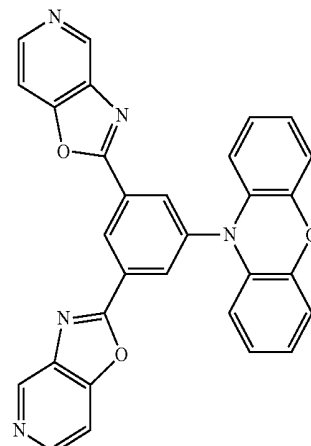


7

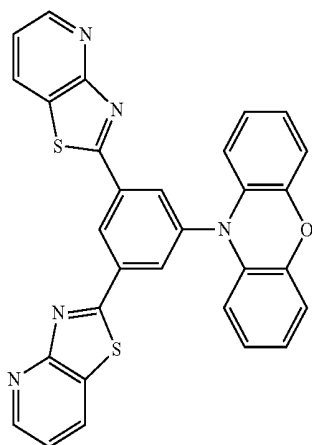


5

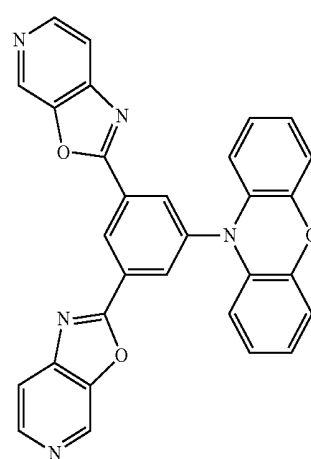

8

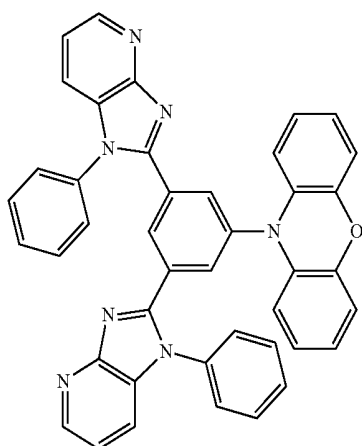


6

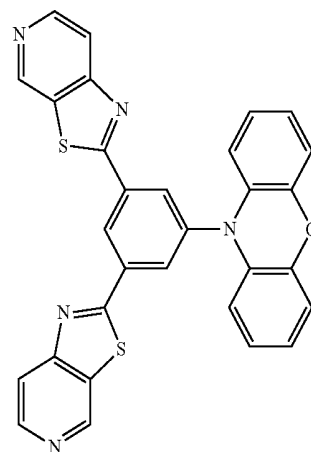


9


-continued

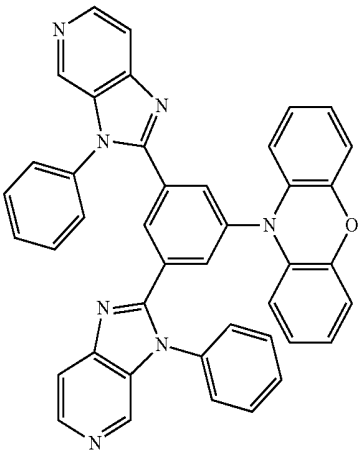


-continued

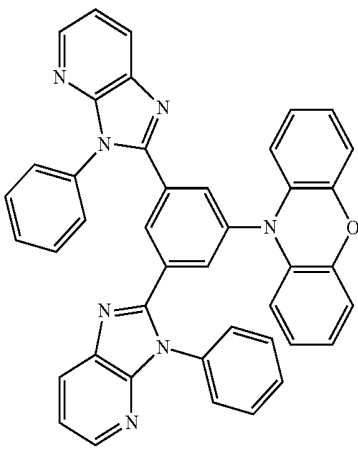


11

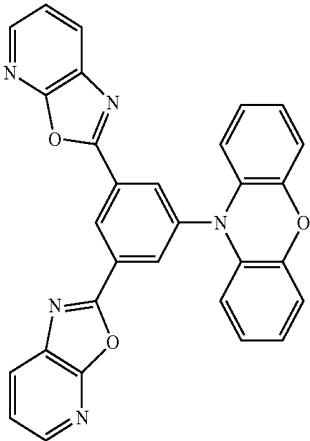


14

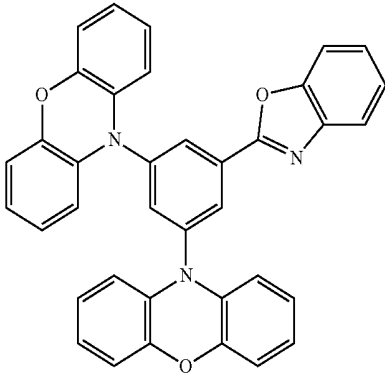


15

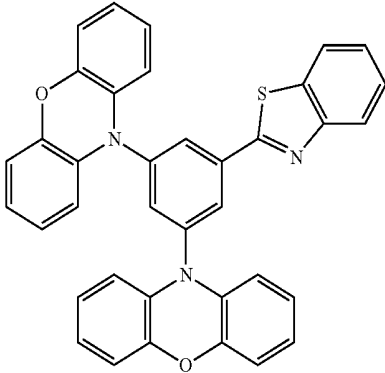


12

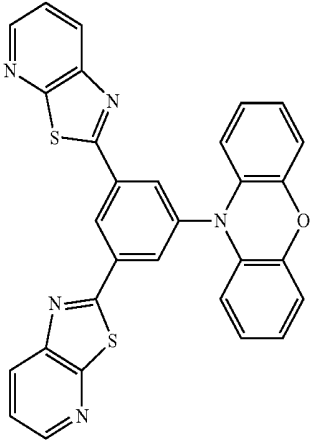


16

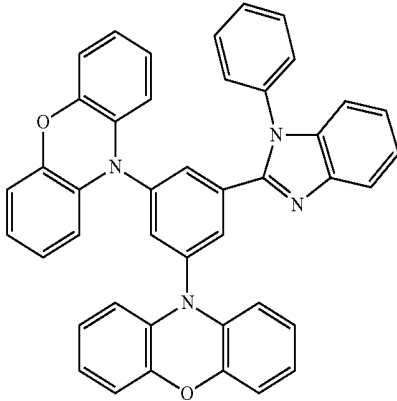


-continued

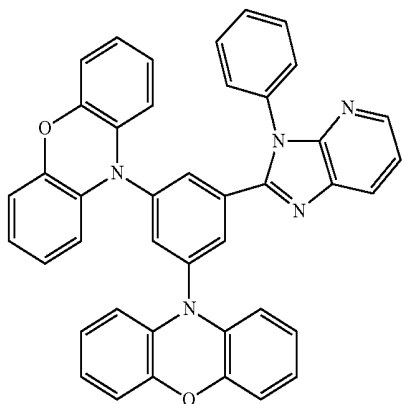


17

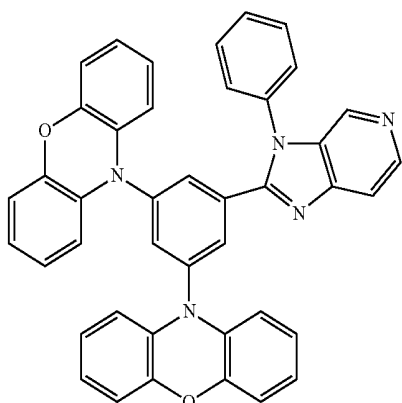

18

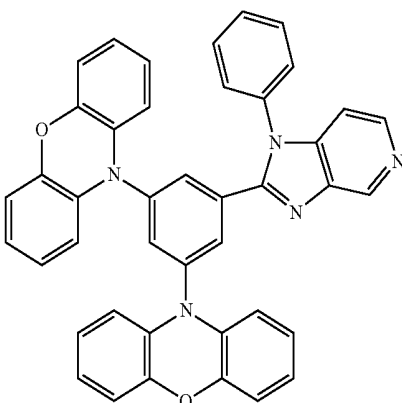


19

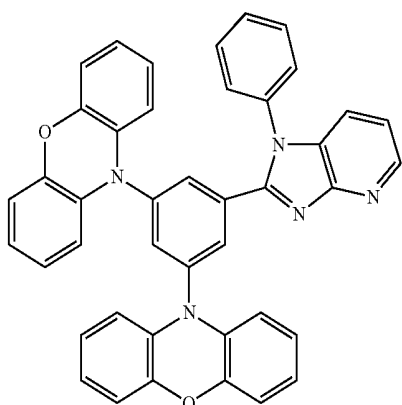


20


-continued

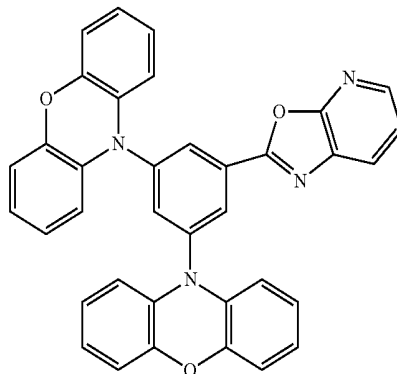


21

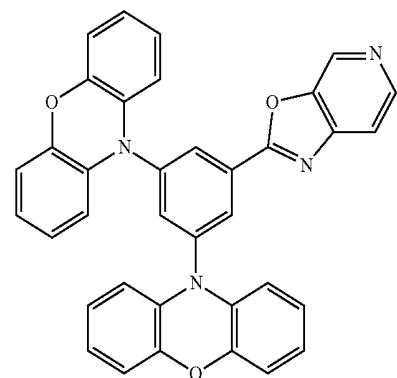

22




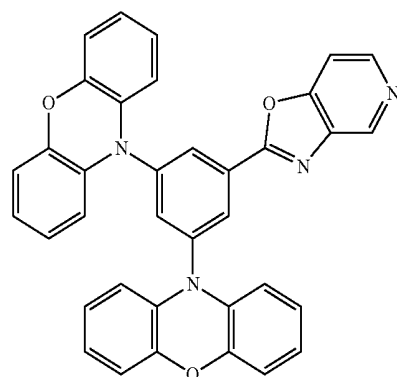


23




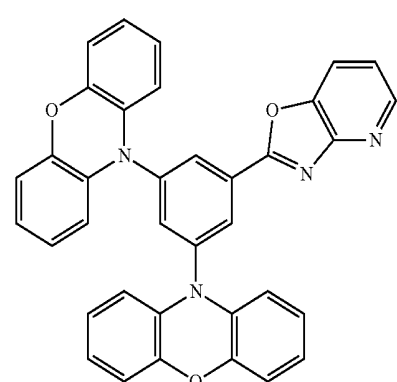


24

-continued

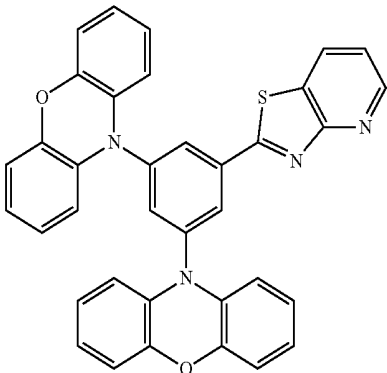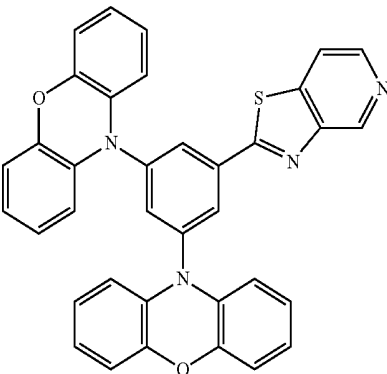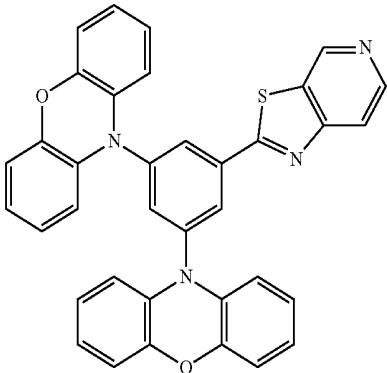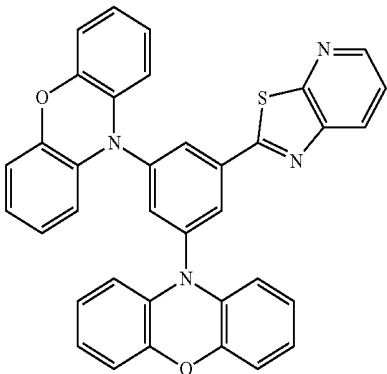


-continued

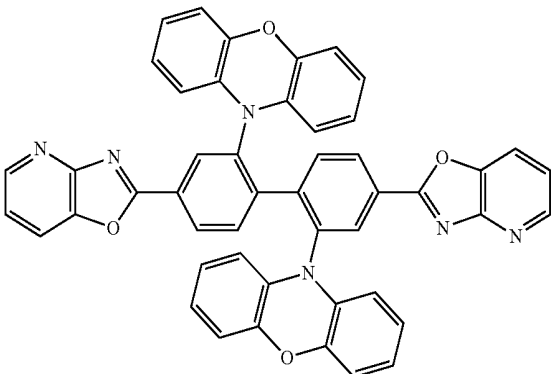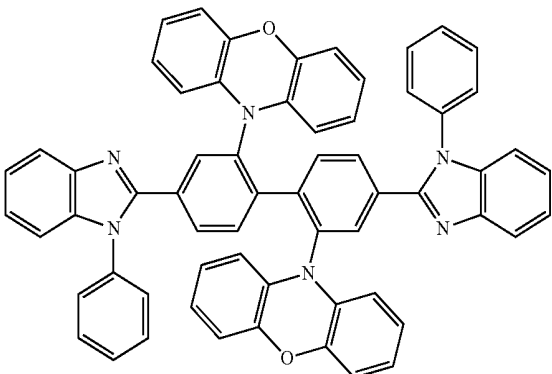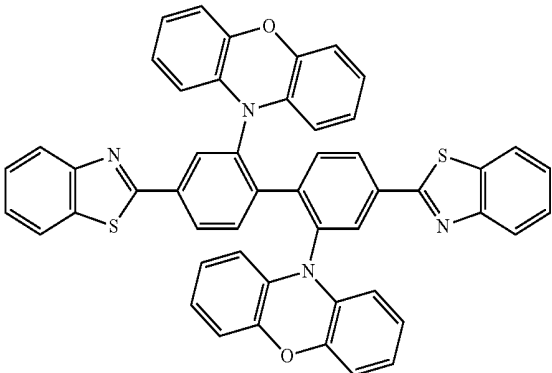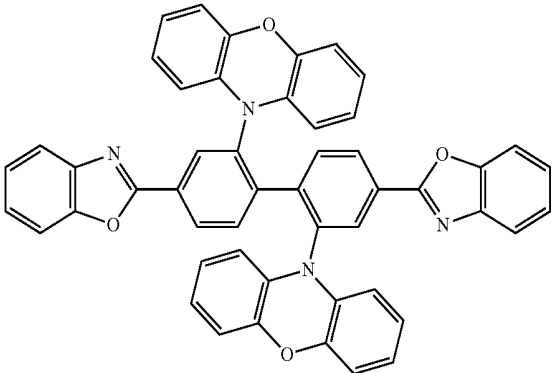


-continued


33

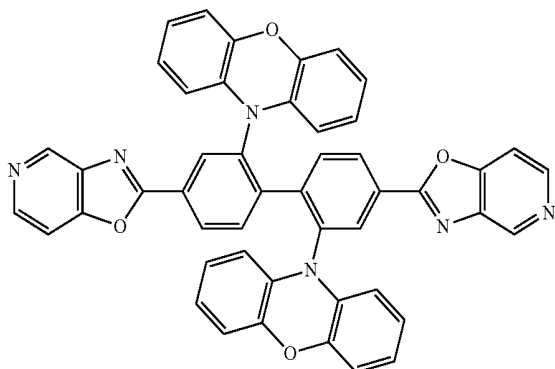


34

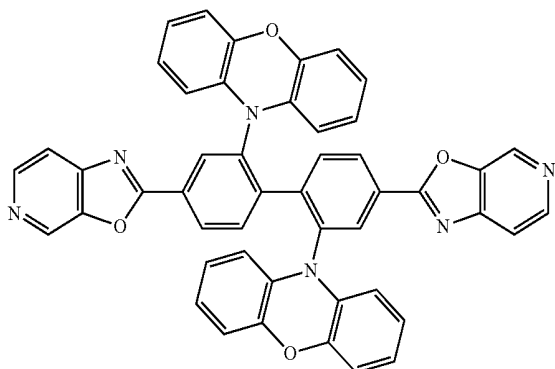

35

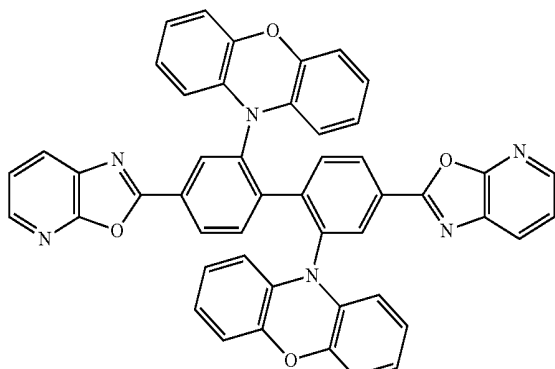


36

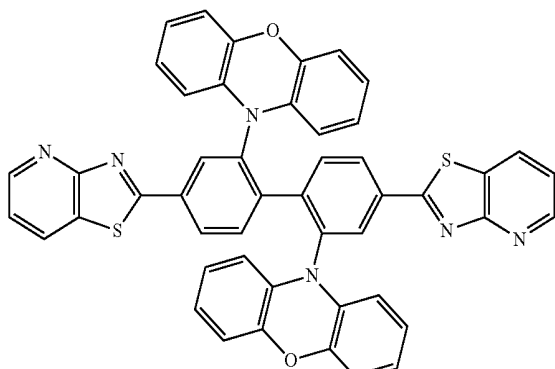


-continued


37

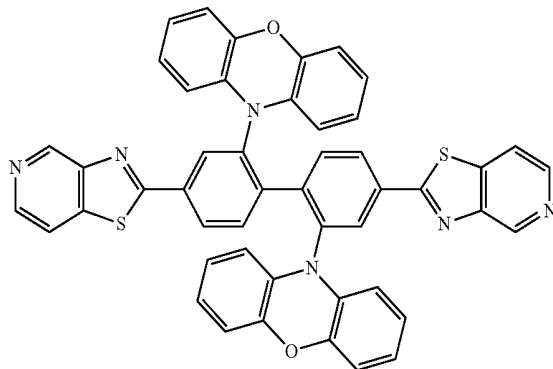


38

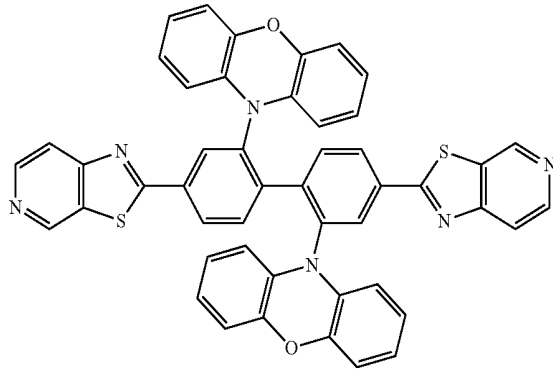


39

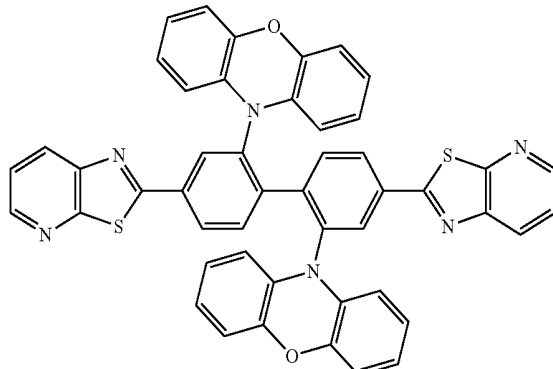






40

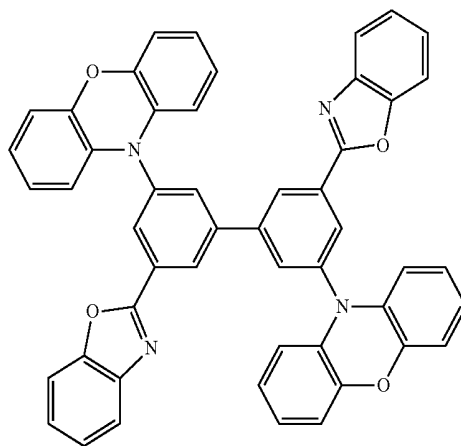


-continued

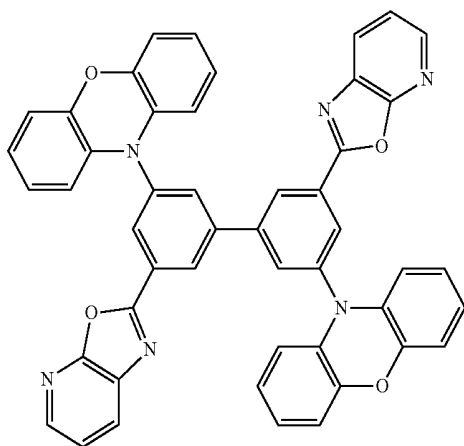






-continued

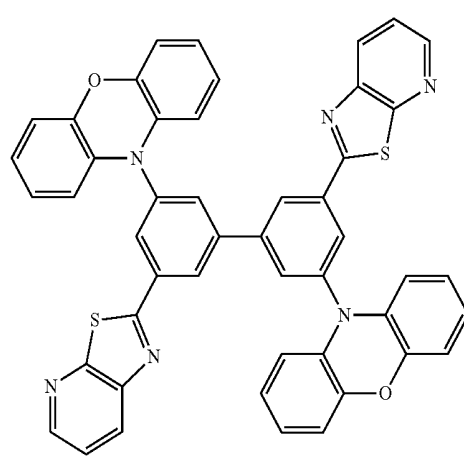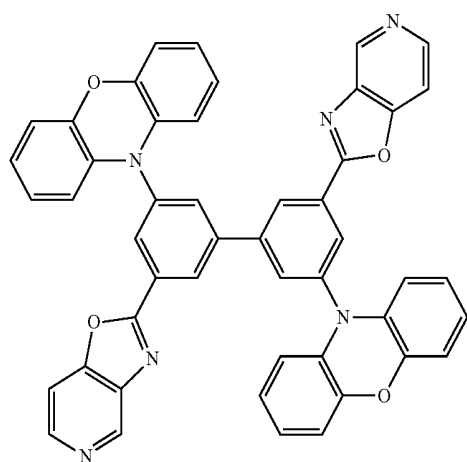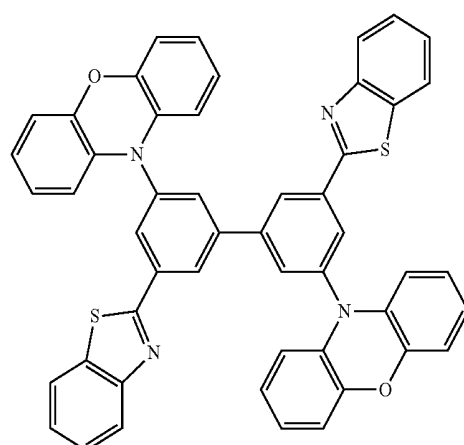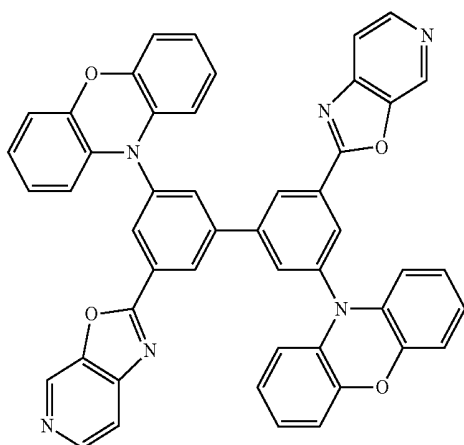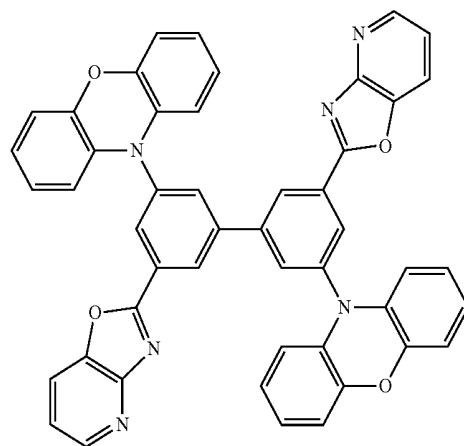


-continued

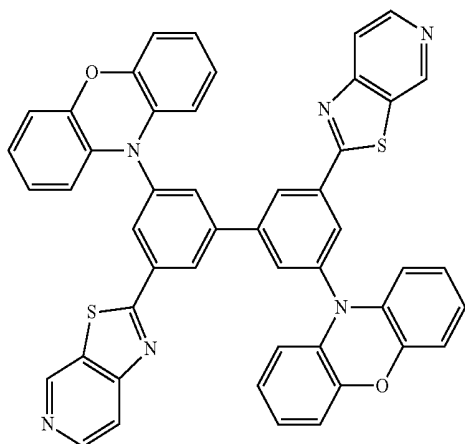

-continued

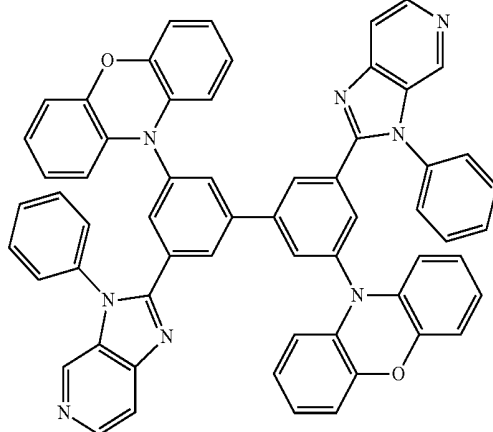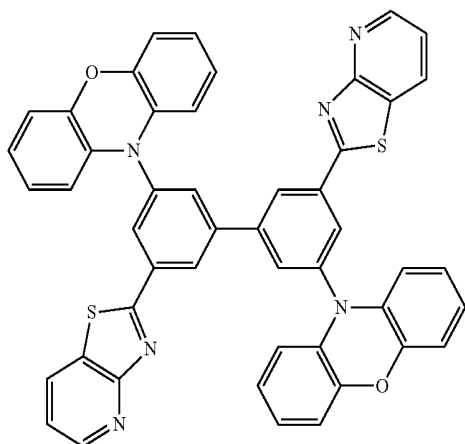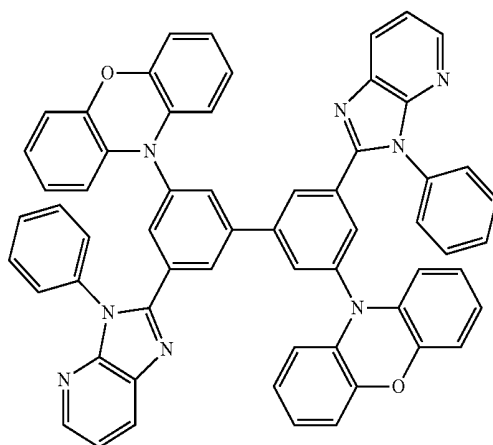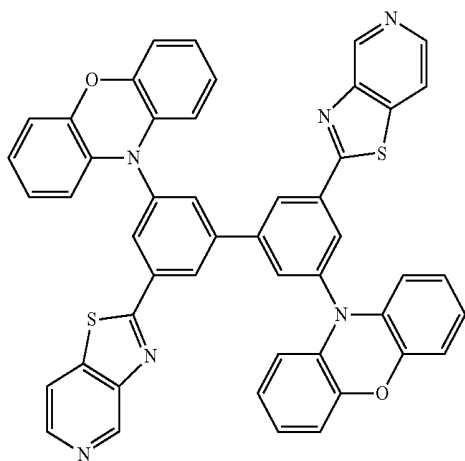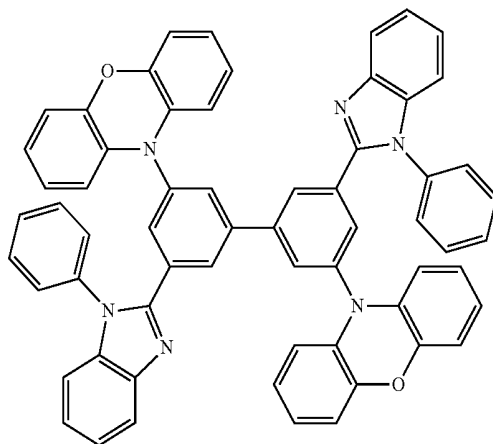


-continued

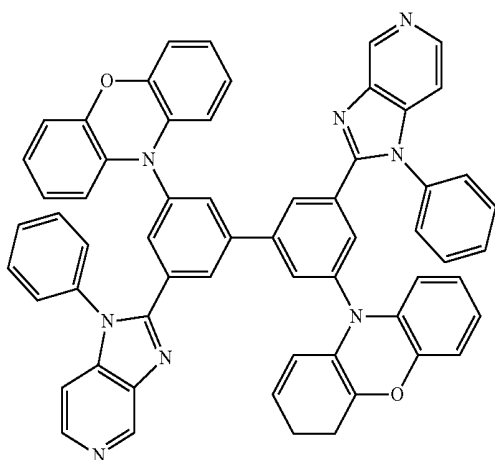


53


-continued

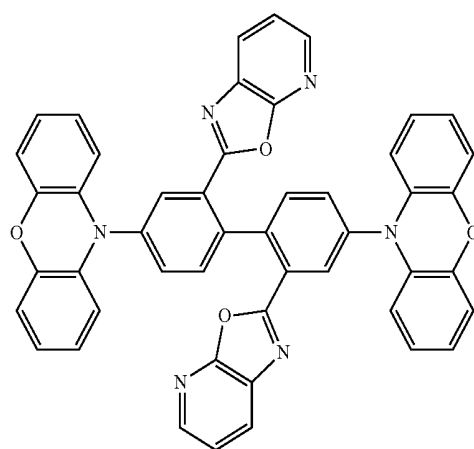


56

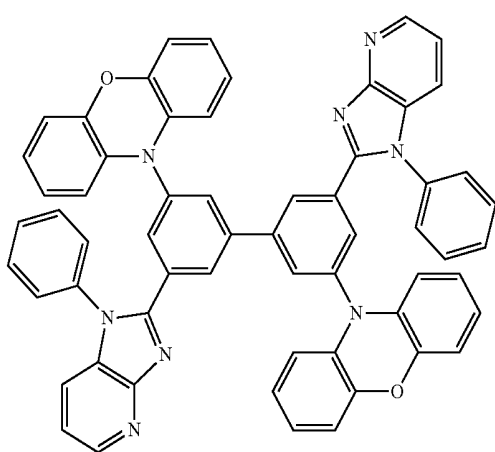


54

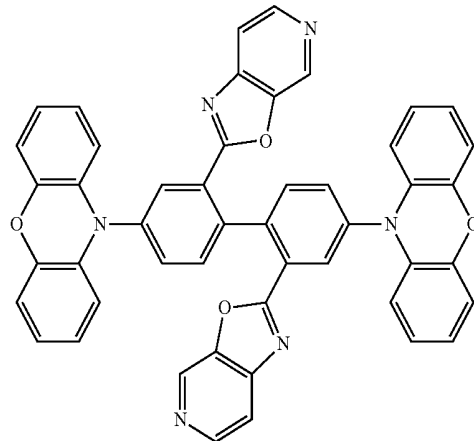

57

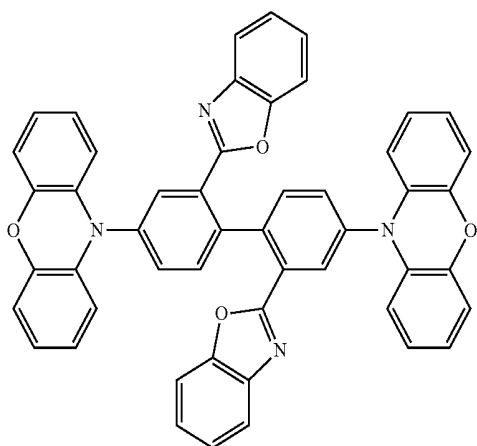


55

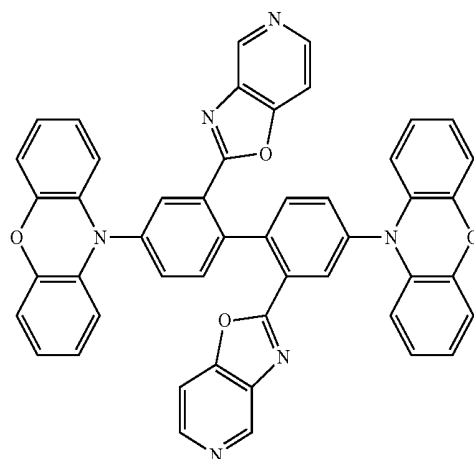

58


59

-continued

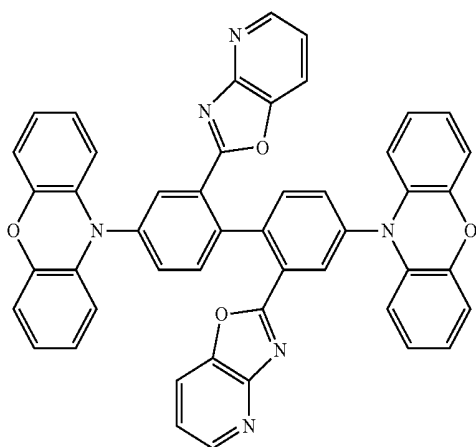


59

-continued

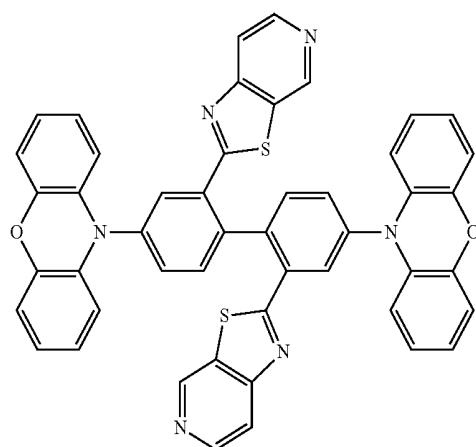


62


60

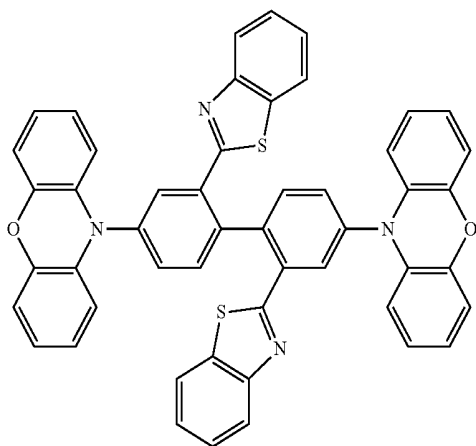


63

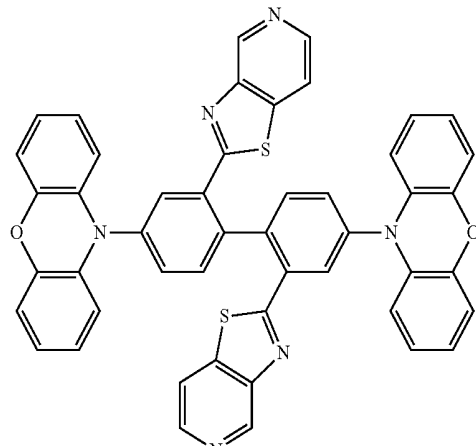


61

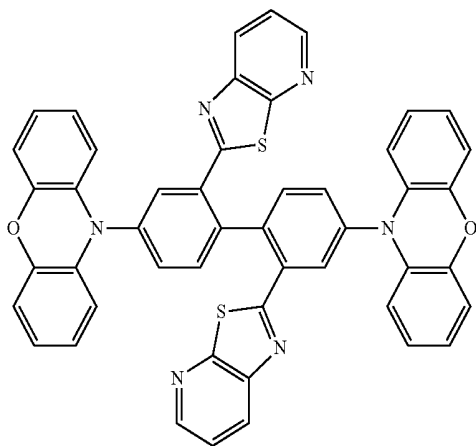

64

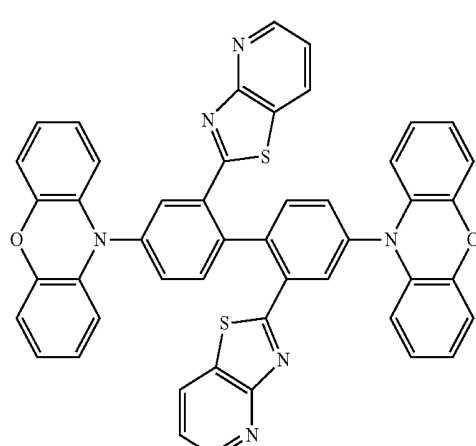


-continued

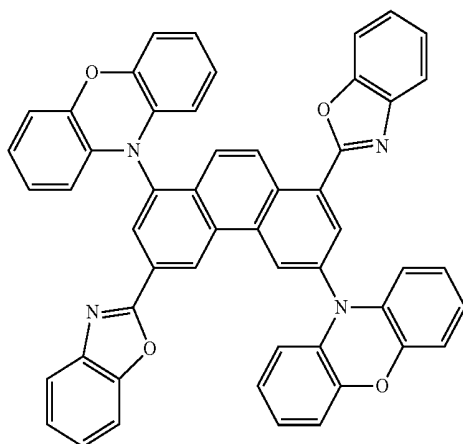


65


-continued

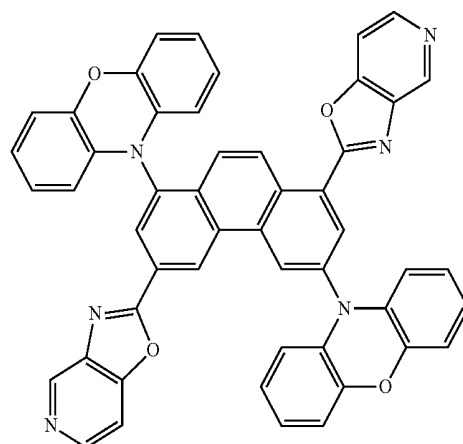


68

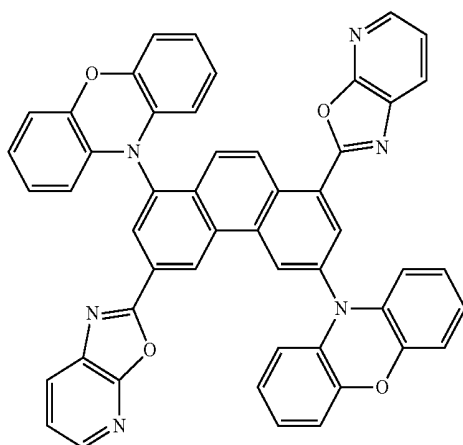


66

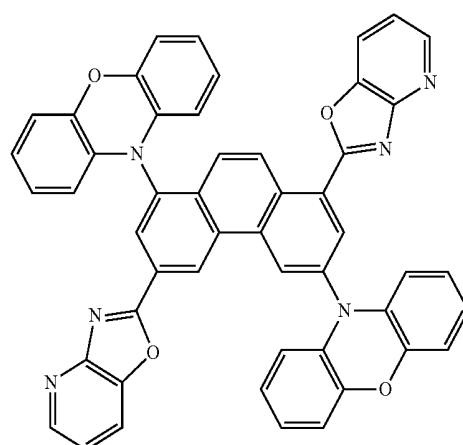

69

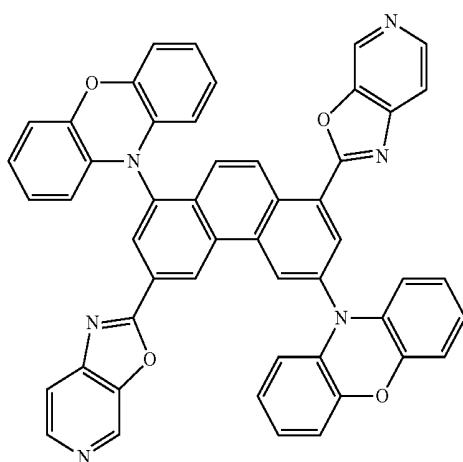


67

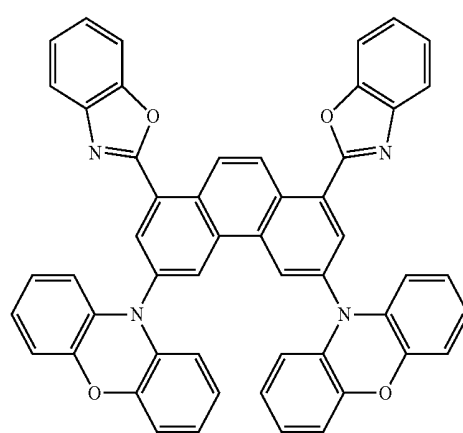


70

-continued

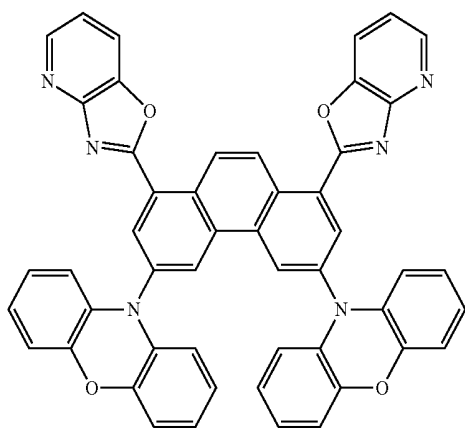


71


-continued

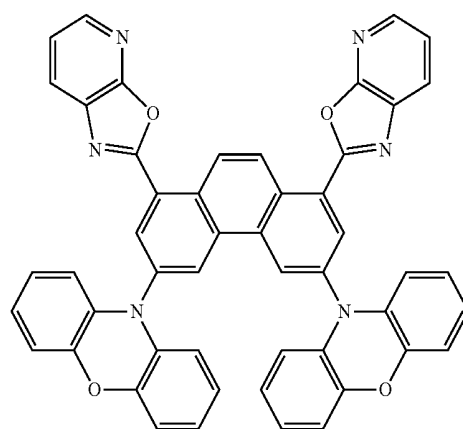


74

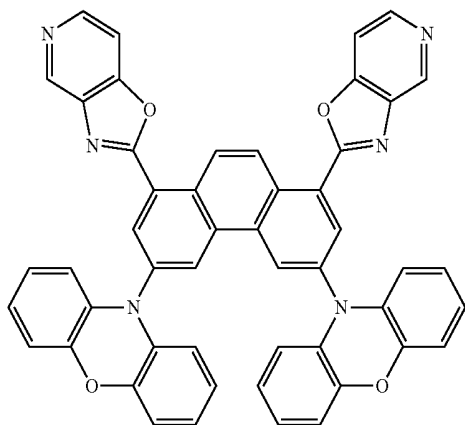


72

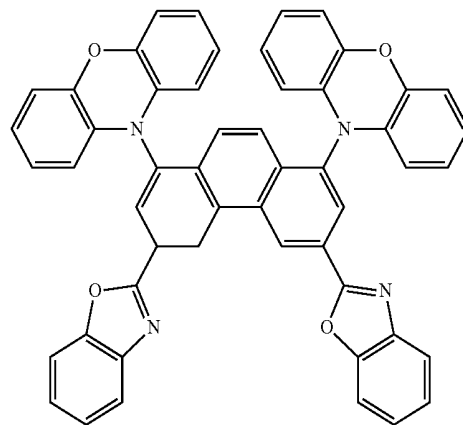

75

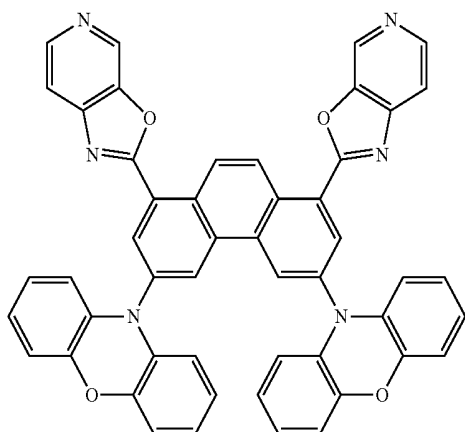


73

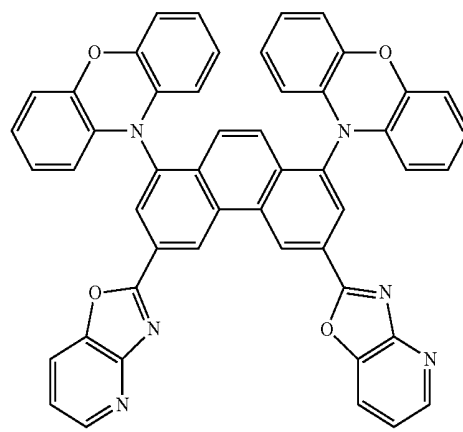


76

-continued

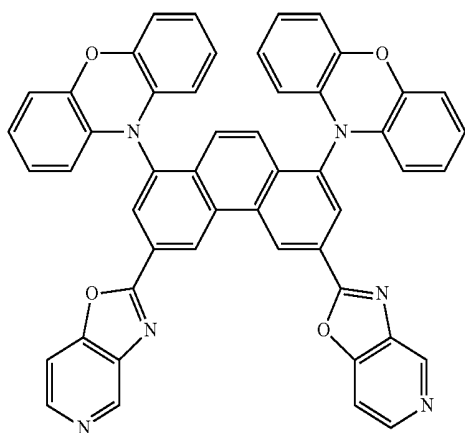


77


-continued

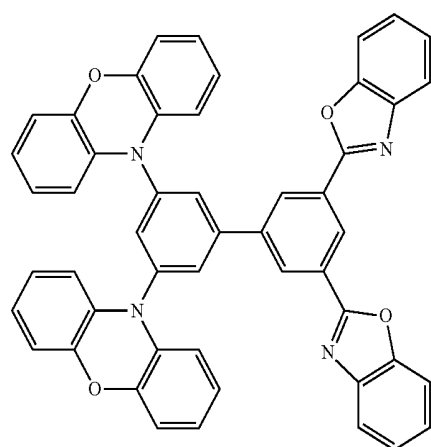


80

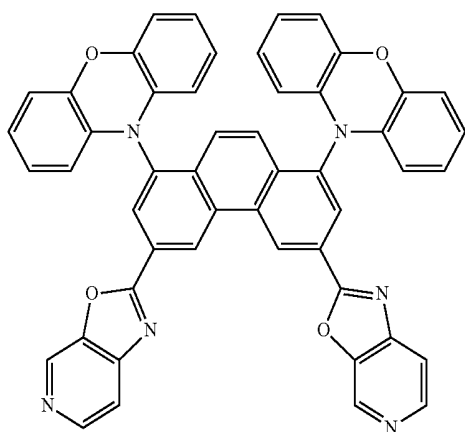


78

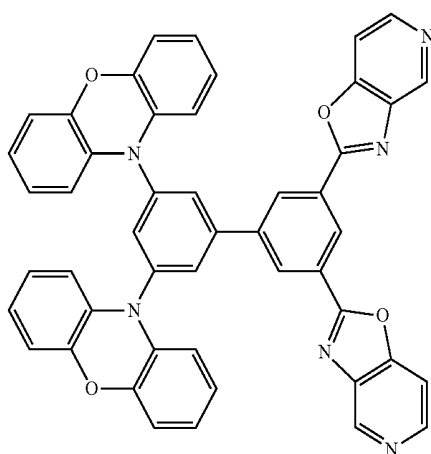

81

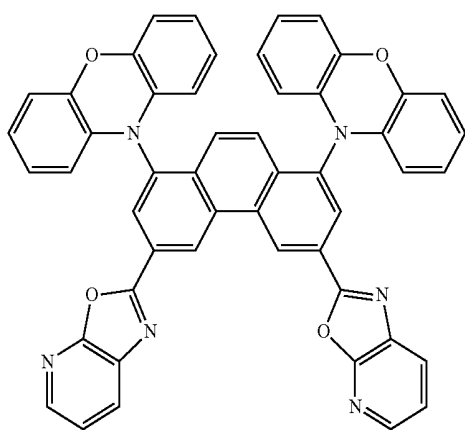


79

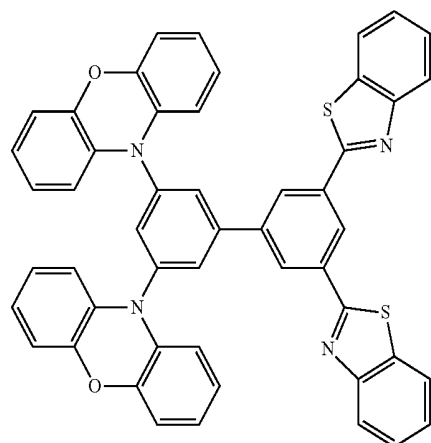


82

-continued

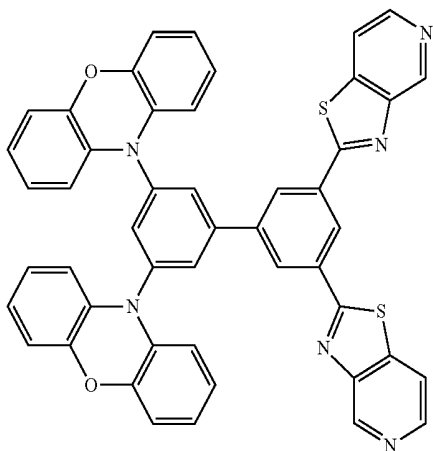


83


-continued

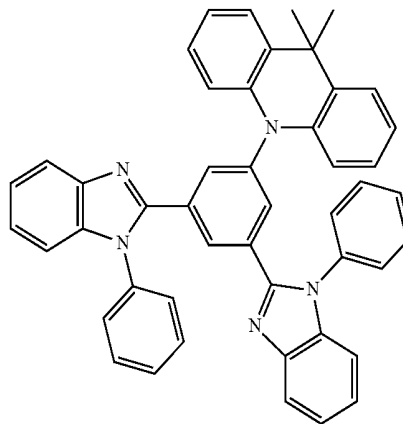


86

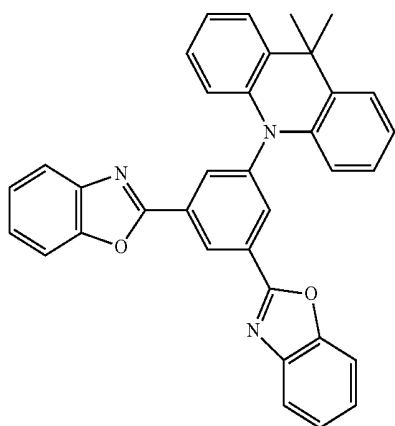


84

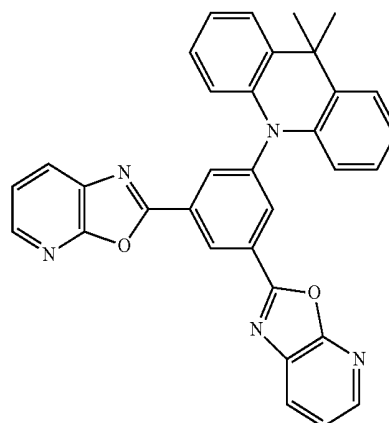

87

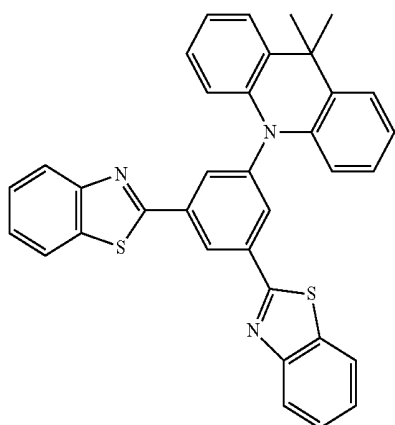


85

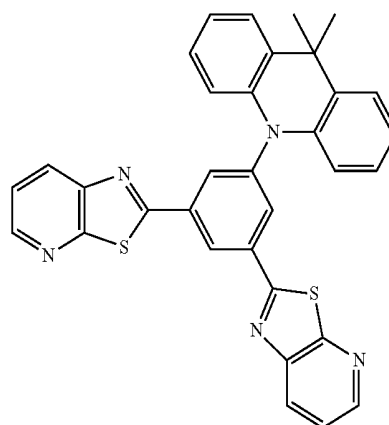


89

-continued

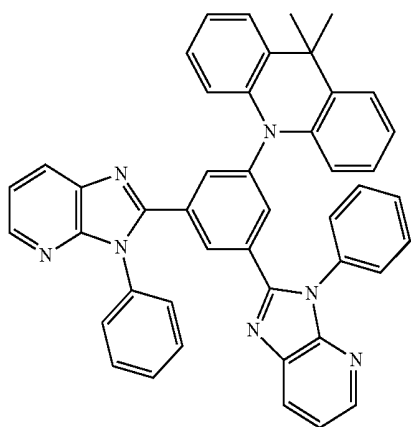


90


-continued

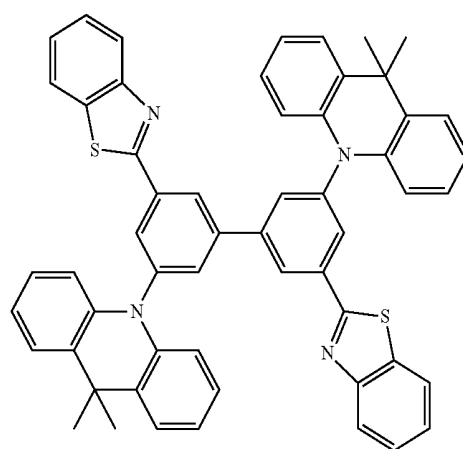


93

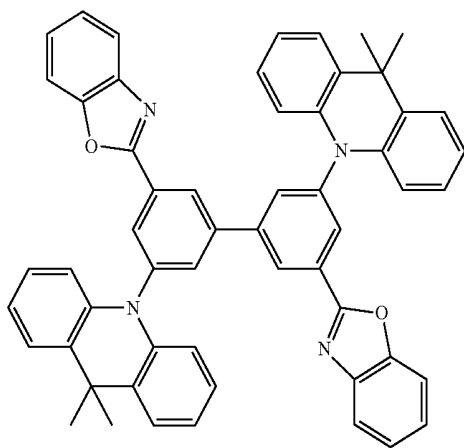


91

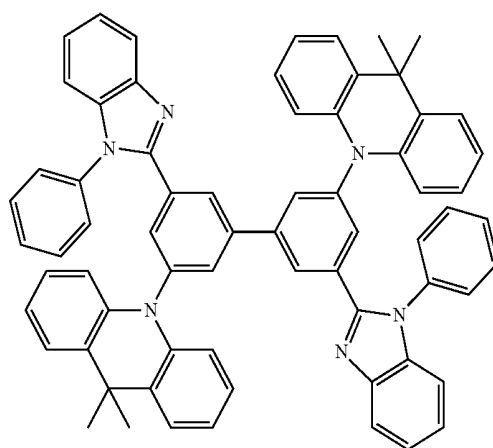

94

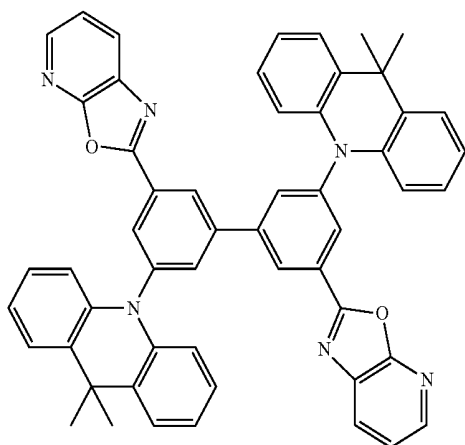


92

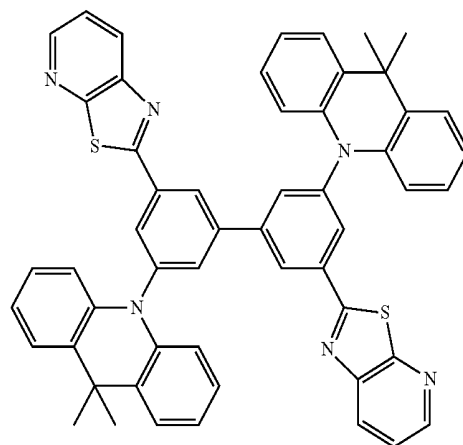


95

-continued

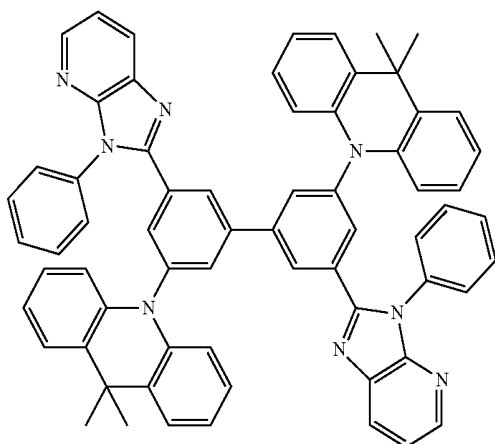


96


-continued

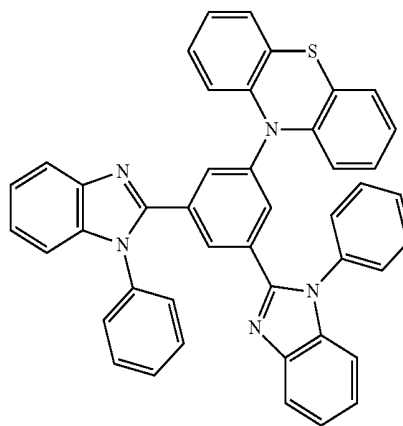


99

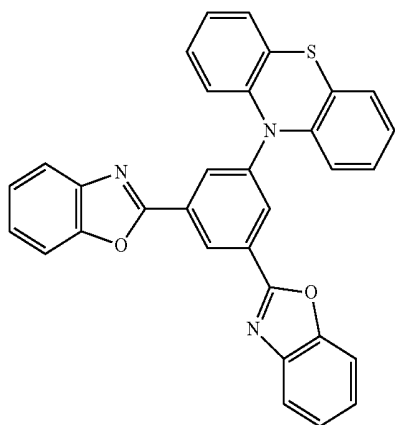


97

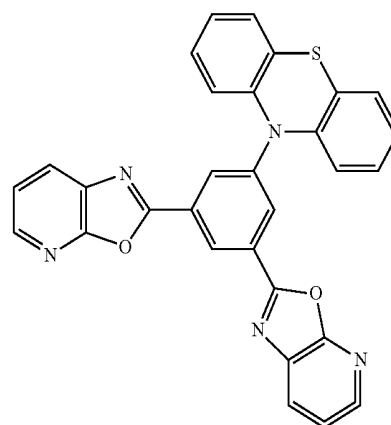

100

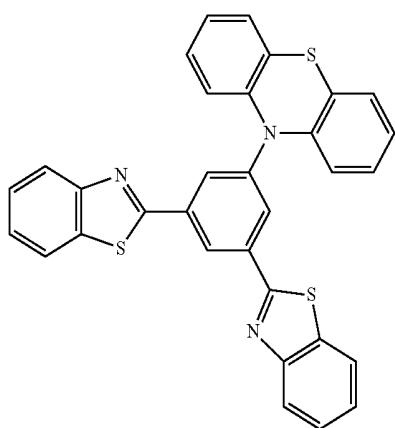


98

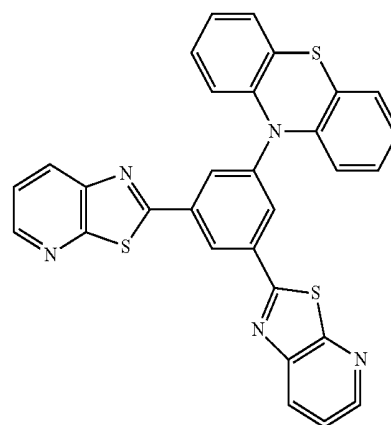


101

-continued

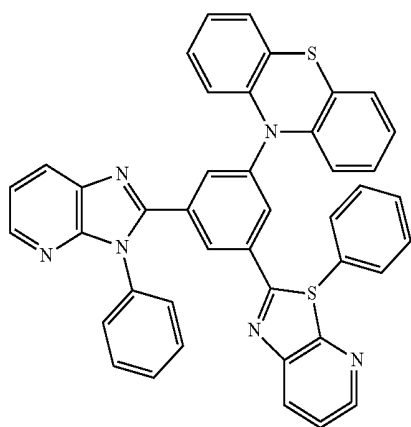


102


-continued

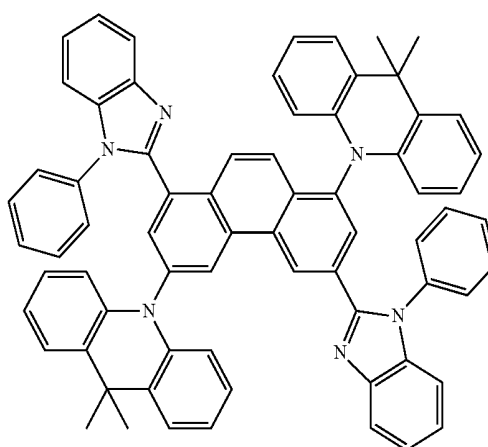


105

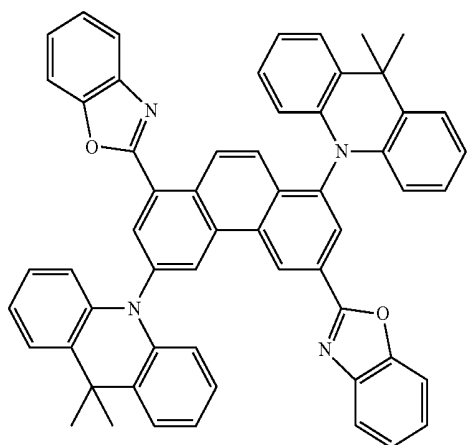


103

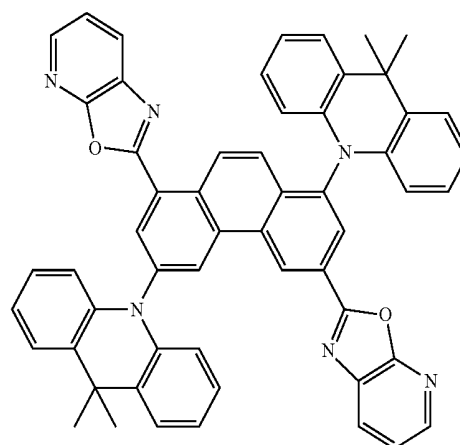

106

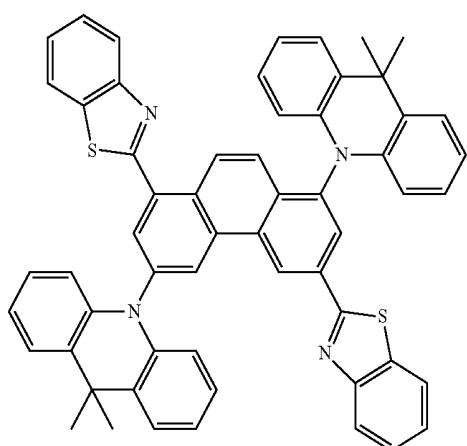


104

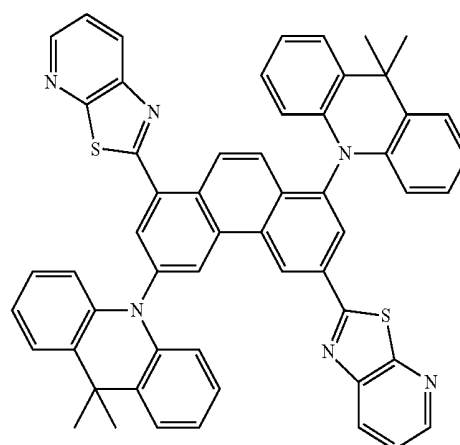


107

-continued

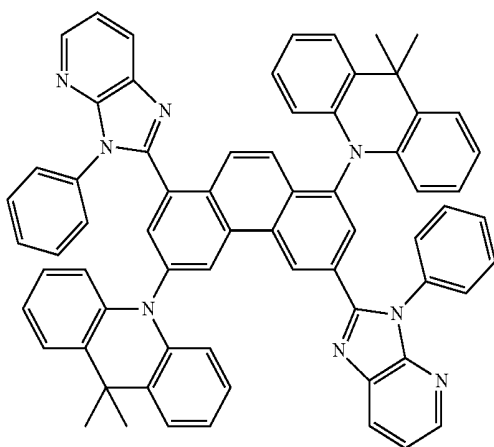


108


-continued

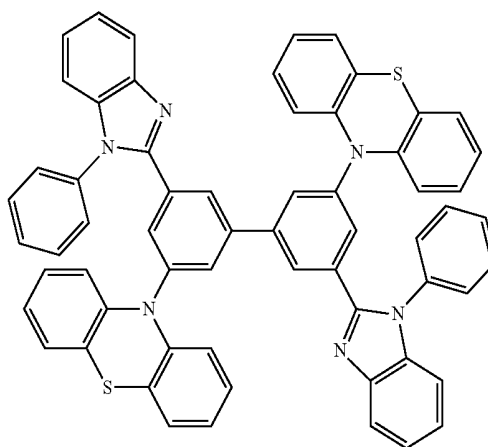


111

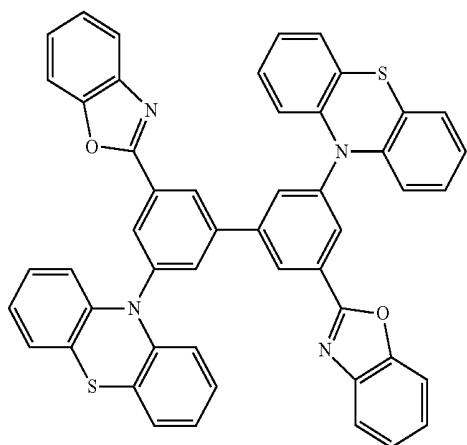


109

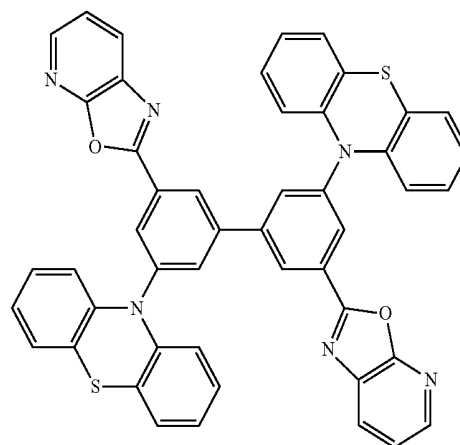

112

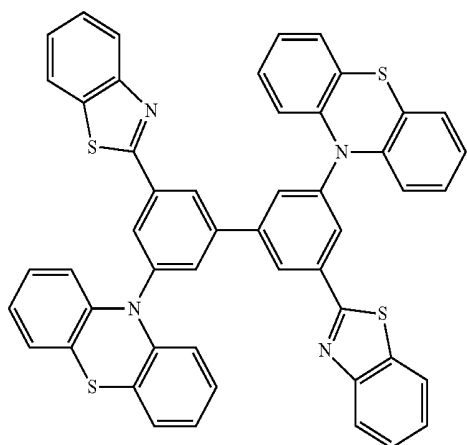


110

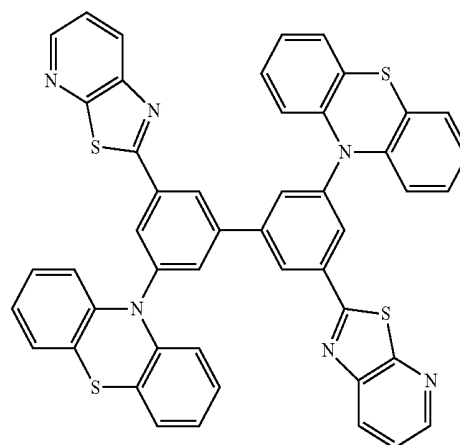


113

-continued

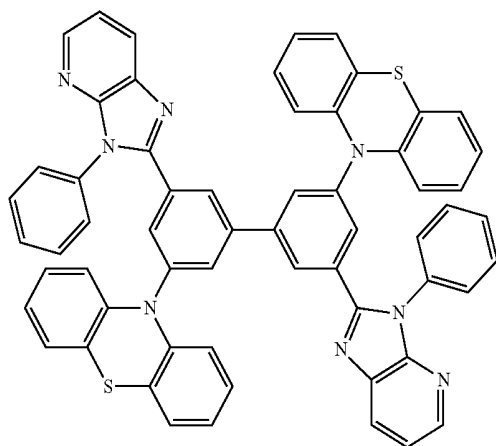


114


-continued

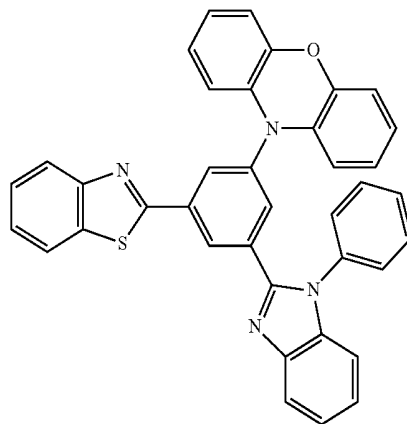


117

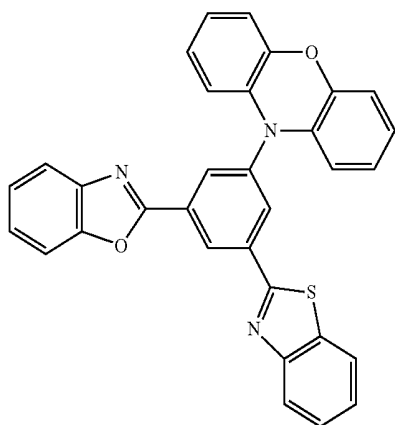


115

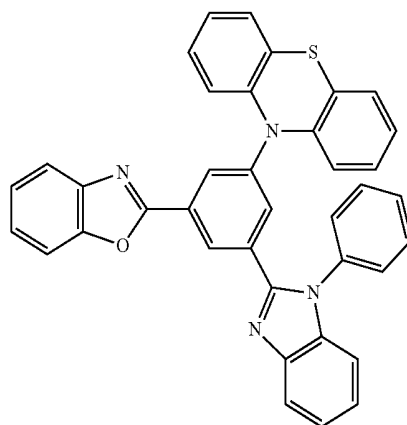

118

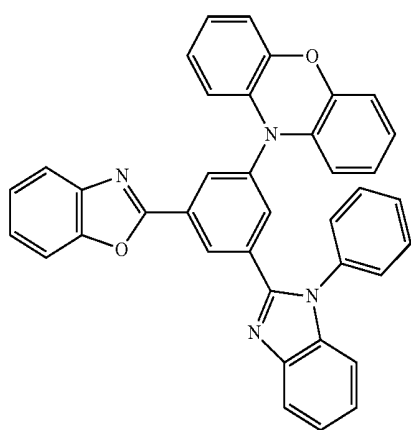


116

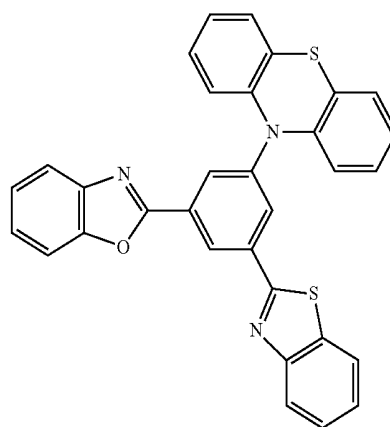


119

-continued

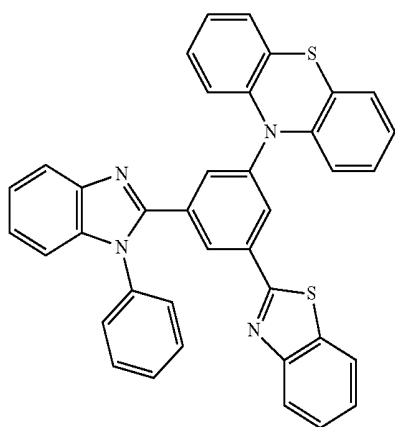


120


-continued

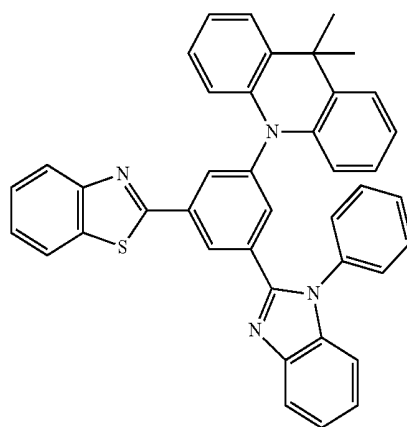


123

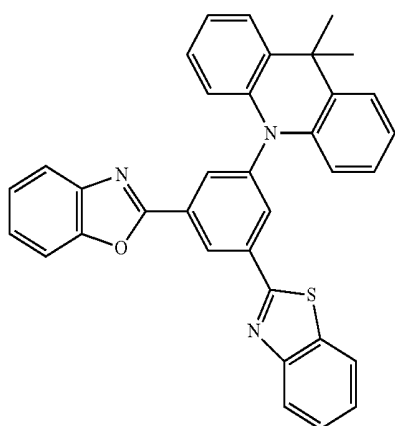


121

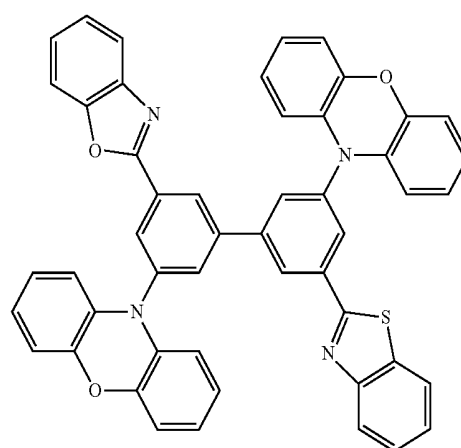

124

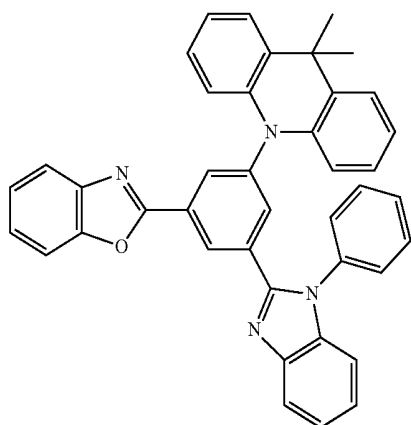


122

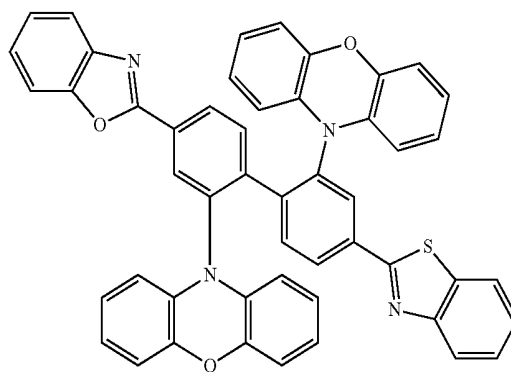

125


-continued

126

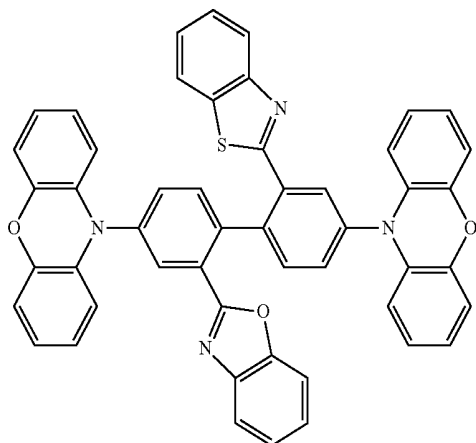


-continued


129

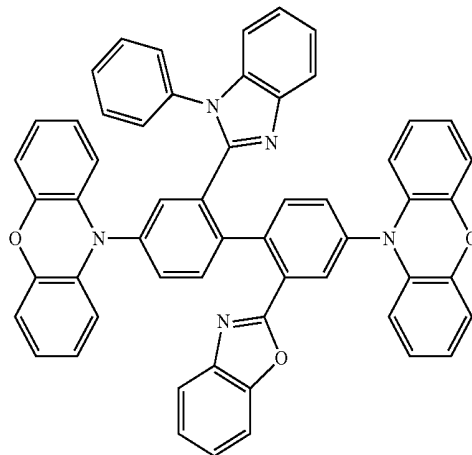


127

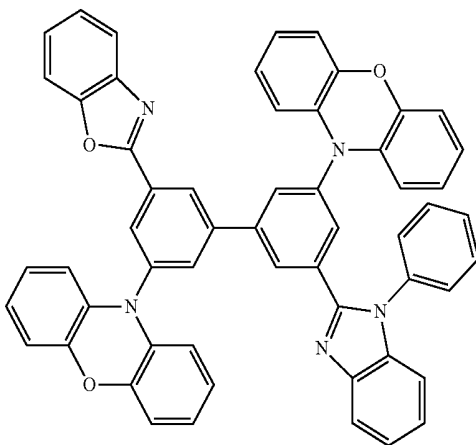


130

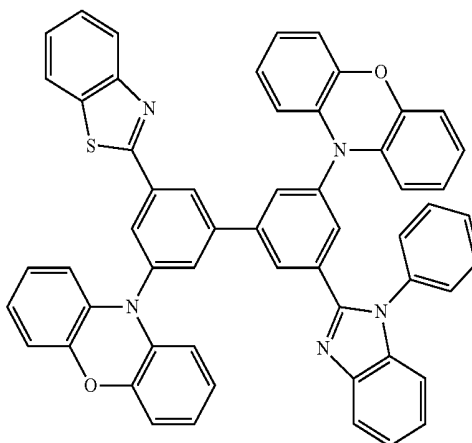


128

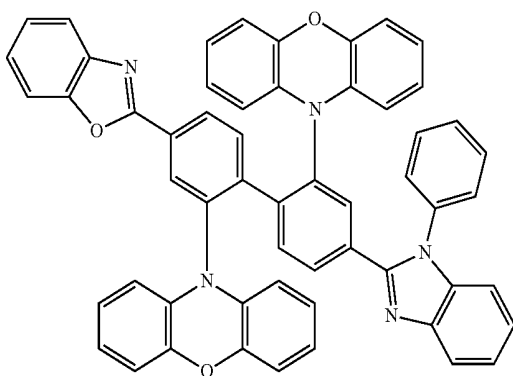

131

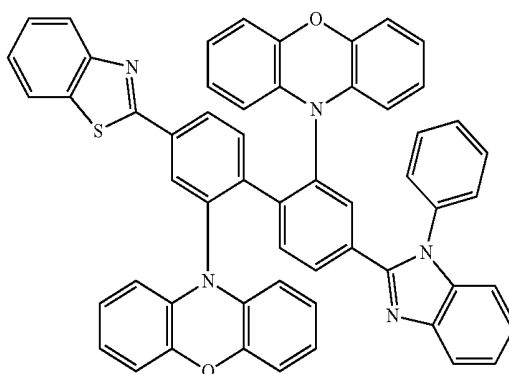


-continued

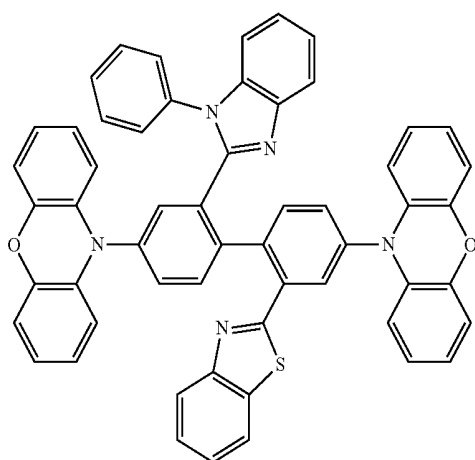


132


-continued

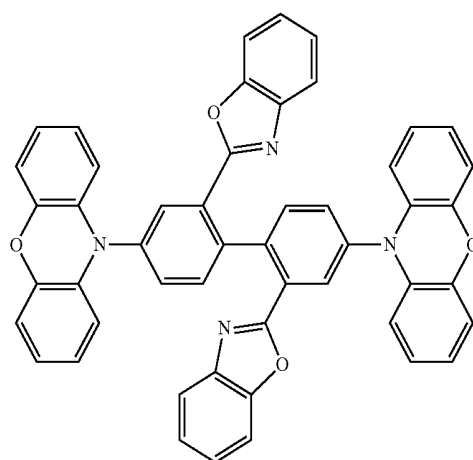


135

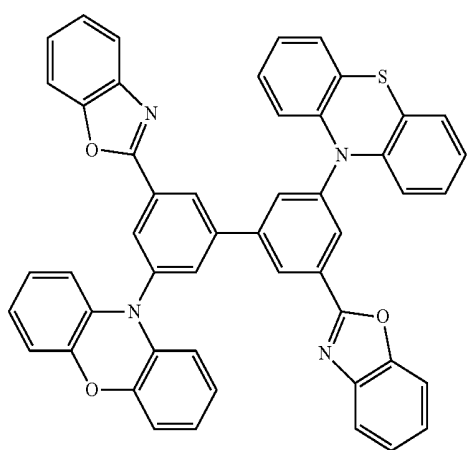


133

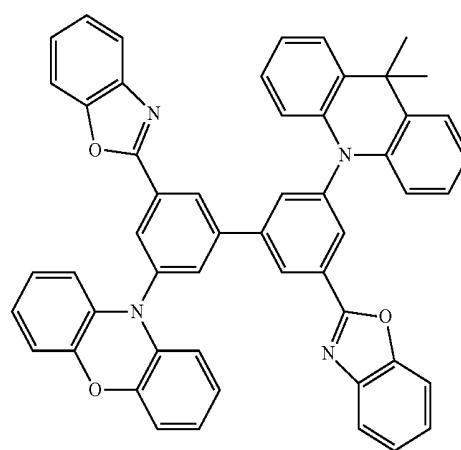

136

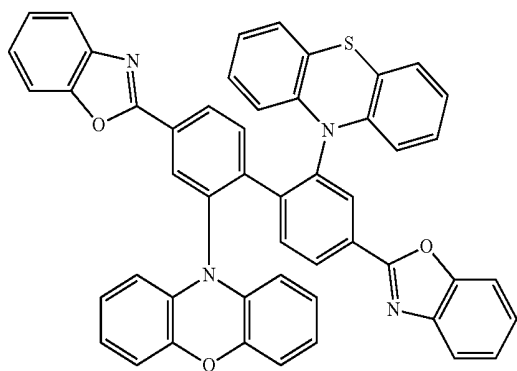


134

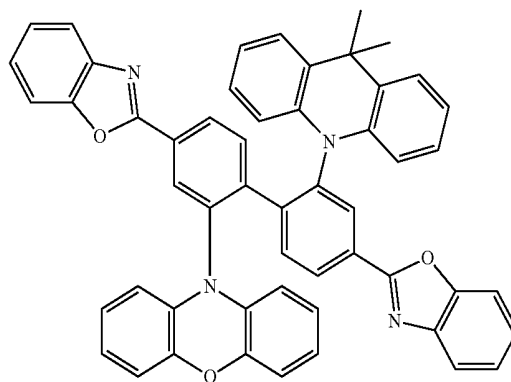

137


-continued

138

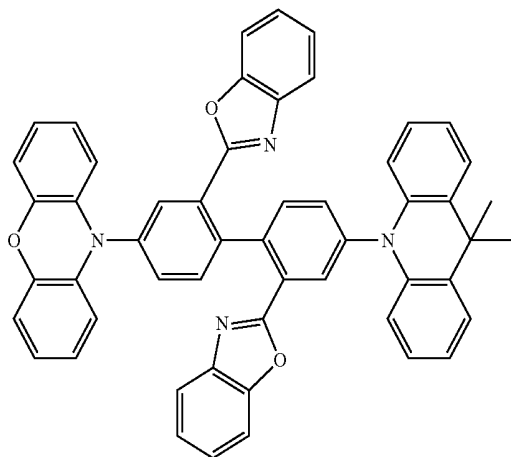


-continued


141

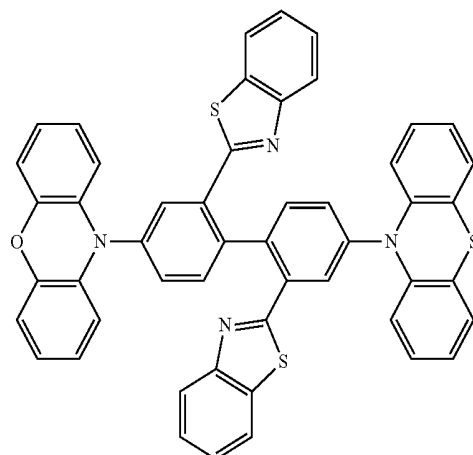


139

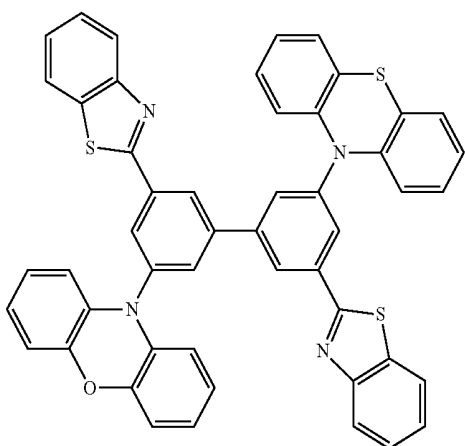


142

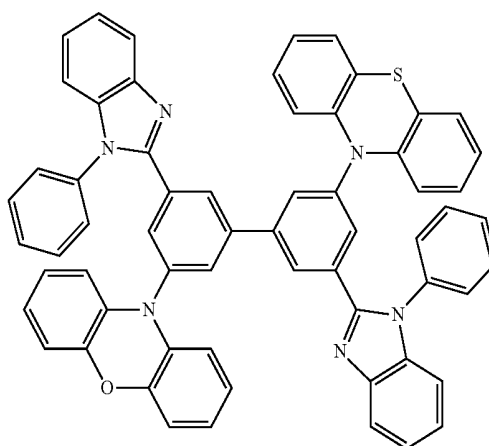

140

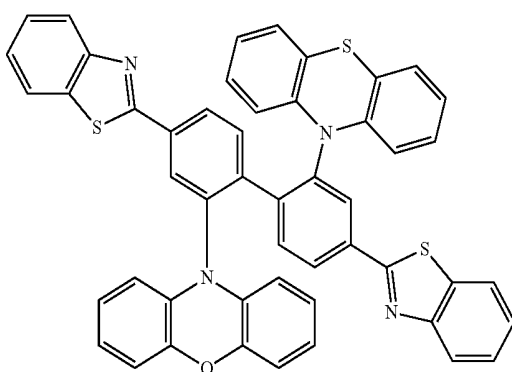


143

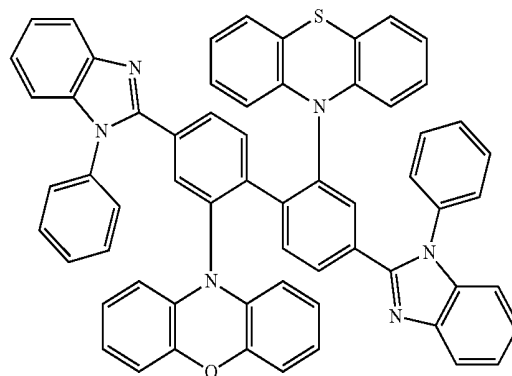


-continued

144

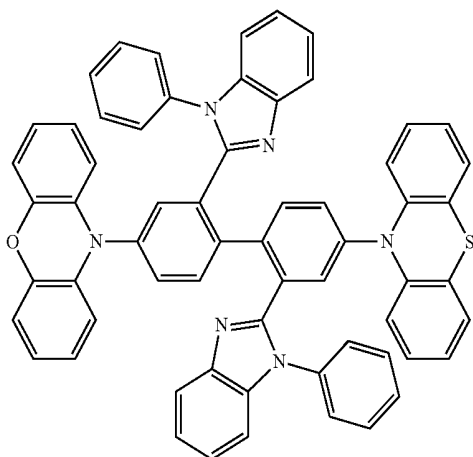


-continued


147

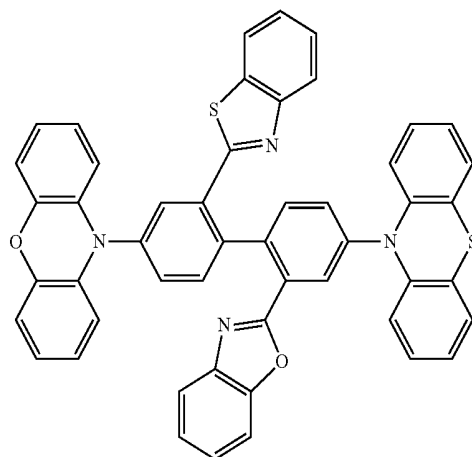


145

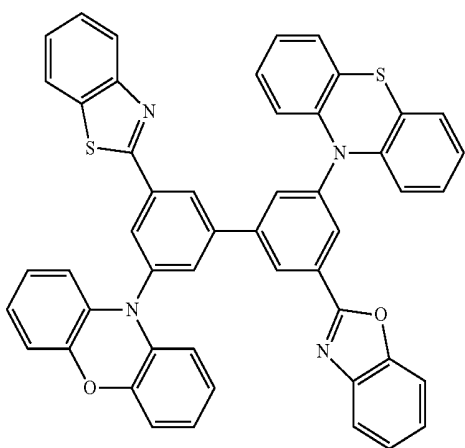


148

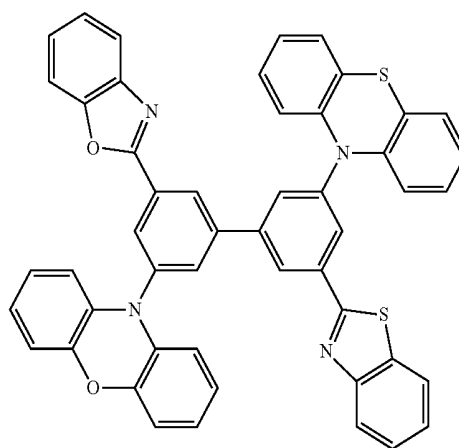


146

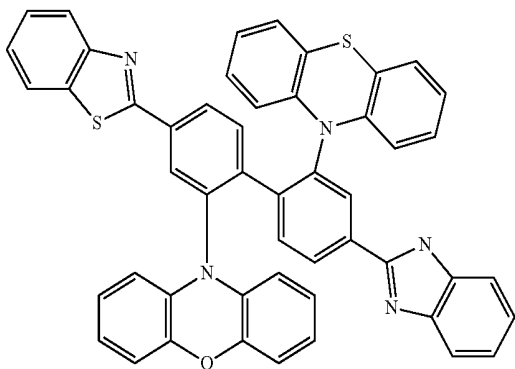

149

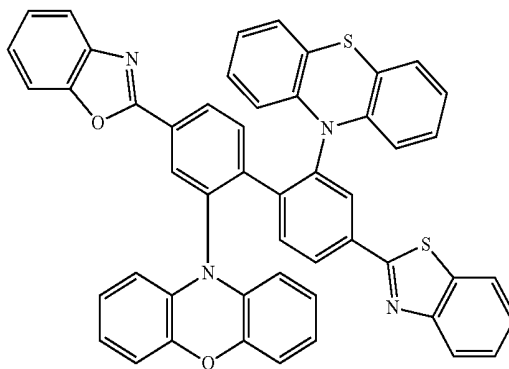


-continued

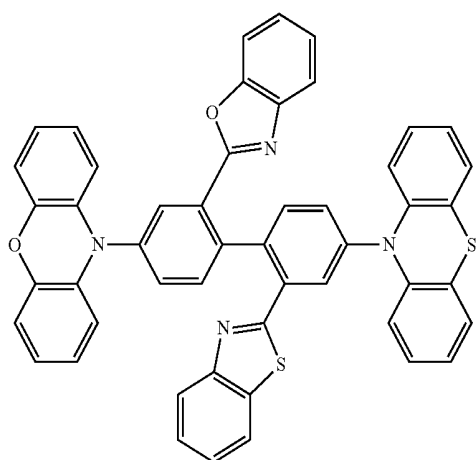


150


-continued

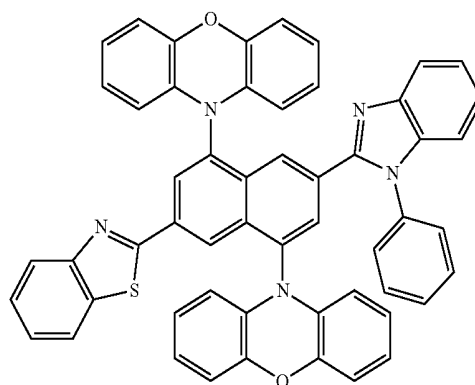


154

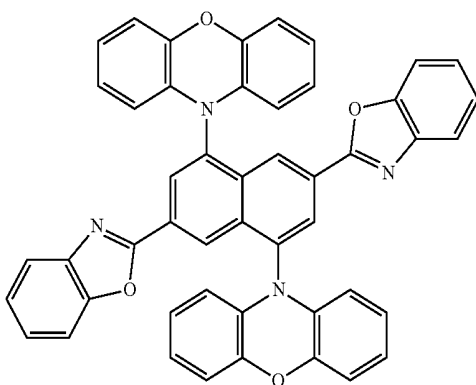


151

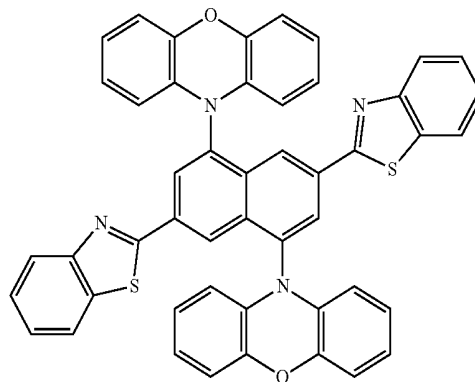


155

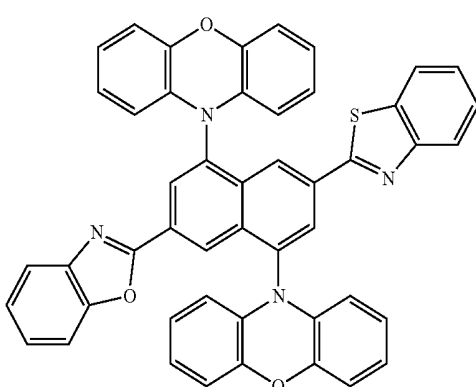


152

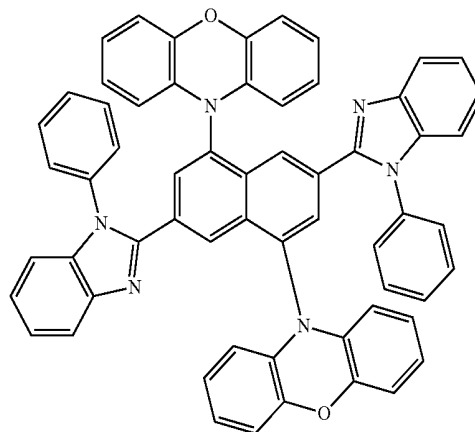

156

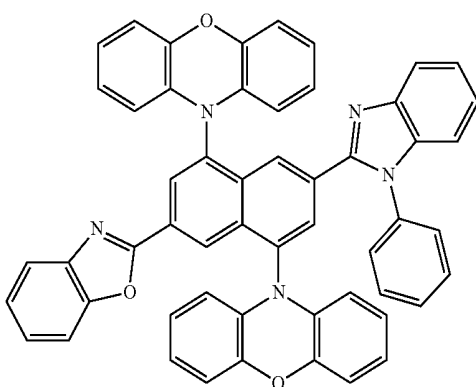


153

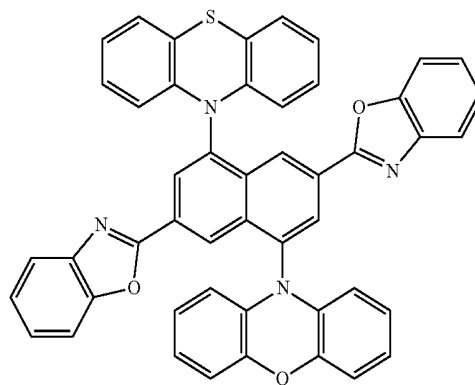


157

-continued

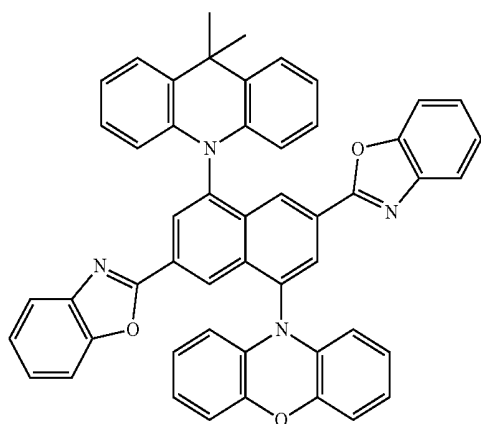


158


-continued

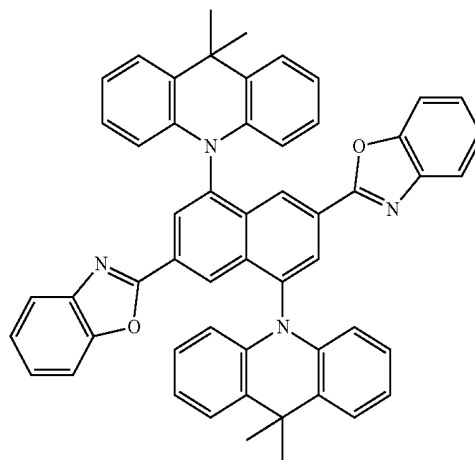


161

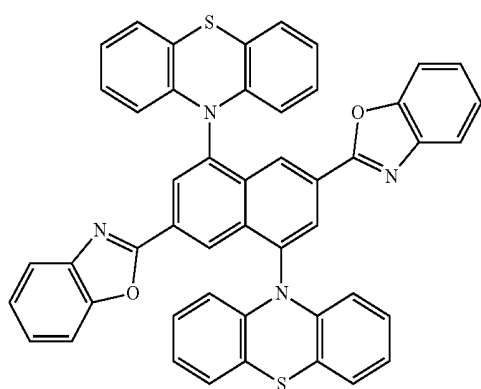


159

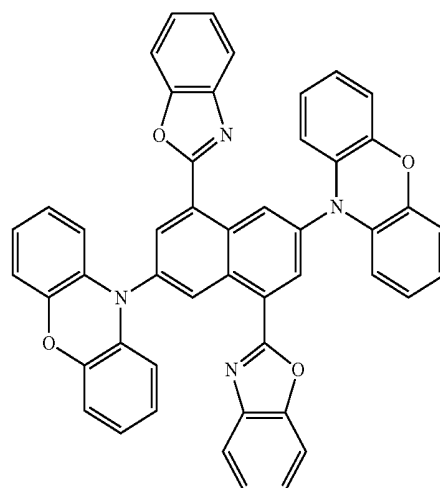

162

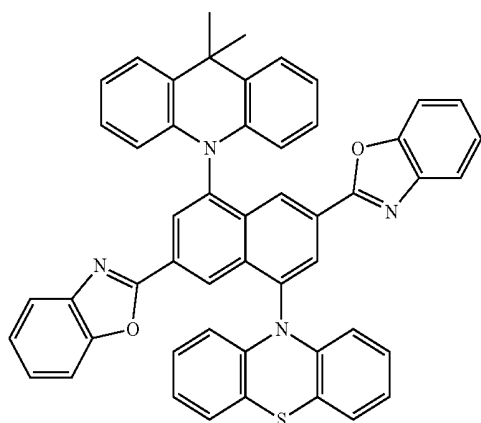


160

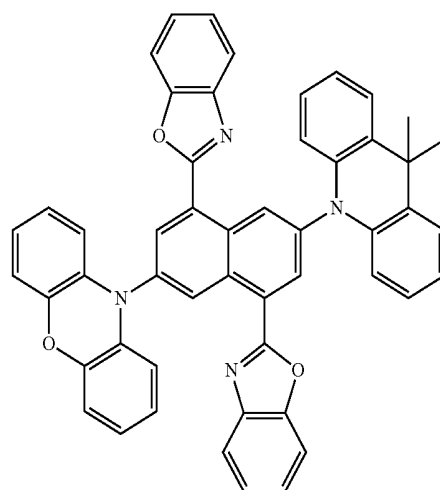


163


-continued

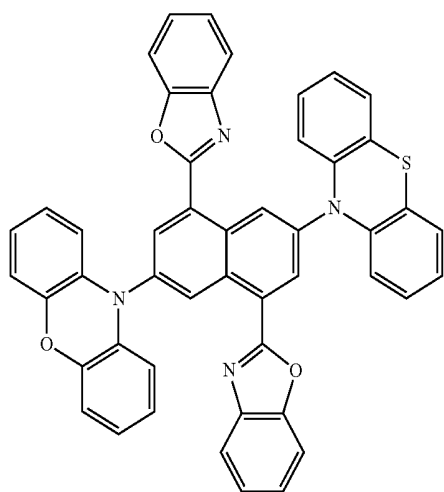


-continued

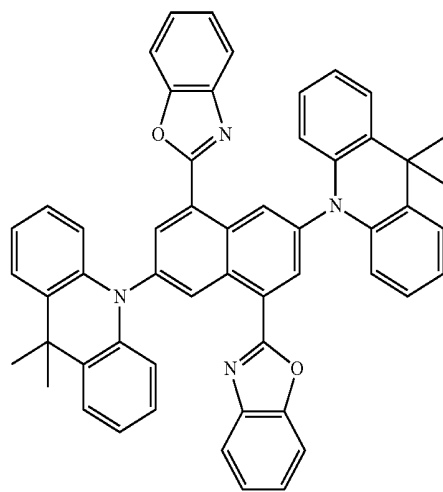


165

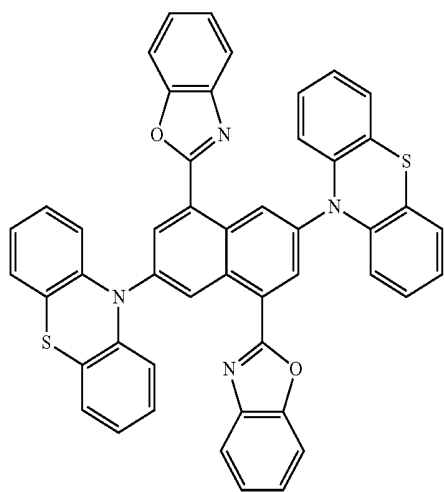


168

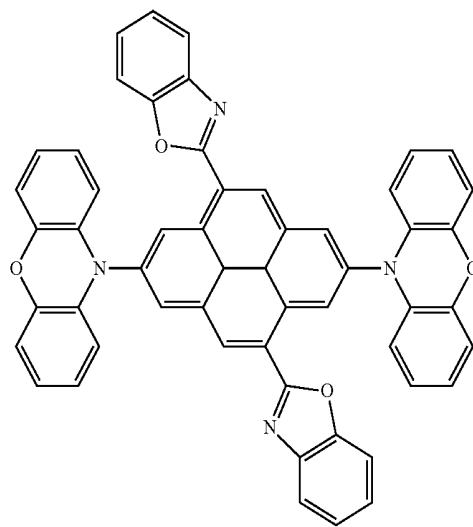


166

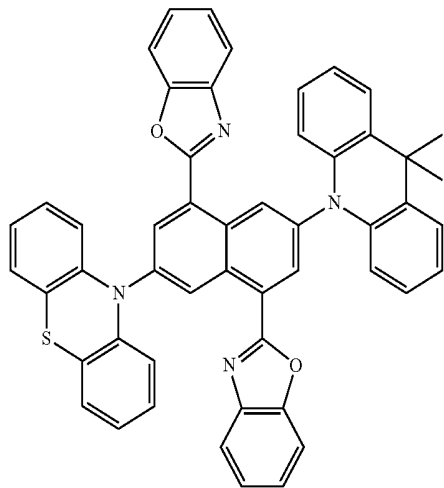

169

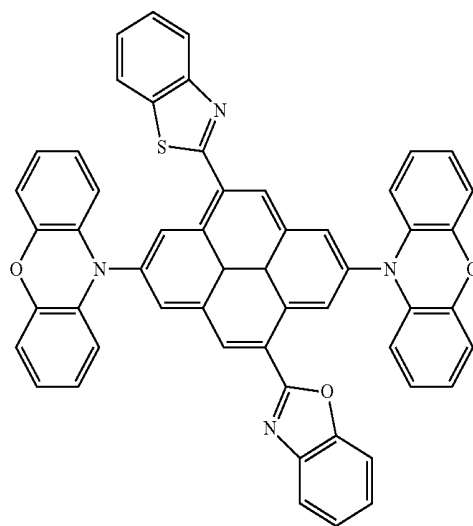


-continued

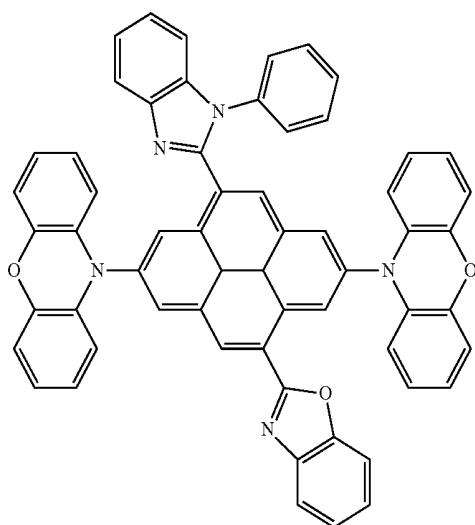


170



-continued

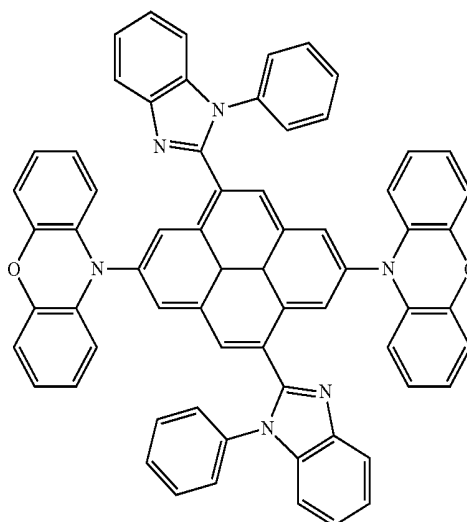

173

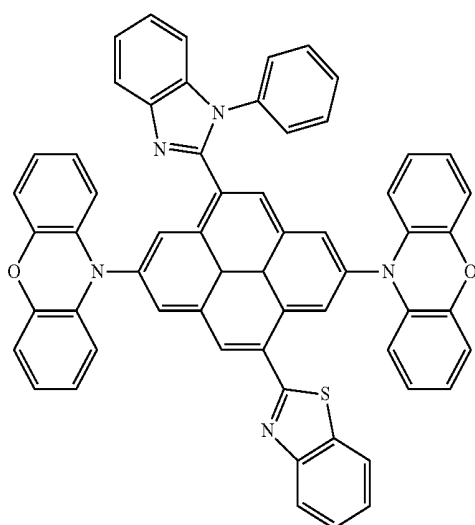and
174


171

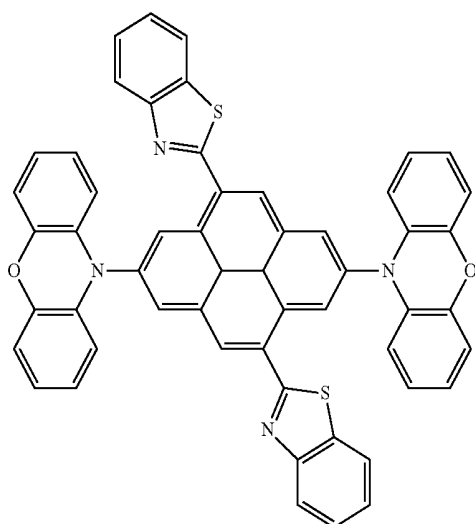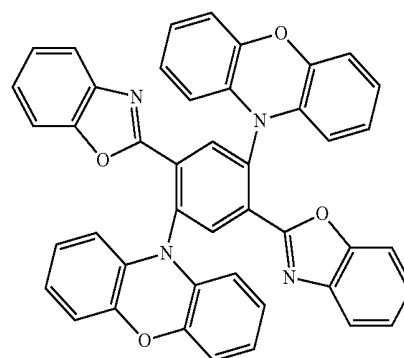

172

15. A process for manufacturing an organic optoelectronic device, comprising providing an anode, a cathode and one or more organic layers located between the anode and the cathode, wherein at least one layer of the organic layers comprises a compound of claim 1.

16. An organic optoelectronic device, comprising an anode, a cathode and one or more organic layers located between the anode and the cathode, wherein at least one layer of the organic layers comprises a compound of Formula (I):

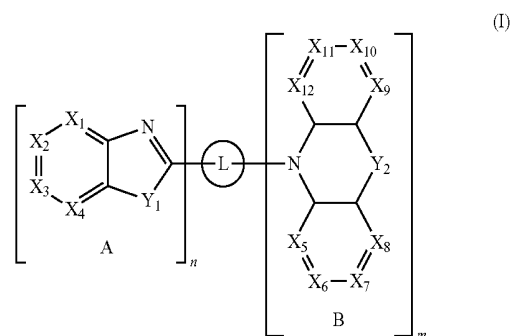

wherein

X_1 to X_{12} are each independently CR_1 or N;

Y_1 is O, S or NR_2 ;

Y_2 is a single bond, O, S, CR_3R_4 , NR_5 or SiR_6R_7 ;

R_1 to R_7 are each independently hydrogen, deuterium, C_{1-30} alkyl, C_{6-30} aryl or C_{2-20} heteroaryl;

L is a linking moiety which enables the structure of Formula (I) to form a conjugated system;

n and m are each independently 1, 2 or 3;

if n is greater than 1, each Moiety A in Formula (I) is the same as each other or different from each other; and

if m is greater than 1, each Moiety B in Formula (I) is the same as each other or different from each other.

17. The organic optoelectronic device according to claim 16, wherein at least one layer of the organic layers is a luminescent layer and the luminescent layer comprises the compound of the compound of Formula (I).

18. The organic optoelectronic device according to claim 16, wherein the organic layer further comprises a hole transport layer, a hole injection layer, an electron blocking layer, a hole blocking layer, an electron transport layer, an electron injection layer, or a combination thereof.

19. The organic optoelectronic device according to claim 17, wherein the organic layer further comprises a hole transport layer, a hole injection layer, an electron blocking layer, a hole blocking layer, an electron transport layer, an electron injection layer, or a combination thereof.

20. The organic optoelectronic device according to claim 17, wherein the compound of Formula (I) is present in the luminescent layer as a doped material, a co-doped material or a host material.

* * * * *

专利名称(译)	有机电致发光化合物和包含其的有机光电器件		
公开(公告)号	US20170148996A1	公开(公告)日	2017-05-25
申请号	US15/198177	申请日	2016-06-30
[标]申请(专利权)人(译)	上海天马AM OLED 天马微电子股份有限公司		
申请(专利权)人(译)	上海天马AM-OLED CO., LTD. 天马微电子股份有限公司.		
当前申请(专利权)人(译)	上海天马AM-OLED CO., LTD. 天马微电子股份有限公司.		
[标]发明人	REN HONGYANG WANG XIANGCHENG HE WEI		
发明人	REN, HONGYANG WANG, XIANGCHENG HE, WEI		
IPC分类号	H01L51/00 C09K11/02 C07D471/04 C07D417/14 C07D498/04 C09K11/06 C07D413/14		
CPC分类号	H01L51/0071 C09K2211/1014 C09K11/025 C07D413/14 C07D417/14 C07D498/04 H01L51/0072 H01L51/0052 C07D471/04 H01L51/0061 H01L51/5012 C09K2211/1007 C09K2211/1033 C09K2211/ /1037 C09K2211/1011 C09K2211/1044 C09K11/06 H01L51/5016 H05B33/20		
优先权	201510810708.8 2015-11-20 CN		
其他公开文献	US10069082		
外部链接	Espacenet USPTO		

摘要(译)

本申请提供有机电致发光化合物，其在有机光电子器件中的用途，以及包含其的有机光电装置。

