

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number
WO 02/17778 A1

(51) International Patent Classification⁷: **A61B 5/00**

MANNHEIMER, Paul, D.; 4119 Sugar Maple Drive,
Danville, CA 94506 (US).

(21) International Application Number: PCT/US01/27071

(22) International Filing Date: 31 August 2001 (31.08.2001)

(74) Agents: **CAHILL, Steven, J.** et al.; Two Embarcadero
Center, 8th Floor, San Francisco, CA 94111-3834 (US).

(25) Filing Language: English

(81) Designated States (*national*): AU, CA, JP.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(30) Priority Data:

60/229,616	31 August 2000 (31.08.2000)	US
09/943,899	30 August 2001 (30.08.2001)	US

Published:


- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(71) Applicant: **NELLCOR PURITAN BENNETT INC.**
[US/US]; 4280 Hacienda Drive, Pleasanton, CA 94588
(US).

(72) Inventors: **SWEDLOW, David**; 2165 Canyon Oak Lane,
Danville, CA 94506 (US). **FEIN, Michael, E.** (deceased).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: OXIMETER SENSOR WITH DIGITAL MEMORY ENCODING PATIENT DATA

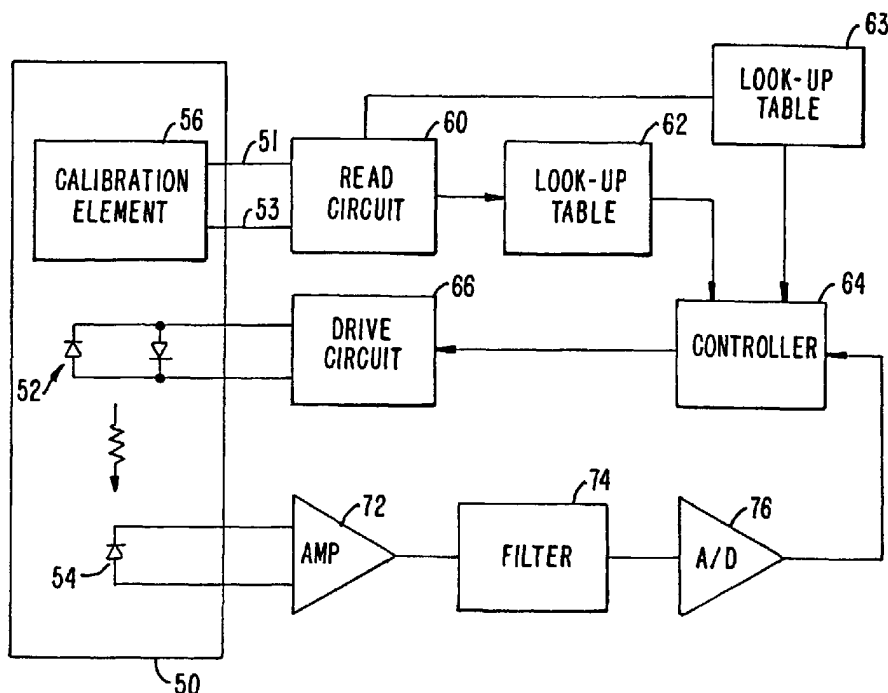

(57) Abstract: The present invention provides a memory chip for use in an oximeter sensor, or an associated adapter or connector circuit. The memory chip allows the storing of patient related data, such as patient trending data or a patient ID, to provide enhanced capabilities for the oximeter sensor. In addition to providing unique data to store in such a memory, the present invention include unique uses of the data stored in such a memory.

WO 02/17778 A1

OXIMETER SENSOR WITH DIGITAL MEMORY ENCODING PATIENT DATA

CROSS-REFERENCES TO RELATED APPLICATIONS

5 [01] This application claims priority to U.S. Provisional Patent Application No. 60/229,616, filed August 31, 2001, which is hereby incorporated by reference herein.

BACKGROUND OF THE INVENTION

10 [02] The present invention relates to oximetry sensors and, in particular, pulse oximetry sensors which include coded information relating to patients.

15 [03] Pulse oximetry is typically used to measure various blood flow characteristics including, but not limited to, the blood-oxygen saturation of hemoglobin in arterial blood, the volume of individual blood pulsations supplying the tissue, and the rate of blood pulsations corresponding to each heartbeat of a patient. Measurement of these characteristics has been accomplished by use of a non-invasive sensor which passes light through a portion of the patient's tissue where blood perfuses the tissue, and photoelectrically senses the absorption of light in such tissue. The amount of light absorbed is then used to calculate the amount of blood constituent being measured.

20 [04] The light passed through the tissue is selected to be of one or more wavelengths that are absorbed by the blood in an amount representative of the amount of the blood constituent present in the blood. The amount of transmitted light passed through the tissue will vary in accordance with the changing amount of blood constituent in the tissue and the related light absorption. For measuring blood oxygen level, such sensors have been provided with light sources and photodetectors that are adapted to operate at two different wavelengths, in accordance with known techniques for measuring blood oxygen saturation.

25 [05] An encoding mechanism is shown in U.S. Patent No. 4,700,708, the disclosure of which is incorporated herein by reference. This mechanism relates to an optical oximeter probe which uses a pair of light emitting diodes (LEDs) to direct light through blood-perfused tissue, with a detector picking up light which has not been absorbed by the tissue. The operation depends upon knowing the wavelength of the LEDs. Since the wavelength of LEDs can vary, a coding resistor is placed in the probe with the value of the resistor corresponding to the actual wavelength of at least one of the LEDs. When the

30

oximeter instrument is turned on, it first applies a current to the coding resistor and measures the voltage to determine the value of the resistor and thus the value of the wavelength of the LED in the probe.

[06] U.S. Patent 5,259,381 recognizes that the coded value of the wavelength of the red LED provided by a coding resistor may be inaccurate, since the actual wavelength can vary with temperature. Accordingly, this patent teaches including a temperature sensor in the oximeter probe to measure the actual temperature. With the actual temperature, and the coded wavelength value, a look-up table can be consulted to determine the actual LED wavelength for that temperature.

[07] Another method of storing coded information regarding the characteristics of the LEDs is shown in U.S. Patent No. 4,942,877 assigned to Minolta. This patent discloses using an EPROM memory to store digital information, which can be provided in parallel or serially from the sensor probe to the remote oximeter. The memory is described as storing coefficients for the saturation equation, wavelength, subwavelength (where 2 peaks for LED), half-width of wavelength spectrum emitted by LED, intensity of LEDS or ratio, and on time of LEDS (written by the processor).

[08] Other examples of coding probe characteristics exist in other areas. Multiple calibration values are sometimes required, with this making the circuitry more complex or requiring many leads. In Patent No. 4,446,715, assigned to Camino Laboratories, Inc., a number of resistors are used to provide coded information regarding the characteristics of a pressure transducer. Patent No. 3,790,910 discloses another pressure transducer with a ROM storing characteristics of the individual transducer. Patent No. 4,303,984 shows another probe with digital characterization information stored in a PROM, which is read serially using a shift register.

[09] Typically, the coding element is mounted in the probe itself. For instance, U.S. Patent No. 4,621,643 shows the coding resistor mounted in the probe element itself. In addition, U.S. Patent No. 5,246,003 shows the coding resistor being formed with a printed conductive material on the probe itself.

[10] In some devices, an electrical connector coupled by a cable to a device attached to a patient may include a coding element. For example, U.S. Patent No. 3,720,199 shows an intra-aortic balloon catheter with a connector between the catheter and a console. The connector includes a resistor with a value chosen to reflect the volumetric displacement of the particular balloon. U.S. Patent No. 4,684,245 discloses a fiberoptic catheter with a module between the fiberoptic and electrical wires connected to a processor. The module

converts the light signals into electrical signals, and includes a memory storing calibration signals so the module and catheter can be disconnected from the processor and used with a different processor without requiring a recalibration.

[11] Patent No. 5,645,059 teaches using a modulated signal to provide the coded data to a remote analyzer. Patent No. 5,429,129 shows using a voltage regulator to produce a specific voltage value in response to an attempt to read by the analyzer.

[12] Hewlett-Packard Company Patent No. 5,058,588 teaches an oximeter sensor with an encoding element that could be resistor, ROM, or customized integrated circuit. The encoding element encodes the type of sensor (in particular, type indicating area of placement on body - finger, ear, foot, arm; also, the type of sensor can indicate transmission/reflection type, or adult/neonate {indicating correction to be performed on theoretical oxygen saturation, allow switching between physiological limits such as minimum/maximum pulse rates for adults/neonates}; the maximum driving current may be adapted according to type of sensor, and contact of sensor with tissue can be tested by means of an attenuation measurement if sensor type is known).

[13] Nellcor Patent No. 5,645,059, the disclosure of which is hereby incorporated herein by reference, teaches coding information in sensor memory used to provide pulse modulated signal, to indicate the type of sensor (finger, nose), the wavelength of a second LED, the number of LEDs, the numerical correction terms to the standard curves, and an identifier of the manufacturer.

[14] A number of catheter patents also discuss encoding information in the catheter. Sentron Patent No. 4,858,615 teaches encoding the type of sensor, type number, serial number, date of production, safe use life of the sensor, correction data for non-linearity, pressure sensitivity, offset, and temperature sensitivity.

[15] Interflo Medical Published PCT Application No. PCT/US92/08263, Publication No. WO 93/06776 teaches encoding patient specific data, size, manufacture date, batch number, sterilization date, expiration date, transducer number and type, manufacturer's name and address, thermistor heating element resistance, filament efficiency, program segments or patient historical data., format version for the calibration data, trademark information, catheter unique serial number, ship date, other date and time information, security code to identify manufacturer, thermal mass, filament composition, coefficient of resistance, layout byte, checksum, copyright, number of seconds since a certain date, patient weight, patient height, timestamp of 1st CO data point, and a count of all CO data points in EEPROM.

[16] Dulex-Ohmeda of Boulder, Colorado markets an oximeter sensor product that encodes data into resistor values representing pointers to a lookup table containing coefficients (as in U.S. Patent No. 4,700,708) as well as indicating a range of LED drive current to use with the sensor. The LEDs are driven with a higher or lower drive currents depending upon the value of the resistor in a particular sensor.

[17] Honeywell Patent No. 4,303,984 (expires 12-14-99) describes a memory which stores characterization information, such as linearization information for a pressure sensor. Alnor Instrument Patent No. 5,162,725 describes storing both calibration and ID information in a sensor memory. Seimans Patent No. 5,016,198 describes a coding memory in a sensor with data for defining sensor's characteristic curve. McBean Patent No. 5,365,462 describes a date code in a sensor memory. Honeywell Patent No. 4,734,873 describes a pressure sensor with a PROM storing coefficients for a polynomial. Robert Bosch Patent No. 4,845,649 describes a PROM in a sensor storing correcting data.

[18] McBean Patent No. 5,371,128 relates to EEPROM in sensor with sensor type code and calibration data. McBean Patent No. 5,347,476 describes an accuracy code. Otax Patent No. 5,528,519 shows a PROM in a connector for oximeter.

[19] Square D Company Patent No. 5,070,732 shows calibration data in a sensor memory. Baxter Patent No. 5,720,293 talks about different calibration information for a catheter, including a security code (encryption is discussed), serial number, model number, ID data such as calibration, manufacture, sterilization and ship date or other date and time information, a software program segment, security code for identifying whether sensor made by same manufacturer as monitor manufacturer, filament or transducer resistance, heat transfer coefficient, thermal mass, filament composition and coefficient of resistance, layout byte, copyright notice, checksum, random data bytes. Porsche Patent No. 5,008,843 describes a sensor with EEPROM ID and characteristics data.

BRIEF SUMMARY OF THE INVENTION

[20] The present invention provides a memory chip for use in an oximeter sensor, or an associated adapter or connector circuit. The memory chip allows the storing of patient related data, such as patient trending data or a patient ID, to provide enhanced capabilities for the oximeter sensor. In addition to providing unique data to store in such a memory, the present invention include unique uses of the data stored in such a memory.

BRIEF DESCRIPTION OF THE DRAWINGS

[21] FIG. 1 is a block diagram of a pulse oximeter system in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[22] FIG. 1 is a block diagram of a pulse oximeter system incorporating a calibration memory element 56 according to the invention. In one embodiment, memory element 56 is a two-lead semiconductor digital memory chip. The calibration element is part of the sensor 50 which also includes red and infrared LEDs 52 as in the prior art, along with a detector 54. If desired, LEDs 52 may be replaced with other light emitting elements such as lasers.

[23] The oximeter includes read circuit 60, drive circuit 66, look-up tables 62 and 63, controller 64, amplifier 72, filter 74, and analog-to-digital converter 76. Read circuit 60 is provided for reading multiple coded values across the two leads 51, 53 connected to calibration element 56. One value is provided to a look-up table 62 to determine appropriate wavelength dependent coefficients for the oxygen saturation calculation, as in the prior art. The other value(s) are then provided to another look up table(s) 63 which provides input (e.g., coefficients) to other calculations performed by controller 64. These additional calculations may enhance the performance and/or safety of the system. Controller 64 provides signals to a drive circuit 66, to control the amount of drive current provided to LEDs 52.

[24] As in the prior art, detector 54 is connected through an amplifier 72 and a filter 74 to an A/D converter 76. This forms a feedback path used by controller 64 to adjust the drive current to optimize the intensity range of the signal received. For proper operation the signal must be within the analog range of the circuits employed. The signal should also be well within the range of A/D converter 76. For example, one rule that may be applied is to adjust LED drives and amplifier gains so that both red and IR signals fall between 40% and 80% of full scale reading of converter 76. This requires correct and independent settings for both the red and infrared LEDs.

[25] In an embodiment of the present invention, patient-specific data such as trending data or patient monitoring parameters can be actively stored in the memory of memory chip 56. As the patient and sensor travel from ward-to-ward of the hospital, and consequently plug into different oximeters, the patient-specific data can be read from memory 56 of the patient's dedicated sensor and displayed on a display screen for viewing or

used by the oximeter monitor for other purposes. Memory 56 may, for example, be implemented as a random access memory (RAM), a FLASH memory, a programmable read only memory (PROM), an electrically erasable PROM, a similar programmable and/or erasable memory, any kind of erasable memory, a write once memory, or other memory technologies capable of write operations. Examples of patient specific data that can be stored in memory 56 are now discussed.

[26] Patient trending data regarding the history of a patient's blood oxygen saturation (SpO_2) level, pulse rate, pulse amplitude, perfusion data, and other patient data over a period of time can be recorded in memory chip 56. The oximeter monitor can continuously or periodically store a patient's current trend data into memory 56 to maintain a historical data for the patient. The patient trend data can be erased from memory 56 each time a sensor is used on a new patient (e.g., each time the oximeter monitor is turned off or when user input to the monitor indicates a new patient). Alternatively, the data encoded into memory 56 can be permanent and non-erasable. Further details of a Method and Circuit for Storing and Providing Historical Physiological Data are discussed in U.S. Patent Application No. 09/520,104 to Swedlow et al., filed March 7, 2000, which is incorporated by reference herein in its entirety.

[27] As another example, the lowest and/or highest blood oxygen saturation level, pulse rate, pulse amplitude value, temperature data, blood pressure, perfusion data, or any other patient data during the monitored time may be stored in memory 56 by the oximeter monitor. If desired, the lowest/highest values of these patient parameters over a past specified monitoring time (e.g., 2 hours, 1 day, etc.) may be recorded in memory 56.

[28] Expected ranges for patient parameters (such as pulse rate, pulse amplitude, and blood oxygen saturation level) that are specific to a particular patient may also be recorded in memory 56 by a clinician. This can be a desirable feature, because the expected patient trending data can vary significantly for each patient. The oximeter monitor can compare the expected range for the patient stored in memory 56 with the monitored patient trending data to determine if the patient's pulse and blood oxygen levels are within the expected range for that patient. If the monitored patient parameter varies outside the patient-specific range recorded in memory 56, a warning message may be displayed on the oximeter monitor or alarm signal may be sounded. If desired, any variations in the monitored patient parameters from the expected ranges may be recorded in memory 56 along with a time stamp.

[29] If desired, portions of a patient's medical chart and/or past medical history can be digitally encoded and stored in memory 56 (if sufficient memory space is available) so that this information is maintained with the patient as he is moved around and can be easily accessed and displayed using an oximeter monitor if the patient transferred to a different room or hospital.

[30] The pulse oximeter can keep track of how long a particular patient has been monitored by the pulse oximeter and can periodically store that time interval in memory 56 by checking the elapsed time on a counter. The counter may be a circuit element in the oximeter monitor that is reset each time the oximeter monitor begins to receive data signals from a sensor or each time that the oximeter monitor is turned off. The time period that a patient has been monitored by the oximeter sensor may be displayed on a display screen for viewing.

[31] The pulse oximeter monitor may also include a digital clock that keeps track of the current date and time. The date and time that the oximeter monitor was turned on and the date and time that the oximeter monitor was turned off may be encoded into the sensor in memory 56. When the oximeter monitor is turned back on again, the monitor can display the date and time that it was last turned on and off. It may be desirable for medical personnel to know the last time that patient's vital signs were monitored by the oximeter.

[32] The oximeter monitor instrument may also write the alarm limits used with a particular patient into memory chip 56. Alarm limits are values that represent maximum or minimum values of patient trending data tracked by the oximeter (such as blood oxygen saturation, pulse rate, pulse amplitude, etc.) that will trigger an alarm, because they are considered to be dangerous levels. The alarm limit values may be encoded in memory 56 by the manufacturer or by a clinician through the oximeter monitor prior to operation.

[33] The oximeter monitor periodically checks the patient's monitored trending data against the alarm limit values. When one of the monitored patient parameters reaches the alarm limit value stored in memory 56, the oximeter monitor triggers an alarm which alerts medical personnel that a problem may exist. The present invention also allows patient-specific alarm values to be set by medical personnel through the oximeter and stored in memory 56 so that as the patient moves from monitor-to-monitor (while the sensor stays with the patient), the appropriate alarm limits need not be reset each time on the new monitor. Instead, the alarm limits only need to be programmed once, or at a later time, whenever the clinician adjusts alarm limits.

[34] One of more of the patient trending data including blood oxygen saturation, pulse rate, and pulse amplitude can be written to memory 56 along with a time of occurrence whenever an alarm threshold is crossed. Additional information, such as the readings for a predetermined time prior to an alarm occurrence can also be stored, and/or periodic values during the alarm breach can also be stored in memory 56.

[35] Currently sensors are placed on patients at one hospital site and stay with the patient from hospital site-to-site. It would therefore be desirable to have a patient identification code (patient ID) such as a unique number carried along in the sensor so that the record keeping, which occurs at each site, can link the recorded information with the patient. Without a patient ID stored in the sensor itself, the tracking has to be done manually. This method is prone to mistakes and increases the labor involved in managing the patient.

[36] Thus, in a further embodiment of the present invention the oximeter monitor can store a patient ID in memory 56 of sensor 50. The oximeter has an input device such as a keyboard, touch screen, or scanner that allows a patient ID to be entered and reentered into the oximeter so that it can be stored in sensor memory 56. With patient trending information being stored in memory 56 of the sensor as discussed above, it is also desirable to have the patient ID stored in memory 56 so that as the patient goes from hospital location to location, the new location's staff can verify that old trending information stored in memory 56 was indeed obtained from that particular patient. Medical personnel can check that the patient ID stored in sensor 50 matches the patient ID on the patient's chart and other paper documentation to verify that these medical records correspond to the correct patient. If desired, the oximeter sensor can be interfaced with a hospital computer network that maintains a database of patient ID numbers to verify the identify of the patient and to obtain medical records and other information for the patient stored on hospital databases. The patient ID stored in memory 56 provides assurance that any data read from memory 56 of the sensor is correlated with the patient they are receiving.

[37] The pulse amplitude of the measured photoplethysmogram is an indirect measure of blood perfusion (flow) in the local tissue, changes in blood pressure, vascular tone, vasoconstriction or dilation, for example, all have an effect on the pulsatile signal strength observed with a pulse oximeter.

[38] The measured modulation, or other measurement of perfusion, can be stored in memory 56 for patient trending purposes. The oximeter can compare current modulation and perfusion data with older data from memory 56 to determine patient trends over time. The patient's pulse amplitude deteriorating over time may reflect a serious

condition that demands attention. Therefore, it is desirable to store and monitor changes in a patient's perfusion over time. Also, a maximum or minimum perfusion limit may be stored in memory 56 that represents the maximum or minimum value that the patient's measured perfusion can reach before the sensor needs to be moved, repositioned, or adjusted in some other way. The oximeter can trigger a warning signal or light when a perfusion limit has been reached or a significant change has occurred.

[39] While the present invention has been described herein with reference to particular embodiments thereof, a latitude of modification, various changes and substitutions are intended in the foregoing disclosure, and it will be appreciated that in some instances some features of the invention will be employed without a corresponding use of other features without departing from the scope of the invention as set forth. Therefore, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope and spirit of the present invention. It is intended that the invention not be limited to the particular embodiments disclosed, but that the invention will include all embodiments and equivalents falling within the scope of the claims.

WHAT IS CLAIMED IS:

- 1 1. An oximeter sensor comprising:
2 a light emitting element;
3 a light detecting element; and
4 a memory device for storing digital data, said digital data comprising trending
5 data expected for a particular patient.
- 1 2. The oximeter sensor of claim 1 wherein said memory device encodes
2 trending data including blood oxygen saturation data specific to a patient.
- 1 3. The oximeter sensor of claim 2 wherein said memory device encodes a
2 highest and a lowest blood oxygen saturation level monitored during a period of time.
- 1 4. The oximeter sensor of claim 1 wherein said memory device encodes
2 trending data including pulse rate data specific to a patient.
- 1 5. The oximeter sensor of claim 1 wherein said memory device encodes a
2 duration of time that a patient parameter decoded from signals received from said light
3 detecting element exceeded or fell below the expected trending data.
- 1 6. The oximeter sensor of claim 1 wherein said memory device encodes
2 pulse amplitude data for a patient.
- 1 7. An oximeter sensor comprising:
2 a light emitting element;
3 a light detecting element; and
4 a memory device for storing digital data, said digital data comprising a patient
5 identification code.
- 1 8. An oximeter sensor comprising:
2 a light emitting element;
3 a light detecting element; and
4 a memory device for storing digital data, said digital data comprising a length
5 of time that a patient has been monitored using the oximeter sensor.
- 1 9. An oximeter sensor comprising:
2 a light emitting element;

3 a light detecting element; and
4 a memory device for storing digital data, said digital data comprising a time
5 when an oximeter monitor coupled to the oximeter sensor was turned on or turned off.

1 10. An oximeter sensor comprising:
2 a light emitting element;
3 a light detecting element; and
4 a memory device for storing digital data, said digital data comprising oximeter
5 alarm limit values that are patient-specific.

1 11. The oximeter sensor of claim 10 wherein the alarm limit is a maximum
2 or minimum blood oxygen saturation level.

1 12. The oximeter sensor of claim 10 wherein the alarm limit is a maximum
2 or minimum pulse rate.

1 13. The oximeter sensor of claim 10 wherein said memory device encodes
2 patient trending data after an alarm limit value has been reached.

1 14. The oximeter sensor of claim 13 wherein said patient trending data
2 comprises perfusion data.

1 15. The oximeter sensor of claim 13 wherein said patient trending data
2 comprises blood oxygen saturation levels.

1 16. The oximeter sensor of claim 10 wherein said memory device encodes
2 a patient trending data periodically before an alarm limit value has been reached.

1 17. The oximeter sensor of claim 16 wherein said patient trending data
2 comprises blood oxygen saturation levels.

1 18. The oximeter sensor of claim 16 wherein said patient trending data
2 comprises blood perfusion data.

1 19. The oximeter sensor of claim 10 wherein said memory device encodes
2 a time that an alarm limit was initially breached.

1 20. A method for storing data in an oximeter sensor, the method
2 comprising:
3 emitting light from a light emitting element;
4 detecting light from the light emitting element using a photodetector; and
5 storing digitally encoded data in a memory in the sensor, the digitally encoded
6 data including a patient ID; and
7 tracking patient information using the patient ID.

1 21. A method for storing data in an oximeter sensor, the method
2 comprising:
3 emitting light from a light emitting element;
4 detecting light from the light emitting element using a photodetector; and
5 storing digitally encoded data in a memory in the sensor, the digitally encoded
6 data comprising trending data expected for a specific patient.

1 22. The method of claim 21 wherein storing the digitally encoded data in
2 the memory further comprises storing an expected range for blood oxygen saturation levels
3 specific to a patient in the memory.

1 23. The method of claim 21 wherein storing the digitally encoded data in
2 the memory further comprises storing a highest and a lowest blood oxygen saturation level
3 for the patient during a period of time in the memory.

1 24. The method of claim 21 wherein storing the digitally encoded data in
2 the memory further comprises storing an expected range for patient-specific pulse rate data in
3 the memory.

1 25. The method of claim 21 wherein storing the digitally encoded data in
2 the memory further comprises storing a length of time that the patient has been monitored
3 using the oximeter sensor in the memory.

1 26. The method of claim 21 wherein storing the digitally encoded data in
2 the memory further comprises storing expected blood perfusion data for the patient in the
3 memory.

1 27. The method of claim 21 wherein storing the digitally encoded data in
2 the memory further comprises storing oximeter alarm limit values that are patient-specific in
3 the memory.


1 28. The method of claim 27 wherein storing the digitally encoded data in
2 the memory further comprises storing monitored patient trending data received from the
3 photodetector in the memory after one of the alarm limit values has been reached.

1 29. The method of claim 27 wherein storing the digitally encoded data in
2 the memory further comprises storing a time that one of the alarm limit values was breached.

1 30. The method of claim 27 wherein one of the alarm limit values is a
2 patient specific blood oxygen saturation level.

1 31. A method for storing data in an oximeter sensor, the method
2 comprising:
3 emitting light from a light emitting element;
4 detecting light from the light emitting element using a photodetector; and
5 storing digitally encoded data in a memory in the sensor, the digitally encoded
6 data comprising a time when an oximeter monitor coupled to the oximeter sensor was turned
7 on or turned off in the memory.

1 32. A method for storing data in an oximeter sensor, the method
2 comprising:
3 emitting light from a light emitting element;
4 detecting light from the light emitting element using a photodetector; and
5 storing digitally encoded data in a memory in the sensor, the digitally encoded
6 data comprising a duration of time that a patient has been monitored using said oximeter
7 sensor.

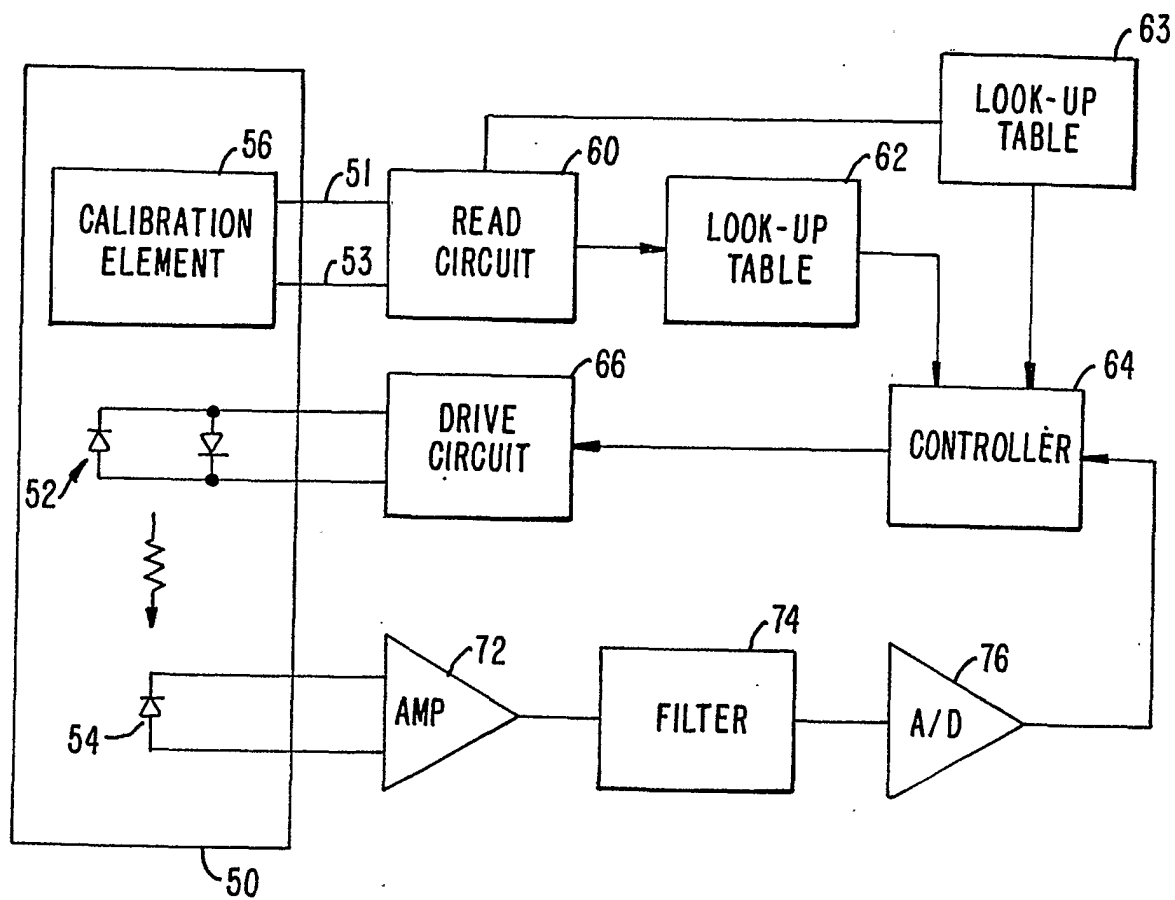**FIG. 1**

INTERNATIONAL SEARCH REPORT

Inte I Application No

PC 1, US 01/27071

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 987 343 A (KINAST) 16 November 1999 (1999-11-16) column 2, line 41 - line 49 column 4, line 50 - line 59; figures 1-3 ---	8
Y	US 5 660 163 A (SCHULMAN ET AL.) 26 August 1997 (1997-08-26) column 2, line 27 - column 4, line 24 column 7, line 33 - line 49; figures 1-12 --- -/--	1,2,6, 10,13, 16, 19-21, 27,31,32



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

30 January 2002

Date of mailing of the international search report

07/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hunt, B

INTERNATIONAL SEARCH REPORT

In application No
PCT/US 01/27071

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 645 059 A (FEIN ET AL.) 8 July 1997 (1997-07-08) cited in the application the whole document	1,2,6, 10,13, 16, 19-21, 27,31,32
Y	US 6 044 283 A (FEIN ET AL.) 28 March 2000 (2000-03-28) column 4, line 36 - line 64 column 9, line 13 - line 31; figures 1-9	1,2,7-9, 21
Y	US 5 720 293 A (QUINN ET AL.) 24 February 1998 (1998-02-24) abstract; figures 1-5	1,2,7,21
Y	WO 97 29678 A (BIOSENSE INC.) 21 August 1997 (1997-08-21) claims 1-51; figures 1-5	8,9
A	US 5 800 350 A (COPPLESON ET AL.) 1 September 1998 (1998-09-01) column 13, line 33 - line 54 abstract; figures 1-18	1,7-10, 20,21, 31,32

INTERNATIONAL SEARCH REPORT

 Inte lication No
 PC. /27071

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5987343	A	16-11-1999	NONE	
US 5660163	A	26-08-1997	US 5497772 A US 5791344 A	12-03-1996 11-08-1998
US 5645059	A	08-07-1997	AU 690612 B2 AU 1211695 A CA 2179022 A1 DE 69411947 D1 DE 69411947 T2 EP 0734221 A1 JP 10500026 T US 6044283 A WO 9516387 A1 US 5779630 A	30-04-1998 03-07-1995 22-06-1995 27-08-1998 22-04-1999 02-10-1996 06-01-1998 28-03-2000 22-06-1995 14-07-1998
US 6044283	A	28-03-2000	US 5779630 A US 5645059 A AU 690612 B2 AU 1211695 A CA 2179022 A1 DE 69411947 D1 DE 69411947 T2 EP 0734221 A1 JP 10500026 T WO 9516387 A1	14-07-1998 08-07-1997 30-04-1998 03-07-1995 22-06-1995 27-08-1998 22-04-1999 02-10-1996 06-01-1998 22-06-1995
US 5720293	A	24-02-1998	CA 2120532 A1 DE 69225803 D1 DE 69225803 T2 EP 0606356 A1 JP 6511172 T WO 9306776 A1 US 5553622 A US 5588438 A US 5807269 A US 5857976 A US 5755670 A	15-04-1993 09-07-1998 02-09-1999 20-07-1994 15-12-1994 15-04-1993 10-09-1996 31-12-1996 15-09-1998 12-01-1999 26-05-1998
WO 9729678	A	21-08-1997	AU 720597 B2 AU 1731497 A AU 721158 B2 AU 2275597 A EP 0932362 A2 EP 0910299 A1 WO 9729678 A2 JP 2000506027 T JP 2000505325 T WO 9729710 A1 US 6266551 B1	08-06-2000 02-09-1997 22-06-2000 02-09-1997 04-08-1999 28-04-1999 21-08-1997 23-05-2000 09-05-2000 21-08-1997 24-07-2001
US 5800350	A	01-09-1998	AT 168872 T AU 693112 B2 AU 7746194 A CA 2134423 A1 CN 1106246 A DE 69412030 D1 DE 69412030 T2	15-08-1998 25-06-1998 25-05-1995 02-05-1995 09-08-1995 03-09-1998 11-03-1999

INTERNATIONAL SEARCH REPORT

Int. No.
PCT/US 95/027071

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5800350	A	EP 0650694 A1	03-05-1995
		ES 2122175 T3	16-12-1998
		HK 1013943 A1	12-05-2000
		ZA 9408393 A	26-06-1995

专利名称(译)	血氧计传感器，数字记忆编码患者数据		
公开(公告)号	EP1315446A1	公开(公告)日	2003-06-04
申请号	EP2001966424	申请日	2001-08-31
[标]申请(专利权)人(译)	内尔科尔普里坦贝内特公司		
申请(专利权)人(译)	NELLCOR PURITAN BENNETT INCORPORATED		
当前申请(专利权)人(译)	NELLCOR PURITAN BENNETT INCORPORATED		
[标]发明人	SWEDLOW DAVID FEIN MICHAEL E DI MANNHEIMER PAUL D		
发明人	SWEDLOW, DAVID FEIN, MICHAEL, E. DI MANNHEIMER, PAUL, D.		
IPC分类号	A61B5/145 A61B5/00 A61B5/1455 G01D18/00		
CPC分类号	A61B5/74 A61B5/0205 A61B5/02055 A61B5/053 A61B5/11 A61B5/14551 A61B5/14552 A61B5/1495 A61B5/7232 A61B2562/085 G01D18/00 Y10S323/911		
优先权	09/943899 2001-08-30 US 60/229616 2000-08-31 US		
其他公开文献	EP1315446B1		
外部链接	Espacenet		

摘要(译)

本发明提供一种用于血氧计传感器或相关适配器或连接器电路的存储器芯片。存储器芯片允许存储患者相关数据，例如患者趋势数据或患者ID，以为血氧计传感器提供增强的能力。除了提供存储在这种存储器中的唯一数据之外，本发明还包括存储在这种存储器中的数据的独特用途。