



(51) International Patent Classification:

A61B 5/02 (2006.01) A61B 5/0402 (2006.01)
A61B 5/021 (2006.01) A61B 5/00 (2006.01)

(21) International Application Number:

PCT/US2015/059197

(22) International Filing Date:

5 November 2015 (05.11.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/075,445 5 November 2014 (05.11.2014) US
14/932,273 4 November 2015 (04.11.2015) US

(71) Applicant: QARDIO, INC. [US/US]; 340 S Lemon Ave
#1104F, Walnut, CA 91789 (US).

(72) Inventors: PELUSO, Marco; 340 S. Lemon Ave. #1104F,
Walnut, CA 91789 (US). IANNELLA, Rosario; 340 S.
Lemon Ave. #1104F, Walnut, CA 91789 (US).

(74) Agents: O'REGAN, Cecily, Anne et al.; SHARTSIS
FRIESE LLP, One Maritime Plaza - 18th Floor, San Fran-
cisco, CA 94111 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: DEVICES, SYSTEMS AND METHODS FOR CONTEXTUALIZED RECORDING OF BIOMETRIC MEASUREMENTS

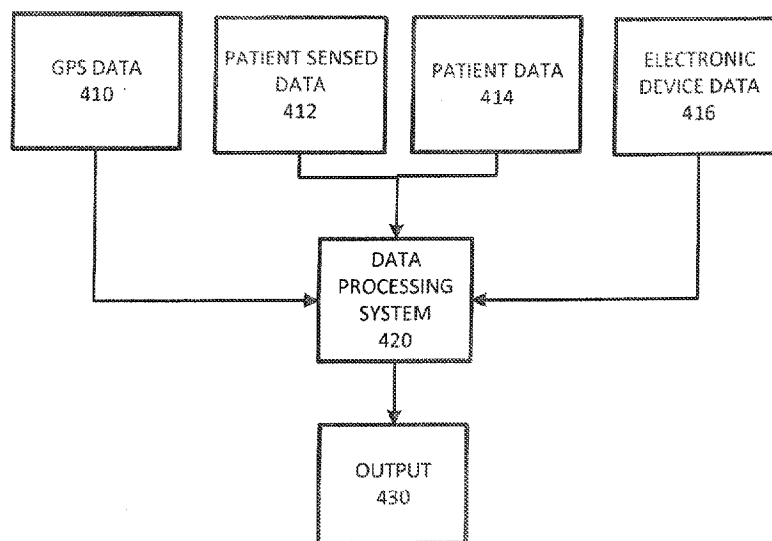


FIG. 4

(57) Abstract: Described are apparatuses (e.g., devices, systems, software), and methods for monitoring the cardiac health of a patient which incorporates secondary information. The apparatus may be a heart rate monitor, a blood pressure monitor, an ECG or other biometric device in communication with an electronic device having communication ability. The devices detect a cardiac or other biometric measurement and correlate the detected information with secondary information, such as GPS data, to produce a contextualized measurement.

DEVICES, SYSTEMS AND METHODS FOR CONTEXTUALIZED RECORDING OF BIOMETRIC MEASUREMENTS

CROSS-REFERENCE

[0001] This application claims priority to U.S. Utility Application Serial No. 14/932,273 filed November 4, 2015, which claims the benefit of U.S. Provisional Application No. 62/075,445, filed November 5, 2014, which application is incorporated herein by reference.

BACKGROUND

[0002] People are increasingly interested in technology that tracks health and wellness indicators into their daily routine. While the collection of wellness information has witnessed the integration of an increasing number of sensors, usually to infer things that are hard to measure directly, for example to collect light and noise information to supplement data on sleep quality, little or no progress has taken place for obtaining and managing a robust suite of medical data combined with data on the context before, during and after the medical data measurement is taking place. What is needed is a device or a combination of devices that collects medical data from a patient and correlates the data acquisition with other information, such as environmental information, to provide a contextualized profile for a particular user at a given time. This is increasingly important as modern technologies and modern lifestyles afford and/or require the measurement of biometrics with increasing frequency and across an increasing variety of times and places.

SUMMARY

[0003] Disclosed are devices, systems and methods that are configurable to automatically record a biometric measurement such as blood pressure and/or other biometric health related data together with geo-location or other contextual or environmental data, using coordinates from global positioning system (“GPS”) signals and/or other contextual sensors, like accelerometers (for movement detection), barometers, thermometers (for both environmental and body temperature measurement). Other sensors include, for example, UV exposure, noise (from a microphone), galvanic skin response, body posture, and skin hydration. Automatically recorded data is stored locally and/or in a remote centralized location and can be retrieved by a user, or other person with the right to access the data, at any time for

analysis, or can be used by the system to aid the user in capturing more effectively or more reliably the biometric measurements. Capturing blood pressure and location data simultaneously, for example, can help users identify trends, for example related to stress or inactivity, or help identify external factors affecting negatively the user's health. In another application, information on the user's activity, speed or location can be used by the system to prompt the user with a notification to perform a biometric measurement or to instead delay such notification until the user finds itself in a context more suitable to the biometric measurement. In another application the geolocation of electrocardiograph ("ECG") data and a secondary data such as respiratory rate data or blood pressure, could facilitate the identification that certain blood pressure problems or ECG anomalies occur, for example, at high altitudes. Another application could involve the combination of the prothrombin time ("PT") and its derived measures of prothrombin ratio ("PR") and international normalized ratio ("INR") (*see, e.g.,* http://en.wikipedia.org/wiki/Prothrombin_time) tracking with weather data derived directly (*e.g.* from light sensors on the body of the user), or indirectly derived from weather reported at the geolocation of the user, to better monitor the effects of sunlight on the effectiveness/dosage of anticoagulants or other drugs.

[0004] An aspect of the disclosure is directed to an apparatus adapted to correlate a blood pressure measurement with GPS data or other contextual data before, during and/or after the measurement. Suitable apparatuses comprise: a cuff for wrapping around a limb of a subject the cuff further having an inflatable bladder formed integrally therein, wherein the cuff is substantially rectangular in shape having a first surface, a second surface, a first end, a second end, and two sides, and a securement mechanism; one or more tubes positioned within the cuff in communication with the inflatable bladder; an exhaust valve; a displayless housing connected to one of a first end and a second end of the cuff wherein the housing includes one or more of a controller, a memory, a pump, a power supply, and a motor; a GPS sensor and/or other sensor or combination of sensors in communication with the apparatus; and a transmitter for wirelessly transmitting blood pressure data to a second device. Other sensors, can include accelerometers (for movement detection), barometers, thermometers (for both environmental and body temperature measurement), UV exposure, noise, galvanic skin response, body posture, and skin hydration. In some configurations, the blood pressure monitor device is configurable to be in

communication with a communication network; and a computer executable instruction that, when executed by a processor analyzes a received blood pressure data and GPS data and/or other contextual sensor data. Additionally, the computer executable instructions can analyze one or more of patient data and electronic device data. In some configurations, the historical user data and historical GPS data is accessible via a communication network. One or more of an on-off button and a start-stop button can also be provided. Additionally, the device can comprise a pressure detector, and/or a pulse detector. Patient data and electronic device data can also be accessible via a communication network. Additionally, the blood pressure monitoring device is in wireless communication with one or more displays.

[0005] Another aspect of the disclosure is directed to a computing device comprising: a processor configured to: receive a GPS location, a historic patient data, and physiological cardiac condition indication for a user wherein the physiologic cardiac condition is selected from heart rate, blood pressure, and ECG; at least one or more of analyze, monitor, evaluate, and provide a prediction for a user based on the GPS location of the user and the physiological cardiac condition indication for the user. The computing devices can further have a processor that is configured to receive an input for stress level or activity level. Additionally, the processor can be configured to at least one or more of analyze and evaluate the historical patient data. In at least some configurations, the processor is capable of generating and delivering a blood pressure event message to one or more of the user, and a healthcare provider. Additionally, the processor can be associated with an electronic device and the electronic device is at least one of a blood pressure monitor and a mobile communication device. In still other configurations, the processor is in communication with one or more of the electronic device, a remote server, and the blood pressure monitor within near field communication range.

[0006] Yet another aspect of the disclosure is directed to a correlating a ECG measurement with GPS data comprising: an ECG measurement device comprising at least two detectors configured to detect a blood pulse from the blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the blood pulse is detected by the at least two detectors, and a strap configured to secure the apparatus to the person during use; a processor configured to verify that the blood pulse has been detected based on whether a first detection of the blood pulse associated with one of the at least two detectors occurs before a second detection of

the blood pulse associated with another of the least two detectors, the processor being configured to determine the heart rate of the person on the basis of the detected blood pulse, wherein the processor is further configured to verify that the blood pulse has been detected based on whether the detections by the at least two detectors are separated by a predetermined time difference; a GPS sensor in communication with the apparatus. The ECG device can be configurable to be in communication with a communication network; a computer executable instruction that, when executed by a processor analyzes a received ECG data and a GPS data. Additionally, the computer executable instruction can be configured to analyze one or more of patient data and electronic device data. Historical user data and historical GPS data can also be accessible via a communication network.

[0007] Still another aspect of the disclosure is directed to an apparatus adapted to correlate a blood pressure measurement or ECG measurement with GPS data comprising: a measurement device wherein the measurement device is one of a blood pressure measurement device comprising a cuff for wrapping around a limb of a subject the cuff further having an inflatable bladder formed integrally therein, wherein the cuff is substantially rectangular in shape having a first surface, a second surface, a first end, a second end, and two sides, and a securement mechanism, one or more tubes positioned within the cuff in communication with the inflatable bladder, an exhaust valve, and a housing connected to one of a first end and a second end of the cuff wherein the housing includes one or more of a controller, a memory, a pump, a power supply, and a motor or an ECG measurement device comprising at least two detectors configured to detect a blood pulse from the blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the blood pulse is detected by the at least two detectors, and a strap configured to secure the apparatus to the person during use, a processor configured to verify that the blood pulse has been detected based on whether a first detection of the blood pulse associated with one of the at least two detectors occurs before a second detection of the blood pulse associated with another of the least two detectors, the processor being configured to determine the heart rate of the person on the basis of the detected blood pulse, wherein the processor is further configured to verify that the blood pulse has been detected based on whether the detections by the at least two detectors are separated by a predetermined time difference, a GPS sensor in communication with the

measurement device; and a transmitter for wirelessly transmitting measured data to a second device.

[0008] An aspect of the disclosure is directed to means for correlating a blood pressure measurement with GPS data. Suitable apparatuses comprise: a cuff means for wrapping around a limb of a subject the cuff means further having an inflatable bladder means formed integrally therein, wherein the cuff means is substantially rectangular in shape having a first surface, a second surface, a first end, a second end, and two sides, and a securement means; one or more tubular means positioned within the cuff means in communication with the inflatable bladder means; an exhaust valve means; a housing connected to one of a first end and a second end of the cuff means wherein the housing includes one or more of a controller, a memory, a pump, a power supply, and a motor; a GPS sensing means in communication with the apparatus; and a transmitter means for wirelessly transmitting blood pressure data to a second device. In some configurations, the blood pressure monitor device is configurable to be in communication with a communication network; and a computer executable instruction that, when executed by a processor analyzes a received blood pressure data and a GPS data. Additionally, the computer executable instructions can analyze one or more of patient data and electronic device data. In some configurations, the historical user data and historical GPS data is accessible via a communication network. One or more of an on-off button and a start-stop button can also be provided. Additionally, the device can comprise a pressure detector means, and/or a pulse detector means. Patient data and electronic device data can also be accessible via a communication network. Additionally, the blood pressure monitoring device is in wireless communication with one or more displays.

[0009] Another aspect of the disclosure is directed to a computing device comprising: a processor means configured to: receive a GPS location, a historic patient data, and physiological cardiac condition indication for a user wherein the physiologic cardiac condition is selected from heart rate, blood pressure, and ECG; at least one or more of analyze, monitor, evaluate, and provide a prediction for a user based on the GPS location of the user and the physiological cardiac condition indication for the user. The computing devices can further have a processor means that is configured to receive an input for stress level or activity level. Additionally, the processor means can be configured to at least one or more of analyze and evaluate the historical patient data. In at least some configurations, the processor is capable of generating and

delivering a blood pressure event message to one or more of the user, and a healthcare provider. Additionally, the processor means can be associated with an electronic device and the electronic device is at least one of a blood pressure monitor and a mobile communication device. In still other configurations, the processor means is in communication with one or more of the electronic device, a remote server, and the blood pressure monitor within near field communication range.

[0010] Yet another aspect of the disclosure is directed to a correlating a ECG measurement with GPS data comprising: an ECG measurement device means comprising at least two detection means configured to detect a blood pulse from the blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the blood pulse is detected by the at least two detection means, and a strap means configured to secure the apparatus to the person during use; a processor configured to verify that the blood pulse has been detected based on whether a first detection of the blood pulse associated with one of the at least two detectors occurs before a second detection of the blood pulse associated with another of the least two detectors, the processor being configured to determine the heart rate of the person on the basis of the detected blood pulse, wherein the processor is further configured to verify that the blood pulse has been detected based on whether the detections by the at least two detectors are separated by a predetermined time difference; a GPS sensor means in communication with the apparatus. The ECG device means can be configurable to be in communication with a communication network; a computer executable instruction that, when executed by a processor analyzes a received ECG data and a GPS data. Additionally, the computer executable instruction can be configured to analyze one or more of patient data and electronic device data. Historical user data and historical GPS data can also be accessible via a communication network.

[0011] In some configurations, a biometric measurement device can include one or more light-emitting diodes (LED) and a photodiode or other optical sensor configured to detect blood composition or blood circulation of a person and to be placed adjacent to a skin surface of the person wherein the optical sensor measures the changing absorbance at one or more of the wavelengths, allowing it to determine an absorbance or reflectance due to the pulsing arterial blood alone, excluding venous blood, skin, bone, muscle, fat or other tissue. Additionally, processors can be configured to verify that the wavelength absorbance or reflectance. In some configurations, the

apparatuses are configured to evaluate real-time biometric data, and real-time environmental and compare the information to historical biometric data and historical environmental data (such as data from GPS, barometers, accelerometers, and thermometers). Processors can also be configured to processor being configured to determine the rate of movement of blood within the blood vessels of the person or the concentration of hemoglobin and blood particles within the blood.

INCORPORATION BY REFERENCE

[0012] Any publications, patents, and patent applications mentioned in this specification are herein incorporated by reference to the same extent as if each individual publication, patent, or patent application was specifically and individually indicated to be incorporated by reference. See, for example, **US 4,776,344 A** to Shirasaki et al. issued October 11, 1988, for Electronic Blood Pressure Measuring Device; **US 7,794,405 B2** to Karo et al. issued September 14, 2010, for Cuff for Blood Pressure Monitor, and Blood Pressure Monitor Having the Same; **US 8,509,882 B2** to Albert et al. issued August 13, 2013, for Heart Monitoring System Usable with a Smart Phone or Computer; **US 9,026,202 B2** to Albert issued May 5, 2015, for Cardiac Performance Monitoring System for Use with Mobile Communications Devices; **US 2013/0138000 A1** to Kinoshita et al. published May 30, 2013, for Blood Pressure Measurement Device; **US 2014/0371607 A1** to Peluso et al. published December 18, 2014 for Devices and Methods for Measuring Blood Pressure; and **US 2014/0378781 A1** to Peluso et al. published December 25, 2014 for Methods and Systems for Acquiring Diagnostic Information.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The novel features of the invention are set forth with particularity in the appended claims. A better understanding of the features and advantages of the present invention will be obtained by reference to the following detailed description that sets forth illustrative embodiments, in which the principles of the invention are utilized, and the accompanying drawings of which:

[0014] **FIGS. 1A-H** are views of an exemplar blood pressure measurement device suitable for use in the disclosed system;

[0015] **FIGS. 2-3** is an exemplar electrocardiogram monitor suitable for use in the disclosed system;

[0016] **FIG. 4** is a block diagram that illustrates an interrelationship between data components in the devices and systems; and

[0017] **FIG. 5** is a table of operating parameters.

DETAILED DESCRIPTION

[0018] **FIGS. 1A-H** are views of an exemplar blood pressure measurement device **100** suitable for use in the disclosed systems and methods. The blood pressure measurement device **100** has a device body **110** which is configured to house the electronics required to measure blood pressure. The blood pressure measurement device **100** includes a cuff member **120** comprising, for example, a compression air bladder, a sub air bladder, and a pulse wave detection air bladder, pressure controller for pressurizing or depressurizing each air bladder, a pressure sensor which is capable of sensing an internal pressure of each air bladder, pulse wave signal extractor for extracting time-series data of a pulse wave signal superposed on a cuff internal pressure. A buckle or pulley **130** is provided through which the cuff member **120** can pass for securement around the arm of a user. When the cuff member **120** is unrolled from around the device body **110**, the device can turn on; similarly when the cuff member **120** is secured around the device body **110** (e.g., for storage), the device can automatically turn off.

[0019] When the pressure controller in the device body **110** pressurizes or depressurizes each air bladder of the cuff member **120**, a blood pressure value deriver capable of deriving a systolic blood pressure value and/or a diastolic blood pressure value based on a change in a feature amount of the pulse wave signal and a cuff internal pressure at a point of time of the change. Any wires, tubes or interface elements between the device body **110** and the cuff member **120** are not visible to the user.

[0020] To pressurize and depressurize the cuff member **120** which is adapted to be secured around (pulled tight), for example, a patient's arm, a pump is provided which has a connector which enables pressurizing/depressurizing connected to a compression air bladder of the cuff main body via a second tube and tube, to a pulse wave detection air bladder of the cuff main body via a first tube and fluid resistor, and to the sub air bladder of the cuff main body via a third tube and opening/closing valve. Also, a pressure sensor as a cuff pressure detector for obtaining a cuff pressure signal from the change in pressure of the pulse wave detection air bladder is

connected to the pulse wave detection air bladder via the first tube. Furthermore, the third tube is connected to the sub air bladder.

[0021] The first, second, and third tubes, which are not visible to the user, are made of soft tubes. The third tube may be further connected to a damper device that increases the volume in proportion to the pressure and smooth the pressure. Other processes of pressurizing and depressurizing the cuff can be employed without departing from the scope of the disclosure.

[0022] As shown in **FIG. 1F**, the device body **110** is configurable to house the electronics which, for example, control the application of pressure to the cuff and analyze the resulting pressure data as well as transmitting the data **116** (e.g. via Bluetooth) to another device. For example, the pump **112** may be driven by a power supply **114** (e.g., battery) from a pump driver **113** connected to a motor **115**, and supplies the external air into the pump through an opening, thereby performing pressurization. A controller **117** is provided which controls the operation of the device. The air bladders of the cuff can then be pressurized by supplying the pressurizing air to a tube or bladder. A rapid exhaust valve/constant-rate exhaust valve can be provided that has a structure in which the opening area can be changed by the magnitude of the electromagnetic force in order to achieve a depressurization rate of 2 to 4 mmHg/sec.

[0023] A pressure sensor **118**, such as a cuff pressure detector, is configurable to receive a compression pressure signal from the compression air bladder, in which the pulse wave component is attenuated via the fluid resistor, and the pressure change of the pulse wave detection air bladder. A pressure measuring unit **119** for conversion into an analog electrical signal may be provided which is connected to the pressure sensor, and an analog-to-digital (A/D) converter is connected to the pressure measuring unit. The A/D converter can then output a digital signal as a cuff pressure signal to a controller **117**.

[0024] The controller **117** is configurable to include a random access memory (RAM) for performing, for example, read and write of measurement data and analytical results, and a read only memory (ROM) for storing, as various control programs readable by the central controller, a pulse wave processor for detecting a pulse wave signal superposed on a cuff pressure signal, a cuff pressure controller for pressurizing and depressurizing the cuff (the compression air bladder, pulse wave detection air bladder, and sub air bladder), a blood pressure measuring unit for determining the

blood pressure from the detected pulse wave change and compression cuff pressure signal. As would be evident to a person of skill in the art, the RAM can also function as a work area of programs to be processed by the controller **117**.

[0025] The controller **117** is also in communication with a secondary electronic device **150** such as a mobile device which can act as a blood pressure display for displaying the final blood pressure value, and to drivers for performing the above-mentioned driving control operations. The power supply from a power supply unit, including batteries, is performed such that the central controller can perform each operation required for blood pressure measurement by supplying power to the corresponding unit in accordance with the operation of a switch.

[0026] As shown in **FIG. 1G**, a blood pressure measurement device **100** has a device body **110** which houses a power supply **114**, a controller **117**, a memory **152**, a data i/o **154** which is wired or wireless, a signal sensor **156**, a pressure sensor **118**, a controlled release valve **158**, and a pump **112** which is connected to the cuff member **120** by a connecting air pipe **160**.

[0027] As shown in **FIG. 1H**, a user **10** has a blood pressure measurement device **100** comprising a cuff member **120** and a device body **110** secured about the arm of the user **10**. The blood pressure measurement device **100** is in wireless communication with a secondary electronic device **150**, such as a smart phone.

[0028] **FIGS. 2-3** illustrate a wireless electrocardiogram monitor **200** from a first side and a second side. The electrocardiogram monitor **200** has a strap **210** which is used to secure the sensor housing **220** to a user. An buckle **212** is provided which allows the device to be adjustably secured during use. The sensor housing **220** has 4 sensors **230** positioned therein which come into contact with the skin surface of a user during use. Additionally, power source and a controller can be provided. The controller is configurable to receive information from the sensors and to wirelessly transmit the information to an electronic device.

[0029] **FIG. 4** illustrates an interrelationship between components of a suitable system according to the disclosure. Global positioning system (GPS) data **410** can be obtained from a sensor associated with the blood pressure measurement device **100**, an electrocardiogram monitor **200** or from the secondary electronic device **150** in communication with the blood pressure measurement device **100** or electrocardiogram monitor **200**. The patient (user) blood pressure and/or heart rate measurement data **412** is also provided by the blood pressure monitor. The

information is then processed, using a data processing system **420** which is located either on a network or on the electronic device, to generate a blood pressure monitor output **430**. The blood pressure and/or heart rate measurement data **412** can be correlated with other information such as time, date, and GPS data **416**. The information can then be transmitted back to one or more remote location (such as a physician's office or other users). Additionally, patient data **414** can also be provided. Patient data can include, for example, perceived stress level, and/or activity level as well as other information relating to the patient, such as medications. Other sensors can also be provided to provide additional contextual data for use with the GPS data and/or the measurement device data (blood pressure measurement or electrocardiogram monitor). Other sensors, can include accelerometers (for movement detection), barometers, thermometers (for both environmental and body temperature measurement), UV exposure, noise, galvanic skin response, body posture, and skin hydration.

[0030] The system is also configurable to analyze GPS information, which can include altitude information, for a particular patient or user based on one or more of the following: the patient's prior history under similar conditions, or a similar history under similar conditions previously experienced.

[0031] Other aspects include one or more networked devices. The networked devices comprise: a memory; a processor; a communicator; a display; and an apparatus for detecting blood pressure as discussed herein.

[0032] Communication systems are configurable to have at least one of an API engine connected to at least one of the electronic device to create a message about blood pressure data or ECG data and transmit the message over an API integrated network to a recipient having a predetermined recipient user name, a messaging engine connected to the system to create a message about the blood pressure data or ECG data and transmit such message over a network to a recipient device having a predetermined blood pressure data or ECG data recipient IP address, telephone number, or other messaging engine unique identifier, and an email engine connected to the system to create an email message about the blood pressure data or ECG data and transmit the email message over the network to a recipient email. As would be understood by a person of skill in the art, an application programming interface (API) is a set of routines, protocols, and tools for the facilitation of the exchange of data between two or more elements of a data systems or between two or more data systems

[0033] A storing module can also be provided on the server computer system for storing the blood pressure data or ECG data on the system for measuring the characteristic of the blood pressure server database. Moreover, the system is connectable to a server computer system over at least one of a mobile phone network and an Internet network, and a browser on the recipient electronic device which can be used to retrieve an interface on the server computer system. Additionally, a plurality of email addresses are held in a system database and fewer than all the email addresses are individually selectable from the computer system, the email message being transmitted to at least one data recipient email having at least one selected email address. In some instances the system is connectable to the server computer system over the Internet, and a browser on the electronic device to retrieve an interface on the server computer system. A plurality of user names are held in the system database and fewer than all the user names are individually selectable from the computer system, enabling a message to be transmitted to at least one blood pressure data or ECG data recipient user name via an API.

[0034] Other aspects include one or more networked apparatuses. The networked apparatuses comprise: a memory; a processor; a communicator; a display; and an apparatus for receiving user input rates as described herein.

[0035] At the time of measurement of a cardiac data, a global positioning system ("GPS system") is, if not already active, activated, and the cardiac data measurement is performed using a blood pressure monitor, at about the same time, geolocation data or other contextual data on the measurement are collected. In at least some embodiments, the measurement data and GPS data are transmitted and stored in a central location (e.g., a cloud server). In an alternative configuration, the data is stored locally, e.g. either on the measurement device or on a device in wired or wireless communication with the measurement device. As will be appreciated by those skilled in the art, the electronics and software for the GPS system can be resident on a measurement device or on a device in wired or wireless communication with a measurement device. For example, a blood pressure monitor in wired or wireless communication with a mobile device.

[0036] The system is configurable such that the blood pressure measurement data and corresponding GPS data associated with the measurement data can be accessed by one or more users (e.g. the patient, or an authorized family member, or a healthcare provider) on request.

[0037] The systems and methods are configurable to automatically recognize recurring locations or other recurring contextual information. As will be appreciated by those skilled in the art, the system can be configurable such that a cluster can occur when a user takes a measurement within proximity of a prior measurement. Thus, clustering of data can occur when measurements are taken within, for example, 100 feet of certain locations, like home, office, school, and so on. Similarly, clustering of data can occur where the GPS measurement is different than a prior GPS measurement but the altitude at which the GPS measurement is taken is between 500 and 100 meters above sea level, or between 1000 and 1500 meters above sea level, between 1500 and 2000 meters above sea level, of another measurement, and so on. Furthermore, as will be appreciated by those skilled in the art, the system can be configurable such that the system is capable of rejecting and/or otherwise notifying a user about a measurement performed outside of the sensor's effective operating range.

[0038] Systems are configurable to incorporate a variety of operating parameters such as those provided for in **FIG. 3**, including patient/user profile information (diagnostic data, clinical profile, medical requirements), clinical data (diagnostic measurement, systolic measurement), location data (GPS location, altitude), and/or behavioral data (diet, exercise). As will be appreciated by those skilled in the art, the behavioral data regarding diet, for example, can provide additional information pertinent to measuring blood pressure, such as sodium intake or daily level of general physical activity.

EXAMPLES

A. User measures blood pressure at two different GPS locations.

[0039] The system is configured to recognize a location and stores a value of a biometric reading, such as a blood pressure or ECG reading, along with locational data and/or time data. Sometime later, the user is at second location and takes a second biometric measurement. The system records the new location and the value of the biometric reading and tracks that the two measurements are taken in different locations and the user was exposed to different conditions.

[0040] As data is collected, the system is configurable to identify trends such as detecting that a certain health issue is more likely to manifest itself under certain conditions (trigger conditions) that are, for example, present in one or more locations, and not in others. With this trend information, the user can then act to avoid or mitigate such triggering conditions, and thus improve overall health management or health condition management.

B. User measures blood pressure at a similar altitude

[0041] The system recognizes the location of a first biometric reading being taken at a first altitude and stores the value of the reading. Sometime later, the user is at a second location having a same or similar altitude. The system records the new location and the value of the second biometric reading and tracks that the two measurements are taken in different locations but similar altitudes. The system might allow detecting that a certain health issue is more likely to manifest itself under certain conditions (such as altitude) that are, for example, present in a one or more locations, and not in others. The user can then act to avoid or mitigate such trigger conditions, and thus improve overall health management or health condition management.

[0042] The systems and methods according to aspects of the disclosed subject matter may utilize a variety of computer systems, communications devices, networks and/or digital/logic devices for operation. Each may in turn utilize a suitable computing device, which can be manufactured with, loaded with and/or fetch from some storage device, and then execute, instructions that cause the computing device to perform a method according to aspects of the disclosed subject matter. A computing device can include without limitation a mobile user device such as a smart watch, a mobile phone, a smart phone and a cellular phone, a personal digital assistant (“PDA”), such as a Android® or iPhone®, a tablet, a laptop and the like.

[0043] In at least some configurations, a user can execute a browser application over a network, such as the Internet, to view and interact with digital content, such as screen displays. Access could be over or partially over other forms of computing and/or communications networks. A user may access a web-browser, e.g., to provide access to applications and data and other content located on a website or a webpage of a website.

[0044] A suitable computing device may include a processor to perform logic and other computing operations, e.g., a stand-alone central processing unit (“CPU”), or hard wired logic as in a microcontroller, or a combination of both, and may execute instructions according to its operating system and the instructions to perform the steps of the method. The computing device of a user may be part of a network of computing devices and the methods of the disclosed subject matter may be performed by different computing devices, perhaps in different physical locations, cooperating or otherwise interacting to perform a disclosed method. For example, a portable

computing device of a user may run an app alone or in conjunction with a remote computing device, such as a server on the Internet. As will be appreciated by those skilled in the art, “computing device” includes any and all of the above discussed logic circuitry, communications devices and digital processing capabilities or combinations of these.

[0045] Certain embodiments of the disclosed subject matter may be described for illustrative purposes as steps of a method which may be executed on a computing device executing software, and illustrated, by way of example only, as a block diagram of a process flow. Such may also be considered as a software flow chart. Such block diagrams and like operational illustrations of a method performed or the operation of a computing device and any combination of blocks in a block diagram, can illustrate, as examples, software program code/instructions that can be provided to the computing device or at least abbreviated statements of the functionalities and operations performed by the computing device in executing the instructions. Some possible alternate implementation may involve the function, functionalities and operations noted in the blocks of a block diagram occurring out of the order noted in the block diagram, including occurring simultaneously or nearly so, or in another order or not occurring at all. Aspects of the disclosed subject matter may be implemented in parallel or seriatim in hardware, firmware, software or any combination(s) of these, co-located or remotely located, at least in part, from each other, e.g., in arrays or networks of computing devices, over interconnected networks, including the Internet, and the like.

[0046] A machine readable medium is also disclosed storing instructions that, when executed by a computing device, can cause the computing device to perform a method, according to the disclosure contained herein.

[0047] The instructions may be stored on a suitable “machine readable medium” within a computing device or in communication with or otherwise accessible to the computing device. As used in the present application a machine readable medium includes a tangible storage device and the instructions are stored in a non-transitory way. At the same time, during operation, the instructions may at times be transitory, e.g., in transit from a remote storage device to a computing device over a communication link. However, when the machine readable medium is tangible and non-transitory, the instructions will be stored, for at least some period of time, in a memory storage device, such as a random access memory (RAM), a read only

memory (ROM), a magnetic or optical disc storage device, or the like, arrays and/or combinations of which may form a local cache memory, e.g., residing on a processor integrated circuit, a local main memory, e.g., housed within an enclosure for a processor of a computing device, a local electronic or disc hard drive, a remote storage location connected to a local server or a remote server access over a network, or the like. When so stored, the software can constitute a “machine readable medium,” that is both tangible and stores the instructions in a non-transitory form. At a minimum, therefore, the machine readable medium storing instructions for execution on an associated computing device will be “tangible” and “non-transitory” at the time of execution of instructions by a processor of a computing device and when the instructions are being stored for subsequent access by a computing device.

[0048] While preferred embodiments of the present invention have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. It should be understood that various alternatives to the embodiments of the invention described herein may be employed in practicing the invention. It is intended that the following claims define the scope of the invention and that methods and structures within the scope of these claims and their equivalents be covered thereby.

CLAIMS

WHAT IS CLAIMED IS:

1. An apparatus adapted to correlate a blood pressure measurement with GPS data comprising:

a cuff for wrapping around a limb of a subject the cuff further having an inflatable bladder formed integrally therein, wherein the cuff is substantially rectangular in shape having a first surface, a second surface, a first end, a second end, and two sides, and a securement mechanism;

one or more tubes positioned within the cuff in communication with the inflatable bladder;

an exhaust valve;

a housing connected to one of a first end and a second end of the cuff wherein the housing includes one or more of a controller, a memory, a pump, a power supply, and a motor;

a GPS sensor in communication with the apparatus; and

a transmitter for wirelessly transmitting blood pressure data to a second device.

2. The apparatus of claim 1 wherein the blood pressure monitor device is configurable to be in communication with a communication network; and a computer executable instruction that, when executed by a processor analyzes a received blood pressure data and GPS data.

3. The apparatus of claim 2 wherein the computer executable instruction analyzes one or more of patient data and electronic device data.

4. The apparatus of claim 1 wherein the historical user data and historical GPS data is accessible via a communication network.

5. The apparatus of claim 1 further comprising one or more of an accelerometer, a barometer, a thermometer, a UV sensor, a microphone, a galvanic skin response sensor, a body posture sensor, and skin hydration sensor in communication with the apparatus.

6. The apparatus of claim 1 further comprising a pressure detector.

7. The apparatus of claim **1** further comprising a pulse detector.
8. The apparatus of claim **1** wherein patient data and electronic device data is accessible via a communication network.
9. The apparatus of claim **1** wherein the blood pressure monitoring device is in wireless communication with one or more displays.
10. An apparatus adapted to correlate a blood pressure measurement with data recorded by one or more of a barometer, an accelerometer, and a thermometer comprising:
- a cuff for wrapping around a limb of a subject the cuff further having an inflatable bladder formed integrally therein, wherein the cuff is substantially rectangular in shape having a first surface, a second surface, a first end, a second end, and two sides, and a securement mechanism;
 - one or more tubes positioned within the cuff in communication with the inflatable bladder;
 - an exhaust valve;
 - a housing connected to one of a first end and a second end of the cuff wherein the housing includes one or more of a controller, a memory, a pump, a power supply, and a motor; and
 - a transmitter for wirelessly transmitting blood pressure data to a second device;
- wherein the one or more of the barometer, the accelerometer and the thermometer are in communication with the apparatus.
11. The apparatus of claim **10** wherein the blood pressure monitor device is configurable to be in communication with a communication network; and a computer executable instruction that, when executed by a processor analyzes a received blood pressure data and one or more of a barometer data, an accelerometer data, and a thermometer data.
12. The apparatus of claim **11** wherein the computer executable instruction analyzes one or more of patient data and electronic device data.
13. The apparatus of claim **10** wherein one or more of historical user data, historical barometer data, historical accelerometer data, and historical thermometer data is accessible via a communication network.

14. The apparatus of claim **10** further comprising a pressure detector.
15. The apparatus of claim **10** further comprising a pulse detector.
16. The apparatus of claim **10** wherein patient data and electronic device data is accessible via a communication network.
17. The apparatus of claim **10** wherein the blood pressure monitoring device is in wireless communication with one or more displays.
18. A computing device comprising:
 - a processor configured to:
 - receive a GPS location, a historic patient data, and physiological cardiac condition indication for a user wherein the physiologic cardiac condition is selected from heart rate, blood pressure, and ECG;
 - at least one or more of analyze, monitor, evaluate, and provide a prediction for a user based on the GPS location of the user and the physiological cardiac condition indication for the user.
19. The computing device of claim **18** wherein the processor is configured to receive an input for stress level or physical activity level.
20. The computing device of claim **18** wherein the processor is configured to at least one or more of analyze and evaluate historical patient data.
21. The computing device of claim **18** wherein the processor is capable of generating and delivering a blood pressure event message to one or more of the user, and a healthcare provider.
22. The computing device of claim **18** wherein the processor is associated with an electronic device and the electronic device is at least one of a blood pressure monitor and a mobile communication device.
23. The computing device of claim **22** wherein the processor is in communication with one or more of the electronic device, a remote server, and the blood pressure monitor within near field communication range.

24. An apparatus for correlating a ECG measurement with GPS data comprising:
- an ECG measurement device comprising
 - at least two detectors configured to detect a blood pulse from the blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the blood pulse is detected by the at least two detectors, and
 - a strap configured to secure the ECG measurement device to the person during use;
 - a processor configured to verify that the blood pulse has been detected based on whether a first detection of the blood pulse associated with one of the at least two detectors occurs before a second detection of the blood pulse associated with another of the least two detectors, the processor being configured to determine the heart rate of the person on the basis of the detected blood pulse, wherein the processor is further configured to verify that the blood pulse has been detected based on whether the detections by the at least two detectors are separated by a predetermined time difference;
 - a GPS sensor in communication with the ECG measurement device.

25. The apparatus of claim **24** wherein the ECG device is configurable to be in communication with a communication network; a computer executable instruction that, when executed by a processor analyzes a received ECG data and a GPS data.

26. The apparatus of claim **25** wherein the computer executable instruction analyzes one or more of patient data and electronic device data.

27. The apparatus of claim **24** wherein the historical user data and historical GPS data is accessible via a communication network.

28. An apparatus adapted to correlate a blood pressure measurement or ECG measurement with GPS data comprising:

- a measurement device wherein the measurement device is one of a blood pressure measurement device comprising a cuff for wrapping around a limb of a subject the cuff further having an inflatable bladder formed integrally therein, wherein the cuff is substantially rectangular in shape having a first surface, a second surface, a first end, a second end, and two sides, and a securement mechanism, one or more tubes positioned within the cuff in communication with the inflatable bladder, an exhaust valve, and a housing connected to one of a first end and a second end of

the cuff wherein the housing includes one or more of a controller, a memory, a pump, a power supply, and a motor or an ECG measurement device comprising at least two detectors configured to detect a blood pulse from the blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the blood pulse is detected by the at least two detectors, and a strap configured to secure the apparatus to the person during use, a processor configured to verify that the blood pulse has been detected based on whether a first detection of the blood pulse associated with one of the at least two detectors occurs before a second detection of the blood pulse associated with another of the least two detectors, the processor being configured to determine the heart rate of the person on the basis of the detected blood pulse, wherein the processor is further configured to verify that the blood pulse has been detected based on whether the detections by the at least two detectors are separated by a predetermined time difference,

a GPS sensor in communication with the measurement device; and

a transmitter for wirelessly transmitting measured data to a second device.

29. An apparatus adapted to correlate a blood pressure measurement with GPS data comprising:

a cuff means for wrapping around a limb of a subject the cuff means further having an inflatable bladder means formed integrally therein, wherein the cuff means is substantially rectangular in shape having a first surface, a second surface, a first end, a second end, and two sides, and a securement means;

one or more tubular means positioned within the cuff means in communication with the inflatable bladder means;

an exhaust valve means;

a housing connected to one of a first end and a second end of the cuff means wherein the housing includes one or more of a controller, a memory, a pump, a power supply, and a motor;

a GPS sensing means in communication with the apparatus; and

a transmitter means for wirelessly transmitting blood pressure data to a second device.

30. The apparatus of claim 29 wherein the blood pressure monitor device is configurable to be in communication with a communication network; and a computer executable instruction that, when executed by a processor analyzes a received blood pressure data and a GPS data.

31. The apparatus of claim **30** wherein the computer executable instruction analyzes one or more of patient data and electronic device data.

32. The apparatus of claim **29** wherein one or more of historical user data, historical GPS data, historical barometer data, historical accelerometer data, historical thermometer data, historical UV sensor data, historical noise data, historical galvanic skin response data, historical body posture data, and historical skin hydration sensor data is accessible via a communication network.

33. The apparatus of claim **29** further comprising a pulse detector means.

34. The apparatus of claim **29** wherein the blood pressure monitoring device is in wireless communication with one or more displays.

35. An apparatus for correlating a ECG measurement with GPS data comprising:

an ECG measurement device means comprising

at least two detection means configured to detect a blood pulse from the blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the blood pulse is detected by the at least two detection means, and

a strap means configured to secure the ECG measurement device means to the person during use;

a processor configured to verify that the blood pulse has been detected based on whether a first detection of the blood pulse associated with one of the at least two detectors occurs before a second detection of the blood pulse associated with another of the least two detectors, the processor being configured to determine the heart rate of the person on the basis of the detected blood pulse, wherein the processor is further configured to verify that the blood pulse has been detected based on whether the detections by the at least two detectors are separated by a predetermined time difference;

a GPS sensing means in communication with the apparatus.

36. The apparatus of claim **35** wherein the ECG measurement device means is configurable to be in communication with a communication network; a computer executable instruction that, when executed by a processor analyzes a received ECG data and a GPS data.

37. The apparatus of claim 36 wherein the computer executable instruction analyzes one or more of patient data and electronic device data.

38. The apparatus of claim 35 wherein the historical user data and historical GPS data is accessible via a communication network.

39. An apparatus for correlating a biometric measurement with GPS data comprising:

- a biometric measurement device means comprising
 - one or more light-emitting-diode (LED) and a photodiode or other optical sensor configured to detect blood composition or blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the optical sensor measures the changing absorbance at one or more of the wavelengths, allowing it to determine an absorbance or reflectance due to the pulsing arterial blood alone, excluding venous blood, skin, bone, muscle, or fat;
 - a strap means configured to secure the biometric measurement device means to the person during use;
 - a processor configured to verify that the wavelength absorbance or reflectance has been detected based on whether a first detection of the wavelength absorbance or reflectance associated with one of the at least two detectors occurs before a second detection of the wavelength absorbance or reflectance associated with another of the least two detectors, the processor being configured to determine the rate of movement of blood within the blood vessels of the person or the concentration of hemoglobin within the blood;
 - a GPS sensing means in communication with the apparatus.

40. The apparatus of claim 39 wherein the biometric measurement device means is configurable to be in communication with a communication network; a computer executable instruction that, when executed by a processor analyzes a received biometric data and a GPS data.

41. The apparatus of claim 40 wherein the computer executable instruction analyzes one or more of patient data and electronic device data.

42. The apparatus of claim 39 wherein the historical user data and historical GPS data is accessible via a communication network.

43. An apparatus for correlating a biometric measurement with one or more of a barometer, an accelerometer, and a thermometer comprising:

a biometric measurement device means comprising

one or more light-emitting-diode (LED) and a photodiode or other optical sensor configured to detect blood composition or blood circulation of a person and to be placed adjacent to a skin surface of the person, wherein the optical sensor measures the changing absorbance at one or more of the wavelengths, allowing it to determine an absorbance or reflectance due to the pulsing arterial blood alone, excluding venous blood, skin, bone, muscle, or fat;

a strap means configured to secure the biometric measurement device means to the person during use;

a processor configured to verify that the wavelength absorbance or reflectance has been detected based on whether a first detection of the wavelength absorbance or reflectance associated with one of the at least two detectors occurs before a second detection of the wavelength absorbance or reflectance associated with another of the least two detectors, the processor being configured to determine the rate of movement of blood within the blood vessels of the person or the concentration of hemoglobin within the blood;

wherein one or more of the barometer, accelerometer and thermometer are in communication with the apparatus.

44. The apparatus of claim 43 wherein the biometric measurement device means is configurable to be in communication with a communication network; a computer executable instruction that, when executed by a processor analyzes one or more of a received biometric data, barometer data, an accelerometer data, a thermometer data, UV data, galvanic skin response data, and skin hydration data.

45. The apparatus of claim 44 wherein the computer executable instruction analyzes one or more of patient data and electronic device data.

46. The apparatus of claim 43 wherein the historical user data and one or more of historical barometer data, historical accelerometer data and historical thermometer data is accessible via a communication network.

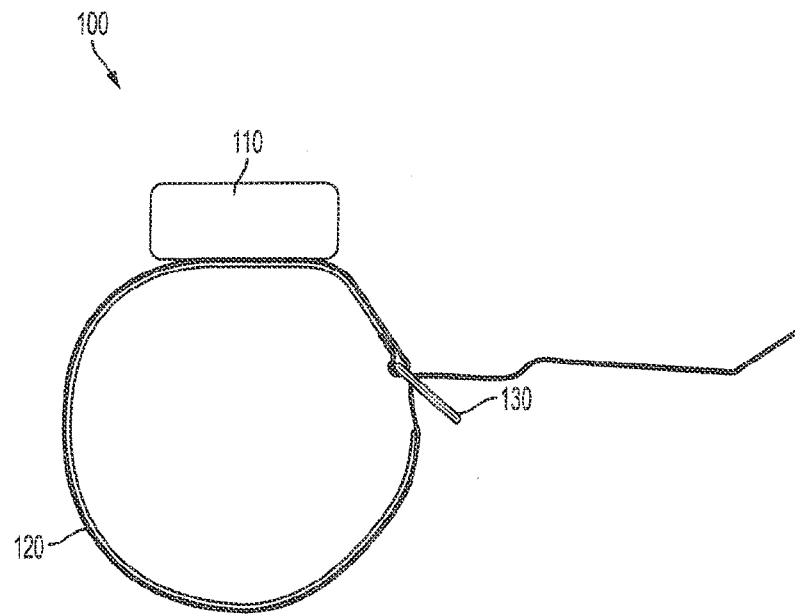


FIG. 1A

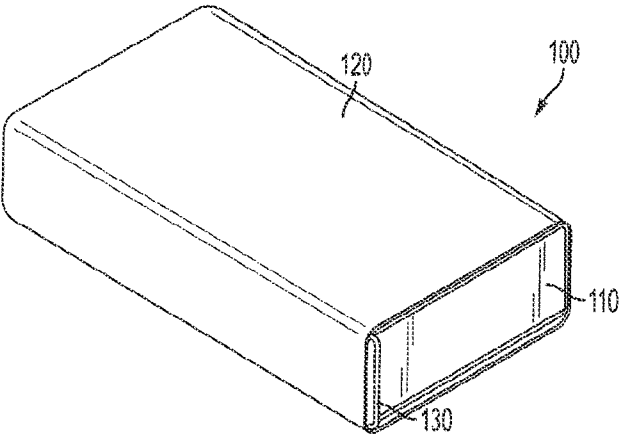


FIG. 1B

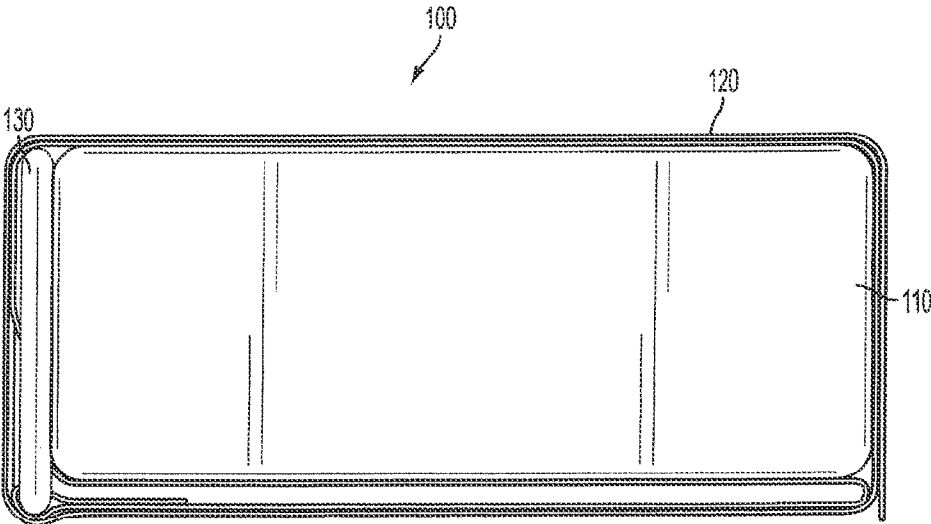


FIG. 1C

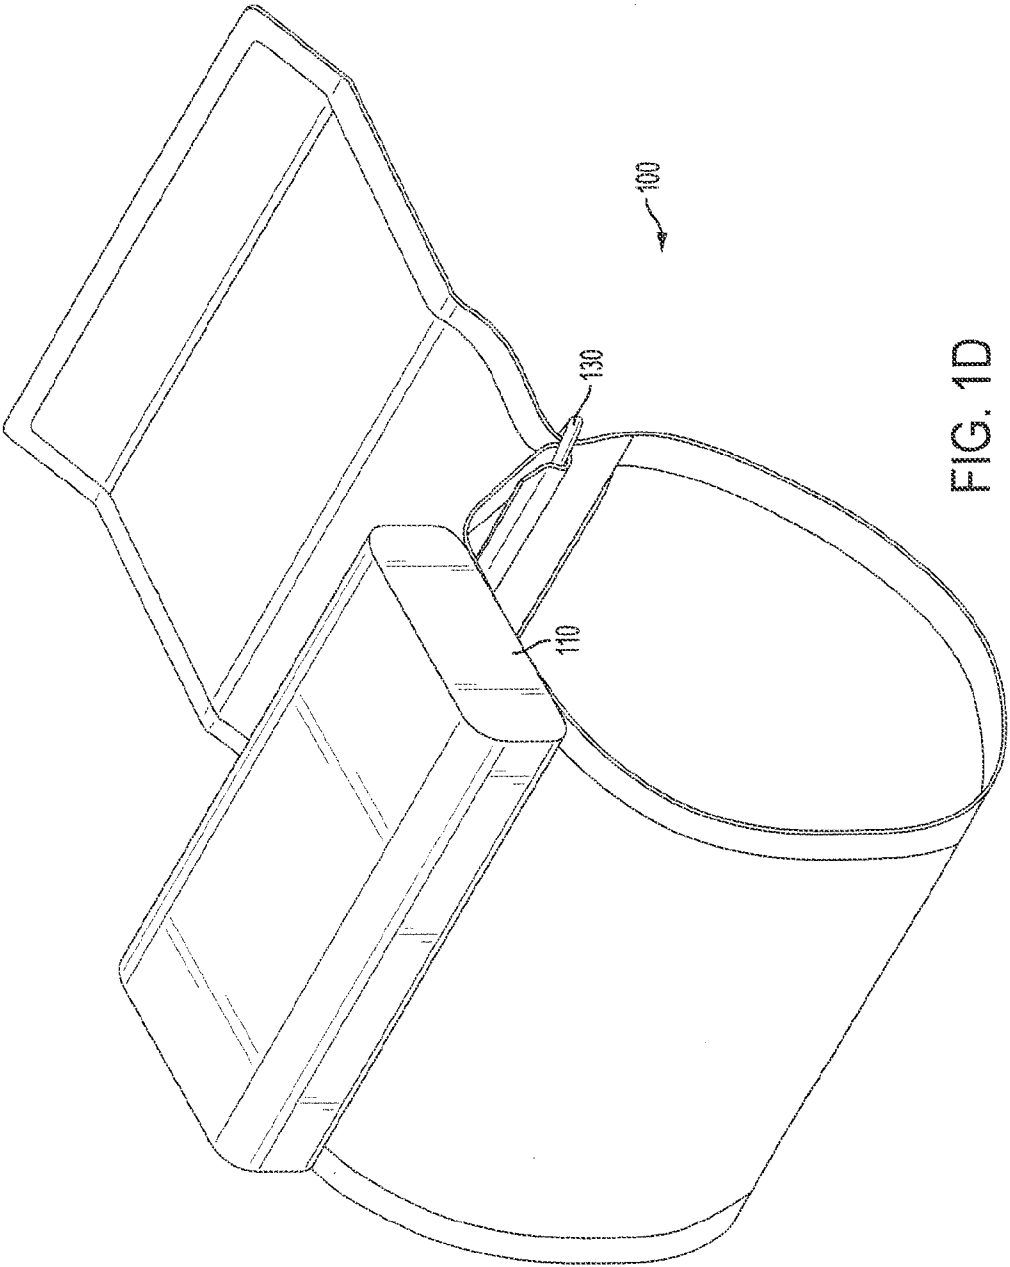


FIG. 1D

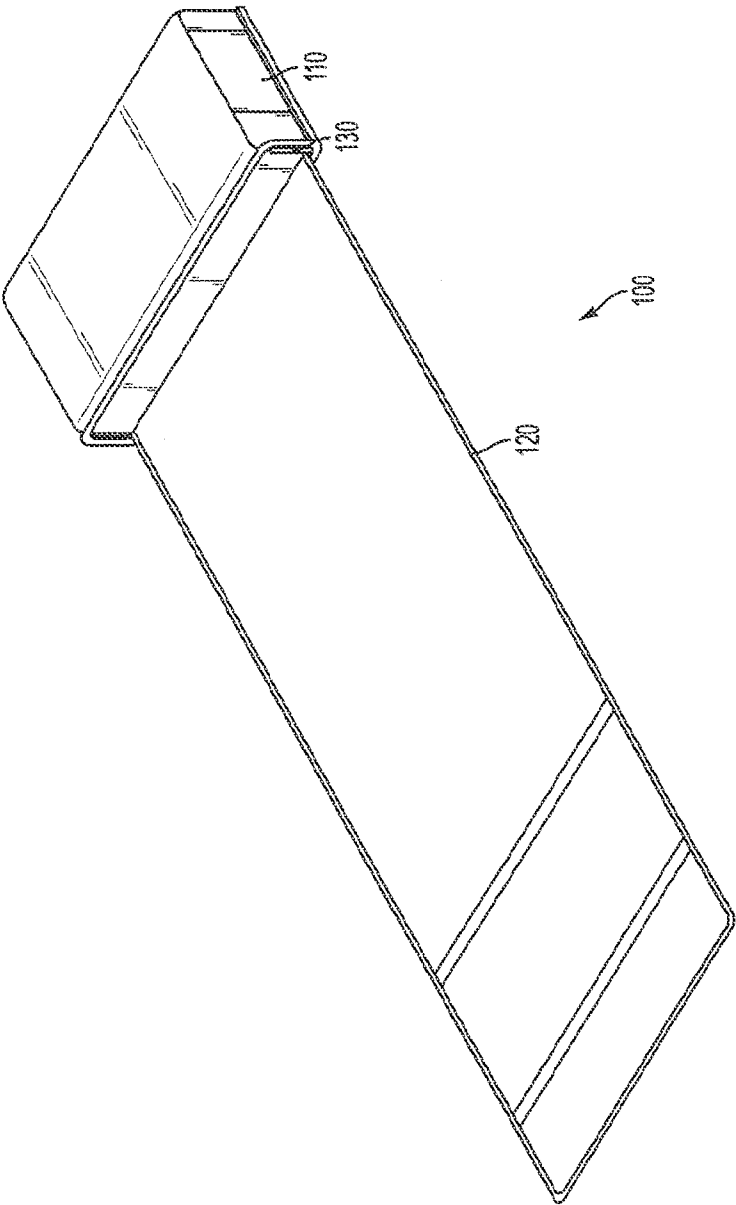


FIG. 1E

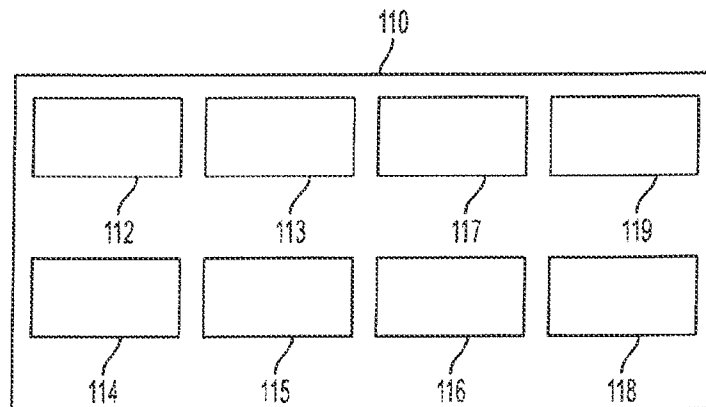


FIG. 1F

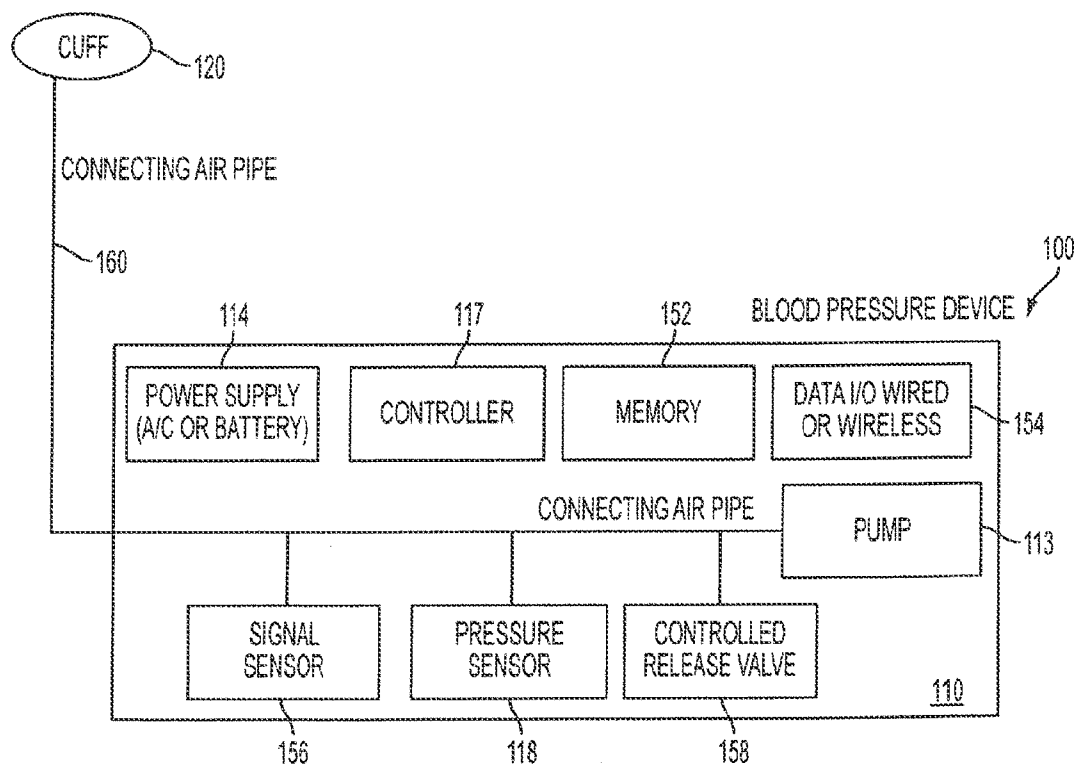


FIG. 1G

6 / 9

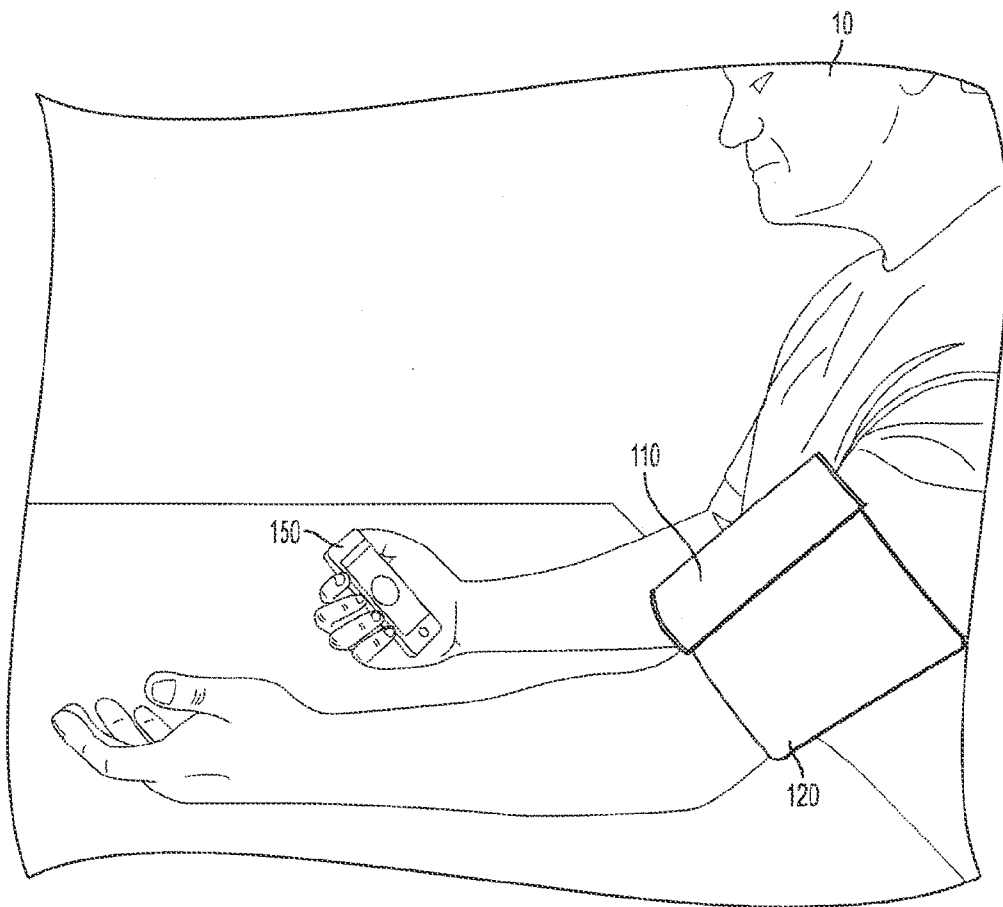
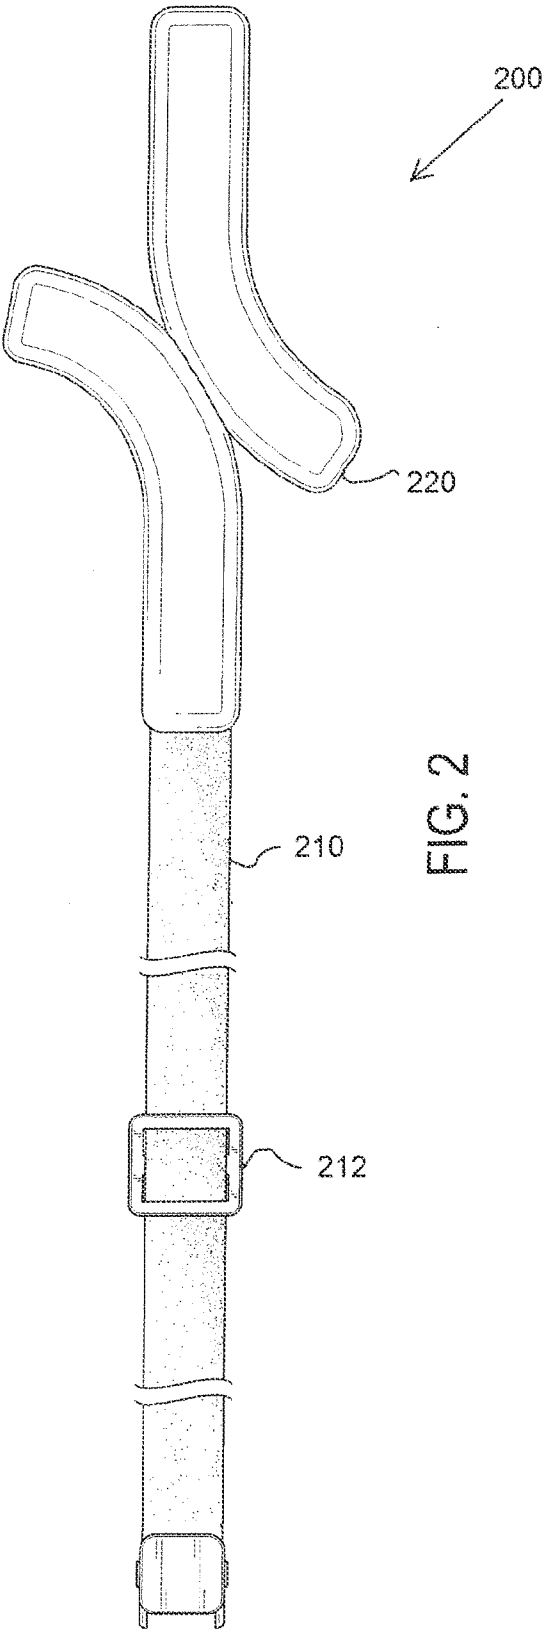
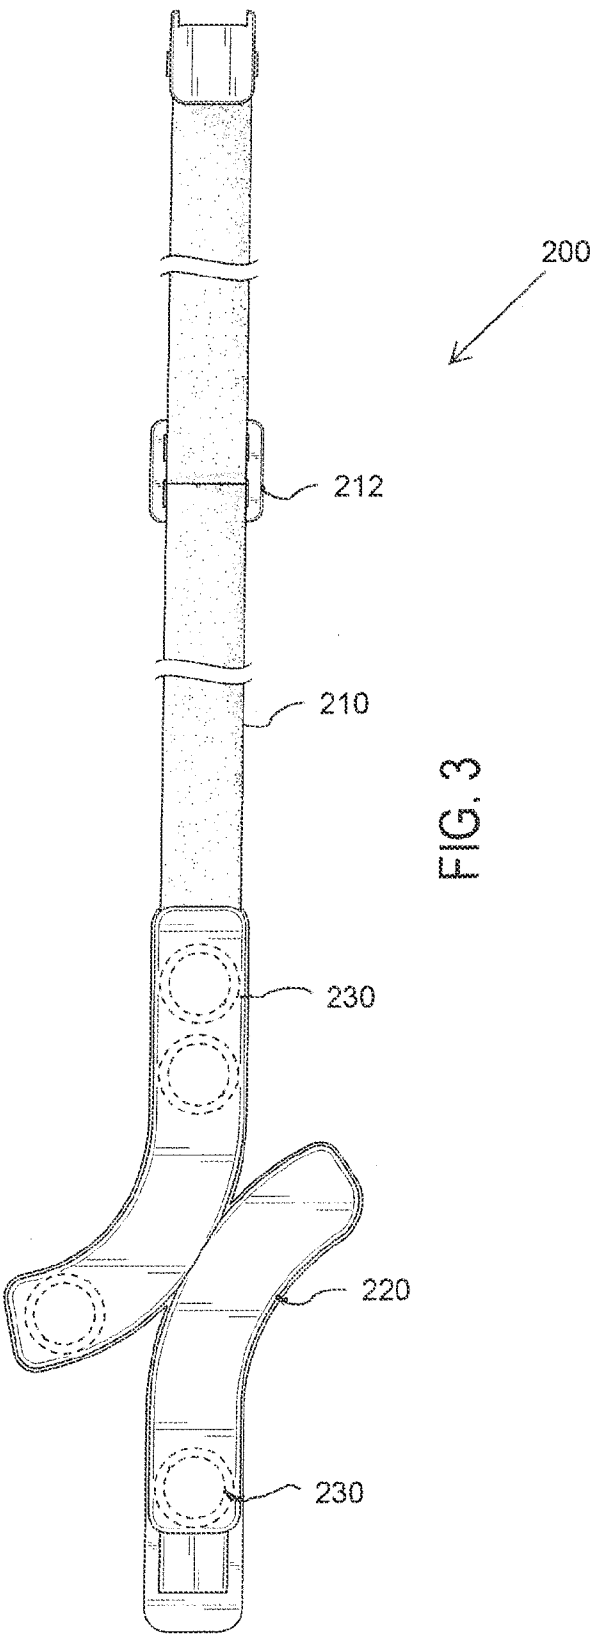


FIG. 1H

7 / 9





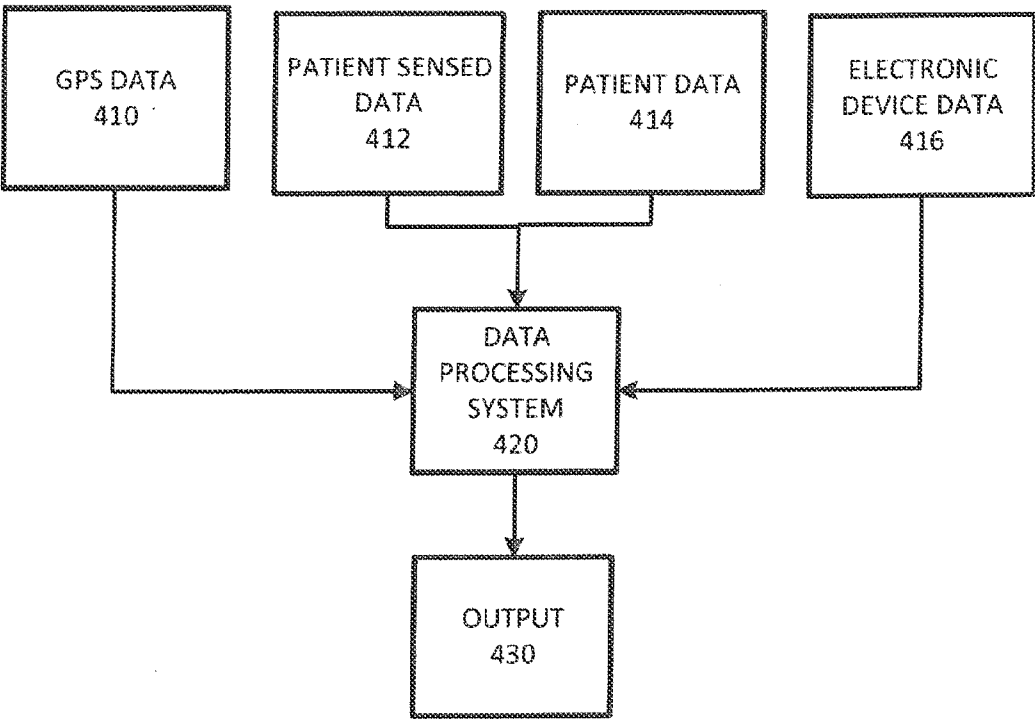


FIG. 4

TABLE 1
OPERATING PARAMETERS

Patient/User Profile	Diagnostic (Dx) Clinical Profile Medication Requirements
Clinical Data	Diastolic Measurement Systolic Measurement Heart rate measurement
Location Data	GPS Location Altitude
Behavioral Data	Diet Exercise

FIG. 5

A. CLASSIFICATION OF SUBJECT MATTER**A61B 5/02(2006.01)i, A61B 5/021(2006.01)i, A61B 5/0402(2006.01)i, A61B 5/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B 5/02; H04N 7/18; A61B 5/021; A61B 5/022; H04B 5/04; A61B 5/00; A61B 5/0402

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: blood, pressure, GPS, cuff, transmitter, ECG

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014-041363 A2 (BUCKLAND, TRACY) 20 March 2014 See abstract, pages 8-20, claims 1-13 and figures 12,17.	1-46
A	US 2010-0177182 A1 (LISE KAGENOW et al.) 15 July 2010 See abstract, claims 49-75 and figure 2.	1-46
A	KR 10-2001-0044241 A (BACK, MOOU CHANG) 05 June 2001 See abstract, claims 1-8 and figure 1.	1-46
A	WO 2004-026126 A1 (CARDIOSAFE INTERNATIONAL AG) 01 April 2004 See abstract, claim 1 and figure 1.	1-46
A	KR 10-2012-0116331 A (LEE, BYUNG-HOON et al.) 22 October 2012 See abstract, claims 1-3 and figures 1-4.	1-46



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 February 2016 (17.02.2016)

Date of mailing of the international search report

17 February 2016 (17.02.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-472-7140

Authorized officer

KIM, Yeon Kyung

Telephone No. +82-42-481-3325



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/059197

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2014-041363 A2	20/03/2014	GB 2505981 A GB 2505981 B WO 2014-041363 A3	19/03/2014 06/08/2014 15/05/2014
US 2010-0177182 A1	15/07/2010	EP 2007273 A1 JP 2009-532140 A JP 4981888 B2 US 8199189 B2 WO 2007-115570 A1	31/12/2008 10/09/2009 25/07/2012 12/06/2012 18/10/2007
KR 10-2001-0044241 A	05/06/2001	KR 20-0228635 Y1	15/06/2001
WO 2004-026126 A1	01/04/2004	AU 2003-254690 A1 CA 2493527 A1 CN 1681433 A EP 1545301 A1 JP 2005-538784 A RU 2005111760 A US 2004-0059205 A1	08/04/2004 01/04/2004 12/10/2005 29/06/2005 22/12/2005 20/09/2005 25/03/2004
KR 10-2012-0116331 A	22/10/2012	WO 2013-122417 A1	22/08/2013

专利名称(译)	用于生物测量测量的情境化记录的设备，系统和方法		
公开(公告)号	EP3215005A4	公开(公告)日	2018-10-31
申请号	EP2015856377	申请日	2015-11-05
申请(专利权)人(译)	QARDIO INC.		
当前申请(专利权)人(译)	Qardio公司		
[标]发明人	PELUSO MARCO IANNELLA ROSARIO		
发明人	PELUSO, MARCO IANNELLA, ROSARIO		
IPC分类号	A61B5/02 A61B5/021 A61B5/0402 A61B5/00		
代理机构(译)	J A KEMP		
优先权	62/075445 2014-11-05 US 14/932273 2015-11-04 US		
其他公开文献	EP3215005A1		
外部链接	Espacenet		

摘要(译)

描述了结合了第二信息的用于监视患者的心脏健康的设备（例如，设备，系统，软件）和方法。该设备可以是与具有通信能力的电子设备通信的心率监测器，血压监测器，ECG或其他生物测定设备。这些设备检测心脏或其他生物特征测量值，并将检测到的信息与辅助信息（例如GPS数据）相关联，以生成上下文相关的测量值。