



(51) International Patent Classification:

A61B 5/00 (2006.01) A61B 5/02 (2006.01)
A61B 5/01 (2006.01) A61B 5/11 (2006.01)

(21) International Application Number:

PCT/US2017/027985

(22) International Filing Date:

17 April 2017 (17.04.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/323,268 15 April 2016 (15.04.2016) US

(71) Applicant: U.S. GOVERNMENT AS REPRESENTED
BY THE SECRETARY OF THE ARMY [US/US];
MCMR-JA, ATTN: Elizabeth Arwine, Esq., 504 Scott
Street, Fort Detrick, Maryland 21702 (US).

(72) Inventor: BULLER, Mark J.; US Army Research Insti-
tute of, Environmental Medicine, Kansas Street, Natick,
Massachusetts 01760 (US).

(74) Agents: METZENTHIN, George A. et al.; CAHN &
SAMUELS, LLP, 1100 17th Street N.W., Suite 401,
Washington, District of Columbia 20036 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR DETERMINING AN ADAPTIVE PHYSIOLOGICAL STRAIN INDEX

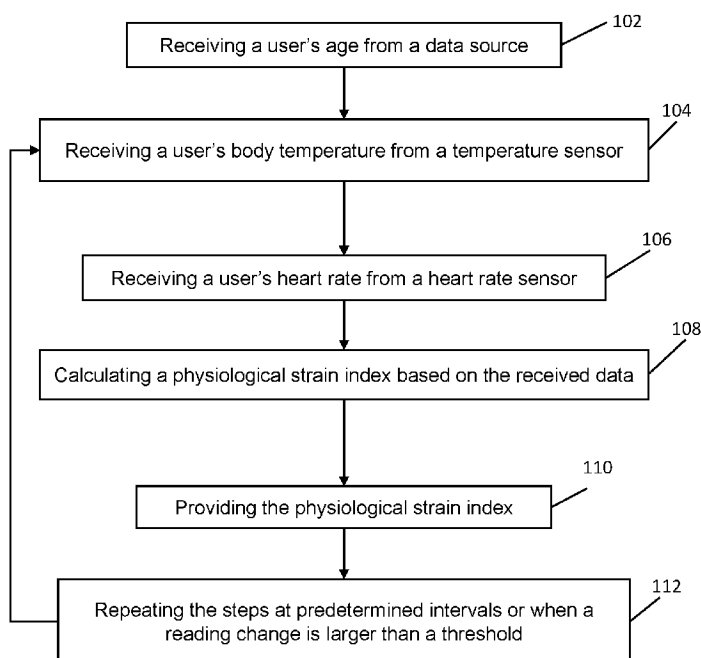


FIG. 1

(57) Abstract: The invention in at least one embodiment includes a system and method for detecting and evaluating an adaptive physiological strain index (aPSI) of an individual with a processor and in a further embodiment taking into account the fitness, age and clothing of the individual based upon physiology. The invention in at least one embodiment includes a system and method to calculate the aPSI using physiological measures. In at least one embodiment, the method obtains an individual's skin temperature and heart rate in order to calculate the individual's aPSI.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

System and Method for Determining an Adaptive Physiological Strain Index

[0001] The patent application claims priority to and the benefit of U.S. Patent Application No. 62/323,268 filed on April 15, 2016, which is hereby incorporated by reference.

I. Field of the Invention

5 [0002] This invention in at least one embodiment relates to determining an adaptive physiological strain index (aPSI) using a body core temperature, a skin temperature, and a heart rate of an individual.

II. Background of the Invention

10 [0003] Hot environments pose a risk of heat illness to people in occupations where heavy workloads and/or protective clothing ensembles are necessary. Excessive heat strain can lead to collapse or even death. Heat-related illness (HRI) has a spectrum of disorders due to environmental heat exposure and includes minor conditions such as heat cramps, heat syncope, and heat exhaustion as well as the more severe condition known as heat stroke.

15 [0004] HRI is an ever present threat to athletes, military personnel, and occupational hazard workers, as the combination of physical exertion in hot environments makes individuals susceptible to heat stroke, heat exhaustion, and heat cramps. HRI prevention includes avoiding medications that can increase the risk of heat illness (e.g., antihypertensives, diuretics, and anticholinergics), gradual adjustment to heat, and sufficient fluids and electrolytes. Mild HRI can be treated by drinking fluids. In more significant HRI cases, spraying with mist and using a fan is
20 useful. For those with severe HRI putting them in lukewarm to cold water is recommended if possible with transport to a hospital.

[0005] Efforts to identify and control the incidence of heat illness/injury originally focused on identifying high risk environments and modifying work/rest schedules. Although the risk of heat illness can be reduced by acclimation, appropriate work rest schedules, and proper
25 hydration, the risk is never entirely abated when there is heavy exertion in a hot environment.

[0006] Assessing risk of heat stress from environmental conditions alone fails to account for individual differences, such as acclimation status, fitness, body composition and morphology, prior heat injury, (which can play a role in an individual's response to working in hot environments) and clothing.

30 [0007] Personal physiological monitoring is one means of overcoming the limitations of assessing heat strain using environment monitoring alone. Modern physiological monitoring systems are becoming more common for monitoring applications; however, while a number of physiological strain indices can be computed from a number of different physiological variables none to date take account of the interplay between an individual's age, fitness, and personal
35 protective equipment being worn.

III. Summary of the Invention

[0008] By combining physiological measures into a single adaptive index of physiological strain (aPSI) it is possible to provide an assessment of risk of HRI to an individual being monitored.

5 [0009] In at least one embodiment, a system for generating an adaptive physiological strain index (aPSI) where the system includes: at least one heart rate sensor configured to be attached to or placed on a person; at least one temperature sensor configured to detect a skin temperature of the person; and a processor configured to produce an aPSI score for the person using a temperature gradient between the skin temperature from the at least one temperature sensor and a
10 body core temperature determined based on the heart rate from the at least one heart rate sensor.

[0010] In at least one embodiment, an system for detecting aPSI for a person (or individual) where the system includes: a heart rate means for detecting a heart rate of a person; a temperature means for detecting a skin temperature of the person; an input means for receiving a person's age; a calculation means for producing an aPSI score for the person based on the
15 detected skin temperature, the detected heart rate, the received input age, and temperature gradient between the detected skin temperature and a body core temperature calculated based on the detected heart rate; and storage means for storing heart rates from the heart rate means, skin temperatures from the temperature means, and body core temperatures from the calculation means.

20 [0011] In at least one embodiment, a system includes: at least one temperature sensor configured to be attached to an individual's skin; at least one heart rate sensor configured to be attached to the individual; a memory for storing at least a resting heart rate for the individual; a processor in electrical communication with the at least one temperature sensor and the at least one heart rate monitor, the processor configured to produce aPSI score for the individual based
25 on the current skin temperature, the resting heart rate, and the current heart rate where the body core temperature is calculated based on the heart rate information and time since initiation of the monitoring, or the body core temperature is obtained from an internal temperature sensor in the individual.

[0012] In at least one embodiment, a system includes: at least one skin temperature sensor
30 configured to be attached to an individual's skin; at least one heart rate sensor configured to be attached to the individual; at least one internal temperature sensor configured to be internal to the individual's skin; a memory for storing at least a resting heart rate for the individual; a processor in electrical communication with the at least one temperature sensor and the at least one heart rate monitor, the processor configured to produce aPSI score for the individual based on the
35 current skin temperature from the at least one skin temperature sensor, the resting heart rate from

the memory, the current heart rate from the at least one heart rate sensor, and the body core temperature from the internal temperature sensor.

[0013] Further to any of the above embodiments, the system further includes a data storage configured to store data related to an age of the person; and where the processor calculating the aPSI score based on the following equation:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is the body core temperature at a time t , CT_{rest} is the body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is the heart rate at rest, $HR_{critical}$ is a maximum heart rate, $CT_{critical}$ is a maximum body temperature, and ST is the skin temperature. Further to the previous embodiment, the processor adjusts the aPSI score based on at least one of a fitness level, an age, a maximum heart rate, and a resting heart rate of an individual. Further to the previous two embodiments, wherein the aPSI score is recalculated at predetermined intervals when a variance is detected in at least one of the detected skin temperature and the detected heart rate. Further to the previous three embodiments, the equation uses an individual specific heart rate critical for the individual while using the following equations:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

[0014] Further to any of the above embodiments, where the processor configured to produce a new calculated aPSI score at predetermined intervals based on variances in at least one of the skin temperature and the heart rate received by the processor. Further to any of the above embodiments, the system further including a timer circuit in communication with the processor, and where the processor configured to produce a new calculated aPSI score based on calculating at least one first aPSI score at an initial time designation of a timer circuit and calculating a new aPSI score at predetermined time intervals as provided by the timer circuit. Further to the previous embodiment, the system further includes an accelerometer in communication with the processor; and where the processor is configured to detect at least one of a resting heart rate and a resting skin temperature of the individual when a plurality of signals from the accelerometer remained below a predetermined threshold for a predetermined time period and/or substantially remained below the predetermined threshold for the predetermined time period, and the

processor further configured to determine a resting body core temperature for the individual based on the resting heart rate.

[0015] Further to any of the above embodiments, where the processor calculates the body core temperature using a Kalman filter or an extended Kalman filter. Further to any of the above
5 embodiments, the system including a display in communication with the processor to display the calculated aPSI index produced by the processor. Further to any of the above embodiments, the system including an alarm in communication with the processor. Further to the previous embodiment, the processor is configured to produce an alert signal to the alarm when the calculated aPSI score exceeds a predetermined aPSI score threshold. Further to any of the above
10 embodiments, the system is housed in a wearable device.

[0016] In at least one embodiment, a method for generating an adaptive physiological strain index (aPSI) from a body temperature and heart rate for an individual, the method includes: receiving by a processor a heart rate signal from a heart rate sensor detecting a heart rate of the individual; receiving by the processor a skin temperature reading from a temperature sensor
15 detecting a skin temperature of the individual; calculating with the processor a body core temperature for the individual based on the heart rate signal; calculating with the processor a temperature gradient between the skin temperature reading and the body core temperature; calculating with the processor an aPSI score for the individual using the body core temperature, the temperature gradient and the heart rate signal; and producing the calculated aPSI score from
20 the processor.

[0017] In at least one embodiment, a method for generating an adaptive physiological strain index (aPSI) from a skin temperature, a body core temperature and a heart rate, the method includes: receiving by a processor a heart rate signal from a heart rate sensor; receiving by the processor a skin temperature reading from a skin temperature sensor; receiving by the processor
25 a body core temperature from an internal temperature sensor; calculating with the processor a temperature gradient between the skin temperature reading and the body core temperature reading; calculating with the processor an aPSI score for the person using the body core temperature, the temperature gradient and the heart rate signal; and producing the calculated aPSI score from the processor, and when one of the physiological readings is unavailable, using
30 a previously stored value or calculating a value for the physiological reading.

[0018] According to either of the above method embodiments, the method further includes receiving the individual's age from at least one of an input device, memory, database, or data storage, wherein the person's age data can be accessed by the processor. Further to the previous embodiment, where calculating the aPSI score is based on said processor calculating the aPSI
35 score based on the following equation:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is a body core temperature at a time t , CT_{rest} is a body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is a heart rate at rest, $HR_{critical}$ is a maximum heart rate, and $CT_{critical}$ is a maximum body temperature.

[0019] According to any of the above method embodiments, the method further includes calculating by the processor the body core temperature based on a Kalman filter or an extended Kalman filter. According to any of the above method embodiments, the method further includes when the received body temperature exceeds a predetermined threshold, generating an alert signal by the processor for an alarm. According to any of the above method embodiments, the method further includes adjusting by the processor the aPSI score based on at least one of a fitness level, an age, a maximum heart rate, or a resting heart rate of the individual. According to any of the above method embodiments, the method further includes said processor configured to produce a new calculated aPSI score at predetermined intervals based on at least one of variances in the detected body temperature by the temperature sensor and the detected heart rate by the heart rate sensor. According to any of the above method embodiments, the method further includes calculating with the processor new calculated aPSI scores at predetermined time intervals.

IV. Brief Description of the Drawings

[0020] FIG. 1 illustrates a method according to one embodiment of the system.

[0021] FIG. 2 illustrates a system according to at least one embodiment of the invention.

[0022] FIG. 3 illustrates a system according to at least one embodiment of the invention.

[0023] FIG. 4 illustrates a system according to at least one embodiment of the invention.

[0024] FIG. 5 illustrates a system according to at least one embodiment of the invention.

[0025] FIG. 6 illustrates a system according to at least one embodiment of the invention.

[0026] FIG. 7 illustrates a computer program product and computer implementation according to at least one embodiment of the invention.

V. Detailed Description of the Drawings

[0027] The invention in at least one embodiment includes a system and a method to calculate an index of heat strain (e.g., 0 = no strain, 9 = very high strain) using physiological measures. Prior indices did not include an ability for application to different populations,

different work, and/or protective clothing environments. Table 1 shows the original PSI levels and the associated levels of thermal work strain according to Moran et al. (1998):

Table 1

<u>PSI</u>	<u>Strain</u>
0	
1	No/Little
2	
3	Low
4	
5	Moderate
6	
7	High
8	
9	Very High
10	

It has been found in the past that it is possible to exceed a PSI of 10 under certain circumstances.

- 5 The above table is relevant for at least one of the disclosed embodiments, the adaptive physiological strain index ("aPSI" or "adaptive PSI") provides a strain index score between 0 and 10 that takes into account the conditioning of the individual, the environment they are in, and the clothing they are wearing while being monitored. Existing systems would have a marathon runner having a high PSI (e.g., 11 or 12) compared to an individual wearing a fully enclosed
- 10 Hazmat suit having a lower PSI (e.g., 7.5). An observer would deem the Hazmat suit individual being under more strain than the marathon runner. In at least one embodiment, this invention addresses this inaccuracy.

- [0028] In at least one embodiment, a system and/or a method is provided to use an individual's body core temperature in connection with their heart rate and skin temperature to
- 15 determine their aPSI. The invention in at least one embodiment includes a method for detecting and evaluating the aPSI of the individual with a processor having suitable programming to perform the functions discussed in this disclosure. In at least one embodiment, the relationship between the body core temperature and heart rate is a quadratic relationship that varies over a range of heart rate measurements, where in at least one embodiment the range is between 50 and
- 20 180 beats/minute, and in a further embodiment, the maximum heart rate is set to 220 minus the person's age with a corresponding quadratic relationship. In a further embodiment, the system and method use a Kalman filter model or an extended Kalman filter to determine the body core temperature. In at least one embodiment, the system and method calculates and adjusts for external factors that may influence the adaptive physiological strain index, such as the
- 25 environment, clothing, physical fitness, and the person's age or weight.

[0029] FIG. 1 illustrates a method for operation of at least one system embodiment like those illustrated in FIGs. 2-6. A processor 210 receives the individual's age from a data source,

102. Examples of how the individual's age can be received include: 1) the individual providing his/her age is received through an input device such as a keyboard or other data entry mechanism including virtual versions; 2) retrieval of stored data about the individual; and 3) a combination of the previous two examples. In an alternative embodiment, this step is omitted from the method. In an alternate embodiment, the resting physiological information is provided in a similar manner at least as a starting point.

[0030] The processor 210 receives a skin temperature from at least one temperature sensor 230, 104. The processor 210 receives a measured heart rate from a heart rate sensor 220, 106. In at least one embodiment, there is one component that provides the skin temperature and the individual's heart rate. In at least one alternative embodiment, the processor sends a request for the person's skin temperature and/or heart rate to the appropriate sensor(s) for a reading instead of a continual data feed from these sensors.

[0031] In at least one embodiment, steps 102 through 106 can be performed in a different order and/or substantially simultaneous or substantially concurrently with each other.

[0032] The processor 210 calculates the aPSI score for the individual, 108. In at least one embodiment, the aPSI score is determined based on a quadratic calculation of the values of at least one of received skin temperature, the received heart rate, and the received age of the individual. In at least one embodiment, the aPSI score is calculated using a critical body core temperature that is based on a temperature gradient between the resting body core temperature, which is calculated based on the heart rate in at least one embodiment, and the skin temperature.

[0033] In at least one embodiment, the body core temperature is calculated in a multi-step process using an extended Kalman filter as discussed in U.S. Pat. App. Pub. No. US-2014-0180027-A1, which is hereby incorporated by reference. In a further embodiment, the processor can produce the body core temperature for the individual using a number of factors for an individual based on physical characteristics such as height, weight, and age. In at least one embodiment, using any known way to estimate a body core temperature including using any combination of skin temperature, physiological data, accelerometer data, environmental information, and clothing information.

[0034] The processor then provides the calculated aPSI score, 110. The calculated aPSI score may be provided to a display, a memory, a transmission system for relaying to an external device or system, and an alarm. The aPSI provides an improved indication of the current physiological strain of the individual being monitored, and would allow for an activity or pace change by the individual, if possible, to lower the physiological strain.

[0035] Repeating the receiving (104 and 106), calculating (108) and providing (110) steps at predetermined intervals, 112. Examples of predetermined intervals include 30 second intervals, 1

minute intervals, 2 minute intervals, 5 minute intervals, and 10 minute intervals, and hour intervals. In a further embodiment, the method includes setting or selecting the predetermined interval prior to calculating the aPSI score. In at least one further embodiment, a timer (or timer circuit or timing circuit) 340 illustrated in FIG. 3 can be used to delay the repeat cycle after calculating each aPSI score. In at least one embodiment, the aPSI score is calculated at variable times based on a change in the detected temperature, the heart rate that exceeds a predetermined threshold, the rate of change at least one physiological signal (e.g., skin temperature or heart rate) over a predetermined change time, or a combination of these.

[0036] In at least one further embodiment, when the aPSI score exceeds a predetermined alarm threshold, an alert is generated by an alarm 450 of FIG. 4. In at least one embodiment, the processor 210 provides an alarm signal to the alarm 450 that triggers the alert.

[0037] In a further embodiment illustrated in FIG. 5, the system includes at least one accelerometer 555 to monitor activity of the individual to facilitate obtaining resting physiological information about the individual such as resting body core temperature (CT_{rest}) and resting heart rate (HR_{rest}) and in other embodiments, the skin temperature. The illustrated system also includes the timer circuit 340. The processor 210 is in electrical communication with the timer circuit 340 and the accelerometer 555 to detect when the accelerometer 555 signal(s) are below a predetermined threshold for a predetermined time based on a time signal from the timer circuit 340.

[0038] In at least one embodiment, when the accelerometer signal(s) decreases below the predetermined threshold, the processor 210 stores the current time data in memory for later comparison or alternatively begins a counter that is incremented based on the time signal. Under the comparison embodiment, when the current time data is greater than the stored time data by the predetermined time, the processor 210 pulls and/or processes the signal from the heart rate sensor 220 to obtain the resting heart rate, which then is used to determine the resting body core temperature. Under the counter embodiment, the processor 210 increments the counter based on the time signal until it matches and/or exceeds the predetermined time before pulling and/or processing the signal from the heart rate sensor 220.

[0039] In a further embodiment, when the accelerometer signal(s) exceeds the predetermined threshold momentarily before decreasing below, the time does not reset. In such a situation, the accelerometer signal(s) has substantially remained below the predetermined threshold.

[0040] In at least one embodiment, the predetermined time is 20 minutes, 25 minutes, 30 minutes, 35 minutes, etc. In an alternative embodiment, the predetermined time is shorter such as 10 minutes or 15 minutes, and the processor 210 compares the heart rate signal starting at the

predetermined time to follow-on recordings while the accelerometer signal(s) remains below the predetermined threshold to determine whether the heart rate signal has stabilized. Stabilized as used in this disclosure means that the signal level falls within a range set in the processor 210 for the physiological characteristic being monitored.

- 5 [0041] Using any of the previously mentioned variables, the modified and adaptive PSI includes an ability for application to different populations, different work, diverse age ranges, and/or protective clothing environments. The equation for the adaptive PSI score in at least one embodiment is as follows:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5 + \frac{(CT_t - ST_t) - 4}{4}$$

10

In the adaptive PSI equation, the CT_t is the body core temperature at a time t , CT_{rest} is the body core temperature at rest, HR_t is heart rate at a time t , and the HR_{rest} is heart rate at rest, the $HR_{critical}$ is a critical maximal heart rate threshold used to determine a maximal aPSI. In at least one embodiment the $HR_{critical}$ in the adaptive PSI equation has a value as 90% of HR_{max} as suggested by the American College of Sports Medicine Guidelines (America College 1991) and also includes the variable (220-age) for the $HR_{critical}$ value to be configured to apply to individuals of any age. In an alternate embodiment, the $HR_{critical}$ can be set as 90% of HR_{max} derived from a VO2 max test. In at least one embodiment, the $HR_{critical}$ is determined for the particular person based on previous physiological measurements.

15

20

[0042] The adaptive PSI equation also includes $CT_{critical}$ as the critical body core temperature which is adapted in real-time based on a body core temperature (CT_t), a skin temperature (ST_t), and a critical temperature such as 39.5 °C. During activity the $CT_{critical}$ will vary based on a temperature gradient between the current core temperature and the current skin temperature.

25

[0043] In at least one embodiment, the method and system are able to adapt to constraints on available physiological data for use.

30

[0044] In the case of resting body core temperature and resting heart rate, the values used may be preset, entered by the individual or another person as discussed previously, or based on physiological measurements taken at rest. When the resting body core temperature is not available, then it may be set to 37.1 °C or calculated from the resting heart rate using, for example, a Kalman filter or an extended Kalman filter or other similar estimation for body core temperature based on heart rate. When the resting heart rate is not available, then it may be set at

71 beats per minute. In at least one embodiment, the system is prompted to take the current heart rate by a user or the individual to establish the individual's resting heart rate.

[0045] In at least one embodiment, the critical heart rate ($HR_{critical}$) is set to 180 beats per minute. In other embodiments, it is set based on the individual's age using the equation above or is obtained from another source for this specific individual based on physiological testing.

[0046] When the skin temperature is unavailable, the skin temperature is set to body core temperature minus four degrees Celsius in at least one embodiment. In at least one further embodiment, the critical body core temperature ($CT_{critical}$) is set based on the clothing being worn by the individual. In a further embodiment, $CT_{critical}$ is set as follows:

TABLE 2: $CT_{critical}$ Values based on Clothing

Full Encapsulation in PPE	about 38.5 °C or less
Long Sleeves and Pants	about 39.5 °C or less
Shorts and T-shirt	about 40.0 °C
Default Setting	39.5 °C

As discussed above, $CT_{critical}$ may be set pursuant to the equation above when the resting body core temperature and the skin temperature are known. In a further embodiment, the skin temperature is modified based on the location of the sensor used to obtain the skin temperature to take into account the gradient that is present on an individual's skin based on body location.

[0047] In other embodiments, where just the heart rate is available for the individual (for example, if the skin temperature sensor is omitted or not providing data), the body core temperature is calculated from the heart rate and $CT_{critical}$ is set to 39.5 °C. When heart rate and skin temperature are available for the individual, using the equations above and calculating body core temperature from the heart rate. When the embodiment also includes a sensor for body core temperature, then using heart rate and body core temperature to determine the aPSI and taking into account whether skin temperature is available or not and adjusting accordingly using the above-described approaches.

[0048] In at least one embodiment as illustrated, for example in FIG. 2, the methods discussed in connection with FIG. 1 are performed on the processor 210 running code that enables the performance of at least one method embodiment and is in communication with the heart rate sensor 220 and the temperature sensor 230. Examples of a heart rate sensor 220 include a heart rate monitor attached to the individual, a processor for receiving EKG signals from electrodes attached to the person, a processor for receiving a photolthysmogram signal (e.g., a pulse oximeter), or a processor for receiving a ballistic-cardiogram signal. The processor used as part of the heart rate sensor 220 in at least one embodiment is the processor 210.

Examples of a temperature sensor 230 configured to detect a temperature on the exterior of the individual being monitored, such as an expanse of skin, can include various analog and digital temperature sensors, and infrared thermometers. In at least one embodiment, there is a memory, data storage, or storage (not illustrated) in communication with the processor 210.

5 [0049] In at least one embodiment of the previous embodiments, for example as illustrated in FIG. 3, there is an optional component of the timer circuit 340 for setting or scheduling the sampling times (or intervals) at which the heart rate is used to calculate the body core temperature. In an alternative embodiment, the predetermined intervals are set by a user or the individual being monitored. In a further alternative embodiment, the predetermined time period
10 is stored in a memory or data storage, for example, on a memory chip located on the user's wrist, in a database located on a network, or is present in the code running on the processor 210. The timer circuit 340, for example, can adjust the sampling intervals for various periods such as 30 second, 1 minute, and 5 minute intervals. The timer circuit 340 can transmit a signal to the processor 210 notifying the processor 210 to perform at least one instruction, such as alerting the
15 processor 210 that a time interval of one minute has occurred. The timer circuit 340 can be an integrated circuit, chip, or microchip used for timing, pulse, and/or oscillator applications.

[0050] In at least one further embodiment to any of the embodiments as illustrated in FIG. 4, the system includes the alarm 450 or another similar component to produce an alert indicating the person being monitored has exceeded an alarm parameter threshold for the aPSI score as
20 calculated by the processor 210. The alarm 450 can be contained within the system or in communication with the system to produce an alert. The alert can be produced in any sensory form, such as auditory output through a speaker, visual output through a display and/or light elements, and/or a vibration from a transducer, configured to alert the individual or a monitoring system that the PSI parameter threshold has been exceeded.

25 [0051] As illustrated in FIG. 5, in at least one further embodiment to any of the above embodiments, the system includes a timer circuit 340 and at least one accelerometer 555 in communication with the processor 210. The accelerometer 555 is configured to provide a signal to the processor 210 based on the individual's movements that are detected.

[0052] In a further embodiment to the above embodiments, the system includes a sensor
30 internal to the individual being monitored to measure body core temperature. The sensor is in communication with the processor wirelessly. An example of the internal temperature sensor is a thermometer pill (Jonah Pill, Respireonics, Bend, Oregon) that would be orally ingested.

[0053] In at least one embodiment, the processor 210, the heart rate sensor 220, the temperature sensor 230, and/or the other described electronics, such as the timer 340, the alarm
35 450, or the accelerometer 555, embodied in the block diagrams of FIGs. 2-5, are housed within

or attached to an apparatus worn by an individual being monitored, such as on the individual's chest, arm, or wrist, but is not limited in this regard.

[0054] In a further embodiment illustrated in FIG. 6, the processor 210, the timer circuit 340, the alarm 450, and the accelerometer 555 are present in one housing 690, such as that provided by a smartphone or smartwatch, in wireless communication with the heart rate sensor 220 and/or the temperature sensor 230. In a further embodiment or in addition to the previous embodiments, the body core temperature, the heart rate, and/or the aPSI score can be shown on a display present on the wearable device, such as a wrist worn display, a smart telephone, or a heads up display, for viewing by the person being monitored.

[0055] In at least one embodiment, the processor 210 is detached from the individual being monitored and is located in external equipment such as a medical monitor or a computer implemented device running software according to at least one method embodiment. In such an embodiment, examples of how the information is sent to such external equipment include, but is not limited to, transmitting can be sent wirelessly including optically, or by various types or arrangements of hardwire connections, or combinations thereof. An example of wireless and optical transmissions is through a transmitter and a receiver. In a further embodiment to any of the previous embodiments, the information can be received through, for example, a user interface, such as a keyboard, graphical user interface (e.g. touchscreen) on a display, or a microphone.

[0056] The information and operations that are transmitted throughout the various described embodiments can be in the form of electronic data, wireless signals, or a variation thereof, for example. In at least one embodiment, the processor 210 can be designed to accomplish signal processing in the configured apparatus containing the sensors and electronics but can transmit signals to a network for further processing. In another embodiment, the processor 210 is connected to a communications circuit 660 to transmit the body core temperature, the skin temperature, the heart rate, and/or the aPSI score to an external system for monitoring and/or display. FIG. 6 illustrates a communications circuit 660 configured to communicate directly with the external system, such as the communication circuit 660 communicating directly with a smart phone 670. The information and operations that are transmitted throughout the various embodiments can be sent wirelessly, optically, or by various types or arrangements of hard wire connections, or combinations thereof, among the various system components, for example.

[0057] In a further embodiment, the system includes one or more means instead of a particular component.

[0058] A heart rate means for detecting a heart rate includes a sensor for measuring heart beats or blood flow, a heart rate sensor, a heart monitor, or another biotelemetry device

configured to detect a heartbeat, heart rate, or blood flow but is not limited in this regard and the means for measuring a heart rate or heart beat can be measured in real time or recorded for later use.

[0059] In at least one embodiment, a temperature means for measuring the skin temperature can include various manual or digital thermometer and temperature gauges, but is not limited in this regard and additional apparatuses configured to detect heat or temperature can be used. The temperature means can detect skin temperature of an area of a body, such as an area of skin, can include a manual or digital thermometer, a temperature gauge, for example but is not limited in this regard and additional apparatuses configured to detect heat or temperature of an area of a body can be used.

[0060] An input means for receiving input, such as receiving a user's age includes a user interface such as a keyboard, graphical user interface (e.g., touchscreen) on a display, or voice recognition interface but is not limited in this regard and can also include receiving data from a device, memory, database, data storage, or apparatus configured to store or transmit data.

[0061] In at least one embodiment, a calculation means for calculating an aPSI score for the person based on the detected skin temperature, the detected heart rate, the received input age, and temperature gradient between the detected skin temperature and a body core temperature calculated based on the detected heart rate is the processor with suitable programming to perform the steps associated with this function.

[0062] In an alternative embodiment, the Kalman filter model or the extended Kalman filter model is adjusted for fitness level. In particular, the aPSI score can be adjusted by increasing it for better fitness and decreasing it for lower fitness levels. In a further alternative embodiment, the Kalman filter is adjusted based on age of the person by adjusting the maximum heart rate used in the model to reflect the person's age. An example of one way to determine maximum heart rate is to use 220 minus the person's age; however, the maximum heart rate could be determined for the person based on physiological testing prior to use of the heart rate sensor. In at least one embodiment, the maximum heart rate is adjusted to reflect the heart rate for the person while leaving the starting heart rate alone and thereby adjusting the scale of the correlation between the heart rate and the body core temperature. In a further alternative embodiment, any combination of the fitness, age, resting heart rate, and maximum heart rate are used to adapt or fine-tune the aPSI score the monitored individual.

[0063] As will be appreciated by one skilled in the art based on this disclosure, aspects of the present invention may be embodied as a system, method or computer program product. Accordingly, aspects of the present invention may take the form of an entirely hardware embodiment, a processor operating with software embodiment (including firmware, resident

software, micro-code, etc.) or an embodiment combining software and hardware aspects that may all generally be referred to herein as a "circuit," "module" or "system." Furthermore, aspects of the present invention may take the form of a computer program product embodied in one or more computer readable medium(s) having computer readable program code embodied thereon.

[0064] Any combination of one or more computer readable medium(s) may be utilized. The computer readable medium may be a computer readable signal medium or a computer readable storage medium. A computer readable storage medium may be, for example, but not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus, or device, or any suitable combination of the foregoing. More specific examples (a non-exhaustive list) of the computer readable storage medium would include the following: an electrical connection having one or more wires, a portable computer diskette, a hard disk, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), an optical fiber, a portable compact disc read-only memory (CD-ROM), an optical storage device, a magnetic storage device, or any suitable combination of the foregoing. In the context of this disclosure, a computer readable storage medium may be any tangible medium that can contain, or store a program for use by or in connection with an instruction execution system, apparatus, or device.

[0065] A computer readable signal medium may include a propagated data signal with computer readable program code embodied therein, for example, in baseband or as part of a carrier wave. Such a propagated signal may take any of a variety of forms, including, but not limited to, electro-magnetic, optical, or any suitable combination thereof. A computer readable signal medium may be any computer readable medium that is not a computer readable storage medium and that can communicate, propagate, or transport a program for use by or in connection with an instruction execution system, apparatus, or device.

[0066] Computer program code for carrying out operations for aspects of the present invention may be written in any combination of one or more programming languages, including an object oriented programming language such as Xcode, Ruby, Python, Java, Smalltalk, Objective C, C++, C#, Transact-SQL, XML, or the like and conventional procedural programming languages, such as the "C" programming language or similar programming languages. The program code may execute entirely on the user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer or entirely on the remote computer or server. In the latter scenario, the remote computer may be connected to the user's computer through any type of network, including Bluetooth, a local area network (LAN) or a wide area network (WAN), or the connection may be

made to an external computer (for example, through the Internet using an Internet Service Provider).

[0067] Aspects of the present invention are described above with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems) and computer program products according to embodiments of the invention. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer program instructions. These computer program instructions may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute with the processor of the computer or other programmable data processing apparatus, create means for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

[0068] These computer program instructions may also be stored in a computer readable medium that can direct a computer, other programmable data processing apparatus, or other devices to function in a particular manner, such that the instructions stored in the computer readable medium produce an article of manufacture including instructions which implement the function/act specified in the flowchart and/or block diagram block or blocks.

[0069] The computer program instructions may also be loaded onto a computer, other programmable data processing apparatus, or other devices to cause a series of operational steps to be performed on the computer, other programmable apparatus or other devices to produce a computer implemented process such that the instructions which execute on the computer or other programmable apparatus provide processes for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

[0070] Referring now to FIG. 7, a representative hardware environment for practicing at least one embodiment of the invention is depicted. This schematic drawing illustrates a hardware configuration of an information handling/computer system in accordance with at least one embodiment of the invention. The system comprises at least one processor or central processing unit(s) (CPU) 710. The CPU(s) 710 are interconnected with system bus 712 to various devices such as a random access memory (RAM) 714, read-only memory (ROM) 716, and an input/output (I/O) adapter 718. The I/O adapter 718 can connect to peripheral devices, such as disk units 711 and tape drives 713, or other program storage devices that are readable by the system. The system can read the inventive instructions on the program storage devices and follow these instructions to execute the methodology of at least one embodiment of the invention. The system further includes a user interface adapter 719 that connects a keyboard 715, mouse 717, speaker 724, and/or other user interface devices such as a touch screen device

722 to the bus 712 to gather user input. Additionally, a communication adapter 720 connects the bus 712 to a data processing network 725, and a display adapter 721 connects the bus 712 to a display device 723 which may be embodied as an output device such as a monitor, printer, or transmitter, for example.

5 [0071] The flowchart and block diagrams in the Figures illustrate the architecture, functionality, and operation of possible implementations of systems, methods and computer program products according to various embodiments of the present invention. In this regard, each block in the flowchart or block diagrams may represent a module, circuit, segment, or portion of code, which comprises one or more executable instructions for implementing the specified logical function(s). It should also be noted that, in some alternative implementations, the functions noted in the block may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts, or combinations of special purpose hardware and computer instructions.

15 [0072] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms “a”, “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the root terms “include” and/or “have”, when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

25 [0073] The corresponding structures, materials, acts, and equivalents of all means plus function elements in the claims below are intended to include any structure, or material, for performing the function in combination with other claimed elements as specifically claimed. The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the invention.

30 [0074] Although the present invention has been described in terms of particular example embodiments, it is not limited to those embodiments. The embodiments, examples, and modifications which would still be encompassed by the invention may be made by those skilled in the art, particularly in light of the foregoing teachings.

[0075] As used above “substantially,” “generally,” and other words of degree are relative modifiers intended to indicate permissible variation from the characteristic so modified. It is not intended to be limited to the absolute value or characteristic which it modifies but rather possessing more of the physical or functional characteristic than its opposite, and preferably, approaching or approximating such a physical or functional characteristic.

[0076] Those skilled in the art will appreciate that various adaptations and modifications of the embodiments described above can be configured without departing from the scope and spirit of the invention. Therefore, it is to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described herein.

VI. Industrial Applicability

[0077] The disclosed embodiments provide an improved way to detect HRIs based upon an individual's a PSI taking into account an impact of the clothing worn by the individual. In some embodiments, the systems and methods provide a mechanism to alert the individual of the potential for HRI based on their aPSI.

IN THE CLAIMS:

I claim:

1. A system for generating an adaptive physiological strain index (aPSI), the system comprising:

at least one heart rate sensor configured to be attached to or placed on a person;

at least one temperature sensor configured to detect a skin temperature of the person; and

a processor configured to produce an aPSI score for the person using a temperature gradient between the skin temperature from said at least one temperature sensor and a body core temperature determined based on the heart rate from said at least one heart rate sensor.

2. The system of claim 1, further comprising a data storage configured to store data related to an age of the person; and

wherein said processor calculating the aPSI score based on the following equation:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is the body core temperature at a time t , CT_{rest} is the body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is the heart rate at rest, $HR_{critical}$ is a maximum heart rate, $CT_{critical}$ is a maximum body temperature, and ST is the skin temperature.

3. The system according to claim 2, wherein the processor adjusts the aPSI score based on at least one of a fitness level, an age, a maximum heart rate, and a resting heart rate of an individual.

4. The system according to any one of claims 1-3, wherein said processor configured to produce a new calculated aPSI score at predetermined intervals based on variances in at least one of the skin temperature and the heart rate received by said processor.

5. The system according to any one of claims 1-3, further comprising a timer circuit in communication with said processor, and

wherein said processor configured to produce a new calculated aPSI score based on calculating at least one first aPSI score at an initial time designation of a timer circuit and calculating a new aPSI score at predetermined time intervals as provided by said timer circuit.

6. The system according to claim 5, further comprising an accelerometer in communication with said processor; and

wherein said processor is configured to detect at least one of a resting heart rate and a resting skin temperature of the individual when a plurality of signals from said accelerometer

remained below a predetermined threshold for a predetermined time period and/or substantially remained below the predetermined threshold for the predetermined time period, and

said processor further configured to determine a resting body core temperature for the individual based on the resting heart rate.

7. The system according to any one of claims 1-3, wherein said processor calculates the body core temperature using a Kalman filter or an extended Kalman filter.

8. The system according to any one of claims 1-3, further comprising a display in communication with said processor to display the calculated aPSI index produced by the processor.

9. The system according to any one of claims 1-3, further comprising an alarm in communication with the processor.

10. The system according to claim 9, wherein said processor is configured to produce an alert signal to said alarm when the calculated aPSI score exceeds a predetermined aPSI score threshold.

11. The system according to any one of claims 1-3, wherein the system is housed in a wearable device.

12. A method for generating an adaptive physiological strain index (aPSI) from a body temperature and heart rate for an individual, the method comprising:

receiving by a processor a heart rate signal from a heart rate sensor detecting a heart rate of the individual;

receiving by the processor a skin temperature reading from a temperature sensor detecting a skin temperature of the individual;

calculating with the processor a body core temperature for the individual based on the heart rate signal;

calculating with the processor a temperature gradient between the skin temperature reading and the body core temperature;

calculating with the processor an aPSI score for the individual using the body core temperature, the temperature gradient and the heart rate signal; and

producing the calculated aPSI score from the processor.

13. The method of claim 12, further comprising receiving the individual's age from at least one of an input device, memory, database, or data storage, wherein the person's age data can be accessed by the processor.

14. The method of claim 13, wherein calculating the aPSI score is based on said processor calculating the aPSI score based on the following equation:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is a body core temperature at a time t , CT_{rest} is a body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is a heart rate at rest, $HR_{critical}$ is a maximum heart rate, and $CT_{critical}$ is a maximum body temperature.

15. The method of claim 12, further comprising calculating by the processor the body core temperature based on a Kalman filter or an extended Kalman filter.

16. The method of any one of claims 12-15, further comprising when the received body temperature exceeds a predetermined threshold, generating an alert signal by the processor for an alarm.

17. The method of any one of claims 12-15, further comprising adjusting by the processor the aPSI score based on at least one of a fitness level, an age, a maximum heart rate, or a resting heart rate of the individual.

18. The method of any one of claims 12-15, further comprising said processor configured to produce a new calculated aPSI score at predetermined intervals based on at least one of variances in the detected body temperature by the temperature sensor and the detected heart rate by the heart rate sensor.

19. The method of any one of claims 12-15, further comprising calculating with the processor new calculated aPSI scores at predetermined time intervals.

20. A system for detecting an adaptive physiological strain index (aPSI) for a person, the system comprising:

a heart rate means for detecting a heart rate of a person;

a temperature means for detecting a skin temperature of the person;

an input means for receiving a person's age;

a calculation means for producing an aPSI score for the person based on the detected skin temperature, the detected heart rate, the received input age, and temperature gradient between the detected skin temperature and a body core temperature calculated based on the detected heart rate; and

storage means for storing heart rates from said heart rate means, skin temperatures from said temperature means, and body core temperatures from said calculation means.

21. The system of claim 20, wherein said calculation means determining the aPSI score based on the following equation:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is the body core temperature at a time t , CT_{rest} is a body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is a heart rate at rest, $HR_{critical}$ is a maximum heart rate, and $CT_{critical}$ is a maximum body temperature

22. The system of claim 20, wherein said calculation means recalculates the aPSI score at predetermined intervals when a variance is detected in at least one of the detected skin temperature and the detected heart rate.

23. The system of any one of claims 20-22, wherein said calculation means adjusts the aPSI score at predetermined time intervals.

24. The system of any one of claims 20-22, further comprising a display in communication with said calculation means.

25. The system of any one of claims 20-22, further comprising an alarm means for alerting when the calculated aPSI score exceeds a predetermined aPSI score threshold.

26. The system of any one of claims 20-22, wherein the system is housed in a wearable device.

27. A system comprising:

at least one temperature sensor configured to be attached to an individual's skin;

at least one heart rate sensor configured to be attached to the individual;

a memory for storing at least a resting heart rate for the individual;

a processor in electrical communication with said at least one temperature sensor and said at least one heart rate monitor, said processor configured to produce an adaptive physiological strain (aPSI) score for the individual based on the current skin temperature, the resting heart rate, and the current heart rate where

the body core temperature is calculated based on the heart rate information and time since initiation of the monitoring, or

the body core temperature is obtained from an internal temperature sensor in the individual.

28. The system according to claim 27, where the aPSI score is calculated using the following equations:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is the body core temperature at a time t , CT_{rest} is the body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is the heart rate at rest, $HR_{critical}$ is a maximum heart rate, $CT_{critical}$ is a maximum body temperature, and ST is the skin temperature.

29. The system according to claim 27, using an individual specific heart rate critical for the individual while using the following equations:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is the body core temperature at a time t , CT_{rest} is the body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is the heart rate at rest, $HR_{critical}$ is a maximum heart rate, $CT_{critical}$ is a maximum body temperature, and ST is the skin temperature.

30. The system according to any one of claims 27-29, further comprising an alarm means for notifying when a threshold is exceeded by the aPSI score.

31. A system comprising:

at least one skin temperature sensor configured to be attached to an individual's skin;

at least one heart rate sensor configured to be attached to the individual;

at least one internal temperature sensor configured to be internal to the individual's skin;

a memory for storing at least a resting heart rate for the individual;

a processor in electrical communication with said at least one temperature sensor and said at least one heart rate monitor, said processor configured to produce an adaptive physiological strain (aPSI) score for the individual based on the current skin temperature from said at least one skin temperature sensor, the resting heart rate from said memory, the current heart rate from said at least one heart rate sensor, and the body core temperature from said internal temperature sensor.

32. The system according to claim 31, where the aPSI score is calculated using the following equations:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$HR_{critical} = 0.90 (220 - age)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is the body core temperature at a time t , CT_{rest} is the body core temperature at rest, HR_t is the heart rate at a time t , HR_{rest} is the heart rate at rest, $HR_{critical}$ is a maximum heart rate, $CT_{critical}$ is a maximum body temperature, and ST is the skin temperature.

33. The system according to claim 31, using an individual specific heart rate critical for the individual while using the following equations:

$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

34. The system according to any one of claims 31-33, further comprising an alarm means for notifying when a threshold is exceeded by the aPSI score.

35. A method for generating an adaptive physiological strain index (aPSI) from a skin temperature, a body core temperature and a heart rate, the method comprising:

receiving by a processor a heart rate signal from a heart rate sensor;
 receiving by the processor a skin temperature reading from a skin temperature sensor;
 receiving by the processor a body core temperature from an internal temperature sensor;
 calculating with the processor a temperature gradient between the skin temperature reading and the body core temperature reading;
 calculating with the processor an aPSI score for the person using the body core temperature, the temperature gradient and the heart rate signal; and
 producing the calculated aPSI score from the processor, and
 when one of the physiological readings is unavailable, using a previously stored value or calculating a value for the physiological reading.

36. The method of claim 35, further comprising receiving the person's age from at least one of an input device, memory, database, or data storage, wherein the person's age data can be accessed by the processor.

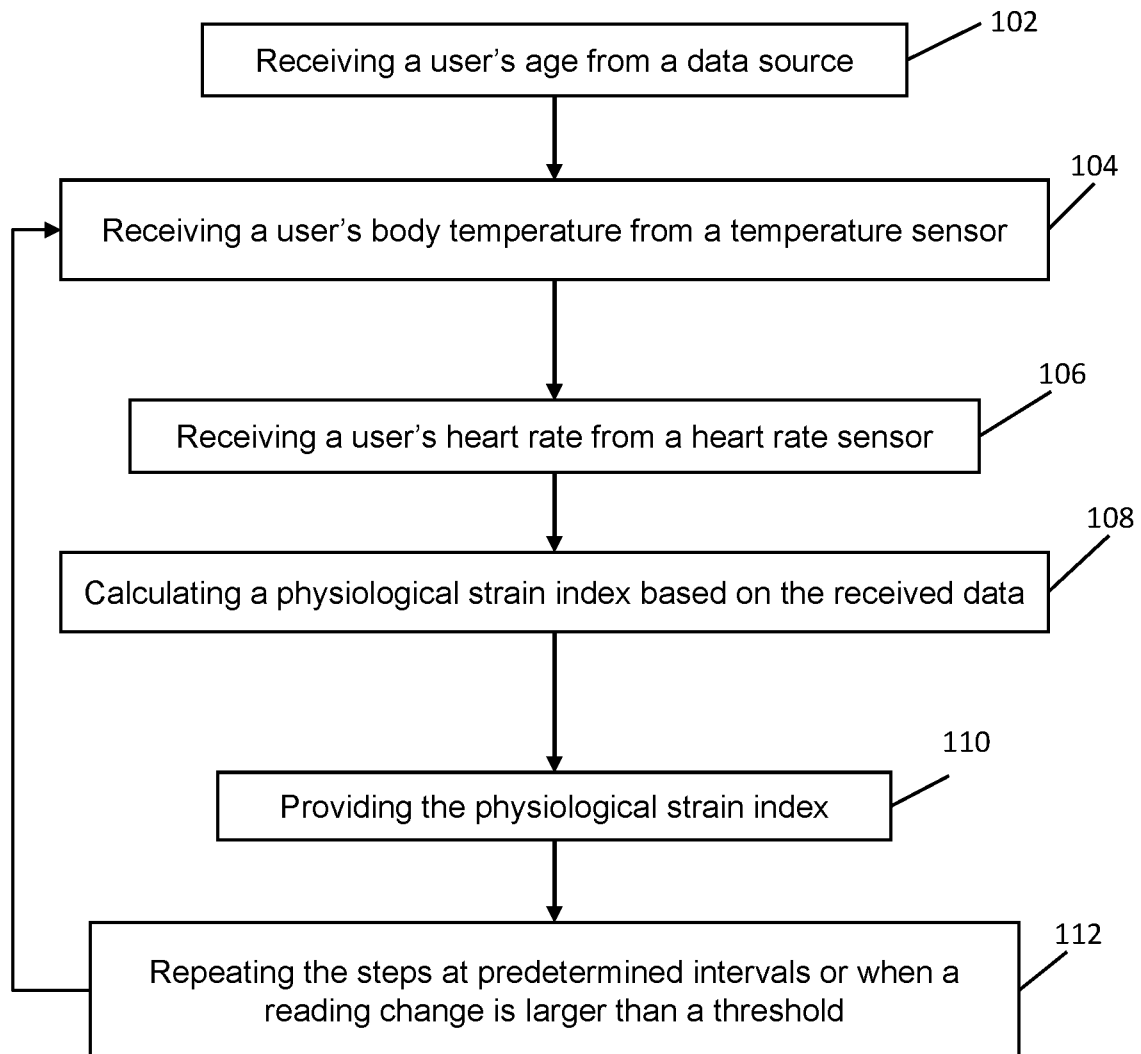
37. The method of claim 36, wherein calculating the aPSI score is based on said processor calculating the aPSI score based on the following equation:

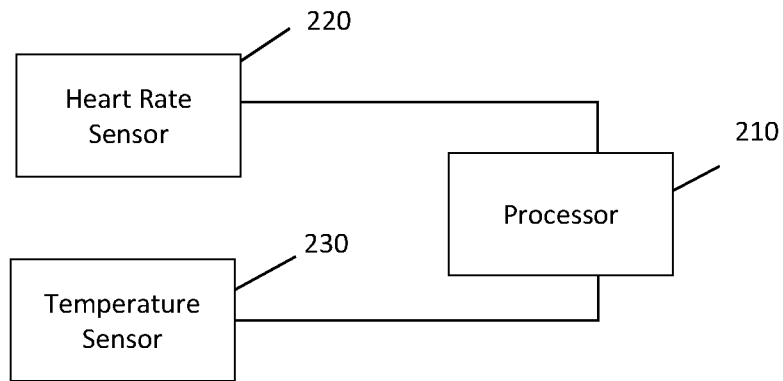
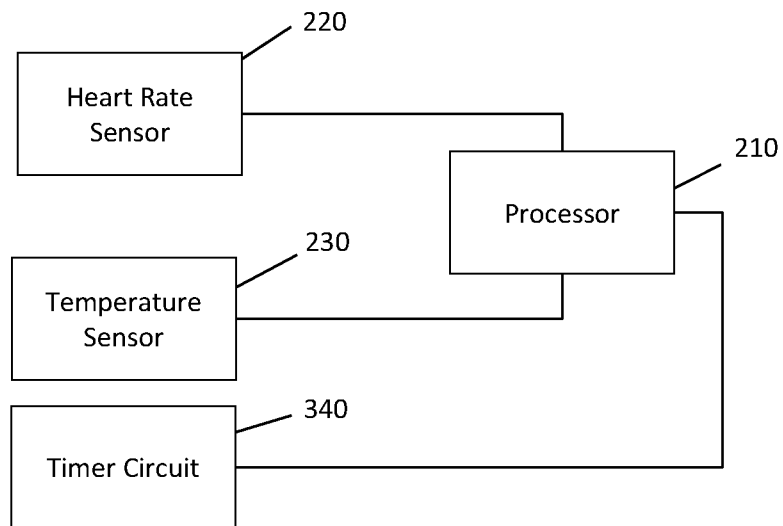
$$aPSI = 5 \left(\frac{CT_t - CT_{rest}}{CT_{critical} - CT_{rest}} \right) + 5 \left(\frac{HR_t - HR_{rest}}{HR_{critical} - HR_{rest}} \right)$$

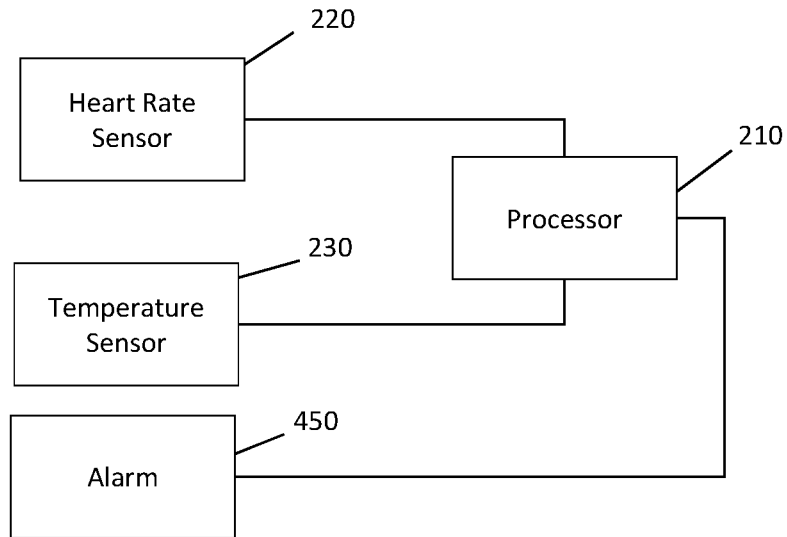
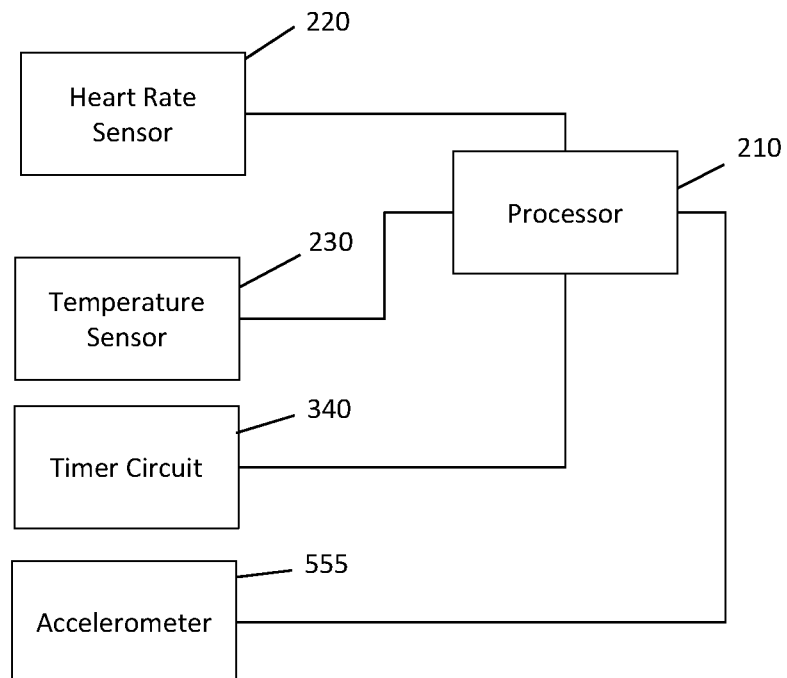
$$HR_{critical} = 0.90 (220 - age)$$

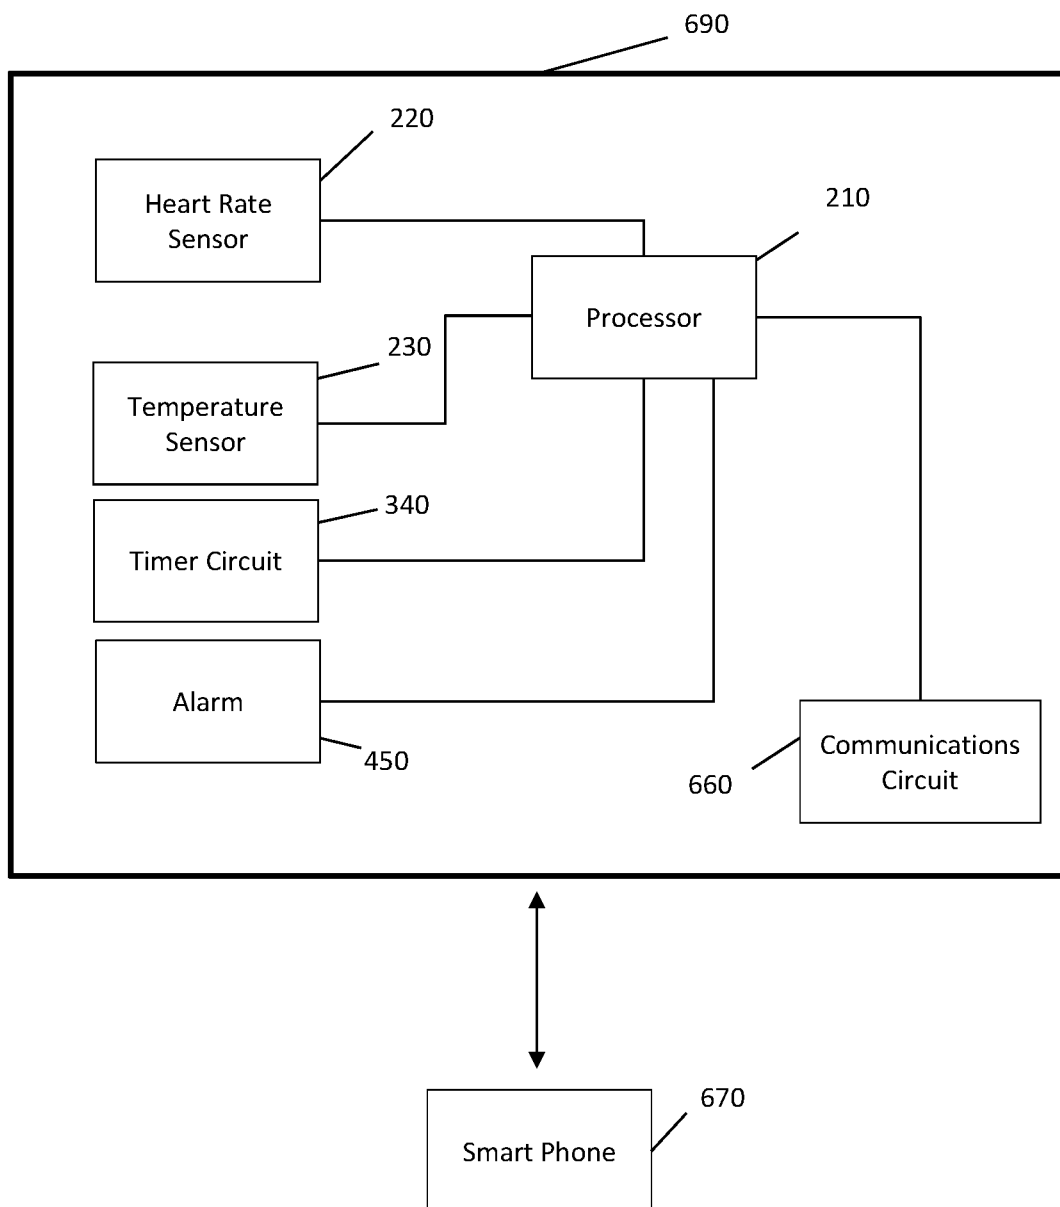
$$CT_{critical} = 39.5^{\circ}\text{C} + \frac{(CT_t - ST_t) - 4}{4}$$

where CT_t is a body core temperature at a time t , CT_{rest} is a body core temperature at rest, HR_t , is a heart rate at a time t , HR_{rest} is a heart rate at rest, $HR_{critical}$ is a maximum heart rate, and $CT_{critical}$ is a maximum body temperature.

**FIG. 1**

**FIG. 2****FIG. 3**

**FIG. 4****FIG. 5**

**FIG. 6**

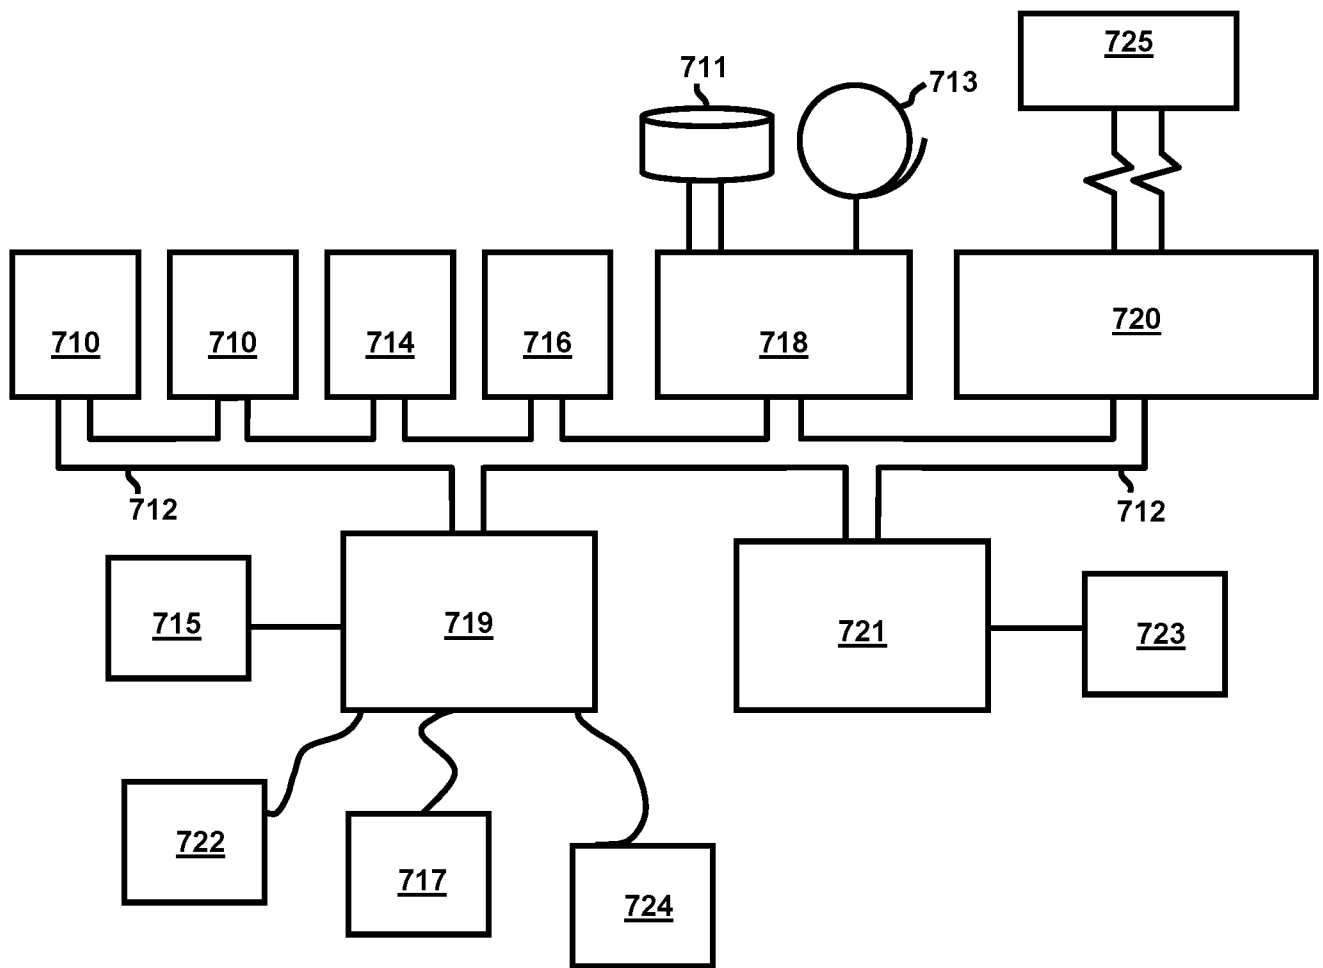


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2017/027985

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61B 5/00; A61B 5/01; A61B 5/02; A61B 5/11 (2017.01)

CPC - A61B 5/00; A61B 5/01; A61B 5/02; A61B 5/024; A61B 5/02438; A61B 5/68; A61B 5/6802 (2017.02)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 600/300; 600/301; 600/306; 600/382; 600/386; 600/388; 600/390; 600/508; 600/549; 600/595 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2014/0180027 A1 (US GOVERNMENT AS REPRESENTED BY THE SECRETARY OF THE ARMY) 26 June 2014 (26.06.2014) entire document	1, 4, 5, 7-13, 15-20, 22-27, 30, 31, 34-36 --- 6
Y	US 2013/0237772 A1 (HIDALGO LIMITED) 12 September 2013 (12.09.2013) entire document	6
A	US 2015/0031964 A1 (ACLARIS MEDICAL LLC) 29 January 2015 (29.01.2015) entire document	1-37
A	US 7,827,011 B2 (DEVAUL et al) 02 November 2010 (02.11.2010) entire document	1-37
A	US 2014/0343372 A1 (WHOOOP INC) 20 November 2014 (20.11.2014) entire document	1-37

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 June 2017

Date of mailing of the international search report

29 JUN 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

专利名称(译)	确定自适应生理应变指数的系统和方法		
公开(公告)号	EP3442406A4	公开(公告)日	2019-11-27
申请号	EP2017783371	申请日	2017-04-17
申请(专利权)人(译)	美国政府的为代表陆军部长		
当前申请(专利权)人(译)	美国政府的为代表陆军部长		
[标]发明人	BULLER MARK J		
发明人	BULLER, MARK J.		
IPC分类号	A61B5/00 A61B5/01 A61B5/02 A61B5/11		
CPC分类号	A61B5/01 A61B5/02055 A61B5/11 A61B5/441 A61B5/725 A61B2503/20 A61B2562/0219 A61B2562/0271		
优先权	62/323268 2016-04-15 US		
其他公开文献	EP3442406A1		
外部链接	Espacenet		

摘要(译)

本发明在至少一个实施例中包括一种系统和方法，该系统和方法用于利用处理器检测和评估个体的适应性生理应变指数（aPSI），并且在另一实施例中，基于生理学考虑个体的适应性，年龄和衣服。在至少一个实施例中，本发明包括一种使用生理测量来计算aPSI的系统和方法。在至少一个实施例中，该方法获得个体的皮肤温度和心率，以便计算个体的aPSI。