



(11)

EP 2 728 326 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
07.05.2014 Bulletin 2014/19

(21) Application number: **11858472.1**

(22) Date of filing: **08.08.2011**

(51) Int Cl.:
G01K 1/00 ^(2006.01) **G01J 5/00** ^(2006.01)
A61B 1/227 ^(2006.01) **A61B 1/24** ^(2006.01)
A61B 5/00 ^(2006.01)

(86) International application number:
PCT/CN2011/078098

(87) International publication number:
WO 2013/000191 (03.01.2013 Gazette 2013/01)

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **30.06.2011 CN 201110185500**

(71) Applicant: **Microlife Intellectual Property GmbH
Widnau
9443 St. Gallen (CH)**

(72) Inventor: **HO, Chia-chen
Taipei City 114
Taiwan (TW)**

(74) Representative: **Viering, Jentschura & Partner
Patent- und Rechtsanwälte
Kennedydamm 55 / Roßstrasse
40476 Düsseldorf (DE)**

(54) **PROBE STRUCTURE, TEMPERATURE MEASURING DEVICE HAVING SAME AND METHOD FOR USING SAME**

(57) The present invention relates to a probe structure, a temperature measuring device having the probe structure, and a method of using the same. The probe structure comprises a light transmissive unit and one or more light sources. One or more light sources radiate one or more colors of light to and through the light transmissive unit. The temperature measuring device includes the above-mentioned probe structure and a temperature measuring body. The probe structure is assembled within the temperature measuring body. By the design of the light transmissive unit and the visual light provided by the light sources, the user can easily place the probe structure to the part to be measured.

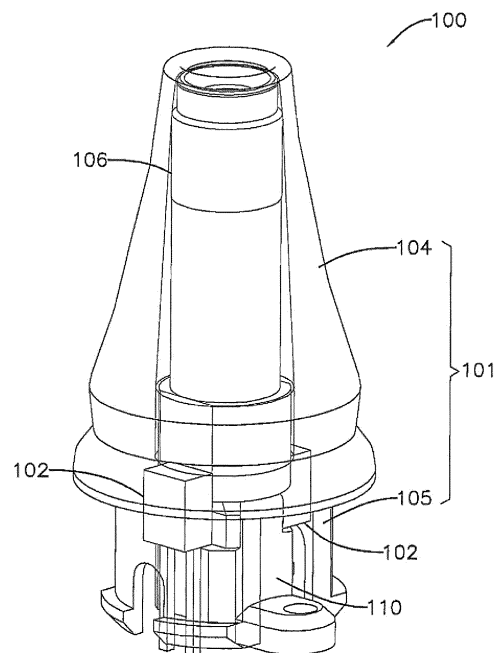


FIG. 1

Description

FIELD OF THE INVENTION

[0001] This invention relates to a probe structure, temperature measuring device having the probe structure, and method of using the temperature measuring device.

BACKGROUND OF THE INVENTION

[0002] Conventionally, a user needs to put a probe structure of a temperature measuring device, such as ear thermometer or body thermometer into ear or mouth of a subject to proceed with the measurement of body temperature.

[0003] The conventional temperature measuring device, such as U.S. patent publication No. US2005/0080354, only provides light source to let users place the probe structure to the site to be measured. However, it has a problem that the light can be easily blocked.

[0004] Moreover, JP patent publication No. 9-5167 discloses an ear thermometer utilizing infrared ray to measure body temperature. After the probe structure of the ear thermometer is inserted into ear, the infrared ray came from eardrum and its peripheral is detected by the infrared ray detector of the ear thermometer. In the mean time, the user can see the eardrum and its peripheral via the window of the ear thermometer and adjust the measure position by the visible light provided by the end of the probe.

[0005] However, the visible light disclosed by the above-mentioned conventional technique is used to adjust the measure position after placing the probe structure of the ear thermometer into ear. Therefore, it is not ideal to use the ear thermometer in dark environment.

[0006] Further, the user can see the visible light only via the window of the ear thermometer and then see the eardrum and its peripheral, therefore, there should be a plurality of reflection mirrors and light guide plates inside the ear thermometer so that the visible light can be guided to the window for user to see, his design will be very complicated.

SUMMARY OF THE INVENTION

[0007] In order to solve the above and conventional technical problems, the present invention provides a probe structure including a light transmissive unit and one or more light sources. The one or more light sources emit one or more colors of lights to and through the light transmissive unit.

[0008] The light sources of the probe structure emit one or more colors of lights so that different conditions can be indicated by changing the colors. For example, a user can directly see the displayed (warning) result from the light through the light transmissive unit of the probe structure when the body temperature is too high or too low.

[0009] The present invention further provides a temperature measuring device having a probe structure. The temperature measuring device includes a probe structure and a temperature measuring body. The probe structure includes a light transmissive unit, one or more light sources, and a temperature detecting module. The probe structure is assembled to the temperature measuring body which includes a circuit board, a button and a temperature display. The button is electrically connected to the circuit board and the temperature detecting module of the probe structure is electrically connected to the circuit board as well.

[0010] The present invention further provides a method of using the above-mentioned temperature measuring device, wherein the lights of the one or more light sources include a first color of light and a second color of light, and the method includes the steps of: (A) pressing the button of the temperature measuring body; and (B) the one or more light sources emitting the first color of light from the one or more light sources to and through the light transmissive unit.

[0011] The present invention further provides a method of using the above-mentioned temperature measuring device, wherein the lights of the one or more light sources include a first color of light and a second color of light, and the method includes the steps of: (A) a user pressing the button of the temperature measuring body; (B) the one or more light sources emitting the first color of light; (C) the first color of light emitting to and through the light transmissive unit; (D) the user searching a site to be measured of a subject by the light emitted from the light transmissive unit; (E) the user positioning the temperature measuring device to the site to be measured by being aware of the position of the light transmissive unit that emits light; (F) determining if a measured temperature measured by the temperature measuring device exceeds a predetermined temperature; and (G) the one or more light sources emitting the second color of light if the measured temperature exceeds the predetermined temperature.

[0012] The present invention further provides a method of using the above-mentioned temperature measuring device, wherein the lights of the one or more light sources include a first color of light and a second color of light, and the method includes the steps of: (A) a user pressing the button of the temperature measuring body; (B) the one or more light sources emitting the first color of light; (C) the first color of light emitting to and through the light transmissive unit; (D) the user searching a site to be measured of a subject by the light emitted from the light transmissive unit; (E) the user positioning the temperature measuring device to the site to be measured by being aware of the position of the light transmissive unit that emits light; (F) determining if a measured temperature measured by the temperature measuring device exceeds a predetermined temperature; and (G) the one or more light sources emitting the second color of light if the measured temperature does not exceed the predetermined

temperature.

BRIEF DESCRIPTION OF DRAWINGS

[0013]

Figure 1 shows a perspective view of a first preferred embodiment of the present invention.
 Figure 2 shows an explosion view of the first preferred embodiment of the present invention.
 Figure 3 shows a sectional view of the first preferred embodiment of the present invention.
 Figure 4 shows a perspective view of a second preferred embodiment of the present invention.
 Figure 5 shows a perspective view of a third preferred embodiment of the present invention.
 Figure 6 shows an explosion view of a third preferred embodiment of the present invention.
 Figure 7 shows a sectional view of a third preferred embodiment of the present invention.
 Figure 8 shows a perspective view of a fourth preferred embodiment of the present invention.
 Figure 9 shows a partial sectional view of a fifth preferred embodiment of the present invention.
 Figure 10 shows a sectional view of a sixth preferred embodiment of the present invention.
 Figure 11 shows a flow chart of a seventh preferred embodiment of the present invention.
 Figure 12 shows a flow chart of an eighth preferred embodiment of the present invention.
 Figure 13 shows a flow chart of a ninth preferred embodiment of the present invention.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS

[0014] Please refer to Figures 1 to 3, wherein Figure 1 shows a perspective view of a first preferred embodiment of the present invention. Figure 2 shows an explosion view of the first preferred embodiment of the present invention. Figure 3 shows a sectional view of the first preferred embodiment of the present invention.

[0015] In the drawings, there is a probe structure 100, and the probe structure 100 includes a light transmissive unit 101, two light sources 102, a temperature detecting module 106, and a base 110.

[0016] The light transmissive unit 101 is in open-cylinder shape and has a hollow chamber 103, and the light transmissive unit 101 includes a light transmissive portion 104 and a light transmissive unit base 105. The light transmissive portion 104 is connected to the light transmissive unit base 105. In this embodiment, the light transmissive portion 104 and the light transmissive unit base 105 are integrally formed.

[0017] Two light sources 102 are provided in the hollow chamber 103. Each light source 102 can emit one or more colors of lights, such as green and/or red, to and through the light transmissive portion 104 of the light transmissive

unit 101. In this embodiment, the light sources 102 are showed by two light emitted diodes. However, the number of the light sources in the present invention is not limited. Further, a person skilled in the art may know that in addition to the color of light may be changed, the power of the light can also be changed according to practical design needs.

[0018] The temperature detecting module 106 includes a copper cap 107, a temperature detecting element 108, and a copper sleeve 109. The copper cap 107, temperature detecting element 108, and copper sleeve 109 are assembled in sequence to form the temperature detecting module 106. The temperature detecting module 106 is provided in the hollow chamber 103.

[0019] The base 110 is provided in the light transmissive unit base 105 such that the light sources 102 are tightly secured in the hollow chamber 103.

[0020] Please refer to Figures 1 to 4, wherein Figure 4 shows a perspective view of a second preferred embodiment of the present invention. That is, Figure 4 shows a temperature measuring device 200 that utilizes the probe structure 100 of Figures 1 to 3. The temperature measuring device 200 is in an ear thermometer form. A person skilled in the art may know that the temperature measuring device can be assembled with a probe structure in any other form, such as a body thermometer form.

[0021] In addition to the probe structure 100, the temperature measuring device 200 in the drawings further includes a temperature measuring body 201. The probe structure 100 is assembled in the temperature measuring body 201. Further, the temperature measuring body 201 includes a circuit board 202, a button 203, and a temperature display screen 204.

[0022] The button 203 is electrically connected to the circuit board 202, the temperature display screen 204 is electrically connected to the circuit board 202, and the temperature detecting module 106 of the probe structure 100 is also electrically connected to the circuit board 202. It should be noticed that, the button 203 is used to activate the whole circuit board 202 and elements connect thereto, therefore, the button, in a general sense, is a kind of switch. Further, in addition to indicating the value of temperature, the temperature display screen 204 can display different colors of back lights such that a user can know the condition of a subject (such as fever) from the displayed result by displaying the color of back lights.

[0023] Therefore, the above-mentioned temperature measuring device 200 can emit one or more colors of lights by the design of light sources 102, and with the light transmissive design of the light transmissive unit 101, users can easily place the probe structure 100 to the site to be measured. In this embodiment, the site to be measured is ear, however, it is not limited in the present invention.

[0024] Moreover, if the temperature measured by the temperature measuring device 200 exceeds a predetermined temperature (such as 37.5°C), the light sources 102 may emit one or more colors of lights so that different

conditions can be indicated by changing the colors of light. For example, when a subject gets a fever (body temperature is higher than 37.5°C), a user can directly know the condition of the subject (such as fever) from the displayed result since his/her sight line focuses on the light transmissive unit 101.

[0025] Please refer to Figures 5 to 7, wherein Figure 5 shows a perspective view of a third preferred embodiment of the present invention. Figure 6 shows an explosion view of a third preferred embodiment of the present invention. Figure 7 shows a sectional view of a third preferred embodiment of the present invention.

[0026] In the drawings, there is a probe structure 300, and the probe structure 300 includes a light transmissive unit 301, two light sources 302, a probe cover 303, a temperature detecting module 311, and a base 315. In this embodiment, the light sources 302 are light emitting diodes, however, it is not limited in the present invention.

[0027] The light transmissive unit 301 is in open-cylinder shape and has a hollow chamber 304, and the light transmissive unit 301 includes a light transmissive portion 305 and a light transmissive unit base 306. The light transmissive unit base 306 includes a groove 307. The probe cover 303 includes a protrusion 308. When the protrusion 308 snaps in the groove 307, the light transmissive portion 305 has contact to the light transmissive unit base 306. In other embodiments, the light transmissive unit base can include a protrusion, the probe cover can include a groove, and the protrusion can snap in the groove. However, a person skilled in the art may understand that the method to secure the probe cover 303 to the light transmissive unit base 306 is not limited in this way and can be modified according to practical designs.

[0028] In the drawings, the light transmissive portion 305, the light transmissive unit base 306, and the probe cover 303 are designed to be separate components. In assembling, the light transmissive unit 301 is housed in a second hollow chamber 309 of the probe cover 303 and the light transmissive portion 305 protrudes through the probe cover 303 and exposes outwardly.

[0029] Moreover, two light sources 302 are provided in the light transmissive unit base 306. The light sources 302 emit lights to and through the light transmissive portion 305 of the light transmissive unit 301.

[0030] In design perspective, the light transmissive unit base 306 of the light transmissive unit 301 can be provided with two recesses 310. Each recess 301 houses one light source 302. Further, a person skilled in the art may know that the number of the recess 310 can be changed according to the number of the light sources 302, which may be changed according to the practical design needs.

[0031] The temperature detecting module 311 includes a copper cap 312, a temperature detecting element 313, and a copper sleeve 314. The copper cap 312, temperature detecting element 313, and copper sleeve 314 are assembled in sequence to form the temperature detecting module 311. The temperature detecting mod-

ule 311 is provided in the first hollow chamber 304.

[0032] The base 315 is provided in the light transmissive unit base 306.

[0033] Please refer to Figures 5 to 8, wherein Figure 8 shows a perspective view of a fourth preferred embodiment of the present invention. That is, Figure 8 shows a temperature measuring device 400 that utilizes the probe structure 300 of Figures 5 to 7. The temperature measuring device 400 is in an ear thermometer form. The relevant description can be referred to the second preferred embodiment of Figure 4 and is omitted here.

[0034] Please refer to Figure 9, wherein Figure 9 shows a partial sectional view of a fifth preferred embodiment of the present invention. In Figure 9, the probe structure 501 of the embodiment is the same as the first preferred embodiment, except the external shape. The temperature measuring device 500 of the embodiment is in a body thermometer form. The relevant description can be referred to the second preferred embodiment of Figure 4 and is omitted here.

[0035] Please refer to Figure 10, wherein Figure 10 shows a sectional view of a sixth preferred embodiment of the present invention. The primary structure of the probe structure 600 of the embodiment is the same as the third preferred embodiment (as shown in Figures 5 to 7), except a light guide plate 601 is provided. The light guide plate 601 is provided in the hollow chamber 602 and is adjacent to the light sources 603 and the light transmissive portion 604. Two light sources 603 emit lights to and through the light transmissive portion 604 via the light guide plate 601.

[0036] The method of using the temperature measuring device having the probe structure will be described by corresponding to the probe structure 100 showed in Figures 1 to 3 and the temperature measuring device 200 showed in Figure 4. The temperature measuring device 400 showed in Figure 8 and the temperature measuring device 500 showed in Figure 9 use the same method.

[0037] Please refer to Figure 11, wherein Figure 11 shows a flow chart of a seventh preferred embodiment of the present invention. Please also refer to Figures 1 to 4, the related numeral references are represented by Figures 1 to 4.

[0038] In this embodiment, two light sources 102 emit a first color (such as green) of light and a second color (such as red) of light. The method of using the temperature measuring device 200 includes the following steps. First, a user presses the button 203 of the temperature measuring body 201 (S701); then light sources 102 emit the first color of light to and through the light transmissive unit 101 (S702). Then, the user aims a site to be measured of a subject (such as ear) by the light emitted from the light transmissive unit 101 (S703); and then the user places the temperature measuring device 200 to the site to be measured (S704). Then, the temperature detecting module 106 measures a temperature and determines if the measured temperature exceeds a predetermined

temperature (S705); and finally, the light sources 102 emit the second color of light (S706). In this embodiment, the second color of light includes blink light, however, it is not limited in the present invention.

[0039] Please refer to Figure 12, wherein Figure 12 shows a flow chart of an eighth preferred embodiment of the present invention. Please also refer to Figures 1 to 4, the related numeral references are represented by Figures 1 to 4.

[0040] In this embodiment, users can use the temperature measuring device 200 according to the following steps:

- (A) a user presses the button 203 of the temperature measuring body 201 (S801);
- (B) the light sources 102 emit a first color of light (S802);
- (C) the first color of light emits to and through the light transmissive unit 101 (S803);
- (D) the user searches a site to be measured of a subject (such as ear) by the light emitted from the light transmissive unit 101 (S804);
- (E) the user places the temperature measuring device 200 to the site to be measured by being aware of the position of the light transmissive unit 101 that emits light (S805);
- (F) the temperature measuring device 200 determines if a measured temperature measured by the temperature measuring device 200 exceeds a predetermined temperature (S806); and
- (G) the light sources 102 and the temperature display screen 204 emit the second color of light if the measured temperature exceeds the predetermined temperature (S807). In this embodiment, the second color of light includes blink light.

[0041] Please refer to Figure 13, wherein Figure 13 shows a flow chart of a ninth preferred embodiment of the present invention, Please also refer to Figures 1 to 4, the related numeral references are represented by Figures 1 to 4.

[0042] In this embodiment, users can use the temperature measuring device 200 according to the following steps:

- (A) a user presses the button 203 of the temperature measuring body 201 (S901);
- (B) the light sources 102 emit a first color of light (S902);
- (C) the first color of light emits to and through the light transmissive unit 101 (S903);
- (D) the user searches a site to be measured of a subject (such as ear) by the light emitted from the light transmissive unit 101 (S904);
- (E) the user places the temperature measuring device 200 to the site to be measured by being aware of the position of the light transmissive unit 101 that emits light (S905);

(F) the temperature measuring device 200 determines if a measured temperature measured by the temperature measuring device 200 exceeds a predetermined temperature (S906); and

(G) the light sources 102 and the temperature display screen 204 emit the second color of light if the measured temperature does not exceed the predetermined temperature (S907). In this embodiment, the second color of light includes blink light.

[0043] Therefore, from the above description, when a user wants to use a temperature measuring device 200 in dark environment, he/she can press the button 203 of the temperature measuring body 201 so that the light sources 102 emit the first color of light to and through the light transmissive unit 101. Then, the user can aim the light emitted from the light transmissive unit 101 to the site to be measured, or can search the site to be measured of a subject (such as ear) by the light emitted from the light transmissive unit 101. And then, the user can easily place the temperature measuring device 200 to the site to be measured by being aware of the position of the light transmissive unit 101 that emits light. It should be notice that, a person skilled in the art may know the site to be measured can be forehead, mouth, underarm, anus, and so on when the temperature measuring device is in other form.

[0044] After that, the temperature detecting module 106 measures the body temperature. If a measured temperature measured by the temperature detecting module 106 exceeds a predetermined temperature, for example high body temperature when get fever, the light sources 102 may emit a second color of light. At this time, the user can directly and clearly understand this condition by the color change of the light transmissive unit 101. Or, the light sources 102 and the temperature display screen 204 can both emit a second color of light. Alternatively, the light sources 102 and the temperature display screen 204 may also emit a second color of light. Further, the light sources 102 and the temperature display screen 204 may emit a second color of light if a measured temperature measured by the temperature detecting module 106 does not exceed a predetermined temperature. In other words, the design approach of the color change to warn users can be modified according to practical needs.

Claims

1. A probe structure, comprising:

a light transmissive unit; and
one or more light sources, for emitting one or more colors of lights to and through the light transmissive unit.

2. The probe structure according to claim 1, wherein the light transmissive unit is in open-cylinder shape

and has a hollow chamber, the light transmissive unit includes a light transmissive portion and a light transmissive unit base, the light transmissive portion is connected to the light transmissive unit base.

3. The probe structure according to claim 1, further comprising a probe cover, and the light transmissive unit is in open-cylinder shape and has a hollow chamber, and the light transmissive unit includes a light transmissive portion and a light transmissive unit base, the light transmissive unit base includes a groove, the probe cover includes a protrusion, wherein, when the protrusion snaps in the groove, the light transmissive portion has contact to the light transmissive unit base.

4. The probe structure according to claim 2 or 3, wherein the one or more light sources are provided in the light transmissive unit base and emit lights to and through the light transmissive portion.

5. The probe structure according to claim 2 or 3, wherein the one or more light sources are provided in the hollow chamber and emit lights to and through the light transmissive portion.

6. The probe structure according to claim 5, further comprising a light guide plate provided in the hollow chamber, the one or more light sources emit lights to and through the light transmissive portion of the light transmissive unit via the light guide plate.

7. The probe structure according to claim 3, wherein the light transmissive unit base includes one or more recesses, each recess houses the one or more light sources.

8. The probe structure according to claim 2 or 3, further comprising a temperature detecting module provided in the hollow chamber.

9. A temperature measuring device having a probe structure, comprising:

the probe structure according to claim 8; and a temperature measuring body, to which the probe structure being assembled, the temperature measuring body comprising:

a circuit board; and a button electrically connected to the circuit board; wherein, the temperature detecting module of the probe structure is electrically connected to the circuit board.

10. The method of using the temperature measuring device according to claim 9, wherein the lights of the

one or more light sources include a first color of light and a second color of light, the method comprising the steps of:

(A) pressing the button of the temperature measuring body; and
(B) emitting the first color of light from the one or more light sources to and through the light transmissive unit.

11. The method of using the temperature measuring device according to claim 10, further comprising the following steps after step (B):

(C) aiming the light emitted from the light transmissive unit at a site to be measured;
(D) positioning the temperature measuring device to the site to be measured;
(E) determining if a measured temperature measured by the temperature detecting module exceeds a predetermined temperature; and
(F) emitting the second color of light from the one or more light sources.

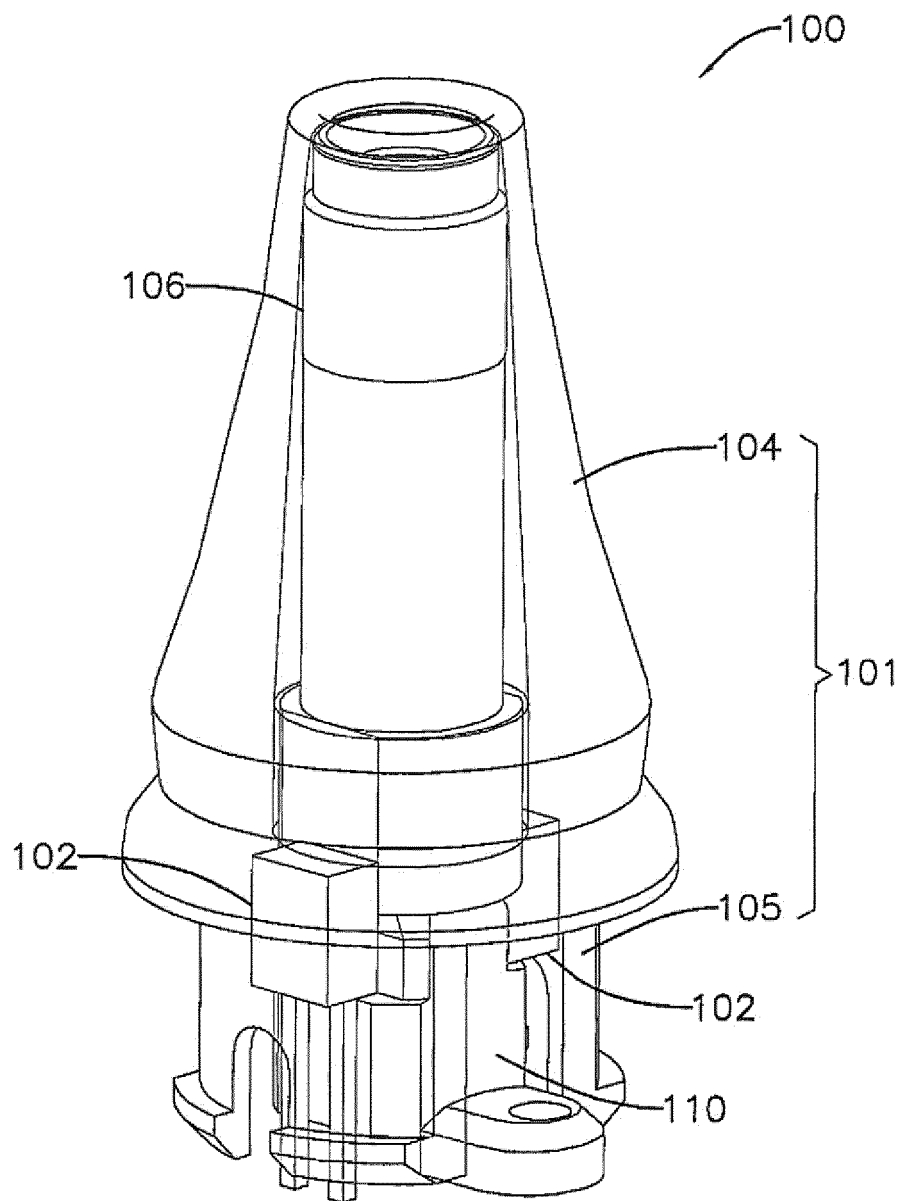


FIG. 1

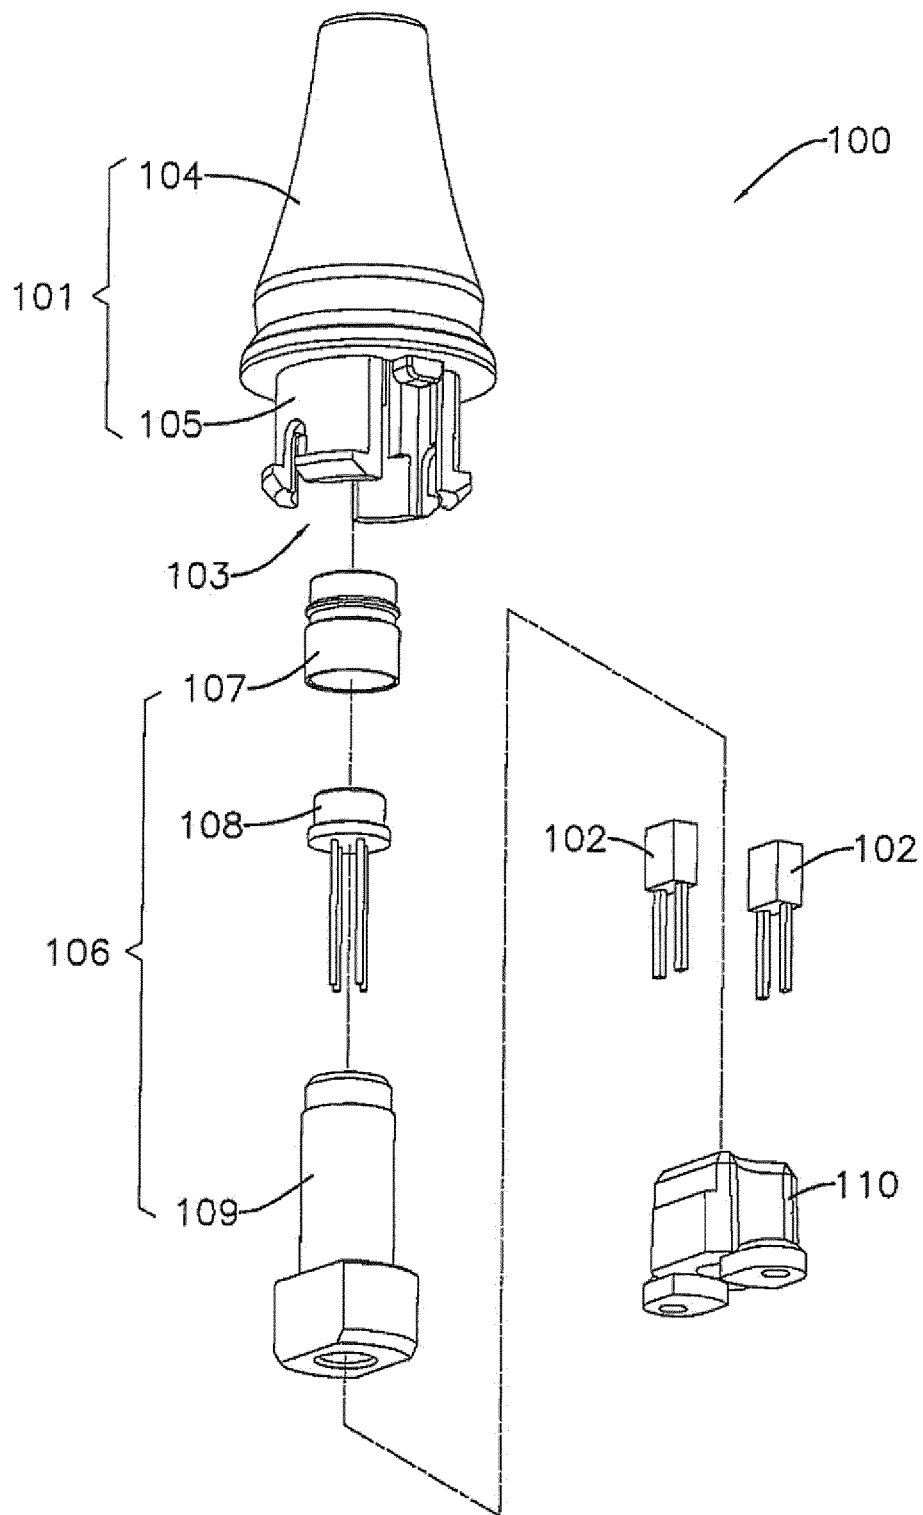


FIG. 2

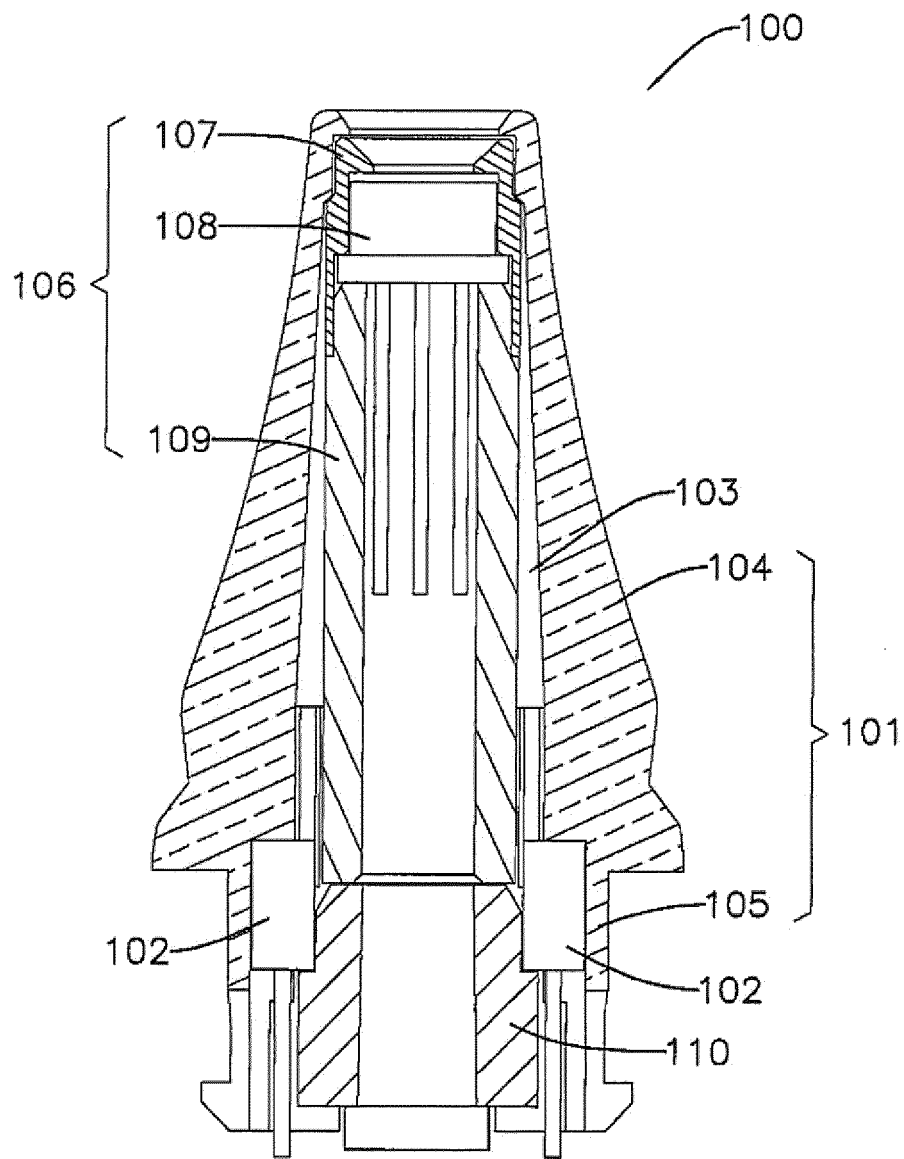


FIG. 3

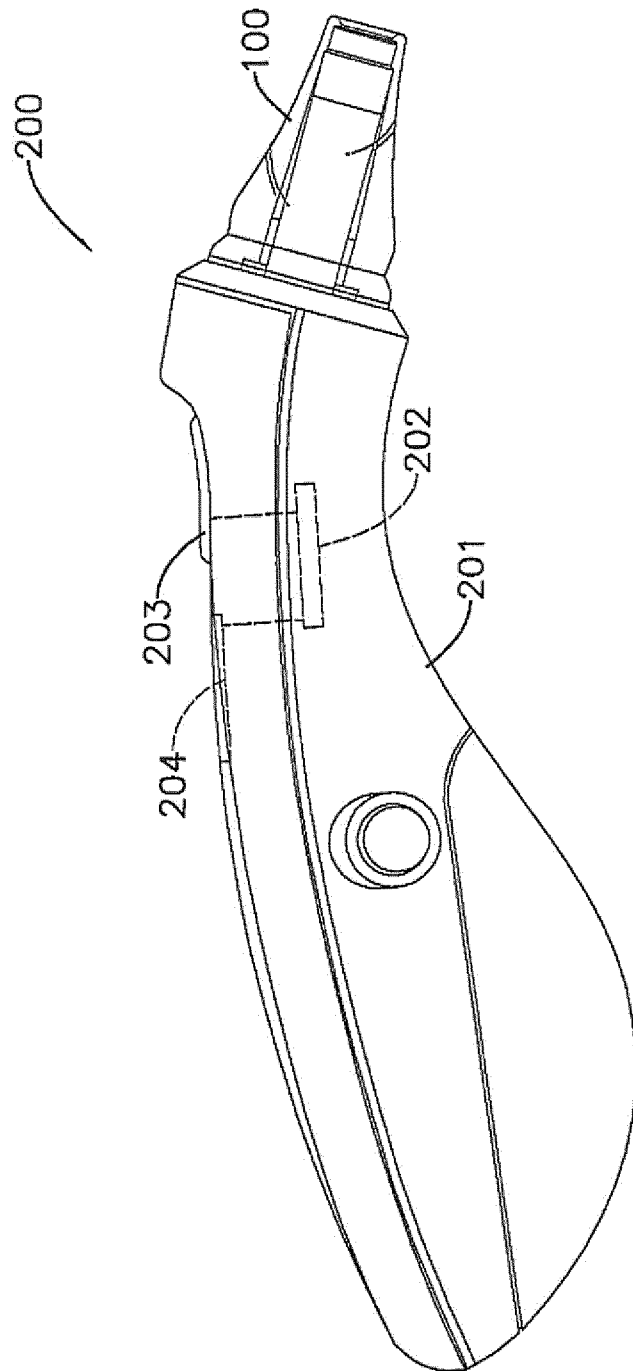


FIG. 4

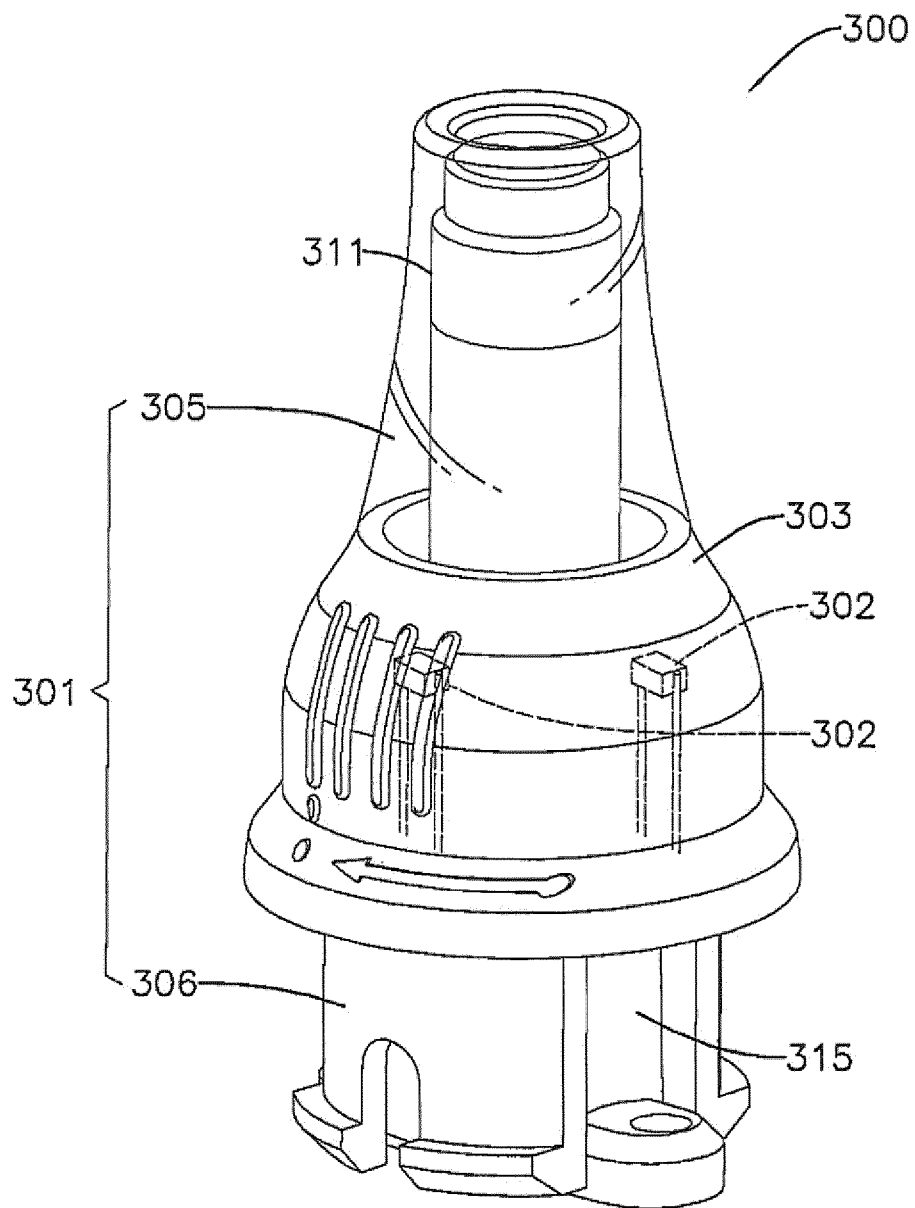


FIG. 5

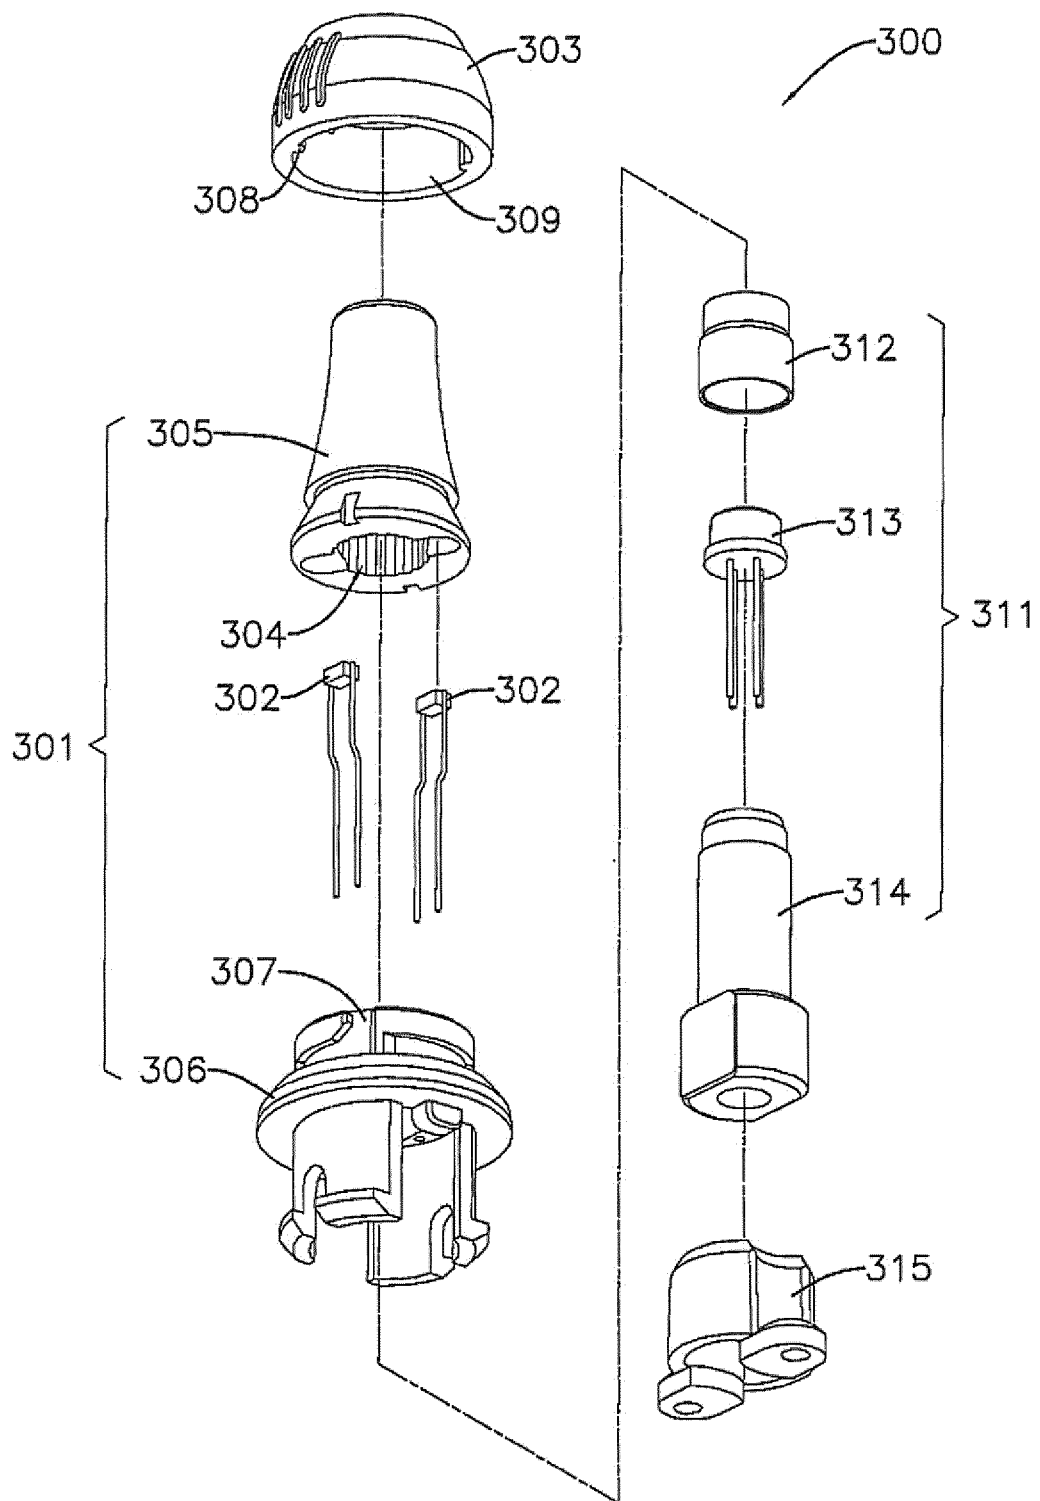


FIG. 6

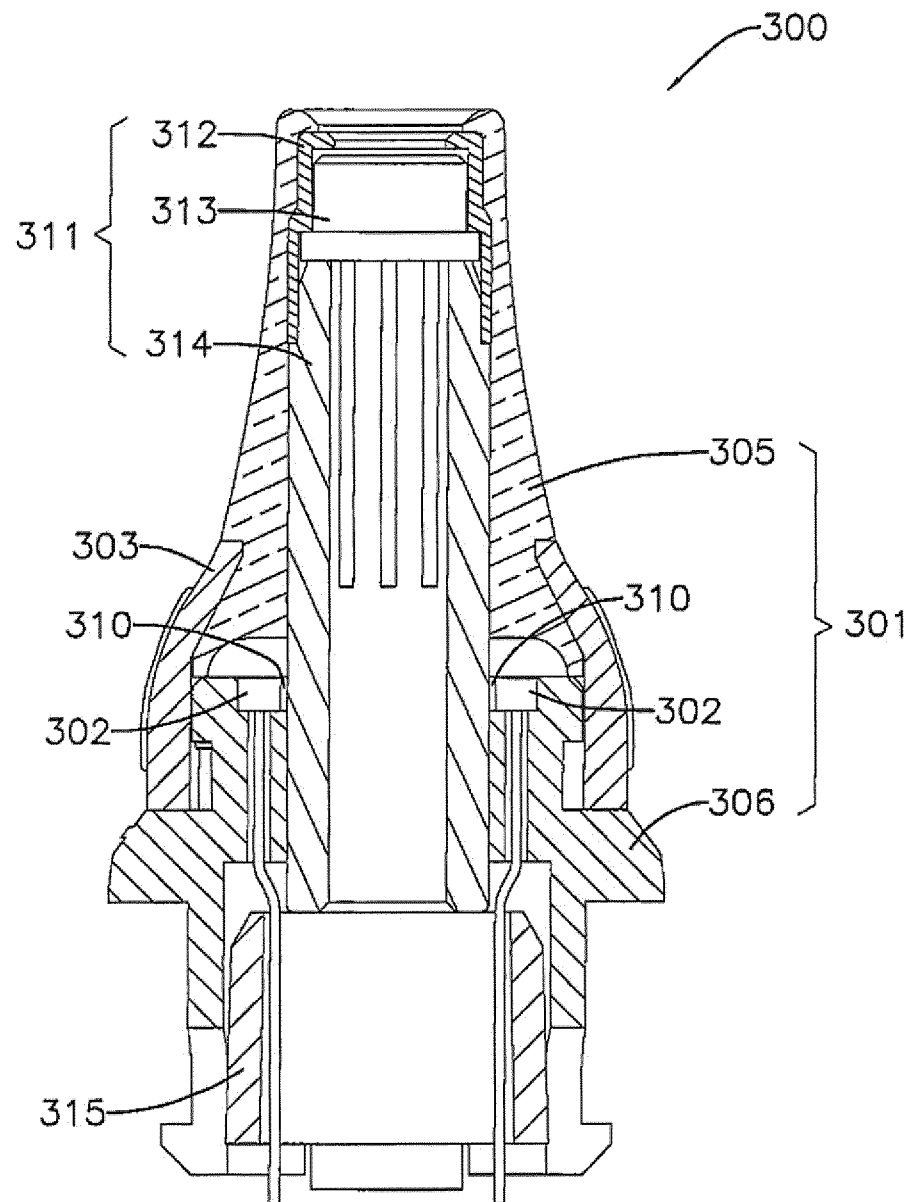


FIG. 7

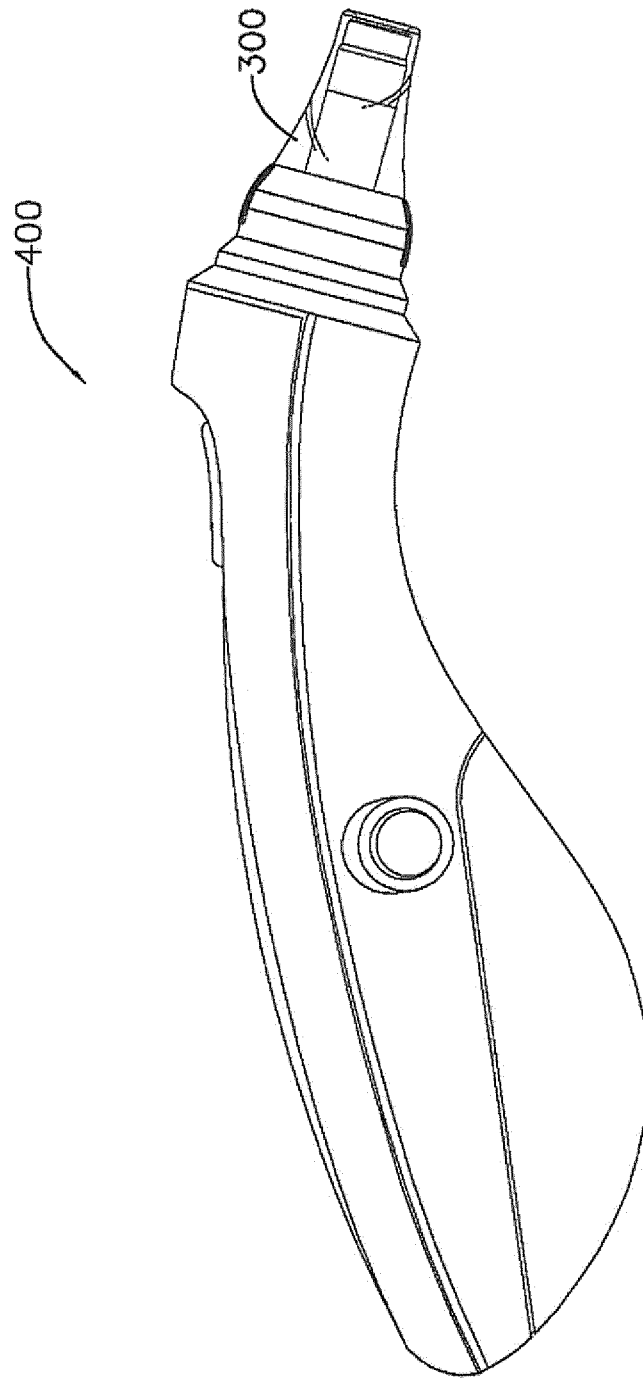


FIG. 8

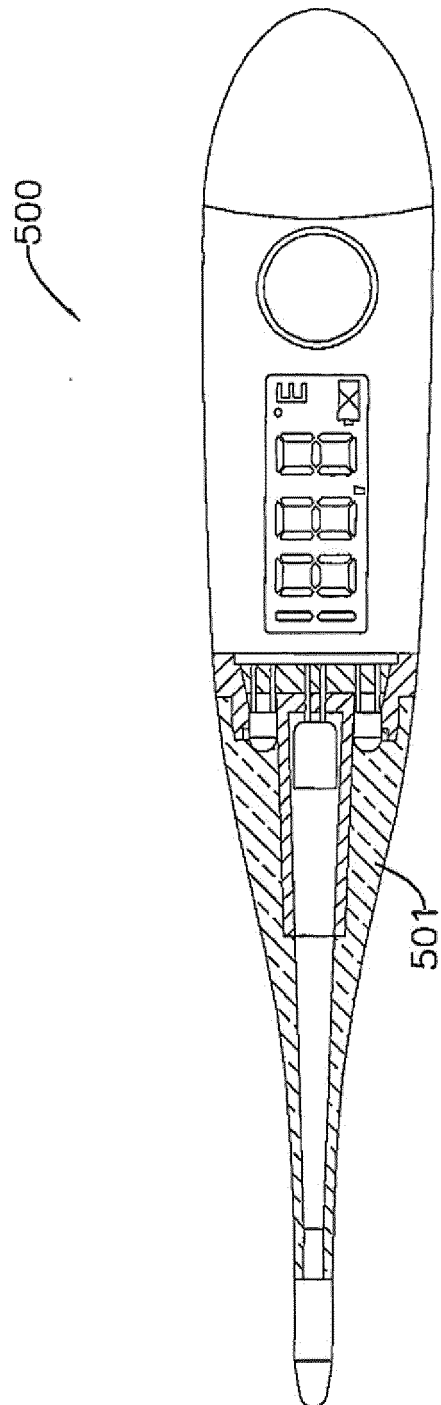


FIG. 9

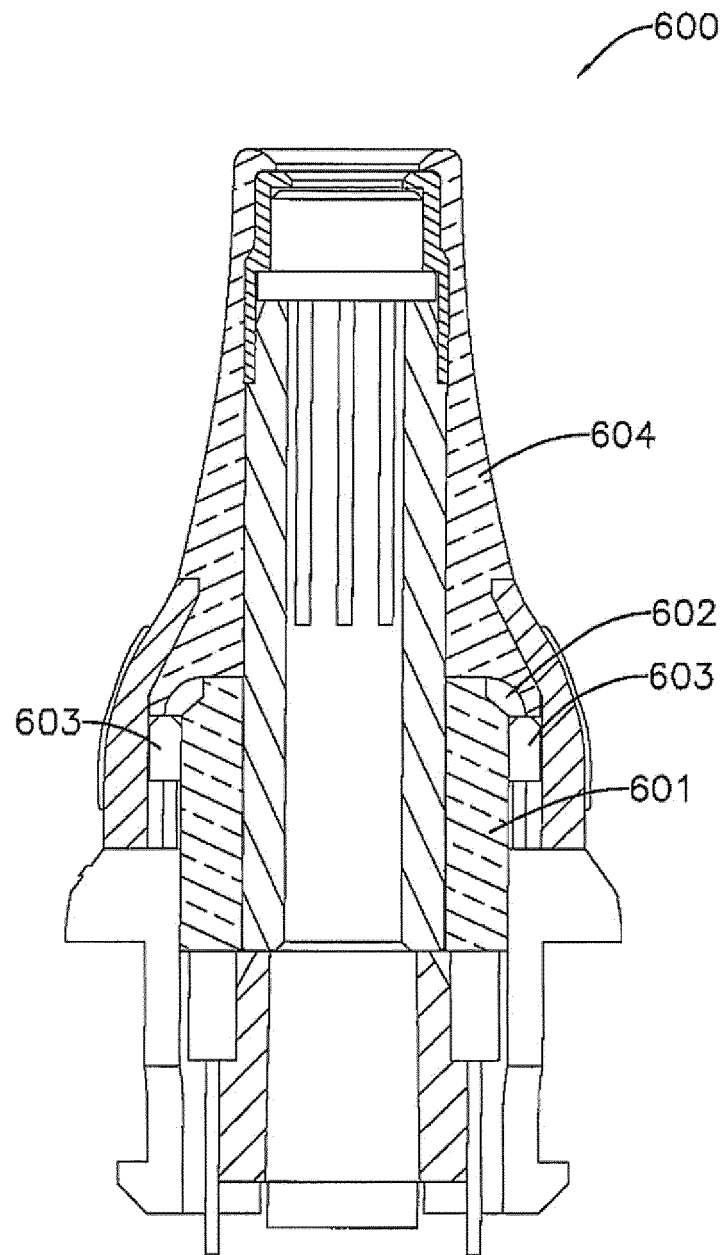


FIG. 10

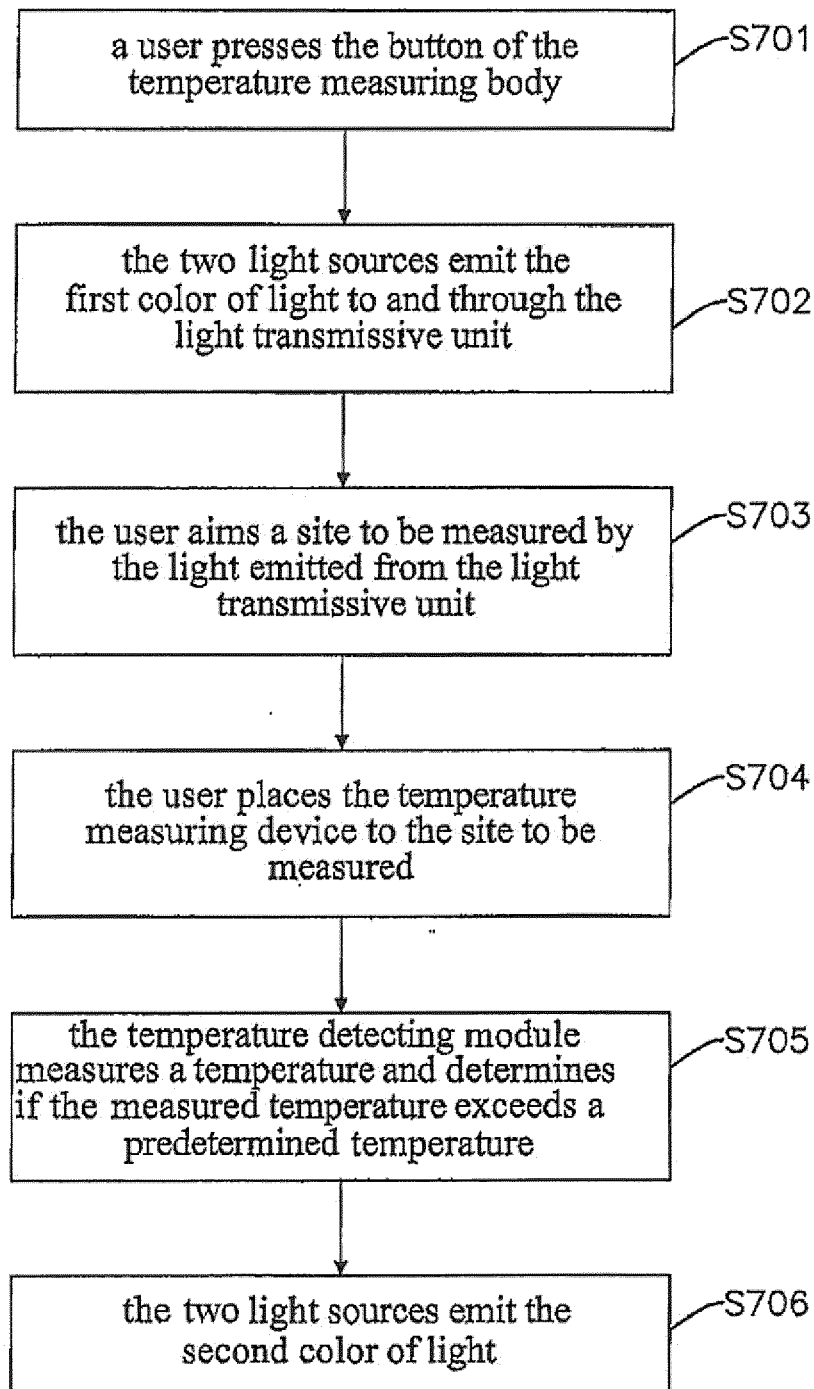


FIG. 11

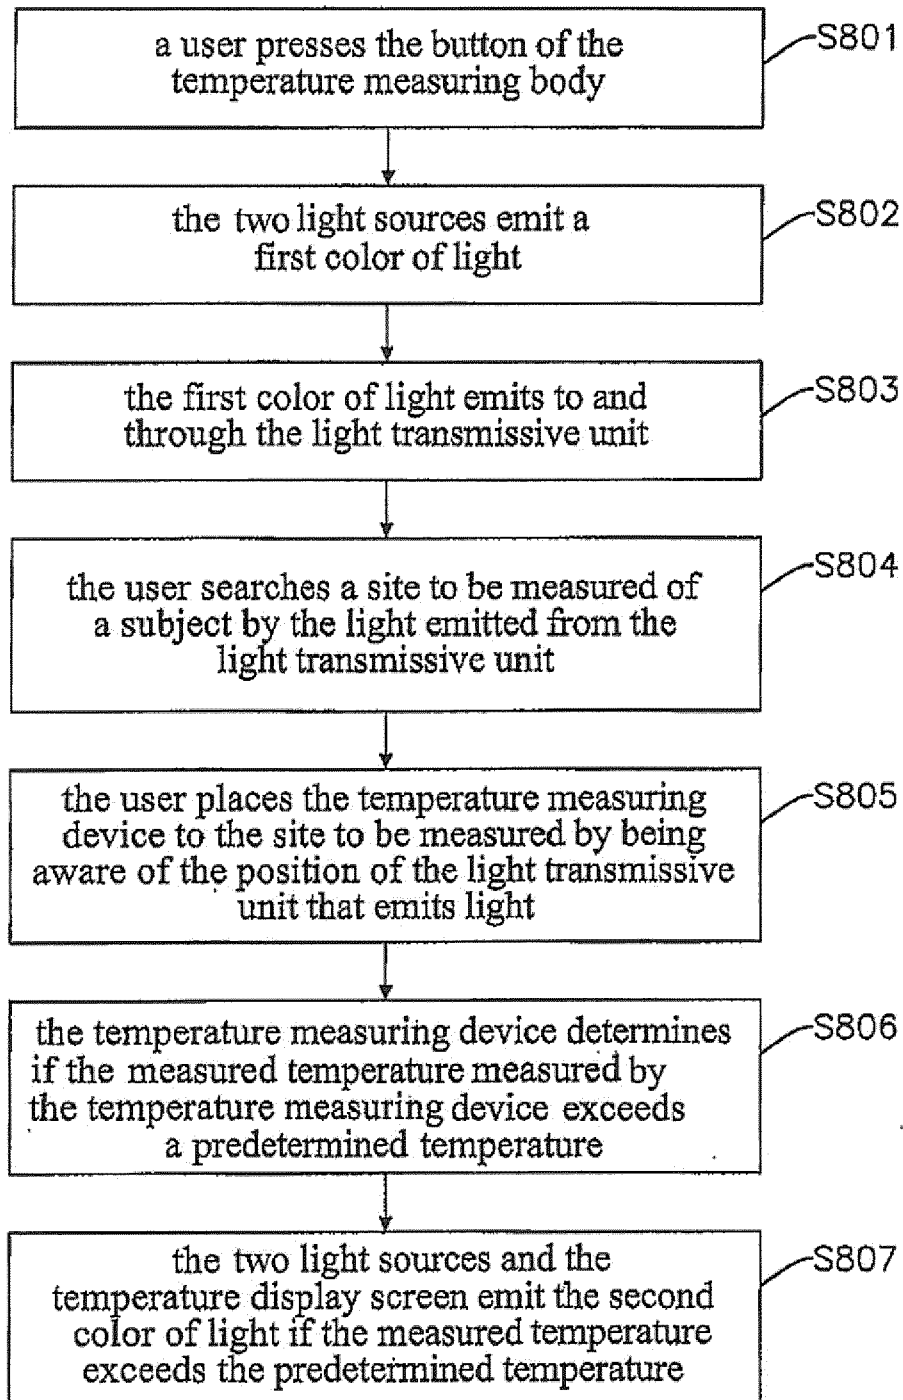


FIG. 12

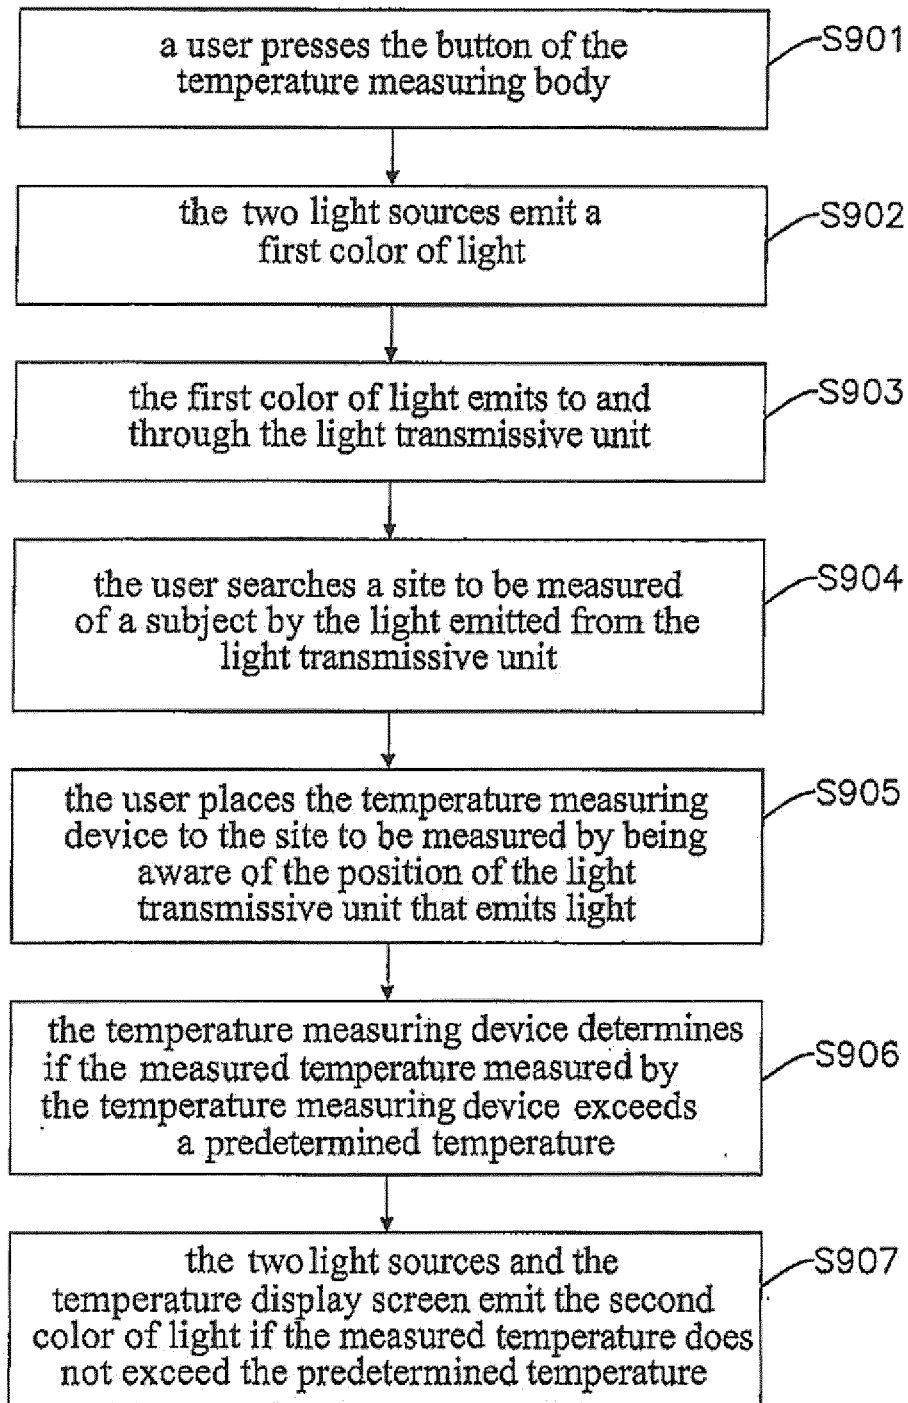


FIG. 13

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2011/078098

A. CLASSIFICATION OF SUBJECT MATTER

See the extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A61B G01J 5 G01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS, CNTXT, TWABS, TWTXT: probe light transparent

VEN, WPI, EPODOC: PROBE LIGHT ILLUMI+ TRANSPARENT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CN 201019727 Y (LIU, Yan), 13 February 2008 (13.02.2008), see page 2, lines 2-32, and figure 1	1-8
Y	US 2005/0085733 A1 (WONG, A.), 21 April 2005 (21.04.2005), see description, paragraphs [0020]-[0047]; claims 1-16; and figures 1-9	8-11
Y	CN 200951077 Y (RADIANT INNOVATION INC.), 26 September 2007 (26.09.2007), see description, page 3, line 4 to page 4, line 20	1-11
Y	US 2005/0080354 A1 (CROSSLEY, D.W.), 14 April 2005 (14.04.2005), see description, paragraphs [0021]-[0034], and figures 1-3	8-11
Y	WO 2007/062550 A1 (ZHAO, Zhigang), 07 June 2007 (07.06.2007), see claims 1-8, and figure 1	8-11
Y	CN 1380823 A (NAKAGAWA, A.), 20 November 2002 (20.11.2002), claims 1-20	1-8
A	CN 101065650 A (PIGEON CORPORATION), 31 October 2007 (31.10.2007), the whole document	1-11
A	TW 200722721 A (RADIANT INNOVATION INC.), 16 June 2007 (16.06.2007), the whole document	1-11

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
25 March 2012 (25.03.2012)Date of mailing of the international search report
05 April 2012 (05.04.2012)Name and mailing address of the ISA/CN:
State Intellectual Property Office of the P. R. China
No. 6, Xitucheng Road, Jimenqiao
Haidian District, Beijing 100088, China
Facsimile No.: (86-10) 62019451Authorized officer
YANG, Yanlan
Telephone No.: (86-10) 62085705

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2011/078098

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 201019727 Y	13.02.2008	None	
US 2005/0085733 A1	21.04.2005	None	
CN 200951077 Y	26.09.2007	None	
US 2005/0080354 A1	14.04.2005	None	
WO 2007/062550 A1	07.06.2007	None	
CN 1380823 A	20.11.2002	WO 0167995 A	20.09.2001
		JP 2001327525 A	27.11.2001
		EP 1188420 A	20.03.2002
		TW 483765 B	21.04.2002
		US 2002107579 A	08.08.2002
		US 6878165 B	12.04.2005
		CN 1183883 C	12.01.2005
		CN 1781465 A	07.06.2006
		CN 100418497 C	17.09.2008
CN 101065650 A	31.10.2007	WO 2006059479 A	08.06.2006
		JP 2006153725 A	15.06.2006
		JP 4671271 B2	13.04.2011
		CN 100567917 C	09.12.2009
		US 2008107152 A	08.05.2008
		US 2010040110 A	18.02.2010
		US 7726878 B	01.06.2010
TW 200722721 A	16.06.2007	US 2007019703 A1	25.01.2007
		TWI 273224 B	11.02.2007
CN 102038481 A	04.05.2011	None	

Form PCT/ISA/210 (patent family annex) (July 2009)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2011/078098

A. CLASSIFICATION OF SUBJECT MATTER

G01K 1/00 (2006.01) i

G01J 5/00 (2006.01) i

A61B 1/227 (2006.01) i

A61B 1/24 (2006.01) i

A61B 5/00 (2006.01) i

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20050080354 A [0003]
- JP 9005167 A [0004]

专利名称(译)	探针结构，具有该探针结构的温度测量装置及其使用方法		
公开(公告)号	EP2728326A4	公开(公告)日	2014-12-03
申请号	EP2011858472	申请日	2011-08-08
申请(专利权)人(译)	MICROLIFE知识产权GMBH		
当前申请(专利权)人(译)	MICROLIFE知识产权GMBH		
[标]发明人	HO CHIA CHEN		
发明人	HO, CHIA-CHEN		
IPC分类号	G01K1/00 G01J5/00 A61B1/227 A61B1/24 A61B5/00 A61B5/01 G01J5/02 G01J5/04 G01J5/08		
CPC分类号	A61B1/227 A61B5/0059 A61B5/01 A61B5/6817 A61B2562/0271 G01J5/026 G01J5/049 G01J5/0896		
优先权	201110185500.3 2011-06-30 CN		
其他公开文献	EP2728326A1		
外部链接	Espacenet		

摘要(译)

探针结构，具有探针结构的温度测量装置和使用该探针结构的方法技术领域探针结构包括透光单元和一个或多个光源。一个或多个光源将一种或多种颜色的光辐射到光透射单元并通过光透射单元。温度测量装置包括上述探针结构和温度测量体。探针结构组装在温度测量体内。通过光透射单元的设计和光源提供的可见光，用户可以容易地将探针结构放置到待测量的部分。