

(19)



(11)

EP 2 921 101 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
31.07.2019 Bulletin 2019/31

(51) Int Cl.:
A61B 5/00 (2006.01)

(21) Application number: **15158954.6**

(22) Date of filing: **13.03.2015**

(54) TERMINAL DEVICE AND TELEMETRY SYSTEM

ENDGERÄTEVORRICHTUNG UND TELEMETRIESYSTEM

DISPOSITIF DE TERMINAL ET SYSTÈME DE TÉLÉMÉTRIE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **20.03.2014 JP 2014058551**
31.03.2014 JP 2014071640

(43) Date of publication of application:
23.09.2015 Bulletin 2015/39

(73) Proprietor: **Nihon Kohden Corporation**
Shinjuku-ku
Tokyo (JP)

(72) Inventors:
• **Omori, Kiyohiro**
Shinjuku-ku, Tokyo (JP)

• **Okano, Takayoshi**
Shinjuku-ku, Tokyo (JP)
• **Murata, Shiro**
Shinjuku-ku, Tokyo (JP)

(74) Representative: **Grünecker Patent- und
Rechtsanwälte**
PartG mbB
Leopoldstraße 4
80802 München (DE)

(56) References cited:
DE-A1- 1 805 444 GB-A- 2 425 180
US-B1- 6 376 931

EP 2 921 101 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

[0001] The present invention relates to a terminal device and a telemetry system. 5

[0002] JP-A-5-192304 discloses a telemetry system in which a biological information display device on the receiving side monitors the radio wave state of a terminal device performing transmission, and an alarm generates based on a result of the monitoring. 10

[0003] JP-A-5-192304 discloses also that, in the case where a nurse turns off a power switch of a transmitter, a prediction signal is transmitted to a receiver. When the radio wave is stopped at the receiver after the arrival of the prediction signal, it is determined that the shutdown of the transmitter is caused by regular operation, and the alarm is stopped. 15

[0004] JP-A-2001-188497 discloses that notifications of battery exhaustion, battery detachment, and recovery to the normal voltage when a battery is reattached are performed by using a display device having a memory property. 20

[0005] GB 2 425 180 A discloses a wearable physiological monitor with a wireless transmitter. A health status may be determined by the wearable physiological monitor and wirelessly transmitted to a remote monitoring station. Additionally, unit self check diagnostics such as a battery status may be transmitted as well. 25

SUMMARY

[0006] In the telemetry system disclosed in JP-A-5-192304, an alarm is stopped, but it is impossible to determine the state of the battery. In the device of JP-A-2001-188497, it is impossible to determine the state of a battery in the transmission side. 30

[0007] The invention has been conducted in order to solve the problems of such telemetry systems. An object of the invention is to provide a terminal device and telemetry system in which a situation where a shutdown state of a battery occurs in the terminal device can be surely determined in a biological information display device that is on the reception side. 35

[0008] According to an aspect of the invention, (1) A terminal device in which a transmitter transmits biological information and battery state information to a biological information display device, includes a shutdown detection unit that detects a shutdown state of a battery and a transmission control unit that, when the shutdown detection unit detects the battery shutdown state, causes the transmitter to transmit the battery state information indicative of shutdown. 40

(2) In the terminal device of (1), the shutdown detection unit detects at least one of turn off due to operation of a power switch and battery detachment. 45

(3) The terminal device of (1) or (2) further includes

a power supply control unit that, when the power switch is turned on, immediately supplies a power of the battery to the terminal device, and, when the power switch is turned off, shutdown the supply of the battery power after a predetermined time delay.

(4) A telemetry system includes a terminal device and a biological information display device. The terminal device includes a transmitter which transmits at least biological information and battery state information, a shutdown detection unit which detects a shutdown state of a battery, and a transmission control unit which, when the shutdown detection unit detects a battery shutdown state, causes the transmitter to transmit the battery state information indicative of shutdown. The biological information display device includes a display control unit which receives the biological information transmitted from the terminal device to display the information, and, when the battery state information indicative of shutdown of the battery is received from the terminal device, performs a display indicating shutdown of the battery. 50

(5) In the telemetry system of (4), the battery state information indicative of the shutdown of the battery is information indicating at least one of turn off due to operation of a power switch, and battery detachment, and the display control unit performs displays respectively corresponding to kinds of information. 55

(6) In the telemetry system of (4) or (5), the biological information display device further includes a radio wave state detection unit which detects a state of a radio wave transmitted from the terminal device, and the display control unit performs a display based on the radio wave state detected by the radio wave state detection unit. 60

(7) In the telemetry system of (6), the biological information display device further includes a determination unit which obtains information of a remaining charge amount of the battery from the terminal device, and which determines shutdown of the battery in combination with the information of the remaining charge amount and the radio wave state, and the display control unit performs a display indicating shutdown of the battery based on the determination of the determination unit. 65

[0009] According to the invention, the biological information display device that is on the reception side can determine a situation where a battery shutdown state occurs in the terminal device. Since at least one of turn off due to operation of the power switch, and detachment of the battery is detected, it is possible to identify whether the battery shutdown state is caused by at least one of turn off due to operation of the power switch and detachment of the battery. 70

BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

Fig. 1 is a diagram of a telemetry system of an embodiment of the invention.

Fig. 2 is a diagram of a terminal device constituting the telemetry system of Fig. 1.

Fig. 3 illustrates a display example of information displayed on one screen of a biological information display device in the embodiment of the invention.

Fig. 4 is a flowchart illustrating the operation of the terminal device of the embodiment of the invention.

Fig. 5 is a flowchart illustrating the operation of the biological information display device in the embodiment of the invention.

Fig. 6 illustrates a display example of messages and icons displayed by the biological information display device in the embodiment of the invention.

Figs. 7A and 7B illustrate a display example of messages and icons displayed by the biological information display device in the embodiment of the invention.

Fig. 8 illustrates a display example of messages and icons displayed by the biological information display device in the embodiment of the invention.

Fig. 9 illustrates a display example of messages and icons displayed by the biological information display device in the embodiment of the invention.

Fig. 10 illustrates a display example of messages and icons displayed by the biological information display device in the embodiment of the invention.

DETAILED DESCRIPTION OF EMBODIMENTS

[0011] Hereinafter, a terminal device, biological information display device, and telemetry system of an embodiment of the invention will be described with reference to the accompanying drawings. In the figures, the identical components are denoted by the same reference numerals, and duplicate description is omitted. Fig. 1 is a diagram of an embodiment of the telemetry system of the invention. The telemetry system can include a plurality of terminal devices 301 to 30n which collect and transmit biological information, such as telemeters, and a biological information display device 10 which receives and displays the biological information transmitted from the terminal devices 301 to 30n, such as central monitors. A plurality of biological information display devices 10 may be disposed.

[0012] For example, each of the terminal devices 301 to 30n may be configured as shown in Fig. 2. A controller 20 configured by, for example, a computer controls components of each device. A plurality of sensors 21 to 23 are connected to the controller 20. The sensors 21 to 23 measure biological signals such as an electrocardiogram, the blood pressure, brain waves, and the body temperature. The numbers of the sensors in the respective terminal devices 301 to 30n may be different from or equal to one another.

[0013] A transmitter 24 is connected to the controller 20. The biological signals obtained from the sensors 21

to 23 are transmitted from the transmitter 24. Moreover, a display section 25 for displaying the operation status of the device and the like is connected to the controller 20.

[0014] Each of the terminal devices 301 to 30n operates by power of a battery 26. A remaining charge amount detection unit 27 is disposed in order to detect the remaining charge amount of the battery 26. Information of the remaining charge amount obtained by the remaining charge amount detection unit 27 is fetched by the controller 20, and then transmitted from the transmitter 24.

[0015] A power switch 28 is disposed in each of the terminal devices 301 to 30n. On/off operations of the power switch 28 are detected by a switch operation detection unit 29. On/off information of the power switch 28 detected by the switch operation detection unit 29 is sent to the controller 20. The controller 20 includes a power supply control unit 51. The power supply control unit 51 receives the on/off information of the power switch 28, and performs controls related to a power supply.

[0016] Upon reception of the on information of the power switch 28, the power supply control unit 51 immediately starts a power supply from the battery 26 to the components. By contrast, when the power supply control unit 51 receives the off information of the power switch 28, the power supply control unit 51 stops supplying the power supply from the battery 26 to the components after elapse of a predetermined time period. The controller 20 which is the transmission control unit transmits power off information from the transmitter 24 during the predetermined time period.

[0017] A battery detection unit 52 is disposed in each of the terminal devices 301 to 30n. For example, the battery detection unit 52 can be realized by a configuration where a switch or sensor for detecting a battery is disposed in a battery box. The unit detects a state where the battery 26 is detached from the battery box (hereinafter, the state is referred to as the battery detachment state), and notifies the controller 20 of the state. The controller 20 which is the transmission control unit transmits the battery detachment information from the transmitter 24. Each of the terminal devices 301 to 30n may include another battery for detecting a state of the switch or sensor and transmitting the battery detachment state.

[0018] The on/off information of the power switch 28 and the battery detachment state indicate the battery shutdown state, and the switch operation detection unit 29 and the battery detection unit 52 constitute the shutdown detection unit for detecting the shutdown state of the battery. Although the switch operation detection unit 29 and the battery detection unit 52 are disposed in the embodiment, only one of these units may be disposed.

[0019] The biological information display device 10 can include a central controller 11 configured by, for example, a computer. A display section 12, a receiver 13, and an input section 14 are connected to the central controller 11. The display section 12 displays biological information and the like. The receiver 13 is used for receiving the biological information transmitted from the terminal de-

vices 301 to 30n, and the like. The input section 14 can include a touch panel, a keyboard, a mouse, or the like, and is used for inputting a command and an operation on the screen.

[0020] The central controller 11 can include a radio wave state detection unit 41 and a display control unit 42. The radio wave state detection unit 41 detects the states (for example, electric field strengths) of radio waves transmitted from the terminal devices 301 to 30n. When the battery state information indicating shutdown of a battery is transmitted from one of the terminal devices 301 to 30n, the display control unit 42 can perform a display indicating shutdown of the battery. The display control unit 42 may divide the screen of the display section 12 into a plurality of display regions, and display sets of biological information transmitted from the terminal devices 301 to 30n in the respective corresponding display regions. A unit for generating an alarm sound may be disposed in the biological information display device 10.

[0021] Fig. 3 illustrates an example of a display screen in which one screen is divided into regions in accordance with the plurality of terminal devices, and displays respectively relating to sets of information of the terminal devices are performed on the divided display regions. In the example, the whole screen is divided into eight regions in accordance with eight terminal devices to form eight display regions. In a sub display region 83, a patient ID or a bed number is displayed in the upper portion, and a channel number is displayed in the lower portion.

[0022] A battery remaining charge amount icon 85 is displayed in a sub display region on the right side of the sub display region 83. As the battery remaining charge amount icon 85, three rectangular segments having a trapezoidal or parallelogram shape are displayed at the maximum in the longitudinal direction in a frame having a shape of a dry cell. The lower the remaining charge amount, the smaller number of segments is displayed.

[0023] An antenna icon 84 indicating the reception condition is displayed in a region on the right side of the region where the battery remaining charge amount icon 85 is displayed. As well known in the art, an antenna bar display of the antenna icon 84 is displayed while changing to one of four states in accordance with the reception condition. As the reception condition becomes worse, the number of bars which are displayed in proximity to the right side of the antenna figure display at the leftmost position is further reduced. An alarm battery remaining charge amount icon 87 in which a battery icon indicating that the battery has no remaining charge amount and empty is enlarged is shown is displayed in a sub display region 86 below the region on the left side of the sub display region 83. A sub display region 88 is a display region for displaying biological information, and a signal waveform or the like is displayed in the region. A sub display region 89 is a display region for displaying message characters, and "Battery replacement" which are message characters for prompting battery replacement, "Radio wave interruption" which are message characters

indicating interruption of the radio wave, and like are displayed in the region.

[0024] In the thus configured telemetry system, for example, the terminal devices 301 to 30n operate in accordance with the program shown in Fig. 4. When the central controller 11 of the biological information display device 10 executes a program corresponding to the flowchart shown in Fig. 5, for example, the controller 11 functions as the radio wave state detection unit 41 and the display control unit 42. Hereinafter, the operation will be described with reference to the flowchart. The flowchart of Fig. 5 illustrates the operation corresponding to one terminal device.

[0025] In each of the terminal devices 301 to 30n, the power switch 28 is turned on, and the operation is started to collect biological information and detect the battery remaining charge amount (S11). Then, the collected biological information and the information of the battery remaining charge amount are transmitted to the biological information display device 10 (S12). Moreover, it is detected whether the device is in the battery detachment state or not (S13). If the device is in the battery detachment state, battery detachment state information is transmitted to the biological information display device 10 (S17), and the device is powered off by detachment of the battery (S16).

[0026] If in step S13 the process branches to NO, it is detected whether the power switch 28 is turned off or not (S14). If the power switch 28 is turned off, the power supply is maintained for the predetermined time period, the turn off information of the power switch 28 is transmitted (S15), and the device is powered off after elapse of the predetermined time period (S16).

[0027] In the central controller 11 of the biological information display device 10, by contrast, the power is turned on, and the controller is started to operate as the radio wave state detection unit 41 and detect whether the radio wave interruption state exists or not (S21). If the process branches to NO, signal waveforms and the like are displayed based on the biological information sent from the terminal devices 301 to 30n, and the display of the remaining charge amount is output based on the information of the battery remaining charge amount (S22). Fig. 6 illustrates an example of the display.

[0028] Then, it is detected whether the battery remaining charge amount is at a level where the battery must be replaced or not, based on the battery remaining charge amount information (S23). If the amount is at the level where the battery must be replaced, a message for prompting battery replacement is displayed in the sub display region 89 (S24). After step S24, or if in step S23 the process branches to NO, it is detected whether the power off information or the battery detachment state information is received or not (S25). If in step S25 the process branches to YES, a message indicating the power off or the battery detachment state is displayed in the sub display region 89, based on information sent from the terminal devices 301 to 30n (S26). Fig. 7A illustrates an

example in which a message indicating the power off is displayed in the sub display region 89, and Fig. 7B illustrates an example in which a message indicating the battery detachment state is displayed in the sub display region 89. In the embodiment, in advance that the radio wave is suddenly lost, as described above, it is clearly known that the operation of turning off the power or that of opening the battery cover is performed on the side of a terminal device, and therefore the medical person can adequately take an subsequent countermeasure.

[0029] If in step S25 the process branches to NO, by contrast, the process returns to step S21 to be continued. If in step S21 the process branches to YES, it is detected whether the power is turned off or the device is in the battery detachment state (S27). If in step S27 the process branches to YES, the display in the sub display region for biological information is not performed, and a message indicating the radio wave interruption is displayed as shown in Fig. 8 (S28).

[0030] If in step S27 the process branches to NO, a saw-tooth waveform and a message indicating the radio wave interruption are displayed as shown in Fig. 9 (S29). In step S29, an audible alarm may be generated. In succession to step S29, it is determined whether a state where the battery has no remaining charge amount is produced or not (S30). If it is determined that the battery has no remaining charge amount, a no-battery icon is enlargedly displayed in the sub display region 86 as shown in Fig. 10 (S31). In step S31, an escalation alarm in which the volume of the audible alarm is increased may be generated. If in step S30 the process branches to NO, the display of the saw-tooth waveform and message indicating the radio wave interruption which have been displayed in step S29 is maintained.

[0031] In the embodiment, in the battery shutdown state in which the power is turned off or the battery is detached, as described above, the cause of the shutdown or the like is displayed before the radio wave interruption occurs (Fig. 7), and, after the radio wave interruption, the display (Fig. 8) is performed which is different from displays (Fig. 9) performed in the case where the terminal devices 301 to 30n leave the communication range, and where the reception condition is deteriorated. Usually, therefore, it is possible to determine that the radio wave interruption is caused by the power off due to an operation performed by the medical person, or the battery detachment state, and hence it is not required to take unnecessary countermeasures such as that a patient who may leave the communication range is searched, and that the terminal devices 301 to 30n are checked for abnormalities. In a case such as that it is forgotten to turn on the power or attach a battery, the display is different from displays performed in the case of out of communication range and deterioration of the reception condition, and it is possible to check also forgetting of turning on of the power and attachment of a battery.

[0032] In the embodiment, a shutdown state of a bat-

tery is detected based on the power off information or the battery detachment state information. Alternatively, the biological information display device 10 may further include a determination unit which obtains information of the remaining charge amount of the battery from the terminal devices 301 to 30n, and which, in combination of the information and the radio wave state, determines shutdown of the battery. In the case where the remaining charge amount of the battery is sufficient, when the radio wave interruption suddenly occurs, for example, it is determined that a battery shutdown state occurs, and the display which is different from displays performed in the case of out of communication range and deterioration of the reception condition can be performed.

Claims

1. A terminal device (301) in which a transmitter (24) transmits biological information and battery state information to a biological information display device (10), the terminal device (301) **characterized by:**

a shutdown detection unit that detects a shutdown state of a battery (26); and
a transmission control unit that, when the shutdown detection unit detects the battery shutdown state, causes the transmitter (24) to transmit the battery state information indicative of shutdown;
wherein the terminal device (301) comprises another battery for detecting the shutdown state and transmitting the battery state information.

2. The terminal device according to claim 1, the shutdown detection unit detects at least one of turn off due to operation of a power switch and battery detachment.
3. The terminal device according to claim 1 or 2 further comprising:
a power supply control unit that, when the power switch is turned on, immediately supplies a power of the battery to the terminal device, and, when the power switch is turned off, shutdown the supply of the battery power after a predetermined time delay.

4. A telemetry system comprising:

a terminal device (301) as defined in one of the previous claims; and
a biological information display device (10) that includes a display control unit (42) which receives the biological information transmitted from the terminal device (301) to display the information, and, when the battery state information indicative of shutdown of the battery is received from the terminal device (301), performs

a display indicating shutdown of the battery.

5. The telemetry system according to claim 4, wherein the battery state information indicative of the shutdown of the battery is information indicating at least one of turn off due to operation of a power switch, and battery detachment, and the display control unit performs displays respectively corresponding to kinds of information.
6. The telemetry system according to 4 or 5, wherein the biological information display device further includes a radio wave state detection unit which detects a state of a radio wave transmitted from the terminal device, and the display control unit performs a display based on the radio wave state detected by the radio wave state detection unit.
7. The telemetry system according to claim 6, wherein the biological information display device further includes a determination unit which obtains information of a remaining charge amount of the battery from the terminal device, and which determines shutdown of the battery in combination with the information of the remaining charge amount and the radio wave state, and the display control unit performs a display indicating shutdown of the battery based on the determination of the determination unit.

Patentansprüche

1. Endgerät-Vorrichtung (301), bei der ein Sender (24) biologische Informationen und Batteriestatus-Informationen zu einer Vorrichtung (10) zur Anzeige biologischer Informationen sendet, wobei die Endgerät-Vorrichtung (301) **gekennzeichnet ist durch:**

eine Einheit zur Erfassung von Abschaltung, die einen Abschaltungs-Status einer Batterie (26) erfasst; sowie
eine Einheit für Sende-Steuerung, die, wenn die Einheit zur Erfassung von Abschaltung den Abschaltungs-Status der Batterie erfasst, den Sender (24) veranlasst, die Batteriestatus-Informationen zu senden, die Abschaltung anzeigen; wobei die Endgerät-Vorrichtung (301) eine weitere Batterie zum Erfassen des Abschaltungs-Status und zum Senden der Batteriestatus-Informationen umfasst.
2. Endgerät-Vorrichtung nach Anspruch 1, wobei die Einheit zur Erfassung von Abschaltung wenigstens ein Abschalten aufgrund von Betätigung eines Stromschalters oder/und Trennung der Batterie erfasst.

3. Endgerät-Vorrichtung nach Anspruch 1 oder 2, die des Weiteren umfasst:

eine Einheit zur Steuerung von Stromzufuhr, die, wenn der Stromschalter geschlossen wird, der Endgerät-Vorrichtung sofort einen Strom der Batterie zuführt, und, wenn der Stromschalter geöffnet wird, die Zufuhr des Batteriestroms nach einer vorgegebenen Zeitverzögerung abschaltet.

4. Telemetrie-System, das umfasst:

eine Endgerät-Vorrichtung (301) nach einem der vorangehenden Ansprüche; sowie
eine Vorrichtung (10) zum Anzeigen biologischer Informationen, die eine Einheit (42) zur Steuerung von Anzeige einschließt, die die von der Endgerät-Vorrichtung (301) gesendeten biologischen Informationen empfängt und die Informationen anzeigt, und, wenn die Batteriestatus-Informationen, die Abschaltung der Batterie anzeigen, von der Endgerät-Vorrichtung (301) empfangen werden, eine Anzeige durchführt, die Abschaltung der Batterie anzeigt.

5. Telemetrie-System nach Anspruch 4, wobei die Batteriestatus-Informationen, die die Abschaltung der Batterie anzeigen, Informationen sind, die wenigstens Abschalten aufgrund von Betätigung eines Stromschalters oder/und Trennung der Batterie anzeigen, und die Einheit zur Steuerung von Anzeige Anzeigen durchführt, die jeweils den Arten von Informationen entsprechen.

6. Telemetrie-System gemäß 4 oder 5, wobei die Vorrichtung zur Anzeige biologischer Informationen des Weiteren eine Einheit zur Erfassung des Status einer Funkwelle einschließt, die einen Status einer von der Endgerät-Vorrichtung gesendeten Funkwelle erfasst, und die Einheit zur Steuerung von Anzeige eine Anzeige basierend auf dem von der Einheit zur Erfassung des Status einer Funkwelle erfassten Funkwellen-Status durchführt.
7. Telemetrie-System nach Anspruch 6, wobei die Vorrichtung zur Anzeige biologischer Informationen des Weiteren eine Bestimmungseinheit einschließt, die Informationen über eine verbleibende Ladungsmenge der Batterie von der Endgerät-Vorrichtung bezieht und die Abschaltung der Batterie in Kombination mit den Informationen über die verbleibende Ladungsmenge und den Funkwellen-Status bestimmt, und die Einheit zur Steuerung von Anzeige eine Anzeige durchführt, die Abschaltung der Batterie basierend auf der Bestimmung der Bestimmungseinheit anzeigt.

Revendications

1. Dispositif terminal (301) dans lequel un transmetteur (24) transmet des informations biologiques et des informations d'état de batterie à un dispositif d'affichage d'informations biologiques (10), le dispositif terminal (301) **caractérisé par** :
 - une unité de détection d'arrêt qui détecte un état d'arrêt d'une batterie (26) ; et
 - une unité de commande de transmission qui, lorsque l'unité de détection d'arrêt détecte l'état d'arrêt de la batterie, amène le transmetteur (24) à transmettre les informations d'état de batterie indicatrices de l'arrêt ;
 - où le dispositif terminal (301) comprend une autre batterie de détection de l'état d'arrêt et de transmission des informations d'état de batterie.
2. Dispositif terminal selon la revendication 1, l'unité de détection d'arrêt détecte au moins l'un d'un arrêt dû au fonctionnement d'un commutateur d'alimentation et de détachement de la batterie.
3. Dispositif terminal selon la revendication 1 ou 2 comprenant en outre :
 - une unité de commande d'alimentation d'énergie qui, lorsque le commutateur d'alimentation est mis en marche, alimente immédiatement une énergie de la batterie au dispositif terminal, et, lorsque le commutateur d'alimentation est éteint, arrête l'alimentation de l'énergie de la batterie après un délai prédéterminé.
4. Système de télémétrie comprenant :
 - un dispositif terminal (301) tel que défini selon l'une des revendications précédentes ; et
 - un dispositif d'affichage d'informations biologiques (10) qui comprend une unité de commande d'affichage (42) qui reçoit les informations biologiques transmises par le dispositif terminal (301) afin d'afficher les informations, et, lorsque les informations d'état de batterie indicatrices de l'arrêt de la batterie sont reçues du dispositif terminal (301), effectue un affichage indiquant l'arrêt de la batterie.
5. Système de télémétrie selon la revendication 4, les informations d'état de batterie indicatrices de l'arrêt de la batterie sont des informations indiquant au moins l'un de l'arrêt dû au fonctionnement d'un commutateur d'alimentation, et du détachement de la batterie, et l'unité de commande d'affichage effectue les affichages respectivement correspondant aux types d'informations.
6. Système de télémétrie selon la revendication 4 ou 5, le dispositif d'affichage d'informations biologiques comprenant en outre une unité de détection d'état d'onde radio qui détecte un état d'onde radio transmis depuis le dispositif terminal, et l'unité de commande d'affichage effectue un affichage sur la base de l'état d'onde radio détecté par l'unité de détection d'état d'onde radio.
7. Système de télémétrie selon la revendication 6, le dispositif d'affichage d'informations biologiques comprenant en outre une unité de détermination qui obtient des informations d'un niveau de charge restant de la batterie depuis le dispositif terminal, et qui détermine l'arrêt de la batterie en combinaison avec les informations de niveau de charge restant et d'état d'onde radio, et l'unité de commande d'affichage effectue un affichage indiquant l'arrêt de la batterie sur la base de la détermination de l'unité de détermination.

FIG. 1

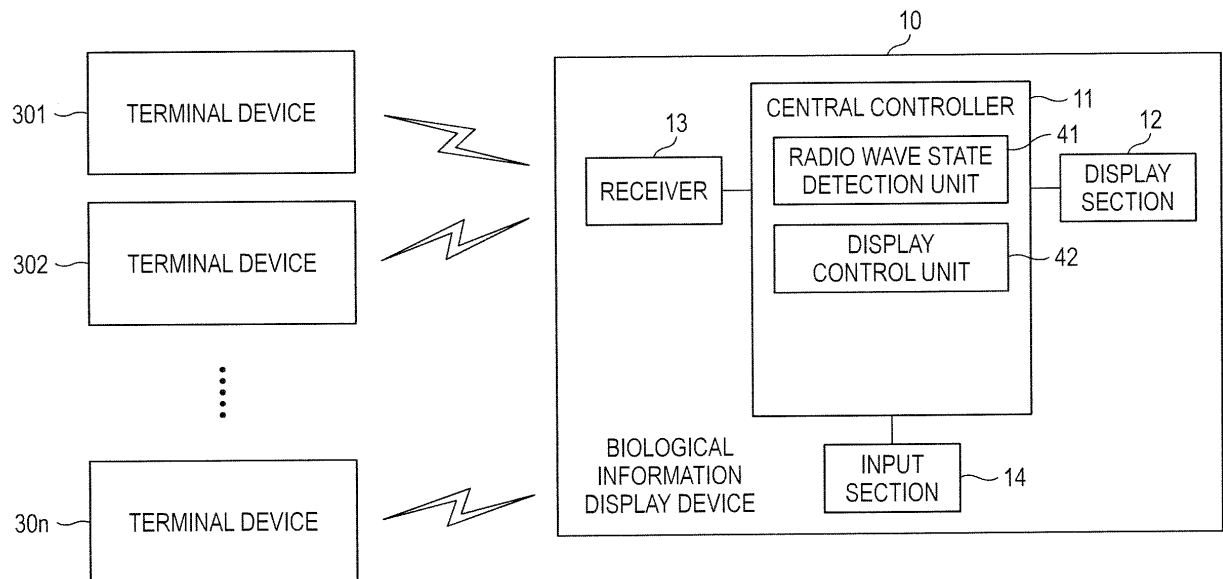


FIG. 2

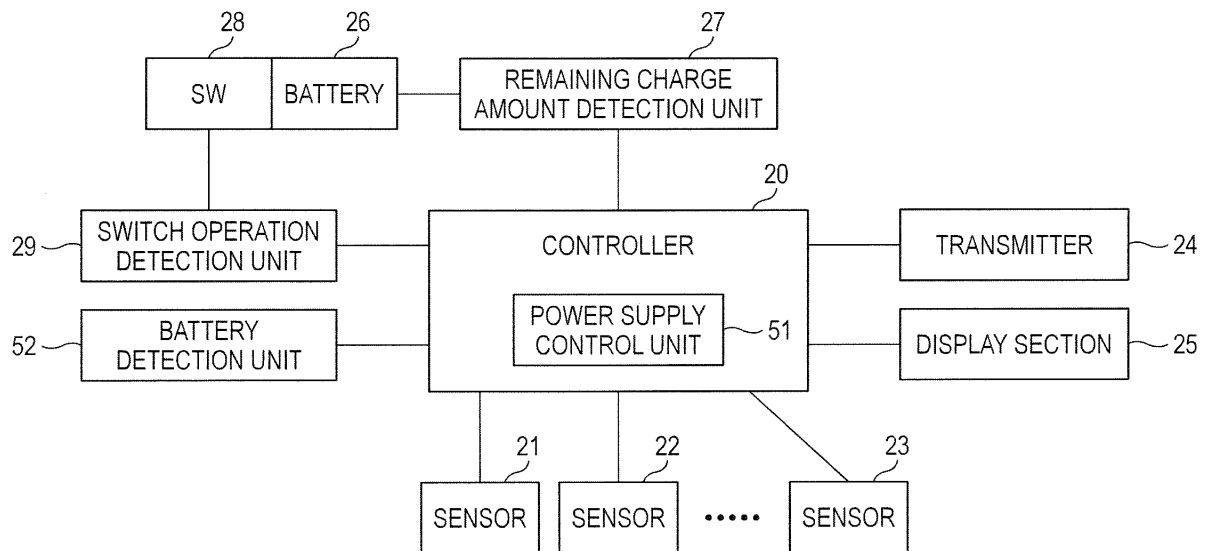


FIG. 3

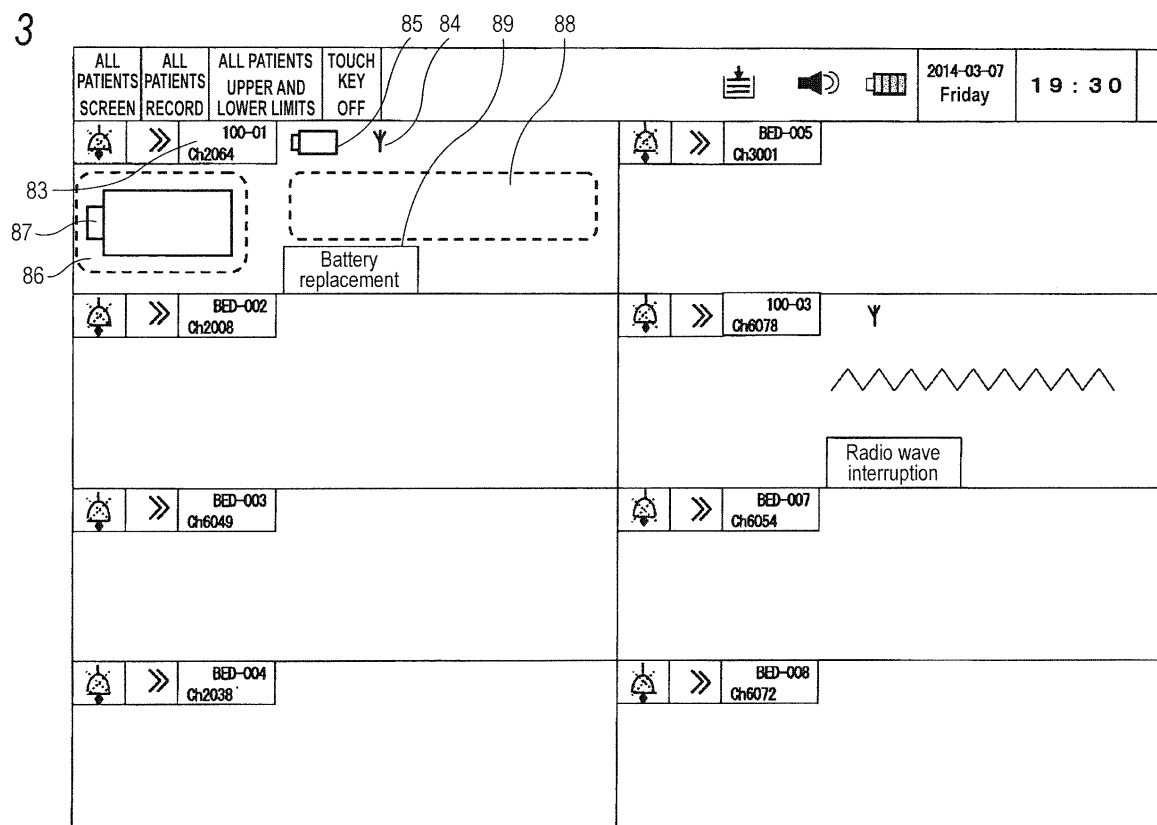


FIG. 4

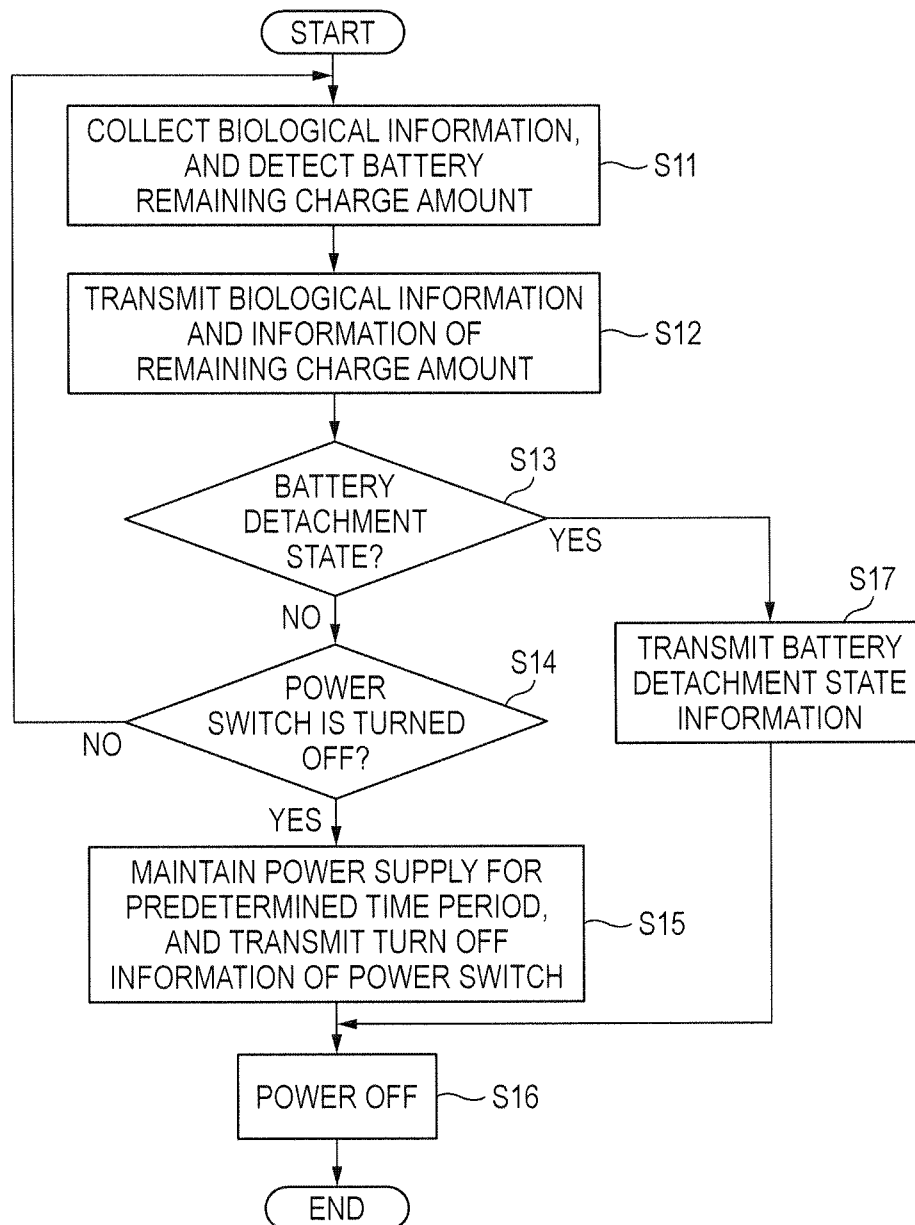


FIG. 5

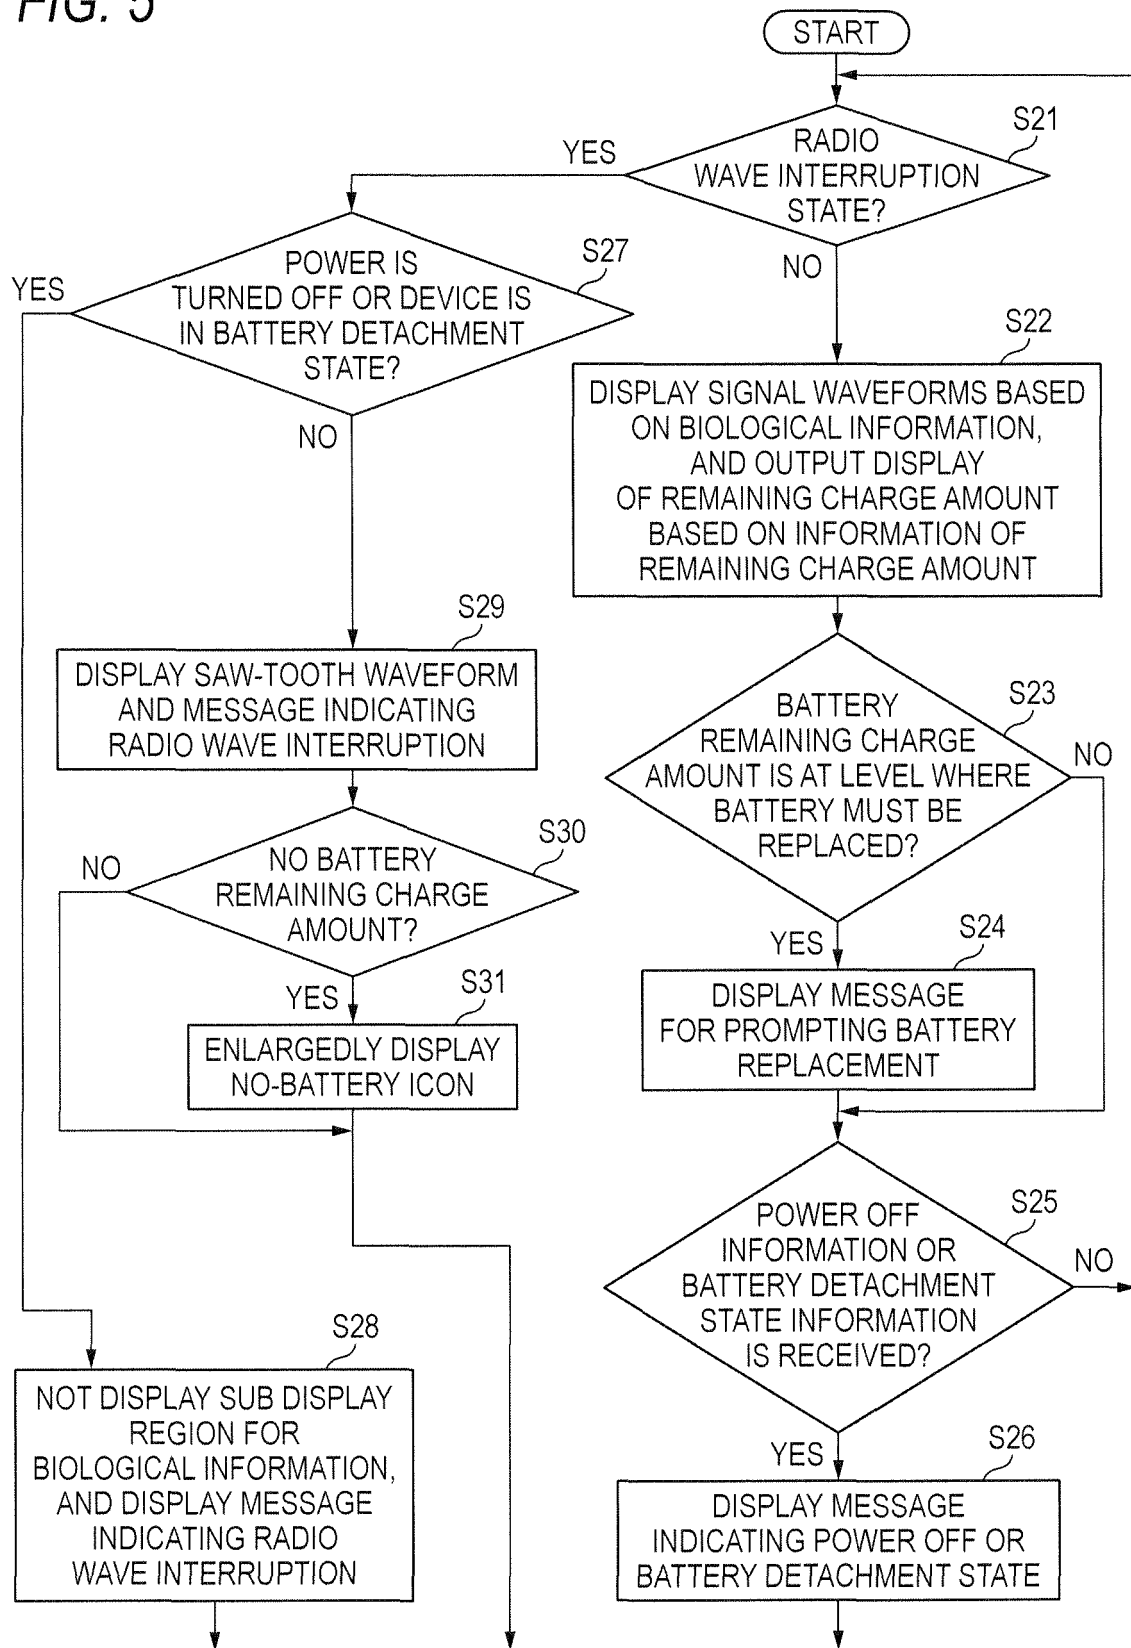


FIG. 6

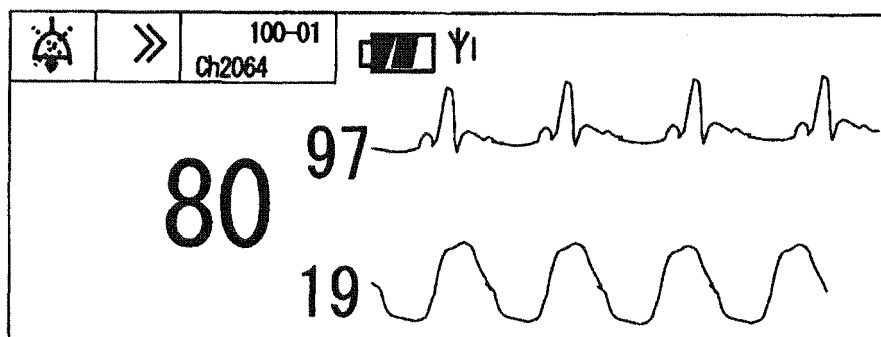


FIG. 7A

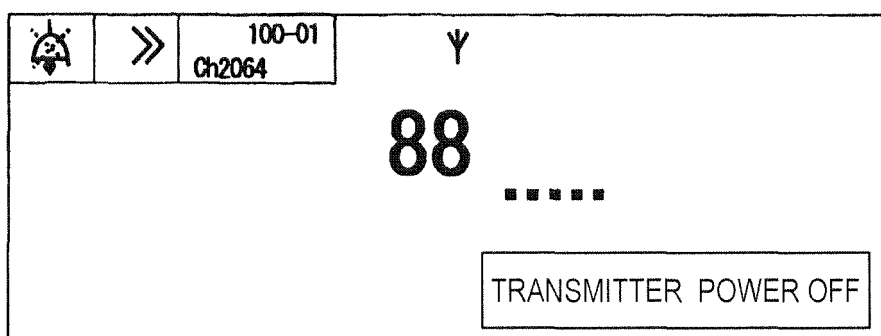


FIG. 7B

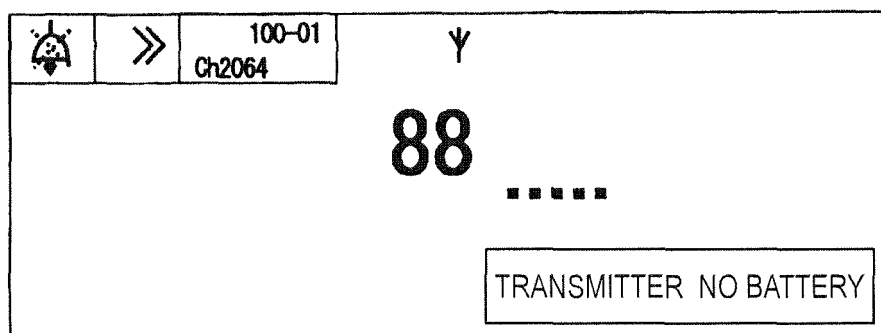


FIG. 8

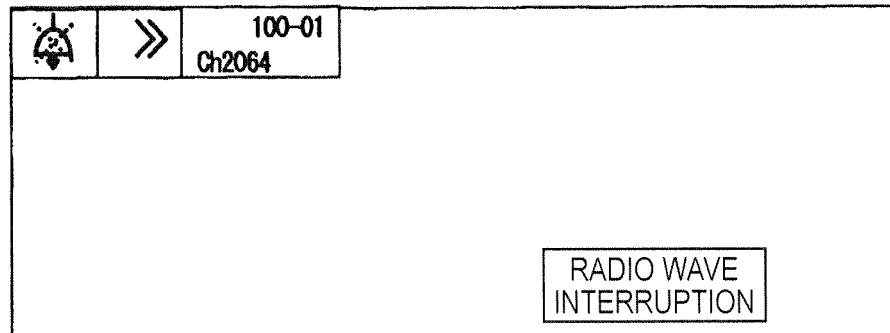


FIG. 9


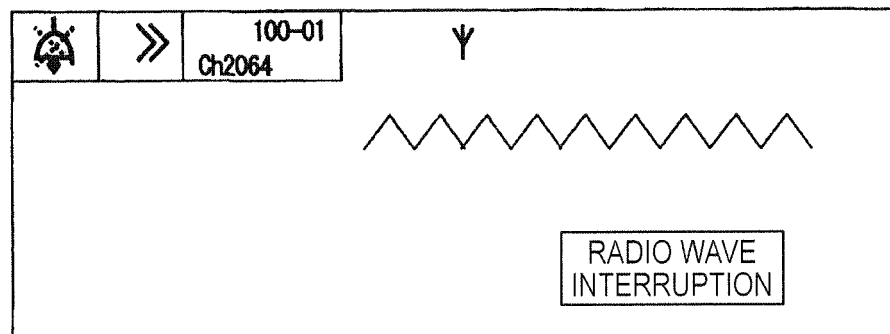


FIG. 10

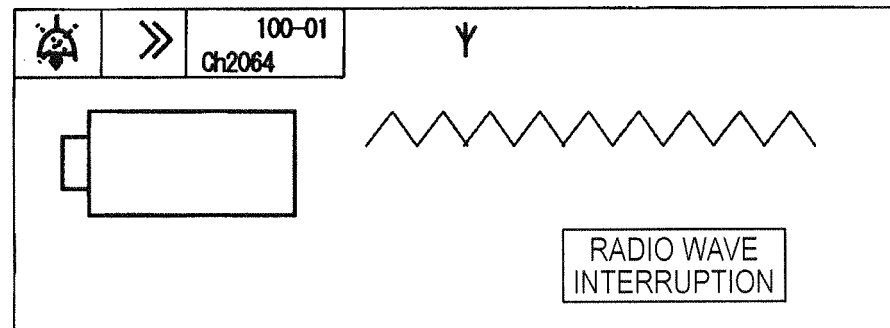

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 5192304 A [0002] [0003] [0006]
- JP 2001188497 A [0004] [0006]
- GB 2425180 A [0005]

专利名称(译)	终端设备和遥测系统		
公开(公告)号	EP2921101B1	公开(公告)日	2019-07-31
申请号	EP2015158954	申请日	2015-03-13
[标]申请(专利权)人(译)	日本光电工业株式会社		
申请(专利权)人(译)	日本光电公司		
当前申请(专利权)人(译)	日本光电公司		
[标]发明人	OMORI KIYOHIRO OKANO TAKAYOSHI MURATA SHIRO		
发明人	OMORI, KIYOHIRO OKANO, TAKAYOSHI MURATA, SHIRO		
IPC分类号	A61B5/00		
优先权	2014058551 2014-03-20 JP 2014071640 2014-03-31 JP		
其他公开文献	EP2921101A1		
外部链接	Espacenet		

摘要(译)

发送器将生物信息和电池状态信息发送到生物信息显示装置的终端装置，包括检测电池的关闭状态的关闭检测单元，以及当关闭检测单元检测到电池时的传输控制单元关闭状态，使发送器发送指示关闭的电池状态信息。

FIG. 1

