

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 December 2004 (09.12.2004)

PCT

(10) International Publication Number
WO 2004/105596 A1

(51) International Patent Classification⁷: **A61B 5/00**

(21) International Application Number:
PCT/IL2004/000463

(22) International Filing Date: 1 June 2004 (01.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0312263.8 3 June 2003 (03.06.2003) GB
10/452,932 3 June 2003 (03.06.2003) US

(71) Applicant (for all designated States except US): **ORSENSE LTD.** [IL/IL]; 2 Prof. Bergman Street, 76705 Rehovot (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FINE, Ilya** [IL/IL];

59/6 Herzl Street, 76540 Rehovot (IL). **FINAROV, Alexander** [IL/IL]; 1/10 Kovshey Ha-Hermon, 76555 Rehovot (IL).


(74) Agent: **REINHOLD COHN AND PARTNERS**; P.O. BOX 4060, 61040 TEL AVIV (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR USE IN NON-INVASIVE OPTICAL MEASUREMENTS OF BLOOD PARAMETERS

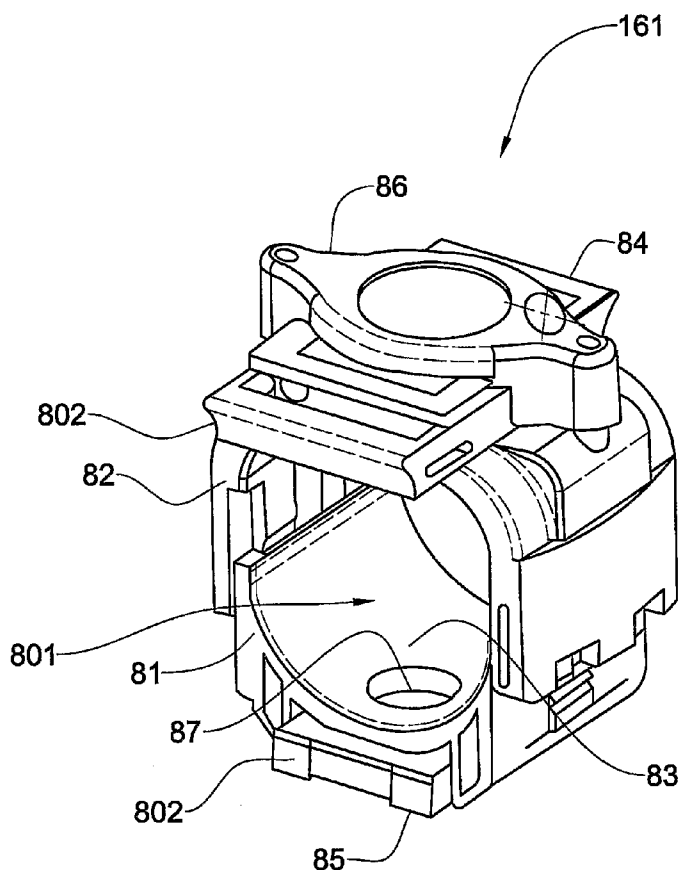

(57) Abstract: A method and device are presented for use in non-invasive optical measurements of at least one desired characteristic of patient's blood. A condition of artificial blood kinetics is created at a measurement location in a patient's blood perfused fleshy medium and maintained for a certain time period. This condition is altered over a predetermined time interval within said certain time period so as to modulate scattering properties of blood. Optical measurements are applied to the measurement location by illuminating it with incident light beams of at least two different wavelengths in a range where the scattering properties of blood are sensitive to light radiation, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium for said at least two different wavelengths, respectively, over at least a part of said predetermined time interval.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD AND SYSTEM FOR USE IN NON-INVASIVE OPTICAL MEASUREMENTS OF BLOOD PARAMETERS

FIELD OF THE INVENTION

This invention is generally in the field of non-invasive optical measurement techniques for measuring blood-related parameters, and relates to an optical probe to be applied to a patient's finger or toe and a method of operating the probe.

5 BACKGROUND OF THE INVENTION

Non-invasive techniques for measuring various blood parameters, e.g. blood oxygen saturation, have become very popular, since they do not require the withdrawal of a blood sample from a patient's body. Optical monitoring techniques of the kind specified utilize the detection of light transmitted or reflected from the
10 location on the patient's body under measurement, and are based on spectrophotometric measurements enabling the indication of the presence of various blood constituents based on known spectral behaviors of these constituents.

Most of these techniques utilize a measurement optical device or probe, designed in a manner to be attached to the patient's finger, which includes an
15 optical assembly for irradiating the finger with light and detecting its light response. The conventional devices of the kind specified, such as a pulse oximeter, which is the generally accepted standard of everyday clinical practice, provide for measuring enhanced optical pulsatile signals caused by the changes in the volume of a blood flowing through a fleshy medium (e.g., finger).

- 2 -

It is known that for blood parameters other than oxygen saturation, e.g., glucose concentration, significant difficulties have been encountered, because their absorption spectral behavior in red and near infrared regions is not as remarkable as for the oxygenized hemoglobin. Hence, the main limitations on the way of
5 expanding the non-invasive techniques to the measurements different from pulse oximetry are associated with the limited selectivity of the absorption based method.

A different technique is disclosed in U.S. Patent No. 6,400,972, WO 01/45553 and WO 01/96872, all assigned to the assignee of the present application.

This is an occlusion-based technique, according to which an over-systolic pressure
10 is applied to the blood perfused fleshy medium with a normal blood flow so as to create a state of temporary blood flow cessation at the measurement location. The measurement with different wavelengths of incident radiation and/or different polarization states of detected light are carried out at timely separated sessions taken during a time period including a cessation time when the state of the blood
15 flow cessation is maintained. This technique utilizes the condition of the "artificial blood kinetics" rather than the natural blood kinetics taking place when the state of the total blood cessation is not achieved. As a result of the cessation of the blood flow, a condition of the artificial kinetics is achieved with the optical characteristics of the blood associated with the light response being different from those at the
20 natural blood kinetics. Indeed, it is known that the scattering properties of blood depend on the size and shape of scatterers (aggregates). Thus, time changes of the light response at the condition of artificial kinetics depend on the changes in the shape and average size of the scattering centers in the medium, i.e., red blood cells (RBC) aggregation (Rouleaux effect). It was found that owing to the effect of the
25 artificial kinetics, the optical characteristics of blood changes dramatically, such that they differ from those of the fleshy medium with a normal blood flow by about 25 to 45%, and sometimes even by 60 %. Hence, the accuracy (i.e., signal-to-noise ratio) of the technique based on the artificial kinetics as well as selectivity of the optical measurements can be substantially better when compared with those based
30 on measurements of the blood parameters at natural kinetics.

- 3 -

Various probe devices suitable for the occlusion-based measurements are described in US 6,213,952 and US 2002/0173709 both assigned to the assignee of the present application. These devices are designed to apply over-systolic pressure to the patient's finger at a location upstream of a measurement location in the
5 finger, with respect to the direction of normal blood flow, thereby creating a state of blood flow cessation at the measurement location. Generally, the device includes a clip member for securing the patient's finger between its two clamping arms that also serve for carrying the optics of a measurement unit, and includes a pressurizing assembly outside the clip member for applying over-systolic pressure.

10 SUMMARY OF THE INVENTION

There is a need in the art to facilitate non-invasive measurements of blood-related characteristics by providing novel method, probe device and system for non-invasive, occlusion-based measurements applied to a patient's blood perfused fleshy medium, e.g., finger or toe.

15 The technique of the present invention takes advantage of the above-described occlusion-based measurements, namely is based on creating and controlling the artificial blood kinetics in a patient's blood perfused fleshy medium and applying optical measurements thereto. The condition of artificial kinetics is created and maintained for a certain time period, and is controllably altered over a
20 predetermined time interval within said certain time period. The condition of artificial kinetics is created by applying a primary over-systolic pressure to a certain location at the medium with a normal blood flow so as to achieve a state of temporary blood flow cessation at the medium at a measurement location. The location of application of the primary pressure is either upstream of the
25 measurement location with respect to the normal blood flow direction in the medium or in the vicinity of the measurement location. The control of the condition of the artificial kinetics is achieved by applying a perturbation of a secondary pressure to the fleshy medium, either downstream of the location of the primary pressure application or substantially at the same location. The physical effect of the

– 4 –

secondary pressure results in the modification of the aggregates of red blood cells (RBC). Therefore, the location of the applying of the secondary pressure has to be in the vicinity of the measurement location.

The non-invasive optical measurements are carried out by illuminating a measurement location on the medium with incident light beams of at least two different wavelengths in a range where the scattering or absorbing properties of blood are sensitive to light radiation (e.g., in red through near infrared (NIR) range). The optical determination of blood characteristics is carried out over a predetermined time interval when the condition of artificial blood kinetics is controllably altered. This predetermined time interval is within the time period during which the over-systolic pressure is applied.

Thus, according to one broad aspect of the invention, there is provided a method for use in non-invasive optical measurements of at least one desired characteristic of patient's blood, the method comprising:

- 15 (a) creating a condition of artificial blood kinetics at a measurement location in a patient's blood perfused fleshy medium and maintaining this condition for a certain time period;
- (b) altering said condition of artificial blood kinetics at the measurement location over a predetermined time interval within said certain time period so as to modulate scattering properties of blood; and
- 20 (c) applying optical measurements to the measurement location by illuminating it with incident light beams of at least two different wavelengths in a range where the scattering properties of blood are sensitive to light radiation, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium for said at least two different wavelengths, respectively, over at least a part of said predetermined time interval.

25 According to another broad aspect of the invention there is provided a method of controlling the operation of an optical measurement system including an

- 5 -

optical measuring unit, a pressurizing means and a control unit and aimed at non-invasive determination of patient's blood characteristics, the method comprising:

- operating the pressurizing means to apply primary over-systolic pressure to a location on a patient's blood perfused fleshy medium and thereby create a condition of artificial blood kinetics at a measurement location in the medium and maintain this condition for a certain time period;
- operating the pressurizing means to apply controllably varying secondary pressure to the medium so as to alter said condition of artificial blood kinetics at the measurement location over a predetermined time interval within said certain time period and thus modulate scattering properties of blood; and
- operating the optical measuring unit to applying optical measurements to the measurement location by illuminating it with incident light beams of at least two different wavelengths in a range where the scattering properties of blood are sensitive to light radiation, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium for said at least two different wavelengths, respectively, over at least a part of said predetermined time interval.

According to yet another broad aspect of the present invention, there is provided an optical system for use in non-invasive optical determination of at least one desired characteristic of patient's blood, the system comprising:

- (A) a probe including: (i) an optical measuring unit operable for illuminating a measurement location on a patient's blood perfused flesh medium with different wavelengths of incident light, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium corresponding to the different wavelengths of incident light, respectively; and (ii) a pressurizing assembly operable for applying pressure to the patient's fleshy medium;
- (B) a control unit connectable to said measuring unit and said pressurizing assembly and comprising: (a) a memory for storing reference data sensitive

– 6 –

to patient individuality and indicative of the desired blood characteristic as a function of a parameter derived from scattering spectral features of the medium, and (b) a data acquisition and processing utility coupled to output of the measuring unit for receiving and analyzing the measured data to
5 utilize the reference data and determine said at least one desired blood characteristic, the control unit operating the pressurizing assembly so as to apply a primary over-systolic pressure to a certain location on the medium to create a condition of artificial blood kinetics in the medium at the measurement location and maintain this condition for a certain time period,
10 to apply a secondary controllably varying pressure to the fleshy medium in the vicinity of the measurement location so as to alter said condition of artificial blood kinetics over a predetermined time interval within said certain time period thereby modulating scattering properties of blood, and operating the optical measuring unit to apply the optical measurements
15 while altering the condition of the artificial blood kinetics.

According to one embodiment of the invention, the altering of the condition of the artificial blood kinetics is performed by applying a perturbation to the medium by a secondary pressure pulse of a predetermined value over the predetermined time interval so as to modulate scattering properties of blood.

20 According to one example, the secondary pressure can be applied to the medium (e.g., patient's finger) at the location of the main occlusion providing the over-systolic pressure. In this case, the secondary pressure is varied starting from said primary over-systolic pressure value and reaching higher values.

According to another example, the secondary pressure can be applied to the
25 medium at a certain location selected downstream of the main occlusion with respect to the blood flow direction. In this case, the secondary pressure may vary from zero to over-systolic pressure values that may be higher than the primary over-systolic pressure. The location of the applying of the secondary pressure may either coincide with the location of a light detector or slightly differ from it, depending on
30 the kind of measured medium and/or design of the measurement probe.

- 7 -

It should be appreciated that a modification of RBC clusters resulting in the altering of the artificial kinetics can be caused by many different ways. Thus, other than the single secondary pulse described above, the altering of the condition of artificial blood kinetics can be carried out by applying a perturbation to the medium
5 by means of the secondary pressure of a predetermined cyclic pattern over the predetermined time interval.

According to the invention, the detection of the light responses of the medium for the purpose of determining the desired blood characteristics is carried out during the altering of the condition of the artificial blood kinetics. For example,
10 for the case when one secondary pulse was applied to the medium, the measured data indicative of time evolutions of the light responses of the medium for at least two different wavelengths over the time interval that starts when step pulse of the secondary pressure has been applied and onward can be used for the determining of the blood characteristics. Likewise, for the case when a series of pulses have been
15 applied to the medium, the measured data of the light responses over at least one time interval selected from the intervals when the secondary pressure pulse was applied can be used for the determining of the blood characteristics. Moreover, the measured data over at least one interval selected from the intervals after the release of the secondary pressure can also be utilized for the determining of the blood
20 characteristics.

According to the invention, a parameter derived from scattering spectral features of the medium during the altering of the condition of the artificial blood kinetics is used for the determination of blood characteristics. According to one example, this parameter is a parametric slope (PS) defined as a ratio between a first
25 function depending on a light response of the medium corresponding to one wavelength and a second function depending on the light response of the medium corresponding to another wavelength.

According to one embodiment, the first and second functions can be logarithmic functions $\log(T_1)$ and $\log(T_2)$ of the light responses T_1 and T_2
30 corresponding to the two different wavelengths λ_1 and λ_2 , respectively. According

- 8 -

to another embodiment, the first and second functions can be functions of the time rate of the changes of the light response signal, i.e., $\Delta T/\Delta t$ (or $\Delta \log T/\Delta t$), where Δt can be any part of the time interval during which the condition of artificial kinetics is changed.

5 According to the invention, for determination of a desired blood characteristic a reference data sensitive to patient individuality should be provided. The reference data should be indicative of the desired blood characteristic as a function of the parameter derived from scattering spectral features of the medium. Such reference data can, for example, be a calibration curve defining a dependence
10 of the PS on the desired blood characteristic. The calibration curve can be created by plotting a dependence of the PS versus the desired blood characteristic that can be obtained for the particular individual by any other known method, independent of the current measurements. It should be appreciated that for different blood characteristics the independent methods may also be different.

15 The measuring system of the present invention comprises such main constructional parts as a probe and a control unit.

 According to one embodiment, the probe includes a pressurizing assembly and a measuring unit. The pressurizing assembly includes a primary occlusion cuff for applying the primary over-systolic pressure to the medium, a secondary
20 occlusion cuff for applying the secondary pressure to the medium and a pressure driver actuated by the control unit for operating the squeezing of the cuffs and. According to this embodiment, the location secondary occlusion cuff is selected downstream of the location primary occlusion cuff with respect to the normal blood flow direction. The measuring unit comprises an illumination assembly and a light
25 collection/detection assembly. The illumination assembly includes a plurality of light sources (e.g., LEDs) associated with a suitable drive mechanism operated by the control unit. Alternatively, a single broad band illuminator can be used. The light sources generate incident radiation propagating through the medium at a measurement location. The light collection/detection assembly includes one or
30 more frequency selective detectors arranged near the measurement location.

- 9 -

Examples of collection/detection assembly include, but are not limited to, spectrophotometers and/or photodiodes typically equipped with frequency selective filters and amplifying means, which are not specifically shown. It should be noted that the measurement location may, for example, be accommodated so as to coincide with the location of applying the secondary pressure or slightly differ from it, depending on the kind of measured medium and/or design of the measurement probe.

The optical measurements are carried out to detect the light transmitted through the medium (or the light reflected therefrom, as the case may be), and to generate data representative thereof (constituting measured data). In the present example, the light transmitted through the medium is detected (constituting the light response of the medium).

According to another embodiment of the invention, the probe has a substantially ring-like shape that is formed by two substantially U-shape parts configured for enclosing and holding a portion of the medium therebetween. These U-shape parts can partially overlap over a predetermined distance. The pressure applied to the finger should be sufficient to cause total cessation of the blood flow in the finger downstream of the occlusion (i.e., the place where the pressure is applied). The pressurizing assembly may include an air cushion mounted on an inner side of at least one of the U-shaped portions and connected to a driver operable by the control unit to apply a controllable variable pressure to the portion of the medium enclosed between the two U-shaped parts. Alternatively, the pressurizing assembly may include a cuff associated with a pressure drive operable to move either one of the semi-rings towards one another, and thereby apply pressure to the finger portion enclosed therebetween. An example of the pressure drive includes, but is not limited to a wind-up spring coupled with the cuff. Squeezing of the cuff can provide a movement of the semi-rings to each other, and thereby provide continuous variation of the pressure applied to the finger. With the ring-like configuration of the probe, the primary over-systolic pressure as well as the secondary pressure is applied by the same pressurizing assembly. Therefore, the

– 10 –

location of the main occlusion (primary pressure) causing the creation of the condition of artificial kinetics (a blood flow cessation state) coincides with the location at which the artificial blood kinetics is altered (application of secondary pressure).

5 The probe of this embodiment further comprises the measuring unit configured for illuminating a measurement location on the portion of the finger with incident light beams, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the blood. For this purpose, the measuring unit includes an illumination assembly and a light
10 collection/detection assembly. The illumination assembly can include a plurality of light sources (e.g., LEDs) with a suitable drive mechanism operated by the control unit. Alternatively, a single broad band illuminator can be used. The light sources radiate the measurement location of the finger through an aperture arranged in one of the semi-ring to provide unobstructed optical transmission to the surface of the
15 fleshed medium. The light collection/detection assembly includes a detector that can receive the light radiation transmitted through the medium. Alternatively, the detector unit may include an array (generally, at least two) light detectors arranged in a spaced-apart relationship along the circumference of the finger within the measurement location.

20 The collection/detection assembly of the probe is coupled to the control unit via a suitable electronic block, typically including an analog to digital (A/D) converter (not shown). The control unit is interconnected between the measuring unit and the pressurizing assembly of the probe for operating the corresponding pressure and light sources drivers, and is coupled to the output of the detection
25 assembly to be responsive to the measured data. The control unit includes a data acquisition and processing utility having a computer device having such known utilities as a processor, a memory for storing, *inter alia*, reference data (RD) and a monitor. The processor is preprogrammed by a suitable software model capable of analyzing the received output of the detection assembly (measured data) and

– 11 –

determining one or more desired characteristics of the patient's blood, as have been described above.

Thus, according to yet another aspect of the invention, there is provided a probe for use in non-invasive optical measurements of blood-related parameters,
5 the probe including:

- (A) two substantially U-shaped portions configured for enclosing and holding a portion of a patient's blood perfused flesh medium therebetween,
- (B) a measuring unit operable for illuminating a measurement location on the portion of the medium with different wavelengths of incident light beams,
10 detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium corresponding to the different wavelengths of incident light, respectively; and
- (C) a pressurizing assembly associated with one of the U-shaped portions and
15 operable for applying a primary over-systolic pressure to the fleshy medium so as to create a condition of artificial blood kinetics in the fleshy medium and maintain this condition for a certain time period; and for applying a secondary controllably varying over-systolic pressure to the fleshy medium, so as to alter said condition of artificial blood kinetics over a predetermined
20 time interval within said certain time period, thereby to modulate scattering properties of blood.

There has thus been outlined, rather broadly, the more important features of the invention in order that the detailed description thereof that follows hereinafter may be better understood. Additional details and advantages of the invention will
25 be set forth in the detailed description, and in part will be appreciated from the description, or may be learned by practice of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, a preferred embodiment will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

5 **Fig. 1** illustrates a typical plot representing light transmission characteristics of blood obtained by when the condition of artificial kinetics is created;

Fig. 2 illustrates a plot showing three examples of the time dependency of light transmission characteristics of blood experimentally obtained for three different wavelengths when the condition of artificial kinetics is altered by a
10 perturbation of a secondary pressure step pulse applied to the medium;

Fig. 3 illustrates a plot showing three examples of the time dependency of light transmission characteristics of blood experimentally obtained for two different wavelength when the condition of artificial kinetics is altered by a perturbation of the medium by a series of shot pressure pulses;

15 **Fig. 4** illustrates a relationship between the natural logarithm of the light response of the medium at one wavelength λ_1 and natural logarithm of the light response at the other wavelength;

Fig. 5 illustrates an example of a calibration curve for a certain patient;

Fig. 6 illustrates a schematic block diagram of a measuring system for
20 carrying out the method of the present invention, according to one embodiment of the invention;

Fig. 7 illustrates a schematic block diagram of the probe schematically shown in Fig. 6, according to one embodiment of the invention; and

Figs. 8 illustrate a perspective view of the probe schematically shown in Fig.
25 6, according to another embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

The principles and operation of the system and method for non-invasive optical measurement of blood parameters according to the present invention may be better understood with reference to the drawings and the accompanying description,

– 13 –

it being understood that these drawings and examples in the description are given for illustrative purposes only and are not meant to be limiting. The same reference Roman numerals and alphabetic characters will be utilized for identifying those components which are common in the system for non-invasive optical measurement of blood parameters shown in the drawings throughout the present description of the invention.

According to one general aspect, the present invention provides a novel method and system for non-invasive optical determination of blood characteristics. Examples of the blood characteristics include, but are not limited to concentration of a substance in patient's blood (e.g., glucose, hemoglobin), oxygen saturation, Erythrocyte Sedimentation Rate (ESR) and Erythrocyte Aggregation Rate (EAR). The method is based on creating and controlling the artificial blood kinetics in a patient's blood perfused fleshy medium, e.g., his finger, and applying optical measurements thereto. The condition of artificial kinetics is created and maintained for a certain time period. The condition of artificial kinetics is preferably created by applying a primary over-systolic pressure to a certain location at the medium with a normal blood flow so as to achieve a state of temporary blood flow cessation. The control of the condition of the artificial kinetics is achieved by applying a perturbation of a secondary pressure to the fleshy medium, as will be described in detail hereinbelow.

The non-invasive optical measurements are carried out by illuminating a measurement location on the medium with incident light beams of at least two different wavelengths in a range where the scattering or absorbing properties of blood are sensitive to light radiation (e.g., in red through near infrared (NIR) range).

Referring now to the drawings, **Fig. 1** illustrates an example showing a typical plot representing light transmission characteristic (light responses) of blood obtained over the time interval when the condition of artificial kinetics is created, maintained during a certain cessation time, and then released. In particular, the plot shows how the light-transmitting characteristic of blood changes under the

– 14 –

application and release of the primary over-systolic pressure. The transmitting characteristics are shown in Fig. 1 (and in the further drawings) as the so-called “Relative Transmission”, i.e., in Transmission Arbitrary Units or T(A.U.).

The application of primary pressure to the fleshy medium starts at a moment T_{start} and is maintained for a period of time such as not to cause irreversible changes in the medium (e.g., 4 seconds). The pressure is released at the moment T_{release} . Measurements of the Relative Transmission are performed continuously, starting prior to the application of the over-systolic pressure. Different regions of light responses of the medium, designated A, B, C, D and E, corresponding to the different states of the blood flow are observed. Region A corresponds to a state of normal blood flow before the over-systolic pressure is applied. As shown, this region is characterized by a standard fluctuating value of the relative light transmission of blood. Region B starts at moment T_{start} (when the pressure is initially applied) and maintains over a short period of time T_B (about 0.5sec) following the actual start of the condition of artificial blood kinetics. Measurements taken over this time period are not steady and can be disregarded, due to the unavoidable influence of motional and/or other artifacts causing non-monotonic fluctuations of the light transmission. Region C corresponds to a state of the temporary cessation of blood flow, which lasts within a cessation time T_C between a moment determined as $(T_{\text{start}} + T_B)$ and the moment T_{release} . During this cessation time T_C the ascending curve (as shown in Fig. 1) or descending curve (not shown), depending on the incident wavelength of relative light transmission of blood, can be observed. It should be noted that this is the region where the condition of artificial kinetics is maintained over T_C . Generally, the light transmission curve can reach an asymptotic maximum over one second to several minutes. Region D corresponds to a transitional state of blood flow, which takes place after releasing the over-systolic pressure. This state starts with a slight delay T_d (approximately 0.5sec), i.e., at the moment determined as $(T_{\text{release}} + T_d)$. During the time period T_D of the duration of region D, the relative transmission of blood monotonously descends until it reaches values characteristic of the normal blood flow. Such a

– 15 –

moment is marked as T_{end} in the drawing. Usually, the end of region **D**, and the beginning of region **E**, is detected when the changes of the light transmission become periodic and minimal (about 2%). Region **E** corresponds to a state of the normal blood flow, which is similar to that in region **A**. This technique is disclosed
5 in the above-indicated patent publications, assigned to the assignee of the present application.

According to the present invention, the optical determination of blood characteristics is carried out over a predetermined time interval when the condition of artificial blood kinetics is controllably altered. This predetermined time interval
10 is within the time period during which the primary over-systolic pressure is maintained.

According to one embodiment of the invention, the altering of the condition of the artificial blood kinetics is performed by applying a perturbation to the medium by a secondary pressure pulse of a predetermined value over the
15 predetermined time interval so as to modulate scattering properties of blood. According to one example, the secondary pressure can be applied to the medium (e.g., patient's finger) at the location of the main occlusion providing the over-systolic pressure. According to another example, the secondary pressure can be applied to the medium at a certain location selected downstream of the main
20 occlusion with respect to the blood flow direction. It should be noted that the location of the applying of the secondary pressure may either coincide with the location of a light detector or slightly differ from it, depending on the kind of measured medium and/or design of the measurement probe. The physical effect of the secondary pressure results, *inter alia*, in the modification of the aggregates of
25 red blood cells (RBC). Therefore, the location of the applying of the secondary pressure has to be in the vicinity of the measurement place.

Fig. 2 illustrates a plot showing three examples (curves **21**, **22** and **23**) of the time dependency of light transmission characteristics of blood experimentally obtained for three different wavelengths (namely, $\lambda_1=610\text{nm}$, $\lambda_2=670\text{nm}$ and

– 16 –

$\lambda_3=810\text{nm}$) when the condition of artificial kinetics is altered by a perturbation of a secondary pressure step pulse applied to the medium.

The application of the primary over-systolic pressure (for example, higher than 180 mmHg) to the fleshy medium starts at a certain time moment ($t_{start}=0\text{sec}$ as shown in Fig. 2), and is maintained as long as desired (16sec in Fig 2). Preferably, the duration of the applying of the primary pressure is stipulated by the condition to bring about the artificial blood kinetics without causing irreversible changes in the medium. Then, the step pulse of the secondary pressure (about 300 mmHg) is applied at the time moment of $t_{sec} \approx 4\text{sec}$ that is reflected by a bend of the curves **21**, **22** and **23** at the time kick point t_{sec} .

It should be noted that the predetermined value of the secondary pressure pulse can, for example, be in the range of about 0-300 mmHg. It was found by the inventors that one can obtain some more useful information about the patient's blood characteristics by means of manipulating the magnitude of the secondary pressure pulse. In particular, in the case when the magnitude of the secondary pressure pulse is small and does not exceed a certain relatively small value P_1 , all three main components of the blood (venous, capillary and arterial blood components) can provide contribution in the measurements. However, in the case when the magnitude of the secondary pressure would exceed the value of P_1 the venous blood component can be excluded from the consideration. Likewise, in order to exclude from the consideration also the capillary blood component the secondary pressure should exceed the value of P_2 (where $P_2 > P_1$). In other words, when the magnitude of the secondary pressure is over P_2 venous and capillary blood becomes forced out of the measurement location, while arterial blood remains at the measurement location, and measurements in this case would be applied to arterial blood only. It should be understood that the values of P_1 and P_2 depend on the person's physiology, and should be selected individually for each patient. It should be appreciated that a modification of RBC clusters resulting in the altering of the artificial kinetics can be caused by many different ways. Thus, other than the single secondary pulse described above, the altering of the condition of artificial

– 17 –

blood kinetics can be carried out by applying a perturbation to the medium by means of the secondary pressure of a predetermined cyclic pattern over the predetermined time interval. The cyclic pattern can be a series of shot pressure pulses having amplitudes in the range of about 0-300 mmHg.

5 **Fig. 3** illustrates a plot showing three examples (curves **31** and **32**) of the time dependency of light transmission characteristics of blood experimentally obtained for three different wavelengths (namely, $\lambda_1=670\text{nm}$ and $\lambda_2=810\text{nm}$) when the condition of artificial kinetics is altered by a perturbation of the medium by a series of shot secondary pressure pulses. In the example shown in **Fig.3**, the
10 duration of the secondary pressure pulses is 1.5s while the amplitude is in the range of about 220–300mm Hg. It should be appreciated that in practice the magnitudes of the pulse duration and amplitude depend on the particular patient and configuration of the measurement system.

Different regions of light responses of the medium, designated **N**, **P**, **SA1**,
15 **SR1**, **SA2**, **SR2**, etc. corresponding to the different states of the blood flow, are observed. Region **N** is analogous to region **A** in Fig. 1, and corresponds to a state of normal blood flow before the over-systolic pressure is applied. As shown, this region is characterized by a standard fluctuating value of the relative light transmission of blood. Region **P** starts at the time moment when the primary over-
20 systolic pressure is applied to the medium ($t_{start}=8\text{sec}$ in Fig. 3) and continues until the perturbation of the medium by a first secondary pressure pulse ($t_{sa1}=10.5\text{sec}$ in Fig. 3). The first secondary pressure pulse is applied over 8.5 sec (region **SA1**) and released at the time moment $t_{sr1}=19\text{sec}$ that is reflected by a decrease of the light transmission curve over 7sec (region **SR1**). Thereafter, a second secondary pressure
25 pulse ($t_{sa2}=26\text{sec}$ in Fig. 3) is applied over 9 sec (region **SA2**), which is released at the time moment $t_{sr2}=35\text{sec}$ (region **SR2**). It should be noted that application of the secondary pressure pulses can continue as long as desired over the time period when the over-systolic pressure is applied.

According to the invention, the detection of the light responses of the
30 medium for the purpose of determining the desired blood characteristics is carried

– 18 –

out during the altering of the condition of the artificial blood kinetics. For example, for the above case corresponding to **Fig. 2**, the measured data indicative of time evolutions of the light responses of the medium for at least two different wavelengths over the time interval that starts when step pulse of the secondary pressure has been applied and onward can be used for the determining of the blood characteristics. Likewise, for the case corresponding to Fig. 3, the measured data of the light responses over at least one time interval selected from the intervals when the secondary pressure pulse was applied (i.e., any interval selected from intervals **SA1**, **SA2**, etc.) can be used for the determining of the blood characteristics.

Moreover, the measured data over at least one interval selected from the intervals after the release of the secondary pressure (i.e., any interval selected from intervals **SR1**, **SR2**, etc.) can also be utilized for the determining of the blood characteristics.

According to the invention, a parameter derived from scattering spectral features of the medium during the altering of the condition of the artificial blood kinetics is used for the determination of blood characteristics. According to one example, this parameter is a parametric slope (PS) defined as a ratio between a first function depending on a light response of the medium corresponding to one wavelength and a second function depending on the light response of the medium corresponding to another wavelength.

According to one embodiment, the first and second functions can be logarithmic functions $\log(T_1)$ and $\log(T_2)$ of the light responses T_1 and T_2 corresponding to the two different wavelengths λ_1 and λ_2 , respectively. According to another embodiment, the first and second functions can be functions of the time rate of the changes of the light response signal, i.e., $\Delta T/\Delta t$ (or $\Delta \log T/\Delta t$), where Δt can be any part of the time interval during which the condition of artificial kinetics is changed.

Referring to **Fig. 4**, an exemplary plot showing a relationship between the natural logarithm of the light response $\ln(T_1)$ of the medium at the wavelength $\lambda_1=670\text{nm}$ and the natural logarithm of the light response $\ln(T_2)$ at the wavelength $\lambda_2=810\text{nm}$. The measurements were obtained when the condition of artificial

– 19 –

kinetics is altered by a perturbation of the medium by a first secondary pressure pulse, i.e. over interval **SA1** shown in Fig.3. As can be seen, the relationship between $\ln(T_1)$ and $\ln(T_2)$ is a linear function, and the parametric slope (PS) is determined as the value of tangent of the angle between the line **41** and the
 5 abscissa axis. It can be appreciated that for determination of the PS, for example, a known linear regression algorithm can be used. For the example shown in **Fig. 4**, PS=0.9.

According to the invention, for determination of a desired blood characteristic certain reference data sensitive to patient individuality should be
 10 provided. The reference data should be indicative of the desired blood characteristic as a function of the parameter derived from scattering spectral features of the medium. Such reference data can, for example, be a calibration curve defining a dependence of the PS on the desired blood characteristic. The calibration curve can be created by plotting a dependence of the PS versus the
 15 desired blood characteristic that can be obtained for the particular individual or various patients by any other known method, independent of the current measurements. It should be appreciated that for different blood characteristics the independent methods may also be different. For example, a calibration curve to be used for determining the oxygen saturation for a specific patient may, in general, be
 20 constructed by applying measurements to various patients, and/or by applying the two kinds of measurements for a single patient in a breath hold experiment using a multiple-occlusion mode.

Fig. 5 illustrates an example of the calibration curve for a certain patient. This calibration curve represents a dependence of the PS calculated for the patient
 25 from the measurements of light transmission signals of the measured medium at the wavelengths $\lambda_1=610\text{nm}$ and $\lambda_2=810\text{nm}$ versus glucose concentration. This calibration curve can be used for determining a resulting value of the glucose concentration when a value of the PS is obtained by using the described above method.

– 20 –

It should be appreciated that the corresponding calibration curve can be obtained also for other blood characteristics. Examples of the blood characteristics include, but are not limited to concentration of a substance in patient's blood (e.g., glucose, hemoglobin), oxygen saturation, Erythrocyte Sedimentation Rate (ESR) and Erythrocyte Aggregation Rate (EAR).

Referring to **Fig. 6**, a schematic block diagram of a measuring system **60** applied to a patient's finger **F** for carrying out the method of the present invention is illustrated. It should be noted that the blocks in **Fig. 6** are intended as functional entities only, such that the functional relationships between the entities are shown, rather than any physical connections and/or physical relationships. Although the application of the measuring system to the patient's finger **F** will be illustrated below, it should be understood that other parts of the patient's body, e.g., a toe, a wrist, an elbow and/or a knee, can also be used, *mutatis mutandis*, as a medium for the light transmission measurements. The system **60** comprises such main constructional parts as an optical probe **61** and a control unit **62**. The optical probe **61** includes illumination and light collection/detection assemblies and a pressurizing assembly, as will be described more specifically further below with reference to Figs. 7 and 8. The control unit **62** is connectable to the illumination assembly for operating light sources drivers, to the output of the light collection/detection assembly (via a suitable electronic block, typically including an analog to digital converter) to be responsive to measured data, and to the pressurizing assembly for controllably applying the corresponding pressure. The control unit **62** is a computer system having such utilities as a processor **621** (data acquisition and processing utility), a memory **622** for storing *inter alia* reference data (RD), and a monitor **623** for presenting the measurement results. The processor is preprogrammed by a suitable software model capable of analyzing the received output of the detection assembly (measured data) and determining one or more desired characteristics of the patient's blood, as have been described above.

Fig. 7 exemplifies one possible implementation of the probe **61**. The probe **61** includes a pressurizing assembly **701** and a measuring unit **702**. The

– 21 –

pressurizing assembly **701** includes a primary pressurizing arrangement (occlusion cuff) **72** operable for applying the primary over-systolic pressure to the patient's finger **F** at a location **L₁**, a secondary pressurizing arrangement (occlusion cuff) **71** operable for applying the secondary pressure to the patient's finger at a location **L₂** in the vicinity of a measurement location (where optical measurements are applied), and a pressure driver **73** actuated by the control unit (**62** in **Fig. 6**) for operating the squeezing of the cuffs **71** and **72**. The primary occlusion cuff **72** and the secondary occlusion cuff **71** may be of any known suitable type. It should be noted that the primary occlusion cuff **72** may, for example, be accommodated on the patient's wrist or palm, while the secondary occlusion cuff **71** and the measuring unit **702** may be located on the patient's finger. According to this embodiment, the measurement location **ML** and consequently the location **L₂** of the secondary pressure, is selected downstream of the main occlusion location (location **L₁**) with respect to the normal blood flow direction.

The measuring unit **702** comprises an illumination assembly **74** and a light collection/detection assembly **75** for detecting a light response of a measurement location **ML**. The position of the illumination and detection assemblies **74** and **75** can be exchanged, or they can be located on the same side of the finger for reflection-mode measurements. The illumination assembly **74** is designed for generating light of different wavelengths (at least two different wavelengths). For example, the illumination assembly may include a plurality of light sources (e.g., LEDs), which are not specifically shown, associated with a suitable drive mechanism **76** operated by the control unit (**62** in **Fig. 6**). Alternatively, a single broad band illuminator can be used. The light collection/detection assembly **75** includes one or more frequency selective detectors. Examples of collection/detection assembly **75** include, but are not limited to, spectrophotometers and/or photodiodes typically equipped with frequency selective filters and amplifying means, which are not specifically shown. It should be noted that the measurement location **ML** may, for example, be accommodated so as to coincide with the location of applying the secondary pressure or slightly differ from it,

– 22 –

depending on the kind of measured medium and/or design of the measurement probe.

The optical measurements are carried out to detect the light response of the medium (light transmitted through the medium or the light reflected therefrom, as the case may be), and to generate data representative thereof (constituting measured data). In the present example of Fig. 7, the light transmitted through the medium is detected.

Fig. 8 illustrates the implementation of a probe, denoted **161**, according to another embodiment of the invention, wherein the locations **L₁**, **L₂** and measurement location **ML** substantially coincide. According to this embodiment, the probe **161** has two portions **81** and **82** each of a substantially U-shaped cross-section arranged with respect to each other for enclosing and holding therebetween a portion of the patient's finger (not shown in Fig. 8). The U-shape parts **81** and **82** are made of a rigid or semi-rigid material, such as metal or plastic. In the cross-section, the U-shape parts **81** and **82** can, for example, be of semi-circle or semi-oval forms. The parts **81** and **82** can partially overlap over a predetermined distance. The probe **161** comprises a pressurizing assembly **801** that includes an air cushion **83** associated with a drive mechanism (not shown) and operable to apply pressure to the finger portion enclosed between the parts **81** and **82**. By moving the upper and lower parts **81** and **82** of the probe towards each other, a position of a finger therebetween is fixed. Then, a locking device **86** further fixes the parts **81** and **82** to thereby apply a certain preliminary pressure to start the measurement procedure. The locking device may be implemented by any suitable known means (e.g., including a teeth arrangement and a spring assembly) and is aimed at preventing the opening of the ring-like probe. Then, a cushion **83**, which in the present example is associated with the lower semi-ring **81**, is operated to press the finger to the upper semi-ring **82** to thereby apply an over-systolic pressure (e.g., 220-250mmHg) to thereby create a blood flow cessation in the finger and enable measurements. Then, a higher secondary pressure is supplied through the cushion **83**. Thus, according to this embodiment of the invention, the primary over-systolic

– 23 –

pressure as well as the secondary pressure is applied to the same location on the finger via the same pressurizing assembly (cushion **83**). Therefore, the location of the main occlusion providing the over-systolic pressure coincides with the location at which the artificial blood kinetics is altered.

5 The probe **161** further comprises a measuring unit **802** configured for illuminating a measurement location on the portion of the finger with incident light beams, detecting light responses of the medium (at different wavelengths of incident light), and generating measured data indicative of time evolutions of the light responses of the blood. As described above, incident light beams being of at
10 least two different wavelengths in a range where the scattering properties of blood are sensitive to the light radiation. The measuring unit **802** includes an illumination assembly **84** mounted on a holding frame **84** and a light collection/detection assembly **85**. Similar to the previously described example, the illumination assembly **84** can include a plurality of light sources (e.g., LEDs) associated with a
15 suitable drive mechanism (not shown) operated by the control unit (**62** in **Fig. 6**), or a single broad band illuminator. The light sources radiate the measurement location of the finger through an aperture (not seen in **Fig. 8**) arranged in the part **82** to provide unobstructed optical transmission to the surface of the finger.

 The light collection/detection assembly **85** includes a detector, which is not
20 specifically shown, that can receive the light radiation transmitted through the finger via an aperture **87**. In the example of **Fig. 8**, the measuring unit **802** operates in the transmission mode. Thus, the light collection/detection assembly **85** is mounted opposite to the illumination assembly **84**. Although in the examples of **Figs. 7** and **8** the transmission mode of measurements is illustrated, it should be
25 understood that the reflection mode of measurements can be used as well, for the purpose of which the light collection/detection assembly would be accommodated adjacent to the illuminator. Still alternatively, the detector unit may include an array of light detectors (generally, at least two such detectors) arranged in a spaced-apart relationship along the circumference of the finger.

– 24 –

It should be noted that the pneumatic mechanism of a pressurizing assembly may be replaced by any other suitable means. For example, a pressurizing assembly can include a squeezing cuff associated with a pressure drive (e.g., a wind-up spring) operable to move either one of the U-shape parts **81** and **82** towards one another, and thereby apply continuously variable pressure to the finger portion enclosed between the parts **81** and **82**. The pressure applied to the finger should be sufficient to cause total cessation of the blood flow in the finger. Preferably, the curvature of the inner walls of the parts **81** and **82** is correlated to the average curvature of the finger such that to provide a uniform pressure on the finger along its circumference.

Those skilled in the art to which the present invention pertains, can appreciate that while the present invention has been described in terms of preferred embodiments, the concept upon which this disclosure is based may readily be utilized as a basis for the designing of other structures, systems and processes for carrying out the several purposes of the present invention.

Also, it is to be understood that the phraseology and terminology employed herein are for the purpose of description and should not be regarded as limiting.

In the method claims that follow, alphabetic characters numerals used to designate claim steps are provided for convenience only and do not imply any particular order of performing the steps.

Finally, it should be noted that the word “comprising” as used throughout the appended claims is to be interpreted to mean “including but not limited to”.

It is important, therefore, that the scope of the invention is not construed as being limited by the illustrative embodiments set forth herein. Other variations are possible within the scope of the present invention as defined in the appended claims and their equivalents.

- 25 -

CLAIMS:

1. A method for use in non-invasive optical measurements of at least one desired characteristic of patient's blood, the method comprising:
 - (a) creating a condition of artificial blood kinetics at a measurement location in
5 a patient's blood perfused fleshy medium and maintaining this condition for a certain time period;
 - (b) altering said condition of artificial blood kinetics at the measurement location over a predetermined time interval within said certain time period so as to modulate scattering properties of blood; and
 - 10 (c) applying optical measurements to the measurement location by illuminating it with incident light beams of at least two different wavelengths in a range where the scattering properties of blood are sensitive to light radiation, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium for said at
15 least two different wavelengths, respectively, over at least a part of said predetermined time interval.
2. The method of Claim 1, comprising:
analyzing the measured data for determined a parameter derived from
scattering spectral features of the medium as a relation between the different
20 time evolutions of the light responses of the medium; and
utilizing the calculated parameter and predetermined reference data, sensitive to patient individuality and indicative of the desired blood characteristic as a function of the parameter derived from scattering spectral features of the medium, for determining a value of the desired blood
25 characteristic
3. The method of Claim 2 wherein said reference data is a calibration curve defining a dependence of the parameter on the desired blood characteristic.
4. The method of Claim 2 wherein said parameter is a parametric slope defined as a ratio between a first function depending on a light response of the

– 26 –

medium corresponding to one wavelength and a second function depending on the light response of the medium corresponding to another wavelength, said one wavelength and another wavelength being selected from said at least two different wavelengths.

5 5. The method of Claim 4 wherein said first and second functions are logarithmic functions of the light response corresponding to said at least two different wavelengths, respectively.

6. The method of Claim 4 wherein said first and second functions are a time rate of the changes of light response signal.

10 7. The method of any one of preceding Claims wherein said certain time period is insufficient for irreversible changes in the fleshy medium.

8. The method of any one of preceding Claims wherein said creating of the condition of artificial kinetics includes applying primary over-systolic pressure to a certain location at the medium upstream of the measurement location with respect
15 to a normal blood flow direction in the medium, so as to achieve a state of temporary blood flow cessation in the medium at the measurement location.

9. The method of any one of Claims 1 to 7 wherein said creating of the condition of artificial kinetics includes applying primary over-systolic pressure to the medium with a normal blood flow in the vicinity of the measurement location.

20 10. The method of any one of preceding claims wherein said altering of the condition of artificial blood kinetics includes applying a perturbation to the medium by at least one secondary pressure pulse of a predetermined value over said predetermined time interval.

11. The method of Claims 8 and 10 wherein the predetermined value of the
25 secondary pressure is in the range from zero to over-systolic pressure values higher than said primary over-systolic pressure value.

12. The method of Claims 9 and 10 wherein the predetermined value of the secondary pressure is in the range starting from said primary over-systolic pressure value.

- 27 -

13. The method of any one of Claims 1 to 9 wherein said altering of the condition of artificial blood kinetics includes applying perturbations to the medium by secondary pressure of a predetermined cyclic pattern over said predetermined time interval.

5 14. The method of Claims 8 and 13 wherein said predetermined cyclic pattern is in the form of secondary pressure pulses having amplitudes in the range from zero to over-systolic pressure values higher than said primary over-systolic pressure.

10 15. The method of Claims 9 and 13 wherein said predetermined cyclic pattern is in the form of secondary pressure pulses having amplitudes in the range starting from said primary over-systolic pressure value.

16. The method of any one of preceding Claims wherein said at least two different wavelengths are in the red-NIR range.

15 17. The method of any one of preceding Claims wherein said at least one desired characteristic of patient's blood is selected from the following: concentration of a substance in patient's blood, oxygen saturation, Erythrocyte Sedimentation Rate (ESR) and Erythrocyte Aggregation Rate (EAR).

18. The method of Claim 17 wherein said substance is selected from glucose and hemoglobin.

20 19. A method of controlling the operation of an optical measurement system including an optical measuring unit, a pressurizing means and a control unit and aimed at non-invasive determination of patient's blood characteristics, the method comprising:

- operating the pressurizing means to apply primary over-systolic pressure to a
25 location on a patient's blood perfused fleshy medium and thereby create a condition of artificial blood kinetics at a measurement location in the medium and maintain this condition for a certain time period;
- operating the pressurizing means to apply controllably varying secondary pressure to the medium so as to alter said condition of artificial blood
30 kinetics at the measurement location over a predetermined time interval

– 28 –

within said certain time period and thus modulate scattering properties of blood; and

- operating the optical measuring unit to applying optical measurements to the measurement location by illuminating it with incident light beams of at least two different wavelengths in a range where the scattering properties of blood are sensitive to light radiation, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium for said at least two different wavelengths, respectively, over at least a part of said predetermined time interval.

20. The method of Claim 19 wherein said primary over-systolic pressure is applied to the location of the medium upstream of the measurement location with respect to a normal blood flow direction in the medium, so as to achieve a state of temporary blood flow cessation in the medium at the measurement location.

21. The method of Claim 19 wherein said primary over-systolic pressure is applied to the location of the medium in the vicinity of the measurement location.

22. The method of any one of Claims 19 to 21 wherein said controllably varying secondary pressure includes at least one secondary pressure pulse of a predetermined value over said predetermined time interval.

23. The method of Claims 20 and 22 wherein the predetermined value of the secondary pressure is in the range from zero to over-systolic pressure values higher than said primary over-systolic pressure value.

24. The method of Claims 21 and 22 wherein the predetermined value of the secondary pressure is in the range starting from said primary over-systolic pressure value.

25. The method of any one of Claims 19 to 21 wherein said controllably varying secondary pressure includes a predetermined cyclic pattern over said predetermined time interval.

26. The method of Claims 20 and 25 wherein said predetermined cyclic pattern is in the form of secondary pressure pulses having amplitudes in the range from

– 29 –

zero to over-systolic pressure values higher than said primary over-systolic pressure.

27. The method of Claims 21 and 25 wherein said predetermined cyclic pattern is in the form of secondary pressure pulses having amplitudes in the range starting
5 from said primary over-systolic pressure value.

28. An optical system for use in non-invasive optical determination of at least one desired characteristic of patient's blood, the system comprising:

(A) a probe including: (i) an optical measuring unit operable for illuminating a measurement location on a patient's blood perfused flesh medium with
10 different wavelengths of incident light, detecting light responses of the medium, and generating measured data indicative of time evolutions of the light responses of the medium corresponding to the different wavelengths of incident light, respectively; and (ii) a pressurizing assembly operable for applying pressure to the patient's fleshy medium;

15 (B) a control unit connectable to said measuring unit and said pressurizing assembly and comprising: (a) a memory for storing reference data sensitive to patient individuality and indicative of the desired blood characteristic as a function of a parameter derived from scattering spectral features of the medium, and (b) a data acquisition and processing utility coupled to output
20 of the measuring unit for receiving and analyzing the measured data to utilize the reference data and determine said at least one desired blood characteristic, the control unit operating the pressurizing assembly so as to apply a primary over-systolic pressure to a certain location on the medium to create a condition of artificial blood kinetics in the medium at the
25 measurement location and maintain this condition for a certain time period, to apply a secondary controllably varying pressure to the fleshy medium in the vicinity of the measurement location so as to alter said condition of artificial blood kinetics over a predetermined time interval within said certain time period thereby modulating scattering properties of blood, and

– 30 –

operating the optical measuring unit to apply the optical measurements while altering the condition of the artificial blood kinetics.

29. The system of Claim 28 wherein said pressurizing assembly includes:

5 a primary occlusion cuff for applying said primary over-systolic pressure to the fleshy medium at a first location upstream of the measurement location with respect to the normal blood flow direction in the medium,

a secondary occlusion cuff for applying the secondary pressure to the flesh medium at a second location, said secondary pressure being controllably variable up to over-systolic pressure values, and

10 a pressure driver assembly actuated by the control unit for operating the primary and secondary occlusion cuffs.

30. The system of Claim 28 or 29 wherein said reference data is a calibration curve defining a dependence of the parameter on the desired blood characteristic.

31. The system of Claim 30 wherein said parameter is a parametric slope
15 defined as a ratio between a first function depending on a light response of the medium corresponding to one wavelength and a second function depending on the light response of the medium corresponding to another wavelength, said one wavelength and another wavelength are selected from said at least two different wavelengths.

20 **32.** The system of any one of Claims 28 to 31 wherein said probe includes two substantially U-shaped portions configured for enclosing and holding a portion of the patient's flesh medium therebetween.

33. The system of Claim 32 wherein dimensions of the U-shaped portions are such that one of them can enter into the other onto a predetermined distance.

25 **34.** The system of Claim 32 or 33, wherein the pressurizing assembly includes an air cushion mounted on an inner side of at least one of the U-shaped portions and connected to a driver operable by the control unit to apply a controllable variable pressure to the portion of the medium enclosed between the two U-shaped portions.

– 31 –

- 35.** The system of Claim 32 or 33 wherein the pressurizing assembly includes a cuff operable to move the U-shaped portions towards one another, and thereby apply the primary and secondary pressure to the portion of the medium enclosed therebetween.
- 5 **36.** The system of any one of Claims 28 to 35 wherein the measuring unit is operable in a transmission mode.
- 37.** The system of any one of Claims 28 to 35 wherein the measuring unit is operable in a reflection mode.

1/7

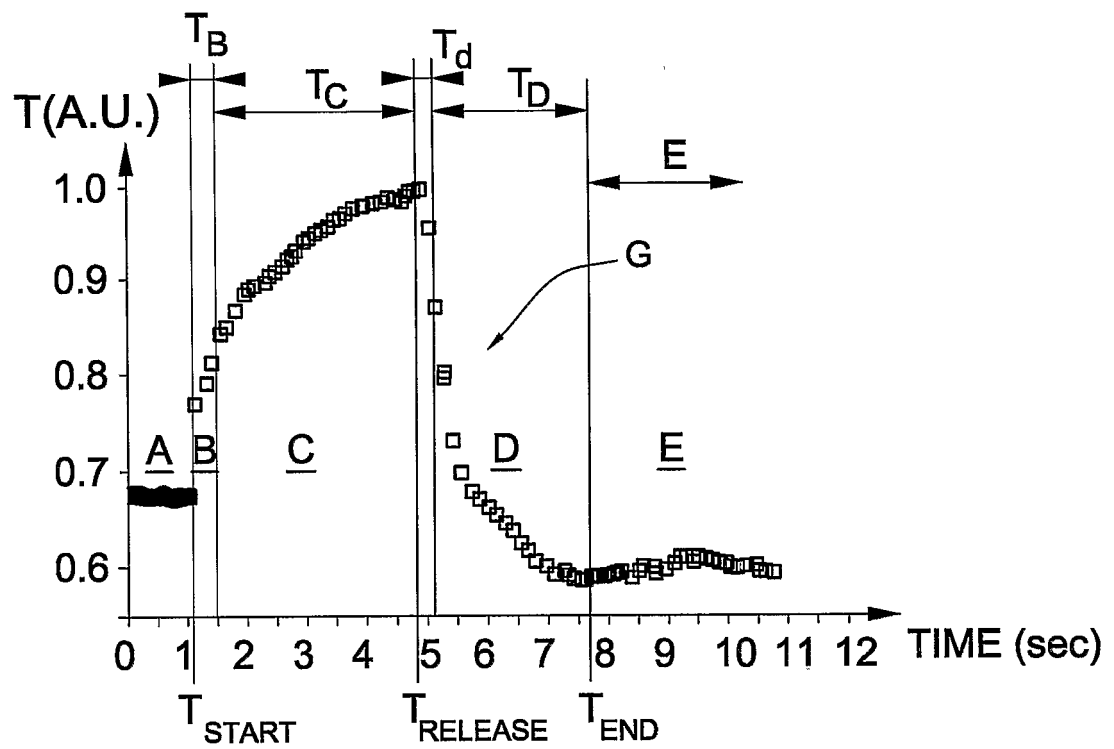


FIG. 1

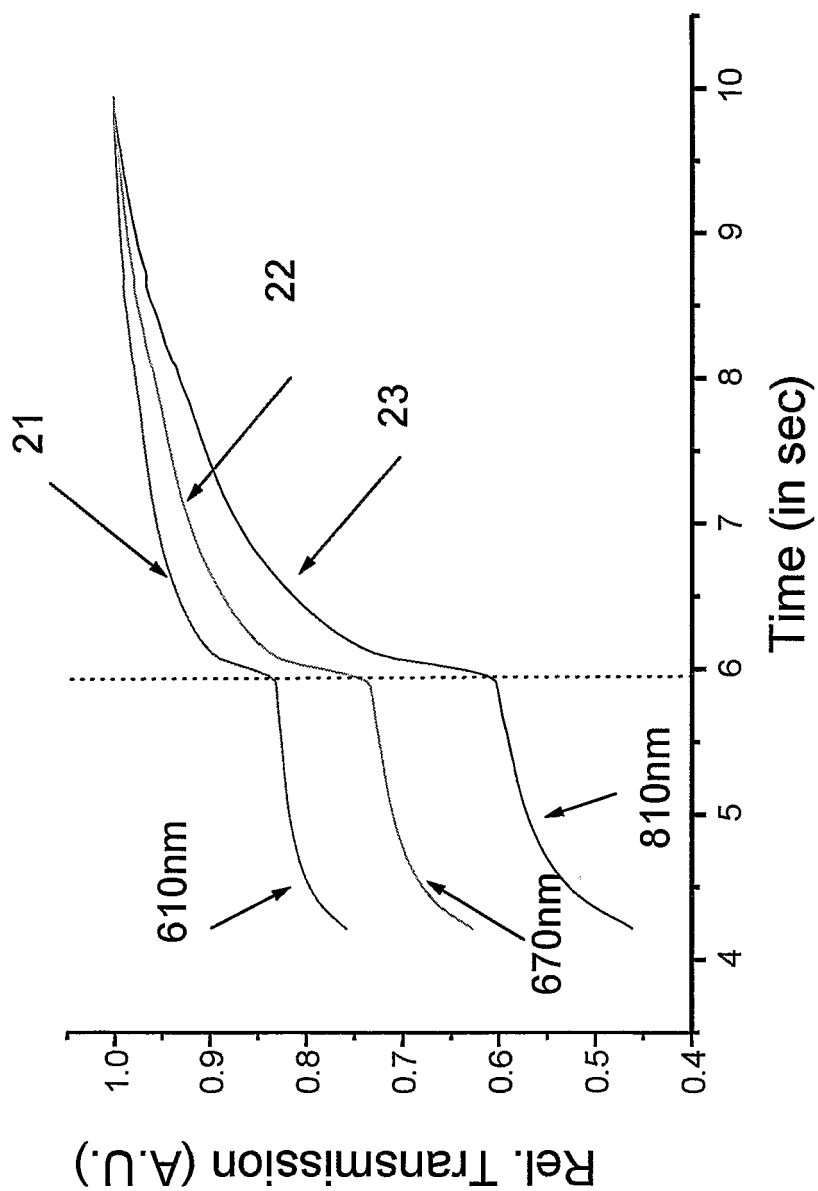


FIG.2

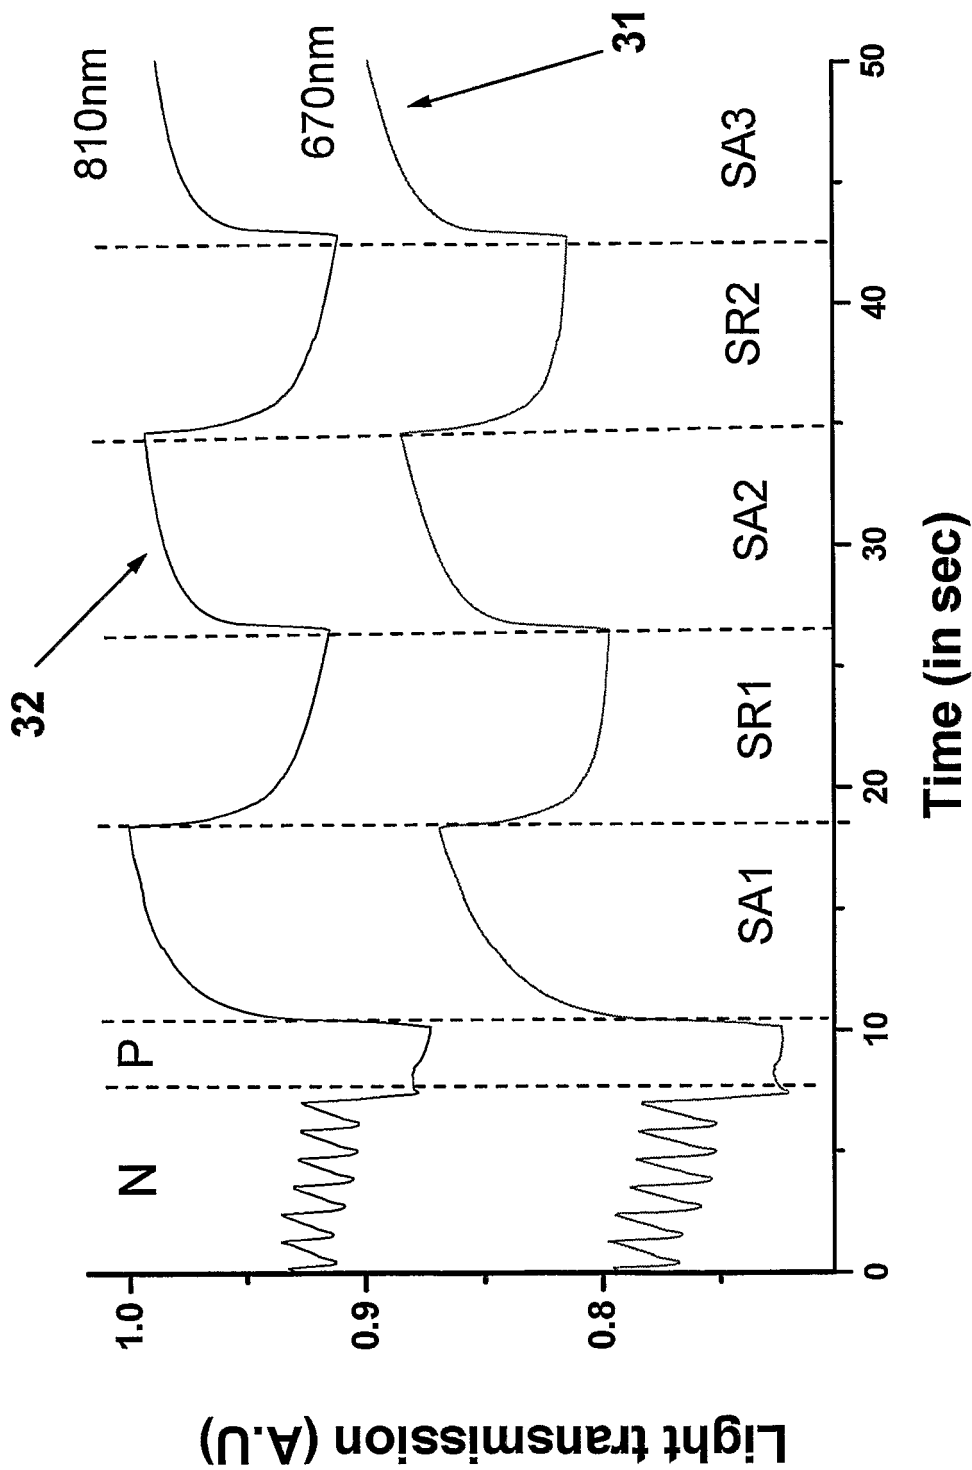


FIG.3

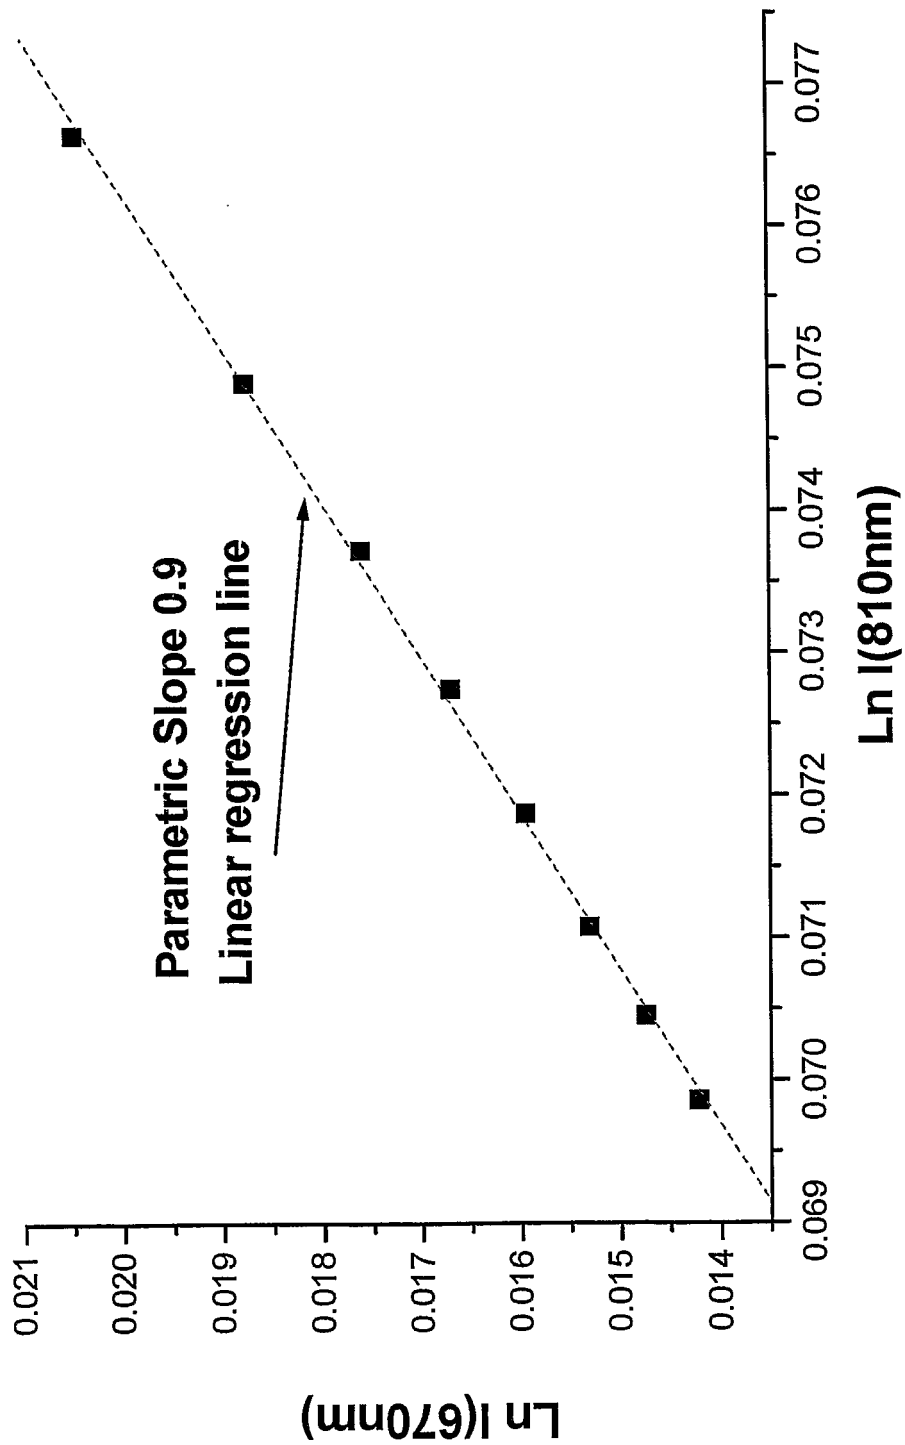


FIG.4

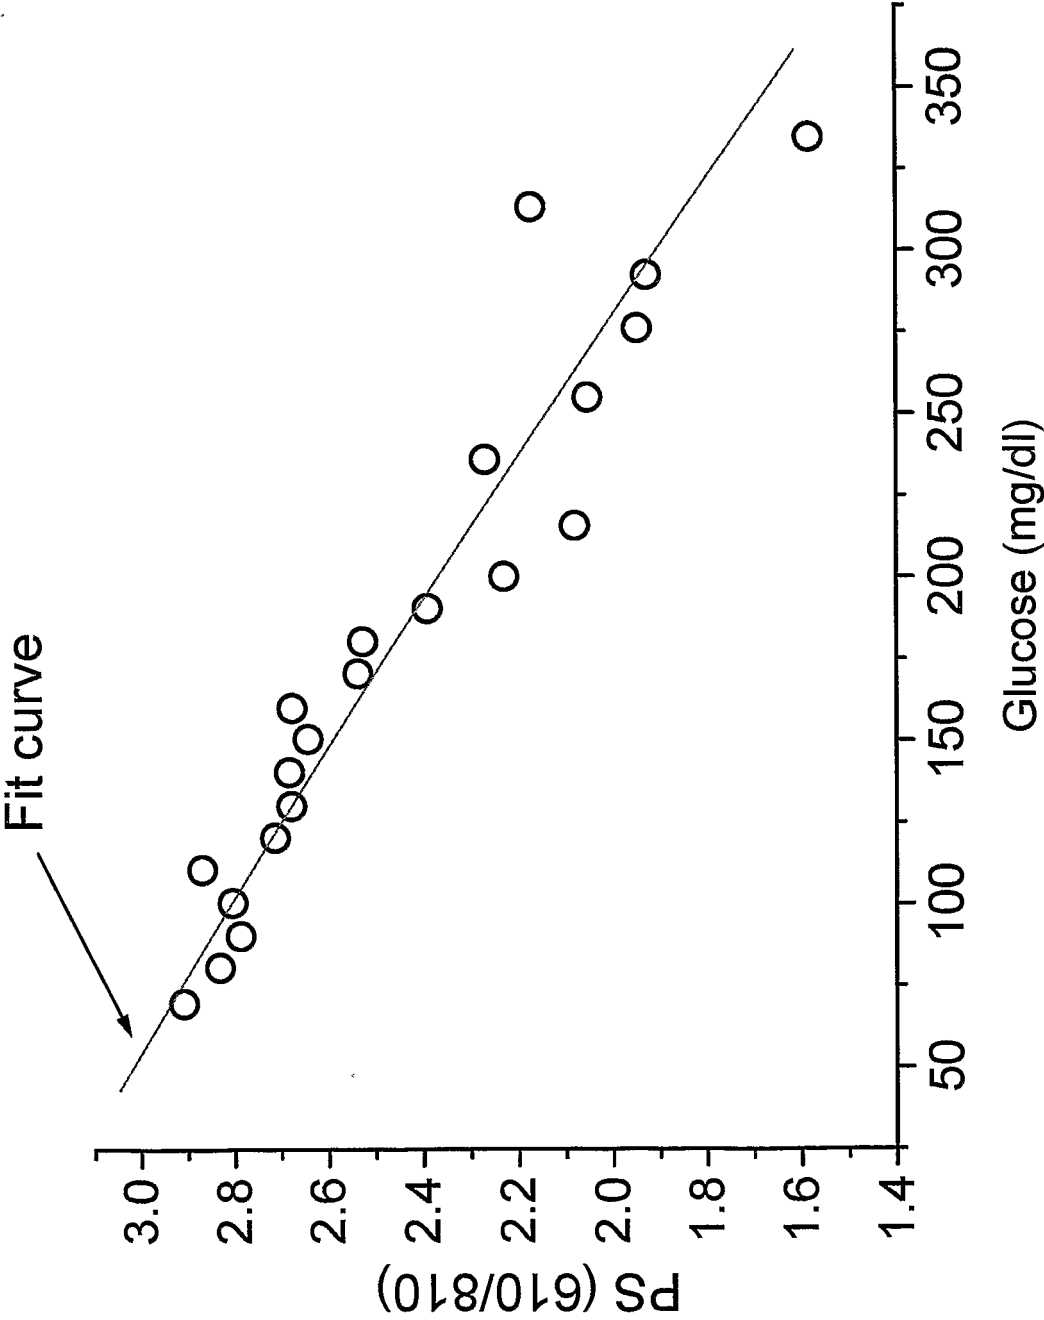


FIG.5

6/7

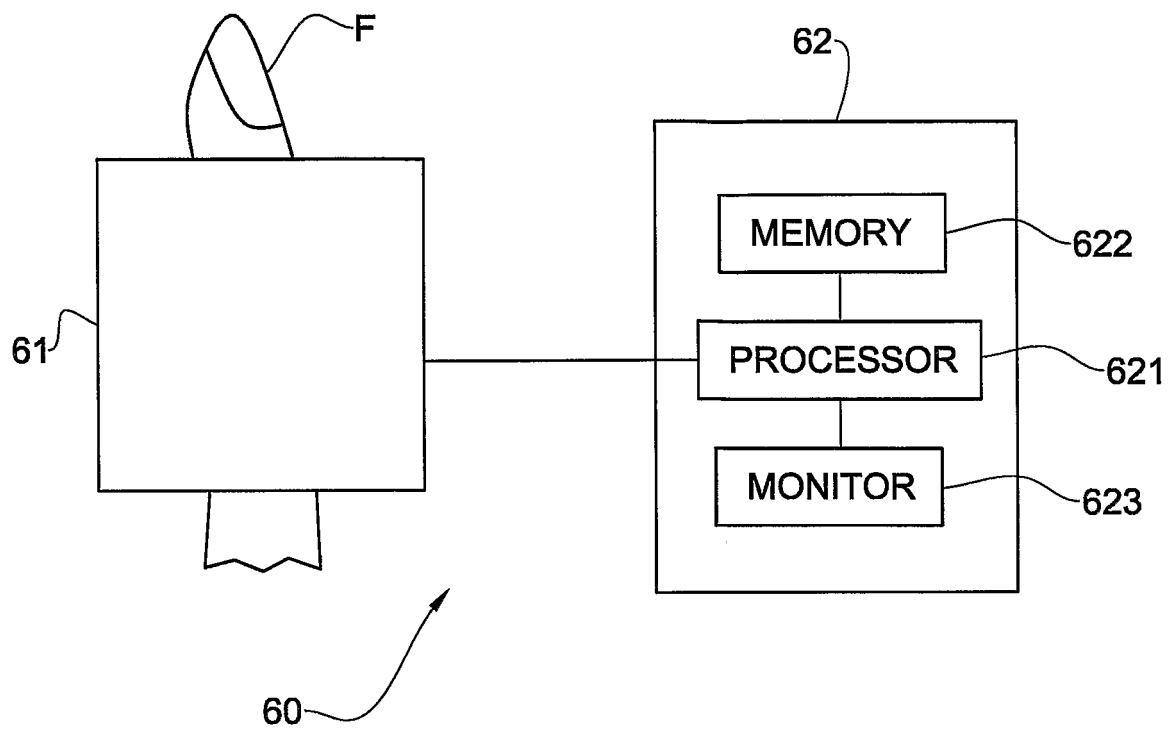


FIG. 6

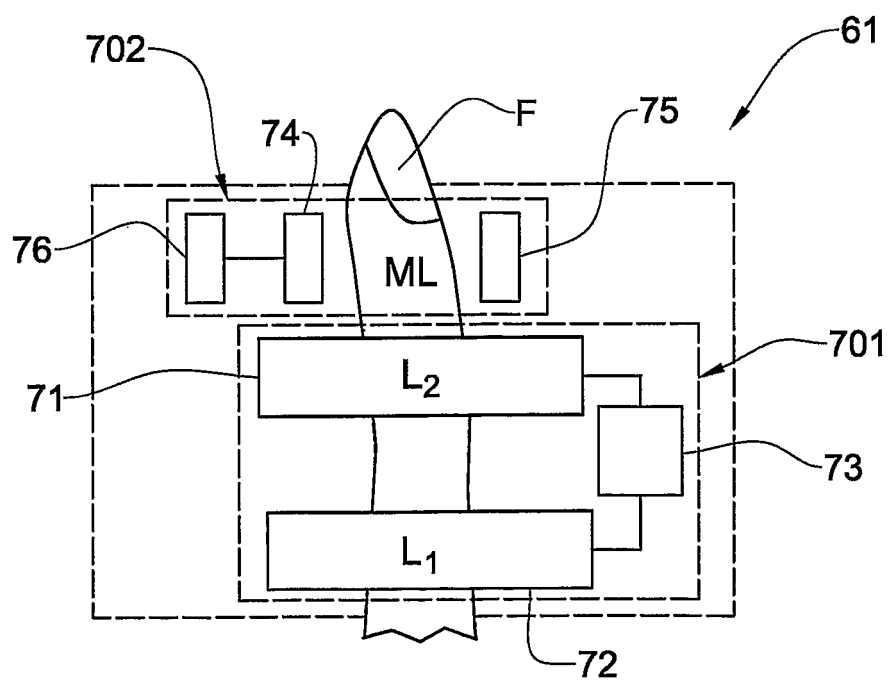


FIG. 7

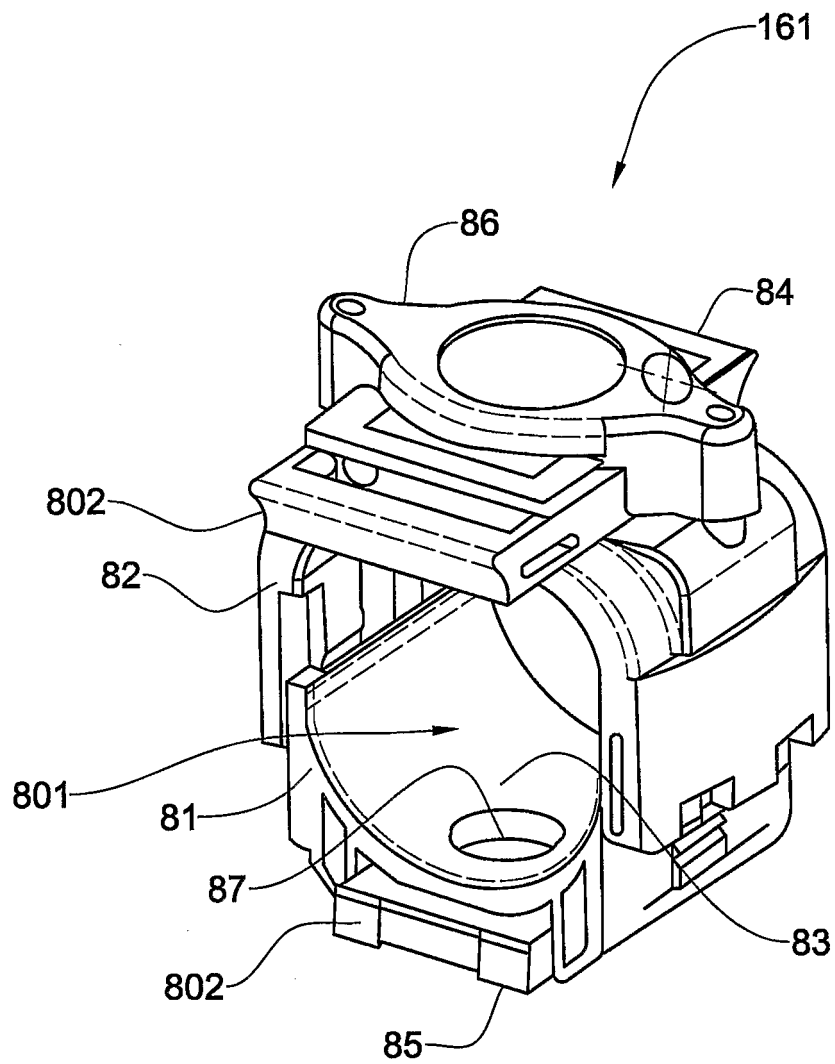


FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IL2004/000463

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/67946 A (FINAROV ALEXANDER ; FINE ILYA (IL); ORSENSE LTD (IL)) 20 September 2001 (2001-09-20) abstract page 8, line 18 - page 16, line 4 -& WO 99/65384 A (FINE ILYA ; ORSENSE LTD (IL)) 23 December 1999 (1999-12-23) page 10, line 15 - page 12, line 8 page 13, line 26 - page 21, line 29 *WO 99/65384 is incorporated by reference in WO 01/67946*	1-37
A	US 6 461 305 B1 (SCHNALL ROBERT P) 8 October 2002 (2002-10-08) abstract; figures 10a-c ----- -/--	32-35



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

24 September 2004

Date of mailing of the international search report

01/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Beck, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IL2004/000463

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/26539 A (FINAROV ALEXANDER ; FINE ILYA (IL); ORSENSE LTD (IL); KLEINMAN YOSSIE) 19 April 2001 (2001-04-19) abstract; figure 3 page 6, line 26 - page 9, line 24 -----	1, 19, 28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL2004/000463

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0167946	A	20-09-2001	AU 3953201 A	24-09-2001
			CN 1418072 T	14-05-2003
			EP 1263315 A1	11-12-2002
			WO 0167946 A1	20-09-2001
			JP 2003526434 T	09-09-2003
			US 2002173709 A1	21-11-2002
WO 9965384	A	23-12-1999	IL 124965 A	14-08-2002
			AU 764876 B2	04-09-2003
			AU 4643599 A	05-01-2000
			CA 2332921 A1	23-12-1999
			CN 1315844 T	03-10-2001
			EP 1087693 A1	04-04-2001
			WO 9965384 A1	23-12-1999
			JP 2002518075 T	25-06-2002
			US 6400972 B1	04-06-2002
US 6461305	B1	08-10-2002	AU 759850 B2	01-05-2003
			AU 4161699 A	30-12-1999
			CA 2333015 A1	16-12-1999
			CN 1304295 T	18-07-2001
			EP 1083823 A1	21-03-2001
			WO 9963884 A1	16-12-1999
			JP 2002517270 T	18-06-2002
			NZ 508085 A	27-09-2002
			US 2002072681 A1	13-06-2002
WO 0126539	A	19-04-2001	US 6400971 B1	04-06-2002
			AT 258409 T	15-02-2004
			AU 7683000 A	23-04-2001
			DE 60008011 D1	04-03-2004
			EP 1223851 A1	24-07-2002
			WO 0126539 A1	19-04-2001
			JP 2003511141 T	25-03-2003

专利名称(译)	用于血液参数的非侵入式光学测量的方法和系统		
公开(公告)号	EP1628564A1	公开(公告)日	2006-03-01
申请号	EP2004735644	申请日	2004-06-01
申请(专利权)人(译)	ORSENSE LTD.		
当前申请(专利权)人(译)	ORSENSE LTD.		
[标]发明人	FINE ILYA FINAROV ALEXANDER		
发明人	FINE, ILYA FINAROV, ALEXANDER		
IPC分类号	A61B5/00		
CPC分类号	A61B5/14552 A61B5/0059 A61B5/14532 A61B5/14546 A61B5/14551 A61B5/6826 A61B5/6838		
优先权	2003012663 2003-06-03 GB 10/452932 2003-06-03 US		
其他公开文献	EP1628564B1		
外部链接	Espacenet		

摘要(译)

提出了一种方法和装置，用于对患者血液的至少一种所需特征进行非侵入性光学测量。在患者血液灌注的肉质培养基中的测量位置处产生人造血液动力学的条件并维持一段时间。在所述特定时间段内在预定时间间隔内改变该条件，以便调节血液的散射特性。通过在血液的散射特性对光辐射敏感的范围用至少两种不同波长的入射光束照射测量位置，检测介质的光响应，并产生指示时间的测量数据，将光学测量应用于测量位置。在所述预定时间间隔的至少一部分上，分别针对所述至少两个不同波长的介质的光响应的演变。