



(51) International Patent Classification:

A61B 5/113 (2006.01) *A61B 5/0205* (2006.01)
A61B 5/11 (2006.01) *A61B 7/04* (2006.01)
A61B 5/103 (2006.01) *A61B 5/00* (2006.01)
A61B 5/08 (2006.01)

(21) International Application Number:

PCT/AU2014/050440

(22) International Filing Date:

19 December 2014 (19.12.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2013905017 20 December 2013 (20.12.2013) AU

(71) Applicant: **SONOMEDICAL PTY LTD** [AU/AU]; 10
 Evans Street, Balmain, New South Wales 2041 (AU).

(72) Inventors: **SULLIVAN, Colin Edward**; 10 Evans Street,
 Balmain, New South Wales 2041 (AU). **SPENCER, Peter
 Charles**; 10 Evans Street, Balmain, New South Wales
 2041 (AU). **NORMAN, Mark Bradley**; 10 Evans Street,
 Balmain, New South Wales 2041 (AU).

(74) Agent: **FB RICE**; Level 23, 44 Market St, Sydney, New
 South Wales 2000 (AU).

(81) Designated States (unless otherwise indicated, for every
 kind of national protection available): AE, AG, AL, AM,
 AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
 BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
 DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
 HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
 KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
 MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
 PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
 SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
 TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
 kind of regional protection available): ARIPO (BW, GH,
 GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
 TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
 TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
 DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
 LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
 SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
 GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND METHOD FOR MONITORING PHYSIOLOGICAL ACTIVITY OF A SUBJECT

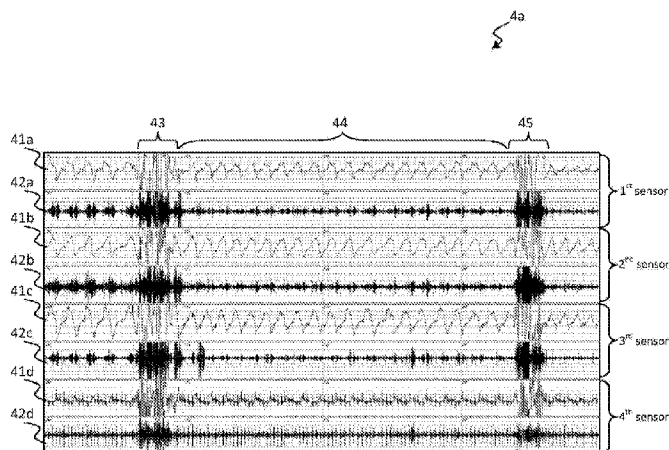


Fig. 3

(57) Abstract: A system and associated method is disclosed to monitor physiological activity of a subject. One or more sensors are positioned in or on a support, the support being adapted to receive the subject, at least a first one of the sensors being adapted to produce a first signal indicative of movement of the subject over time. Processing apparatus is adapted to identify first, second and third portions of the first signal. The first and third portions correspond to first and third time periods, respectively, during which the subject changes body position on the support. The second portion corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place.

"System and method for monitoring physiological activity of a subject"**Cross-Reference to Related Applications**

[0001] The present application claims priority from Australian Provisional Patent Application No 2013905017 filed on 20 December 2013, the content of which is incorporated herein by reference.

Technical Field

[0002] The present disclosure relates to a system for monitoring physiological activity of a subject, particularly, although not necessarily exclusively, using sensors located in or on a support against which the subject rests.

Background

[0003] Many devices have been used and proposed for recording breathing or sleep activity. One example is an ECG measurement system in which ECG electrodes are attached to a subject's skin. Another example is an electronic stethoscope which is manually pressed against the subject to hold it in place against the subject's skin.

[0004] An alternative approach employs vibration sensors that are placed at different positions in a mat. The sensors are configured to sense vibrations from the patient, permitting diagnosis of breathing abnormalities, snoring and sleep apnea, etc. The sensors are distributed over the mat such that, when the subject rests against the mat, sensors may sense sound vibrations originating from the subject to enable a diagnosis to be performed.

[0005] Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present disclosure as it existed before the priority date of each claim of this application.

Summary

[0006] According to a first aspect, the present disclosure provides a system adapted to monitor physiological activity comprising:

- one or more sensors positioned in or on a support, the support being adapted to receive a subject, at least a first one of the sensors being adapted to produce a first signal indicative of movement of the subject over time; and

- processing apparatus adapted to:

- receive the first signal from the first sensor;

- identify a first portion of the first signal that corresponds to a first time period during which the subject changes body position on the support;

- identify a third portion of the first signal that corresponds to a third time period during which the subject changes body position on the support; and

- identify a second portion of the first signal that corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place.

[0007] In a second aspect, the present disclosure provides a method of monitoring physiological activity comprising:

- identifying a first portion of a first signal, wherein the first signal is produced by a first sensor positioned in or on a support adapted to receive a subject, the first signal being indicative of movement of the subject over a period of time, and wherein the first portion of the first signal corresponds to a first time period during which the subject changes body position on the support;

- identifying a third portion of the first signal that corresponds to a third time period during which the subject changes body position on the support; and

- identifying a second portion of the first signal, that corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place.

[0008] In a third aspect, the present disclosure provides software that, when installed on a computer, causes the computer to perform the method of the second aspect.

[0009] In a further aspect, the present disclosure provides a processor adapted to:

identify a first portion of a first signal, wherein the first signal is produced by a first sensor positioned in or on a support adapted to receive a subject, the first signal being indicative of movement of the subject over a period of time, and wherein the first portion of the first signal corresponds to a first time period during which the subject changes body position on the support;

identify a third portion of the first signal that corresponds to a third time period during which the subject changes body position on the support; and

identify a second portion of the first signal, that corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place.

[0010] Generally, the system, method, software and processor may monitor movement to identify, monitor and/or analyse a variety of different body parameters, behaviours and events, including, but not limited to, breathing, coughing, sneezing, heartbeat, heart rhythm disturbances, heart function, heart valve abnormalities and murmurs, body reflexes, body positioning, gut activity, jaw movements, snoring, sleep apnea, sleep state, restriction of airways, asthma, quiescent periods, period spent asleep or awake, fetal heart beat, fetal movements, placental blood flow, crackles, rhonchi, rales, indicia of lung infection, chronic lung disease and/or chronic heart failure.

[0011] The movement monitored by the one or more sensors may be vibrational movement. Thus, the one or more sensors may be vibration sensors and the first signal produced by the first vibration sensor may be indicative of vibrations caused by the subject over a period of time.

[0012] By positioning the one or more sensors in or on a support, rather than directly attaching sensors to the subject, the sensors are not necessarily in contact at all times with the subject and to this end can be considered "non-contact sensors". The subject may move freely in relation to the sensors and the sensors may be considered, in combination, to define a "sensor field".

[0013] The support may comprise a pad against which the subject rests, reclines or sits, for example. The pad may comprise foam or other cushioning material. The pad may be in the

form of a mat or mattress, a seat cushion, back support or otherwise. The support may form part of a bed, trolley, cot, chair or other item against which the subject may sit or lie for a period of time.

[0014] The use of non-contact sensors in or on the support can provide a number of advantages. For example, the system may be safer and more user friendly for all subjects, including non-attended children being monitored at home. The subject may freely enter and leave the sensor field formed by a plurality of the sensors at the support. The subject may be considered a mobile, ambulatory, non-tethered subject in this regard. The system may be particularly suitable for monitoring of the subject while at rest, including when asleep or sedated (e.g., from anaesthetic). In this regard, the sensor field may be considered a localised sensor field at the place of rest of the subject. When used, for example, to assess sleep quality and quantity, the technique can have a minimal effect on sleep, particularly when conducted in the subject's home, e.g., in comparison to techniques that employ multiple attached sensors and leads. Further, the non-intrusive nature of non-contact sensors can facilitate better user acceptance and compliance, e.g., when used for long term monitoring purposes.

[0015] In one embodiment, where one or more vibrations sensors are used, the vibration sensors may comprise a vibration sensing element, e.g., a membrane, and the vibration sensors may produce an electrical signal based on movement of the membrane. In alternative embodiments, other types of sensors may be used. For example, ECG, EEG, EOG and/or EMG sensors that are not attached to the subject may be used.

[0016] Since the one or more sensors are not directly attached to the subject, changes in position of a subject can have great effect on the quality of the signals produced by the sensors. Where vibration sensors are used, for example, vibrations caused by positional changes of the subject can substantially mask smaller vibrations, e.g., vibrations caused by breathing flow, which smaller vibrations may be of greater interest from a subject diagnosis perspective.

[0017] In general, references herein to "changes in body position of the subject" or similar are intended to describe gross body motion, which can involve changes in posture of the subject and/or changes in location of the subject on the support (e.g., as opposed to motion of a limited portion of the body such as chest movement during breathing). While in many

instances changes in body position will therefore culminate in the subject having a different posture and/or location on the support, it should be recognised that in some instances a change in body position in the context of the present disclosure may culminate in the subject returning to the same posture and/or location on the support.

[0018] The identification of portions of the first signal that correspond to periods of body position movements and periods between body position movements, e.g., periods of rest, can enable a number of advantages to be realised. For example, analysis of smaller movements, e.g. smaller vibrations, such as breathing flow vibrations and heart sound vibrations, can be carried out with greater accuracy by considering the signal at periods of rest only. Further, the efficiency of the analysis may be increased by selecting more relevant portions of the signal for analysis only. Still further, the identification of periods of rest (also termed quiescent or quiescence periods) and periods of body position movement, can be used as part of a particular diagnosis, e.g., if sleep state, etc., is being assessed. Additional advantages will also become apparent from the subsequent discussions.

[0019] Where one or more vibration sensors are used, the vibration signal may be an acoustic (sound) signal and the one or more vibration sensors may be acoustic sensors. Nonetheless, vibration signals with frequencies outside of the range of hearing may also be used.

[0020] In this discussion, for simplicity, reference is made to first, second and third portions of the signal that correspond, respectively, to a first time period during which the subject changes body position on the support, a subsequent second time period during which the subject makes substantially no change in body position on the support, and further subsequent third time period during which the subject again changes body position on the support. However, the system and method is not necessarily limited to identifying three portions of the signal only. Indeed, over the course of a phase of monitoring, multiple portions of the signal that correspond to time periods during which the subject changes body position on the support may be identified (i.e. multiple first and/or third portions of the signal may be identified), along with multiple intermediate time periods during which the subject makes substantially no change in body position (i.e. multiple second portions of the signal may be identified). Thus, a third portion of the signal, immediately following a period in which the subject makes substantially no change in body position on the support, may also be considered to provide a

first portion of the signal immediately preceding the next period in which the subject makes substantially no change in body position on the support. This process can be described as a moving window of sampling that can be carried out over a long recording period (e.g., over multiple hours of recording).

[0021] One or more of the first, second and third portions of the first signal, from the first sensor, may be identified by analysis of parameters of the signal, such as the amplitude, duration, frequency content, and timbre. For example, the amplitude of a vibration signal may be relatively high during periods of body movement and relatively low during periods of rest. The amplitude of the vibration signal may therefore be compared with one or more predetermined threshold amplitudes to determine if the vibration signal, at any point in time, is indicative of a change in body position of the subject on the support or a period of rest.

[0022] Additionally or alternatively, one or more of the first, second and third portions of the first signal, from the first sensor, may be identified based on analysis of a different signal, generated from a different sensor. The different signal/sensor may be the same or an alternative type of signal/sensor to the first signal/sensor. As an example, one or more vibration sensors and one or more displacement sensors may be provided in or on the support. First, second and third portions of a first vibration signal, from a first vibration sensor, may be identified based on analysis of one or more displacement signals from the one or more displacement sensors. The displacement sensors may comprise a PVDF coaxial cable, for example, that extends across the support. The displacement sensors may each generate a displacement signal indicative of periods of changes in body position and periods of rest. By time-matching the vibration signal with a displacement signal, one or more of the first, second and third portions of the vibration signal can be identified based on an analysis of the displacement signal.

[0023] After identification of the first, second and third portions of the signal, any one or more of the first, second and third portions of the signal may be subjected to further analysis. In one embodiment, the second portion of the signal, which corresponds substantially to a period of rest, may be subjected to further analysis.

[0024] As an initial step or otherwise, the second portion of the signal may be analysed to determine if it is of sufficient quality to provide useful information for diagnostic purposes, i.e. it is of sufficient quality to be a signal of interest.

[0025] Determining whether or not the second portion of the signal is of sufficient quality may be achieved by determining if the amplitude of the signal, e.g. at one or more particular frequencies, exceeds a predetermined threshold level. However, care must be taken, particularly where analysis of breathing quality or sleep apnea, etc., is being carried out, not to rule out the possibility that a lower amplitude of the signal is a direct result of breathing difficulties or sleep apnea, etc. In these circumstances, signal amplitudes at frequencies related to breathing function may be low but the quality of the signal may in fact be high. Similar care must be taken where a pathology exists that causes intermittent vibrations, such as wheezing, crepitations (lung crackles), snoring, teeth grinding, heart murmurs, or abnormal breathing patterns, which may in turn cause absence of a strong signal for a substantial period of time, even when the quality of the signal is high.

[0026] In consideration of this problem, in one embodiment, the system is adapted to identify a feature of the second portion of the signal that corresponds to a heartbeat of the subject, and determine if that feature of the signal is above or below a predetermined signal threshold. On the assumption that the subject's heart is beating properly, the amplitude of the heartbeat feature of the signal can be indicative of the proximity of the subject's heart to the sensor. Since the heart position is relatively fixed in relationship to the thorax of the subject, the amplitude of the heartbeat feature of the signal has been found to be a particularly effective parameter for determining signal quality where breathing related conditions are under analysis. Thus the heartbeat feature of the signal may be used as a continuing reference signal to which other features of interest of the signal (e.g. breathing flow sounds) are compared.

[0027] An additional or alternative approach to determining whether or not the second portion of the signal is of sufficient quality to be a signal of interest involves evaluating a part of, or the entire period of, the second portion. Typically, if the signal is of a sufficient quality for any part of the second portion then this indicates that the signal quality will be sufficient for the entire period of the second portion. This is because there is substantially no change in body position of the subject during the second portion and the proximity of the subject to the

sensor during the second portion therefore remains substantially constant. Further, during the second portion, there are no large interfering signals such as those from body position changes to mask the lower magnitude signals of interest. When, for example, a breathing signal is identified during only part of the second portion, the part of the second portion where no breathing signal is identifiable is highly indicative of sleep apnea. Likewise if breath sounds including wheeze are detected during a first part of the second portion, but breath sounds with no wheeze are detected for a latter part of the second portion, it is highly indicative that the subject is not wheezing during the latter part of the second portion, rather than it being indicative that the signal is of lower quality at this point in time.

[0028] An additional or alternative approach to determining whether or not the second portion of the first signal from the first sensor is of sufficient quality to be a signal of interest involves comparing the second portion of the first signal from the first sensor with a corresponding portion of a signal generated from another sensor and determining relative signal quality of the two second portions. This approach may be carried out as part of an optimisation procedure.

[0029] In more detail, in addition to the first sensor, at least a second sensor positioned in or on the support can be provided, the second sensor adapted to produce a second signal indicative of movement of the subject over a period of time. The processor of the system may be adapted, and/or the method may comprise steps, to:

- receive the second signal from the second sensor;
- identify a first portion of the second signal that corresponds to the first time period, during which the subject changes body position on the support;
- identify a third portion of the second signal that corresponds to the third time period, during which the subject changes position on the support;
- identify a second portion of the second signal, that corresponds to the second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place; and
- compare at least part of the second portion of the second signal with a corresponding part of the second portion of the first signal.

[0030] The provision of a plurality of sensors to detect movement, e.g. a plurality of vibration sensors or otherwise, which sensors can be provided at different parts of the support,

can reduce difficulties with obtaining a high quality signal when a subject changes body position on the support. Since the sensors are not affixed to the subject, as the subject moves on the support away from one of the sensors, the strength/quality of the signal from that sensor is likely to reduce. However, the subject may nevertheless move towards another of the sensors (or at least move less far away from that other sensor), such that at least one of the sensors provides a signal of sufficient quality for diagnostic purposes. At any point in time, more than one of the sensors may provide a signal of sufficient quality or only one sensor may provide a signal of sufficient quality. Regardless, when multiple sensors are provided, and thus multiple signals are produced, the highest quality signal can be selected at any point in time and/or for any time period, as part of an optimisation procedure.

[0031] One advantage of identifying the first, second and third portions of the signals is that these signal portions correspond to time periods in which it is predictable that the quality of the signals will change or remain constant. Generally, during the second time period, the subject remains substantially at rest on the support. Therefore, the quality of the second portion of the signal from each sensor, and the relative quality of the second portion of the signal between different sensors, is likely to remain substantially the same across the entire second time period. However, when a subject moves during both the first and third time periods, the quality of the portions of the signal corresponding to those periods is likely to be in a state of change. The first and third time periods are periods of transition for each sensor, with the quality of the signal from the sensor immediately after the first or third time period being likely to have changed in comparison to the quality of that signal from that sensor immediately before that first or third time period. Furthermore, the quality of the signal from one of the sensors immediately after the first or third time period is likely to have changed in comparison to the quality of the signal from another of the sensors immediately after the corresponding time period.

[0032] Determining when the quality of a signal is likely to have changed can be particularly beneficial if 'real-time' analysis of the signals is performed, for example. While in some embodiments, a contiguous record of the signals indicative of movement for a subject over an extended period of time can be generated and recorded, and analysis of the signals performed subsequently, e.g., after the subject removes themselves from the support, in other embodiments, analysis may be performed in real-time. Real-time analysis may be particularly useful if an immediate warning of breathing or other difficulties is required. The system may

provide an audible and/or visual alert signal when breathing difficulties have been detected (e.g. a period of apnea or wheezing) or periods of heart abnormalities (e.g. arrhythmias, etc.). Regardless of the reasons for real-time monitoring, it may not be desirable to continually compare the quality of signals from multiple sensors as part of an optimisation process. For example, continuous comparisons may be a drain on processing power and may increase the risk of errors in the system. By identifying portions of the signals from the sensors that correspond to time periods during which the subject changes body position on the support, comparisons of the quality of signals from different sensors may be carried out more selectively. For example, comparisons of signal quality between different sensors may be carried out shortly after a period of change of body position, e.g. within a 30 second, 20 second or 10 second period after the end of the first period or third period or from the start of the next period.

[0033] Following from the discussions above, according to one aspect, the present disclosure provides a system for monitoring physiological activity comprising:

- at least first and second sensors positioned in or on a support, the support being adapted to receive a subject, each of the first and second sensors adapted to produce a first and second signal, respectively, indicative of movement of the subject over a period of time;

- processing apparatus adapted to:

- receive the first and second signals from the first and second sensors;
 - identify a first portion of each of the first and second signals that corresponds to a first time period during which the subject changes body position on the support;
 - identify a second portion of each of the first and second signals that corresponds to a second time period, that immediately follows the first time period, during which substantially no change in body position of the subject on the support takes place; and
 - compare the signal quality substantially at the start at least of the second portion of the first signal with the signal quality substantially at the start at least of the second portion of the second signal, and select the second portion of the first or second signal with higher signal quality for further analysis.

[0034] Additional sensors may be provided. For example, in one embodiment, first, second, third and fourth sensors are positioned in or on the support, the first, second, third and fourth sensors adapted to produce first, second, third and fourth signals, respectively, indicative of movement of the subject over a period of time, and the processing apparatus is adapted to:

receive the first, second, third and fourth signals from the first, second, third and fourth sensors;

identify a first portion of each of the first, second, third and fourth signals that corresponds to a first time period during which the subject changes body position on the support;

identify a second portion of each of the first, second, third and fourth signals that corresponds to a second time period, that immediately follows the first time period, during which substantially no change in body position of the subject on the support takes place; and

compare the signal quality substantially at the start at least of the second portion of every one of the first, second, third and fourth signals, and select the second portion of the first, second, third or fourth signal with higher signal quality for further analysis.

[0035] In any of the aspects disclosed, the signal from one or more of the vibration sensors may be split into separate channels. The signal may be split into separate channels according to frequency or otherwise. The analysis and comparison techniques described above can be carried out on the entire signal and/or separate channels of the signal.

[0036] Particularly where analysis of breathing is performed and vibration sensors are employed, for example, the vibration signals may each be split into a first signal based on breathing effort or breathing movement frequency (hereinafter a breathing effort signal) and a second signal based on breathing flow frequency (hereinafter a breathing flow signal). Breathing effort is linked to movement of the subject's diaphragm and therefore has a relatively low frequency with relatively high amplitude. On the other hand, breathing flow frequencies tend to be of much higher frequency, generated through high frequency vibration of membranes or obstructions in the body, etc., but of relatively low amplitude. By splitting the vibration signal into separate signals, more targeted analysis of the vibration signal may be performed, e.g., depending on whether or not breathing effort, breathing flow or a combination of breathing effort and breathing flow is to be analysed, in order to arrive at a diagnosis.

[0037] Analysis of the quality of the various portions of the vibration signal may be carried out on each of the breathing effort and breathing flow signals separately or in combination. It is recognised, for example, that the relative quality of one of these signals may be different to

the other, for any given vibration signal from a vibration sensor. To this end, during the optimisation process, for the same time period, a breathing effort signal from one sensor may be selected as optimal in combination with a breathing flow signal from a different sensor.

[0038] As indicated, one or more of the identified first, second and third portions of the signal obtained from one of the sensors may be subjected to further analysis, e.g. once the quality of the signal has been assessed and/or an optimal signal has been selected or assembled. Analysis of the second portion, which corresponds to a period of rest, may be carried out, for example.

[0039] Through analysis of selected portions of the signal, the system and method may be used to detect movements that can allow diagnosis of central sleep apnea, obstructive sleep apnea or mixed sleep apnea. In general, apneic events are characterised by pauses in or obstructions to breathing. In the present disclosure, the pauses or obstructions can be identified through analysis of the breathing effort signal and/or the breathing flow signal.

[0040] Central apnea occurs when no direction to breathe is transmitted from the brain. Central apnea can therefore be determined through identification of a pause in both the breathing effort signal and the breathing flow signal. The pause may be identified as a period in which the signal level does not rise above background noise for a period of time exceeding a threshold period of time, the pause being immediately preceded and followed by periods in which the signal level does rise above background noise. Additionally or alternatively, the pause may be identified as a period in which the signal level has a reduction in amplitude, e.g. of at least 90%, in comparison to preceding and/or subsequent periods, for a period of time exceeding a threshold period of time. The threshold period of time may be 10 seconds for adults or equivalent to 2 breathing cycles for children, for example.

[0041] Obstructive apnea occurs upon obstruction of the upper airway, e.g. when relaxation causes the palate and tongue to close the upper airway (throat). Obstructive apnea can therefore be determined through identification of a pause in the breathing flow signal but not the breathing effort signal. Such events have continued breathing efforts but reduced or absent breathing airflow. Again, the pause may correspond to a period in which the signal level does not rise above background noise or corresponds to a reduction in amplitude, e.g. of 90%, in

comparison to preceding and/or subsequent time periods, for a period of time exceeding the threshold period.

[0042] Mixed apnea occurs when, over a predetermined analysis period, both central apnea and obstructive apnea can be identified. Mixed apnea can therefore be determined based on a combination of the approaches taken to determining central and obstructive apnea.

[0043] Through analysis of selected portions of the signals, the system and method may be used for diagnosis of other events or conditions such as short cycle apneic events, breathing pattern changes such as Cheyne-Stokes breathing, hypopneic breathing, non-apneic, non-hypopneic partially obstructed breathing (simple snoring), REM related heartbeat patterns, wheezing, lung crackles (crepitations), leg movements, abnormal body movements, teeth grinding and jaw movements, lung infection, heart murmurs, heart rhythm abnormalities, and fetal movements.

[0044] Another advantage of identifying the first, second and third portions of the signals is that they can enable identification and quantification of periods of sleep, periods of intention to sleep, or periods of wakefulness, etc.

[0045] According to one aspect, the present disclosure provides a system adapted to estimate duration of a period of sleep of a subject comprising:

- one or more sensors positioned in or on a support, the support being adapted to receive a subject, at least a first one of sensors being adapted to produce a signal indicative of activity of the subject over time including the subject changing body position and respiratory events of the subject; and

- processing apparatus adapted to:

- identify a first portion of the signal that corresponds to a first time period during which the subject changes body position on the support;

- identify a third portion of the signal that corresponds to a third time period during which the subject changes body position on the support;

- identify a second portion of the signal, that corresponds to a second time period, immediately between the first and third time periods, during which substantially no change in body position of the subject takes place;

- identify one or more respiratory indicators of sleep in the second portion of the

signal;

estimate sleep onset time of the subject as the earlier of:

(i) a predetermined threshold time (x), if the second period of time extends after the end of the first period of time for a time that is equal to or greater than the predetermined threshold time (x); or

(ii) a time at which the earliest respiratory indicator of sleep in the second portion of the signal is identified; and

calculate a duration of a period of sleep of the subject as the time between the estimated sleep onset time and the start of the third time period.

[0046] According to another aspect, the present disclosure provides a method of estimating duration of a period of sleep of a subject comprising:

identifying a first portion of a signal, wherein the signal is produced by a sensor positioned in or on a support adapted to receive a subject, the signal being indicative of activity of the subject over a period of time including the subject changing body position and respiratory events of the subject, and wherein the first portion of the signal corresponds to a first time period during which the subject changes body position on the support;

identifying a third portion of the signal that corresponds to a third time period during which the subject changes body position on the support;

identifying a second portion of the signal, that corresponds to a second time period, immediately between the first and third time periods, during which substantially no change in body position of the subject takes place;

identifying one or more respiratory indicators of sleep in the second portion of the signal; and

estimating sleep onset time of the subject as the earlier of:

(i) a predetermined threshold time (x), if the second period of time extends after the end of the first period of time for a time that is equal to or greater than the predetermined threshold time (x); or

(ii) a time at which the earliest respiratory indicator of sleep in the second portion of the signal is identified; and

calculating a duration of a period of sleep of the subject as the time between the estimated sleep onset time and the start of the third time period.

[0047] In general, if a subject lies immobile for a long period they are more likely to be asleep than if they are immobile for only short periods of time. The entirety of such a period of quiescence (a period where substantially no change in body position of the subject takes place) is not necessarily associated with sleep. However, sleep can be estimated to have occurred after a predetermined threshold time from the start of quiescence has elapsed, based on probability analysis.

[0048] Calculating a duration of sleep of a subject based only on periods of quiescence and body movement can be problematic, however, in the presence of sleep disordered breathing (SDB). Snoring and respiratory events can disrupt sleep resulting in very short periods of sleep and, potentially, very short periods of quiescence. If SDB is present, and only gross body movements and periods of quiescence are used in the estimation of sleep, short periods of quiescence may be incorrectly classified as wake. Nonetheless, the presence of respiratory indicators of sleep can be used to increase probability of sleep being present to 100%, regardless of quiescence duration. Following from this, the present disclosure estimates of a sleep onset time if a subject is quiescent for $> x$ seconds or a respiratory indicator of sleep is present in the period $\leq x$ seconds. The approach permits the inclusion of very short periods of quiescence as sleep and allows for a more robust method of identifying sleep onset and sleep duration.

[0049] Again, the one or more sensors positioned in or on a support may be vibration sensors adapted to produce a signal indicative of vibration caused by the subject over time. However, alternative types of sensors may be used, such as ECG, EEG, EMG and EOG sensors.

[0050] Respiratory indicators of sleep may include snoring and/or breath sound changes, for example.

[0051] In the above aspects, changes in body position of the subject, and respiratory events, are assessed using sensors such as vibration sensors located in or on a support for receiving the subject. In alternative embodiments, other types of sensors, such as microphones, may be employed to assess one or both of these parameters, and which other sensors may or may not be positioned in or on any support for receiving the subject.

[0052] Thus, according to one aspect, the present disclosure provides a system adapted to estimate duration of a period of sleep of a subject comprising:

one or more sensors adapted to monitor changes in body position of the subject and respiratory indicators of sleep from the subject; and

processing apparatus adapted to:

identify a quiescence time period during which substantially no change in body position of the subject takes place, the time period starting immediately after the end of a first body movement and ending immediately before the start of a second body movement;

identify one or more respiratory indicators of sleep from the subject during the quiescence time period;

estimate sleep onset time of the subject as the earlier of:

(i) a predetermined threshold time (x), if the quiescence time period extends for a time that is equal to or greater than the predetermined threshold time (x); or

(ii) a time at which the earliest respiratory indicator of sleep during the quiescence time period is identified; and

calculate a duration of a period of sleep of the subject as the time between the estimated sleep onset time and the start of the second body movement.

[0053] Further, according to another aspect, the present disclosure provides a method of estimating duration of a period of sleep of a subject comprising:

identifying a quiescence time period during which substantially no change in body position of a subject takes place, the time period starting immediately after the end of a first body movement of the subject and ending immediately before the start of a second body movement of the subject;

identifying one or more respiratory indicators of sleep from the subject during the quiescence time period;

estimating sleep onset time of the subject as the earlier of:

(i) a predetermined threshold time (x), if the quiescence time period extends for a time that is equal to or greater than the predetermined threshold time (x); or

(ii) a time at which the earliest respiratory indicator of sleep during the quiescence time period is identified; and

calculating a duration of a period of sleep of the subject as the time between the estimated sleep onset time and the start of the second body movement.

[0054] In these aspects, substantially no change in body position of the subject may be considered to have taken place if any body movement that is identifiable lasts less than a body movement threshold time (y). The threshold time (y) can be determined as a time period where, when movement lasts for a time less than that time period (y), the subject has a very high probability of remaining in a sleep state. Following from this, the first and third time periods identified in preceding aspects exceed the body movement threshold time (y).

[0055] In one embodiment, the predetermined threshold time (x) in any of the preceding aspects is chosen to reflect a 90%, 95% or 99% probability that sleep onset has occurred, for example. In one embodiment, x is between 90 and 130 seconds, e.g., about 110 seconds, and y is between about 10 and 20 seconds, e.g., about 16 seconds. In practice, however, values for x and y will change for subjects falling in different age groups, with different pathologies, and different genders, and for subjects being monitored in different locations (e.g., when sleeping at home, or when sleeping in a hospital or laboratory), etc.

[0056] In the above aspects or otherwise, an "intention to sleep" time may be estimated. This may take advantage of the fact that the sensors are provided in or on a support, e.g. as opposed to being directly attached to the subject, and therefore moveable with the subject when they move away from the support. Thus, to the extent that the sensors can recognise that a subject has been received by the support (e.g. is lying on or against the support), onset of an intention to sleep can be readily calculated. An intention to sleep time can be estimated as the total time that the subject is sensed on the support, e.g. through sensing movement, vibrations, heart beat and/or breathing sounds, etc. In some embodiments, the intention to sleep time can be estimated as the total time that the subject is sensed on the support up to the time at which sleep onset is estimated to have started.

[0057] The approach may prevent overestimates of intention to sleep time since it can more accurately identify onset of an intention to sleep, e.g. in comparison to a system which relies on mere activation of apparatus, at which point the subject may have no intention to sleep.

[0058] Related to this, it can be seen that the systems and methods of the present disclosure can provide a means of surveillance of the subject. In contrast to a monitoring system that relies on tethering of sensors to the subject, the systems and methods, which use non-contact sensors, can permit a more holistic monitoring of the subject to take place. Not only can

smaller movements such as breathing movements of the subject be monitored, but the location and movement of the mobile, ambulatory, non-tethered subject relative to a support can also be monitored. Where the support is a bed, for example, the sensors can be used to determine if the patient is on the bed, off the bed, and/or moving on the bed, for example.

[0059] Generally, it will be recognised that a processor or processing apparatus as disclosed herein may comprise a number of control or processing modules for controlling one or more components of the apparatus and may also include one or more storage elements, for storing vibration signal data, analysis data, and patient data, etc. The modules and storage elements can be implemented using one or more processing devices and one or more data storage units, which modules and/or storage devices may be at one location or distributed across multiple locations and interconnected by one or more communication links. Processing devices may include computers, tablets, smartphones, personal digital assistants and other types of computing devices, including computer systems manufacture specifically for the purpose of carrying out methods according to the present disclosure.

[0060] The processing modules can be implemented by a computer program or program code comprising program instructions. The computer program instructions can include source code, object code, machine code or any other stored data that is operable to cause the processor or processing apparatus to perform the steps described. The computer program can be written in any form of programming language, including compiled or interpreted languages and can be deployed in any form, including as a stand-alone program or as a module, component, subroutine or other unit suitable for use in a computing environment. The data storage device(s) may include suitable computer readable media such as volatile (e.g. RAM) and/or non-volatile (e.g. ROM, disk) memory or otherwise.

[0061] Signal analysis carried out in accordance with the present disclosure, e.g., to identify portions or features of signals corresponding to changes in body position, breathing-related events, heartbeats or otherwise, may employ a variety of different signal processing techniques. Amplitude analysis, time domain analysis and/or frequency domain analysis may be carried out, utilising RMS values, variance, probability density, time history, impulse response, correlation, covariance, filters and/or Fourier transforms, for example.

Brief Description of Drawings

[0062] Fig. 1 shows a schematic illustration of physiological activity monitoring apparatus according to an embodiment of the present disclosure;

[0063] Fig. 2 shows a schematic illustration of components of the apparatus of Fig. 1;

[0064] Fig. 3 shows an example of an image produced by a display device of the apparatus of Fig. 1;

[0065] Fig. 4 shows a flowchart that represents steps carried out by processing modules of the apparatus of Fig. 1;

[0066] Fig. 5 shows another flowchart that represents steps carried out by processing modules of the apparatus of Fig. 1;

[0067] Fig. 6a shows another example of an image produced by a display device of the apparatus of Fig. 1, and Figs. 6b and 6c show different composite signals derived from signals represented in the image of Fig. 6a;

[0068] Fig. 7a to 7d show breathing vibration signal traces which include pauses, obstructions and/or reductions in amplitude indicative of central apnea, obstructive apnea, mixed apnea and hypopnea;

[0069] Fig. 8 shows another example of an image produced by the apparatus of Fig. 1;

[0070] Fig. 9 shows a flow chart illustrating how sleep onsite time can be estimated by a signal processing module of the apparatus of Fig. 1;

[0071] Fig. 10 shows a flow chart illustrating how durations of sleep periods can be estimated by the signal processing module of the apparatus of Fig. 1;

[0072] Fig. 11 shows vibration signal traces illustrating quiescent periods and body movements in runs of wake and sleep;

[0073] Fig. 12 shows a frequency distribution of body movements in wake and sleep within PSG recordings recorded in an example of the present disclosure; and

[0074] Fig. 13 shows a frequency distribution of quiescent periods in wake and sleep within the PSG recordings recorded in the example of the present disclosure.

Description of Embodiments

[0075] Physiological activity monitoring apparatus 10 of a system according to an embodiment of the present disclosure is illustrated in Fig. 1. The apparatus 10 includes a support, in particular a mattress 1, adapted to receive a subject in a recumbent position, and a workstation 2. The mattress 1 includes foam and a plurality of vibration sensors 11a-d, in particular a first vibration sensor 11a, a second vibration sensor 11b, a third vibration sensor 11c and a fourth vibration sensor 11d, positioned within respective recesses in the foam. A top surface of the vibration sensors 11a-d is located substantially flush with or projecting from a top surface 12 of the mattress 1 such that any one or more of the sensors 11a-d may press against the recumbent subject at any point in time. Nonetheless, a sheet or other covering may be positioned over the sensors 11a-d and/or mattress 1, between the vibration sensors 11a-d and the subject. The vibration sensors 11a-d are located at a position that is roughly one third of the length of the mattress 1 from a head end 121 of the mattress 1. This position is intended to correspond to a position at which the subject's chest is located. The vibration sensors 11a-d are "non-contact sensors" since they are not affixed to the subject. The subject may therefore move freely in relation to the sensors 11a-d. In this embodiment, the four vibration sensors 11a-d are distributed in an array configuration, in particular a diamond configuration. While vibration sensors are described in this detailed description, other types of sensors may be used as an alternative or in addition to vibration sensors. For example EEG, ECG, EMG or EOG sensors may be used. The apparatus may further include one or more microphones 16a, 16b as shown in Fig. 1, which may be used in conjunction with the vibration sensors to sense activity of the subject.

[0076] Referring to Fig. 2, the monitoring apparatus 10 comprises processing apparatus including a signal acquisition module 13 located in or adjacent the mattress 1, and a signal processing module 21 provided in the workstation 2. When a subject lies on the mattress 1,

each of the first to fourth vibration sensors 11a-d is adapted to produce a corresponding vibration signal indicative of sensed vibrations from the subject over a period of time.

[0077] The vibration signals are acquired by the signal acquisition module 13 and signal data is optionally stored in a memory 15. The vibration signals are then transmitted from the mattress 1 by a transceiver 14, over a wireless communication link 3, to the workstation 2. The signals are received at the workstation 2 by a further transceiver 22 and are subjected to processing by the signal processing module 21. The received signals can be stored in a further memory 23. In alternative embodiments, a wired communications link may be used in place of the wireless link 3.

[0078] The signal processing module 21 in this embodiment is adapted to cause images to be displayed on the display device 24 of the workstation 2, which images provide graphical representations of the vibration signals. An example of such an image 4a is provided in Fig. 3.

[0079] The signal processing module 21 is configured to split each of the first to fourth vibration signals into separate channels on a frequency-specific basis. In particular, the signal processing module splits each of first to fourth vibration signals, produced by the first to fourth vibration sensors 11a-d, respectively, into a breathing effort signal and a breathing flow signal. Breathing effort is linked to movement of the subject's diaphragm and therefore has a relatively low frequency but relatively high gain. On the other hand, breathing flow frequencies are much higher but of relatively lower gain, and are generated by vibrations caused by turbulence of air flow through the upper airways and in the lung airways, or by obstructions in the body, etc. By splitting the vibration signals in this manner (with both amplitude and frequency), a targeted analysis of each of these signal types can be performed by the signal processing module. For each sensor 11a-d, the breathing effort signal and the breathing flow signal are represented separately in the images, and marked in Fig. 3 with reference numbers 41a-d and 42a-d, respectively.

[0080] In this embodiment, with reference to flowchart 100 of Fig. 4, at 101 the signal processing module is adapted to, for both the breathing effort signal and the breathing flow signal from each of the first to fourth sensors 11a-d, identify a first portion of the signal that corresponds to a first time period during which the subject changes body position on the

mattress 1. At 102, the processing module is also adapted to identify a third portion of that signal that corresponds to a third time period during which the subject changes body position on the mattress 1. At 103, the processing module is adapted to identify a second portion of the first signal that corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the mattress 1 takes place. At 104, the processing module subjects any one or more of the first, second and third portions of the signal, e.g. the second portion, to further analysis.

[0081] The signal processing module 21 is adapted to identify the first and third portions of the vibration signal by comparing the amplitude of the vibration signal with a predetermined threshold amplitude. In Fig. 3, for each signal 41a-d, 42a-d from each sensor 11a-d, a relatively large signal amplitude exceeding the predetermined threshold amplitude is evident during two time periods. The portions of each vibration signal corresponding to these two time periods are identified in Fig. 3 as first portion 43 and third portion 45. As indicated, these portions 43, 45 correspond to time periods in which the subject has changed body position (i.e. periods of gross body movement of the subject). Based on identification of the first and third portions 43, 45 or otherwise, the signal processing module is also adapted to identify a second portion 44 of each vibration signal, which falls directly between the first and third portions 43, 45, and which corresponds to a period in which there is substantially no change in body position of the subject.

[0082] Since the sensors 11a-d are not directly attached to the subject, movement of the subject can have a considerable effect on the nature of the vibrations sensed by the sensors 11a-d. Vibrations caused by positional changes of the subject substantially mask smaller vibrations caused by breathing effort and breathing flow. In Fig. 3, the small vibrations caused by breathing effort and breathing flow are readily evident in the second portion 44 of each of the signals, but not in the first and third portions 43, 45 of the signals.

[0083] While Fig. 3 illustrates two portions 43, 45 of each signal that correspond to positional changes of the subject, over a longer period of time, e.g., during a night's sleep, there can be many more positional changes of the subject. Following from this, over the course of a phase of monitoring, the signal processing module 21 is adapted to identify multiple portions of the vibration signal that correspond to time periods during which the

subject changes body position, along with multiple intermediate time periods during which the subject makes substantially no change in body position.

[0084] By identifying time periods during which the subject makes substantially no change in body position, the signal processing module can in one embodiment perform a targeted analysis of breathing effort and breathing flow vibrations during these periods only.

[0085] Additionally or alternatively, by identifying periods of rest, in addition to periods of body position movement, the signal processing module can in one embodiment make detailed assessments of sleep state. Further, certain patterns of body position movement may be identified, for example, and the patterns may be correlated with different types of sensed breathing activity.

[0086] The signal processing module 21 can determine if a second portion 44 of one or more of the signals is of sufficient quality to be used for diagnostic purposes. For example, it can ascertain a signal amplitude of the second portion and determine that the second portion is of sufficient quality to be used for diagnostic purposes only if the amplitude exceeds a predetermined threshold level. Further, and with reference to the discussions of Fig. 8 below, the signal processing apparatus can identify a part of the second portion of the one or more of the signals corresponding to the subject's heart beat and determine that the second portion is of sufficient quality to be used for diagnostic purposes if the part corresponding to the heart beat has an amplitude that exceeds a predetermined threshold level.

[0087] A quality check of the second portion 44 of the signal can be made by the signal processing module 21 by analysis of a segment only of the second portion of the signal. For example, analysis may be performed at the start of the second portion only.

[0088] In this embodiment, through identification of the various different portions of the vibration signals, corresponding to changes in body position of the subject and periods of rest, the signal processing module is adapted to carry out an optimisation procedure.

[0089] Generally, the use of non-contact sensors means that signal quality across the sensors may vary over a period of time. The subject may move away from any one or more of the sensors when they change their body position, at which point the strength and quality of the

vibration signal produced by that vibration sensor is likely to be reduced. However, the subject may nevertheless, at the same time, move towards one or more other of the vibration sensors (or at least move less far away from one or more other of the sensors), such that at least one of the vibration sensors provides a vibration signal of sufficient quality for diagnostic purposes. At any point in time, more than one of the sensors may provide a vibration signal of sufficient quality or only one sensor may provide a signal of sufficient quality. Regardless, when multiple vibration sensors are provided, and thus multiple vibration signals are produced, the highest quality vibration signal can be selected at any point in time and/or for any time period, and subjected to further analysis. By selecting the highest quality vibration signal during different periods of time, an optimised, composite signal can be produced for a particular phase or monitoring.

[0090] In this embodiment, for the purposes of optimisation, with reference to the flowchart 200 of Fig. 5, at 201 the signal processing module is adapted to identify a second signal portion of one signal, i.e. a portion in which there is substantially no change in body position of the patient. At 202, the signal processing module is adapted to identify a second signal portion of another signal, corresponding to the same time period in which substantially no change in the body position of the patient takes place. At 203, the signal processing module is adapted to compare the quality of the corresponding second portions of the two signals. At 204, the signal processing module is adapted to select the second portion that has the highest signal quality.

[0091] The optimisation process of this embodiment can be further understood with reference to Fig. 6a, which shows an image 4b in which the effects of changes in body position on signal quality across the vibration sensors 11a-d can be seen. A period of time corresponding to a change in body position of the subject is identifiable roughly in the centre of the image 4b, indicated by reference number 47. In a period 46 directly before the period of body movement 47, the amplitude of the breathing effort signal 41c for the third vibration sensor 11c is relatively low. However, in a period 48 directly after the period of body movement 47, the breathing effort signal 41c for the third vibration sensor 11c has a much higher amplitude and can be considered of better quality.

[0092] To the extent that the signal processing module determines, for example, that, prior to the period of body movement 47, the breathing effort signal 41a of the first vibration sensor

11a has the highest quality of all breathing effort signals 41a-d, and, after the period of body movement 47, the breathing effort signal 41c of the third vibration sensor 11c has the highest quality of all breathing effort signals 41a-d, the signal processing module is adapted to produce an optimised, composite breathing effort signal, as represented in Fig. 4b, in which these two high quality portions signal have been amalgamated. Substantially the same technique can be applied in relation to the breathing flow signals 42a-d to produce an optimised, composite breathing flow signal. Analysis of the subject's breathing effort and/or breathing flow can then be carried out by analysing the optimised, composite signal(s) in some embodiments.

[0093] While in Fig. 6b, a signal portion corresponding to the period of body movement 47 has been included in the composite signal, in alternative embodiments, it may be excluded, e.g. as represented in Fig. 6c.

[0094] While the composite signals may be presented on the display 24, e.g. in a form as represented in Figs. 6b and 6c, such as to enable analysis of signals by a clinician or other healthcare worker, in some embodiments the composite signal may be produced for internal analysis by the processing apparatus only. When the processing apparatus performs an analysis of the signals for the purposes of diagnosis of a patient over a phase of monitoring, the processing apparatus can perform the analysis with respect to the composite signal.

[0095] Through analysis of selected portions of the vibration signals, the apparatus can identify, monitor and/or analyse a variety of different body parameters, behaviours and events, including, but not limited to, breathing, heartbeat, heart function, heart valve abnormalities and murmurs, body reflexes, body positioning, gut activity, teeth grinding and jaw movements, snoring, sleep apnea, sleep state, restriction of airways, asthma, quiescent periods, period spent asleep or awake, fetal heart beat, fetal movements, placental blood flow, crepitation, and/or lung infection, etc. Further, the analysis may identify abnormal body movements and abnormal patterns of movement, which can occur as a result of REM Sleep Movement Disorder, Sleep Myoclonus, and various seizure disorders.

[0096] In general, apneic events are characterised by pauses or obstructions in breathing. With reference to Figs. 7a to 7d, the pauses or obstructions in breathing can be identified through analysis of the breathing effort signal and/or the breathing flow signal.

[0097] Central apnea occurs when no direction to breathe is transmitted from the brain. Referring to Fig. 7a, central apnea is therefore determined in this embodiment through identification of a pause in both the breathing effort signal and the breathing flow signal. The pause is identified as a period in which the signal level does not rise above background noise for a period of time exceeding a predetermined threshold period of time, the pause being immediately preceded and followed by periods in which the signal level does rise above background noise. In alternative embodiments, a pause can be identified as a period in which the signal level has a reduction in amplitude, e.g., of at least 90%, in comparison to preceding and/or subsequent periods, for a period of time exceeding a threshold period of time. The threshold period of time in this embodiment is 10 seconds for adults, although a variety of different threshold levels may be selected.

[0098] Obstructive sleep apnea occurs upon obstruction of the upper airway, e.g. when relaxation causes the palate and tongue to close the upper airway (throat). Referring to Fig. 7b, obstructive apnea is therefore determined in this embodiment through identification of a pause in the breathing flow signal but not the breathing effort signal. The pause is identified in a manner discussed above with respect to Fig. 7a.

[0099] Mixed apnea occurs when, over a predetermined analysis period, both central apnea and obstructive apnea can be identified. With reference to Fig. 7c, mixed apnea is therefore determined in this embodiment through identification of one or more periods in which there is a pause in both the breathing effort signal and the breathing flow signal, and identification of one or more periods in which there is a pause in the breathing flow signal but not the breathing effort signal.

[0100] Central Hypopnea occurs when there is a change (e.g., reduction) of breathing effort, over a period of time coupled with a change (e.g., reduction) of breath sound intensity. With reference to Fig. 7d, hypopnea is determined in this embodiment through identification of one or more periods in which breathing effort amplitude falls below a predetermined threshold level.

[0101] As indicated above, analysis of selected portions of the vibration signals can also allow information about fetal behaviour to be determined. This can be further understood with reference to Fig. 8, which shows an image 4c in which a second portion of signals

produced from the four vibration sensors 11a-d can be seen. The higher frequency output 42d from the fourth sensor 11d is indicative of the fetal heartbeat. On the other hand the outputs from the first to third sensors 11a-c are indicative of the breathing and heart sound related signals of the mother.

[0102] In one embodiment, the apparatus discussed above with reference to Figs. 1 and 2 is adapted to estimate duration of a period of sleep of a subject. Again, the signal processing module is adapted to identify first, second and third portions of at least one of the vibration signals, but in this embodiment it is further adapted to identify one or more respiratory indicators of sleep in the second portion of the vibration signal and estimate sleep onset time of the subject as the earlier of: (i) a predetermined threshold time (x), if the second period of time extends after the end of the first period of time for a time that is equal to or greater than the predetermined threshold time (x); or (ii) a time at which the earliest respiratory indicator of sleep in the second portion of the vibrations signal (such as a snore or breath sound change) is identified. The apparatus is adapted to calculate a duration of a period of sleep of the subject as the time between the estimated sleep onset time and the start of the third time period.

[0103] Fig. 9 provides a flow chart illustrating how sleep onset time is estimated by the signal processing module in this embodiment. Starting at the top most rectangle, if periods of immobility (Qd) are not longer than a constant value (x sec) and there are no respiratory indicators of sleep, the analysis continues until either a respiratory indicator of sleep occurs or a Qd period exceeds x sec. The dotted arrows indicate that a sleep onset time has been identified and recorded. Once sleep onset has been identified the duration of time between it and the beginning of the next body movement is considered to be sleep time. (In Fig. 9: Qd (i) = Initial Qd; SO = sleep onset; x = Qd time threshold (sec); Start_Move = start time of body movement; End_Move = end time of body movement and Start_Resp = start time of respiratory event.)

[0104] Fig. 10 provides a flow chart illustrating how durations of sleep periods are estimated by the signal processing module. Once sleep onset has been identified in accordance with the approach discussed above with respect to Fig. 9, all subsequent body movements and Qd periods are analysed for the entire study starting at the top most rectangle. A subject is considered to stay asleep until a movement in excess of a constant duration (y sec) occurs.

Following this, the subject returns to sleep only if the Qd is $> x$ seconds or a respiratory indicator of sleep occurs. The dotted arrows indicate that a period of quiescent time is collated for the calculation of a QdTOTAL, the total sleep time. (In Fig. 10: Qd = Quiescent time; Qd (i) = Initial Qd; SO = sleep onset; x = Qd time threshold (sec); y = body movement threshold (sec); Start_Move = start time of body movement; End_Move = end time of body movement; and Start_Resp = start time of respiratory event).

[0105] This approach enables Qd periods that are associated with a high probability of sleep to be identified and accounts for subjects both waking from sleep and for short periods of quiescence that occur in the presence of respiratory events. Each period of Qd is sequentially identified and either does not meet the criteria for sleep and is discarded or does meet the criteria and is included in a total sleep time (TST) value. If there are any body movements $> y$ seconds, it is assumed that the period following this body movement has reverted to the wake state and the subject must now lie immobile for $> x$ seconds or a respiratory indicator of sleep must be present before it can be assumed that sleep has once again occurred.

Method

[0106] Signal recordings, in particular polysomnographic (PSG) recordings from 30 adult subjects were obtained and results compared data generated from EEG recordings in this same group of subjects. The PSG studies were recorded from patients referred for investigation of possible sleep-disordered breathing.

[0107] In accordance with Figs. 9 and 10 and the discussions above, variables x and y were to be determined and in order to ascertain these values, two non-standard events were scored in each PSG study.

[0108] The first non-standard event was labeled "Sleep Onset" (SO) and was scored at the precise point in time that the EEG indicated that sleep had occurred. The time elapsed between the beginning of a SO event to the beginning of an EEG arousal was considered to be sleep time and the time elapsed between the beginning of an EEG arousal to the beginning of the subsequent SO event was considered to be wake time. These absolute measures allowed the identification of blocks (or runs) of sleep and wake to be identified.

[0109] The second non-standard event was called “Body movement” (BM) and was identified on thoracic and/or abdominal traces of the PSG study as an abrupt change in the normal pattern of respiration identical to the patterns shown for body movement detection.

[0110] A threshold of 3 seconds was selected as the minimum duration of a BM event as it was equivalent to the minimum length of a determined EEG arousal.

[0111] The duration of each BM event and the duration of the periods of quiescence between each BM event were calculated.

[0112] Runs of absolute wake (EEG arousal to SO event) and absolute sleep (SO event to EEG arousal) of adequate duration (≥ 1 minute) were identified. Within these discrete periods of time, and multiple periods were present for each subject, the BM events and periods of Qd were analysed.

[0113] Variables x and y were obtained from the durations of Qd that occurred during wake and the durations of body movements that occurred during sleep.

[0114] Fig. 11 provides an illustration of Qd and body movements in runs of wake and sleep. The top trace indicates the EEG state and the bottom trace indicates body movements present on the thoracoabdominal PSG traces. Periods of quiescence are represented as straight horizontal lines between body movements (breathing movements are present on the actual PSG recordings but not represented in the illustration). Wake occurs between an EEG arousal and a Sleep Onset event and sleep occurs between a Sleep Onset event and an EEG arousal. Vertical dotted lines indicate the boundaries of runs of sleep and wake and the duration of these runs varied. Within each run of sleep and wake the duration of all body movements (≥ 3 seconds) and quiescence (QdWAKE and QdSLEEP) were collated.

[0115] Once the data was collated, the 95th centile values of each measure (movement duration and Qd duration) were used in the processes described above with reference to Figs. 9 and 10, to estimate the TST. The TST generated from epoch scoring and that generated from the absolute scoring of the EEG were both compared to the experimental results in order to examine accuracy.

Results

[0116] Thirty PSG studies were analysed (15 male, age = 58 ± 12 years, BMI = 29.5 ± 5.4 kg/m²). In these studies there were 133 runs of wake and 239 runs of sleep > 60 seconds. Within these periods 1,260 body movements occurred during wake and 349 body movements occurred during sleep. There were 1,121 periods of quiescence during wake and 570 periods of quiescence during sleep. There was a significant difference between the duration of movements (MoveWAKE = 11.0 (7.0, 22.0) and MoveSLEEP = 7.0 (4.0, 10.0) seconds; $p < 0.0001$) and the quiescent time (QdWAKE = 17.0 (8.0, 37.0) and QdSLEEP = 98.0 (32.0, 297.3) seconds; $p < 0.0001$) that occurred during wake and sleep.

[0117] Table 1 below lists the percentile values of quiescent times and body movement durations during runs of wake and runs of sleep. The 95th centile for quiescent time during wake was 110 seconds, indicating that only 5% of all periods of quiescence during EEG defined wake were longer than this. The 95th centile for body movements during sleep was 16 seconds, indicating that only 5% of body movements that occur during EEG defined sleep were longer than this. These two constants were used for values x and y, respectively.

Centiles	MoveWAKE	MoveSLEEP	QdWAKE	QdSLEEP
5th	4.0	3.0	3.0	8.0
25th	7.0	4.0	8.0	32.0
50th	11.0	7.0	17.0	98.0
75th	22.0	16.0	37.0	295.8
95th	65.0	16.0	110.0	928.4

Table 1

[0118] The frequency distribution of body movements in wake and sleep within the PSG recordings is presented in Fig. 12. The 95th centile for body movements that occurred during sleep (16 seconds) is shown as the vertical marker. Both wake and sleep are associated with considerable numbers of brief body movements < 16 seconds and, although there are movements > 16 seconds that occur during sleep, they are very few compared to the number that occur during wake. There is a long tail of movement durations that occur during wake.

[0119] The frequency distribution of quiescent periods in wake and sleep within the PSG recordings is presented in Fig. 13. The 95th centile for the quiescent time duration that occurred during wake (110 seconds) is shown as the vertical marker. Both wake and sleep are associated with considerable numbers of quiescent periods < 110 seconds but there are very

few quiescent periods > 110 seconds that occur during wake. In contrast there is a very long tail of quiescent durations above this threshold that occur during sleep.

[0120] In summary, from the data gathered using PSG studies, if a subject did not move for >110 seconds there was only a 5% chance that that the subject remained awake. In addition, once the subject was asleep, if a subject moved for > 16 seconds there was only a 5% chance that they remained asleep following the movement. Based on this, once a subject lies down with the intention to sleep they must be immobile for >110 seconds to be considered asleep. It is beyond this sleep onset point that the calculation of TST begins.

[0121] It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the above-described embodiments, without departing from the broad general scope of the present disclosure. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

CLAIMS:

1. A system adapted to monitor physiological activity comprising:
one or more sensors positioned in or on a support, the support being adapted to receive a subject, at least a first one of the sensors being adapted to produce a first signal indicative of movement of the subject over time; and
processing apparatus adapted to:
receive the first signal from the first sensor;
identify a first portion of the first signal that corresponds to a first time period during which the subject changes body position on the support;
identify a third portion of the first signal that corresponds to a third time period during which the subject changes body position on the support; and
identify a second portion of the first signal that corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place.
2. The system of claim 1, wherein the one or more sensors are vibration sensors and the first signal produced by the first vibration sensor is indicative of vibrations caused by the subject over a period of time.
3. The system of claim 1 or 2, wherein the support comprises a mat or mattress and the one or more sensors are embedded in the mat or mattress.
4. The system of any one of claims 1 to 3, wherein after identification, the processing apparatus is adapted to subject any one or more of the first, second and third portions of to further analysis.
5. The system of claim 4, wherein the processing apparatus is adapted to subject the second portion to further analysis.
6. The system of any one of the preceding claims, wherein the processing apparatus is adapted to determine if the second portion is of sufficient quality to be used for diagnostic purposes.

7. The system of claim 6, wherein the processing apparatus is adapted to ascertain a signal amplitude of the second portion and determine that the second portion is of sufficient quality to be used for diagnostic purposes if the amplitude exceeds a predetermined threshold level.

8. The system of claim 6 or 7, wherein the processing apparatus is adapted to identify a part of the second portion of the signal corresponding to the subject's heart beat and determine that the second portion is of sufficient quality to be used for diagnostic purposes if the part corresponding to the heart beat has an amplitude that exceeds a predetermined threshold level.

9. The system of claim 7 or 8, wherein the processing apparatus is adapted to evaluate a segment only of the second portion of the signal to determine if the second portion of the signal is of sufficient quality to be used for diagnostic purposes.

10. The system of claim 9, wherein the segment is at the start of the second portion of the signal.

11. The system of any one of claims 6 to 10 comprising at least a second sensor, the second sensor being adapted to produce a second signal indicative of movement of the subject over a period of time, and wherein the processing apparatus is adapted to:

receive the second signal from the second sensor;

identify a first portion of the second signal that corresponds to the first time period, during which the subject changes body position on the support;

identify a third portion of the second signal that corresponds to the third time period, during which the subject changes position on the support;

identify a second portion of the second signal that corresponds to the second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place; and

compare at least part of the second portion of the second signal with a corresponding part of the second portion of the first signal.

12. The system according to any one of claims 1 to 11, wherein the system is adapted to estimate duration of a period of sleep of a subject and wherein the at least first one of the

sensors is adapted to produce a signal indicative of movement caused by the subject over time including due to the subject changing body position and respiratory events of the subject; and wherein the processing apparatus is adapted to

identify one or more respiratory indicators of sleep in the second portion of the signal and estimate sleep onset time of the subject as the earlier of:

(i) a predetermined threshold time (x), if the second period of time extends after the end of the first period of time for a time that is equal to or greater than the predetermined threshold time (x); or

(ii) a time at which the earliest respiratory indicator of sleep in the second portion of the signal is identified; and

calculate a duration of a period of sleep of the subject as the time between the estimated sleep onset time and the start of the third time period.

13. The system of claim 12, wherein substantially no change in body position of the subject is considered to have taken place during a time period if any body movement that is identifiable in that time period lasts less than a body movement threshold time (y).

14. The system of any one of the preceding claims, wherein the subject is not tethered to any one of the sensors.

15. The system of any one of the preceding claims, wherein the subject is a mobile ambulatory subject that is free to move relative to the sensors and support.

16. The system of any one of the preceding claims, wherein a plurality of the sensors are provided in an array formation in or on the support to form a sensor field.

17. A system for monitoring physiological activity comprising:

at least first and second sensors positioned in or on a support, the support being adapted to receive a subject, each of the first and second sensors adapted to produce a first and second signal, respectively, indicative of movement of the subject over a period of time; processing apparatus adapted to:

receive the first and second signals from the first and second sensors;

identify a first portion of each of the first and second signals that corresponds to a first time period during which the subject changes body position on the support;

identify a second portion of each of the first and second signals that corresponds to a second time period, that immediately follows the first time period, during which substantially no change in body position of the subject on the support takes place; and

compare the signal quality substantially at the start at least of the second portion of the first signal with the signal quality substantially at the start at least of the second portion of the second signal, and select the second portion of the first or second signals with higher signal quality for further analysis.

18. A method of estimating duration of a period of sleep of a subject comprising:

identifying a first portion of a signal, wherein the signal is produced by a sensor positioned in or on a support adapted to receive a subject, the signal being indicative of movement of the subject over a period of time including due to the subject changing body position and respiratory events of the subject, and wherein the first portion of the signal corresponds to a first time period during which the subject changes body position on the support;

identifying a third portion of the signal that corresponds to a third time period during which the subject changes body position on the support;

identifying a second portion of the signal, that corresponds to a second time period, immediately between the first and third time periods, during which substantially no change in body position of the subject takes place;

identifying one or more respiratory indicators of sleep in the second portion of the signal; and

estimating sleep onset time of the subject as the earlier of:

(i) a predetermined threshold time (x), if the second period of time extends after the end of the first period of time for a time that is equal to or greater than the predetermined threshold time (x); or

(ii) a time at which the earliest respiratory indicator of sleep in the second portion of the signal is identified; and

calculating a duration of a period of sleep of the subject as the time between the estimated sleep onset time and the start of the third time period.

19. A method of monitoring physiological activity comprising:

identifying a first portion of a first signal, wherein the first signal is produced by a first sensor positioned in or on a support adapted to receive a subject, the first signal

being indicative of movement of the subject over a period of time, and wherein the first portion of the first signal corresponds to a first time period during which the subject changes body position on the support;

identifying a third portion of the first signal that corresponds to a third time period during which the subject changes body position on the support; and

identifying a second portion of the first signal, that corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the takes place.

20. Software that, when installed on a computer, causes the computer to perform the method of claim 19.

21. A processor adapted to:

identify a first portion of a first signal, wherein the first signal is produced by a first sensor positioned in or on a support adapted to receive a subject, the first signal being indicative of movement of the subject over a period of time, and wherein the first portion of the first signal corresponds to a first time period during which the subject changes body position on the support;

identify a third portion of the first signal that corresponds to a third time period during which the subject changes body position on the support; and

identify a second portion of the first signal, that corresponds to a second time period, between the first and third time periods, during which substantially no change in body position of the subject on the support takes place.

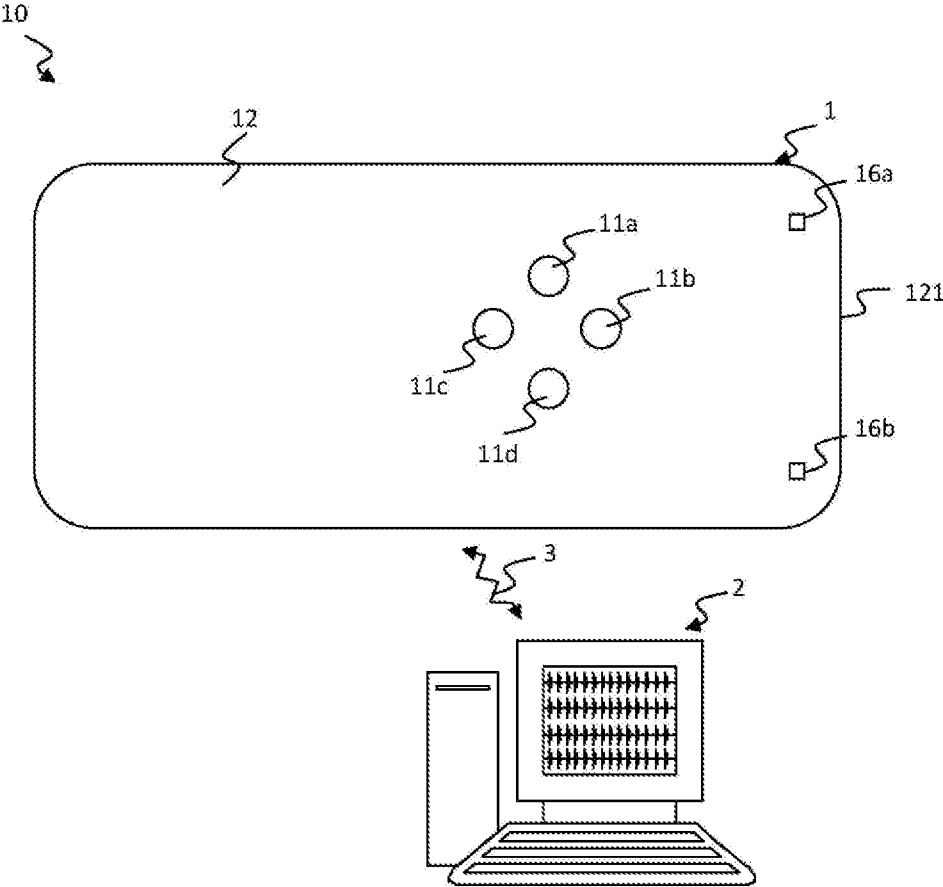
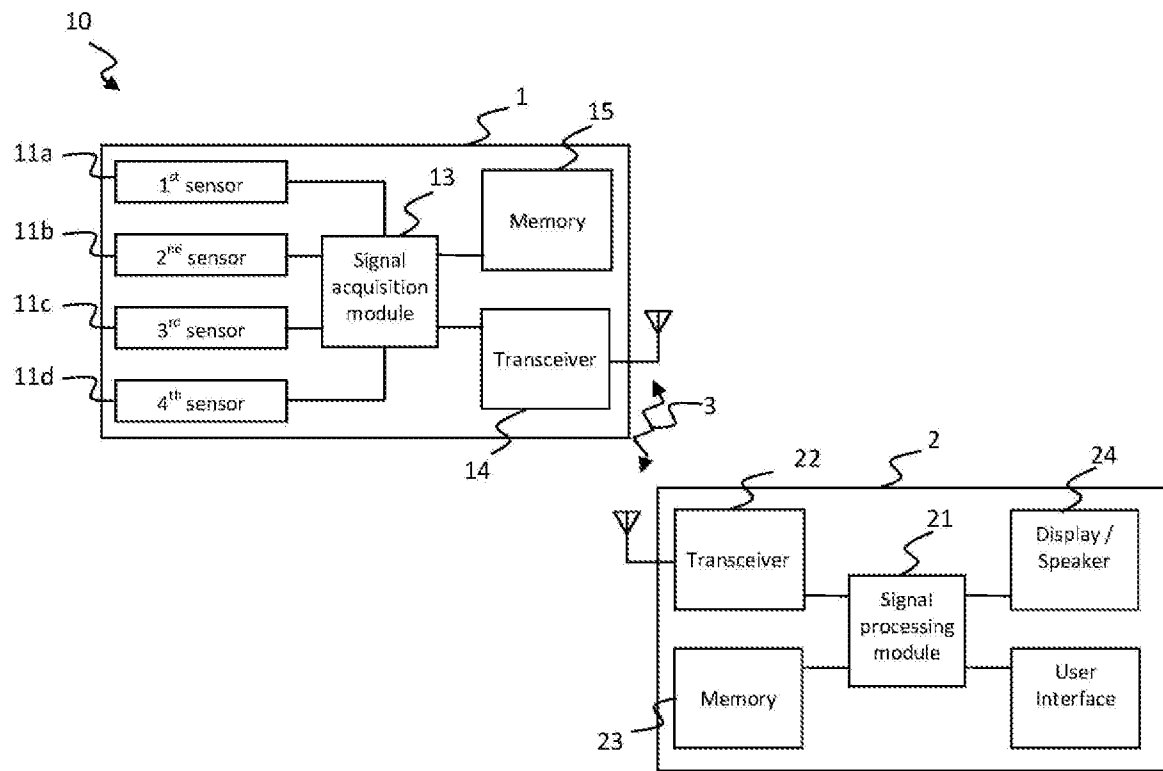


Fig. 1

2/12

**Fig. 2**

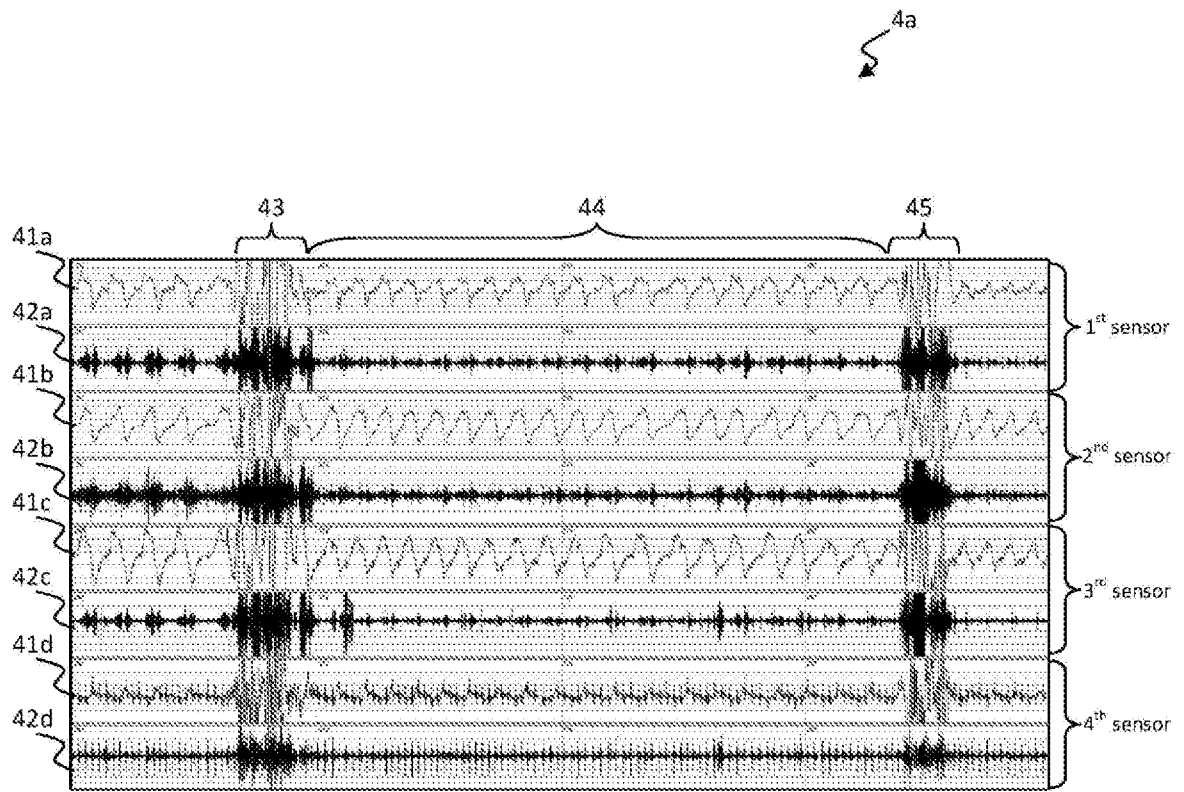
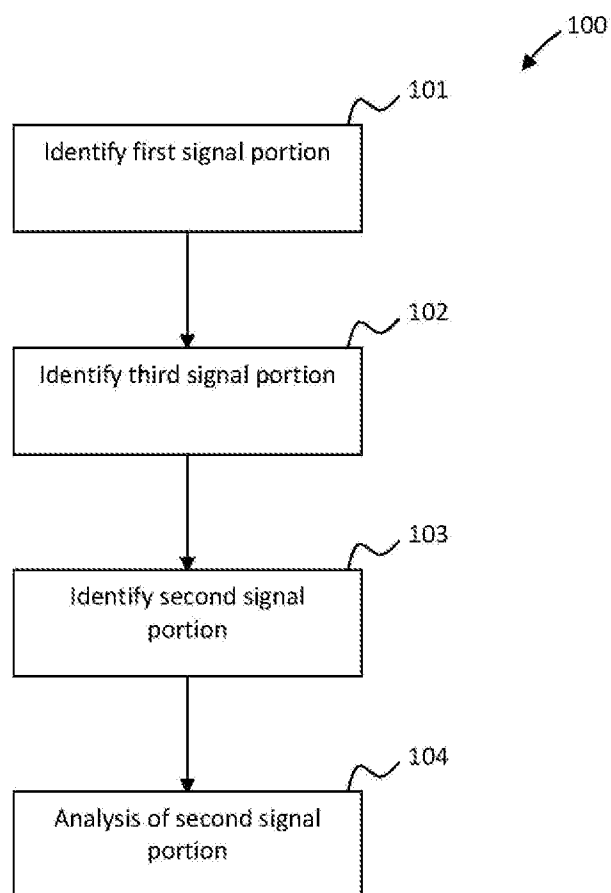
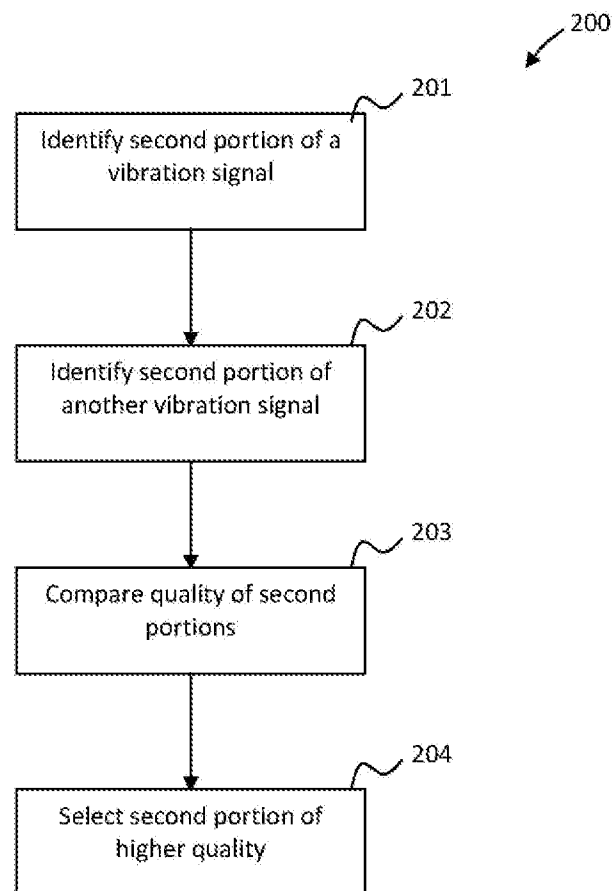


Fig. 3

4/12

**Fig. 4**

5/12

Fig. 5

6/12

4b

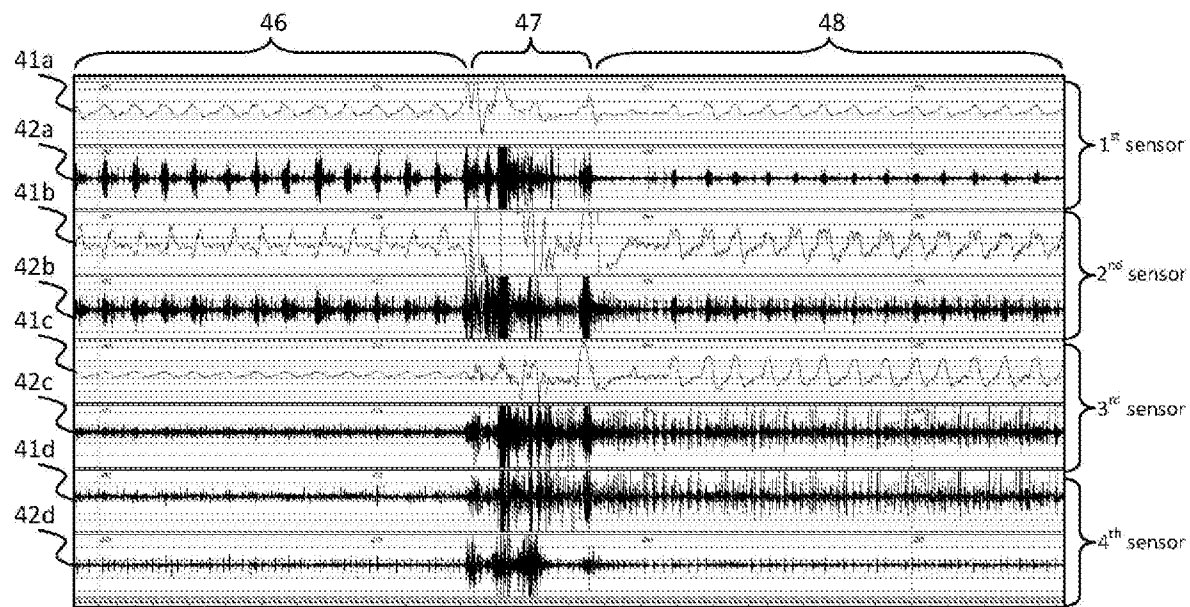


Fig. 6a

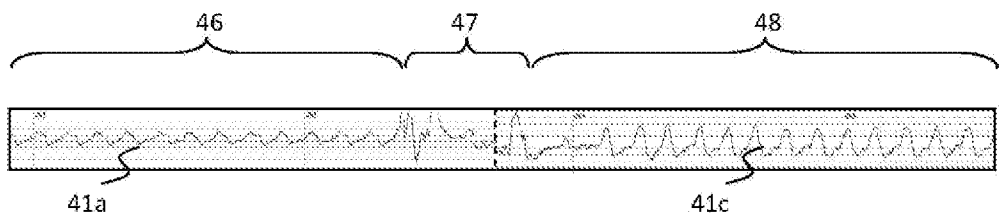


Fig. 6b

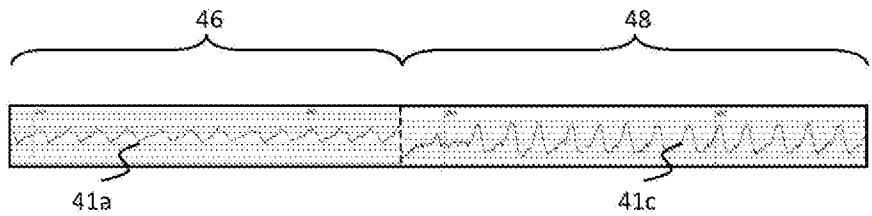
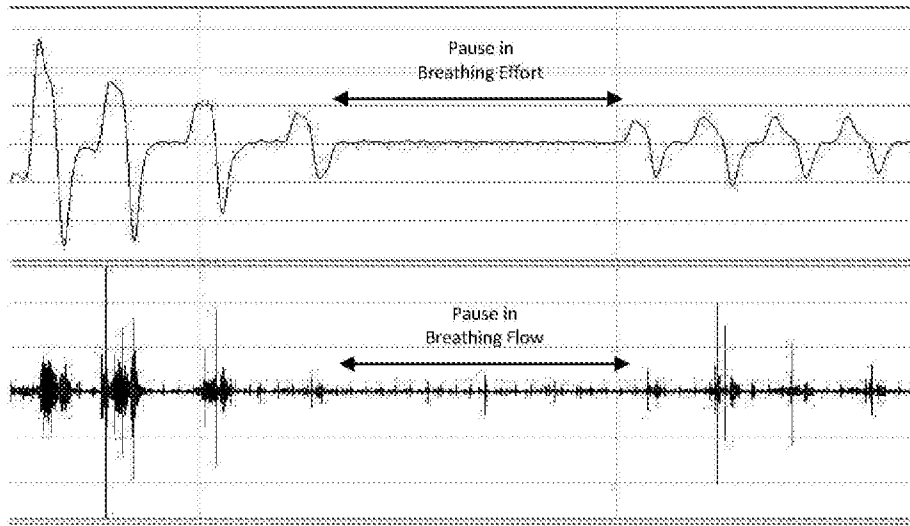



Fig. 6c

7/12

Central Apnea


**Fig. 7a**

Obstructive Sleep Apnea

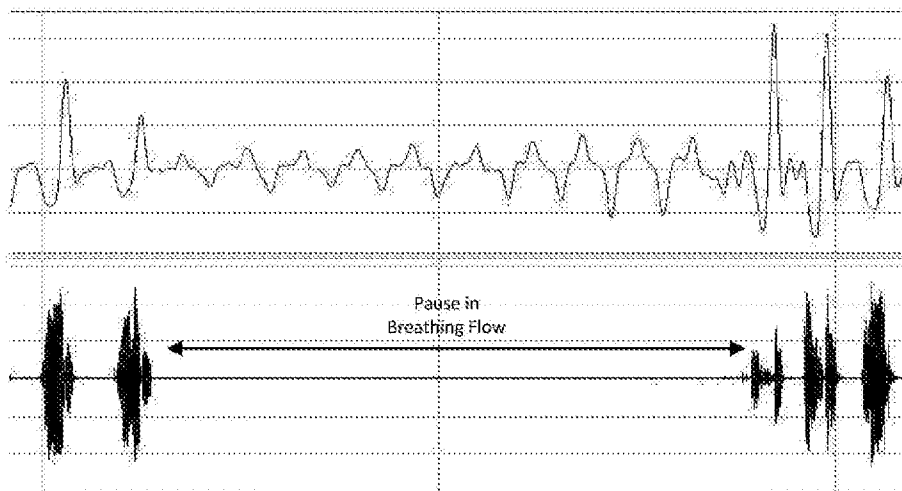
**Fig. 7b**

8/12


Mixed Apnea

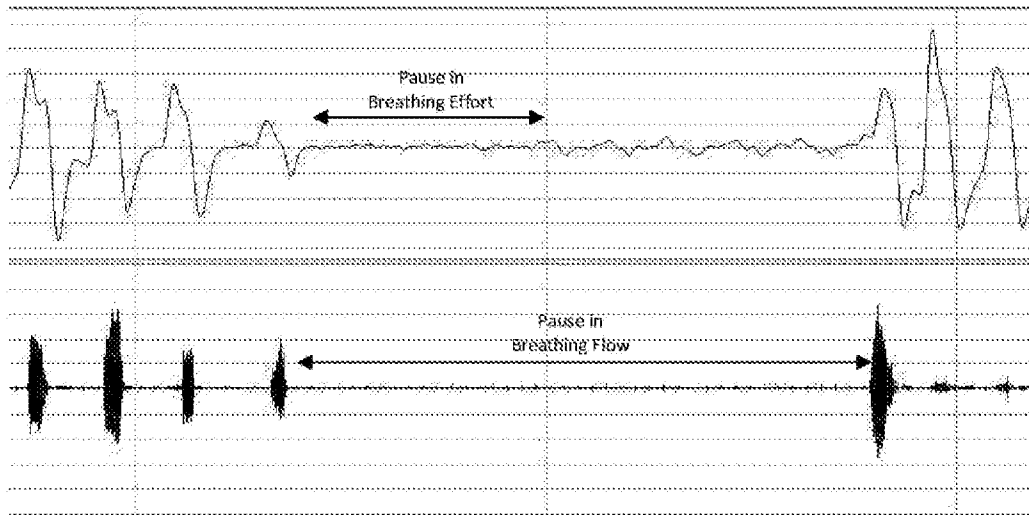**Fig. 7c**

Hypopnea

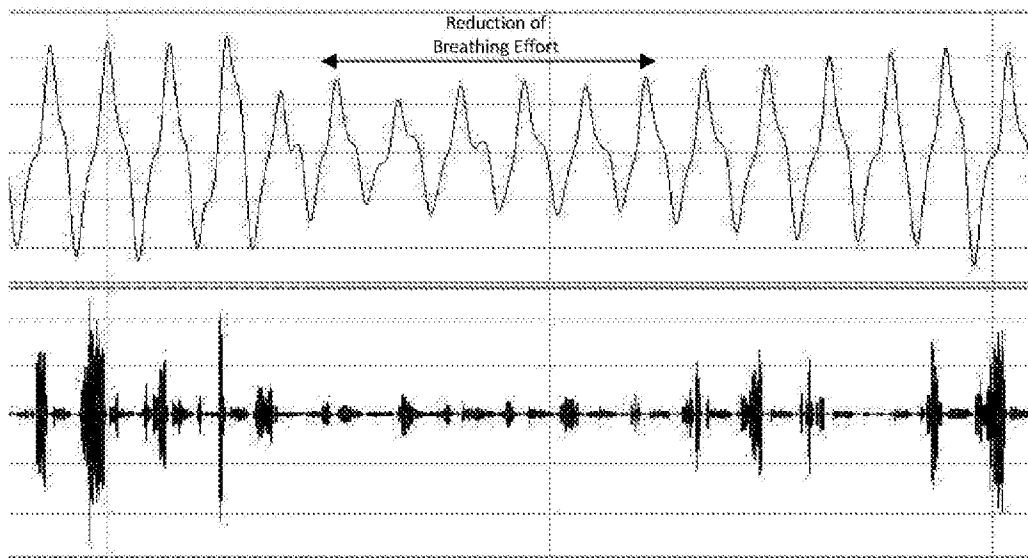**Fig. 7d**

9/12

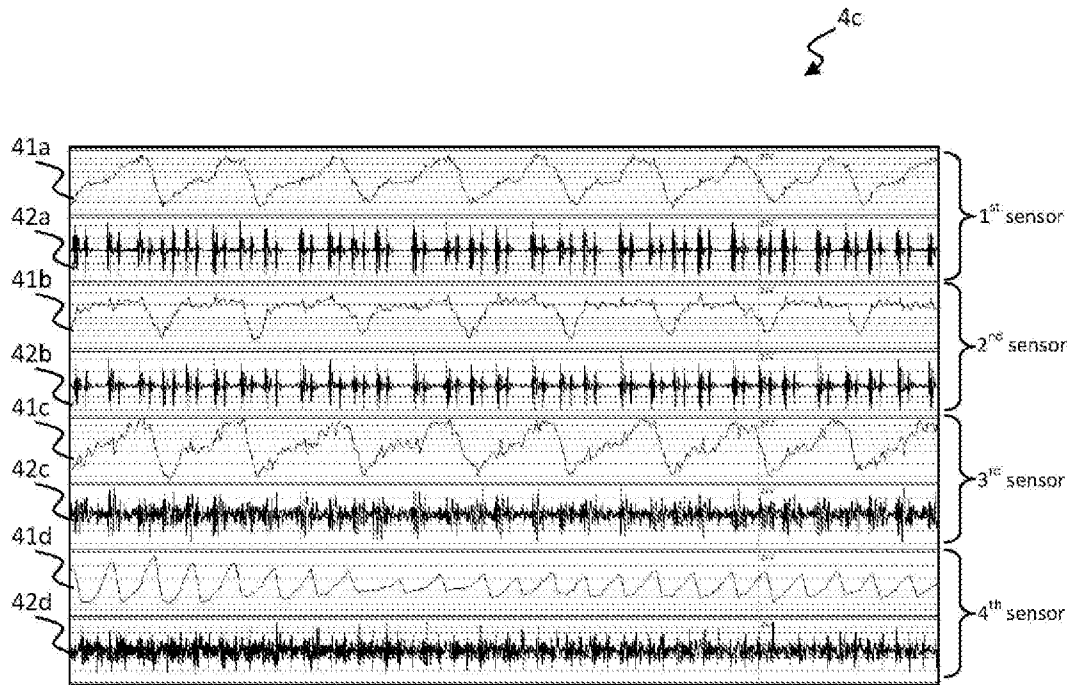**Fig. 8**

11/12

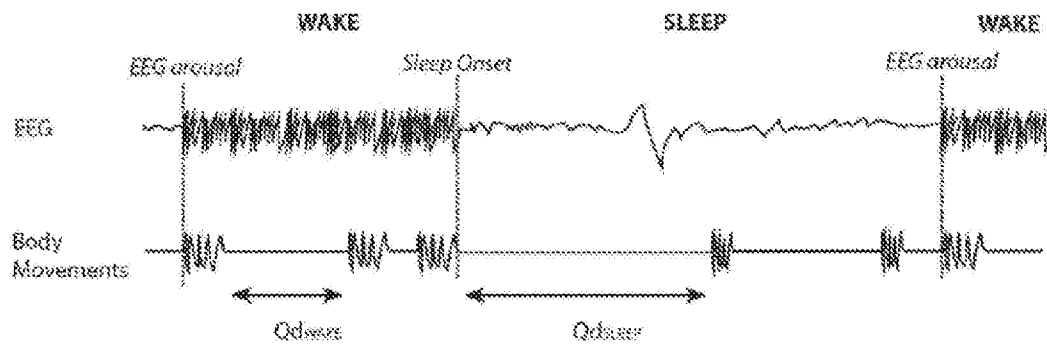


Fig. 11

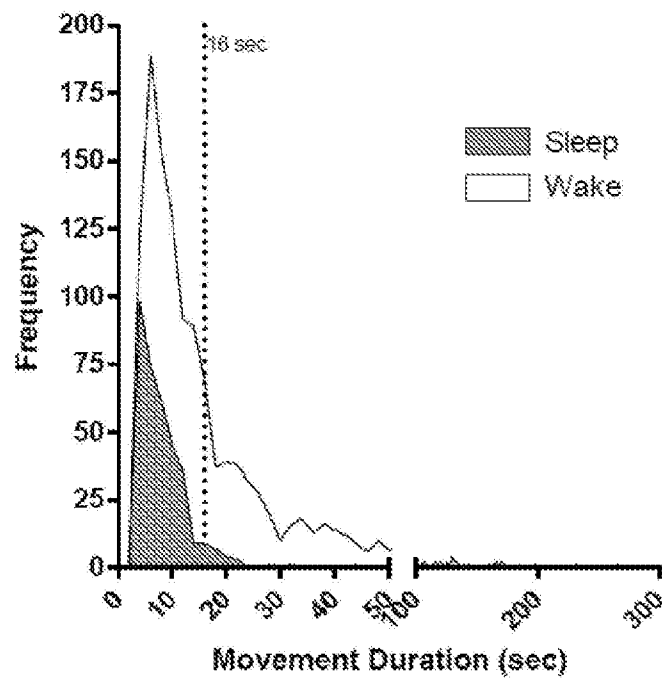
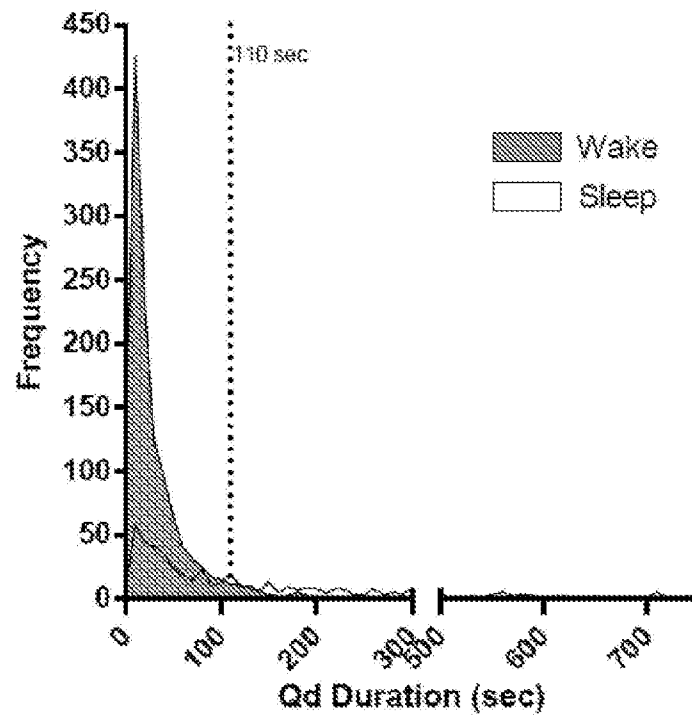


Fig. 12

12/12

Fig. 13

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2014/050440

A. CLASSIFICATION OF SUBJECT MATTER		
A61B 5/113 (2006.01) A61B 5/11 (2006.01) A61B 5/103 (2006.01) A61B 5/08 (2006.01) A61B 5/0205 (2006.01) A61B 7/04 (2006.01) A61B 5/00 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
Databases: EPODOC, WPI, TXTE: IPC and CPC A61B5/02/LOW, A61B5/4806/LOW, A61B5/68, A61B5/6887, A61B5/72/LOW, A61B5/11, A61B5/08/LOW, A61B5/-, G06G19/- & Keywords (sensor+, vibrat+, mov+ activ+, awake, sleep+, rest+, quiescen+, non_contact+, passive+, breath+, respirat+, apne+, heart+, mat, mattress, chair+, artifact, noise) and like terms.		
Espacenet Database: Applicant name search.		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	
☒ Further documents are listed in the continuation of Box C ☒ See patent family annex		
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 25 February 2015		Date of mailing of the international search report 25 February 2015
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustalia.gov.au		Authorised officer Kalpana Narayan AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. + 61 3 99359632

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/AU2014/050440
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5479939 A (OGINO) 02 January 1996 See figures 8-11, 13a-b and col. 2 lines 45-67, col. 8 lines 47-53, col. 9 line 38-col. 10 line 9, col. 12 line 5	1-10, 14-16, 19-21
X	US 2012/0184825 A1 (BEN DAVID) 19 July 2012 See figures 1-2, paragraphs [0034-0048], [0060-0100]	1-16, 18-21
X	WO 2004/045407 A1 (HOANA MEDICAL, INC.) 03 June 2004 See figures 1A, 2A-F and page 13 lines 11-23, page 19 lines 23-29, page 27 lines 13-22, page 29 line 23-page 30 line 18, page 26 lines 8-29 and claim 18	1-11, 14-17, 19-21
X	US 2010/0030118 A1 (HIEI ET AL.) 04 February 2010 See figures 1-2, 4-7 and paragraphs 0008-0009, [0039-0040], [0053-0063].	1-5, 14-15, 19-21
X	WO 2012/037614 A1 (SONOMEDICAL PTY LTD) 29 March 2012 See figures 2-3 and page 6 lines 7-17, page 9 line 25-page 10 lines 3-21, page 14 lines 4 and 17-30, page 16 lines 12-27, page 18 lines 24-27, page 19 lines 6-14, page 20 lines 7-10, page 23 line 17- page 24 line 8, page 27 line 13- page 31 line 16, page 32 lines 8-21 and claim 1	1-21
A	US 5479932 A (HIGGINS ET AL.) 02 January 1996 See whole document	1-21

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/AU2014/050440	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
US 5479939 A	02 January 1996	CA 2056370 A1	10 Sep 1991
		EP 0476138 A1	25 Mar 1992
		EP 0476138 B1	19 Nov 1997
		EP 0778003 A2	11 Jun 1997
		JP H0428352 A	30 Jan 1992
		JP 2817358 B2	30 Oct 1998
		JP H03261456 A	21 Nov 1991
		JP 2844813 B2	13 Jan 1999
		JP H03258246 A	18 Nov 1991
		JP 3099338 B2	16 Oct 2000
		JP H0453535 A	21 Feb 1992
		KR 940008158 B1	07 Sep 1994
		US 5724990 A	10 Mar 1998
		US 5902255 A	11 May 1999
		WO 9113585 A1	19 Sep 1991
US 2012/0184825 A1	19 July 2012		
WO 2004/045407 A1	03 June 2004	AU 2003291808 A1	15 Jun 2004
		AU 2003291808 B2	13 Aug 2009
		CA 2505746 A1	03 Jun 2004
		CN 1731953 A	08 Feb 2006
		EP 1562474 A1	17 Aug 2005
		JP 2006512112 A	13 Apr 2006
		SG 155772 A1	29 Oct 2009
		US 2004111045 A1	10 Jun 2004
		US 7666151 B2	23 Feb 2010
US 2010/0030118 A1	04 February 2010	US 8114033 B2	14 Feb 2012
		CN 101528127 A	09 Sep 2009
		CN 101528127 B	02 Jan 2013
		JP 4103925 B1	18 Jun 2008
		JP 2008142238 A	26 Jun 2008
		WO 2008069017 A1	12 Jun 2008
WO 2012/037614 A1	29 March 2012	AU 2011305063 A1	02 May 2013
		EP 2618734 A1	31 Jul 2013
		JP 2013541973 A	21 Nov 2013
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT Information on patent family members		International application No. PCT/AU2014/050440	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2013310657 A1	21 Nov 2013
US 5479932 A	02 January 1996	None	
End of Annex			
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001. Form PCT/ISA/210 (Family Annex)(July 2009)			

专利名称(译)	用于监测受试者的生理活动的系统和方法		
公开(公告)号	EP3082596A1	公开(公告)日	2016-10-26
申请号	EP2014871472	申请日	2014-12-19
[标]申请(专利权)人(译)	SONOMEDICAL		
申请(专利权)人(译)	SONOMEDICAL PTY LTD		
当前申请(专利权)人(译)	SONOMEDICAL PTY LTD		
[标]发明人	SULLIVAN COLIN EDWARD SPENCER PETER CHARLES NORMAN MARK BRADLEY		
发明人	SULLIVAN, COLIN EDWARD SPENCER, PETER CHARLES NORMAN, MARK BRADLEY		
IPC分类号	A61B5/113 A61B5/11 A61B5/103 A61B5/08 A61B5/0205 A61B7/04 A61B5/00		
CPC分类号	A61B5/0205 A61B5/024 A61B5/113 A61B5/4809 A61B5/4818 A61B5/6892 A61B5/7221 A61B5/7235 A61B2562/0204		
代理机构(译)	POTTER CLARKSON LLP		
优先权	2013905017 2013-12-20 AU		
其他公开文献	EP3082596A4		
外部链接	Espacenet		

摘要(译)

公开了一种系统和相关方法，用于监测受试者的生理活动。一个或多个传感器定位在支撑件中或支撑件上，支撑件适于接收对象，至少第一个传感器适于产生指示对象随时间移动的第一信号。处理装置适于识别第一信号的第一，第二和第三部分。第一和第三部分分别对应于第一和第三时间段，在此期间受试者改变身体在支撑物上的位置。第二部分对应于第一和第三时间段之间的第二时间段，在此期间，支架上的受试者的身体位置基本上没有变化。