



(11)

EP 3 101 712 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

10.01.2018 Bulletin 2018/02

(51) Int Cl.:

H01M 2/10 (2006.01)	A61B 7/00 (2006.01)
H01M 6/52 (2006.01)	H05K 5/00 (2006.01)
H05K 7/00 (2006.01)	A61B 5/01 (2006.01)
A61B 5/0408 (2006.01)	A61B 5/00 (2006.01)
H01M 6/02 (2006.01)	H01M 10/54 (2006.01)

(21) Application number: **15170714.8**

(22) Date of filing: **04.06.2015**

(54) BATTERY OPERATED DEVICE AND BATTERY REMOVAL METHOD

BATTERIEBETRIEBENE VORRICHTUNG UND BATTERIEENTFERNUNGSVERFAHREN

DISPOSITIF FONCTIONNANT SUR BATTERIE ET PROCEDE D'ELIMINATION DE BATTERIE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

• **van Acht, Victor**

3001 Leuven (BE)

• **Vandecasteele, Marianne**

3001 Leuven (BE)

(43) Date of publication of application:

07.12.2016 Bulletin 2016/49

(74) Representative: **Patent Department IMEC**

IMEC vzw

Patent Department

Kapeldreef 75

3001 Leuven (BE)

(73) Proprietor: **Stichting IMEC Nederland**

5656 AE Eindhoven (NL)

(72) Inventors:

• **de Francisco Martin, Ruben**

3001 Leuven (BE)

(56) References cited:

EP-A1- 2 465 415

WO-A1-2009/036348

WO-A1-2015/056027

GB-A- 2 487 758

US-A- 5 948 006

US-A- 6 144 749

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] This invention relates to the field of battery operated devices, and in particular devices which are disposable after use.

Background

[0002] There are numerous examples of battery operated devices. When a device wears out, is broken, or has served its purpose and needs to be discarded (e.g. for hygienic reasons), it is typically necessary to remove the battery for separate disposal and recycling. Indeed, there are regulations which require proper disposal of batteries.

[0003] The proper disposal of the battery requires the battery to be removed from its battery compartment, and this can be an inconvenience for users, or it may even be difficult for users as a result of their poor eyesight or poor manual dexterity. Typically, a battery compartment has a screw closure or a slidable cover, and when the closure or cover is removed, the battery needs to be prized out of its compartment. Each of these operations can present difficulties for some users, and some designs also require the use of tools.

[0004] One example of a disposable device is a device for ambulatory monitoring of vital signs (such as ECG, etc.). In such devices, there is a trend that all electrodes are integrated into a single disposable patch, on which a re-usable electronic module can be clipped. Typically, the electronic module has a rechargeable battery that has to be re-charged by the user prior to applying it on a patch. Alternatively, a non-rechargeable (called "primary") battery can be inserted in the electronic module.

[0005] In a hospital environment non-rechargeable batteries are preferred over re-chargeable batteries because of the handling required to keep recharging batteries charged when not in use, and reliability issues of rechargeable batteries after many times of use.

[0006] A problem with using non-rechargeable batteries in this application is the additional handling which is required by the user. First, the user must insert a fresh battery in the electronic module, and second the user must attach the electronic module to the patch. There is then the disposal issue already mentioned above after the disposable device has been used.

[0007] A partial solution for this problem that has already been proposed is to integrate a primary battery in the patch with the electrodes. In this way it is guaranteed that with every patch also a fresh battery is applied, and only one initial action is required by the user, namely attaching the electronic module to the patch with its integrated battery.

[0008] The patch is intended to be used only by one user, for hygienic reasons. When disposing of the patch with its integrated battery, the battery thus still needs to

be separated from the patch with the electrodes so it can be disposed of properly.

[0009] This is just one example of a battery operated device which presents inconvenience to a user in disposing of the battery. There are numerous other examples, where a device is only intended to be used for a short duration (possible even shorter than the life of the battery) and which therefore requires the battery to be disposed of by the user more often than in a device which is at least used until the battery is fully drained. US5958006 discloses a battery operated device, comprising:

a battery compartment; a battery in the battery compartment; and

an electric component powered by the battery, wherein the battery compartment is mounted on a deformable base and comprises a top surface and a method of removing a battery from a battery compartment of a battery operated device, the method comprising: extracting the battery through an opening of the battery compartment.

[0010] There is therefore a need for a design which enables easy removal of a battery from a battery operated device.

Summary

[0011] The invention is defined by the claims.

[0012] According to an aspect of the invention, there is provided a battery operated device, comprising: a battery compartment; a battery in the battery compartment; and an electric component powered by the battery, wherein the battery compartment is mounted on a deformable base and comprises a top surface which is adapted to be ruptured by deforming the deformable base, thereby enabling removal of the battery from the battery compartment.

[0013] This device enables removal of the battery by deforming the bottom of the battery compartment, for example by pushing the battery out of the top of the battery compartment by pushing from beneath. This operation is for example analogous to removing a drug capsule from a blister package. Note that the top of the battery compartment may be at the top of the overall device, but equally it may be at the bottom of the overall device. Thus, the "top" of the battery compartment is to be understood as meaning an exposed face of the battery compartment, beneath which lies the battery.

[0014] The device may comprise: a deformable plastic substrate; a battery receiving location having an upwardly facing electrical contact for contacting a lower contact of the battery; and a rupturable foil arrangement over the battery which forms the top surface, having a downwardly facing electrical contact for contacting an upper contact of the battery.

[0015] The blister-type package thus incorporates electrical contacts for contacting the top and bottom faces

of the battery. The flexible foil for example has a conducting layer, such as an aluminum foil layer, for contacting the battery, and it may additionally have an insulating cover layer so that the outside of the device is electrically insulated.

[0016] The deformable plastic substrate may comprise a PET foil.

[0017] The battery receiving location may comprise a locally thinner portion or locally removed portion of the deformable plastic substrate.

[0018] In this way, the substrate does not all need to be sufficiently deformable to enable the battery to be removed. A local part may be thinner or removed. If there is a removed part of the substrate, there will of course be another layer beneath the substrate which then supports the battery in the substrate opening. This another layer may be a metal foil which provides the electrical connection to the lower battery contact terminal.

[0019] Printed conductor tracks may be provided over the deformable plastic substrate for making electrical connection between the upwardly facing electrical contact and the electric component and between the downwardly facing electrical contact and the electric component.

[0020] These conductor tracks may be on one or both sides of the deformable plastic substrate.

[0021] The battery for example comprises a disk having electrical contacts at opposite ends of the disk. This may be a well-known coin cell battery.

[0022] The battery is for example a non-rechargeable battery.

[0023] The device typically has an expected period of use which is equal to or shorter than the lifetime of the battery. In particular, as the device is damaged by removing the battery, it is not intended to reuse the device. There are many different devices which are for one use only. This may be for hygiene reasons for medical devices, or it may be because the device is expected to wear out before the battery expires, for example in a wearable application. For example, a monitoring device in a shoe may have a battery life which exceeds the expected life of the shoe itself.

[0024] In some examples, the device comprises a wearable health monitoring device. One set of example is a patch for contact with the skin of a user. A specific example is an ECG monitoring patch.

[0025] In the case of a monitoring patch device, the device may comprise: a substrate with a patterned conductor arrangement on each side, the patterned conductor arrangement on one side defining patch electrodes and the patterned conductor arrangement on the other side defining electrical connector tracks, wherein: connection vias are provided through the substrate; or the patterned conductor arrangements together form a wrap-around layer which is foldable.

[0026] There are thus various options for making electrical connections to conductors on both sides of a substrate. The foldable design may fold over on itself, so that

the substrate of the patterned conductor itself defines the overall device substrate. Alternatively, the foldable patterned conductor may be folded over an intermediate substrate.

[0027] Again in the case of a monitoring patch device, the device may comprise: a disposable patch part comprising: skin contact electrodes on one side of a deformable substrate, and the battery compartment on the opposite side of the deformable substrate; and an electrical connection port on the opposite side of the deformable substrate, wherein the electrical component comprises a re-usable electronics module which connects to the electrical connection port.

[0028] This provides a plug-in electronics module, which can be re-used after the patch is disposed of. The removal of the electronics module is a simple unplug operation and the removal of the battery for separate disposal is a simple blister pack type removal operation.

[0029] According to another aspect of the invention, there is provided a method of removing a battery from a battery compartment of a battery operated device, the method comprising: rupturing a top surface of the battery compartment by deforming a deformable base of the battery compartment, and removing the battery from the battery compartment.

[0030] This method gives a simple operation for a user to dispose of a battery correctly when use of the battery operated device is at an end.

[0031] A method of disposing of a battery operated device is also provided, comprising, at the end of use of the device, the end of use being at the end or before the end of the battery lifetime: removing the battery using the method as defined above; and separately disposing of the device and the battery.

Brief description of the drawings

[0032] Examples of the invention will now be described in detail, with reference to the accompanying drawings, in which:

Figure 1 illustrates a generic electrical device according to a first embodiment of the invention.

Figure 2 illustrates a patch type medical monitoring device according to a second embodiment of the invention.

Figure 3 shows a first example of electrical connector arrangement.

Figure 4 shows a second example of electrical connector arrangement.

Detailed description of the drawings

[0033] There is provided a battery operated device in which a battery is provided in a battery compartment with a top surface which can be ruptured by deforming the base of the compartment, to enable removal of the battery from the battery compartment. In this way, a battery is

provided in a blister pack type enclosure. This enables easy removal of the battery for suitable disposal.

[0034] Figure 1 shows a general device according to an embodiment of the invention. The device comprises a battery compartment 10 with a battery 12 in the battery compartment. An electric component 14 is powered by the battery. The battery for example comprises a disk having electrical contacts at opposite ends of the disk. This may be a well-known non-rechargeable coin cell battery.

[0035] In this example, the device has a deformable substrate 16 for the whole of the device, and which itself defines a deformable base of the battery compartment 10. The substrate 16 has a conductor track arrangement shown as layer 18 which makes electrical connection between the bottom terminal of the battery 12 and a terminal of the component 14. This conductor arrangement 18 thus provides an upwardly facing electrical contact for contacting a lower contact of the battery 12.

[0036] The battery compartment 10 has a top surface 20 which can be ruptured by deforming the base. The top surface forms or includes a downwardly facing electrical contact for contacting an upper contact of the battery. The battery can then be removed from the battery compartment after rupturing the top surface. The top surface also provides electrical connection between the top terminal of the battery 12 and a (top) terminal of the component 14. In the simple design of Figure 1, the top terminal of the battery and the component 14 can each be a ground terminal, so that in its simplest form the top surface is a metal foil, which may even be exposed to the outside. This may be an aluminum foil layer. It may however have additional insulating layers so that there is no external electrical contact.

[0037] Figure 1 shows that the battery has an optional conductive gel, conductive adhesive or glue, or sponge or spring or the like 21 on each terminal for improving the electrical contact.

[0038] This device enables removal of the battery 10 by deforming the bottom of the battery compartment, for example pushing the battery out of the top of the battery compartment by pushing from beneath. This operation is analogous to removing a drug capsule from a blister package.

[0039] The substrate 16 may be a deformable plastic, such as PET.

[0040] This general outline of the device structure applies to many different types of device. However, the invention is of particular interest for devices which have an expected period of use which is equal to or shorter than the lifetime of the battery. Thus, at the end of the battery life, or before, the device has completed its function and is to be discarded. The device thus may be a disposable product. The device is damaged by removing the battery (by rupturing the top of the battery compartment), so it is not intended to be re-used.

[0041] Some more detailed examples will now be given, which relate to a wearable health monitoring device.

One example of particular interest is a patch monitor for contact with the skin of a user, for ECG monitoring. Other skin contact devices are of course known, such as for sweat monitoring, for temperature monitoring, or detecting target chemicals.

[0042] Figure 2 shows an example of an ECG monitoring patch, in cross sectional view through the battery compartment, and in plain view.

[0043] The same components as in Figure 1 are given the same reference numbers. In the example of Figure 2, the battery is received in an opening 22 in the substrate 16. Beneath the PET substrate 16 is an electrode layer 24 which defines a set of patch electrodes 26. The electrode layer 24 is a metal foil which provides the electrical connection to the lower battery contact terminal. An insulating cover layer 28, such as silicone covers the electrode tracks formed by layer 24 but leaves the patch electrodes 26 exposed.

[0044] The substrate 16 thus does not need to be sufficiently flexible to enable the battery to be removed, since this can be achieved based on the deformability of the portions of the layers 24 and 28 which define the base of the battery compartment 10. The substrate will instead have its properties selected for the desired ability to form the patch into a desired shape over the skin of the user. The substrate may have a local thinner part for the battery compartment rather than a removed part.

[0045] The connection between the lower electrode layer 24 and the electrical component 14 may be made through the substrate, or else the top and bottom electrode layers 20, 24 may be a single layer which wraps around the edge of the device, and thus provides all the required interconnections without requiring any vias.

[0046] The electrical tracks may be printed conductor tracks, either printed directly onto the substrate or else printed onto their own carrier layer which is then applied to the substrate. As is clear from the examples of Figures 1 and 2, conductor tracks may be on one or both sides of the deformable plastic substrate.

[0047] The example of Figure 2 has a patterned conductor arrangement on each side of the substrate, with the lower side defining at least patch electrodes and the patterned conductor arrangement on top side defining electrical connector tracks.

[0048] As explained above, one design of ECG patch monitoring device which is currently favored has a non-rechargeable battery and a re-usable electronics module. For this purpose, the electrical component 14 of Figure 2 is implemented as an electronics module which has an electrical connector 30 which plugs into an electrical connection port 32. This may use a standard SD connector (as used in memory cards), although any other suitable connector may be used.

[0049] This provides a plug-in electronics module, which can be re-used after the patch is disposed of. The removal of the electronics module is a simple unplug operation and the removal of the battery for separate disposal is a simple blister pack type removal operation.

[0050] Figure 3 shows an example of a single layer structure used to form the patch electrodes and the electronic module connections. The layer may itself form the substrate 16 so that it is wrapped around on itself, or it may be wrapped around a separate substrate layer. The layer structure has a lower portion 40 and an upper portion 42, with a fold tab 44 between them. The lower portion 40 carries the patch electrodes 26 and the top portion 42 carries the external electrical connector 30 for receiving the electronics module 14.

[0051] In this example the battery receiving portion 46 is provided on the upper portion 42 and an electrical conductor 48 is routed to the base of the battery receiving portion. A foil cover part 50 is provided over the battery compartment, which makes contact to another electrical conductor 52. In this way, the top and bottom electrical contacts of the battery connect to the electric circuit. The layer structure is covered with an insulating layer, such as silicone, which only leaves exposed the battery contacts and the patch electrodes.

[0052] The single layer structure avoids the need to use vias to connect between opposite sides of the device. The conductive tracks may be printed on a PET base by screen printing silver ink. The ink is then cured, for example at a temperature of around 120 degrees Celsius. The electrodes 26 can be made by screen printing silver chloride ink and then curing. Finally the SD card holder (or other connector arrangement) 30 is mounted on the tracks as desired.

[0053] The battery is fitted and the cover foil 50 for the blister pack type battery compartment is then applied.

[0054] The encapsulation with silicone or other insulator may take place before or after forming the battery compartment. If the encapsulation is before applying the cover foil 50, then the electrodes 48, 25 are left exposed. If the encapsulation is applied after applying the cover foil, then the patch electrodes and the battery compartment top cover may be left exposed so that the battery compartment top cover remains easily ruptured.

[0055] Figure 4 shows another similar foldable design in which patch electrodes regions 60 are separate from the main body so that they may be positioned more freely. They connect to the main body with flexible leads 62.

[0056] In order to remove the battery, the top surface of the battery compartment is ruptured by deforming the base of the battery compartment, and removing the battery from the battery compartment. This may be carried out as part of a method of disposing of the battery operated device at the end of use of the device. This end of use may be being at the end or before the end of the battery lifetime.

[0057] It will be understood from the description above that the invention can be applied to a variety of devices, and only detailed use has been described. There is a general need to dispose of batteries separately from other electrical components, so this invention is of interest for all disposable products, particularly, single use or limited time use products. The invention generally makes

use of a blister pack type concept, and many different designs of conductor tracks and other electrical connections to the battery compartment will be apparent to those skilled in the art.

5 [0058] Various other modifications will be readily apparent to those skilled in the art. In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage. Any reference signs in the claims should not be construed as limiting the scope.

15

Claims

1. A battery operated device, comprising:

20

a battery compartment;
a battery in the battery compartment; and
an electric component powered by the battery, the battery compartment is mounted on a deformable base and comprises a top surface
25 **characterized in that** the top surface is adapted to be ruptured by deforming the deformable base, thereby enabling removal of the battery from the battery compartment.

25

30

2. A device as claimed in claim 1, comprising:

35

a deformable plastic substrate;
a battery receiving location having an upwardly facing electrical contact for contacting a lower contact of the battery; and
35 a flexible foil arrangement over the battery which forms the top surface, having a downwardly facing electrical contact for contacting an upper contact of the battery.

35

40

3. A device as claimed in claim 2, wherein the deformable plastic substrate comprises a PET foil.

45

4. A device as claimed in claim 2 or 3, wherein the battery receiving location comprises a locally thinner portion or locally removed portion of the deformable plastic substrate.

50

5. A device as claimed in claim 2, 3 or 4, comprising printed conductor tracks over the deformable plastic substrate for making electrical connection between the upwardly facing electrical contact and the electric component and between the downwardly facing electrical contact and the electric component.

55

6. A device as claimed in any preceding claim, wherein the battery comprises a disk having electrical contacts at opposite ends of the disk.

7. A device as claimed in any preceding claim, wherein the battery is a non-rechargeable battery.
8. A device as claimed in any preceding claim, wherein the device has an expected period of use which is equal to or shorter than the lifetime of the battery.
9. A device as claimed in claim 8, wherein the device comprises a wearable health monitoring device.
10. A device as claimed in claim 9, wherein the device comprises a patch for contact with the skin of a user.
11. A device as claimed in claim 10, wherein the device comprises an ECG monitoring patch.
12. A device as claimed in claim 10 or 11, comprising:
- a substrate with a patterned conductor arrangement on each side, the patterned conductor arrangement on one side defining patch electrodes and the patterned conductor arrangement on the other side defining electrical connector tracks, wherein:
- connection vias are provided through the substrate; or
- the patterned conductor arrangements together form a wrap-around layer which is foldable.
13. A device as claimed in claim 9, 10 or 11, comprising:
- a disposable patch part comprising:
- skin contact electrodes on one side of a deformable substrate, and the battery compartment on the opposite side of the deformable substrate; and
- an electrical connection port on the opposite side of the deformable substrate,
- wherein the electrical component comprises a re-usable electronics module which connects to the electrical connection port.
14. A method of removing a battery from a battery compartment of a battery operated device, the method comprising:
- rupturing a top surface of the battery compartment by deforming a deformable base of the battery compartment, and removing the battery from the battery compartment.
15. A method of disposing of a battery operated device, comprising, at the end of use of the device, the end of use being at the end or before the end of the battery

lifetime:

removing the battery using the method as claimed in claim 14; and

separately disposing of the device and the battery.

Patentansprüche

1. Batteriebetriebenes Gerät, umfassend:

ein Batteriefach;

eine Batterie im Batteriefach; und

eine elektrische Komponente, die durch die Batterie mit Energie versorgt wird,

wobei das Batteriefach an einer verformbaren Basis angebracht ist und eine obere Oberfläche umfasst, **dadurch gekennzeichnet, dass** die obere Oberfläche dazu geeignet ist, durch Verformen der verformbaren Basis zerbrochen zu werden, wodurch die Entnahme der Batterie aus dem Batteriefach ermöglicht ist.

2. Gerät nach Anspruch 1, umfassend:

ein verformbares Kunststoffsubstrat;

eine Batterieaufnahme mit einem nach oben gerichteten elektrischen Kontakt zum Kontaktieren eines unteren Kontakts der Batterie; und

eine flexible Folienanordnung über der Batterie, die die obere Oberfläche ausbildet, mit einem nach unten gerichteten elektrischen Kontakt zum Kontaktieren eines oberen Kontakts der Batterie.

3. Gerät nach Anspruch 2, wobei das verformbare Kunststoffsubstrat eine PET-Folie umfasst.

4. Gerät nach einem der Ansprüche 2 oder 3, wobei die Batterieaufnahme einen örtlich dünneren Abschnitt oder örtlich ausgenommenen Abschnitt des verformbaren Kunststoffsubstrats umfasst.

5. Gerät nach einem der Ansprüche 2, 3 oder 4, umfassend gedruckte Leiterbahnen über dem verformbaren Kunststoffsubstrat zum Herstellen von elektrischem Kontakt zwischen dem nach oben gerichteten elektrischen Kontakt und der elektrischen Komponente und zwischen dem nach unten gerichteten Kontakt und der elektrischen Komponente.

6. Gerät nach einem der vorhergehenden Ansprüche, wobei die Batterie eine Scheibe mit elektrischen Kontakten an gegenüberliegenden Enden der Scheibe umfasst.

7. Gerät nach einem der vorhergehenden Ansprüche, wobei die Batterie eine nicht wiederaufladbare Batterie ist.

8. Gerät nach einem der vorhergehenden Ansprüche, wobei das Gerät einen erwarteten Benutzungszeitraum aufweist, der gleich der oder kürzer als die Nutzlebensdauer der Batterie ist.

9. Gerät nach Anspruch 8, wobei das Gerät ein tragbares Gesundheitsüberwachungsgerät umfasst.

10. Gerät nach Anspruch 9, wobei das Gerät ein Pflaster zur Berührung mit der Haut eines Benutzers umfasst.

11. Gerät nach Anspruch 10, wobei das Gerät ein ECG-Überwachungspflaster umfasst.

12. Gerät nach einem der Ansprüche 10 oder 11, umfassend:

ein Substrat mit einer gemusterten Leiteranordnung auf jeder Seite, wobei die gemusterte Leiteranordnung auf einer Seite Pflasterelektroden definiert und die gemusterte Leiteranordnung auf der anderen Seite elektrische Verbinderbahnen definiert, wobei:

Verbindungsdurchkontaktierungen durch das Substrat vorgesehen sind; oder die gemusterten Leiteranordnungen zusammen eine Umwicklungsschicht ausbilden, die faltbar ist.

13. Gerät nach einem der Ansprüche 9, 10 oder 11, umfassend:

ein Wegwerfpflasterenteil, umfassend:

Hautkontaktelektroden auf einer Seite eines verformbaren Substrats und das Batteriefach auf der gegenüberliegenden Seite des verformbaren Substrats; und einen Stromverbindungsport auf der gegenüberliegenden Seite des verformbaren Substrats, wobei die elektrische Komponente ein wiederverwendbares Elektronikmodul umfasst, das zu Stromverbindungsport verbunden ist.

14. Verfahren zum Entnehmen einer Batterie aus einem Batteriefach eines batteriebetriebenen Geräts, das Verfahren umfassend:

Zerbrechen einer oberen Oberfläche des Batteriefachs durch Verformen einer verformbaren

Basis des Batteriefachs und Entnehmen der Batterie aus dem Batteriefach.

15. Verfahren zum Entsorgen eines batteriebetriebenen Geräts, umfassend, am Benutzungsende des Geräts, wobei das Benutzungsende am Ende oder vor dem Ende der Batterienutzlebensdauer ist:

Entnehmen der Batterie unter Anwendung des Verfahrens gemäß Anspruch 14; und separates Entsorgen des Geräts und der Batterie.

15 Revendications

1. Dispositif fonctionnant sur pile, comprenant :

un logement de pile;
une pile dans le logement de pile; et
un composant électrique alimenté par la pile;
le logement de pile étant monté sur une base déformable et comprenant une surface supérieure ;
caractérisé en ce que la surface supérieure est conçue pour être rompue par la déformation de la base déformable, ce qui permet de retirer la pile du logement de pile.

2. Dispositif selon la revendication 1, comprenant :

un substrat déformable en matière plastique ;
un endroit de réception de pile possédant un contact électrique orienté vers le haut pour la mise en contact avec un contact inférieur de la pile ; et
un arrangement sous la forme d'une feuille mince flexible par-dessus la pile, qui forme la surface supérieure, possédant un contact électrique orienté vers le bas pour la mise en contact avec un contact supérieur de la pile.

3. Dispositif selon la revendication 2, dans lequel le substrat déformable en matière plastique comprend une feuille mince en PET.

4. Dispositif selon la revendication 2 ou 3, dans lequel l'endroit de réception de pile comprend une portion localement plus mince ou une portion localement retirée du substrat déformable en matière plastique.

5. Dispositif selon la revendication 2, 3 ou 4, comprenant des pistes conductrices imprimées par-dessus le substrat déformable en matière plastique pour établir une connexion électrique entre le contact électrique orienté vers le haut et le composant électrique et entre le contact électrique orienté vers le bas et le composant électrique.

6. Dispositif selon l'une quelconque des revendications précédentes, dans lequel la pile comprend un disque possédant des contacts électriques aux extrémités opposées du disque.
7. Dispositif selon l'une quelconque des revendications précédentes, dans lequel la pile est une pile non rechargeable.
8. Dispositif selon l'une quelconque des revendications précédentes, dans lequel le dispositif possède une durée d'utilisation escomptée qui est égale ou inférieure à la durée de vie de la pile.
9. Dispositif selon la revendication 8, dans lequel le dispositif comprend un dispositif portatif de surveillance de la santé.
10. Dispositif selon la revendication 9, dans lequel le dispositif comprend un patch pour la mise en contact avec la peau d'un utilisateur.
11. Dispositif selon la revendication 10, dans lequel le dispositif comprend un patch de surveillance ECG.
12. Dispositif selon la revendication 10 ou 11, comprenant :
- un substrat présentant un arrangement de conducteurs imprimés de chaque côté, l'arrangement de conducteurs imprimés d'un côté définissant des électrodes de patch et l'arrangement de conducteurs imprimés de l'autre côté définissant des pistes de connexion électrique ; dans lequel :
- on prévoit des interconnexions de liaison à travers le substrat ; ou bien les arrangements de conducteurs imprimés forment ensemble une couche d'enveloppement qui est pliable.
13. Dispositif selon la revendication 9, 10 ou 11, comprenant :
- un élément sous la forme d'un patch à jeter, comprenant :
- des électrodes de contact cutané d'un côté d'un substrat déformable et le logement de pile sur le côté opposé du substrat déformable ; et un port de connexion électrique sur le côté opposé du substrat déformable ;
- dans lequel le composant électrique comprend un module électronique réutilisable qui se connecte au port de connexion électrique.
14. Procédé de retrait d'une pile à partir d'un logement de pile d'un dispositif fonctionnant sur pile, le procédé comprenant :
- la rupture d'une surface supérieure du logement de pile via une déformation d'une base déformable du logement de pile et le retrait de la pile à partir du logement de pile.
15. Procédé de mise au rebut d'un dispositif fonctionnant sur pile, comprenant le fait de, au terme de l'utilisation du dispositif, le terme d'utilisation se situant à la fin ou avant la fin de la durée de vie de la pile :
- retirer la pile en utilisant le procédé selon la revendication 14 ; et se débarrasser séparément du dispositif et de la pile.

FIG. 1

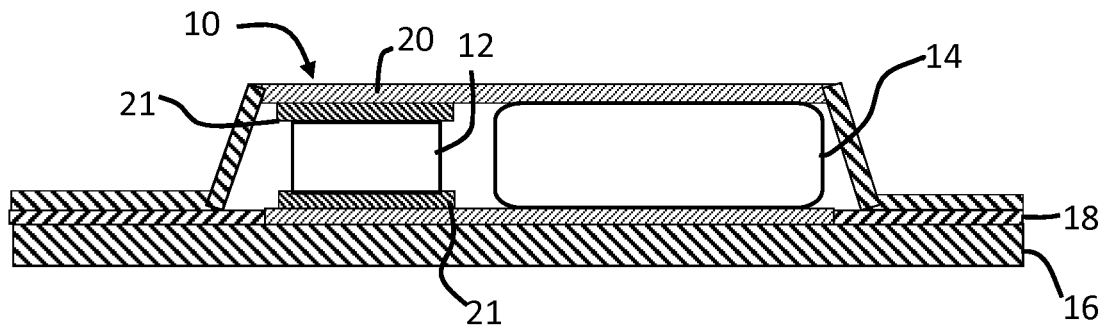


FIG. 2

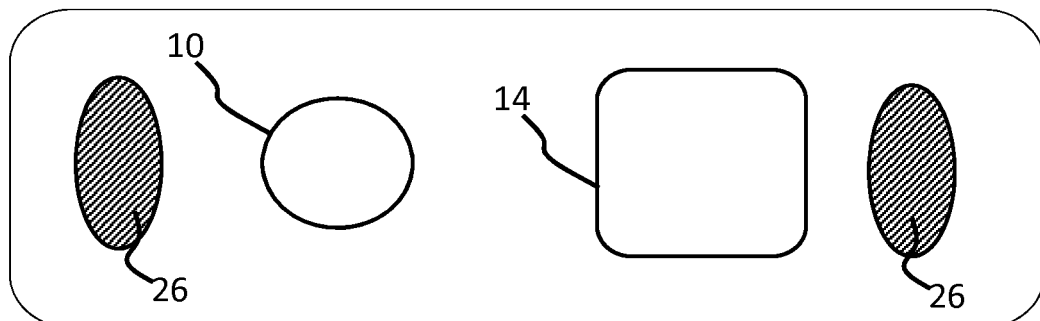
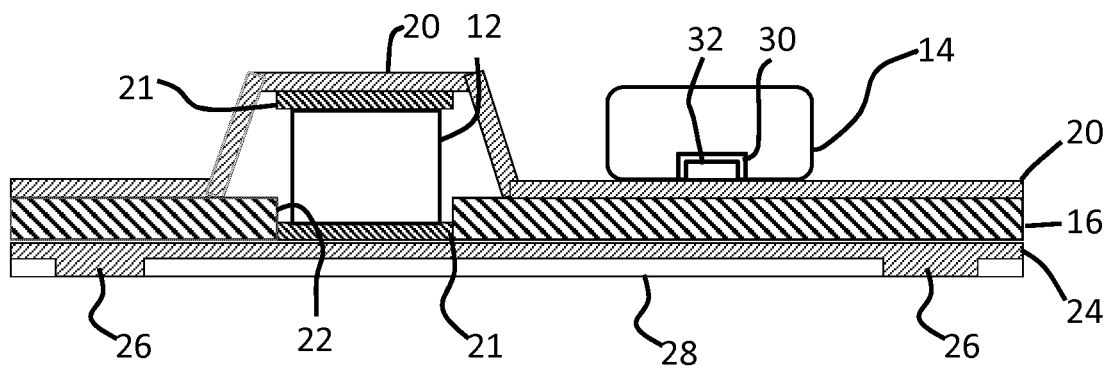


FIG. 3


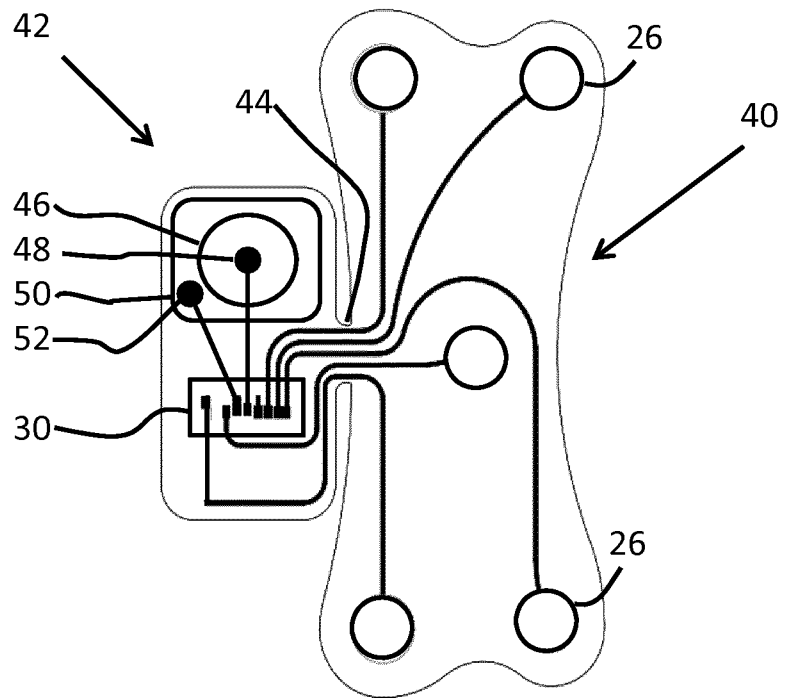


FIG. 4

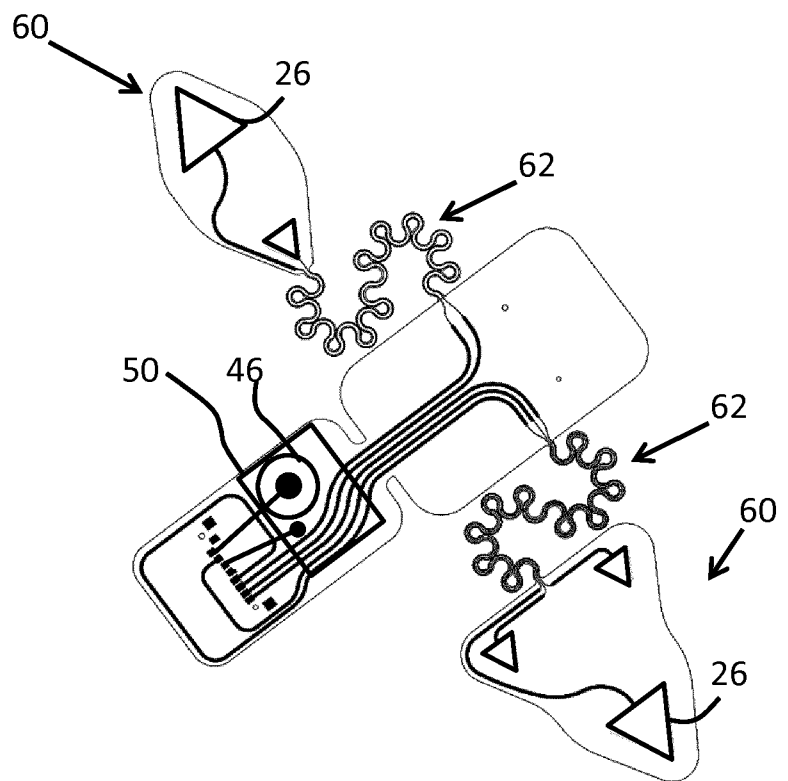

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5958006 A [0009]

专利名称(译)	电池供电装置和电池拆卸方法		
公开(公告)号	EP3101712B1	公开(公告)日	2018-01-10
申请号	EP2015170714	申请日	2015-06-04
[标]申请(专利权)人(译)	非盈利IMEC荷兰		
申请(专利权)人(译)	IMEC STICHTING NEDERLAND		
当前申请(专利权)人(译)	IMEC STICHTING NEDERLAND		
[标]发明人	DE FRANCISCO MARTIN RUBEN VAN ACHT VICTOR VANDECASTEELE MARIANNE		
发明人	DE FRANCISCO MARTIN, RUBEN VAN ACHT, VICTOR VANDECASTEELE, MARIANNE		
IPC分类号	H01M2/10 A61B7/00 H01M6/52 H05K5/00 H05K7/00 A61B5/01 A61B5/0408 A61B5/00 H01M6/02 H01M10/54		
CPC分类号	A61B5/04085 A61B5/04286 A61B2560/0406 A61B2562/164 H01M2/1022 H01M2/1044 H01M6/52 H01M10/54 Y02W30/84 A61B5/01 A61B5/0408 A61B5/4266 H01M2/1038 H01M6/02 H01M2220/30		
其他公开文献	EP3101712A1		
外部链接	Espacenet		

摘要(译)

提供一种电池操作的装置，其中电池设置在电池盒中，该电池室具有顶表面，该顶表面可以通过弯曲隔壁的底部而破裂，以使电池能够从电池盒中取出。以这种方式，电池设置在泡罩包装型外壳中。这使得能够容易地移除电池以进行适当的处理。

FIG. 1




FIG. 2

