



(11) **EP 2 948 111 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:

14.03.2018 Bulletin 2018/11

(21) Application number: **14743451.8**

(22) Date of filing: **21.01.2014**

(51) Int Cl.:

A61B 5/00 ^(2006.01)	A61B 5/1491 ^(2006.01)
A61F 7/00 ^(2006.01)	A61F 7/03 ^(2006.01)
A61N 1/04 ^(2006.01)	A61N 1/36 ^(2006.01)
A61N 5/06 ^(2006.01)	F24J 1/00 ^(0000.00)

(86) International application number:

PCT/US2014/012249

(87) International publication number:

WO 2014/116558 (31.07.2014 Gazette 2014/31)

(54) **HEATING DEVICE USING EXOTHERMIC CHEMICAL REACTION**

HEIZVORRICHTUNG MIT EINER EXOTHERMISCHEN CHEMISCHEN REAKTION

DISPOSITIF DE CHAUFFAGE UTILISANT UNE RÉACTION CHIMIQUE EXOTHERMIQUE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **23.01.2013 US 201313747584**

12.07.2013 US 201313940307

15.11.2013 US 201314081110

13.12.2013 US 201314106198

(43) Date of publication of application:

02.12.2015 Bulletin 2015/49

(73) Proprietors:

- **Isserow, Jonathan**
Basking Ridge, NJ 07920 (US)
- **Isserow, Laura**
Basking Ridge, NJ 07920 (US)

(72) Inventors:

- **Isserow, Jonathan**
Basking Ridge, NJ 07920 (US)
- **Isserow, Laura**
Basking Ridge, NJ 07920 (US)

(74) Representative: **Berggren Oy, Helsinki & Oulu**
P.O. Box 16

Eteläinen Rautatiekatu 10A
00101 Helsinki (FI)

(56) References cited:

US-A- 5 653 741	US-A- 5 667 864
US-A- 6 066 164	US-A1- 2002 026 226
US-A1- 2002 026 226	US-A1- 2003 004 558
US-A1- 2009 163 984	US-A1- 2011 201 984
US-A1- 2011 201 984	US-A1- 2011 309 774
US-A1- 2011 309 774	

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] The current invention relates to a wound or skin care treatment device and related methods. In particular, by using heating, nanotechnology lighting processes, and electrical stimulation, the current invention relates to a device and methods that may be used for treatment of a wound, injury, skin infection such as acne, ailment, or disease, as well as pre-treatment to prevent wound infections prior to surgery and maintaining normothermia during surgery.

Background of the Invention

[0002] Many kinds of diseases and accidents may cause harm to the human body, the resulting in pain, wounds, infections, and injuries require both swift and continuous treatments. The treatment of such wounds/injuries has been a crucial part of healthcare. Various methods and devices have been developed to improve the quality of care that may be provided in such treatments and the healing process. Among these approaches are temperature alternation techniques, such as the application of heat or coldness by different sources.

[0003] Application of heat, or coldness, or alternating temperature changes have been widely used in the treatment of wound, infection, pain, and injury for a very long time. In addition, the heating treatment may also prevent cutaneous/skin infections as well as preventing skin infection pre-operatively. Heating treatments such as heat pads are believed to cause the dilation of blood vessels, facilitate perfusion to the target tissues and cycling of blood, and sterilize the targeting area. Cold treatments such as ice pads reduce swelling and are used in pain management following injury.

[0004] The temperature altering treatments, especially the application of heat, are widely in use but there are still a number of general shortcomings. Wound healing involves a complex series of biochemical events, and is traditionally managed with low tech options. For example, previous heat applicators are generally bulky and difficult to fit onto small wounds or injuries at locations that are hard to access. Perioperative heat treatment, known to significantly reduce post operative wound infection, is currently not practically available because of a limitation in available devices that are portable and do not require bulky hardware for each individual patient to facilitate treatment. There is a distinct need for an easy to use portable inexpensive bandage device that can be applied perioperatively to all patients that is not limited by the resource of fixed, expensive hardware. In addition, the regular heating applicators are not long lasting, requiring frequent change of the applicator. Thirdly, some of the heat applicators are hard to reheat. The ability to provide consistent thermoregulation is critical to the prevention of infection as fluxes in temperature (i.e. too hot or not

hot enough) can have an adverse outcome in patient management.

[0005] In general, the existing heating application treatment devices are low in efficiency and high in waste of energy. These treatment devices cannot keep up with the development of new problems, such as the escalating crisis of multi-drug resistant infections including Methicillin-resistant *Staphylococcus aureus* (MRSA). The medical literature demonstrates significant reduction in post-operative wound infection in patients who received local warming prior to surgery for a 30 minute period with reduction in rates of wound infection from 14% in non-warmed patients to 5% in warmed patients (greater than 60% reduction in wound infection). It is critical that an easy to use device with thermoregulatory control is available to all patients undergoing surgery particularly in light of the escalating crisis of multi-drug resistant infections including Methicillin-resistant *Staphylococcus aureus* (MRSA). Further, theranostic and diagnostic sensors can be implemented to aid in wound care optimization for both acute and chronic wounds. This optimization can reduce hospital stay times, reduce costs, and prevent further infection(s). Therefore, the development of new technology is desirable and the current invention serves as a powerful alternative to the previous devices.

[0006] The application of light to the human body is the basis for phototherapy. These therapies have been used in the treatments of many ailments such as cancer, acne, and psoriasis. Similar to temperature therapies, the application of some types of lights, such as lasers, helps to promote circulation. Photodynamic therapies are also used. This form of phototherapy uses a non-toxic, non-reactive substance that when exposed to selected wavelengths of lighting becomes toxic and attacks the targeted cells. This is instrumental in being able to target a particular cell or area and have the advantage of leaving surrounding tissue unharmed. Light related therapy can kill many bacteria, fungi, and viruses.

[0007] However, the increasingly popular phototherapies has a number of general shortcomings as well. The current phototherapeutic models on the market for treating acne have a limited functionality, are small, hand held, and effective for only treating one pimple at a time. Depending on the person, this can end up taking an inordinate amount of time. There are larger models on the market, however, these models are also not form fitting and require a user to simply hold the device to the affected area for the prescribed amount of time. Thus, the user must remain in a fixed position for upwards of one hour and then change the position of the device to treat another area.

[0008] Nanotechnology stands at the vanguard of integrating science and engineering and it has undergone significant progress in recent years. By using materials having nanometer level dimensions and special physical characteristics, nanotechnology has proven to be a promising field of innovation. In particular, a number of improvements in nanotechnology using nanofibers, na-

notubes, and nano-particles have enabled the production of batteries that provide higher energy density, last longer, and/or recharge faster. In addition, nanofibers have been shown to be applicable in a number of disciplines such as material science, molecular biology, and medical sciences. Nevertheless, the use of nanofibers and nanotechnology batteries in medical devices, in particular treatment devices, has been scanty and leaves much to be desired. The current invention addresses the aforementioned needs.

[0009] Review of related technology:

US Patent Application 2008/0023394 discloses a medical filter material comprising a dispersion of nanofibers of thermoplastic polymer having a number average diameter of 1 to 500 nm wherein the ratio of single fibers with a diameter of more than 500 nm and 1 nm or less is 3% or less in terms of weight ratio. Further, there are provided, utilizing the medical filter material, an extracorporeal circulation column and a blood filter. Through the employment of nanofibers small in fiber diameter dispersion, high in strength and high in productivity, there can be provided a medical filter material excellent in hemadsorption performance and protein adsorption performance. Through packing with this medical filter material, there can be provided high-performance extracorporeal circulation column and blood filter.

US Patent Application 2008/0069905 teaches a therapeutic treatment device comprising a compound comprising a drug and a nitric oxide (NO) eluting polymer arranged to contact a treatment site in or on a body. The device is acting as a booster for drug eluting patches, e.g. pharmaceuticals, vitamins, nicotine, nitroglycerin, whereby with advantage two therapeutic treatments, of significant value, are combined in one treatment. A synergetic effect is achieved by such devices because NO that is eluted from the device boosts the effect of the drug, as the treatment site is more susceptible to said drug by the effect of the eluted NO. US 2002/026226 discloses a treatment device having a heat source capable of producing a temperature in a range, a heat applicator connected to the heat source, the heat applicator comprising a heat application layer having an application surface and a heat receiving surface, and a heat conductive layer having a front side and a back side affixed to the heat receiving surface of the heat application layer, a lighting mechanism and a power source removably coupled to the heat source. Various devices are known in the art. Nevertheless, their structures are distinctively different from the current invention. Moreover, the other inventions fail to address all of the problems solved by the invention described herein. The present invention is a multi-functional, multipurpose cutaneous platform that is worn on the skin. The device generates multiple stimuli including but not limited to thermoregulation, pho-

totherapy, electrical, radio frequency, chemical, and pharmaceutical. One embodiment of this invention is illustrated in the accompanying drawings and will be described in more detail herein below.

Summary of the Invention

[0010] The present invention is a treatment device that is intended to function in both a research capacity by activating neural pathways and as a therapeutic modality in translating and inducing electrical signals specific to diseased and healthy states. The device provides a critical tool for researchers and patients alike. The treatment device disclosed herein utilizes, amongst other materials, nanotechnology in applications for wound therapy, thermotherapy, phototherapy, photodynamic therapy, electrical stimulation therapy, pain management, drug delivery, timed therapeutic release, local and remote wound monitoring, remote therapeutic delivery applications, electrical/chemical stimulation or modulation, radio frequency applications, and multiple dermatological applications. The various applications may be utilized remotely through wireless smart technology platforms.

[0011] A treatment device having a chemical heat source, wherein the chemical heat source can produce a temperature in the range of about -10°C to about 50°C; a heat applicator connected to the chemical heat source; the heat applicator having a heat application layer having an application surface and a heat receiving surface, and a heat conductive layer having a front side and a back side, wherein the heat conductive layer is made of nanofibers extensively affixed to the heating receiving surface of the heat application layer; a plurality of electrodes integrated with the heat application layer, wherein the electrodes are coupled to the power source providing a mechanism for neuromuscular stimulation; a power source connected to the treatment device, empowering the light source, wherein the power source is at least one battery, a lighting mechanism interwoven into the heat application layer; and a control mechanism for changing the operative state of the lighting mechanism.

[0012] In the treatment device, the power source and the heat source are integrated into a heat generating body. The heat generating body is directly attached to the heat applicator. The power source is further controlled by a control mechanism which is capable of turning some of the components of the treatment device on, off, or adjusting the output of the power source. For example, the treatment device may provide for the inclusion of a lighting mechanism in the form of a plurality of light emitting nano fibers. The power source or control mechanism could turn the lighting mechanism on, off, or adjust the intensity of the light emitted by the lighting mechanism. The power source can also make adjustments to the electrical stimulation system as well as change the operative state of the electrodes. The chemical heat source is a self-contained exothermic chemical reaction involving iron, which could include, for example, iron filings and

other components to a contained apparatus with access to oxygen. In order to provide this access (breathability) of the device thin porous materials are used to ensure proper transfer of heat and gases.

[0013] The treatment device generally takes the form of a cutaneous patch that can be applied to the body of the patient or user. Further, the device may be a stocking, sleeve, cap, mask, or the like. The device has a non-sticky layer on the heat application surface that prevents the treatment device from sticking to the user. The treatment device is generally used in the treatment of skin conditions, wounds, and injuries through heat, electrical stimulation, and photodynamic therapies. However, the principles may be applied to other uses such as general warming, lighting, or treatment of pests such as lice and bedbugs and house dust mites.

[0014] In some embodiments, the heat conductive layer comprises nanofibers woven or unwoven but pressed into a layer that efficiently and extensively transfers heat to the heat application layer. Many specific nanofibers, nanofilaments or nanotubules may be used in the heat conductive layer. The nanofibers could be sheets, mats, yarns, or tapes and the particular configuration can be selected to best suit the intended usage of the treatment device. In some instances, this nanofiber material may not be required for usage and other heat conductive metals, alloys, or other material or any combination thereof can be used to conduct and/or distribute heat or current. Preferably, the lighting mechanism comprises light emitting nanofibers. For clarity purposes, the term nanofiber is used to generally cover all the nanofibers, nanofilaments, nanotubules, and other fibrous materials having diameters preferably between 0.5 nm and 1 μ m. Additionally, the materials may be of a micro origin of about 100 nm to 100 μ m in diameter. The nano particles used in the present invention may be theranostic nano particles capable of therapeutic and diagnostic capabilities.

[0015] The power source is preferably a nanotechnology battery that possesses certain superior properties compared with conventional lithium batteries but may also comprise other chemical mechanisms. In some instances, other batteries and battery technologies may be employed including non-nano batteries. The power source may produce higher energy density. The power source may last longer than conventional batteries. The power may also be charged and recharged promptly. In particular, nanotechnology has been used to produce "supercapacitors" that may be incorporated in rechargeable batteries. Preferably, the current treatment device employs such a supercapacitor battery allowing quick recharges.

[0016] Using the device described above, the user of the device may cause thermal and luminary alternations to the injury site or wound bed, allowing faster and more complete recovery. In particular, the device may be used to apply heat to the injury site or wound bed. The device may also be used to treat infections such as bacteria infections that are susceptible to increased temperature.

The specific applications of the device are extensive. Additionally, the functional mechanism of the device may vary as well. The device may employ a nanofiber/battery platform, wherein the battery powers the device and uses nanofibers to properly distribute the generated heat. In lieu of a battery, the device may operate on an electrical platform using a conventional 15A/125V or 20A/125V AC power supply (i.e. wall outlet socket). Further, the device may operate with no attached power source and derive its heating qualities from chemical reactions occurring within the confines of the device. Such exothermic reactions would be suitable to supply the necessary heat for at least 8-12 hours and possibly more. The device may also employ any combination of heat production (battery, electrical, chemical) in conjunction with one another. In such a case, the various methodologies may distinct roles. For example, the battery of the device could power the lighting mechanism, while the chemically produced heat could supply the heating quality of the same device. The heating mechanism(s) may also be used and be sufficient for use without the inclusion of the nanofiber material.

[0017] The treatment device may further comprise a control mechanism connected to the power source. The device can be remotely programmable utilizing Bluetooth®/smart phone technology so that a patient and/or physician could program the device remotely or wirelessly for certain predetermined light cycles or other functionality such as electrical stimulation and heating cycles. The device could also provide real time feedback in terms of patient data based on a variety of chemical or biological sensors including but not limited to temperature, pH, wound exudates, microbial levels and/or presence as well as visual data such a spectroscopic and various other imaging techniques.

[0018] In general, the present invention succeeds in conferring the following desirable and useful benefits and objectives.

[0019] It is an object of the present invention to provide a treatment device that may be used to facilitate the healing of injuries, infections, acne, or wounds on humans and other subjects.

[0020] It is an object of the present invention to provide a treatment device that may cover the wound bed or injury site.

[0021] It is an object of the present invention to provide a treatment device that alters the temperature of a wound, infection or injury site.

[0022] It is an object of the present invention to provide a treatment device that applies heat to a wound or injury site.

[0023] It is an object of the present invention to provide a treatment device that is light and portable.

[0024] It is another object of the current invention to provide a treatment device that may be used for different kinds of wounds/infections/injuries.

[0025] It is another object of the current invention to provide a treatment device that may be used for

wounds/injuries on different parts of a body, including musculoskeletal pain.

[0026] It is still another object of the current invention to provide a treatment device that is easily adjustable.

[0027] It is another object of the current invention to provide a treatment device that uses a supercapacitor battery that is easily rechargeable.

[0028] It is yet another object of the current invention to provide a treatment device that uses nanofibers for efficient heat conduction.

[0029] It is another object of the current invention to provide a treatment device that has an integrated body, while still allowing for the replacement or exchange of components including power sources.

[0030] It is yet another object of the current invention to provide a treatment device that is easy to use and easy to manufacture.

[0031] It is an object of the present invention to provide a treatment device that uses heat energy to treat vascular ailments such as poor circulation including peripheral vascular disease and diabetes.

[0032] It is an object of the present invention to provide a treatment device that functions as a hot/cold compress.

[0033] It is an object of the present invention to provide a treatment device that helps an individual to maintain a homeostatic temperature including maintaining normothermia and specific core temperature requirements for patients before, during, and after surgery.

[0034] It is an object of the present invention to provide a treatment device that uses light for the purpose of phototherapy and photodynamic therapies.

[0035] It is another object of the present invention to provide a treatment device that uses heat and or light to increase absorption and efficacy of topical medicinal applications including creams, ointments, photodynamic agents and topical antibiotics.

[0036] It is another object of the present invention to provide a treatment device that uses light for the treatment of varying skin conditions including red, green, and blue light sources.

[0037] It is another objective of the present invention to provide a treatment device that uses bipolar radio frequency and/or light energies in the removal of hair.

[0038] It is another objective of the present invention to provide intense pulsed light, laser and other light applications with specific ability to regulate dosimetry and duration of therapy as well as location (area treated) during therapy.

[0039] It is another object of the present invention to provide a treatment device that uses transcranial low level laser therapy (LLLT) in the management of traumatic brain injury and stroke, pain, and symptoms related to medical conditions including rheumatoid arthritis, osteoarthritis, tendinopathy, and wound treatment.

[0040] It is an object of the present invention to provide a treatment device that can be inserted into orthopedic casts for reduced healing time and wound infection prevention and management.

[0041] It is an object of the present invention to provide a treatment device capable of providing early therapy for patient with a suspected stroke, where light therapy has applications in the management of cerebrovascular accident and traumatic brain injury.

[0042] It is an object of the present invention to provide a treatment device that can act as an advanced hot and cold compress for treating injuries and pain.

[0043] It is an object of the present invention to provide a treatment device that can be programmable directly and/or remotely utilizing Bluetooth®/smart phone technology so that a patient and/or physician could program the device remotely or wirelessly for certain predetermined cycles and functions. The device could also provide real time feedback in terms of data including physiological as well as visual data.

[0044] It is another objective of the present invention to provide a treatment device that can be used for menstrual pain management with heat therapy.

[0045] It is yet another object of the present invention to provide a treatment device for internal applications including the management of cervical conditions.

[0046] It is another object of the present invention to provide a treatment device that can utilize a nano generator whereby mechanical movement can harvest energy utilizing piezoelectric technology by converting energy from mechanical stresses into energy properties for lighting purposes.

[0047] It is another object of the present invention to provide a treatment device the can utilize nanophotonics/light-emitting nano fibers and/or Photoluminescent nano fibers, nanofibers and luminescent particles such as quantum dots (QDs).

[0048] It is another object of the present invention to provide a treatment device that facilitates light generation utilizing preferably nano components and is rechargeable and/or disposable.

[0049] It is another object of the present invention to provide a treatment device that micro components could be used if desired.

[0050] It is another object of the present invention to provide a treatment device that can be used for heat redistribution for computers, electronics, and air conditioners.

[0051] It is an object of the present invention to provide a treatment device that serves as a multifunctional, multipurpose cutaneous platform that can generate multiple stimuli including but not limited to thermoregulation, phototherapy, electrical, radio frequency, chemical, and pharmacological stimuli.

[0052] It is an object of the present invention to provide a treatment device that can be programmed to induce specific electronic signature(s) or other stimuli to bypass/remediate the aberrant neural signaling in diseases states.

[0053] It is an object of the present invention to provide a treatment device that affects the axon reflex pathways, including vasoconstriction and vasodilation, using elec-

trical stimulation.

[0054] It is yet another object of the present invention to provide a treatment device that functions to aid in a better understanding of the neural mechanisms involved in specific neuropathic disorders and providing tailored therapeutic options including transcutaneous electrical stimuli.

[0055] It is another object of the present invention to provide a treatment device that records neural signaling of the peripheral nervous system including in disease and health states.

[0056] It is another object of the present invention to provide a treatment device that can be used to warm intravenous fluids.

[0057] It is another object of the present invention to provide a treatment device that provides thermoregulation of the male reproductive system to improve fertility.

[0058] It is another object of the present invention to provide a treatment device that uses phototherapy to restore or prevent hair loss.

[0059] It is another object of the present invention to provide a treatment device that uses radio frequency to induce hair loss.

[0060] It is yet another object of the present invention to provide a treatment device that utilizes photodynamic antimicrobial chemotherapy in treating localized wounds and/or infections.

Brief Description of the Drawings

[0061]

Fig. 1 shows a back perspective view of a treatment device embodying the current invention.

Fig. 2 shows a sectional view along plane A-A' of the treatment device shown in Figure 1.

Fig. 3 shows a front perspective view of the treatment device.

Fig. 4A shows an illustration of an alternate embodiment of the treatment device as a leg sleeve.

Fig. 4B shows an illustration of an alternate embodiment of the treatment device as an arm sleeve.

Fig. 4C shows an illustration of an alternate embodiment of the treatment device as a mask.

Fig. 4D shows an illustration of an alternate embodiment of the treatment device as a wearable cap.

Detailed Description of the Drawings

[0062] The preferred embodiments of the present invention will now be described with reference to the drawings. Identical elements in the various figures are identified, as far as possible, with the same reference numerals. Reference will now be made in detail to embodiments of the present invention. Such embodiments are provided by way of explanation of the present invention, which is not intended to be limited thereto. In fact, those of ordinary skill in the art may appreciate upon reading the

present specification and viewing the present drawings that various modifications and variations can be made thereto without deviating from the innovative concepts of the invention.

[0063] Figure 1 shows a back perspective view of a treatment device embodying the current invention.

[0064] Figure 2 shows a sectional view of the treatment device shown in Figure 1, as indicated by markers A and A'. Shown in Figure 2 is the treatment device 1 having a heat generating body 70 attached to a heat applicator 20. The heat generating body 70 comprises a heat source 10, which may be chemically or electrically based, and a power source 60. In addition, the heat applicator 20 comprises a heat application layer 30 and a heat conductive layer 50, wherein the heat application layer 30 has a heat receiving surface 35 and a heat application surface 40, and the heat conductive layer 50 has a front side 54 and a back side 55. The heat application surface 40 has a lighting mechanism 75. Preferably, this lighting mechanism 75 manifests itself as a light emitting nano fiber woven into the heat application surface 40. The front side 54 of the heat conductive layer 50 directly engages with the heat receiving surface 35 of the heat application layer 30. The heat application surface 40 is designed to engage exposed human wound beds or injury sites.

[0065] Figure 3 shows a front perspective view of the treatment device 1. Shown in Figure 3 is the heat application surface 40 with the integrated lighting mechanism 75 of the heat application layer 30, which is part of the heat applicator 20.

[0066] Figures 4A, 4B, 4C and 4D display alternate embodiments of the current invention. In Figure 4A, the current invention is shown as a stocking for a leg. The individual slides their leg into the void 100 until their toes are resting comfortably in the terminal end 105 at the base of the device 1. The heat source 10 permeates the entire stocking providing even heating throughout the device 1. The stocking may include toe slots, similar to toe socks, rather than a uniform base. This would provide more surface area for the heat and light to treat.

[0067] In Figure 4B, the device 1 is shown as a stocking for an arm. Again, a user slides their arm into the void 100 and to the terminal end 105 at base of the stocking. The stocking may include finger slots, like a mitten, to provide an increased surface area for the heat and light to treat.

[0068] Alternatively, the device 1 comprising the stocking may be of differing sizes and have Velcro®, or another adhesive means, to wrap and secure the apparatus to the affected limb. The stocking may also have a pre-formed shape (to fit an extremity) with openings disposed at each end. Thus, this would be a more traditional sleeve rather than a stocking and provide a greater range of mobility. Such varying embodiments would be most beneficial to those that are afflicted by diabetes, vascular diseases, and the like. These individuals typically have poor circulation that sometimes requires amputation of the affected appendage. The increased heat focused on

these areas promotes increased blood flow and anti-inflammatory qualities, which, in turn, may aid in the prevention of such drastic measures from being taken. Additionally, the increased blood flow can increase nitric oxide (NO) production and delivery. Nitric oxide is a vasodilator and thus can have a synergetic effect along with the heat treatment. Thus, with the aid of this device 1 increased NO production can be done by taking advantage of physiological mechanisms rather than by employing expensive pharmaceuticals.

[0069] In Figure 4C, the treatment device 1 takes the form of a mask. The mask has protective eye slits 125. These protective eye slits 125 remove heat and/or light from the area and protect the eye from any harm stemming from the treatments. The protective eye slits 125 may also have built-in protective coverings for the eyes, similar to goggles, to generally protect the eyes from harm related to usage of the device 1. The wavelengths typically used with the treatment of some skin ailments (blue and red) can damage the retina of the eye without proper protection. The mask also provides for breathing slits 130 as well to aid in the comfort of the wearer.

[0070] In Figure 4D, the treatment device 1 takes the form of a wearable cap or head covering. The cap may come in variable sizes or have the ability to conform to the user's head. The user puts the device 1 onto their head by placing their head in the void 100 until the top of their head touches the heat application surface 40. From there, the heat source 10 provides the heat desired by the user. This embodiment is key in fighting various afflictions centered on the head of the user. For instance, lice and bed bugs are both susceptible to heat. Heat treatments can be used to help an individual to get rid of these parasites.

[0071] The power source 60 of the current invention may employ any kind of electricity generating or storing devices. Preferably, the power source 60 here is a rechargeable battery using nanotechnology. For example, the nanotech battery may use silicon nanowires on a stainless steel substrate, providing upwards of 10 times the power density of conventional lithium ion batteries. Alternatively, the nanotech battery may use aligned carbon nanotubes on a substrate to establish the anode or cathode in a conventional battery, improving the power generating capacity by almost 10 fold. More preferably, the power source is a battery utilizing nanotech supercapacitor technology, which can be recharged promptly. For instance, by using graphene on the surface of anodes to make lithium-ion batteries, the batteries may be recharged 10 times faster than common rechargeable batteries. The fast recharging nanotech batteries are particularly suitable as the power source 60 herein included in the current invention. With such designs, the treatment device may be used more widely in emergency situations because the initiation of treatment and alternation of devices may become more time-saving and efficient.

[0072] In addition to the technologies described above, the power source 60 may also use other nanotechnology,

such as but not limited to: lithium sulfur batteries (using carbon nanofibers encapsulating the sulfur in the cathode or using mesoporous carbon nanoparticles that embrace sulfur inside the nanopores of the cathodes), nanocomposite batteries (using cathodes made of a nanocomposite designed to increase the energy density of the Li-ion batteries), nano-structured lithium titanate battery having enhancing charge/discharge capability, fast charge/recharge batteries using silicon nanoparticles coating a titanium disilicide lattice, thermocells using nanotubes that generate electricity, electrical generator built with nanostructured material that can generate electrical power from the user's body motion such as walking, and ultracapacitor batteries using single atom thick graphene sheets, and any combinations of batteries and power sources thereof.

[0073] Besides incorporating nanotechnology batteries, the power source 60 may also utilize other readily available supplies of electricity. For example, the power source 60 may be a power cord and power plug that can be directly connected to a common alternating current electricity outlet. Alternatively, the power source 60 may be a regular battery or battery pack, either rechargeable or non-rechargeable. The battery may also be sufficiently thin and flexible such as the zinc based ZinctopolTM by Imprint Energy of Alameda, California. Other zinc based and other batteries may be used such as regular AAA zinc-carbon or alkaline batteries, or any other type or size that may fit the energy needs and/or physical accommodations of the current treatment device. Alternatively, the power source 60 may be a nano generator. The nano generator may have a piezoelectric property that allows energy harvesting from mechanical stresses. Such an option would allow for the operation of the device 1 without a battery. However, it may be practical to employ a back-up battery in case of generator failure.

[0074] The heat source 10 is used to produce heat through a variety of mechanisms. In one instance, the heat source 10 is a natural chemical reaction, preferably the oxidization of iron. Alternatively, the heat source 10 may rely on electrical energy for manipulation of the heat source's 10 output. The design of the heat source 10 is generally known in the art and it may vary according to the characteristics and requirements of the user and the injury/wound/infection to be treated. The heat source 10 (derived from chemical pathways) may include other compounds such as sodium thiosulfate, water, charcoal, sodium chloride, and sodium polyacrylate amongst others that are designed to regulate the speed of the reaction, the heat produced, and other necessary factors. Similar heat generating compositions can be found in the Hot Hands[®] chemical heat packs sold and distributed by Walk-Winn Plastics Co. of Little Rock, Arkansas. Typically exposure to air or by breaking internal compartments the chemicals are permitted to produce an exothermic reaction. Ideally, the heat source 10 will regulate the iron oxidation to produce heat reaching approximately 38°C (about 100°F) for about 8-12 hours. The heat

source 10 may be a separate structure from the power source 60, or on the alternative, a part of an integrated structure, such as a heat generating body 70, which also includes the power source 60. The heat source 10 may be located in a particular area of the treatment device 1 or the heat source 10 may exist throughout the device 1 providing heat. Alternatively, by using a solution of super saturated sodium acetate contained within an internal pouch, a reusable heat source may be generated. A metal disc contained within the pouch, that when flexed, causes the solution to solidify and heat to be generated.

[0075] The connection between the heat source 10 and the power source 60 may vary as well. In an alternative embodiment, the power source 60 is removably attached to the heat source 10, wherein the treatment device 1 still utilizes the generated heat without requiring light therapy, which is used to treat the wound bed or injury site, reducing the weight the treatment device and allowing the user of the treatment device to move around more freely. In another embodiment, the power source 60 may be connected to a plurality of heat sources 10 by long wires to ensure continued power supply to a number of treatment devices.

[0076] The electronically controlled heat source 10 may have a wider temperature range than when chemicals are used. Preferably, the heat source 10, in this instance, will be able to warm the device 1 to provide therapeutic heat treatment, as well as remove heat to provide a cold compress treatment. For example, the heat source 10 may be capable of producing temperatures in the range of about -30°C to about 90°C and more preferably from about -10°C to about 50°C. This allows the treatment device 1 to have greater thermal regulation capabilities and can alternate between "hot" and "cold" treatments. This can further be enhanced by lining the inner walls of orthotic device (braces) with the treatment device 1. It can also be appreciated that chemical reactions can be used to create similar temperatures within the range, but rather will be limited to a narrow range rather than alternating between ends of the spectrum.

[0077] The heat applicator 20 is designed to apply the heat produced by the heat source 10 to the user of the treatment device. The heat applicator 20 in the current embodiment has a heat application layer 30 and a heat conductive layer 50. However, it should be noted that the heat application layer 30 and the heat conductive layer 50 may be a single layer integrated together and having both heat application and heat conducting capabilities. As to the embodiment shown in Figure 2, the heat conductive layer may be made from woven or unwoven nanofibers that are extensively affixed to the back side of the heat application layer 30. The nanofibers used in the heat conductive layer 50 may include but not limited to: inorganic nanofibers such as ceramic nanofibers made from titanium dioxide (TiO₂), silicon dioxide (SiO₂), zirconium dioxide (ZrO₂), aluminum oxide (Al₂O₃), lithium titanate (Li₄Ti₅O₁₂), and titanium nitride (TiN) or platinum (Pt), organic or polymer nanofibers such as but not limited

to polystyrene, polyacrylonitrile, polycarbonate, PEO, PET and water-soluble polymer nanofibers, and bi-component nanofibers, and any combinations thereof.

[0078] Such inorganic nanofibers are typically produced via a conventional electrospinning technique which employs an electrical charge to a polymer solution to draw fine nano-sized (or micro) fibers from the liquid. Organic nanofibers such as carbon nanofibers are synthesized using a catalytic synthesis. Here, gas phased molecules are decomposed at high temperatures and the carbon is deposited on a transition metal catalyst. Generally, this involves a series of separate stages such as gas decomposition, carbon deposition, fiber growth, fiber thickening, graphitization, and purification of the now hollow fibers. Such nanofibers as described herein may be similar to those available from or developed by SNS Nano Fiber Technology, LLC of Hudson, Ohio. The key property of the nanofibers making up the heat conductive layer 50 is that the nanofibers are capable of efficient transferring and distribution of heat. In addition, the nanofibers of the heat conductive layer 50 may be capable of prolonged and controlled distribution of heat.

[0079] The heat application layer 30 is preferably made from thin and absorbent material so that it may evenly distribute the heat generated by the heat source 10 to the wound bed or injury site and it may absorb the exudates, if any is produced by the wound or injury. As indicated above, the heat application layer 30 may be integrated with the heat conductive layer 50, forming a single layer. Thus, the materials usable for the heat conductive layer 50, as indicated above, may also be utilized for the heat application layer 30. In addition, the heat application layer 30 may be made from materials such as but not limited to: woven or unwoven fabric, cloth, terry cloth, woven or woven fibers of wool, flax, cotton, and/or yam, mineral textiles such as but not limited to asbestos, glass and/or fiberglass, and synthetic textile including but not limited to nylon, polyester, and/or acrylic, or any combinations thereof. The heat application layer 30 may have a heat application surface 40, which may be sticky or have a sticky edge to ensure covering or partial covering of the wound, infection or injury. The treatment device 1, in its unused form, may further include a non-sticky layer attached to the heat application surface 40. The non-sticky layer may be removed before use, allowing the treatment device to be securely attached.

[0080] In the current embodiments as shown in Figures 1, 2 and 3 the heat applicator 20 and heat generating body 70 are both shown as having a rectangular shape. It should be noted that the shape and size of the heat applicator 20 and the heat generating body 70, as well as various components of the treatment device 1, may vary according to the specific design of the device, the need of the user and the wound/infection/injury to be treated. The device and its components may take any shape also due to the extensive use of the current invention such as Figs. 4A, 4B and 4C. As indicated below, the device herein disclosed may also utilize in applica-

tions that generally require thermal control. For example, the device may be made into pads, strips, or even clothing, in order to satisfy the specific need of the application. The size of the applicator may range from 1mm² to 10 m², with the preferred range of 10 mm² to 100 cm². The weight of the treatment device 1 is preferable light, ranging from 0.1g to 10 kg, and a preferred range of 1 g to 1 kg. The components of the device are preferably removably attached so that each part may be detached from the others and used separately. The applicator portion of the device may be cut or divided into intended size and shape to ensure convenient application.

[0081] The current treatment device 1 may be used for any kind of wounds, infections, injuries, and ailments. In addition, the current device may also be used to prevent wound infection by heating a target area prior to, during, or after surgery. The usage doubles to promote normothermia. The treatment device 1 may take the form of operating room padding, garments, coverings, blankets, and the like or any combination thereof. This allows the hospital staff to appropriately maintain/preserve normothermia which is a critical factor of patient stability especially when it comes to resuscitation and treating trauma injuries. Studies have shown that hypothermia can greatly increase the mortality rate of those who require resuscitation or that have experienced great trauma such those wounded in combat. Further, the treatment device 1 can be used to heat or warm intravenous fluids to specific temperatures or ranges of temperatures. By providing a covering for these fluids normothermia can be more easily preserved and the warmed fluids may aid in resuscitation of patients. The fluids can also be pre-warmed, for instances of impending but unknown requirements of use such as a battlefield or trauma unit.

[0082] In addition to promoting normothermia, the basic function of the treatment device is to alter the temperature of an external injury site or wound bed to enhance healing and facilitate recovery. In addition, the current treatment device may be used for pain management, mainly by promoting blood flow and improving recovery. The current device may also be used to apply heat treatment for acne and other skin disorders, such as warts, psoriasis, eczema and cancer. In organ transplantation, this device may be used to control and maintain the temperature of the transplant organs during transportation and storage of the transplant organs, as the organs require specific temperature control. The device may additionally be used for internal applications such as the management of cervical conditions and the like.

[0083] Those skilled in the art will appreciate that the light and/or heat treatment therapies can be used to treat a range of skin conditions including acne, warts, psoriasis, eczema and cancer as well as many other afflictions. The light or heat treatment may also treat a number of subcutaneous afflictions such as muscle and nerve regeneration, promoting bone healing and managing pain associated with various diseases.

[0084] The lighting mechanism 75 is preferably a light

emitting nanofiber layer woven into the heat application surface 40. Further, photoluminescent nanofibers may be employed. By taking optical nanofibers and combining them with quantum dots, one can produce a wide spectrum of lighting options and applications. The advantage to using these light emitting nanofibers manifests itself in high efficiency lighting with reduced power consumption. When done correctly, this produces quantum efficiencies in the range of about 0.65 to about 0.95. Additionally, these nanofibers provide flexible lighting options. They can be woven and bent into various shapes and fabrics of varying strengths.

[0085] In some embodiments, the lighting mechanism can vary depending on the specific treatment desired. This means the lighting element 75 may be a number of different mechanisms including light emitting diodes (LEDs), lasers, and ultraviolet (UV) light amongst others or any combination thereof. The particular lighting element 75 may change to reflect a specific intended use. Photodynamic therapy (PDT) takes advantage of various light sources to achieve a response. For example, photodynamic medications are activated by a lighting element 75 after a predetermined incubation period. The incubation period varies by the medication, but in any event is the time from which the medicine is ingested or applied until the time the lighting element 75 is applied to the targeted area. Drugs used in such treatments may include Photofrin®, Levulan®, and Metvix® which are used for the treatment of certain cancers. Additionally, the present invention may be used for photodynamic antimicrobial chemotherapy (PACT). PACT utilizes various photosensitizers and a range of wavelengths of light, typically visible or ultraviolet light, to prompt a phototoxic response. This technique has been shown to be effective against at least bacteria, viruses, yeasts, and parasites in vitro. Thus, PACT presents a cost effective alternative to treating localized infection.

[0086] Further, various skin afflictions such as acne can be treated by phototherapy including lasers, LEDs or both. The types of lasers employed by the device for this type of treatment may include Diode, Pulsed Dye, Fractional, KTP, Infrared, and Pulsed Light and Heat Energy (LHE) lasers. In the alternative, the lighting element 75 may consist of a plurality of LEDs affixed or interwoven into the heat application surface 40. The LEDs may also be present in the treatment device 1 itself and shine through one or more layers of the device. In treating acne, blue wavelength light is typically used for effective treatments. However, the combination of blue wavelength and red wavelength light is sometimes used in conjunction with one another. The duration of the treatment varies between individuals and their particular skin types and conditions, but can range from 10 minutes up to 1 hour. Additionally, evidence continues to show the involvement of using low level laser therapy (LLLT) as having an application in treating a variety of ailments. The low level light produced by lasers, and in some cases LEDs, is used to alter cellular function. For example, low intensity

red light may aid in the inhibition of lesions contributing to diabetic retinopathy. Hence, it may be preferable to appropriately fashion the treatment device 1 that it fits over the eyes of the patient and subjects them to these wavelengths of light. Further applications include, but are not limited to, stroke, traumatic brain injury, Parkinson's disease, Alzheimer's, spinal cord and peripheral nerve injuries. LLLT may be readily optimized and employed by the treatment device 1 through the lighting mechanism 75. LLLT may also be provided by the treatment device 1 by first responders to aid in the treatment of at least the aforementioned afflictions.

[0087] Additionally, ultraviolet light may be used to treat certain skin conditions such as psoriasis. Preferably, the UV-B spectrum of light would be used for this purpose. UV-A light can be used for such a treatment, but must be used in conjunction with a light sensitizing medication. Such medications can be taken either topically or orally and will allow the UV-A light to be effective for treatment purposes. If one desired to employ lasers for treating psoriasis, an example might be an Excimer laser or Pulsed Dye laser. Radiofrequency may also be employed for various skin therapies and epilation.

[0088] Another practical use of the treatment device 1 combines the heating properties with the use of topical therapeutics such as various types of pain medications or antibiotics. The device 1 may be applied to a particular area in order to increase the uptake of a particular topical drug or antibiotic. The topical drug is applied to the surface of the skin, and then the device 1 can subsequently be applied to the same area. The process is the same if the medication is not topical but rather taken internally. The treatment device 1 in this instance may take any shape as necessary for the intended functionality. There are a number of drugs whose interaction with light can create unwanted side effects including redness, folliculitis, and darkening or lightening of the skin. Thus, in some embodiments, one may desire to use only the heat source 10 and not the light source. These embodiments may provide for a switch or means for turning the light source on or off. By using only the heating source 10 of the device 1, one can avoid any potential side effects of limitations of using the lighting element of the device 1. Again, the treatment device can be formed to fit a number of different bodily structures, which includes but is not limited to masks, bandages, stockings, sleeves, and patches.

[0089] The device further can function as a wearable electronic stimulation device. In this instance, the treatment device 1 has electrodes 90 as shown in Figure 3. The plurality of electrodes 90 are connected to the power supply 60. The electrodes 90 provide a current that can activate nerves or stimulate muscular contractions or have a combined effect on both nerves and muscles (i.e. neuromuscular). Generally, this form of treatment is known as functional electrical stimulation (FES) or neuromuscular electrical stimulation (NMES). Through this type of therapy, paralyzed or paretic muscles can be forced to contract by subjecting them to electrical currents

to the nerves innervating the muscles. Some practical applications include the treatment of foot drop and inducing hand grasping amongst others. The number of electrodes 90 can vary but should be in the range of about 2-15 depending on size and orientation of the electrodes 90 as well as the surface area of the treatment device 1. Preferably there are at least three electrodes 90. The electrodes 90 are those generally used in the stimulation of muscles and nerves. They may be generally discoid in shape although others shapes are readily available. For example, the electrodes 90 can be made to conform to the shape of the treatment device 1 or to that of a particular body part. Common materials for the electrodes 90 include stainless steel, silver-silver chloride, platinum, and gold plated materials. In some instances, it would be preferential to use flexible electrodes such as carbon filled silicone rubbers or other readily available conductive polymers. Further, the electrodes 90 may exhibit suction like properties that aid in adherence to the body depending on their position relative to the treatment device 1. The electrodes 90 can provide an electrical stimulus in an operating range of about 1 Hertz (Hz) to about 5000 Hz depending on the application. More preferably, the operative range of the electrodes is about 1 Hz to about 200 Hz.

[0090] By taking advantage of the inclusion of a number of electrodes 90, the treatment device 1 has a number of practical applications in addition to the numerous applications listed throughout this disclosure. The treatment device 1 can employ the electrodes 90 for pain management as well as nerve regeneration and neurorehabilitation. There is evidence to suggest that this electrical therapy can improve the gait, balance, posture, and motion ranges of the foot and ankle in children with cerebral palsy. The treatment device 1 may also be used in these applications and others in conjunction with one or more medical devices or monitoring technology. For example, the treatment device 1 may be set to provide a pulsed electronic stimulus of about 100 Hz via the electrode(s) 90. The neuromuscular response may then be recorded and analyzed using various biosensors from the region in question. Additionally, the electrodes 90 can be used to interact with voltage sensitive dyes, known as potentiometric dyes, to plot time versus activity curves and absorb photo emission to produce images and/or transmit data.

[0091] The treatment device 1 can be functional as both a research tool and a therapeutic device. In the research setting, the treatment device 1 can help others understand the neural mechanism involved in neuropathic pain conditions such as phantom limb pain, stump pain, post traumatic, neuralgia, post herpetic neuralgia, diabetic mono and poly neuropathy, ischemic neuropathy, and alcohol neuropathy, and the like. Further understanding may be achieved by mapping of the neural pathways involved with some diseases. Such diseases could be targeted by intervention points in the peripheral nervous system (PNS) and central nervous system (CNS).

By recording the neural signaling in these systems, various disease states can be treated and identified by bypassing or modifying the neural signal by a number of mechanisms including electrical, thermal, radio frequency (RF), chemical, and pharmaceutical stimuli.

[0092] In general the treatment device 1, serves to provide solutions to wound care, injury sites, and skin conditions. The device 1 achieves this through a variety of mechanism including neural excitation which, in turn, leads to vasodilation. Vasodilation is critical to wound healing and subsequently increases the partial pressure of oxygen within the blood. This uptake in oxygen helps to stave off infection through a number of means including oxidative killing. This chain of events is brought upon by an external stimuli including, but not limited to, temperature changes, chemicals, drugs, lighting, and electrical stimulation. Any of a number of these stimuli can provoke an axon reflex mechanism bringing the increase in blood flow to the affected area. A secondary rise in skin blood flow may be mediated by nitric oxide. Nitric oxide is a key component in wound collagen accumulation and a number of cellular functions. All of the above contribute greatly to an increase in the treatment of wounds, injuries, and skin conditions and the present invention uses strategies, including a number of external stimuli, to maximize the effects of such pathways.

[0093] Beside its medical applications, the current device may also be used as other heating apparatus, such as but not limited to clothing apparel and accessories including gloves/hand warmers, jackets, pants, socks, shoe insert, ear muffs, footwear such as ski boots, and winter boots, ski equipment, goggles, ice skates, seat pads, portable seat cushions, and heatable containers. A thermal blanket may be used for the treatment of hypothermia and the treatment of cardiac arrest with medically induced hypothermia. As long as the apparatus requires thermal control capability, the current invention may play a central role.

[0094] As indicated above, the treatment device may further comprise a control mechanism connected to the power source. The control mechanism may be used to initiate, terminate, and adjust the electricity provided by the power source, thus controlling thermal alternation capability of the device. With the control mechanism, the user of the treatment device may easily control the treatment process and change the durations, cycles, and intensity of the treatments. Additionally, the control mechanism may not be directly connected to the power source. In this instance, the control mechanism is a wireless device capable of communicating with the device 1 itself. Preferably, a user can employ a Bluetooth® enabled device (i.e. smart phone) to change particular settings such as temperature, cycles, frequency, light intensity and a variety of other functions by way of mobile application or remote center. This embodiment may also allow for the real time monitoring of the device 1 and permit the device 1 to send physiological data to the user (i.e. a doctor) in real time. The data may be able to be stored or interpreted

to further manipulate the settings of the treatment device 1. It may be advantageous to use biosensors in the treatment areas to further meet these needs. Alternatively, there may be a system in which the doctor, physician, etc. can selected from preset programming options to provide specific stimuli. In addition stimuli may be altered, changed, or employed based on response to an artificial source or nervous system stimuli including thought generated responses of movement or action.

[0095] Additional monitoring may be done with the inclusion of heat sensitive fibers (i.e. fibers that change color in response to temperature). These fibers can be calibrated to have a variety of color outputs over a predetermined temperature range. These fibers can also be sensitive to temperature differentials than less than one degree. Wounds and the surrounding tissue can vary in temperature throughout the healing process, and this visual indicator can help health officials know the progress of the healing while removing expensive existing monitoring technologies. For example, an infection is usually associated with swelling and an increase in temperature. A cutaneous patch, as described in the present invention, with heat sensitive fibers embedded therein would provide a more comprehensive monitoring system and improve patient health and moral.

[0096] Figures 1, 2, 3, 4A, 4B, 4C and 4D show various embodiments of the current invention. However, it should be noted that the design of the current invention may vary significantly from the embodiments described herein. As long as the general inventive spirit stays consistent with the disclosure, the variations of embodiments should be considered part of the current invention. While some of the variations are hereby described, the other variations may be considered general knowledge to a person skilled in the art so that they do not required detailed discussion. The teachings and disclosures of the current invention encompass all the variations.

Claims

1. A treatment device (1), comprising:

a heat source (10), wherein the heat source is capable of producing a temperature in the range of about -10°C to about 50°C;
a heat applicator (20) connected to the heat source, the heat applicator comprising,

a heat application layer (50) having an application surface and a heat receiving surface, and a heat conductive layer (30) having a front side and a back side,

wherein the heat conductive layer is made of nanofibers or other heat conductive metals or alloys or a combination thereof, extensively affixed to the

heating receiving surface of the heat application layer;

a lighting mechanism (75) interwoven into the heat application layer; and
a power source (60) removably coupled to the heat source.

2. The treatment device of claim 1, wherein the power source and the heat source are integrated into a heat generating body directly attached to the heat applicator, wherein the heat applicator is a layered flat structure.
3. The treatment device of claim 1 further comprising, a control mechanism connected to the power source, the control mechanism being capable of changing the operative state of the power source and adjusting the output of the power source.
4. The treatment device of claim 1 further comprising, a non-sticky layer attached to the heat application surface.
5. The treatment device of claim 1 wherein the lighting mechanism is a plurality of light emitting nano fibers.
6. The treatment device of claim 5 wherein the plurality of light emitting nano fibers are inorganic, organic, or polymer nano fibers or any combination thereof.
7. The treatment device of claim 1 wherein the power source comprises at least one of a self-contained exothermic chemical reaction, a battery, or an electrical power supply or any combination thereof.
8. The treatment device of claim 1 further comprising a transceiver providing for bidirectional communication via wired or wireless communication protocols, wherein the treatment device sends patient information including but not limited to wound exudates, pH, temperature, microbial presence, enzyme levels, and various other biological or chemical measurements or any combination thereof to a remote location, and wherein the treatment device is capable of being manipulated from a remote location to provide various device functionalities including but not limited to multi-stimulus activation, modification, or termination, drug and dosage delivery, temperature alterations, therapeutic sequences, or any combination thereof
9. The treatment device of claim 8 wherein remote manipulation of the treatment device is dictated by the patient information transmitted from the treatment device or by a theranostic protocol.
10. The treatment device of claim 1 further comprising

a plurality of electrodes integrated with the heat application layer.

11. The treatment device of claim 1 further comprising a plurality of sensors capable of measuring and/or monitoring temperature, pH, wound exudates, microbial detection, enzymes, or any combination thereof.
12. The treatment device of claim 5 wherein the light emitting nanofibers emit visible spectrum light, ultraviolet light, or laser light or any combination thereof.
13. The treatment device of claim 1 further comprising a plurality of electrodes for stimulation of muscles and nerves.
14. The treatment device of claim 13 wherein the plurality of electrodes provides an electrical stimulus in the range of about 1 Hertz to about 160 Hertz.
15. The treatment device of claim 13 wherein the plurality of electrodes comprise a flexible, conductive polymer formed to be complementary to the surface to which they are applied.
16. The treatment device of claim 1 wherein the treatment device comprises heat sensitive fibers.
17. The treatment device of claim 13 wherein the plurality of electrodes are employed in any combination and sequence in conjunction with at least one other functionality of the treatment device such as heating, lighting, drug delivery, or any combination thereof.
18. The treatment device of claim 1 wherein the power source is a rechargeable nanobattery or electrical cord capable of being coupled to an outlet.
19. The treatment device of claim 1 wherein the heat source comprises at least one of a self-contained exothermic chemical reaction.

Patentansprüche

1. Behandlungsvorrichtung (1), umfassend:

eine Wärmequelle (10),
wobei die Wärmequelle eine Temperatur im Bereich von ungefähr -10 °C bis ungefähr 50 °C erzeugen kann;
einen Wärmeapplikator (20), der mit der Wärmequelle verbunden ist; wobei der Wärmeapplikator umfasst
eine Wärme-Applikationsschicht (50), die eine Anwendungsfläche und eine Wärmeaufnahme-
fläche aufweist, und eine wärmeleitfähige

- Schicht (30), die eine Vorderseite und eine Rückseite aufweist,
wobei die wärmeleitfähige Schicht aus Nanofasern oder anderen wärmeleitfähigen Metallen oder Legierungen oder einer Kombination davon hergestellt ist, die weitgehend an der Wärmeaufnahme- fläche von der Wärme-Applikationsschicht befestigt sind;
einen Beleuchtungsmechanismus (75), der in die Wärme-Applikationsschicht eingewoben ist; und
eine Energiequelle (60), die lösbar mit der Wärmequelle verbunden ist.
2. Behandlungsvorrichtung nach Anspruch 1, wobei die Energiequelle und die Wärmequelle in einem wärmeerzeugenden Körper integriert sind, der direkt an dem Wärmeapplikator angebracht ist, wobei der Wärmeapplikator eine schichtförmige flache Struktur ist.
3. Behandlungsvorrichtung nach Anspruch 1, ferner umfassend:
einen Steuermechanismus, der mit der Energiequelle verbunden ist, wobei der Steuermechanismus in der Lage ist, den Betriebszustand der Energiequelle zu ändern und die Leistung der Energiequelle einzustellen.
4. Behandlungsvorrichtung nach Anspruch 1, ferner umfassend:
eine nichtklebende Schicht, die an der Wärme-Applikationsfläche angebracht ist.
5. Behandlungsvorrichtung nach Anspruch 1, wobei der Beleuchtungsmechanismus eine Vielzahl von lichtemittierenden Nanofasern ist.
6. Behandlungsvorrichtung nach Anspruch 5, wobei die Vielzahl von lichtemittierenden Nanofasern anorganische, organische oder polymere Nanofasern oder eine beliebige Kombination davon sind.
7. Behandlungsvorrichtung nach Anspruch 1, wobei die Energiequelle mindestens eines von einer in sich abgeschlossenen exothermen chemischen Reaktion, einer Batterie oder einer elektrischen Energieversorgung oder eine beliebige Kombination davon umfasst.
8. Behandlungsvorrichtung nach Anspruch 1, ferner umfassend ein Sende-Empfangsgerät zur Bereitstellung einer bidirektionalen Kommunikation über verdrahtete oder drahtlose Kommunikationsprotokolle, wobei die Behandlungsvorrichtung Patienteninformationen, einschließlich, aber nicht beschränkt auf, Wundexsudate, pH-Wert, Temperatur, Anwesenheit von Mikroorganismen, Enzymspiegel und verschiedene andere biologische oder chemische Messungen oder eine beliebige Kombination davon an eine entfernte Stelle sendet, und wobei die Behandlungsvorrichtung von einer entfernten Stelle manipuliert werden kann, um verschiedene Vorrichtungsfunktionalitäten bereitzustellen, einschließlich, aber nicht beschränkt auf mehrfache Stimulus-Aktivierung, -Modifikation oder -Terminierung, Arzneimittel- und Dosierungsabgabe, Temperaturänderungen, therapeutische Sequenzen oder eine beliebige Kombination davon.
9. Behandlungsvorrichtung nach Anspruch 8, wobei die Fernmanipulation der Behandlungsvorrichtung durch die Patienteninformation diktiert wird, die von der Behandlungsvorrichtung oder durch ein therapeutisches Protokoll übertragen wird.
10. Behandlungsvorrichtung nach Anspruch 1, ferner umfassend eine Vielzahl von Elektroden, die in die Wärme-Applikationsschicht integriert sind.
11. Behandlungsvorrichtung nach Anspruch 1, ferner umfassend eine Vielzahl von Sensoren, die zum Messen und/ oder Überwachen von Temperatur, pH-Wert, Wundexsudaten, Nachweis von Mikroorganismen, Enzymen oder einer beliebigen Kombination davon in der Lage sind.
12. Behandlungsvorrichtung nach Anspruch 5, wobei die lichtemittierenden Nanofasern sichtbares Spektrallicht, Ultraviolettlicht oder Laserlicht oder eine beliebige Kombination davon emittieren.
13. Behandlungsvorrichtung nach Anspruch 1, ferner umfassend eine Vielzahl von Elektroden zur Stimulation von Muskeln und Nerven.
14. Behandlungsvorrichtung nach Anspruch 13, wobei die Vielzahl von Elektroden einen elektrischen Stimulus im Bereich von ungefähr 1 Hertz bis ungefähr 160 Hertz bereitstellt.
15. Behandlungsvorrichtung nach Anspruch 13, wobei die Vielzahl von Elektroden ein flexibles, leitfähiges Polymer umfassen, die komplementär zu der Oberfläche ausgebildet sein können, auf die sie aufgebracht sind.
16. Behandlungsvorrichtung nach Anspruch 1, wobei die Behandlungsvorrichtung wärmeempfindliche Fasern umfasst.
17. Behandlungsvorrichtung nach Anspruch 13, wobei die Vielzahl von Elektroden in beliebiger Kombination

on und Reihenfolge in Verbindung mit mindestens einer anderen Funktionalität der Behandlungsvorrichtung wie etwa Heizung, Beleuchtung, Arzneimittelabgabe oder einer beliebigen Kombination davon eingesetzt wird.

18. Behandlungsvorrichtung nach Anspruch 1, wobei die Energiequelle eine wiederaufladbare Nanobatterie oder ein Stromkabel ist, das an einen Ausgang angeschlossen werden kann.

19. Behandlungsvorrichtung nach Anspruch 1, wobei die Wärmequelle mindestens eine von einer in sich abgeschlossenen exothermen chemischen Reaktion umfasst.

Revendications

1. Dispositif de traitement (1), comprenant :

une source de chaleur (10),
la source de chaleur étant apte à produire une température de l'ordre d'environ -10 °C à environ 50 °C ;
un applicateur de chaleur (20) connecté à la source de chaleur, l'applicateur de chaleur comprenant :

une couche d'application de chaleur (50) dotée d'une surface d'application et d'une surface réceptrice de chaleur, et une couche conductrice de chaleur (30) dotée d'une face avant et d'une face arrière, la couche conductrice de chaleur étant composée de nanofibres ou d'autres métaux ou alliages conducteurs de chaleur ou de leurs combinaisons, fixés de manière extensive à la surface réceptrice de chaleur de la couche d'application de chaleur ;
un mécanisme d'éclairage (75) imbriqué dans la couche d'application de chaleur ; et
une source de courant (60) couplée de manière dissociable à la source de chaleur.

2. Dispositif de traitement selon la revendication 1, dans lequel la source de courant et la source de chaleur sont intégrées dans un corps générateur de chaleur fixé directement à l'applicateur de chaleur, l'applicateur de chaleur étant une structure plate feuilletée.

3. Dispositif de traitement selon la revendication 1, comprenant en outre :

un mécanisme de commande connecté à la source de courant, le mécanisme de commande étant apte à changer l'état opérationnel de la

source de courant et à ajuster le rendement de la source de courant.

4. Dispositif de traitement selon la revendication 1 comprenant en outre :

une couche non collante fixée à la surface d'application de chaleur.

5. Dispositif de traitement selon la revendication 1, dans lequel le mécanisme d'éclairage est une pluralité de nanofibres électroluminescentes.

6. Dispositif de traitement selon la revendication 5 dans lequel la pluralité de nanofibres électroluminescentes sont des nanofibres inorganiques, organiques ou polymériques ou toutes leurs combinaisons.

7. Dispositif de traitement selon la revendication 1, dans lequel la source de courant comprend au moins une caractéristique parmi une réaction chimique exothermique auto-contenue, une pile ou une fourniture de courant électrique ou toutes leurs combinaisons

8. Dispositif de traitement selon la revendication 1, comprenant en outre un transcepteur établissant une communication bidirectionnelle via des protocoles de communication filaires ou non filaires, le dispositif de traitement envoyant des informations concernant le patient, y compris mais non limitativement les exsudats de plaie, le pH, la température, la présence microbienne, les niveaux d'enzymes et diverses autres mesures biologiques ou chimiques ou toutes leurs combinaisons vers un emplacement distant, et le dispositif de traitement étant apte à être manipulé depuis un emplacement distant pour assurer diverses fonctionnalités de dispositif, y compris mais non limitativement, l'activation, la modification ou la cessation de stimuli multiples, la délivrance de médicaments et de dosages, les changements de température, les séquences thérapeutiques ou toutes leurs combinaisons.

9. Dispositif de traitement selon la revendication 8, dans lequel la manipulation à distance du dispositif de traitement est dictée par les informations concernant le patient transmises par le dispositif de traitement ou par un protocole théranostique.

10. Dispositif de traitement selon la revendication 1, comprenant en outre une pluralité d'électrodes intégrées dans la couche d'application de chaleur.

11. Dispositif de traitement selon la revendication 1, comprenant en outre une pluralité de capteurs aptes à mesurer et/ou à contrôler la température, le pH,

les exsudats de plaies, la détection microbienne, les enzymes ou toutes leurs combinaisons.

12. Dispositif de traitement selon la revendication 5, dans lequel les nanofibres électroluminescentes émettent de la lumière à spectre visible, de la lumière ultraviolette ou de la lumière laser ou toutes leurs combinaisons. 5
13. Dispositif de traitement selon la revendication 1, comprenant en outre une pluralité d'électrodes pour la stimulation des muscles et des nerfs. 10
14. Dispositif de traitement selon la revendication 13, dans lequel la pluralité d'électrodes émettent un stimulus électrique de l'ordre d'environ 1 Hertz à environ 160 Hertz. 15
15. Dispositif de traitement selon la revendication 13, dans lequel la pluralité d'électrodes comprennent un polymère flexible conducteur formé de manière à être complémentaire à la surface sur laquelle elles sont appliquées. 20
16. Dispositif de traitement selon la revendication 1, dans lequel le dispositif de traitement comprend des fibres sensibles à la chaleur. 25
17. Dispositif de traitement selon la revendication 13, dans lequel la pluralité d'électrodes sont employées en toutes combinaisons et séquences en conjonction avec au moins une autre fonctionnalité du dispositif de traitement comme le chauffage, l'éclairage, la délivrance de médicaments ou toutes leurs combinaisons. 30
35
18. Dispositif de traitement selon la revendication 1, dans lequel la source de courant est une nanobatterie rechargeable ou un cordon électrique apte à être couplé à une sortie. 40
19. Dispositif de traitement selon la revendication 1, dans lequel la source de chaleur comprend au moins une réaction chimique exothermique auto-contenue. 45

50

55

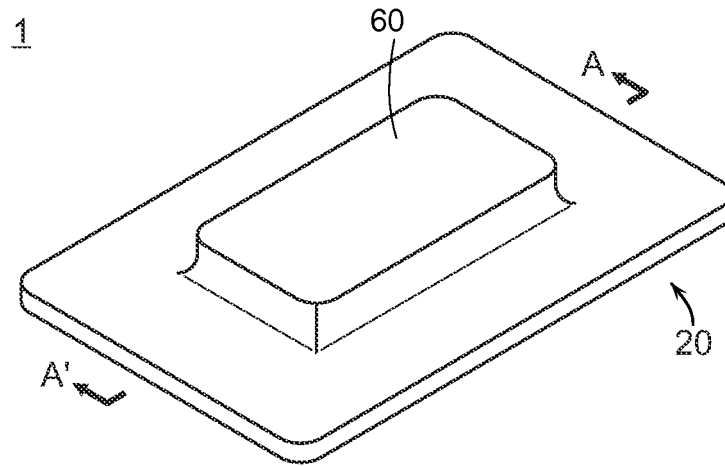


FIG. 1

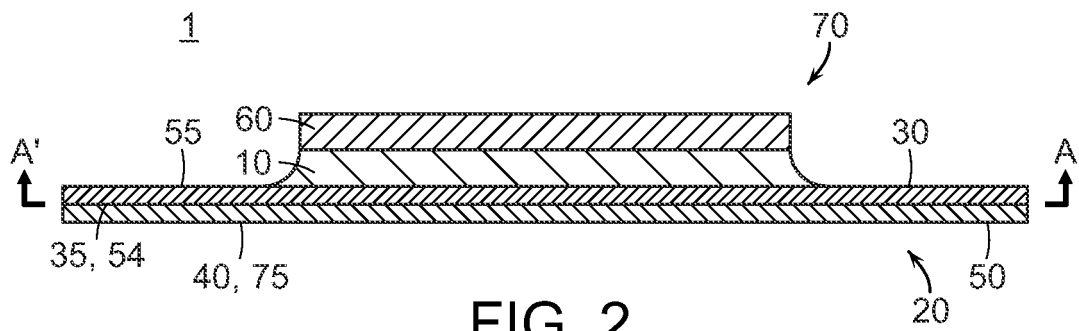


FIG. 2

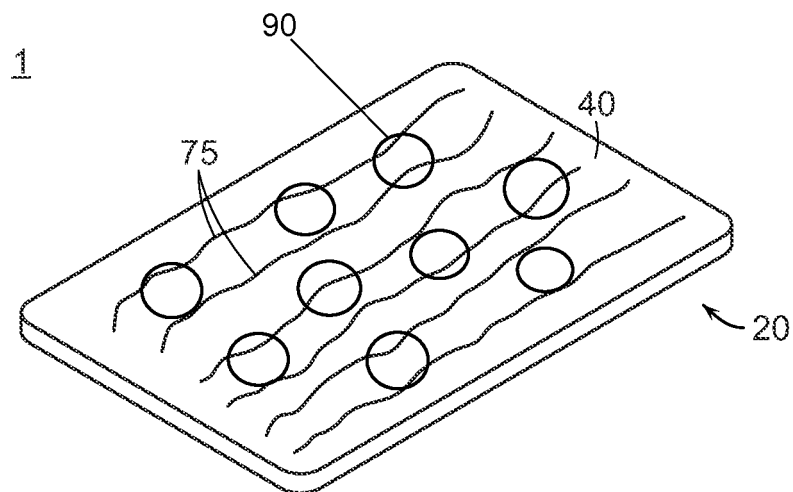


FIG. 3

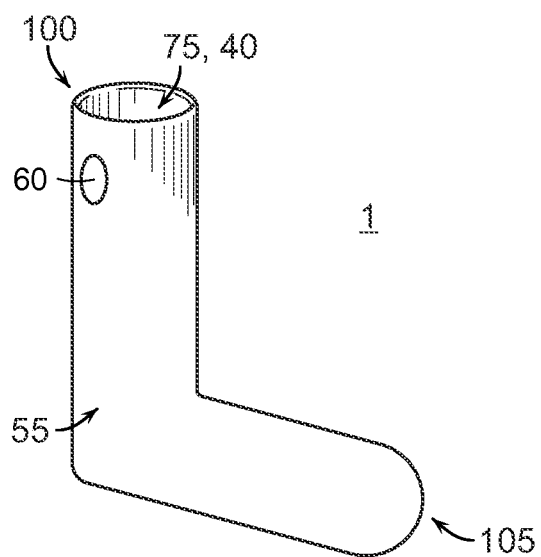


FIG. 4A

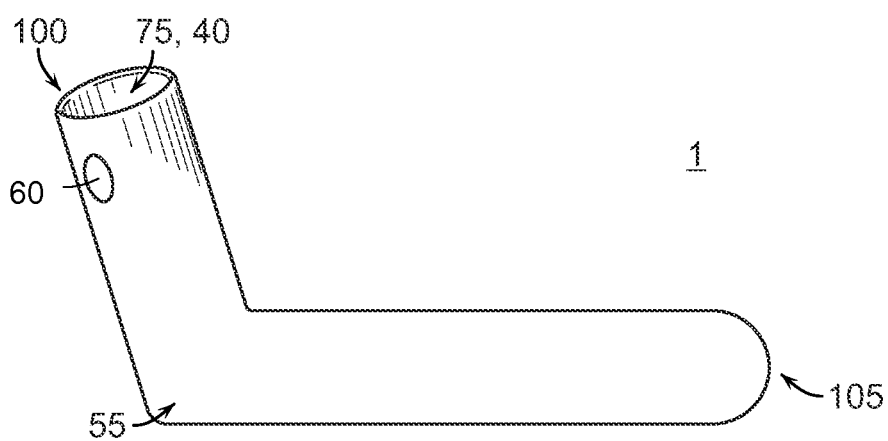


FIG. 4B

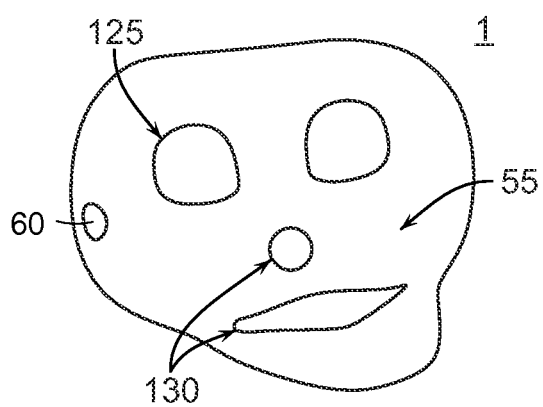


FIG. 4C

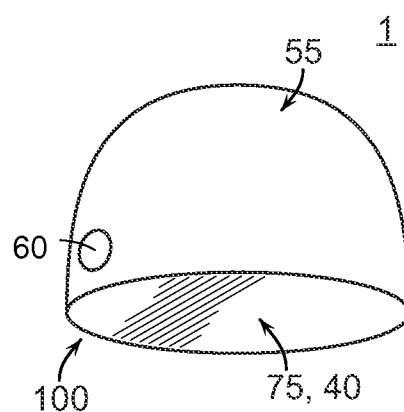


FIG. 4D

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20080023394 A [0009]
- US 20080069905 A [0009]
- US 2002026226 A [0009]

专利名称(译)	加热装置采用放热化学反应		
公开(公告)号	EP2948111B1	公开(公告)日	2018-03-14
申请号	EP2014743451	申请日	2014-01-21
[标]申请(专利权)人(译)	ISSEROW JONATHAN ISSEROW LAURA		
申请(专利权)人(译)	ISSEROW , JONATHAN ISSEROW , LAURA		
当前申请(专利权)人(译)	ISSEROW , JONATHAN ISSEROW , LAURA		
[标]发明人	ISSEROW JONATHAN ISSEROW LAURA		
发明人	ISSEROW, JONATHAN ISSEROW, LAURA		
IPC分类号	A61B5/00 A61B5/1491 A61F7/00 A61F7/03 A61N1/04 A61N1/36 A61N5/06 F24J1/00 F24V30/00		
CPC分类号	A61B5/0022 A61B5/01 A61B5/145 A61B5/14507 A61B5/1491 A61B5/4836 A61B5/683 A61F7/007 A61F7/03 A61F7/034 A61F2007/0052 A61F2007/0071 A61F2007/0078 A61F2007/0093 A61F2007/ /0094 A61F2007/0226 A61F2007/0234 A61F2007/0236 A61F2007/0261 A61N1/0452 A61N1/0456 A61N1/0492 A61N1/36021 A61N5/0616 A61N5/062 A61N5/0624 A61N2005/0645 A61N2005/0647 A61B5/0036		
优先权	13/747584 2013-01-23 US 13/940307 2013-07-12 US 14/081110 2013-11-15 US 14/106198 2013-12-13 US		
其他公开文献	EP2948111A4 EP2948111A1		
外部链接	Espacenet		

摘要(译)

本发明公开了一种具有热源，电源，加热器和照明机构的治疗装置。电源包括至少一个具有优良性能的电池，例如延长的发电量和快速充电。热量施加器包括由纳米纤维制成的导热层，为目标区域提供高效的热分布。照明机构采用发光纳米纤维来处理目标区域。电源向光源提供能量，光源产生光，使得涂抹器可以分配到使用者的受伤部位或伤口床。热源可以是放热化学反应，其设计为持续几个小时向处理装置提供热量或电子产生的热量。治疗装置还包括多个用于电刺激治疗的电极。

