

(19)



(11)

EP 3 384 791 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

08.01.2020 Bulletin 2020/02

(51) Int Cl.:

A41D 13/012 ^(2006.01) **A41D 7/00** ^(2006.01)
A61B 5/0245 ^(2006.01) **G08B 6/00** ^(2006.01)
A41D 1/00 ^(2018.01) **A61B 5/024** ^(2006.01)
A61B 5/00 ^(2006.01) **G08B 21/04** ^(2006.01)

(21) Application number: **18174382.4**

(22) Date of filing: **28.11.2012**

(54) **WETSUIT**

NASSANZUG

COMBINAISON HUMIDE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **28.11.2011 US 201161563885 P**

(43) Date of publication of application:

10.10.2018 Bulletin 2018/41

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

12853238.9 / 2 785 208

(73) Proprietor: **Roka Sports Inc.**
Austin, Texas 78758 (US)

(72) Inventors:

- **CANALES, Robert, Allen**
Austin, Texas 78758 (US)
- **SPENSER, Kurt, Robert**
Austin, Texas 78758 (US)

(74) Representative: **HGF Limited**
1 City Walk
Leeds LS11 9DX (GB)

(56) References cited:

US-A- 5 013 271 US-A- 5 022 878

EP 3 384 791 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE DISCLOSURE

[0001] The present disclosure relates generally to swimming apparel, and more particularly to the design and construction of wetsuits and other swimwear.

BACKGROUND OF THE DISCLOSURE

[0002] Various wetsuits have been developed in the art, and are utilized for various purposes. Among these are performance wetsuits, which are popular among triathletes and open water swimmers. Performance wetsuits provide drag reduction in the form of faster-than-skin surface coatings, warmth and additional buoyancy to the wearer, and are designed to enhance the speed and ease with which the wearer moves through the water while swimming.

[0003] At present, a variety of performance wetsuits are currently available in the marketplace. These include those sold by Blueseventy, De Soto, Xterra, TYR and NeoSport. Most existing wetsuits are made primarily out of flexible neoprene.

[0004] US5013271 discloses a buoyant body surfing suit for a body surfer having knees.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005]

FIG. 1 is a front view of a first embodiment of a wetsuit in accordance with the teachings herein.

FIG. 2 is a rear view of the wetsuit of FIG. 1.

FIG. 3 is a side view (left side) of the wetsuit of FIG. 1; the left arm has been removed for clarity of illustration.

FIG. 4 is a side view (right side) of the wetsuit of FIG. 1; the right arm has been removed for clarity of illustration.

FIG. 5 is a front view of a second embodiment of a wetsuit in accordance with the teachings herein.

FIG. 6 is a rear view of the wetsuit of FIG. 5.

FIG. 7 is a side view (right side) of the wetsuit of FIG. 5; the right arm has been removed for clarity of illustration.

FIG. 8 is a side view (left side) of the wetsuit of FIG. 5; the left arm has been removed for clarity of illustration.

FIG. 9 is a side view of the left arm of the wetsuit of FIG. 5.

FIG. 10 is a front view of a swimsuit.

FIG. 11 is a rear view of the swimsuit of FIG. 10.

FIG. 12 is a side view (left side) of the swimsuit of FIG. 10.

FIG. 13 is a side view (right side) of the swimsuit of FIG. 10.

FIG. 14 is a front view of a third embodiment of a

wetsuit in accordance with the teachings herein.

FIG. 15 is a rear view of the wetsuit of FIG. 14.

FIG. 16 is a side view (right side) of the wetsuit of FIG. 14; the right arm has been removed for clarity of illustration.

FIG. 17 is a side view (left side) of the wetsuit of FIG. 14; the left arm has been removed for clarity of illustration.

FIG. 18 is a series of illustrations showing (clockwise) the details of the front, back and side (right arm) and the front, back and side (left arm) of a first embodiment of a swimming sleeve.

FIG. 19 is a front view of a fourth embodiment of a wetsuit in accordance with the teachings herein.

FIG. 20 is a rear view of the wetsuit of FIG. 19.

FIG. 21 is a side view (left and right sides) of the wetsuit of FIG. 19; the arms have been removed for clarity of illustration.

SUMMARY OF THE DISCLOSURE

[0006] There is provided a wetsuit, comprising:

a top portion, a middle portion and a bottom portion, wherein the top portion terminates at one end in a collar which extends around the neck of the wearer and terminates at the other end at the middle portion and the bottom portion includes a waist portion that extends around the waist of a wearer, leg portions that extend down the legs of the wearer, and a crotch portion;

a first buoyancy enhancer provided on the front of the wetsuit in the form of a strip which extends along the central longitudinal axis of the wearer from the collar to the crotch portion; and

a second buoyancy enhancer provided on the back of the wetsuit 201 in the form of a strip which extends along the central longitudinal axis of the wearer from an intersection between the top portion and middle portion, to the crotch portion, wherein the first buoyancy enhancer has a width within the range of about 2.54 cm to about 17.78 cm and the second buoyancy enhancer has a width within the range of about 2.54 cm to about 17.78 cm.

[0007] The wetsuit may comprise a chest portion which covers the chest of a user; wherein said chest portion is equipped with a zipper. The wetsuit may comprise a back portion which covers the back of a user; wherein said back portion is equipped with a zipper.

DETAILED DESCRIPTION

[0008] As used herein, the term "aerated neoprene" refers to a type of neoprene which comprises multiple laminated layers, at least one of which is perforated and cut such that the final product is a sealed neoprene with individual pockets of air trapped inside the neoprene lay-

ers.

[0009] While existing wetsuits may be suitable for their intended purpose, a need exists for further improvements in the art. This is especially so with respect to performance wetsuits that are designed for use in swimming and triathlon events, since even small improvements in such wetsuits can make the difference between success or failure for the wearer. This point is illustrated by the fact that some recent Ironman triathlons have been decided by a few seconds, even though these competitions typically last more than 8 hours. For example, the 2012 Ironman Cozumel triathlon's female race was won by seven seconds, after a total elapsed time of nine hours and fifteen minutes.

[0010] One area requiring improvement in wetsuits, especially those designed for swimmers, relates to the density and thickness of the foamed polymeric materials (typically neoprene) used in their construction. In particular, some wetsuits do not impart optimal buoyancy to the wearer, due to the density and thickness of the neoprene used in their construction. This causes the wearer to ride lower in the water, thus reducing swimming speeds and increasing energy expenditure. In some cases, sub-optimal placement may also cause the swimmer to ride too high in the water in the chest. This causes the legs to drop, thus resulting once again in a suboptimal net body position.

[0011] Other wetsuits incorporate lower density neoprene into them in a bid to improve buoyancy. However, the density distribution in such wetsuits is typically sub-optimal, and leads to increased heat retention and resistance to proper swimming mechanics. For example, such designs often incorporate lower density materials into the arms and hips of the wetsuit, which may inhibit the proper rotation of the swimmer's body along its longitudinal axis (roll). Similarly, such designs also often fail to ensure optimal body position along a lateral axis (pitch).

[0012] It has now been found that the foregoing issues may be addressed through the use in the construction of a wetsuit of a foamed polymeric material having variable density and thickness. In particular, the placement, density and/or thickness of the neoprene or other foamed polymeric material may be varied to optimize the buoyancy distribution (as, for example, by making the central portion of the wetsuit more buoyant than the lateral portion to facilitate rotation or roll along the longitudinal axis) and body position along the lateral axis (pitch) of the user. This approach has the effect of enhancing proper swim mechanics, including the proper rotation of the user's body along its longitudinal axis. This enhancement is of particular value, because proper swimming technique requires rotation of up to 40 degrees in each direction on the longitudinal axis. Similarly, the proper alignment along the lateral axis (pitch) leads to a reduction of form drag. Hence, this approach helps to optimize buoyancy for the swimmer along the latitudinal axis, while simultaneously facilitating proper rotation along the longitudinal axis.

[0013] A further area requiring improvement in existing wetsuit designs, especially for swimmers, relates to the sleeve design of wetsuits. At present, most wetsuit designs treat the shoulder and sleeve areas of the wetsuit like any other area. Consequently, these areas are typically constructed out of the same neoprene material as the rest of the suit, with the result that the wetsuit in general, and these areas in particular, are uniform in neoprene type, density, and thickness.

[0014] However, the art has failed to appreciate that it is both unnecessary and undesirable to have neoprene on the shoulder areas of the wetsuit, since the use of neoprene in this area merely heats up muscles that are doing most work of the work in a swimming event, and restricts the swimmer's range of motion. While some companies, such as Quintana Roo (Chattanooga, Tennessee), have sold "speed sleeves" (see, e.g., <http://www.wetsuitrental.com/quintana-roo-speed-sleeve.html>) which, as a standalone device, leave the shoulders uncovered, these solutions are uniform in neoprene type, density, and thickness, and hence do not consider the effect of the distribution of neoprene thickness and density on proper stroke technique and buoyancy.

[0015] It has now been found that the thickness of the neoprene or other foamed polymeric material from which wetsuits are typically fabricated may be manipulated to create a sleeve which optimizes proper stroke technique and buoyancy. In a preferred embodiment, the sleeve utilizes (a) textile or thin neoprene at a first thickness (preferably 1-2mm) on the medial forearm area, upon which is laminated one or more layers of silicone or other textured material to increase resistance during the "catch" or "pull" phase of the swim stroke, (b) textile or thin neoprene at a second thickness (preferably 1mm or less) in the elbow and crook or in an articulated panel design, (c) neoprene at a third thickness (preferably 3-5mm) in the bicep area, and (d) neoprene at a fourth thickness (preferably at least about 5mm and of aerated or open cell neoprene form) in the form of a strip on the lateral portion of the forearm extending from the wrist through the triceps. The sleeve also preferably utilizes in the forearm and/or the bicep and tricep neoprene or textile laminates with muscle compression technology (most commonly found in the form of a special textile weave), the purpose of which is to reduce fatigue and encourage venous blood flow during exercise.

[0016] In addition, the maximum allowable (currently 5mm) thickness of neoprene under various triathlon and swimming governing bodies is preferably used down the centerline of the wetsuit and inside of the legs to promote buoyancy along the lateral axis (pitch) and enhanced rotation along the longitudinal axis (roll) of the swimmer's body. The neoprene selection for this portion is preferably aerated neoprene, such as that sold by the Yamamoto Corporation under the trade name AERODOME™. This neoprene selection helps to optimize buoyancy while complying with appropriate thickness regulation(s).

Since some aerated neoprenes do not conform well to the natural curvature of the lower back, it is preferred in some embodiments that aerated neoprene is only used on the front of the wetsuit.

[0017] A coated textile or another thin material with less buoyancy is used in a strip about 5.08 - 7.62 cm (2-3 inches) wide down the *outside* of the wetsuit to promote rotation along the longitudinal axis of the user's body and to promote rotation and allow heat to escape from the suit. This feature also makes entry and removal of the suit easier and faster, which is critical for the timed sport of triathlon, where athletes must exit the water and quickly remove swimwear before proceeding to the next discipline, cycling. Non-aerated 5mm closed cell neoprene may be used in between the centerline. Neoprene of a lesser thickness, preferably about 2mm to about 3mm, is used from the naval up (excluding the centerline, which preferably has a thickness of 5mm or the maximum allowable under said governing bodies) to create and compensate for the buoyancy differential between the chest and legs along the lateral axis (pitch). The use of more rigid neoprene in the torso area also provides structural support to the abdominals and other core muscles, which can tire prematurely during swimming. Preferably, the most flexible neoprene is reserved for the chest, back, shoulder and arm panels, where maximum range of motion is desired.

[0018] It will be appreciated from the foregoing that some of the wetsuits disclosed herein utilize variable rigidity to optimize certain characteristics of the wetsuit. In particular, in some embodiments, the wetsuits disclosed herein are constructed to have some rigidity in certain locations, such as along the center line and along the sides of the torso. Some embodiments of these wetsuits may be further equipped with one or more additional strips, disposed directly on the side of the torso between the hip and the middle of the rib cage, that are even more rigid to prevent "snaking" when swimming. Moreover, some embodiments may contain relatively more elastic or rigid neoprene on the back of the suit to prevent the swimmers arms from over-extending during the entry and extension phase of the freestyle stroke, helping to promote proper technique.

[0019] In some variations of the foregoing embodiment, various types of "treads" may be utilized in the forearm area to optimize the "catch" and "feel" of the swimmer's stroke. Preferably, this includes a "graded" catch panel that enhances propulsion by creating additional surface area and resistance on the forearm. Moreover, the foregoing features may be implemented in a full wetsuit (with sleeves) or in a "hybrid" configuration with a long john (no sleeves) and separate swim sleeves.

[0020] Another area requiring further improvement in existing wetsuit and swimwear designs - especially those intended for use by triathletes and other competitive swimmers - relates to the user's body temperature. Conventional wetsuits are typically constructed from neoprene and other thermally insulating materials. Conse-

quently, users can overheat (or experience the sensation of overheating) in such wetsuits, even when swimming at submaximal (e.g., below lactate threshold or aerobic threshold) effort levels. Such overheating may lead to premature fatigue and dehydration. A similar problem may be encountered with textile-based wetsuits or other swimwear.

[0021] It has now been found that this problem may be addressed by incorporating cooling packs or other thermoregulation devices into the wetsuit or swimwear. In addition to actually cooling and temperature regulation of muscle and veins, the provision of such devices also treats the mind and the nervous system.

[0022] In a preferred embodiment, the thermoregulation devices may take the form of thin neoprene or textile pouches which contain cooled, frozen or instant gel packs (the latter of which may be automatically or manually activated prior to or during exercise), and which affix to (or are defined in) the inside of the wetsuit or other swimwear. The gel packs may assume different shapes and sizes, based on their location in the swimwear.

[0023] In some variations, the gel packs may be laminated to the swimwear, or might be configured to be used without the provision of pouches, pockets or compartments in the swimwear. In particular, the thermoregulation devices may be fabricated as separate, removable constructs that can be sold as add-on products for swimwear that are not equipped with thermoregulation devices. In some embodiments, the swimwear may also incorporate systems that monitor temperature, circulate fluid, or create specific temperature regulated spots on certain parts of the suit to achieve the intended thermoregulatory effect.

[0024] Another area requiring further improvement in existing wetsuit design, especially for swimmers, relates to the manner in which the wetsuit is secured around the body of a user. In a conventional wetsuit, a zipper is provided on the back of the suit for this purpose. The use of a zipper is convenient in that it allows the user to change into and out of the wetsuit quickly and easily. However, the disposition of the zipper on the back of the suit is a legacy from surfing and bodyboarding wetsuits, where it is desirable to minimize any abrasion on the chest that could result from repeated contact with a surfboard or bodyboard.

[0025] It has now been found that the use of wetsuits by competitive swimmers may be enhanced by disposing the zipper on the front (or, in some embodiments, on the side or at an angle sweeping from the front to the side) of the wetsuit. This disposition of the zipper allows for easier, faster, and less energy-consuming entry and exit from the suit, which is a significant advantage in competitive events such as triathlons, where a transition from the swim portion of the race to the cycling portion of the race typically takes minutes. This disposition also offers better access to the thermoregulation pouches in the chest and any electronic devices that may be integrated into the suit. While it may be desirable in surfing and

bodyboarding wetsuits to minimize any abrasion on the chest that could result from repeated contact with a surfboard, no such constraints exist in swimming applications.

[0026] Moreover, the disposition of the zipper on the front of the wetsuit reduces fabric bunching at or near the base of the neck. Such bunching tends to occur, for example, when the user looks up to sight a line of navigation while swimming, as is common in triathlon races that involve a polygonal swim course defined by multiple floating buoys. This issue is especially problematic in triathlon swimming, because such bunching lets in water and air, which can be uncomfortable and can alter body position and buoyancy characteristics, and which can lead to chafing of the neck.

[0027] Some companies have attempted to address this issue by over-engineering a large neoprene flap in this area and by using releasable fasteners such as the hook and loop type fasteners marketed under the trade name VELCRO®, but these provisions do not adequately address the problem. In fact, this approach may create more bunching and may actually make it harder for the swimmer to lift his or her head, due to the increased mass of the flap. Additionally, adding a flap and additional material to the back of the neck increases drag, which further limits performance. Moreover, such a flap may cause significant drag for suits that are often sold with very expensive, special coatings touted to marginally minimize drag coefficients. By contrast, with the zipper disposed in the front of the wetsuit, such bunching may be reduced, the water/air seal may be improved, drag is reduced, and it is easier for the swimmer to lift his or her head to sight a buoy, the coastline, or other reference point required for navigation.

[0028] A further area requiring improvement in existing wetsuit designs, especially for swimmers, relates to the formation or presence of air bubbles or water in the suit during use. In particular, air bubbles are often created in the lower back portion of the wetsuit. The wetsuit may also take on water or air due to the natural arch in a user's back, or due to suboptimal neoprene panel design.

[0029] It has now been found that the foregoing problems may be dealt with through the provision of a one-way air and/or water release valve in the wetsuit. Such a valve provides the means by which trapped air or water may be removed from the suit, without causing the suit to take on additional air or water. The valve may be manually activated by the user, or may be activated automatically by a monitoring system or by other means. A simple valve may be created by using two layers of neoprene with offset holes, such that air passes from one set of interior holes out into a chamber that then has a single escape hole. Alternatively, an engineered valve may be built and integrated into the suit. Such valve preferably has a low-profile and is relatively flat to minimize drag in the water. One or more valves may be placed in the suit to remove one or more pockets of air. For example, two valves may be placed, individually, on either side of the

rear zipper. Alternatively, a single valve may be placed just below the base of the rear zipper. In a wetsuit embodiment that contains a front zipper instead of a rear zipper, one or more valves could be placed directly on the rear centerline of the suit.

[0030] Still another area requiring improvement in existing wetsuit and swimwear designs relates to proper hydration of the wearer. Many competitive events featuring a swimming component require contestants to spend a considerable amount of time in the water. For example, the swimming portion of the Ironman competition is a 3.86 km (2.4 miles) race. Even for excellent swimmers, this distance can take an hour or longer to complete. Moreover, many races take place in relatively warm water and warm ambient temperatures, where dehydration can become a concern. Dehydration and improper nutrition are the enemies of a triathlete, and the swim is the start of a multi-hour effort. Swimming in warm water, or in a hot wetsuit or other overheating swimwear, may significantly increase the chance of dehydration.

[0031] It has now been found that this issue may be dealt with through the provision of a pouch that allows insertion of a hydration bladder, a nutrition compartment, or both. This pouch may be disposed, for example, on the chest or back panel(s) down the centerline. In some variations, the bladder may be laminated to the swimwear, or might be configured to be used without the provision of pouches, pockets or compartments in the swimwear. In particular, the bladder may be fabricated as a separate, removable construct that can be sold as add-on products for swimwear that is not equipped with a bladder or pouch.

[0032] In some embodiments, the bladder or compartment may be equipped with a one-way valve or other such means to prevent it from taking on air and thus becoming a buoyancy aide. This may allow the device to comply with USAT and WTC rules that prohibit the use of floaties or other devices that aide buoyancy, since the valve would serve to make the hydration bladder buoyancy neutral by keeping it full of liquid or keeping it empty. Of course, it will be appreciated that these provisions may not be necessary if, for example, the swimwear is to be used merely as a "training" suit.

[0033] Another area requiring improvement in existing designs for wetsuits and other swimwear relates to the integration of technology into the swimwear, and GPS technology in particular. Triathletes frequently use GPS to track their performance on the swim, bike, and run portions of a triathlon, but many athletes do not want to wear a bulky watch while swimming, or attach an add-on externally. Furthermore, GPS tracking can also function as a safety precaution in races, training, and recreational swimming. Existing GPS technology limits the accuracy of the swim data. In particular, although some advances have been made in the use of software to smooth the spikes in the GPS swim readings that come from losses in signal, this is achieved through computational guesses, and hence the results may not reflect the

swimmer's actual course through the water. Some swimmers have attempted to place their GPS watches inside of their latex or silicone swimming caps, in the hopes of keeping the GPS device above water, to improve the reception. However, bulky watches can shift in the swimming cap and can be both noticeable and uncomfortable.

[0034] It has now been found that this issue may be dealt with through the integration into the swimwear of a GPS antenna/receiver, through construction of the suit or the inclusion of a pouch, which may connect or pair with a tracking device to increase the GPS signal reception. The antenna/receiver (which may comprise, for example, wires that run through or along the surface of the back of the swimwear and a waterproof hardwire cable connection that can interface with a GPS device) may be designed as a proprietary device, but may also be configured to be compatible with third-party receivers using a suitable adapter in a wired or wireless configuration. The antenna/receiver may also connect to a receiver via wireless transmission using various commercial protocols such as, but not limited to, ANT+ and Bluetooth™.

[0035] Yet another area requiring improvement in existing designs for wetsuits and other swimwear relates to the cadence of the swimmer's stroke. In distance swimming, it is important to maintain an even cadence and distance per stroke to maintain a consistent pace and physical effort. This issue is of tremendous importance in a multi-hour event that is largely completed at an aerobic effort level, such as a long distance triathlon or open water swim race. Moreover, in competitive swimming events such as triathlons, it is easy to get distracted, thus causing the swimmer to lose cadence or distance per stroke and become fatigued.

[0036] It has now been found that this issue may be dealt with through the integration into the swimwear of one or more cadence sensors to relay cadence information to swimmer. In a wetsuit, this may take the form, for example, of accelerometer sensors built into the forearms of the wetsuit, which may use appropriate radio signals or hardwiring to relay cadence data to a central computing system (which may or may not be integrated into the wetsuit). In some embodiments, the arms of the wetsuit may contain LED panels that alert the swimmer with colors or light patterns when pre-defined cadence goals are met. Other embodiments may contain a vibration mechanism that alerts the swimmer when certain goals are no longer being achieved, or when the cadence of the swimmer has deviated undesirably. Still other embodiments may utilize LEDs to signal distance completion, especially when used in coordination with a GPS system. Such a configuration is of value because it is difficult for a swimmer to know where he or she is distance-wise during a 3.86 km (2.4 miles) swim. Variations of this embodiment may utilize audio cues, either in place of or in addition to LED signals. In other embodiments, cadence sensors may be disposed in the ankles of the wetsuit to monitor the strength of the kick, since a steady kick is important for both stabilization and propulsion. Of

course, it will be appreciated that the foregoing features may be implemented in types of swimwear other than wetsuits.

[0037] Another area requiring improvement in existing designs for wetsuits and other swimwear relates to the heart rate of the swimmer. In competitive swimming events such as triathlons, it is easy to get excited or anxious in a race and swim too fast or too hard at points in the race. For example, many triathlons have "mass swim starts" that involve hundreds or thousands of athletes starting the swim in a large group. This may lead to a premature rise in heart rate that causes undesired fatigue. This issue is of critical importance in long distance triathlons, which are often completed over multiple hours and raced at aerobic effort levels.

[0038] It has now been found that this issue may be dealt with through the integration into the wetsuit or other swimwear of a heart rate monitor to give a swimmer in-water feedback on heart rate. This may be accomplished, for example, through the use of pre-existing heart rate monitor chest, ear and/or wrist strap technology to monitor heart rate metrics and to relay data to a central computing system (which may or may not be integrated into the wetsuit). The swimwear may be adapted to vibrate or otherwise alert the swimmer when pre-defined heart rate goals are met, lost or deviated from. In some embodiments, the heart rate monitor may be integrated with an LED, fiber optic or other visual indicator system to provide visual alerts, or with an audio system to provide audio alerts.

[0039] Still another area requiring improvement in existing designs for wetsuits and other swimwear relates to the performance metrics of the swimmer, such as heart rate. It is very difficult to track overall performance and metrics while swimming, especially while racing.

[0040] It has now been found that this issue may be dealt with through the integration into the swimwear of a performance feedback monitoring system to give athletes convenient access to key performance and health data while they are training and competing. Such data may include, but is not limited to, heart rate, cadence, distance, direction, speed and body temperature. This may be accomplished, for example, through the use of thin, hydrodynamic wrist units, ear buds for audio communication, or heads-up display goggle units that communicate with various sensors and monitoring systems built into the swimwear. Such systems may also integrate with the swimmer's cap, which is a required piece of equipment in triathlons and which could serve as a storage location and a "bridge" between the goggle system and the suit.

[0041] FIGs. 1-4 depict a first particular, non-limiting embodiment of a wetsuit in accordance with the teachings herein. The wetsuit 101 depicted comprises a top portion 103, a middle portion 105 and a bottom portion 107. The top portion 103 extends around the shoulders and chest of the wearer, and includes sleeve portions 109 that extend down the arms of the wearer. Each of

the sleeve portions 109 terminates in a cuff 111. The top portion 103 terminates at one end in a collar 113 which extends around the neck of the wearer, and terminates at the other end at the middle portion 105.

[0042] The bottom portion 107 includes a waist portion 115 that extends around the waist of the wearer, leg portions 117 that extend down the legs of the wearer, and a crotch portion 119.

[0043] As seen in FIG. 2, the wetsuit 101 is equipped with a zipper 121 that extends down the back of the wetsuit 101 from the collar 113 to the bottom portion 107. A strap 123 is provided which allows the wearer to zip and unzip the wetsuit without help.

[0044] A first buoyancy enhancer 125 (see FIG. 1) is provided on the front of the wetsuit 101 in the form of a strip which extends from the collar 113 to the crotch 119. Similarly, a second buoyancy enhancer 127 (see FIG. 2) is provided on the back of the wetsuit 101 in the form of a strip which extends from the intersection between the top 103 and middle 105 portions to the crotch 119. In some embodiments, the second buoyancy enhancer 127 may comprise a different (and preferably more flexible) material than the first buoyancy enhancer 125 to allow the wetsuit to better follow the curvature of the lower back.

[0045] In use, the buoyancy enhancers 125, 127 provide additional buoyancy in the center of the wetsuit 101 along the longitudinal axis of the wearer's body. Without wishing to be bound by theory, the additional buoyancy is believed to allow the wearer's body to ride higher in the water during swimming, thus reducing the resistance encountered by the wearer by reducing the amount of surface area of the wearer's body which is in contact with the water. Reduction of buoyancy in the chest and back panels on either side of the centerline reduces mass in the chest. When coupled with the relatively greater buoyancy in the legs, the wetsuit puts the swimmer's body in a neutral body position. Without such equalization, the body's natural floatation source (the lungs) would cause the swimmer's chest to float too high in the water relative to the hips and legs, causing form drag. A proper, neutral body position in swimming is colloquially known as "swimming downhill," because it creates the sensation of swimming downwards. This position is actually ideal, and provides the least amount of form drag.

[0046] Moreover, the placement of the additional buoyancy along the longitudinal axis of the wearer's body is believed to provide for better rotational stability, decreased resistance during a normal swim stroke (such as a traditional free style stroke), and improved balance. By contrast, some prior art swimsuits which are equipped with buoyancy enhancers have the buoyancy enhancers disposed along the hips and/or arms and legs of the wetsuit. Such designs create imbalance and rotational instability during a normal swim stroke. Moreover, such designs increase the resistance encountered by the user by increasing the buoyancy of the user's arms and legs as they move through the water.

[0047] FIGs. 5-9 depict a second particular, non-limit-

ing embodiment of a wetsuit in accordance with the teachings herein. The wetsuit 201 depicted comprises a top portion 203, a middle portion 205 and a bottom portion 207. The top portion 203 extends around the shoulders and chest of the wearer, and includes sleeve portions 209 that extend down the arms of the wearer. Each of the sleeve portions 209 terminates in a cuff 211. The top portion 203 terminates at one end in a collar 213 which extends around the neck of the wearer, and terminates at the other end at the middle portion 205.

[0048] The bottom portion 207 includes a waist portion 215 that extends around the waist of the wearer, leg portions 217 that extend down the legs of the wearer, and a crotch portion 219.

[0049] As seen in FIG. 6, the wetsuit 201 is equipped with a zipper 221 that extends down the back of the wetsuit 201 from the collar 213 to the bottom portion 207. A strap 223 is provided which allows the wearer to zip and unzip the wetsuit without help.

[0050] A first buoyancy enhancer 225 (see FIG. 5) is provided on the front of the wetsuit 201 in the form of a strip which extends from the collar 213 to the crotch 219. Similarly, a second buoyancy enhancer 227 (see FIG. 6) is provided on the back of the wetsuit 201 in the form of a strip which extends from the intersection between the top 203 and middle 205 portions to the crotch 219. The buoyancy enhancers 225, 227 in this embodiment function in a manner similar to the buoyancy enhancers 125, 127 of the embodiment of FIGs. 1-4.

[0051] While the wetsuit 201 of FIGs. 5-9 is similar in many respects to the wetsuit 101 of FIGs. 1-4 (ornamental aspects aside), the wetsuit 201 of FIGs. 5-9 has some additional features. In particular, the wetsuit 201 of FIGs. 5-9 is equipped with regions 251, 255 and 257 in which the material of the wetsuit 201 has greater flexibility to allow for freer movement in these areas. This may be accomplished, for example, by inserting panels of a thinner, more flexible material into these areas. The thinner material may be, for example, a foamed polymeric material. Preferably, the bulk of the wetsuit comprises neoprene having a first thickness, regions 251, 255 and 257 comprise neoprene having a second thickness which is less than the first thickness, and the buoyancy enhancers 225, 227 comprise neoprene having a third thickness which is greater than the second thickness. Most preferably, the density of the material of the buoyancy enhancers 225, 227 is d_1 , the density of the material from which the bulk of the wetsuit is made is d_2 , and the density of the material of regions 251, 255 and 257 is d_3 , and $d_1 < d_2 \leq d_3$.

[0052] The wetsuit 201 of FIGs. 5-9 is further equipped with drag strips 253 on the inner forearms of the wetsuit 201. These drag strips 253 are configured to increase the resistance of this portion of the wetsuit 201, thus improving the power and energy efficiency of the wearer's swimming stroke during the down stroke (e.g., in a traditional freestyle stroke). In a preferred embodiment, the drag strips comprise a plurality of ribs whose longitudinal

axes are more or less perpendicular to the longitudinal axis of the wearer's forearm (and the longitudinal axis of the sleeve 209). These strips also provide improved proprioception or "feel for the water," which is important in swimming. This orientation allows the drag strips to "grip" the water, thus helping to propel the wearer through the water. In some embodiments, a portion of a suitable textile may be utilized in this part of the wetsuit to improve proprioception.

[0053] The wetsuit 201 of FIGs. 5-9 is further equipped with strips 259 on the sides of the leg portions 217. The strips 259 help to lessen resistance as the wearer moves through the water by covering the seam that exists between opposing edges of the fabric of the leg portions 217. In some embodiments, the strips 259 may also comprise a low density material to further improve the buoyancy of the wearer. Thus, for example, in some embodiments, the bulk of the leg portions may comprise a foamed polymeric material (such as, for example, neoprene) which has a thickness within the range of about 3 mm to about 6 mm, and more preferably a thickness within the range of about 4 mm to about 5 mm, while the strips 259 preferably have a thickness within the range of about 0.5 mm to about 2.5 mm, and more preferably have a thickness within the range of about 1 mm to about 2 mm. In some variations, the terminal portions of the leg portions that extend about the ankles of the wearer may also have a thickness within the range of about 0.5 mm to about 2.5 mm, and more preferably have a thickness within the range of about 1 mm to about 2 mm, to facilitate exit from the wetsuit. These terminal portions preferably have a length that is less than 5.08 cm (2 inches), and more preferably have a length within the range of about 1.27 cm (0.5 inches) to about 2.54 cm (1 inch).

[0054] FIGs. 10-13 depict a first swimsuit. The swimsuit 301 depicted comprises a waist portion 315 that extends around the waist of the wearer, a waist strap 361 which secures the waist portion 315 to the body of the user (and which may include, for example, a suitable elastic material, a drawstring, or both, or any other suitable means to secure the waist portion 315 to the body of the user), and a crotch portion 319. A first buoyancy enhancer 325 is provided on the front of the swimsuit 301 in the form of a strip which extends from the waist strap 361 to the crotch portion 319. Similarly, a second buoyancy enhancer 327 (see FIG. 11) is provided on the back of the swimsuit 301 in the form of a strip which also extends from the waist strap 361 to the crotch portion 319. The buoyancy enhancers 325, 327 in this swimsuit function in a manner similar to the buoyancy enhancers 125, 127 of the wetsuit of FIGs. 1-4.

[0055] The swimsuit 301 of FIGs. 10-13 is further equipped with strips 359 on the sides of the waist portion 315. The strips 359 in this swimsuit serve a similar function as the strips 259 in the wetsuit of FIGs. 5-9.

[0056] FIGs. 14-17 depict a third particular, non-limiting embodiment of a wetsuit in accordance with the teachings herein. The wetsuit 401 depicted comprises a

top portion 403, a middle portion 405 and a bottom portion 407. The top portion 403 extends around the shoulders and chest of the wearer. Unlike the embodiment of the wetsuit 101 of FIGs. 1-4, the wetsuit in this embodiment is sleeveless, and is instead equipped with openings 463 through which the wearer's arms protrude. The top portion 403 terminates at one end in a collar 413 which extends around the neck of the wearer, and terminates at the other end at the middle portion 405. The bottom portion 407 includes a waist portion 415 that extends around the waist of the wearer, leg portions 417 that extend down the legs of the wearer, and a crotch portion 419.

[0057] As seen in FIG. 15, the wetsuit 401 is equipped with a zipper 421 that extends down the back of the wetsuit 401 from the collar 413 to the bottom portion 407. A strap 423 is provided which allows the wearer to zip and unzip the wetsuit without help.

[0058] A first buoyancy enhancer 425 (see FIG. 14) is provided on the front of the wetsuit 401 in the form of a strip which extends from the collar 413 to the crotch 419. Similarly, a second buoyancy enhancer 427 (see FIG. 15) is provided on the back of the wetsuit 401 in the form of a strip which extends from the intersection between the top 403 and middle 405 portions to the crotch 419. The buoyancy enhancers 425, 427 in this embodiment function in a manner similar to the buoyancy enhancers 125, 127 of the embodiment of FIGs. 1-4.

[0059] The wetsuit 401 of FIGs. 14-17 is further equipped with strips 459 on the sides of the leg portions 417. The strips 459 help to reduce friction as the wearer moves through the water by covering the seam that exists between opposing edges of the fabric of the leg portions 417. In some embodiments, the strips 459 may also comprise a low density material to further improve the buoyancy of the wearer, which may also have the benefit of helping to achieve proper rotation of the wearer's body during swimming.

[0060] FIG. 18 depicts a particular, non-limiting embodiment of a swim sleeve in accordance with the teachings herein. The swim sleeve 509 depicted is a right-handed swim sleeve, and is shown (moving clockwise from top to bottom) from the front, back and righthand side; for each figure, the corresponding left-handed version of the swim sleeve 509 is a mirror image.

[0061] The swim sleeve 509 terminates on one end in a cuff 511. The swim sleeve 509 is further equipped with drag strips 553, which serve a similar purpose to the drag strips 253 described with respect to the wet suit 201 of FIGs. 5-9. The swim sleeve 509 is also equipped with a region 563 in which the material of the swim sleeve 509 has greater flexibility to allow for freer movement in this area, similar to the regions 251, 255 and 257 in the wetsuit 201 of FIGs. 5-9.

[0062] The swim sleeve 509 may be used in conjunction with a sleeveless wetsuit such as the wetsuit 401 of FIGs. 14-17, in which case the resulting combination provides the user with the benefits of a sleeve, while also providing somewhat freer movement of the shoulders.

[0063] In still other embodiments, the swim sleeve 509 may be releasably attachable to a short sleeve wetsuit to provide the user with the option of swimming with a full or short sleeve wetsuit. In these embodiments, the swim sleeve 509 and/or the wetsuit may be equipped with suitable means for releasably attaching the swim sleeve 509 to the wetsuit.

[0064] FIGs. 19-21 depict a particular, non-limiting embodiment of a wetsuit in accordance with the teachings herein which is equipped with an electronics package. The wetsuit 601 depicted therein comprises a top portion 603, a middle portion 605 and a bottom portion 607. The top portion 603 extends around the shoulders and chest of the wearer, and includes sleeve portions 609 that extend down the arms of the wearer. Each of the sleeve portions 609 terminates in a cuff 611. The top portion 603 terminates at one end in a collar 613 which extends around the neck of the wearer, and terminates at the other end at the middle portion 605.

[0065] The bottom portion 607 includes a waist portion 615 that extends around the waist of the wearer, leg portions 617 that extend down the legs of the wearer, and a crotch portion 619.

[0066] As seen in FIG. 20, the wetsuit 601 is equipped with a zipper 621 that extends down the back of the wetsuit 601 from the collar 613 to the bottom portion 607. A strap 623 is provided which allows the wearer to zip and unzip the wetsuit without help.

[0067] A first buoyancy enhancer 625 (see FIG. 19) is provided on the front of the wetsuit 601 in the form of a strip which extends from the collar 613 to the crotch 619. Similarly, a second buoyancy enhancer 627 (see FIG. 20) is provided on the back of the wetsuit 601 in the form of a strip which extends from the intersection between the top 603 and middle 605 portions to the crotch 619. The buoyancy enhancers 625, 627 in this embodiment function in a manner similar to the buoyancy enhancers 125, 127 of the embodiment of FIGs. 1-4.

[0068] The wetsuit 601 depicted is further equipped with a central processing unit (CPU) 651 or other suitable controller which, in the particular embodiment depicted, is in communication with first 653, second 655 and third 657 sets of accelerometers or other suitable sensors by way of suitable wires 659. The members of the first set 653 of accelerometers are preferably disposed in the waist portion 615 of the wetsuit 601 such that they lie over the hips of the wearer. The members of the second set 655 of accelerometers are preferably disposed in the arms 609 of the wetsuit 601 and preferably adjacent to the cuffs 611. The members of the third set 657 of accelerometers are preferably disposed in the leg portions 617 of the wetsuit 601, and preferably such that they are disposed near the feet of the wearer.

[0069] One or more displays 661 may be provided in one or both arms 609 of the wetsuit 601 (and are preferably disposed over the wrist of the wearer) which are in communication with the CPU 651 and/or the accelerometers 653, 655, 657 and which allow the wearer of the

wetsuit 601 to view data or control the wetsuit features.

[0070] In use, the first set 653 of accelerometers may be utilized to collect information, for example, about the distance the wearer has traveled and the degree and rate of rotation of the wearer's hips (preferably as a function of time). The second 655 and third 657 sets of accelerometers may be utilized to collect information, for example, about the wearer's swimming cadence and the energy expended by the user (preferably over a period of time, or as a function of time).

[0071] The wetsuit 601 of FIGs. 19-21 offers a number of potential advantages, and may be utilized for various purposes. For example, in order to have success in competitive endurance events such as triathlons, a competitor must develop proper swimming mechanics, including a cadence that strikes a proper balance between maximizing speed and minimizing energy expenditure. The motion of a swimmer's hips, arms and legs, and the force with which those motions occur, are all important aspects of such mechanics. The wetsuit 601 of FIGs. 19-21 may be utilized to collect information about these mechanics, thus helping the wearer to identify flaws in their swimming mechanics, or to detect deviations from proper swimming mechanics which may occur over time (e.g., as the wearer becomes fatigued).

[0072] In some embodiments, the wetsuit may be equipped with appropriate means to generate visual or audio indicia or cues whenever deviations from proper swimming mechanics occur, thus helping the wearer to develop improved mechanics, avoid deviations from improper mechanics, and develop a better feel for when deviations from proper mechanics occur. Consequently, the wetsuit 601 of FIGs. 19-21 is useful not only as a competitive wetsuit (where permitted by applicable rules), but is also useful as a training device.

[0073] Several variations or modifications are possible to the wetsuit 601 of FIGs. 19-21. For example, the wetsuit depicted therein may be equipped with a GPS, which may be separate from, or integral with, the CPU or other control unit. The GPS, or one or more antennas associated therewith, are preferably disposed on the back of the wetsuit or in an associated swim cap. The GPS may be utilized for various purposes, including tracking the position of the wearer for data collection purposes or to inform the wearer when they are deviating from a desired course. Thus, for example, the GPS functionality may be utilized by open water swimmers to stay on course, despite distractions, currents, or other influences that may lead to course deviations.

[0074] The wetsuit 601 of FIGs. 19-21 may also be equipped with various other accessories. For example, the wetsuit may be equipped with goggles that interface with the CPU or GPS to offer heads-up display of performance or positional data. The wetsuit may also be equipped with a heart rate monitor, or may be adapted to interface with a heart rate monitor worn by the user. Such a heart rate monitor may, for example, be a strap-on unit that is affixed to the chest of the user with one or

more straps, or may be a type that is affixed to the user's chest with a removable adhesive. The wetsuit may also be equipped with suitable transceivers to transmit, for example, data collected from sensors disposed in the wetsuit, or to receive data from an external source. The wetsuit may also be equipped with onboard memory (in the form of memory cards or other suitable media) to store data when necessary or desirable.

[0075] Moreover, while the wetsuit 601 of FIGs. 19-21 is depicted as having three sets of accelerometers, each of which has two members, one skilled in the art will appreciate that various other types of sensors may be utilized in place of, or in addition to, accelerometers. Moreover, any suitable number of accelerometers or other sensors may be utilized in wetsuits made in accordance with the teachings herein, and the placement of these accelerometers or other sensors may vary.

[0076] Furthermore, while the wetsuit 601 of FIGs. 19-21 has been described with reference to the use of wires to provide a communications conduit between the sensors and the CPU or GPS, it will be appreciated that various types of cables, optical fibers, wireless signals, or other suitable communications means may be utilized for communicating between such elements in wetsuits made in accordance with the teachings herein.

[0077] It will also be appreciated that the features described with respect to the wetsuit 601 of FIGs. 19-21 may be incorporated into the other wetsuits and swimsuits disclosed herein, with modifications where appropriate. For example, in sleeveless wetsuit embodiments, any electronics normally disposed in the sleeve portions may be moved to other portions of the wetsuit, or may be disposed in a separate swimming sleeve (or sleeves) and may communicate wirelessly with the components in the wetsuit.

[0078] It will also be appreciated that materials of various thicknesses, densities and dimensions may be employed in the wetsuits and swimsuits described herein. For example, the first buoyancy enhancers (e.g., elements 125 and 325 of FIGs. 1 and 10, respectively) in the wetsuits and swimsuits described herein preferably have widths within the range of about 2.54 cm (1 inches) to about 17.78 cm (7 inches), and more preferably have widths within the range of about 10.16 cm (4 inches) to about 15.24 cm (6 inches). The second buoyancy enhancers (e.g., elements 127 and 327 of FIGs. 1 and 10, respectively) in the wetsuits and swimsuits described herein preferably have the same or similar widths as the first buoyancy enhancers; however, while the first buoyancy enhancers preferably comprise an aerated polymeric material, the second buoyancy enhancers preferably do not comprise an aerated polymeric material, since non-aerated polymeric materials are typically more flexible and conform better to the lower back of the wearer.

[0079] The cuffs (e.g., element 111 in FIG. 1) have a width that is preferably in the range of about 2.54 cm (1 inch) to about 5.08 cm (2 inches). In the swimming

sleeves of FIG. 18, the cuffs 511 have a width that is preferably in the range of about 2.54 cm (1 inch) to about 7.62 cm (3 inches). The strips (e.g., elements 259, 359 and 459 of FIGs. 8, 10 and 16, respectively) have a width that is preferably in the range of about 2.54 cm (1 inch) to about 7.62 cm (3 inches). The waist strap (e.g., element 361 in FIG. 10) has a width that is preferably in the range of about 2.54 cm (1 inch) to about 5.08 cm (2 inches). Region 563 in the swim sleeve 509 of FIG. 18 has a width that is preferably in the range of about 10.16 cm (4 inches) to about 15.24 cm (6 inches). The drag strips 553 in the swim sleeve 509 of FIG. 18 occupy a region having a maximum width which is preferably within the range of about 15.24 cm (6 inches) to about 20.32 cm (8 inches).

[0080] The swimwear described herein may also be equipped with, or used in conjunction with, a heart rate monitor. Preferably, the heart rate monitor is a manufactured plastic module (heart rate module, ANT+ and Bluetooth™ compatible, battery powered with removable battery and screw off door) coupled with an adhesive strip that affixes to the chest or another area where heart rate may be accurately measured. The use of an adhesive strip avoids the need for fabric straps, which can be uncomfortable. In some wetsuits, the device may have a molded plastic female adapter that allows the heart rate module to be removably attached (e.g., by clipping it into place). This approach is similar to the adhesive strips for an infusion site for a type one diabetic, and such devices are produced, for example, by Medtronic Inc. (Minneapolis, MN). Such adhesive strips may be marketed as boxes of single use strips, and may be packaged with alcohol wipes to remove any extra adhesive. A heart rate monitor of this type may then be paired with a computer or watch for use during the cycling and running portions of a triathlon, without concern for movement or shifting during exercise.

[0081] The swimwear described herein may also be equipped with, or used in conjunction with, various heads up displays, which may be incorporated, for example, into a pair of swimming goggles. In some wetsuits, such heads-up displays may utilize fiber optics or LEDs, either as a laminate on some part of the glass or as a separate module that is permanently or semi-permanently attached thereto. Such wetsuits may be equipped with an operating system that receives information (e.g., performance data) from a CPU and generates light, vibration, or audio cues (or some combination of the foregoing) to apprise the user of the status or characteristics of the performance data. The heads-up display may include manual, automatic or voice activated controls to allow the user to cycle through display fields or types, to navigate a graphical user interface (GUI), and to perform other such functions. Preferably, the foregoing system is waterproof, shockproof, oil and sweat resistant, and generally very light and durable. In some wetsuits, the swimwear described herein may also be equipped with, or used in conjunction with, a means for releasing odors

that may trigger a known and desired physiological response.

[0082] The above description of the present disclosure is illustrative, and is not intended to be limiting. It will thus be appreciated that various additions, substitutions and modifications may be made to the above described wetsuits, in accordance with the appended claims.

Claims

1. A wetsuit (201) comprising:

a top portion (203), a middle portion (205) and a bottom portion (207), wherein the top portion (203) terminates at one end in a collar (213) which extends around the neck of the wearer and terminates at the other end at the middle portion (205) and the bottom portion (207) includes a waist portion (215) that extends around the waist of a wearer, leg portions (217) that extend down the legs of the wearer, and a crotch portion (219); **characterized by**

a first buoyancy enhancer (225) provided on the front of the wetsuit in the form of a strip which extends along the central longitudinal axis of the wearer from the collar (213) to the crotch portion (219); and

a second buoyancy enhancer (227) provided on the back of the wetsuit (201) in the form of a strip which extends along the central longitudinal axis of the wearer from an intersection between the top portion (203) and middle portion (205), to the crotch portion (219), wherein the first buoyancy enhancer (225) has a width within the range of about 2.54 cm (1 inch) to about 17.78 cm (7 inches) and the second buoyancy enhancer (227) has a width within the range of about 2.54 cm (1 inch) to about 17.78 cm (7 inches).

2. The wetsuit of claim 1, wherein the first buoyancy enhancer (225) comprises an aerated polymeric material.

3. The wetsuit of claims 1 or 2, wherein the second buoyancy enhancer (227) comprises a non-aerated polymeric material.

4. The wetsuit of any preceding claim, further comprising:

a first and second side strips (259) which extend along a side of the leg portions (217) to lessen resistance of the wearer when in water by covering a seam between opposing edges of fabric of the leg portions (217).

5. The wetsuit of claim 4, wherein the first and second side strips (259) have a width within the range of about 2.54 cm (1 inch) to about 7.62 cm (3 inches).

6. The wetsuit of claims 4 or 5, wherein the first and second side strips (259) comprise a low density material to further improve buoyancy of the wearer.

7. The wetsuit of any of claims 4 to 6, wherein the first and second side strips (259) have a thickness within the range of about 0.5 mm to about 2.5 mm.

8. The wetsuit of any preceding claim, wherein the second buoyancy enhancer (227) has the same width as the first buoyancy enhancer (225).

9. The wetsuit of any preceding claim, further comprising a central and a lateral region, wherein the central region comprising a first material has a first density ρ_1 , and wherein the lateral region comprising a second material has a second density ρ_2 ; wherein $\rho_2 > \rho_1$.

10. The wetsuit of any one of claims 1 to 9, wherein the first buoyancy enhancer (225) comprises a different material to the second buoyancy enhancer (227).

11. The wetsuit of claim 10, wherein the second buoyancy enhancer (227) comprises a more flexible material than the first buoyancy enhancer (225).

12. The wetsuit of any preceding claim, wherein a zipper (221) extends down the back of the wetsuit (201) from the collar (213) to the bottom portion (207).

13. The wetsuit of any preceding claim, wherein the top portion (203) extends around the shoulders and chest of the wearer and includes sleeve portions (209) that extend down the arms of the wearer.

Patentansprüche

1. Tauchanzug (201), der Folgendes umfasst:

einen oberen Abschnitt (203), einen mittleren Abschnitt (205) und einen unteren Abschnitt (207),

wobei der obere Abschnitt (203) an einem Ende in einem Kragen (213) endet, der sich um den Hals des Trägers herum erstreckt, und an dem anderen Ende an dem mittleren Abschnitt (205) endet, und wobei der untere Abschnitt (207) einen Taillenabschnitt (215), der sich um die Taille eines Trägers erstreckt, Beinabschnitte (217), die sich an den Beinen des Trägers entlang nach unten erstrecken, und einen Schrittabschnitt

- (219) aufweist; **gekennzeichnet durch** einen ersten Auftriebsverstärker (225), der an der Vorderseite des Tauchanzugs in der Form eines Streifens vorgesehen ist, der sich entlang der mittleren Längsachse des Trägers vom Kragen (213) bis zum Schrittabschnitt (219) erstreckt; und
- einen zweiten Auftriebsverstärker (227), der an der Rückseite des Tauchanzugs (201) in der Form eines Streifens vorgesehen ist, der sich entlang der mittleren Längsachse des Trägers von einem Schnittpunkt des oberen Abschnitts (203) und des mittleren Abschnitts (205) bis zum Schrittabschnitt (219) erstreckt; und
- wobei der erste Auftriebsverstärker (225) eine Breite im Bereich von etwa 2,54 cm (1 Zoll) bis etwa 17,78 cm (7 Zoll) aufweist und der zweite Auftriebsverstärker (227) eine Breite im Bereich von etwa 2,54 cm (1 Zoll) bis etwa 17,78 cm (7 Zoll) aufweist.
2. Tauchanzug nach Anspruch 1, wobei der erste Auftriebsverstärker (225) ein mit Luft durchsetztes Polymermaterial umfasst.
 3. Tauchanzug nach Anspruch 1 oder 2, wobei der zweite Auftriebsverstärker (227) ein nicht mit Luft durchsetztes Polymermaterial umfasst.
 4. Tauchanzug nach einem der vorhergehenden Ansprüche, der ferner Folgendes umfasst: einen ersten und einen zweiten Seitenstreifen (259), die sich entlang einer Seite der Beinabschnitte (217) erstrecken, um den Widerstand des Trägers, wenn er sich im Wasser befindet, zu verringern, indem sie eine Naht zwischen gegenüberliegenden Stoffkanten der Beinabschnitte (217) abdecken.
 5. Tauchanzug nach Anspruch 4, wobei der erste und der zweite Seitenstreifen (259) eine Breite im Bereich von etwa 2,54 cm (1 Zoll) bis etwa 7,62 cm (3 Zoll) aufweisen.
 6. Tauchanzug nach Anspruch 4 oder 5, wobei der erste und der zweite Seitenstreifen (259) ein Material geringer Dichte umfassen, um den Auftrieb des Trägers weiter zu verbessern.
 7. Tauchanzug nach einem der Ansprüche 4 bis 6, wobei der erste und der zweite Seitenstreifen (259) eine Dicke im Bereich von etwa 0,5 mm bis etwa 2,5 mm aufweisen.
 8. Tauchanzug nach einem der vorhergehenden Ansprüche, wobei der zweite Auftriebsverstärker (227) dieselbe Breite aufweist wie der erste Auftriebsverstärker (225).
 9. Tauchanzug nach einem der vorhergehenden Ansprüche, der ferner einen mittleren und einen seitlichen Bereich umfasst, wobei der mittlere Bereich, der ein erstes Material umfasst, eine erste Dichte ρ_1 aufweist, und wobei der seitliche Bereich, der ein zweites Material umfasst, eine zweite Dichte ρ_2 aufweist; wobei $\rho_2 > \rho_1$.
 10. Tauchanzug nach einem der Ansprüche 1 bis 9, wobei der erste Auftriebsverstärker (225) ein anderes Material umfasst als der zweite Auftriebsverstärker (227).
 11. Tauchanzug nach Anspruch 10, wobei der zweite Auftriebsverstärker (227) ein flexibleres Material umfasst als der erste Auftriebsverstärker (225).
 12. Tauchanzug nach einem der vorhergehenden Ansprüche, wobei ein Reißverschluss (221) sich entlang des Rückens des Tauchanzugs (201) vom Kragen (213) bis hinab zum unteren Abschnitt (207) erstreckt.
 13. Tauchanzug nach einem der vorhergehenden Ansprüche, wobei der obere Abschnitt (203) sich um die Schultern und die Brust des Trägers erstreckt und Ärmelabschnitte (209) umfasst, die sich entlang der Arme des Trägers erstrecken.

Revendications

1. Combinaison humide (201) comprenant :

une partie supérieure (203), une partie centrale (205) et une partie inférieure (207), dans laquelle la partie supérieure (203) se termine à une extrémité en un col (213) qui s'étend autour du cou du porteur et se termine à l'autre extrémité à la partie centrale (205), et la partie inférieure (207) comporte une partie formant la taille (215) qui s'étend autour de la taille d'un porteur, des parties formant les jambes (217) qui s'étendent le long des jambes du porteur, et une partie formant la fourche (219) ; **caractérisée par** un premier renforteur de flottabilité (225) prévu sur le devant de la combinaison humide sous la forme d'une bande qui s'étend le long de l'axe longitudinal central du porteur, du col (213) à la partie formant la fourche (219) ; et un deuxième renforteur de flottabilité (227) prévu sur le dos de la combinaison humide (201) sous la forme d'une bande qui s'étend le long de l'axe longitudinal central du porteur, d'une intersection entre la partie supérieure (203) et la partie centrale (205) à la partie formant la four-

- che (219),
dans laquelle le premier renforteur de flottabilité (225) a une largeur dans la gamme d'environ 2,54 cm (1 pouce) à environ 17,78 cm (7 pouces), et le deuxième renforteur de flottabilité (227) a une largeur dans la gamme d'environ 2,54 cm (1 pouce) à environ 17,78 cm (7 pouces).
2. Combinaison humide selon la revendication 1, dans laquelle le premier renforteur de flottabilité (225) comprend un polymère aéré.
 3. Combinaison humide selon la revendication 1 ou 2, dans laquelle le deuxième renforteur de flottabilité (227) comprend un polymère non aéré.
 4. Combinaison humide selon l'une quelconque des revendications précédentes, comprenant en outre : des première et deuxième bandes latérales (259) qui s'étendent le long d'un côté des parties formant les jambes (217) pour réduire la résistance du porteur lorsqu'il est dans l'eau en couvrant une couture entre les bords opposés du tissu des parties formant les jambes (217).
 5. Combinaison humide selon la revendication 4, dans laquelle les première et deuxième bandes latérales (259) ont une largeur dans la gamme d'environ 2,54 cm (1 pouce) à environ 7,62 cm (3 pouces).
 6. Combinaison humide selon la revendication 4 ou 5, dans laquelle les première et deuxième bandes latérales (259) comprennent un matériau à basse densité pour améliorer davantage la flottabilité du porteur.
 7. Combinaison humide selon l'une quelconque des revendications 4 à 6, dans laquelle les première et deuxième bandes latérales (259) ont une épaisseur dans la gamme d'environ 0,5 mm à environ 2,5 mm.
 8. Combinaison selon l'une quelconque des revendications précédentes, dans laquelle le deuxième renforteur de flottabilité (227) a la même largeur que le premier renforteur de flottabilité (225).
 9. Combinaison selon l'une quelconque des revendications précédentes, comprenant en outre une zone centrale et une zone latérale, dans laquelle la zone centrale comprenant un premier matériau a une première densité ρ_1 , et dans laquelle la zone latérale comprenant un deuxième matériau a une deuxième densité ρ_2 ; dans laquelle $\rho_2 > \rho_1$.
 10. Combinaison humide selon l'une quelconque des revendications 1 à 9, dans laquelle le premier renforteur de flottabilité (225) comprend un matériau différent du deuxième renforteur de flottabilité (227).
 11. Combinaison humide selon la revendication 10, dans laquelle le deuxième renforteur de flottabilité (227) comprend un matériau plus souple que le premier renforteur de flottabilité (225).
 12. Combinaison humide selon l'une quelconque des revendications précédentes, dans laquelle une fermeture à glissière (221) s'étend dans le dos de la combinaison humide (201) du col (213) à la partie inférieure (207).
 13. Combinaison humide selon l'une quelconque des revendications précédentes, dans laquelle la partie supérieure (203) s'étend autour des épaules et du thorax du porteur et comporte des parties formant des manches (209) qui s'étendent le long des bras du porteur.

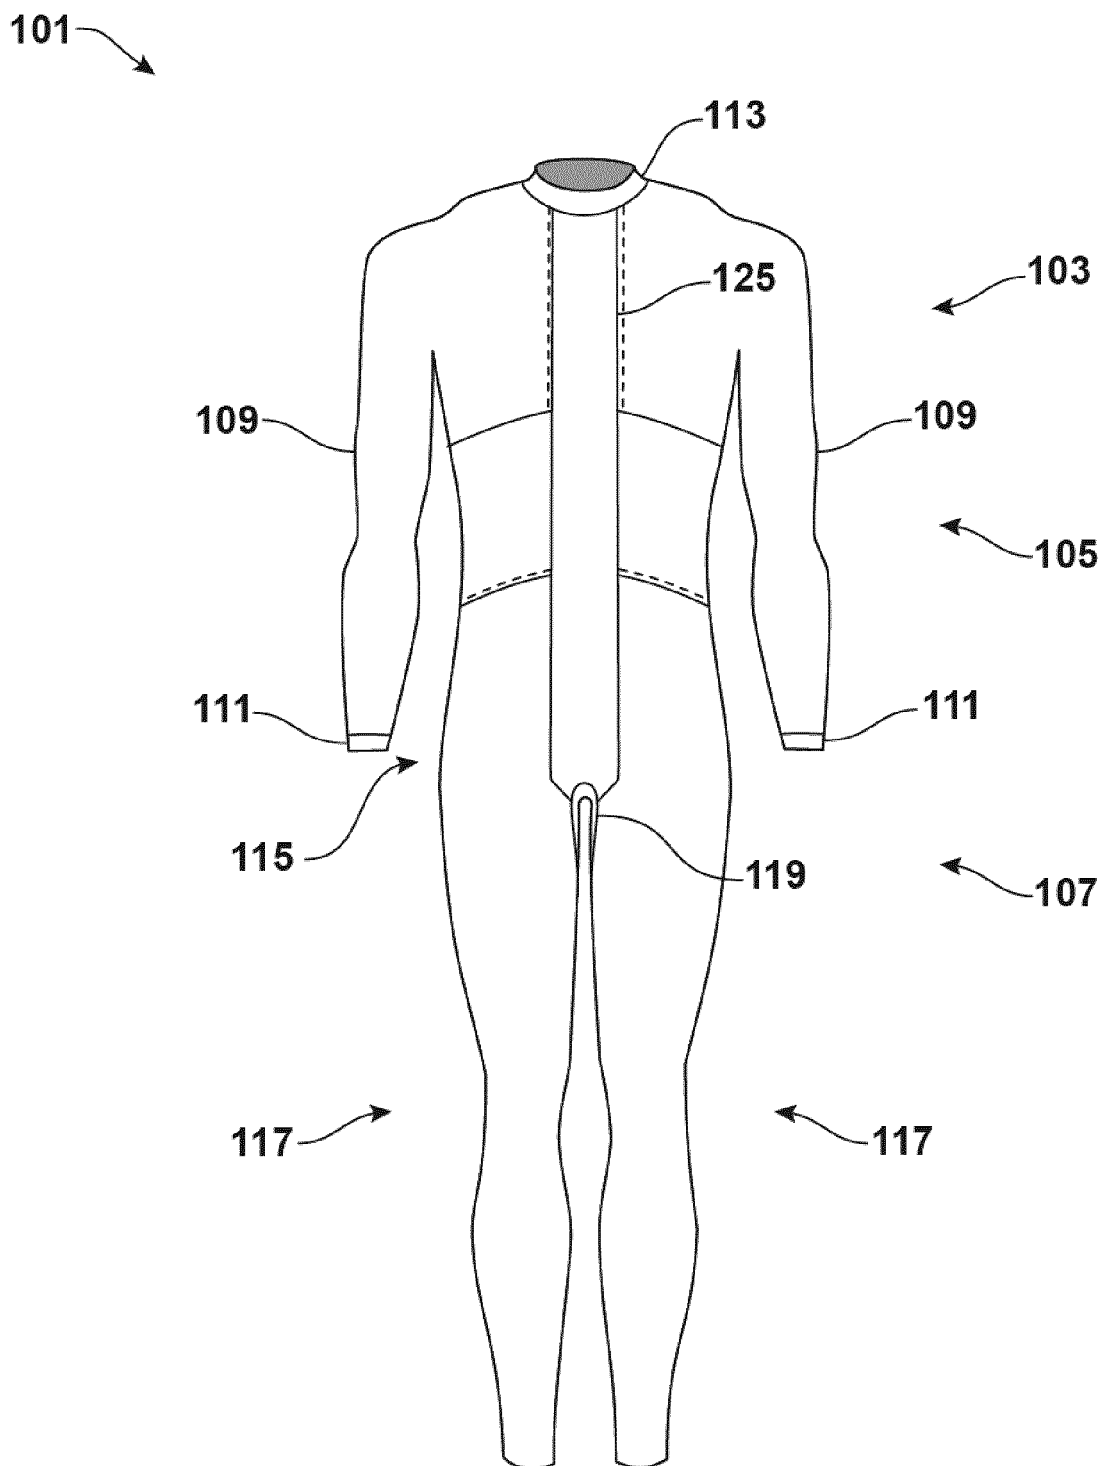


FIG. 1

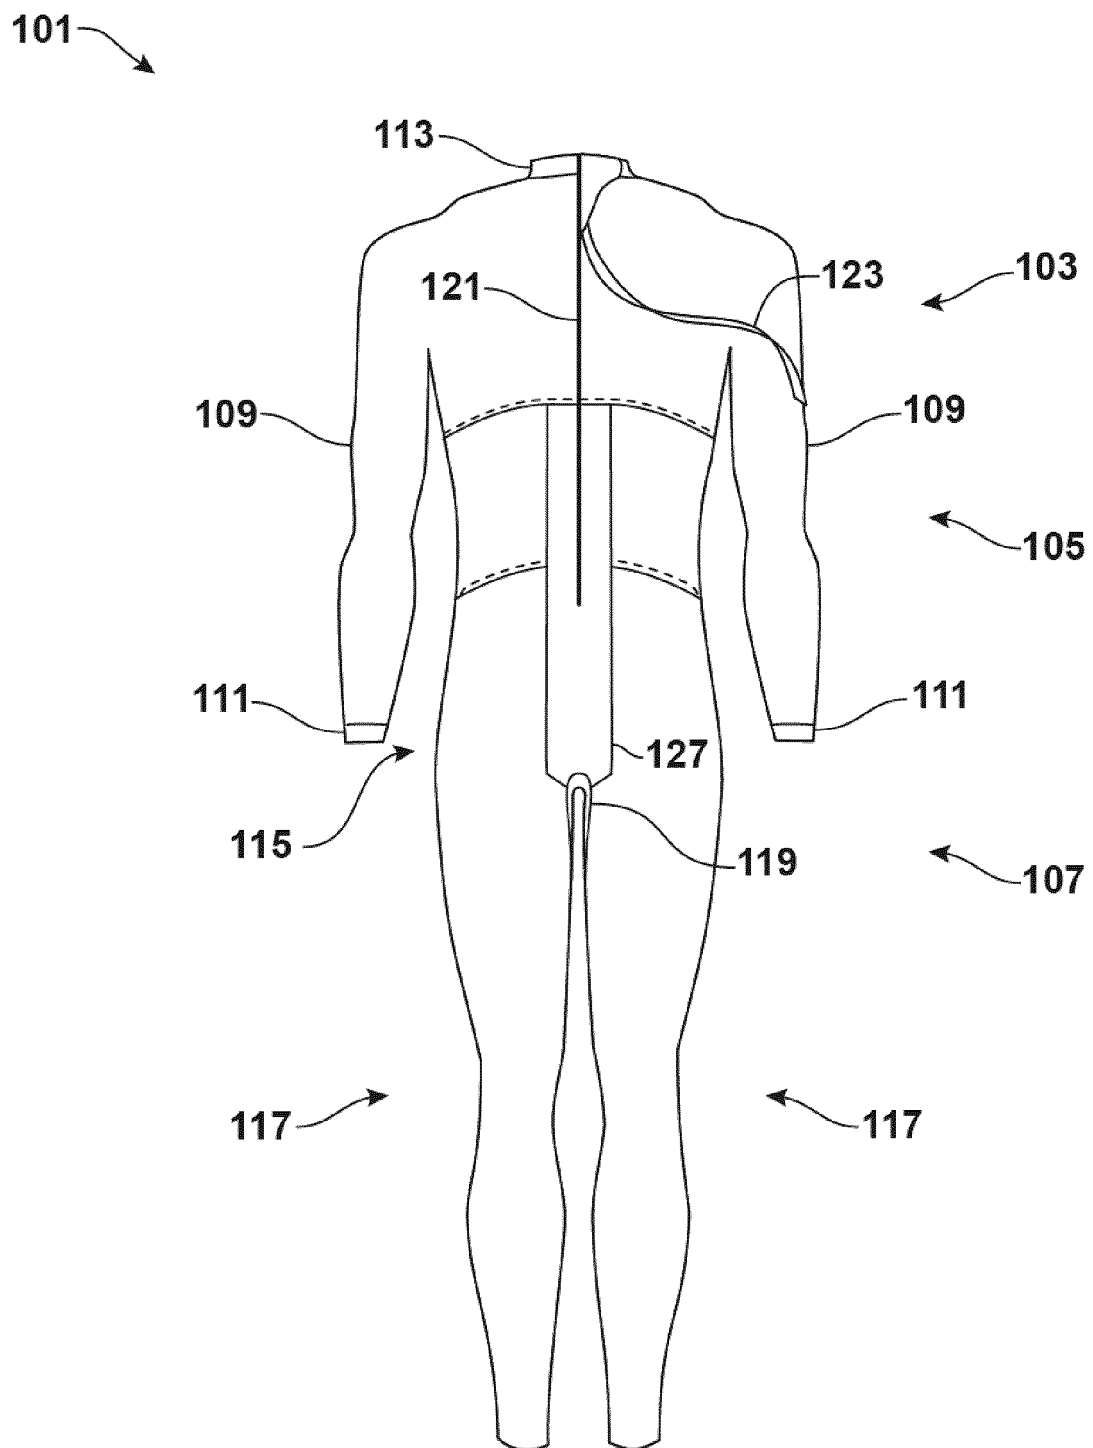


FIG. 2

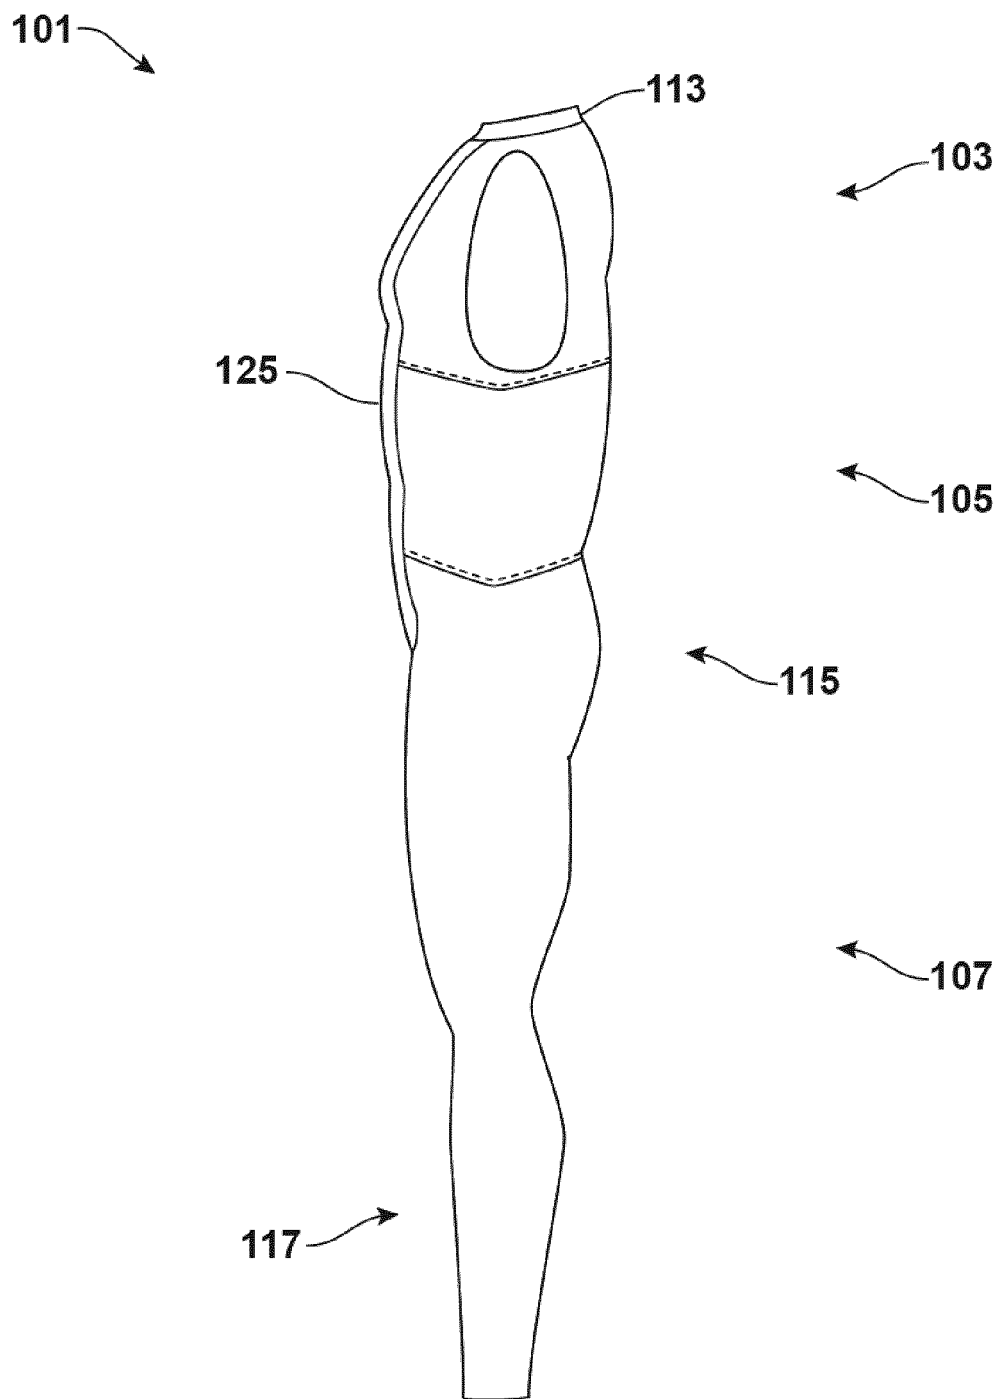


FIG. 3

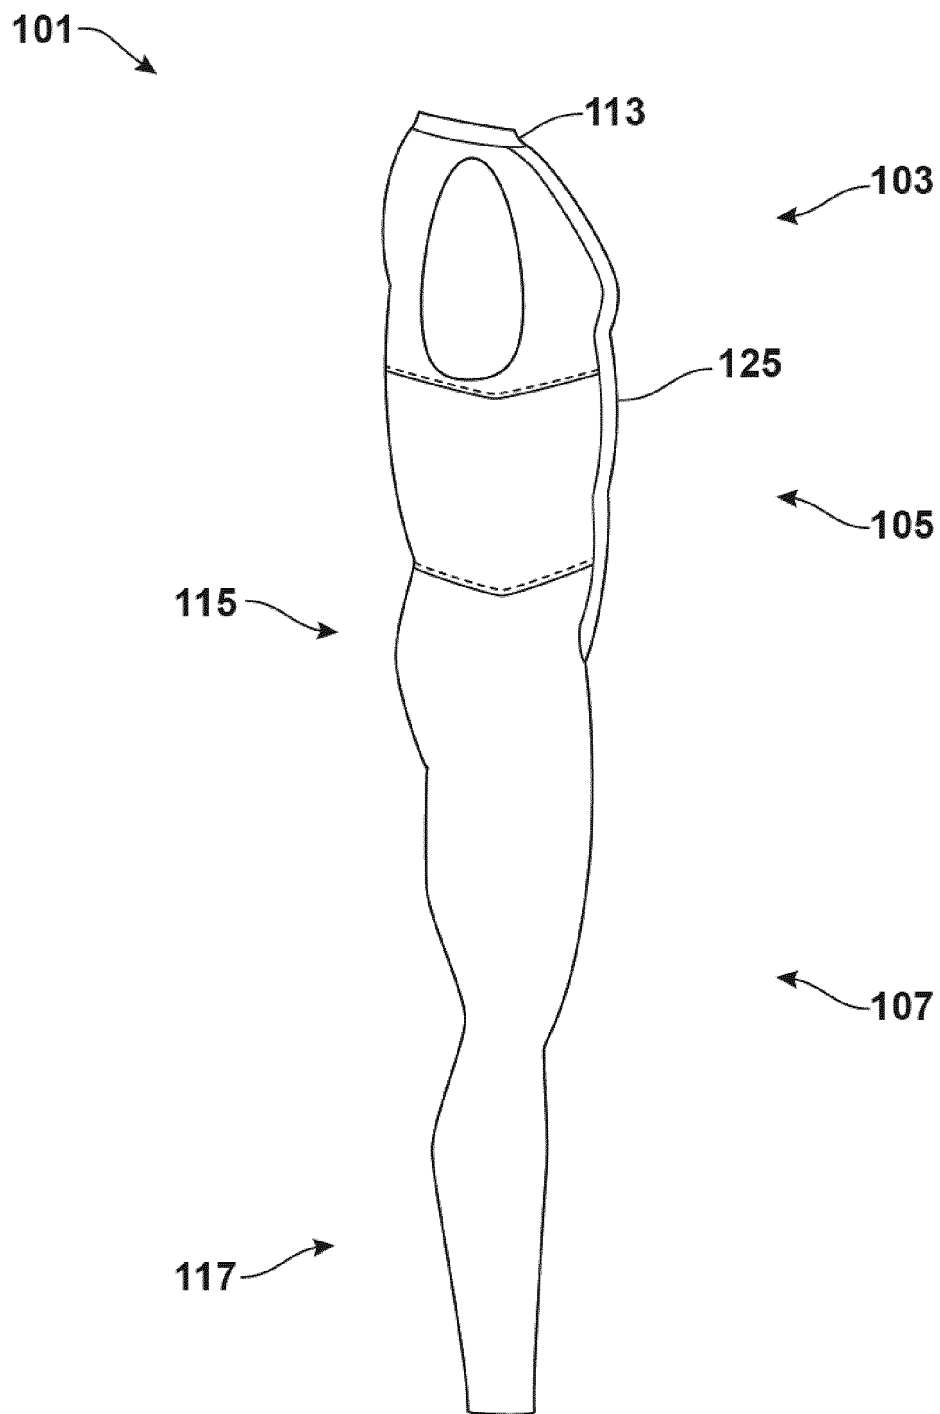


FIG. 4

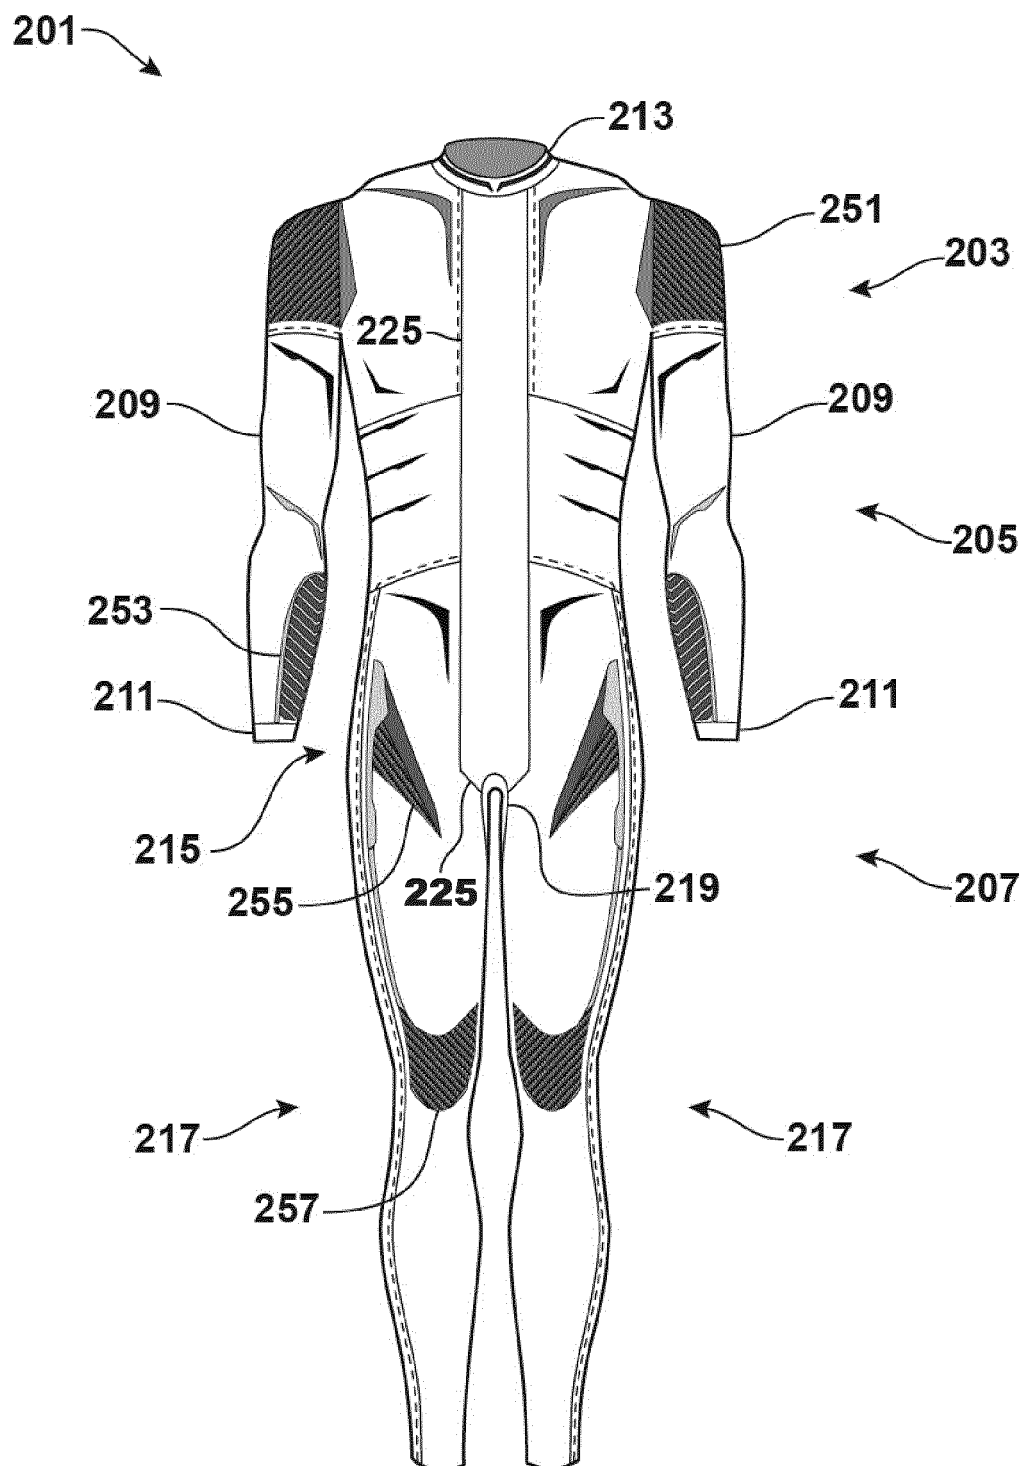


FIG. 5

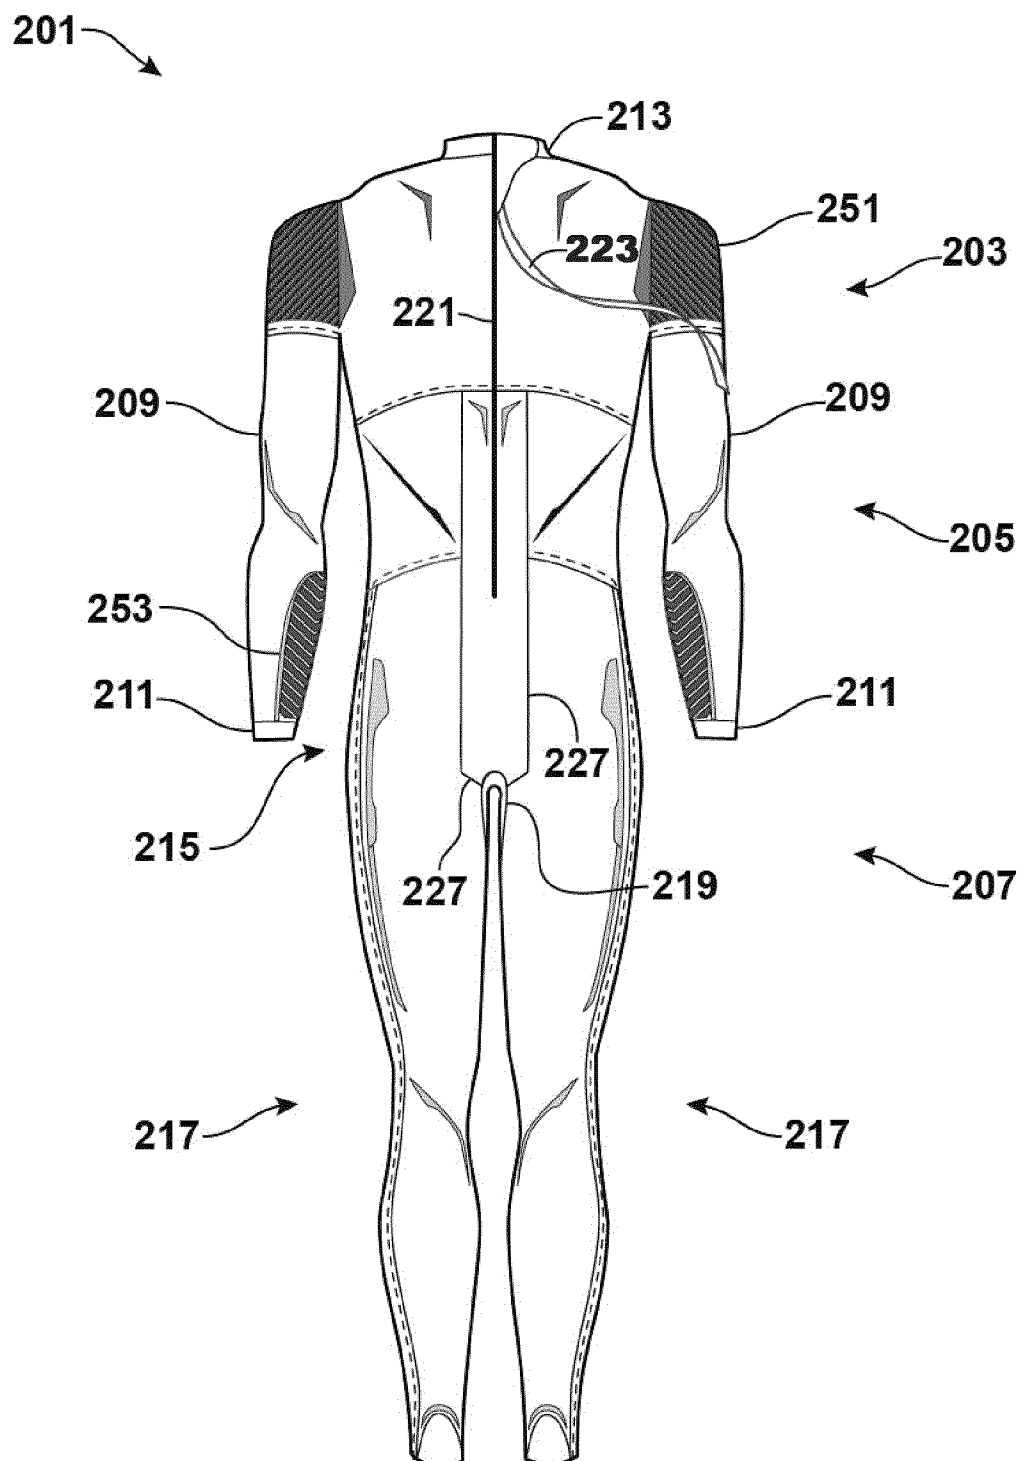


FIG. 6

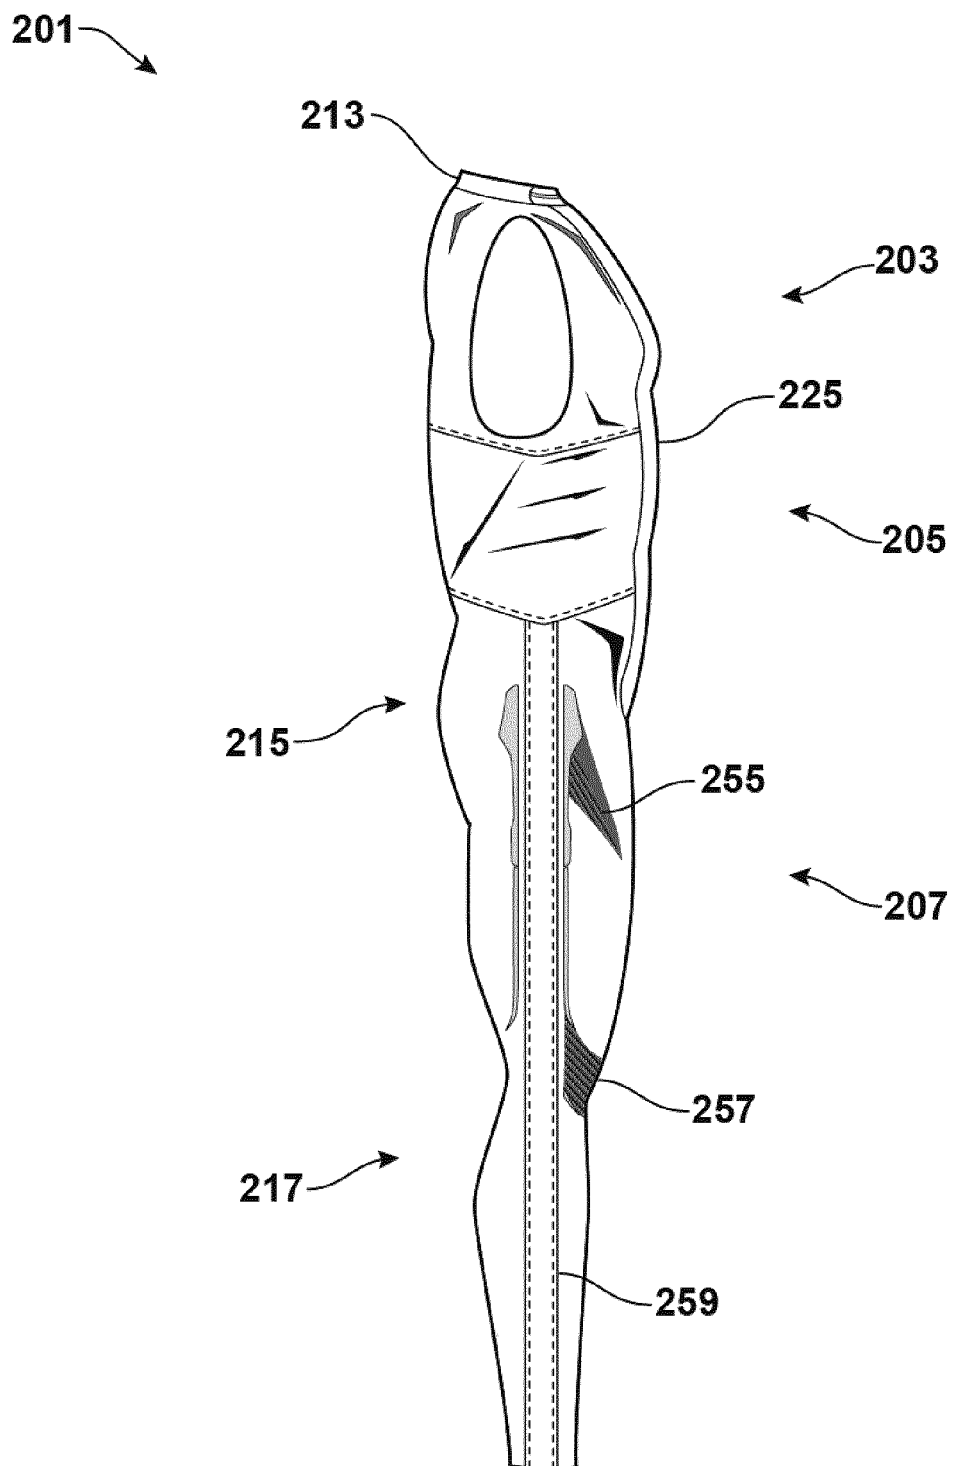


FIG. 7

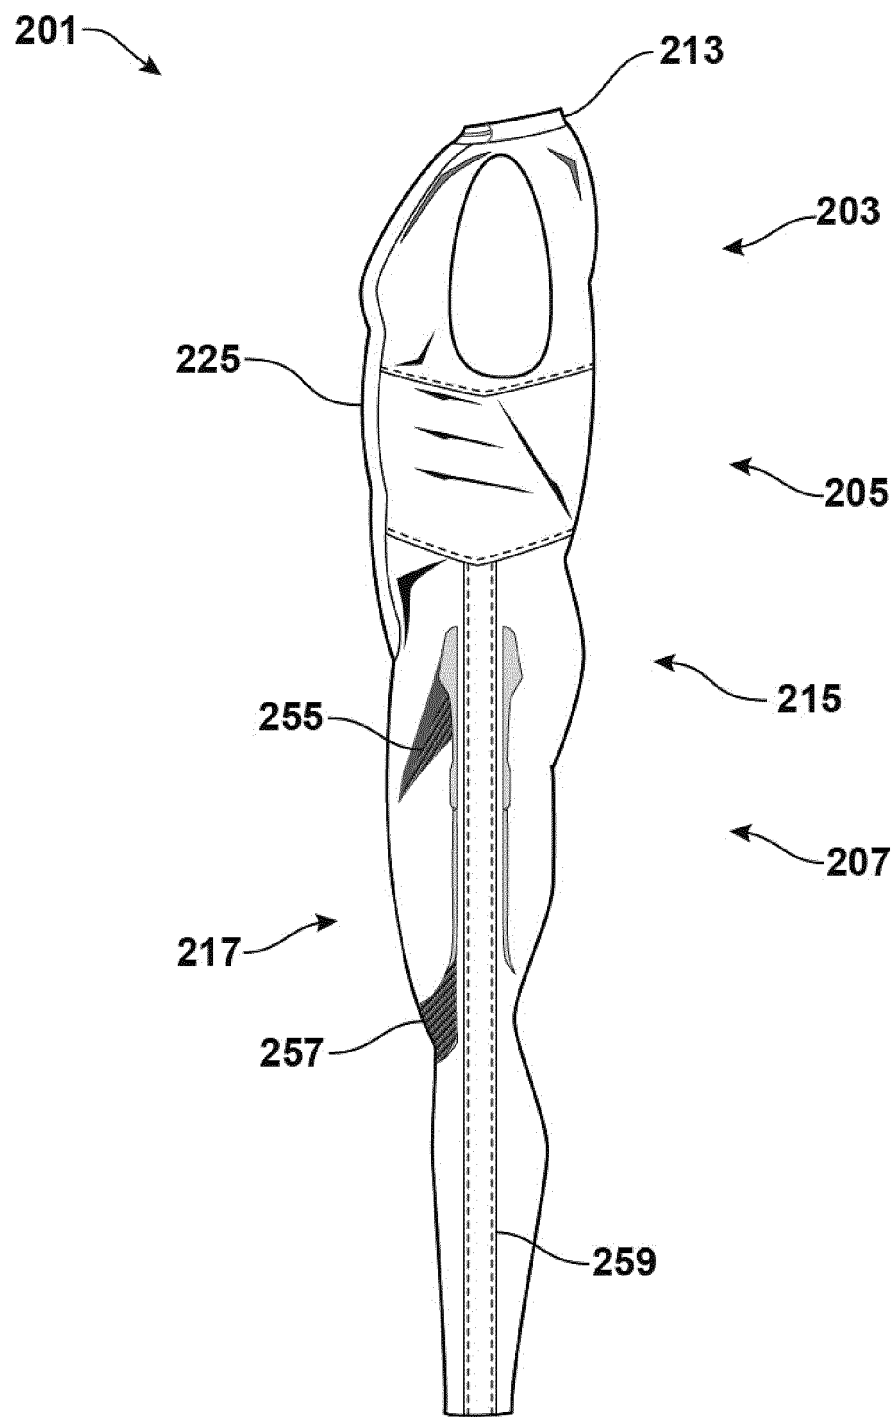


FIG. 8

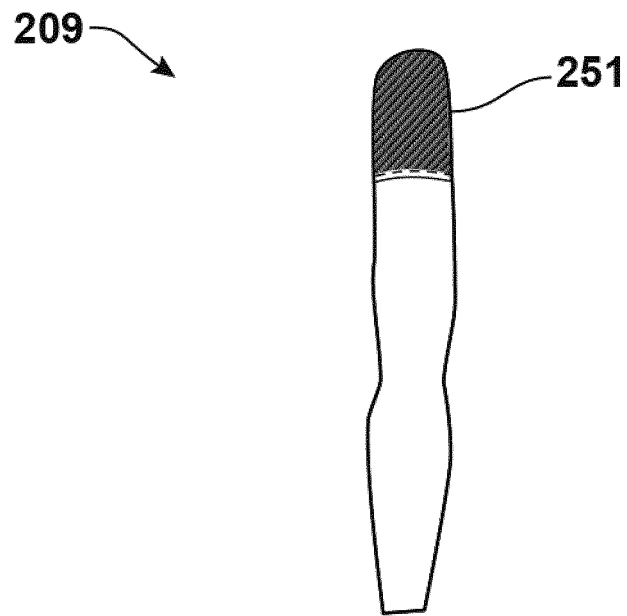


FIG. 9

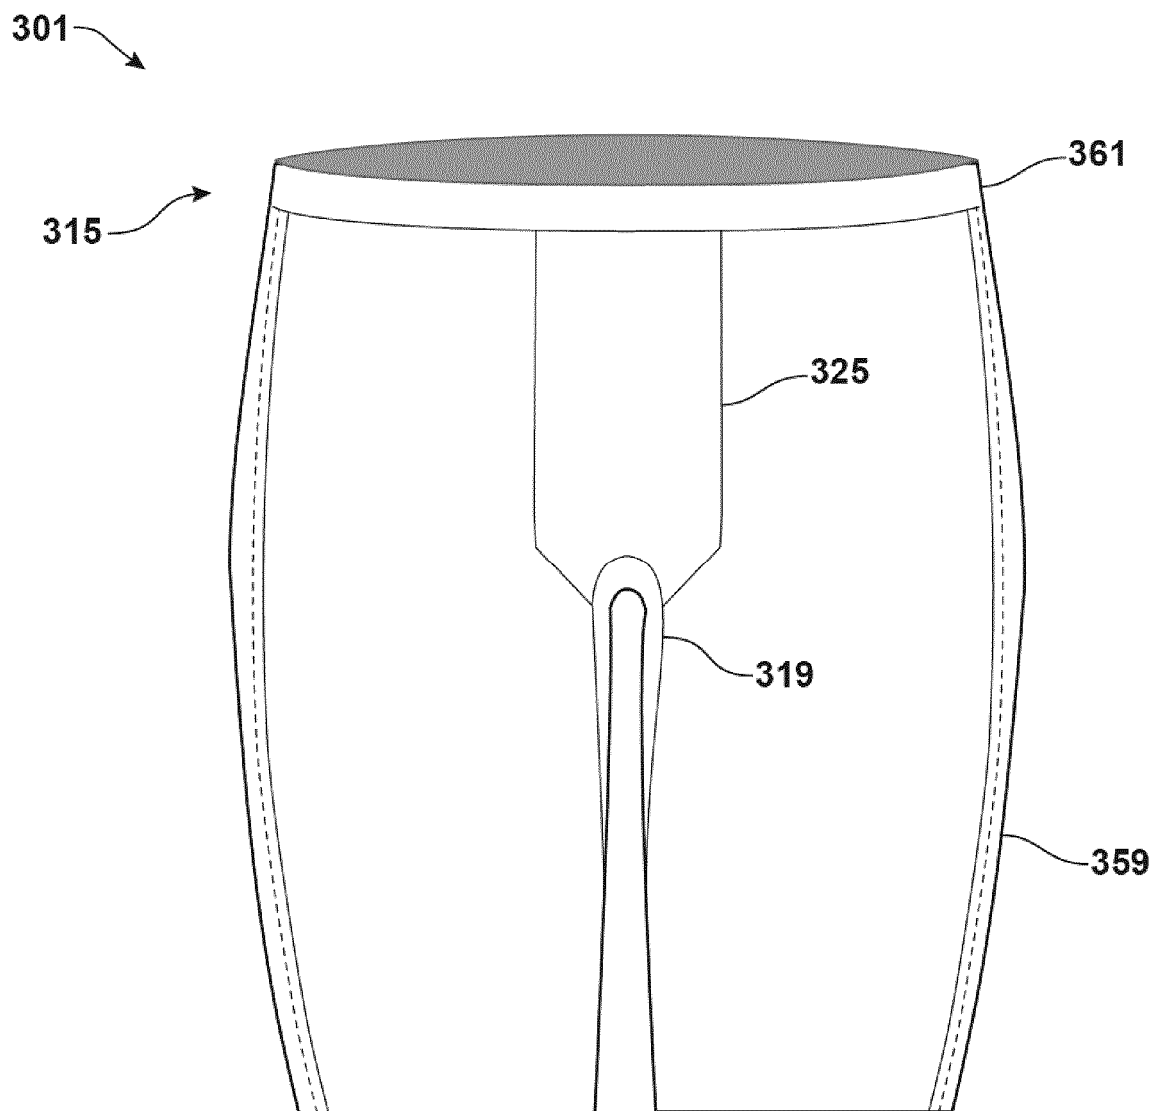


FIG. 10

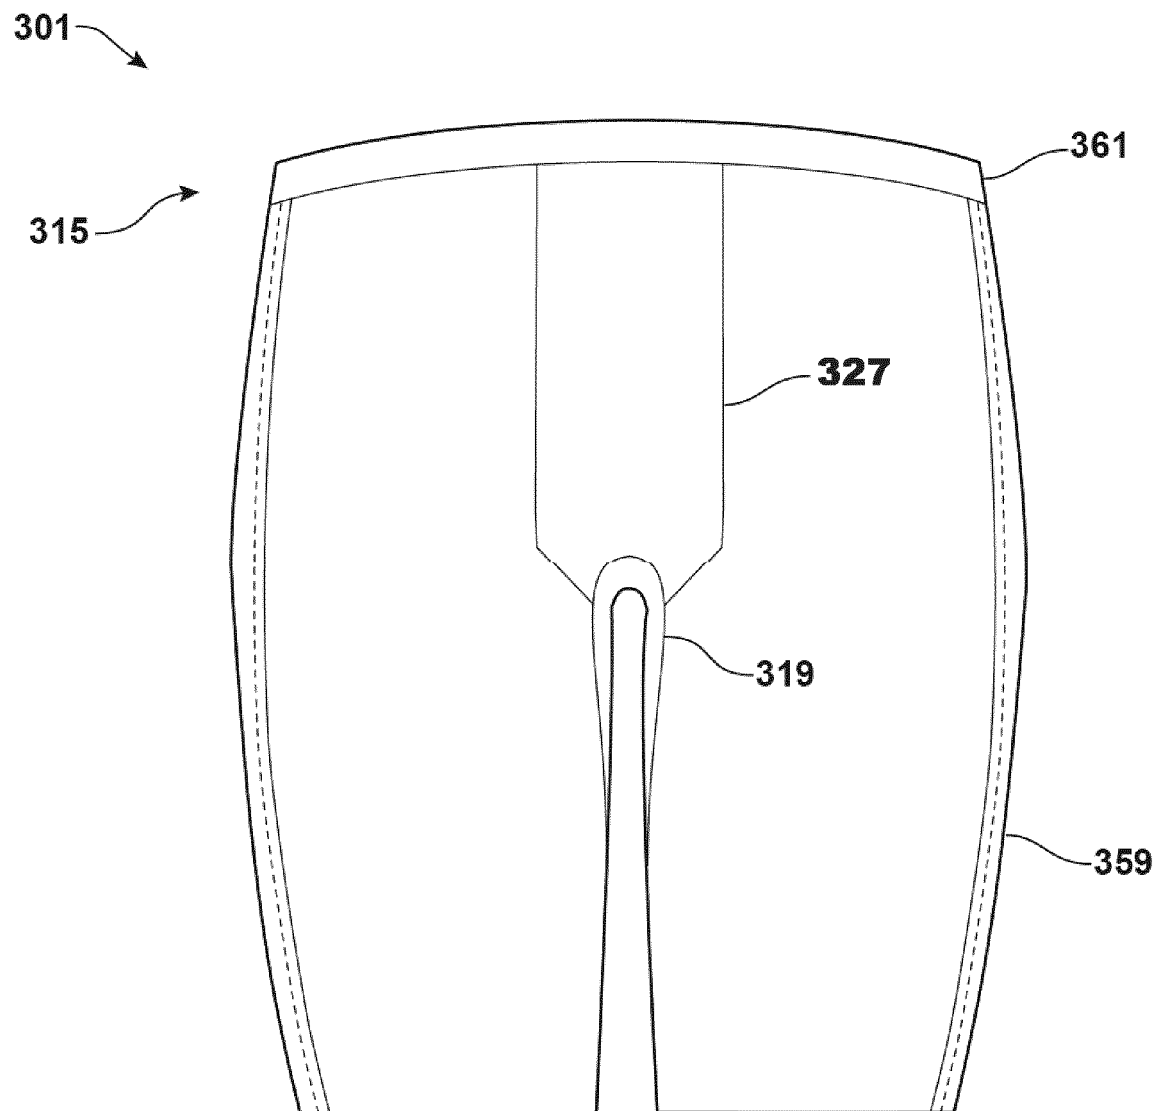


FIG. 11

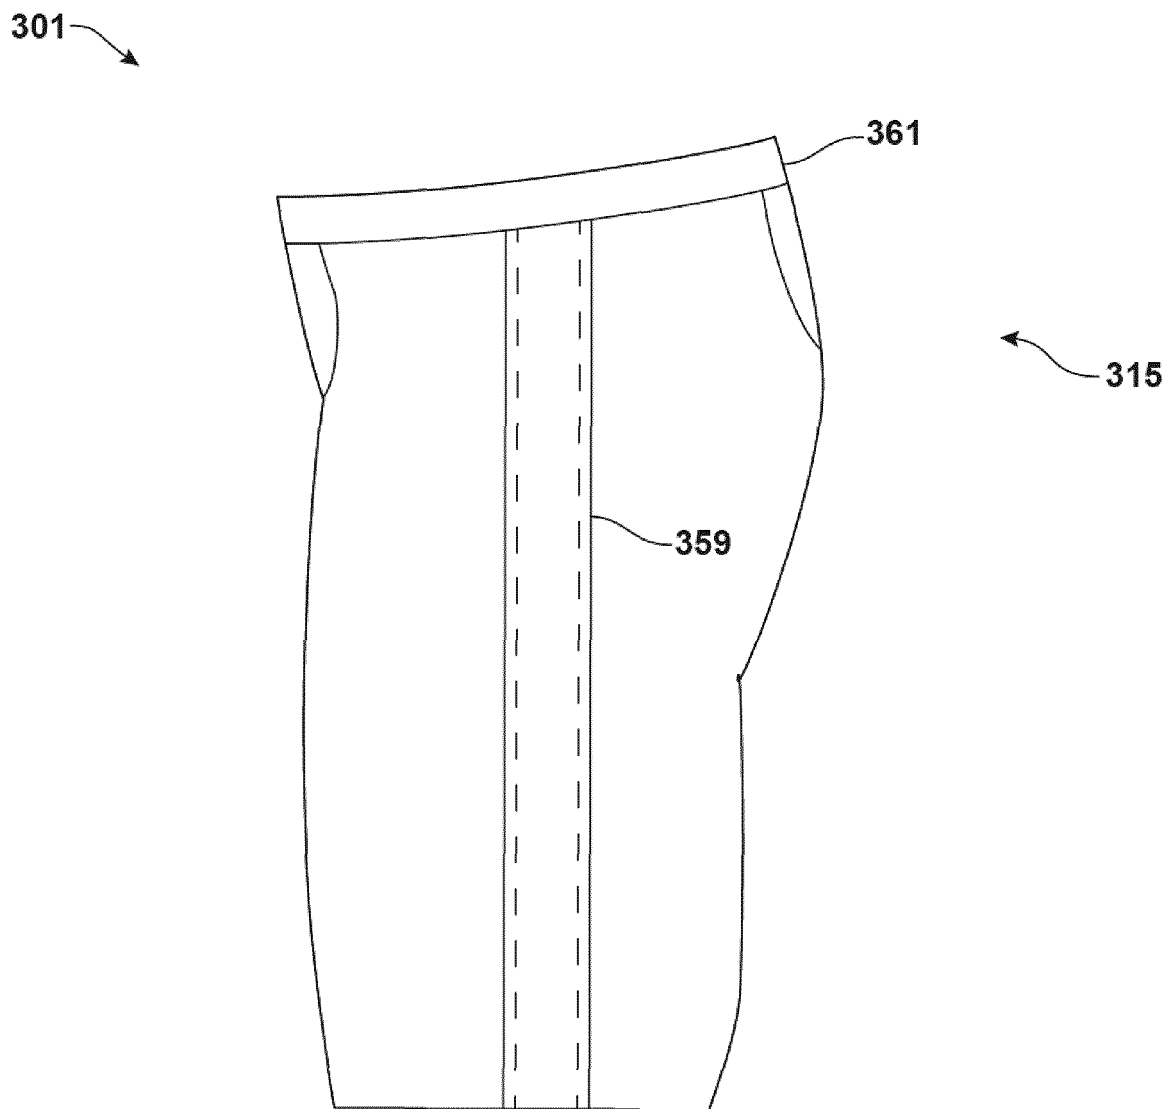


FIG. 12

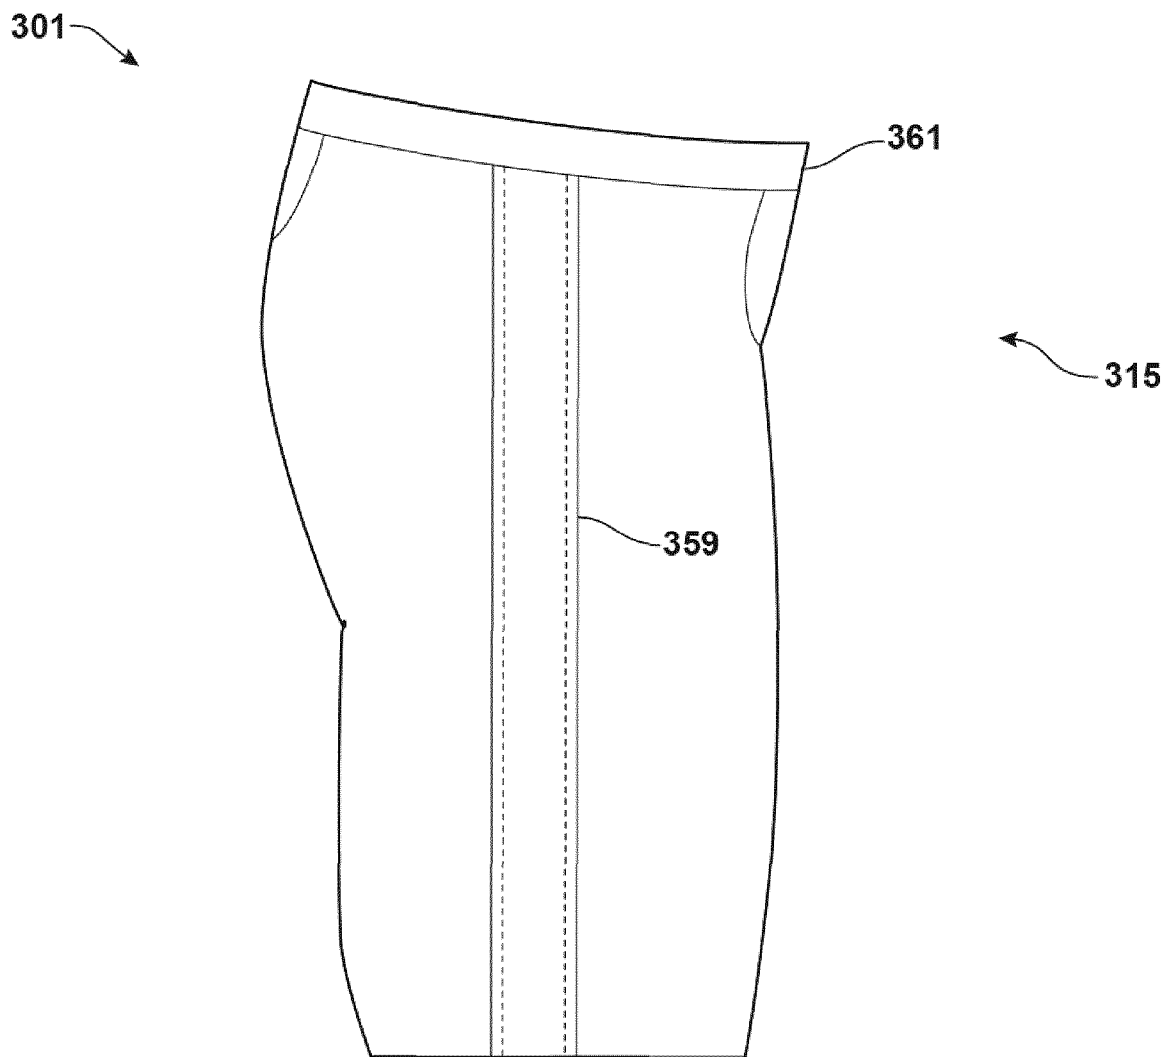


FIG. 13

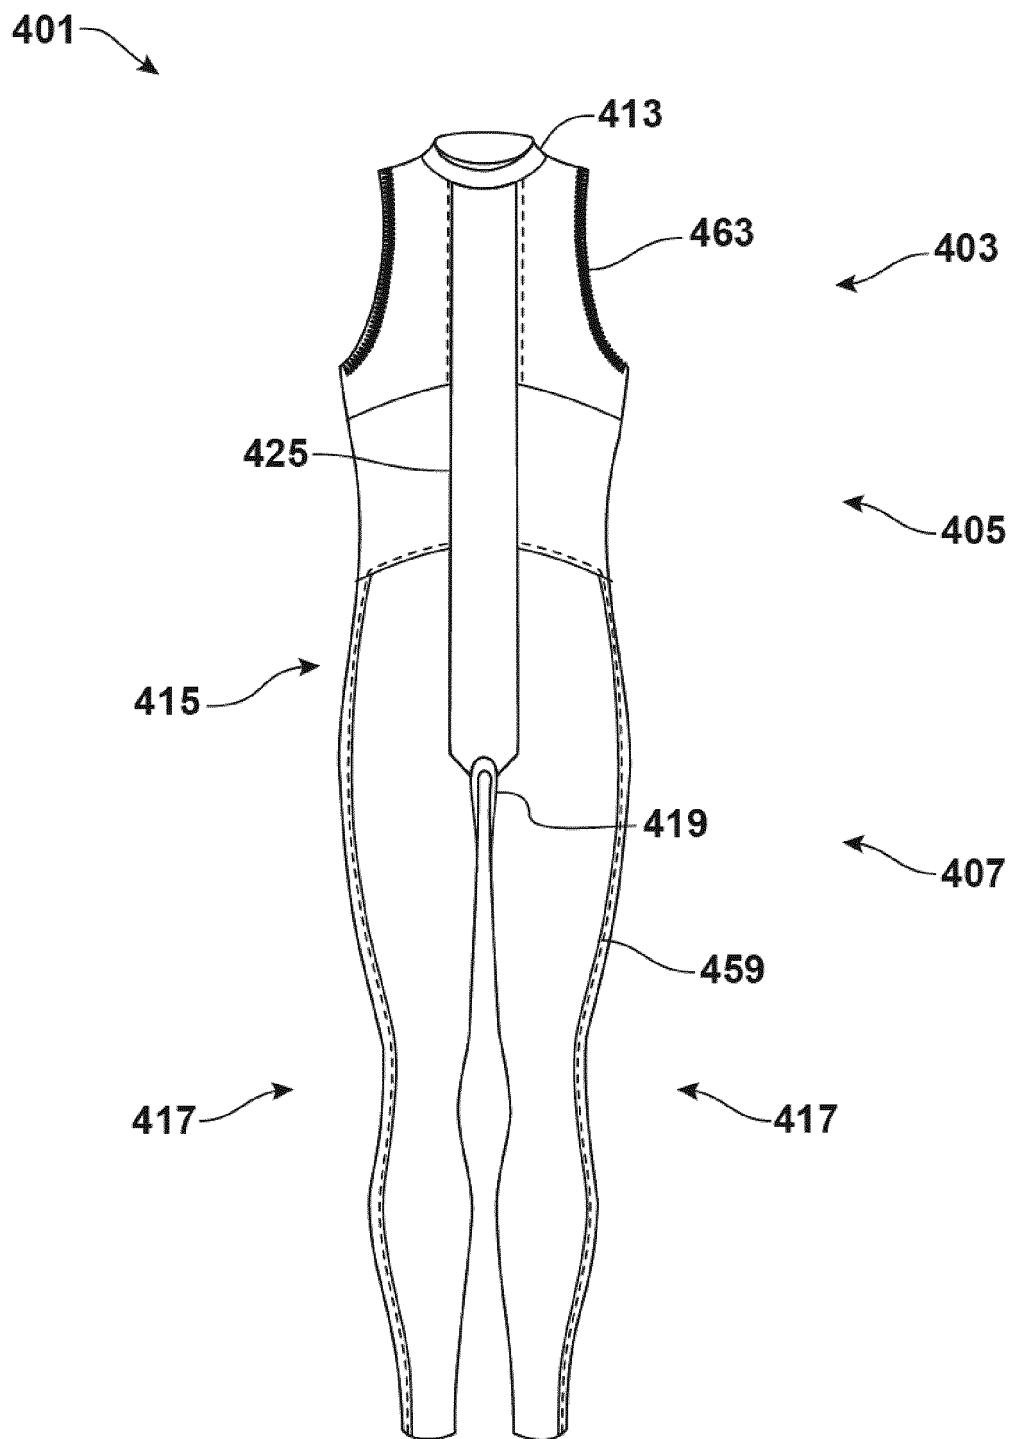


FIG. 14

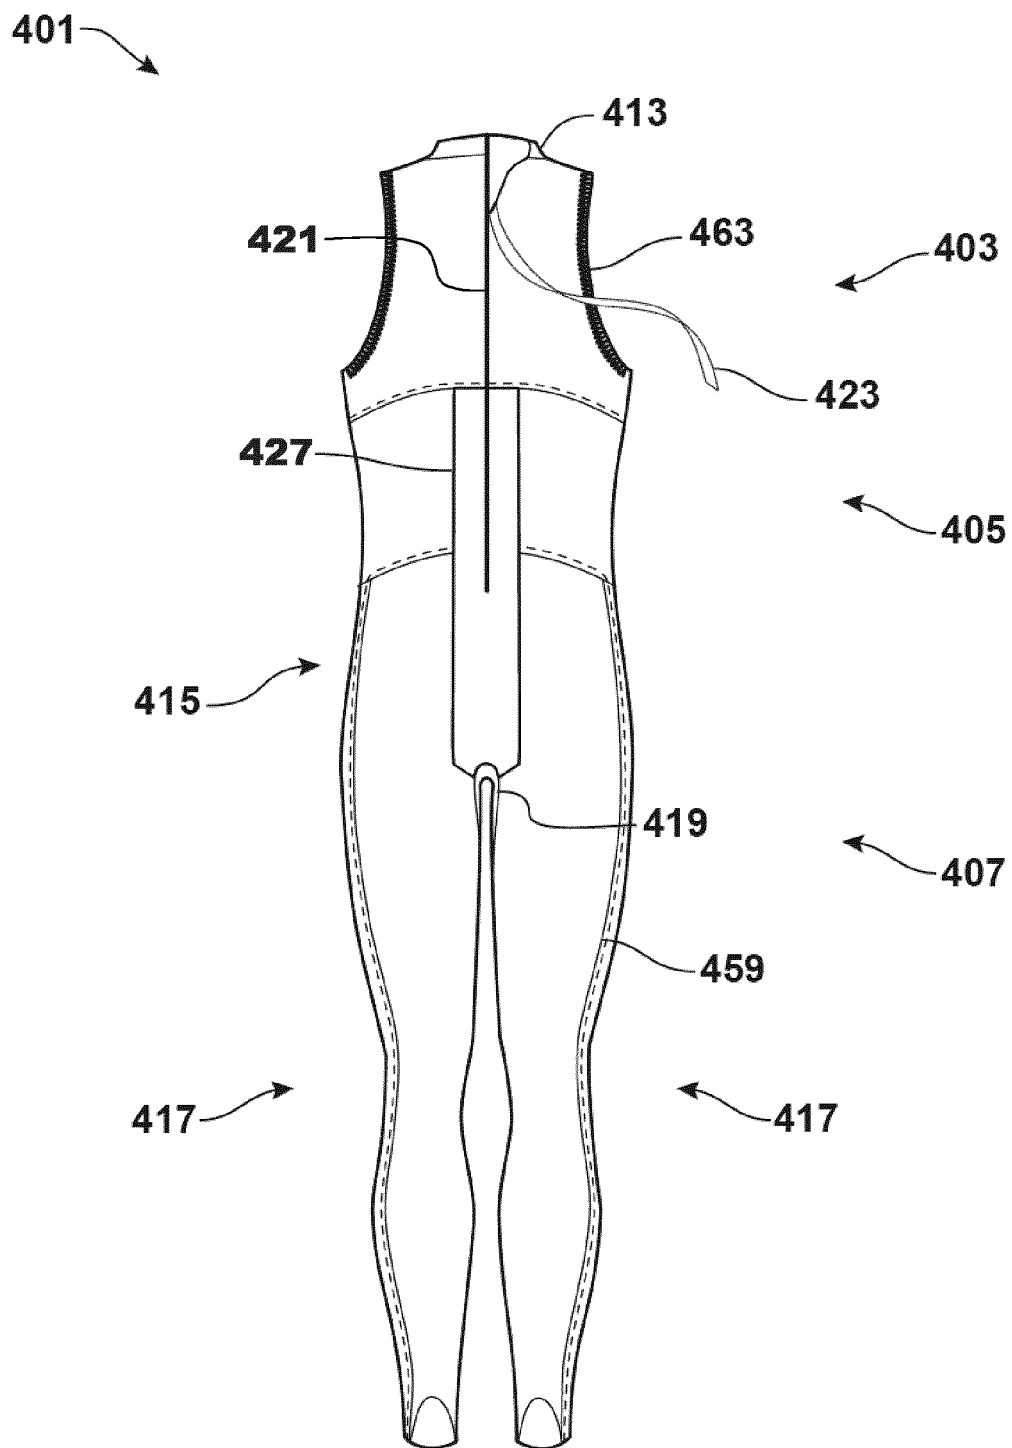


FIG. 15

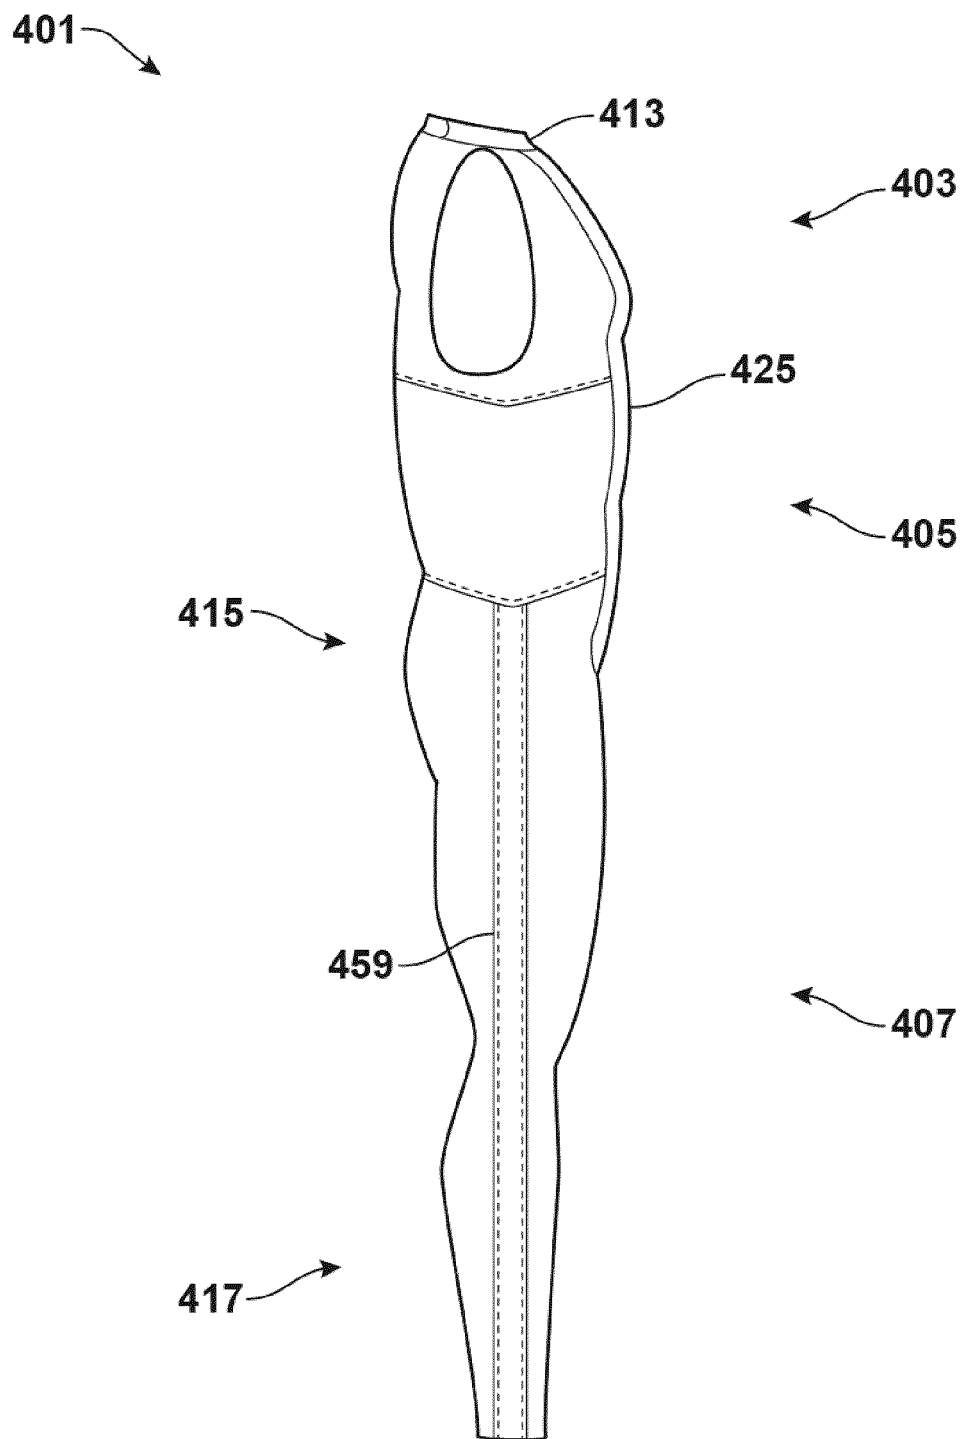


FIG. 16

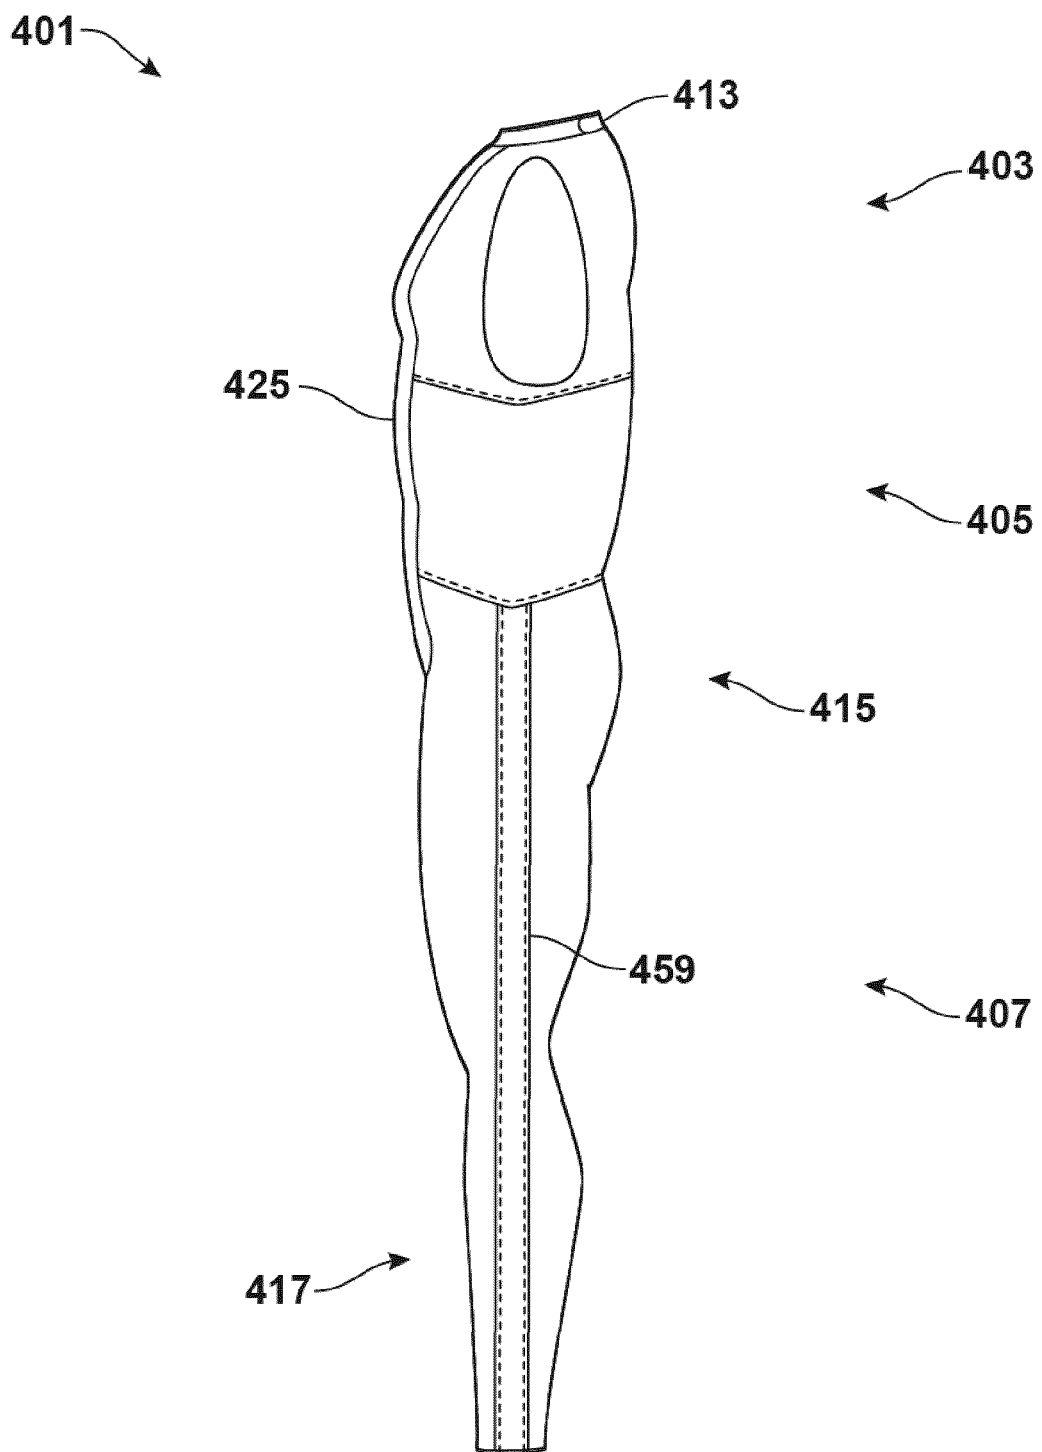


FIG. 17

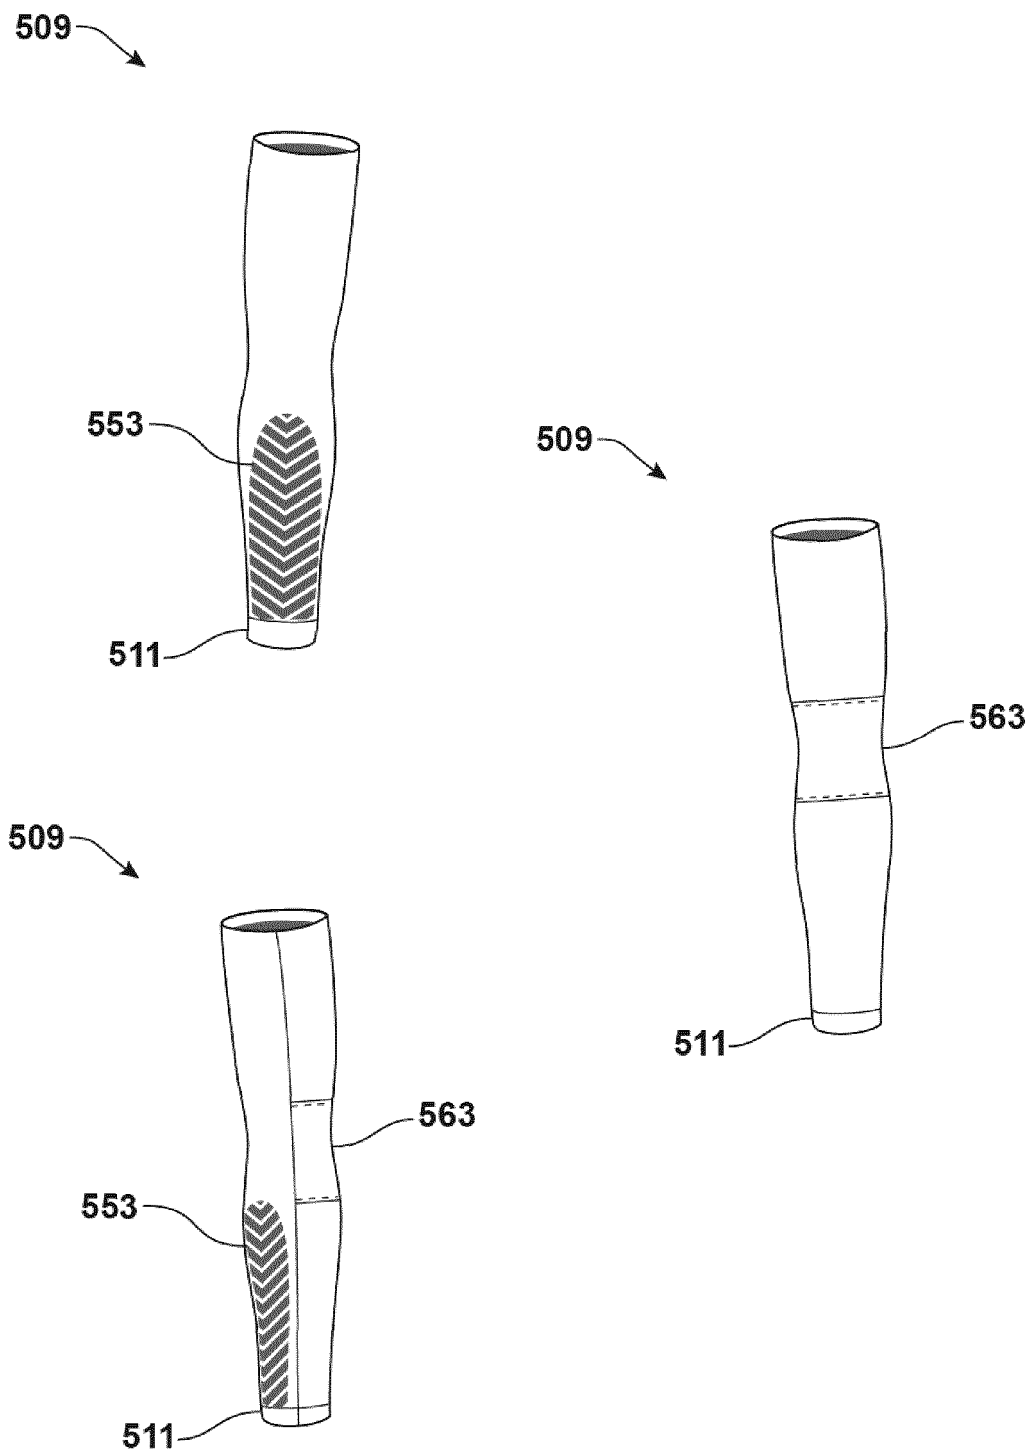


FIG. 18

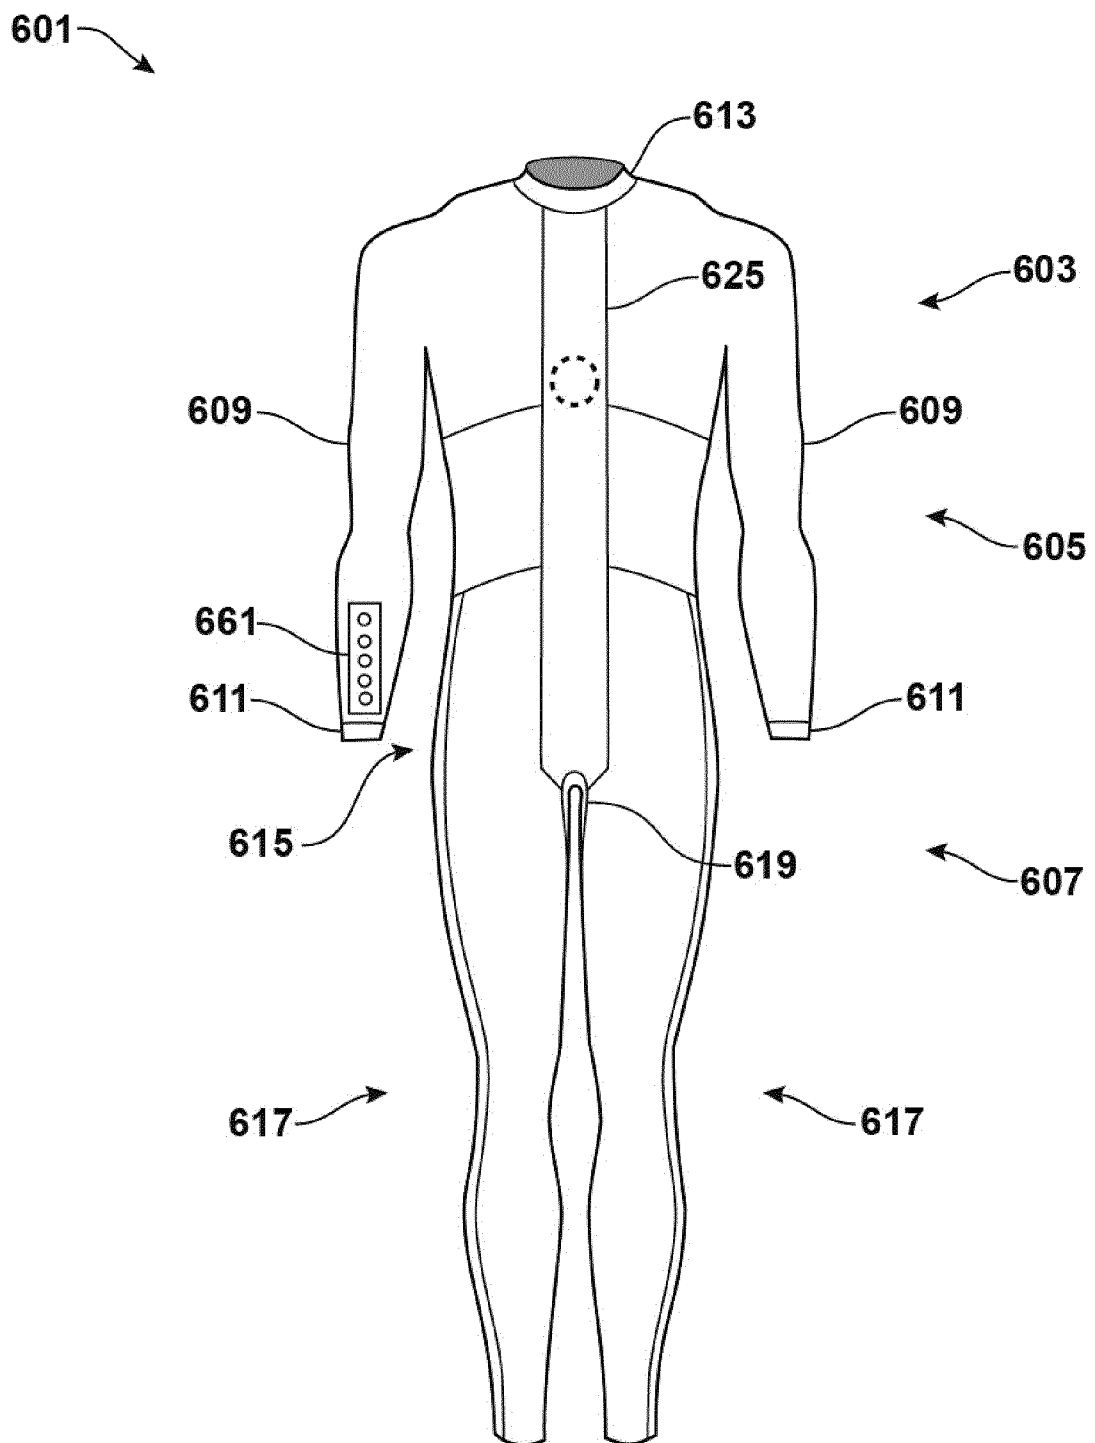


FIG. 19

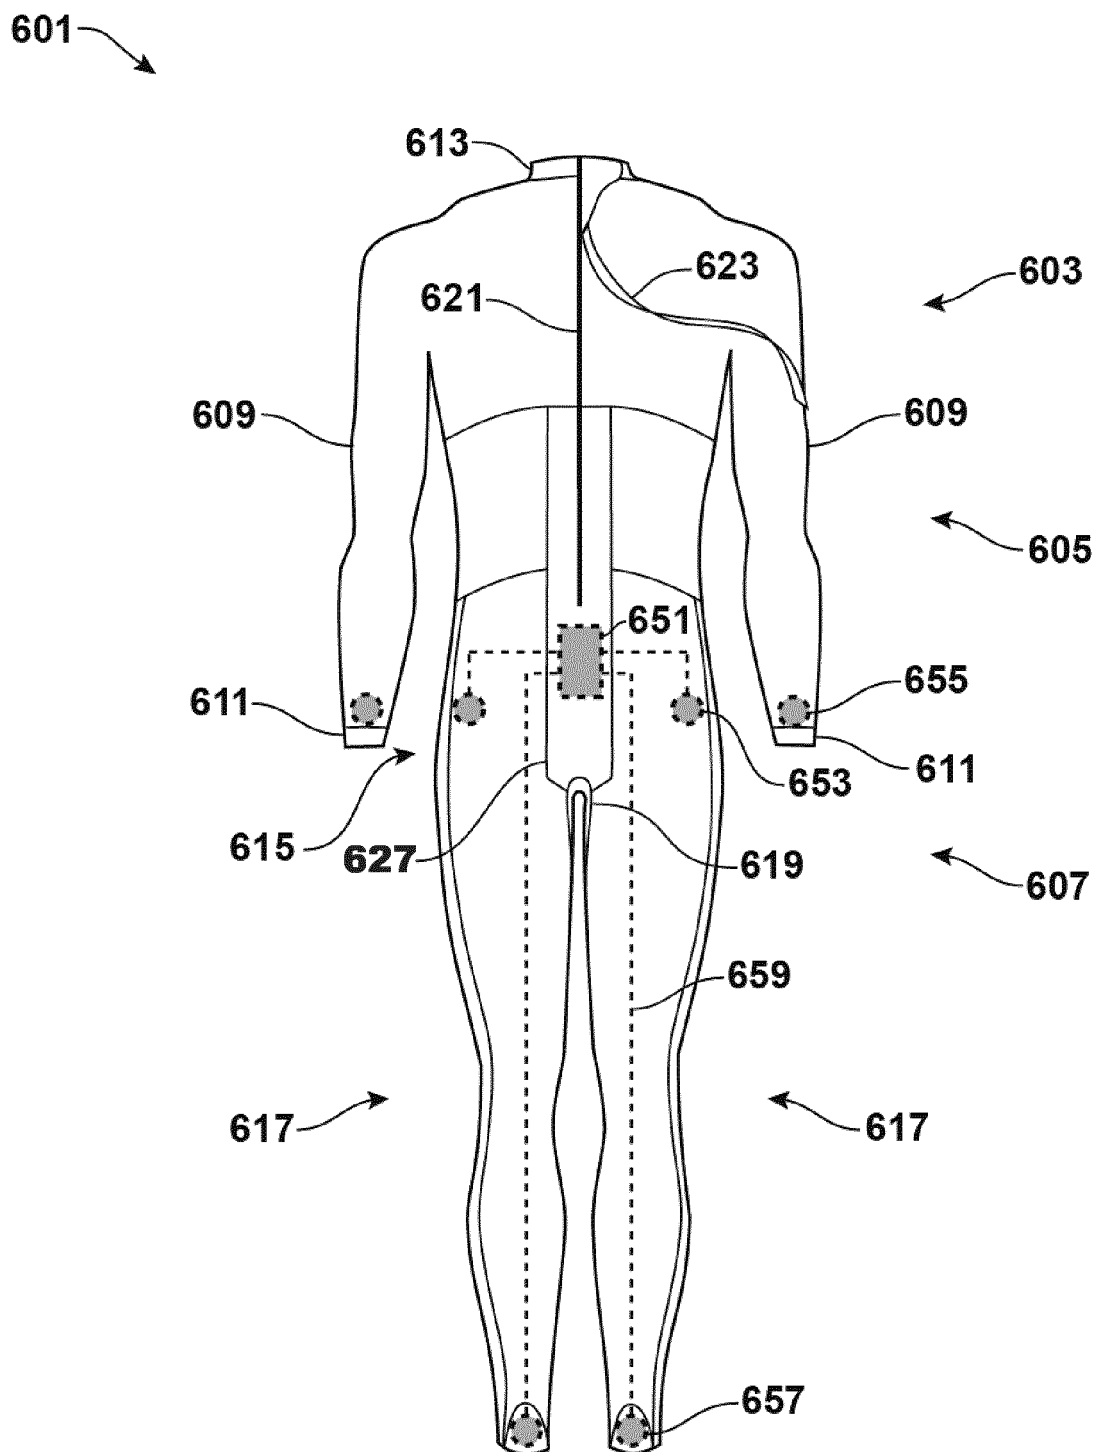


FIG. 20

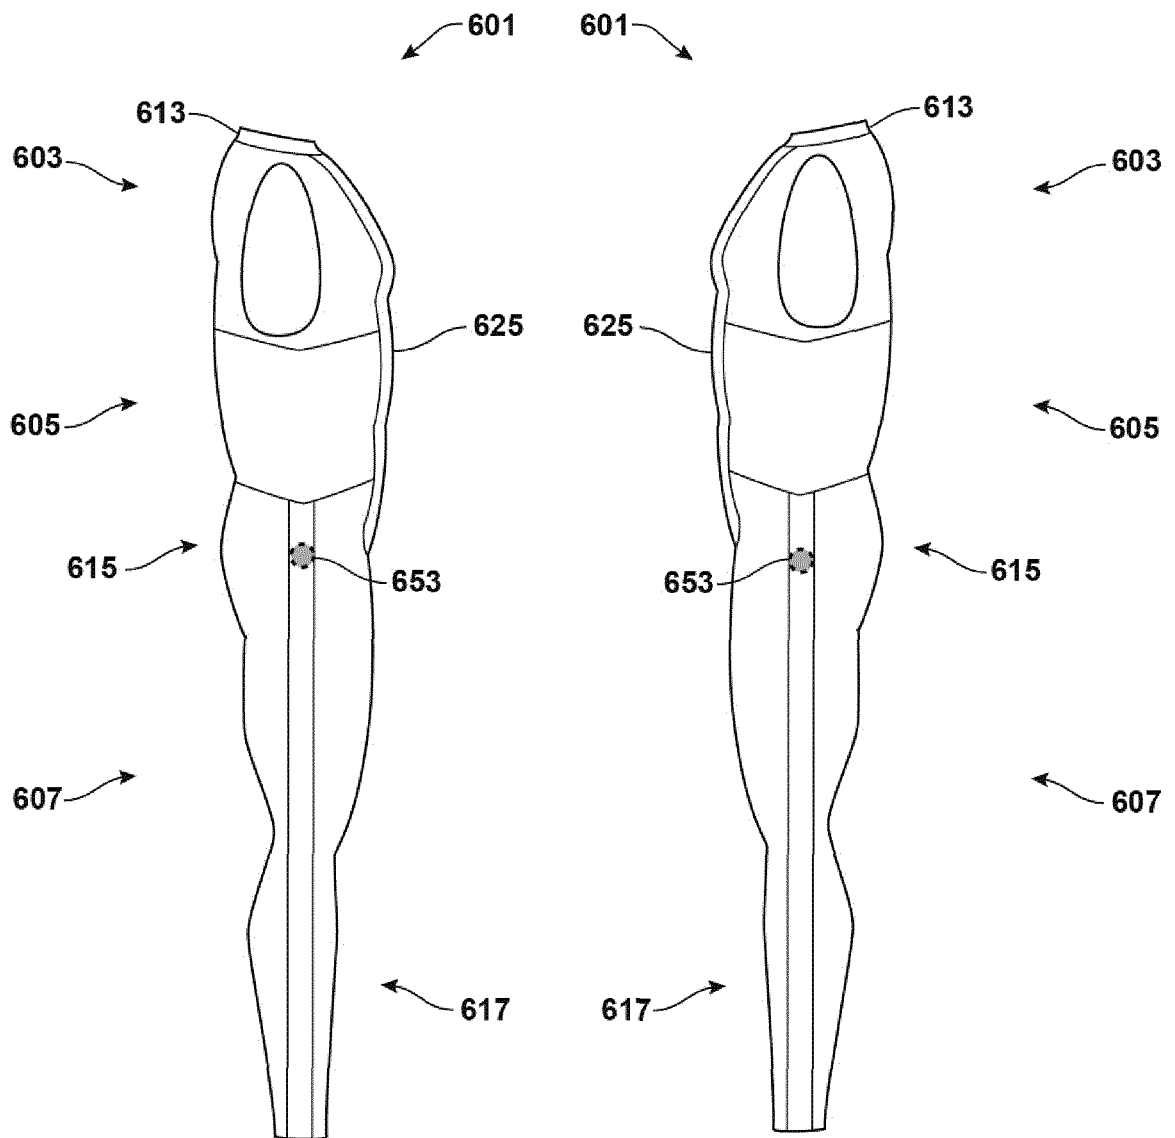


FIG. 21

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5013271 A [0004]

专利名称(译)	潜水衣		
公开(公告)号	EP3384791B1	公开(公告)日	2020-01-08
申请号	EP2018174382	申请日	2012-11-28
[标]申请(专利权)人(译)	洛卡运动股份有限公司		
申请(专利权)人(译)	韩国体育有限公司		
当前申请(专利权)人(译)	韩国体育有限公司		
[标]发明人	CANALES ROBERT ALLEN SPENSER KURT ROBERT		
发明人	CANALES, ROBERT, ALLEN SPENSER, KURT, ROBERT		
IPC分类号	A41D13/012 A41D7/00 A61B5/0245 G08B6/00 A41D1/00 A61B5/024 A61B5/00 G08B21/04		
CPC分类号	A41D7/00 A41D13/012 A41D13/0125 A41D2400/24 A41D2600/10 A41D1/002 A41D2300/322 A41D2400/46 A41D2500/50 A41D2500/52 A61B5/02438 A61B5/0245 A61B5/486 A61B5/6804 G08B6/00 G08B21/0453		
代理机构(译)	HGF LIMITED		
优先权	61/563885 2011-11-28 US PCT/US2012/066879 2012-11-28 WO		
其他公开文献	EP3384791A1		
外部链接	Espacenet		

摘要(译)

一种泳衣 (301) , 其包括 : 腰部 (315) , 其围绕穿着者的腰部延伸 ; 以及腰部 (315) 。 腰带 (361) , 其将腰部固定到穿着者 ; rot部 (319) ; 第一浮力增强器 (325) 设置在泳衣的前部 , 该第一浮力增强器 (325) 沿着带子的中心纵轴以条带的形式从腰带 (361) 延伸到c部 (319) ; 第二浮力增强器 (327) 设置在泳衣的后部 , 该第二浮力增强器以条形的形式沿着穿着者的中央纵向轴线从腰带 (361) 延伸至c部 (319) ; 在腰部315的第一侧上延伸以减小穿着者在水中的阻力的第一侧条359和在腰部315的相对的第二侧上延伸的第二侧条359) 以减少穿着者在水中时的抵抗力 ; 其中第一浮力增强剂 (325) 的宽度在约2.54 mm至约17.78mm的范围内 , 第二浮力增强剂 (327) 的宽度在约2.54 mm至约17.78mm的范围内。

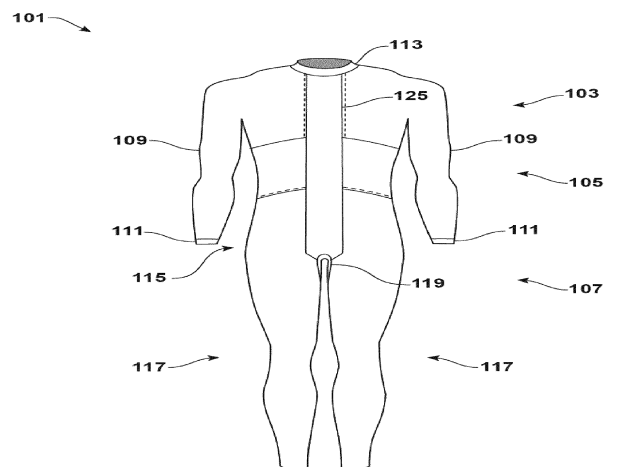


FIG. 1