

(19)



(11)

EP 3 169 081 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.07.2019 Bulletin 2019/28

(51) Int Cl.:
H04R 1/10 (2006.01) A61B 5/00 (2006.01)

(21) Application number: **16197949.7**

(22) Date of filing: **09.11.2016**

(54) WIRELESS EARBUDS AND RELATED METHODS

DRAHTLOSE OHRHÖRER UND ZUGEHÖRIGE VERFAHREN

ÉCOUTEURS SANS FIL ET PROCÉDÉS ASSOCIÉS

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **10.11.2015 US 201562253250 P**

(43) Date of publication of application:
17.05.2017 Bulletin 2017/20

(73) Proprietor: **Skullcandy, Inc.
Park City, UT 84098 (US)**

(72) Inventors:
• **Milam, James
Midway, UT 84049 (US)**
• **Kelly, Peter M.
Park City, UT 84098 (US)**
• **Vogt, David G. Jr.
Salt Lake City, UT 84103 (US)**

• **Page, Steve
Salt Lake City, UT 84111 (US)**
• **Jung, Ryan
Holladay, UT 84121 (US)**

(74) Representative: **Schröer, Gernot H.
Meissner Bolte Patentanwälte
Rechtsanwälte Partnerschaft mbB
Bankgasse 3
90402 Nürnberg (DE)**

(56) References cited:
**EP-A1- 2 506 597 WO-A1-2016/032011
WO-A2-2012/024656 US-A1- 2005 136 839
US-A1- 2009 097 689 US-A1- 2010 166 207
US-A1- 2012 058 727 US-A1- 2014 192 995
US-A1- 2015 230 019**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 169 081 B1

Description

TECHNICAL FIELD

[0001] The present disclosure relates generally to earbud headphones, and more specifically to earbuds configured to receive a wireless data signal from a media device.

BACKGROUND

[0002] Earbud headphones are used to convert an electronic signal into an audible sound, which is transmitted to the ear of a person using the earbud headphones. Earbud headphones are used in conjunction with many different types of electronic devices, such as media players, hearing aids, cellular telephones, televisions, computers, etc. In contrast to what are referred to in the industry as "on-ear" headphones and "over-ear" headphones, earbud headphones are relatively small headphones that rest within the concha of the outer ear and are often referred to as "in-ear" headphones. Earbud headphones are retained in place by the cooperation and mechanical interference between the earbud headphone and the ear of the user. Some earbud headphones include a portion that is sized and configured to extend from a main body of the headphone into the external auditory canal of the ear.

[0003] Earbud headphones are popular among users because they are generally relatively small and portable. Moreover, when a user is participating in various activities, earbud headphones interfere to a much lesser extent with the other accessories or equipment of the user, such as helmets, goggles, hats, and headbands compared to on-ear and over-ear headphones, which often include a headband or other connecting structure (in addition to wiring) extending around the head of the user between each headphone.

[0004] Some earbud headphones may include wireless functionality. For example, data from a media player may be transmitted by radio frequency (RF) signals from a media device to a wireless earbud. Wireless protocols such as Wi-Fi, Bluetooth®, or other protocols may be used for wireless transmission.

[0005] The document US 2015/0230019 A1 discloses an electronic wearable device including an electrical cord for carrying electrical signals. An electrical power module includes an interface for detachable connection to the electrical cord. A first audio module includes an interface for detachable connecting to the electrical cord. A second audio module includes an interface for detachable connecting to the electrical cord. The electrical cord is configured to support the first audio module and the second audio module thereon.

[0006] The document US 2005/0136839 A1 discloses a modular wireless headset including wearable earpiece(s) and wearable microphone(s), wherein the earpiece and microphone may be physically separate de-

vices. The wearable earpiece renders inbound radio frequencies received from a host device audible. The wearable earpiece may include a receiver module, data recovery module, and speaker module. The receiver module may convert inbound RF signals into low intermediate frequency (IF) signals. The data recovery module recovers audio signals from the low IF signals.

[0007] The document WO 2016/032011 A1 discloses a wireless headset including a main body and sub-bodies detachably attached to both lateral ends of the main body by a retractable cable. Earpieces are detachably attached to the sub-bodies and configured to output a sound when supportedly installed in the sub-bodies and a controller is configured to output the sound wirelessly through the earpieces when the earpieces are separated from the sub-bodies.

[0008] The document EP 2 506 597 A1 discloses a wireless listening device that can be used in conjunction with a host device to provide an end user a pleasurable listening experience especially during periods of physical activity. The host device can take the form of a portable media player.

[0009] The document WO 2012/024656 A2 discloses ear bud headphones configured for use with a portable media player including a main body portion with an extended curvature configuration. The ear bud headphones include a speaker housing and an extension that form a gap between the speaker housing and the extension. The user can secure a portion of the user's outer ear in the gap such that the ear bud is securely and comfortably held in place within a user's ear.

DISCLOSURE

[0010] The invention is defined by the appended set of claims.

[0011] According to an aspect of the invention, a wireless earbud system includes a first earbud assembly and a second earbud assembly. Each of the first earbud assembly and the second earbud assembly includes a housing, an audio driver disposed within the housing, and a wireless receiving unit operatively coupled to the audio driver. The wireless receiving unit is configured to receive a wireless data signal and drive the audio driver based on audio data transmitted in the wireless data signal. The wireless earbud system further includes a tether with a first end and a second end. The first end of the tether is configured to removably couple to the first earbud assembly by a first detachable connector, and the second end of the tether is configured to removably couple to the second earbud assembly by a second detachable connector. The tether also includes an electronic control unit disposed intermediate the first end of the tether and the second end of the tether.

[0012] In another aspect, a wireless earbud system includes a first earbud assembly and a second earbud assembly. Each of the first earbud assembly and the second earbud assembly include an audio driver, a wireless re-

ceiving unit operatively coupled to the audio driver, the wireless receiving unit configured to receive a wireless data signal, and an earbud battery configured to supply power to one or both of the audio driver and the wireless receiving unit. The wireless earbud system also includes a tether including a first end with a first detachable connector configured to mechanically and electrically couple the first end of the tether to the first earbud assembly, and a second end with a second detachable connector configured to mechanically and electrically couple the second end of the tether to the second earbud assembly. The electronic control unit includes a wireless unit configured to receive a wireless data signal from a media device and to transmit an audio signal based on the wireless data signal through electrical conductors in the tether to the first and second earbud assemblies when the first and second earbud assemblies are coupled to the first and second ends of the tether, respectively, and an electronic control unit battery configured to supply power to the wireless unit.

[0013] Also according to another aspect of the invention, a method of forming a wireless earbud system includes forming an electronic control unit comprising a wireless unit, a battery, and a tether. The method also includes forming first and second wireless earbud assemblies, and configuring first and second ends of the tether to removably couple to the first and second wireless earbud assemblies. The method also includes configuring one or both of the first and second wireless earbud assemblies to receive a wireless signal from a media device and to drive audio drivers in the first and second wireless earbud assemblies with an audio signal based on data received from the media device when the first and second ends of the tether are decoupled from the first and second wireless earbud assemblies, and configuring the wireless unit of the electronic control unit to receive a wireless signal from the media device and to drive the audio drivers in the first and second wireless earbud assemblies through electrical conductors disposed within the tether with an audio signal based on data received wirelessly from the media device when the first and second ends of the tether are respectively coupled to the first and second earbud assemblies.

BRIEF DESCRIPTION OF DRAWINGS

[0014]

FIG. 1 is a plan view of an embodiment of an earbud system according to the disclosure;
 FIG. 2 is a schematic diagram of components of an earbud according to the disclosure;
 FIG. 3 is a schematic diagram showing operation of an earbud system according to the disclosure;
 FIG. 4 is a plan view of another embodiment of an earbud system according to the disclosure;
 FIG. 5 is a plan view of yet another embodiment of an earbud system according to the disclosure;

FIG. 6 is a schematic diagram showing an operational configuration of the earbud system of FIG. 5; FIGS. 7A and 7B are perspective views of an earbud and a detachable connector according to an embodiment of the disclosure;

FIGS. 8A and 8B are perspective views of an earbud and a detachable connector according to another embodiment of the disclosure;

FIGS. 9A and 9B are perspective views of an earbud and a detachable connector according to yet another embodiment of the disclosure;

FIGS. 10A and 10B are perspective views of an earbud and a detachable connector according to yet another embodiment of the disclosure;

FIG. 11 is a plan view of yet another embodiment of an earbud system according to the disclosure; and FIGS. 12A and 12B are perspective views of an electronic control unit according to an embodiment of the disclosure.

[0015] The illustrations presented herein are not meant to be actual views of any particular headphone or component thereof, but are merely idealized representations employed to describe various embodiments of the disclosure.

[0016] The disclosure relates to earbud headphones configured to communicate wirelessly (e.g., through radio frequency (RF) electromagnetic waves) with a media device. The earbud headphones may include a tether that mechanically and/or electrically couples the earbud headphones to one another. The earbud headphones may function differently when connected by the tether compared to when the earbud headphones are used without the tether.

[0017] FIG. 1 is a plan view of a wireless earbud system 100 according to the disclosure. The wireless earbud system 100 may include a first earbud 102 and a second earbud 104. The first earbud 102 and the second earbud 104 may include a first earbud housing 106 and a second earbud housing 108, respectively. The wireless earbud system 100 includes a tether 110 formed of a lightweight, flexible material, such as a woven fabric cord, a polymer (plastic, elastomeric, etc.) cord, etc. The tether 110 may include a first end 112 and a second end 113. The first end 112 and the second end 113 may include detachable connectors 114 and 115, respectively. The detachable connectors 114 and 115 may be configured to mechanically couple the first end 112 of the tether 110 to the first earbud 102, and the second end 113 of the tether 110 to the second earbud 104. For example, each of the detachable connectors 114 and 115 may include a plug 116 configured for insertion into a corresponding recess of the first or second earbud 102, 104.

[0018] The first and second wireless earbuds 102 and 104 may be used in conjunction with the tether 110 to, e.g., prevent loss of an individual one of the first and second earbuds 102 and 104. In some embodiments, connection of the tether 110 may alter the functionality

of the wireless earbuds, as described in detail below in connection with FIGS. 4, 5, and 6. In some embodiments, the detachable connectors 114 and 115 may not include electrical connections configured to establish electrical communication between the first and second wireless earbuds 102 and 104, such that the connections between the detachable connectors 114 and 115 and the first and second wireless earbuds 102 and 104 is only mechanical and not electrical. In such embodiments, the detachable connectors 114 and 115 may not comprise any electrically conductive material. In other embodiments, the detachable connectors 114 and 115 may include electrical connections configured to establish electrical communication between the first and second wireless earbuds 102 and 104 and circuitry within the tether 110. Such electrical connections are described in detail below in connection with FIGS. 10A and 10B.

[0019] FIG. 2 is a schematic representation of components 117 within an earbud headphone (e.g., the first earbud 102 or the second earbud 104 of FIG. 1). The components 117 within the earbud headphone may include, without limitation, an audio transducer 118, a wireless audio unit 120, and a battery 122. The audio transducer 118 may be an electromechanical device configured to receive an analog electrical signal containing audio information and convert the electrical energy to sound waves (e.g., physical vibrations with a frequency of about 20 Hz to about 20 kHz). In some embodiments, each of the first earbud 102 and the second earbud 104 may include a plurality of audio transducers 118. In some embodiments, each of the first earbud 102 and the second earbud 104 may include an enclosure tuned with respect to the audio transducer 118 to enhance (e.g., increase) the output of the audio transducer 118 within a particular range of frequencies. In addition, some embodiments may include a tuned port or a tuned diaphragm configured to enhance the output of the audio transducer 118 within a particular frequency range.

[0020] The wireless audio unit 120 may include circuitry configured to receive wireless signals and transmit wireless signals. The wireless audio unit 120 may also include circuitry configured to decode a digital wireless signal. For example, the wireless audio unit 120 may include circuitry configured to convert a digital signal to an analog audio signal. In one embodiment, the wireless unit may include an RF receiver 126 operatively coupled to a digital-to-analog converter (DAC) 128. An audio amplifier 130 may be operatively coupled to an analog output of the DAC 128 and configured to amplify the analog audio output from the DAC 128 to a level suitable to drive the audio transducer 118. The wireless audio unit 120 may also include an RF transmitter (not shown) configured to broadcast a wireless signal, as discussed below.

[0021] The battery 122 may be configured to supply electrical current to the wireless audio unit 120. In other words, current from the battery 122 may be consumed by the RF receiver 126, the DAC 128, and the audio amplifier 130. The battery 122 may be, for example, a re-

chargeable lithium-ion battery, or any other battery with suitable energy density.

[0022] In some embodiments, the first earbud 102 and the second earbud 104 may include components and circuitry to provide active noise cancelling (ANC) functionality. For example, each of the first earbud 102 and the second earbud 104 may include a microphone for converting ambient noises to electrical signals. Signal processing circuitry may generate electrical signals representing sounds identical to the ambient sounds but in opposite phase. The opposite-phase ambient sounds may be reproduced through the audio transducer 118 to cancel the ambient sounds.

[0023] FIG. 3 is a schematic diagram showing an operational mode of the wireless earbud system 100 (FIG. 1). A media device 134 may be configured to broadcast a wireless signal 136 containing data representing an audio signal. The media device 134 may be, for example, a handheld device such as a cellular "smart" phone, a tablet computer, a digital music player, a laptop computer, a desktop computer, etc. In the embodiment shown in FIG. 3, the wireless earbuds 102 and 104 may operate in a so-called "master-slave" configuration. For example, one of earbuds 102 and 104 may be designated the "master." An RF receiver in the "master" earbud (e.g., RF receiver 126 (FIG. 2) in the earbud 102) may receive the wireless signal 136 from the media device 134. The wireless signal 136 from the media device 134 may be separated into left and right audio channels by circuitry and/or software routines associated with the "master" earbud. Data from one audio channel (e.g., one of left or right) may be converted to an audio signal, amplified, and played through an audio transducer 118 (FIG. 2) in the "master" earbud. Data from the other audio channel (e.g., the other of the left or right channels) may be transmitted wirelessly (e.g., by wireless signal 137) from an RF transmitter within the "master" earbud to an RF receiver (e.g., RF receiver 126) within the "slave" earbud, where the data is converted to an audio signal, amplified, and played through an audio transducer 118 in the "slave" earbud.

[0024] Operation as the "master" earbud may consume significantly more power than operation as the "slave" earbud, as the "master" earbud must separate the channels and re-transmit one of the channels to the "slave" earbud. Accordingly, in some embodiments, each of the earbuds 102 and 104 may be configured to alternately function as "master" and "slave." For example, the earbuds 102 and 104 may switch between "master" and "slave" roles on a regular, periodic basis to maintain generally equal battery charge between the earbud 102 and the earbud 104. In other embodiments, the particular earbud that functions as the "master" or "slave" may be chosen by other routines based on remaining charge in each battery and/or other parameters. Furthermore, while the above description assumes the earbuds 102 and 104 are functioning as a stereo pair, some data streams broadcast by the media device 134 may include only a single

channel of audio data (i.e., monophonic sound). Such data may be received and played by one of the earbuds 102 and 104, or may be received and played simultaneously by both of the earbuds 102 and 104.

[0025] In some embodiments, the media device 134 may broadcast a wireless signal that is received directly by each of the first earbud 102 and second earbud 104. In other words, neither of the first earbud 102 and the second earbud 104 function as "master" or "slave," but each receives the wireless signal 136 directly from the media device 134. When operating in this arrangement, each of the earbuds 102 and 104 convert a portion of the wireless signal 136 corresponding to one of the left or right channels to an analog audio signal (e.g., by processing a portion of the wireless signal 136 through the DAC 128 and audio amplifier 130) and play the audio signal through an audio transducer 118 (FIG. 2).

[0026] The wireless signal 136 may be broadcast by the media device 134 based on established wireless protocols, such as the Bluetooth® Advanced Audio Distribution Profile (A2DP). Additionally or alternatively, other wireless protocols (e.g., Wi-Fi), may be used.

[0027] FIG. 4 illustrates another embodiment of a wireless earbud system 138 according to the disclosure. In wireless earbud system 138, a tether 140 may include electronic components 142 configured to be operatively connected to (e.g., by electrically conductive contacts 219 described below in connection with FIGS. 10A and 10B) a first earbud 144 and a second earbud 146 when the first earbud 144 and the second earbud 146 are connected by the tether 140. For example, in the embodiment shown in FIG. 3, the electronic components 142 may include a battery 148 configured to provide power to operate one or more of the RF receiver 126 (FIG. 2), RF transmitter (not illustrated), DAC 128 (FIG. 2), and audio amplifier 130 (FIG. 2) of each of the earbuds 144 and 146 when the tether 140 is connected to the first earbud 144 and the second earbud 146. Furthermore, the battery 148 may be configured to charge (e.g., recharge) batteries (e.g., battery 122 described in connection with FIG. 2) in the wireless earbuds 144 and 146 when the tether 140 is connected to the first earbud 144 and the second earbud 146. When the tether 140 is connected to one or both of the first earbud 144 and the second earbud 146, the electronic componentry within the earbuds 144 and 146 may draw power from one or both of the battery 148 in the tether 140 and the batteries 122 within the individual earbuds 144 and 146. The battery 148 may be a lithium-ion rechargeable battery as discussed above, or a battery with different chemistry and/or construction. In some embodiments, the battery 148 may be charged by connecting a charging cable (e.g., micro USB, mini USB, USB-C) between a charging port 149 operatively coupled to the battery 148 and a power source (e.g., a USB port of a computer, charging station, etc.).

[0028] FIG. 5 illustrates another wireless earbud system 150 in accordance with the present disclosure. In the embodiment of FIG. 5, a tether 152 may include an

electronic control unit 154. The electronic control unit 154 may include, without limitation, one or more of a battery 156 similar to the battery 148 described in connection with FIG. 3, an RF receiver, an RF transmitter, a DAC, and an audio amplifier similar to those shown in connection with FIG. 2, and playback controls 158 such as a play button, stop button, skip to next track, begin previous track, etc. When the tether 152 is disconnected from earbuds 160 and 162, the earbuds 160 and 162 may function similarly to the earbuds 102 and 104 as shown and discussed with reference to FIG. 3. In other words, when the tether 152 is disconnected from the earbuds 160 and 162, the earbuds 160 and 162 may receive a wireless signal 136 (FIG. 3) from a media device 134 (FIG. 3) using a master/slave or other arrangement as described above.

[0029] When the tether 152 is connected to the earbuds 160 and 162, the wireless earbud system 150 may operate as shown and described in connection with FIG. 6. A media device 134 may broadcast a wireless signal 136 containing audio data as described above in connection with FIG. 3. An RF receiver similar to RF receiver 126 shown in connection with FIG. 2 within the electronic control unit 154 may receive the wireless signal 136. The wireless signal may be processed (e.g., decoded) by the DAC in the electronic control unit 154 to provide one or more analog audio channels (e.g., left and right stereo audio channels). The left and right analog audio channel signals may be directed to respective earbuds 160 and 162 through conductors (not shown) within the tether 152. The analog audio signals may be amplified by audio amplifiers within the earbuds 160 and 162 similar to audio amplifier 130 described above in connection with FIG. 2. Additionally or alternatively, the electronic control unit 154 may include one or more audio amplifiers configured to amplify the analog audio signals to a level suitable to drive audio drivers (e.g., audio transducers 118 described in connection with FIG. 2). Such driver-level signals may be transferred through conductors within the tether 152 and fed directly to audio drivers within the earbuds 160 and 162. In some embodiments, one or more conductors in the tether 152 may function as an antenna to enhance reception of the wireless signal 136 by the RF receiver within the electronic control unit 154.

[0030] The playback controls 158 on the electronic control unit 154 may be configured to generate signals that may be transmitted wirelessly from the electronic control unit 154 to the media device 134 to control playback of audio tracks from the media device 134. For example, operation of the playback controls 158 may generate a wireless signal 159 broadcast from an RF transmitter (not shown) within the electronic control unit 154. The media device 134 may receive the wireless signal and alter audio playback as directed by the user's operation of the playback controls 158.

[0031] In some embodiments, the playback controls may be buttons arranged on the electronic control unit 154. In other embodiments, the playback controls may

be operated by, for example, manipulating (e.g., squeezing) the tether 152. For example, at least a portion of the tether 152 may be configured to generate a voltage signal (e.g., by changing resistance) when squeezed by the user.

[0032] In some embodiments, the wireless earbuds 160 and 162, the electronic control unit 154, or both may be configured to collect information from the user and wirelessly transmit the information to the media device 134. For example, the wireless earbuds 160 and 162 may include sensors configured to sense biometric feedback such as heart rate or body temperature, sensors configured to sense movement (e.g., accelerometers), or other sensors. Information collected by these sensors may be transmitted wirelessly to the media device 134, where it may be organized and processed to provide information (e.g., a heart rate graph, number of steps taken, etc.) to be displayed to the user, posted to social media websites, or similarly employed.

[0033] When operating in the configuration described with reference to FIG. 6, certain limitations of some wireless earbuds may be mitigated. For example, at times, some wireless earbuds may suffer from uneven playback between earbuds, e.g., when the playback of left and right audio channels is not suitably synchronized and timing discrepancies between left and right audio channels are audibly noticeable. When connected by the tether 152, synchronization between the left and right channels can be maintained with high accuracy, at least because the left and right channels are transmitted by the same wireless signal 136. Moreover, as the batteries contained within the individual wireless earbuds (e.g., battery 122 (FIG. 2)) must be relatively small and lightweight to ensure that the wireless earbuds remain in the user's ear during activity, some wireless earbuds may have insufficient battery life for extended periods of use. When connected by the tether 152, the battery 156 in the electronic control unit 154 may provide significant additional operating time to the wireless earbuds. Finally, connecting the wireless earbuds 160 and 162 with the tether 152 may prevent loss of a single wireless earbud, particularly during physical activity of the user (e.g., jogging, cycling, etc.). Because the tether 152 is removable, the wireless earbuds 160 and 162 can be used without the tether and the electronic control unit 154 at times when such operation is desired.

[0034] FIGS. 7A through 10B show various implementations of detachable connectors (e.g., detachable connectors 114 and 115 as described in connection with FIG. 1) according to embodiments of the disclosure. FIG. 7A shows an embodiment of a detachable connector 164 similar to that described with reference to FIG. 1. A distal end 166 of a tether 168 may include a plug 170 configured to be inserted within a recess (e.g., a bore, hole, receptacle, etc.) in a housing 172 of a wireless earbud 174. The plug 170 may include resilient flanges 176 configured to form an interference fit against walls of the recess to retain the plug 170 within the recess, thereby retaining

the wireless earbud 174 on the tether 168, as shown in FIG. 7B.

[0035] FIGS. 8A and 8B show another embodiment of a detachable connector 178. In this embodiment, a distal end 180 of a tether 182 includes a loop 184 of resilient material such as a flexible polymer. A housing 186 of a wireless earbud 188 includes a peripheral groove 190. The loop 184 may fit at least partially within the peripheral groove 190 to retain the wireless earbud 188 on the tether 182, as shown in FIG. 8B.

[0036] FIGS. 9A and 9B show another embodiment of a detachable connector 192. The detachable connector 192 includes a magnetic interface 194 positioned at a distal end 196 of a tether 198. A complementary magnetic interface 200 is disposed on a housing 202 of a wireless earbud 204. One or both of the magnetic interface 194 and the complementary magnetic interface 200 may include one or more permanent physical magnets such as ceramic magnets, rare earth magnets, etc. In some embodiments, one of the magnetic interface 194 and the complementary magnetic interface 200 may include magnetic material while the other of the magnetic interface 194 and the complementary magnetic interface 200 may include ferromagnetic material. Magnetic attraction between the magnetic interface 194 and the complementary magnetic interface 200 may retain the distal end 196 of the tether 198 to the housing 202 of the wireless earbud 204, as shown in FIG. 9B.

[0037] FIGS. 10A and 10B show yet another embodiment of a detachable connector 206. In this embodiment, the detachable connector 206 includes a pin 208 extending from a connection interface 210 on a distal end 212 of a tether 214. A wireless earbud housing 216 may include a recess 218 into which the pin 208 may be inserted. An interference fit between the pin 208 and the recess 218 may retain the tether 214 to the wireless earbud housing 216, as shown in FIG. 10B. Referring again to FIG. 10A, one or more electrically conductive contacts 219 may be disposed on the wireless earbud housing 216, and corresponding electrically conductive contacts (not shown) may be disposed on the connection interface 210. When the pin 208 is fully inserted within the recess 218, the electrically conductive contacts 219 may be brought into contact with the corresponding electrically conductive contacts of the connection interface 210, thereby connecting electrical circuitry within the wireless earbud housing 216 with electrical conductors in the tether 214. The electrically conductive contacts 219 and the corresponding electrically conductive contacts on the connection interface 210 may enable transfer of electrical signals between, e.g., the electronic control unit 154 (FIG. 5) and wireless earbuds 160 and 162 (FIG. 5) as described above.

[0038] While three (3) conductive contacts 219 are shown above in FIG. 10A, more than three, or less than three, conductive contacts 219 may be employed, depending on the configuration of the wireless earbuds and the functionality of the tether 214 and the electronic con-

trol unit 154 and the required number of discrete electrical pathways therebetween. Furthermore, conductive contacts similar to conductive contacts 219 may be used in connection with any of the detachable connectors (e.g., detachable connectors 164, 178, 192, 206) shown and described above. In other words, inclusion of conductive contacts is not limited to the specific embodiment of the detachable connector shown in FIGS. 10A and 10B.

[0039] FIG. 11 illustrates another embodiment of a wireless earbud system 220 in accordance with the present disclosure. The wireless earbud system 220 includes an electronic control unit 222 with a housing 224 configured to accept wireless earbuds 226 and 228 for storage and/or charging. In other words, the housing 224 of the electronic control unit 222 may include a recessed area with a profile at least partially matching the shape of the wireless earbuds 226 and 228 such that the wireless earbuds can be positioned at least partially within the housing 224. Electrical contacts (not shown) may be disposed within the housing 224 and positioned to make contact with electrical contacts (e.g., conductive contacts 219 described in connection with FIG. 10A) on one or both of the wireless earbuds 226 and 228 to charge batteries (e.g., battery 122 discussed above in connection with FIG. 2) within the wireless earbuds 226 and 228 using power from a battery within the electronic control unit 222 (e.g., battery 156 as discussed above in connection with FIG. 5) or a charging cable attached to the electronic control unit 222 and plugged into a charging port 149 (FIG. 4). For example, when the electronic control unit 222 is not attached to a charging cable, the batteries 122 within the earbuds may be charged by the battery 156 within the electronic control unit 222. When the electronic control unit 222 is attached to a charging cable, the batteries 122 and the battery 156 may charge simultaneously.

[0040] In some embodiments, the wireless earbuds 226 and 228 may attach to one another at an interface 230. For example, interface 230 may be a magnetic connection interface, e.g., similar to that described above in connection with FIGS. 9A and 9B. In other embodiments, the interface 230 may include mechanical connectors, such as tabs or pins and complementary slots or receptacles, etc.

[0041] The wireless earbuds 226 and 228 may each include a power switch 232 disposed on or adjacent to the interface 230. The power switch 232 may be configured to automatically power off each wireless earbuds 226, 228 when the wireless earbuds 226, 228 are connected at the interface 230, and to automatically power on the wireless earbuds when the wireless earbuds are detached from one another at the interface 230. The power switches 232 may prevent excessive power consumption when the earbuds are not in use and thus improve (e.g., maximize) battery life. The power switches 232 may be mechanical (e.g., plunger) switches or switches without moving parts, such as magnetic switches (e.g., hall effect switches) that change conductivity based on the

presence of a magnetic field (e.g., a magnetic field associated with magnets of a magnetic connection interface between the wireless earbuds 226 and 228).

[0042] FIGS. 12A and 12B illustrate another embodiment of an electrical control unit 234 according to the present disclosure. The electrical control unit 234 may include playback controls 236 (FIG. 12B), such as play, stop, next track, and previous track buttons. The electrical control unit 234 may also include a clip, e.g., a spring-loaded clip 238 (FIG. 12A) configured to attach to a user's clothing, e.g., collar, placket, lapel, etc., for convenience. The electrical control unit 234 may include a tether 240 similar to, e.g., the tether 152 described above with reference to FIG. 5. The electrical control unit 234 may include functionality similar to the electronic control unit 154 described with reference to FIG. 5.

[0043] In some embodiments, the wireless earbud system 100 (FIG. 1), 138 (FIG. 4), 150 (FIG. 5, 6), or 220 (FIG. 11) may include software executable by the media device 134 (FIG. 3). For example, such software may include a graphical user interface (GUI) for display on a display screen of the media device 134. The GUI may include information related to the battery charge in each earbud, the battery charge in the electronic control unit 154 (FIG. 5), 234 (FIGS. 12A and 12B), playback mode (e.g., master-slave configuration or direct transmission to both earbuds as discussed in connection with FIG. 3), and other operational parameters of the earbud system.

Claims

1. A wireless earbud system (100), comprising:
a first earbud assembly and a second earbud assembly, each of the first earbud assembly and the second earbud assembly comprising:

a housing (106, 108, 172, 202, 216);
an audio driver disposed within the housing (106, 108, 172, 202, 216); and
a wireless receiving unit operatively coupled to the audio driver, the wireless receiving unit configured to receive a wireless data signal and drive the audio driver based on audio data transmitted in the wireless data signal;

the wireless earbud system (100) additionally comprising a tether (110, 140, 152, 168, 182, 198, 214, 240) with a first end (112), a second end (113), and an electronic control unit (154, 222) located between the first end (112) and the second end (113), wherein the first end (112) of the tether (110,... 240) is configured to removably couple to the first earbud assembly by a first detachable connector, (114, 115) wherein the second end (113) of the tether (110,... 240) is configured to removably couple to the second earbud assembly

- bly by a second detachable connector (114, 115), and
 wherein one of the first earbud assembly and the second earbud assembly is configured to operate as a master and communicate directly with a media device (134) when the first end (112) and the second end (113) of the tether (110,... 240) are disconnected from the first earbud assembly and the second earbud assembly, and
 wherein the electronic control unit (154, 222) is configured to communicate directly with the media device (134), with the first earbud assembly and the second earbud assembly communicating directly with the electronic control unit (154, 222), when the first end (112) of the tether (110,... 240) is connected to the first earbud assembly and the second end (113) of the tether (110,... 240) is connected to the second earbud assembly.
2. The wireless earbud system (100) of claim 1, wherein each of the first detachable connector (114, 115) and the second detachable connector (114, 115) comprise electrical contacts operatively coupling the electronic control unit (154, 222) in the tether (110,... 240) respectively with the first earbud assembly and the second earbud assembly.
 3. The wireless earbud system (100) of claim 2, wherein the first earbud assembly comprises a first earbud battery (122, 148, 156) and the second earbud assembly comprises a second earbud battery (122, 148, 156), wherein the electronic control unit (154, 222) comprises a control unit battery, and wherein one or both of the first earbud battery (122, 148, 156) and the audio driver in the first earbud assembly, and one or both of the second earbud battery (122, 148, 156) and the audio driver in the second earbud assembly, are configured to draw electrical power from the control unit battery when the first end (112) of the tether (110,... 240) is coupled to the first earbud assembly and the second end (113) of the tether (110,... 240) is coupled to the second earbud assembly.
 4. The wireless earbud system (100) of claim 2 or claim 3, wherein the electronic control unit (154, 222) in the tether (110,... 240) comprises a wireless receiver configured to receive a wireless data signal from a media device (134) and transmit an audio signal through the tether (110,... 240) directly to the audio drivers of the first and second earbud assemblies through electrical conductors when the first and second ends (112, 113) of the tether (110,... 240) are respectively coupled with the first and second earbud assemblies.
 5. The wireless earbud system (100) of any one of claims 2 through 4, wherein the electronic control unit (154, 222) comprises one or more playback controls (158, 236), and wherein the wireless unit is configured to transmit playback instructions from the playback controls (158, 236) to a media device (134).
 6. The wireless earbud system (100) of any one of claims 2 through 5, wherein the electronic control unit (154, 222) comprises a housing (224) configured to store the first earbud assembly and the second earbud assembly.
 7. The wireless earbud system (100) of claim 6, wherein the first earbud assembly and the second earbud assembly are configured to couple to one another for storage in the electronic control unit housing (224).
 8. The wireless earbud system (100) of claim 7, wherein the first earbud assembly and the second earbud assembly each include electronic switches (232) configured to power off the first earbud assembly and the second earbud assembly when the first earbud assembly and the second earbud assembly are coupled to one another.
 9. The wireless earbud system (100) of claim 8, wherein the electronic switches (232) are configured to automatically power on the first earbud assembly and the second earbud assembly when the first earbud assembly is decoupled from the second earbud assembly.
 10. The wireless earbud system (100) of any one of claims 1 through 9, wherein the first detachable connector (114, 115) and the second detachable connector (114, 115) each comprise a peripheral groove (190) in a portion of the first and second respective earbud housings (106, 108, 172, 202, 216) and first and second resilient loops (184) at the first and second respective ends of the tether (110,... 240), and wherein the first and second resilient loops (184) are configured to fit at least partially within a respective one of the peripheral grooves (190) to retain the first and second ends (112, 113) of the tether (110,... 240) to the first and second respective earbud housings (106, 108, 172, 202, 216).
 11. The wireless earbud system (100) of any one of claims 1 through 9, wherein the first detachable connector (114, 115) and the second detachable connector (114, 115) each comprise a magnetic interface (194) on each of the first and second ends (112, 113) of the tether (110,... 240) and a complementary magnetic interface (200) on each of the first and second earbud housings (106, 108, 172, 202, 216).

12. The wireless earbud system (100) of any one of claims 1 through 9, wherein the first detachable connector (114, 115) and the second detachable connector (114, 115) each comprise a plug (170) on each of the first and second ends (112, 113) of the tether (110,... 240) configured for insertion within a respective complimentary recess disposed in each of the first and second earbud housings (106, 108, 172, 202, 216).
13. The wireless earbud system (100) of any one of claims 1 through 12, wherein the wireless receiving unit in the first earbud assembly and the wireless receiving unit in the second earbud assembly are each configured to receive a wireless signal from a media device (134) and to send a wireless signal to the wireless receiving unit in the other of the first earbud assembly and the second earbud assembly.
14. The wireless earbud system (100) of any one of claims 1 through 13, wherein at least one of the first earbud assembly and the second earbud assembly comprise a sensor configured to sense biometric feedback, and wherein at least one of the wireless receiving unit in the first earbud assembly and the wireless receiving unit in the second earbud assembly are configured to transmit a wireless data signal based on the biometric feedback to a media device (134).
15. A method of forming a wireless earbud system (100), the method comprising:
- forming an electronic control unit (154, 222) comprising a wireless unit, a battery, and a tether (110,... 240);
 - forming first and second wireless earbud assemblies;
 - configuring first and second ends (112, 113) of the tether (110,... 240) to removably couple to the first and second wireless earbud assemblies;
 - configuring one of the first and second wireless earbud assemblies to operate in a master mode and receive a wireless signal directly from a media device (134) and to drive audio drivers in the first and second wireless earbud assemblies with an audio signal based on data received directly from the media device (134) when the first and second ends (112, 113) of the tether (110,... 240) are decoupled from the first and second wireless earbud assemblies;
 - configuring the wireless unit of the electronic control unit (154, 222) to receive a wireless signal directly from the media device (134) and to drive the audio drivers in the first and second wireless earbud assemblies through electrical conductors disposed within the tether (110,...

240) with an audio signal based on data received directly wirelessly from the media device (134) when the first and second ends (112, 113) of the tether (110,... 240) are respectively coupled to the first and second earbud assemblies.

Patentansprüche

1. Drahtloses Ohrhörersystem (100), umfassend: eine erste Ohrhörerberaugruppe und eine zweite Ohrhörerberaugruppe, wobei jede von der ersten Ohrhörerberaugruppe und der zweiten Ohrhörerberaugruppe Folgendes umfasst:
- ein Gehäuse (106, 108, 172, 202, 216);
 - einen Audiotreiber, der in dem Gehäuse (106, 108, 172, 202, 216) angeordnet ist; und
 - eine drahtlose Empfangseinheit, die mit dem Audiotreiber betriebsfähig gekoppelt ist, wobei die drahtlose Empfangseinheit konfiguriert ist, um ein drahtloses Datensignal zu empfangen und den Audiotreiber basierend auf Audiodaten anzusteuern, die in dem drahtlosen Datensignal übertragen werden; wobei das drahtlose Ohrhörersystem (100) zusätzlich ein Band (110, 140, 152, 168, 182, 198, 214, 240) mit einem ersten Ende (112), einem zweiten Ende (113) und einer elektronischen Steuereinheit (154, 222), die sich zwischen dem ersten Ende (112) und dem zweiten Ende (113) befindet, umfasst, wobei das erste Ende (112) des Bandes (110, ... 240) konfiguriert ist, um mit der ersten Ohrhörerberaugruppe durch ein erstes lösbares Verbindungsstück (114, 115) abnehmbar gekoppelt zu sein, wobei das zweite Ende (113) des Bandes (110, ... 240) konfiguriert ist, um mit der zweiten Ohrhörerberaugruppe durch ein zweites lösbares Verbindungsstück (114, 115) abnehmbar gekoppelt zu sein, und
 - wobei eine von der ersten Ohrhörerberaugruppe und der zweiten Ohrhörerberaugruppe konfiguriert ist, um als Master zu dienen und mit einer Medienvorrichtung (134) direkt zu kommunizieren, wenn das erste Ende (112) und das zweite Ende (113) des Bandes (110, ... 240) von der ersten Ohrhörerberaugruppe und der zweiten Ohrhörerberaugruppe getrennt sind, und wobei die elektronische Steuereinheit (154, 222) konfiguriert ist, um mit der Medienvorrichtung (134) direkt zu kommunizieren, wobei die erste Ohrhörerberaugruppe und die zweite Ohrhörerberaugruppe mit der elektronischen Steuereinheit (154, 222) direkt kommunizieren, wenn das erste Ende (112) des Bandes (110, ... 240) mit der ersten Ohrhörerberaugruppe verbunden ist und das zweite Ende (113) des Bandes (110, ... 240) mit der zweiten Ohrhörerberaugruppe verbunden

- ist.
2. Drahtloses Ohrhörersystem (100) nach Anspruch 1, wobei jedes von dem ersten abnehmbaren Verbindungsstück (114, 115) und dem zweiten abnehmbaren Verbindungsstück (114, 115) elektrische Kontakte umfasst, welche die elektronische Steuereinheit (154, 222) in dem Band (110, ... 240) jeweils mit der ersten Ohrhörerbaugruppe und der zweiten Ohrhörerbaugruppe betriebsfähig koppeln. 5
 3. Drahtloses Ohrhörersystem (100) nach Anspruch 2, wobei die erste Ohrhörerbaugruppe eine erste Ohrhörerbatterie (122, 148, 156) umfasst und die zweite Ohrhörerbaugruppe eine zweite Ohrhörerbatterie (122, 148, 156) umfasst, wobei die elektronische Steuereinheit (154, 222) eine Batterie der Steuereinheit umfasst, und wobei eine(r) oder beide von der ersten Ohrhörerbatterie (122, 148, 156) und dem Audiotreiber in der ersten Ohrhörerbaugruppe und eine(r) oder beide von der zweiten Ohrhörerbatterie (122, 148, 156) und dem Audiotreiber in der zweiten Ohrhörerbaugruppe konfiguriert sind, um elektrische Energie von der Batterie der Steuereinheit abzunehmen, wenn das erste Ende (112) des Bandes (110, ... 240) mit der ersten Ohrhörerbaugruppe gekoppelt ist und das zweite Ende (113) des Bandes (110, ... 240) mit der zweiten Ohrhörerbaugruppe gekoppelt ist. 10 15 20 25 30
 4. Drahtloses Ohrhörersystem (100) nach Anspruch 2 oder 3, wobei die elektronische Steuereinheit (154, 222) in dem Band (110, ... 240) einen drahtlosen Empfänger umfasst, der konfiguriert ist, um ein drahtloses Datensignal von einer Medieneinrichtung (134) zu empfangen und ein Audiosignal über das Band (110, ... 240) direkt an die Audiotreiber der ersten und zweiten Ohrhörerbaugruppen über elektrische Leiter zu senden, wenn die ersten und zweiten Enden (112, 113) des Bandes (110, ... 240) jeweils mit den ersten und zweiten Ohrhörerbaugruppen gekoppelt sind. 35 40
 5. Drahtloses Ohrhörersystem (100) nach einem der Ansprüche 2 bis 4, wobei die elektronische Steuereinheit (154, 222) ein oder mehrere Wiedergabebedienelemente (158, 236) umfasst, und wobei die drahtlose Einheit konfiguriert ist, um Wiedergabeanweisungen von den Wiedergabebedienelementen (158, 236) an eine Medieneinrichtung (134) zu senden. 45 50
 6. Drahtloses Ohrhörersystem (100) nach einem der Ansprüche 2 bis 5, wobei die elektronische Steuereinheit (154, 222) ein Gehäuse (224) umfasst, das konfiguriert ist, um die erste Ohrhörerbaugruppe und die zweite Ohrhörerbaugruppe zu lagern. 55
 7. Drahtloses Ohrhörersystem (100) nach Anspruch 6, wobei die erste Ohrhörerbaugruppe und die zweite Ohrhörerbaugruppe konfiguriert sind, um zur Lagerung in dem Gehäuse (224) der elektronischen Steuereinheit miteinander gekoppelt zu sein.
 8. Drahtloses Ohrhörersystem (100) nach Anspruch 7, wobei die erste Ohrhörerbaugruppe und die zweite Ohrhörerbaugruppe jeweils elektronische Schalter (232) umfassen, die konfiguriert sind, um die erste Ohrhörerbaugruppe und die zweite Ohrhörerbaugruppe auszuschalten, wenn die erste Ohrhörerbaugruppe und die zweite Ohrhörerbaugruppe miteinander gekoppelt sind.
 9. Drahtloses Ohrhörersystem (100) nach Anspruch 8, wobei die elektronischen Schalter (232) konfiguriert sind, um die erste Ohrhörerbaugruppe und die zweite Ohrhörerbaugruppe automatisch einzuschalten, wenn die erste Ohrhörerbaugruppe von der zweiten Ohrhörerbaugruppe entkoppelt ist.
 10. Drahtloses Ohrhörersystem (100) nach einem der Ansprüche 1 bis 9, wobei das erste lösbare Verbindungsstück (114, 115) und das zweite lösbare Verbindungsstück (114, 115) jeweils eine umlaufende Rille (190) in einem Abschnitt der ersten und zweiten jeweiligen Ohrhörergehäuse (106, 108, 172, 202, 216) und erste und zweite federelastische Ösen (184) an den ersten und zweiten jeweiligen Enden des Bandes (110, ... 240) umfassen, und wobei die ersten und zweiten federelastischen Ösen (184) konfiguriert sind, um mindestens teilweise in eine jeweilige der umlaufenden Rillen (190) zu passen, um die ersten und zweiten Enden (112, 113) des Bandes (110, ... 240) an den ersten und zweiten jeweiligen Ohrhörergehäusen (106, 108, 172, 202, 216) festzuhalten.
 11. Drahtloses Ohrhörersystem (100) nach einem der Ansprüche 1 bis 9, wobei das erste lösbare Verbindungsstück (114, 115) und das zweite lösbare Verbindungsstück (114, 115) jeweils eine magnetische Schnittstelle (194) an jedem von den ersten und zweiten Enden (112, 113) des Bandes (110, ... 240) und eine passende magnetische Schnittstelle (200) an jedem der ersten und zweiten Ohrhörergehäuse (106, 108, 172, 202, 216) umfassen.
 12. Drahtloses Ohrhörersystem (100) nach einem der Ansprüche 1 bis 9, wobei das erste lösbare Verbindungsstück (114, 115) und das zweite lösbare Verbindungsstück (114, 115) jeweils einen Stecker (170) an jedem der ersten und zweiten Ende (112, 113) des Bandes (110, ... 240) umfassen, der zur Einfügung in eine jeweilige passende Vertiefung, die an jedem von den ersten und zweiten Ohrhörergehäusen (106, 108, 172, 202, 216) angeordnet ist,

konfiguriert ist.

13. Drahtloses Ohrhörersystem (100) nach einem der Ansprüche 1 bis 12, wobei die drahtlose Empfangseinheit in der ersten Ohrhörerbaugruppe und die drahtlose Empfangseinheit in der zweiten Ohrhörerbaugruppe jeweils konfiguriert sind, um ein drahtloses Signal von einer Medieneinrichtung (134) zu empfangen und ein drahtloses Signal an die drahtlose Empfangseinheit in der anderen von der ersten Ohrhörerbaugruppe und der zweiten Ohrhörerbaugruppe zu senden.

14. Drahtloses Ohrhörersystem (100) nach einem der Ansprüche 1 bis 13, wobei mindestens eine von der ersten Ohrhörerbaugruppe und der zweiten Ohrhörerbaugruppe einen Sensor umfasst, der konfiguriert ist, um eine biometrische Rückmeldung zu erfassen, und wobei mindestens eine von der drahtlosen Empfangseinheit in der ersten Ohrhörerbaugruppe und der drahtlosen Empfangseinheit in der zweiten Ohrhörerbaugruppe konfiguriert ist, um ein drahtloses Datensignal basierend auf der biometrischen Rückmeldung an eine Medieneinrichtung (134) zu senden.

15. Verfahren zum Bilden eines drahtlosen Ohrhörersystems (100), wobei das Verfahren folgende Schritte umfasst:

Bilden einer elektronischen Steuereinheit (154, 222), die eine drahtlose Einheit, eine Batterie und ein Band (110, ... 240) umfasst;

Bilden von ersten und zweiten drahtlosen Ohrhörerbaugruppen;

Konfigurieren von ersten und zweiten Enden (112, 113) des Bandes (110, ... 240), um die ersten und zweiten drahtlosen Ohrhörerbaugruppen abnehmbar zu koppeln;

Konfigurieren einer von den ersten und zweiten drahtlosen Ohrhörerbaugruppen, um in einem Master-Modus zu funktionieren und ein drahtloses Signal direkt von einer Medieneinrichtung (134) zu empfangen und um Audiotreiber in den ersten und zweiten drahtlosen Ohrhörerbaugruppen mit einem Audiosignal anzusteuern, das auf Daten basiert, die direkt von der Medieneinrichtung (134) empfangen werden, wenn die ersten und zweiten Enden (112, 113) des Bandes (110, ... 240) von den ersten und zweiten drahtlosen Ohrhörerbaugruppen entkoppelt sind;

Konfigurieren der drahtlosen Einheit der elektronischen Steuereinheit (154, 222), um ein drahtloses Signal direkt von der Medieneinrichtung (134) zu empfangen und die Audiotreiber in den ersten und zweiten drahtlosen Ohrhörerbaugruppen über elektrische Leiter, die in dem

Band (110, ... 240) angeordnet sind, mit einem Audiosignal anzusteuern, das auf Daten basiert, die direkt drahtlos von der Medieneinrichtung (134) empfangen werden, wenn die ersten und zweiten Enden (112, 113) des Bandes (110, ... 240) jeweils mit den ersten und zweiten Ohrhörerbaugruppen gekoppelt sind.

10 Revendications

1. Système d'écouteurs sans fil (100), comprenant: un premier ensemble écouteur et un second ensemble écouteur, chacun du premier ensemble écouteur et du second ensemble écouteur comprenant:

un boîtier (106, 108, 172, 202, 216);

un pilote audio disposé à l'intérieur du boîtier (106, 108, 172, 202, 216); et

une unité de réception sans fil couplée de manière fonctionnelle au pilote audio, l'unité de réception sans fil étant configurée pour recevoir un signal de données sans fil et piloter le pilote audio sur la base de données audio transmises dans le signal de données sans fil;

le système d'écouteurs sans fil (100) comprenant en outre un câble d'attache (110, 140, 152, 168, 182, 198, 214, 240) avec une première extrémité (112), une seconde extrémité (113) et une unité de commande électronique (154, 222) située entre la première extrémité (112) et la seconde extrémité (113), la première extrémité (112) du câble d'attache (110, ..., 240) étant configurée pour se coupler de manière amovible au premier ensemble écouteur par un premier connecteur détachable (114, 115), la seconde extrémité (113) du câble d'attache (110, ..., 240) étant configurée pour se coupler de manière amovible au second ensemble écouteur par un second connecteur détachable (114, 115), et dans lequel l'un du premier ensemble écouteur et du second ensemble écouteur est configuré pour fonctionner en tant que maître et communiquer directement avec un dispositif multimédia (134) lorsque la première extrémité (112) et la seconde extrémité (113) du câble d'attache (110, ..., 240) sont déconnectées du premier ensemble écouteur et du second ensemble écouteur, et dans lequel l'unité de commande électronique (154, 222) est configurée pour communiquer directement avec le dispositif multimédia (134), avec le premier ensemble écouteur et le second ensemble écouteur communiquant directement avec l'unité de commande électronique (154, 222), lorsque la première extrémité (112) du câble d'attache (110, ..., 240) est connectée au premier ensemble écouteur et que la seconde extrémité (113) du câble d'attache

- (110, ..., 240) est connectée au second ensemble écouteur.
2. Système d'écouteurs sans fil (100) selon la revendication 1, dans lequel chacun du premier connecteur détachable (114, 115) et du second connecteur détachable (114, 115) comprend des contacts électriques couplant de manière fonctionnelle l'unité de commande électronique (154, 222) dans le câble d'attache (110, ..., 240) respectivement au premier ensemble écouteur et au second ensemble écouteur.
 3. Système d'écouteurs sans fil (100) selon la revendication 2, dans lequel le premier ensemble écouteur comprend une première batterie d'écouteur (122, 148, 156) et le second ensemble écouteur comprend une seconde batterie d'écouteur (122, 148, 156), l'unité de commande électronique (154, 222) comprenant une batterie d'unité de commande, et l'un ou les deux de la première batterie d'écouteur (122, 148, 156) et du pilote audio dans le premier ensemble écouteur, et l'un ou les deux de la seconde batterie d'écouteur (122, 148, 156) et du pilote audio dans le second ensemble écouteur, sont configurés pour tirer une puissance électrique à partir de la batterie d'unité de commande lorsque la première extrémité (112) du câble d'attache (110, ..., 240) est couplée au premier ensemble écouteur et que la seconde extrémité (113) du câble d'attache (110, ..., 240) est couplée au second ensemble écouteur.
 4. Système d'écouteurs sans fil (100) selon la revendication 2 ou la revendication 3, dans lequel l'unité de commande électronique (154, 222) dans le câble d'attache (110, ..., 240) comprend un récepteur sans fil configuré pour recevoir un signal de données sans fil à partir d'un dispositif multimédia (134) et transmettre un signal audio par l'intermédiaire du câble d'attache (110, ..., 240) directement aux pilotes audio des premier et second ensembles écouteurs par l'intermédiaire de connecteurs électriques lorsque les première et seconde extrémités (112, 113) du câble d'attache (110, ..., 240) sont couplées respectivement aux premier et second ensembles écouteurs.
 5. Système d'écouteur sans fil (100) selon l'une quelconque des revendications 2 à 4, dans lequel l'unité de commande électronique (154, 222) comprend une ou plusieurs commandes de lecture (158, 236), et dans lequel l'unité sans fil est configurée pour transmettre des instructions de lecture depuis les commandes de lecture (158, 236) vers un dispositif multimédia (134).
 6. Système d'écouteurs sans fil (100) selon l'une quelconque des revendications 2 à 5, dans lequel l'unité de commande électronique (154, 222) comprend un boîtier (224) configuré pour stocker le premier ensemble écouteur et le second ensemble écouteur.
 7. Système d'écouteurs sans fil (100) selon la revendication 6, dans lequel le premier ensemble écouteur et le second ensemble écouteur sont configurés pour se coupler l'un à l'autre en vue d'un stockage dans le boîtier d'unité de commande électronique (224).
 8. Système d'écouteurs sans fil (100) selon la revendication 7, dans lequel le premier ensemble écouteur et le second ensemble écouteur comprennent chacun des commutateurs électroniques (232) configurés pour mettre hors tension le premier ensemble écouteur et le second ensemble écouteur lorsque le premier ensemble écouteur et le second ensemble écouteur sont couplés l'un à l'autre.
 9. Système d'écouteurs sans fil (100) selon la revendication 8, dans lequel les commutateurs électroniques (232) sont configurés pour mettre automatiquement sous tension le premier ensemble écouteur et le second ensemble écouteur lorsque le premier ensemble écouteur est découplé du second ensemble écouteur.
 10. Système d'écouteurs sans fil (100) selon l'une quelconque des revendications 1 à 9, dans lequel le premier connecteur détachable (114, 115) et le second connecteur détachable (114, 115) comprennent chacun une rainure périphérique (190) dans une partie des premier et second boîtiers d'écouteur respectifs (106, 108, 172, 202, 216) et des première et seconde boucles élastiques (184) au niveau des première et seconde extrémités respectives du câble d'attache (110, ..., 240), et dans lequel les première et seconde boucles élastiques (184) sont configurées pour s'encaster au moins partiellement à l'intérieur de l'une respective des rainures périphériques (190) pour retenir les première et seconde extrémités (112, 113) du câble d'attache (110, ..., 240) sur les premier et second boîtiers d'écouteur respectifs (106, 108, 172, 202, 216).
 11. Système d'écouteurs sans fil (100) selon l'une quelconque des revendications 1 à 9, dans lequel le premier connecteur détachable (114, 115) et le second connecteur détachable (114, 115) comprennent chacun une interface magnétique (194) sur chacune des première et seconde extrémités (112, 113) du câble d'attache (110, ..., 240) et une interface magnétique complémentaire (200) sur chacun des premier et second boîtiers d'écouteur (106, 108, 172, 202, 216).
 12. Système d'écouteurs sans fil (100) selon l'une quelconque des revendications 1 à 9, dans lequel le pre-

mier connecteur détachable (114, 115) et le second connecteur détachable (114, 115) comprennent chacun une fiche (170) sur chacune des première et seconde extrémités (112, 113) du câble d'attache (110, ..., 240) configurée pour une insertion à l'intérieur d'un renforcement complémentaire respectif disposé dans chacun des premier et second boîtiers d'écouteur (106, 108, 172, 202, 216).



13. Système d'écouteurs sans fil (100) selon l'une quelconque des revendications 1 à 12, dans lequel l'unité de réception sans fil dans le premier ensemble écouteur et l'unité de réception sans fil dans le second ensemble écouteur sont chacune configurées pour recevoir un signal sans fil à partir d'un dispositif multimédia (134) et pour envoyer un signal sans fil à l'unité de réception sans fil dans l'autre du premier ensemble écouteur et du second ensemble écouteur.

14. Système d'écouteurs sans fil (100) selon l'une quelconque des revendications 1 à 13, dans lequel au moins l'un du premier ensemble écouteur et du second ensemble écouteur comprend un capteur configuré pour détecter une rétroaction biométrique, et dans lequel au moins l'une de l'unité de réception sans fil dans le premier ensemble écouteur et de l'unité de réception sans fil dans le second ensemble écouteur est configurée pour transmettre un signal de données sans fil sur la base de la rétroaction biométrique au dispositif multimédia (134).

15. Procédé de formation d'un système d'écouteurs sans fil (100), le procédé comprenant :

former une unité de commande électronique (154, 222) comprenant une unité sans fil, une batterie et un câble d'attache (110, ..., 240);
former des premier et second ensembles écouteurs sans fil;
configurer des première et seconde extrémités (112, 113) du câble d'attache (110, ..., 240) pour se coupler de manière amovible aux premier et second ensembles écouteurs sans fil;
configurer l'un des premier et second ensembles écouteurs sans fil pour fonctionner dans un mode maître et recevoir un signal sans fil directement à partir d'un dispositif multimédia (134) et pour piloter des pilotes audio dans les premier et second ensembles écouteurs sans fil avec un signal audio sur la base de données reçues directement à partir du dispositif multimédia (134) lorsque les première et seconde extrémités (112, 113) du câble d'attache (110, ..., 240) sont découplées des premier et second ensembles écouteurs sans fil;
configurer l'unité sans fil de l'unité de commande électronique (154, 222) pour recevoir un signal

sans fil directement à partir du dispositif multimédia (134) et pour piloter les pilotes audio dans les premier et second ensembles écouteurs sans fil par l'intermédiaire de conducteurs électriques disposés à l'intérieur du câble d'attache (110, ..., 240) avec un signal audio sur la base de données reçues directement de manière sans fil à partir du dispositif multimédia (134) lorsque les première et seconde extrémités (112, 113) du câble d'attache (110, ..., 240) sont couplées respectivement aux premier et second ensembles écouteurs.

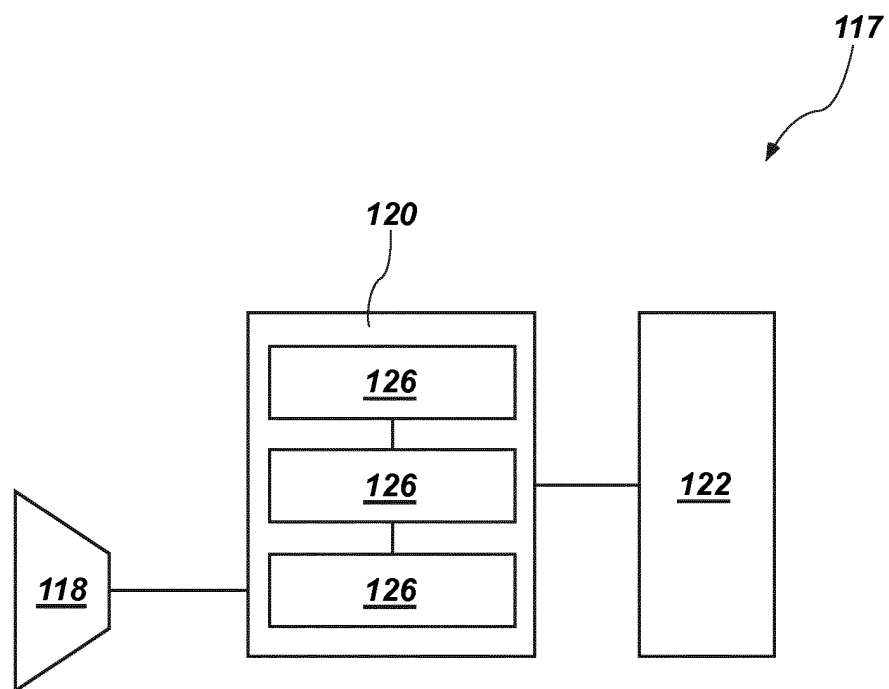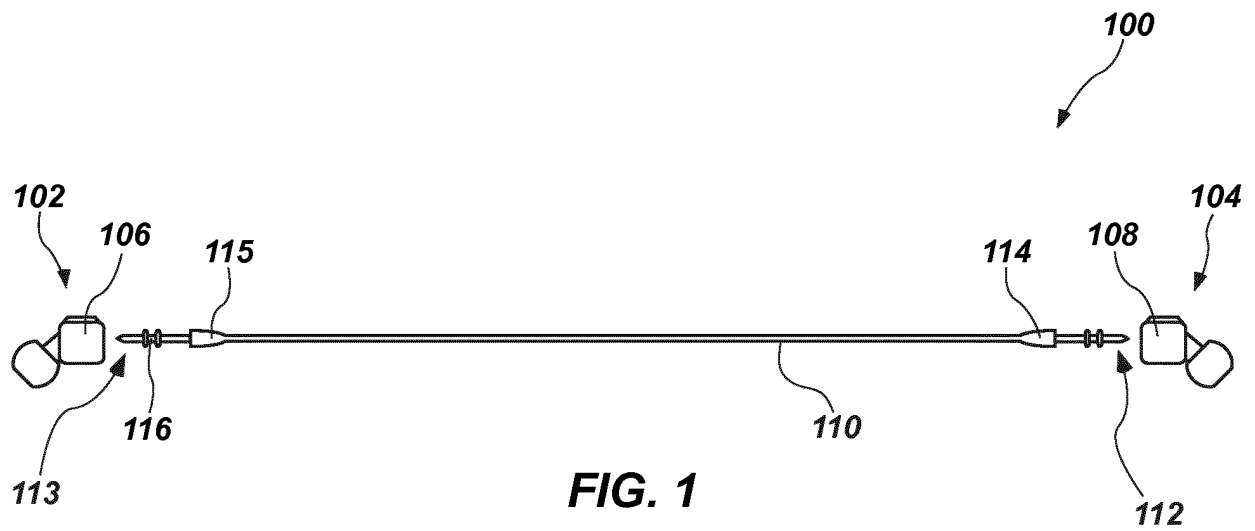

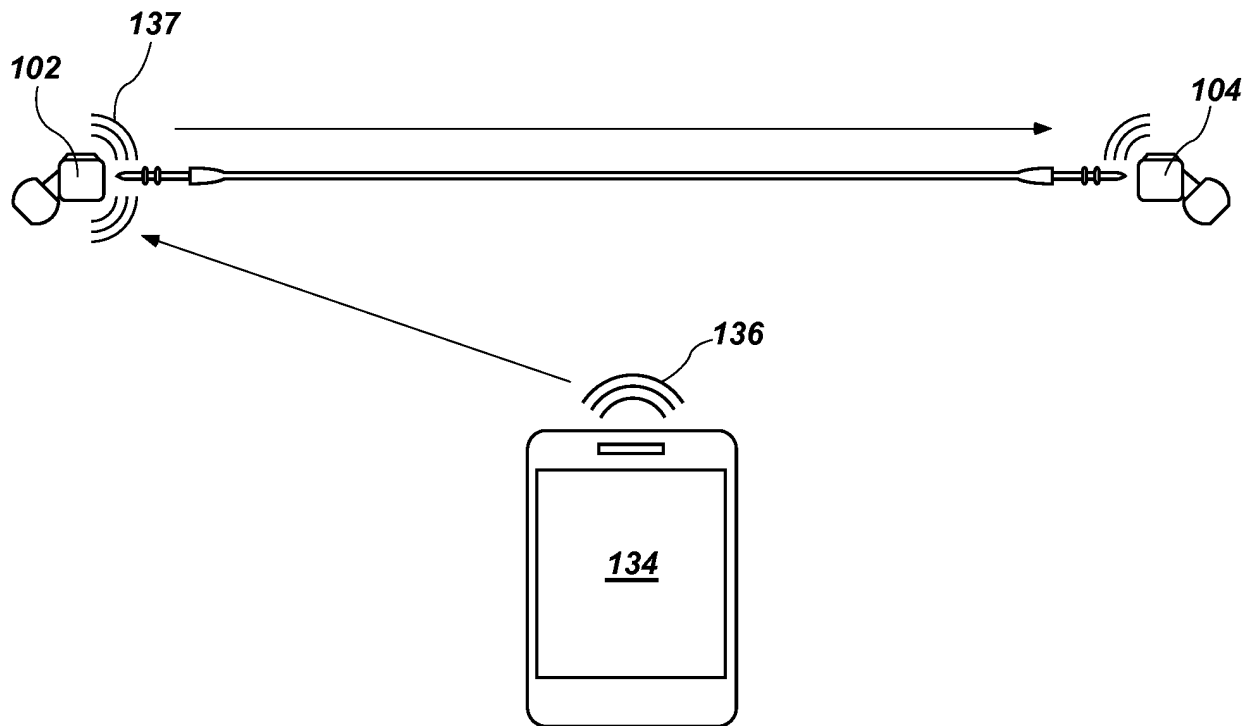


FIG. 3

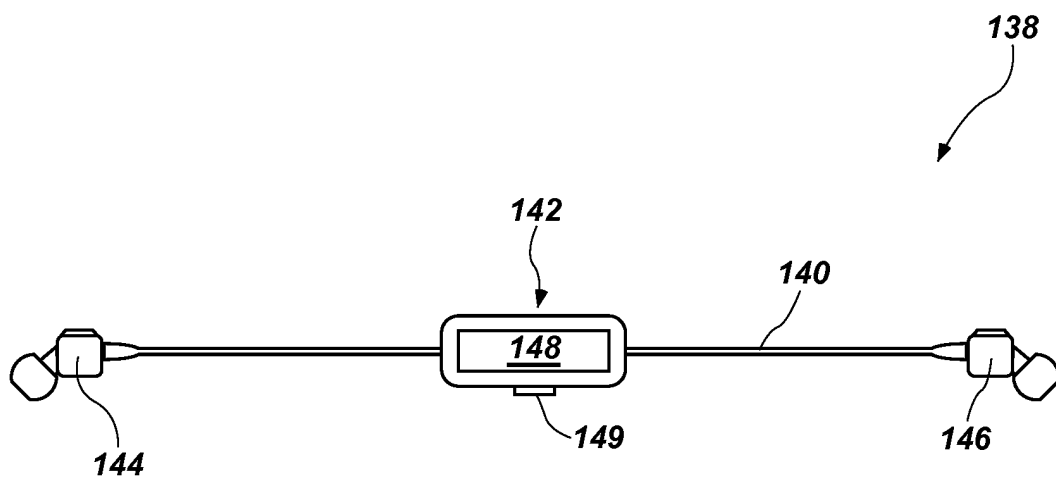


FIG. 4

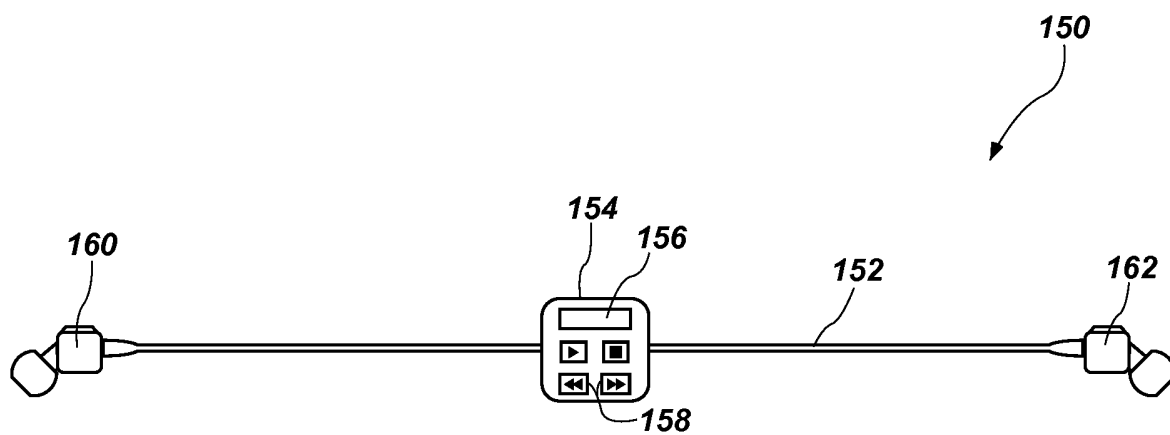


FIG. 5

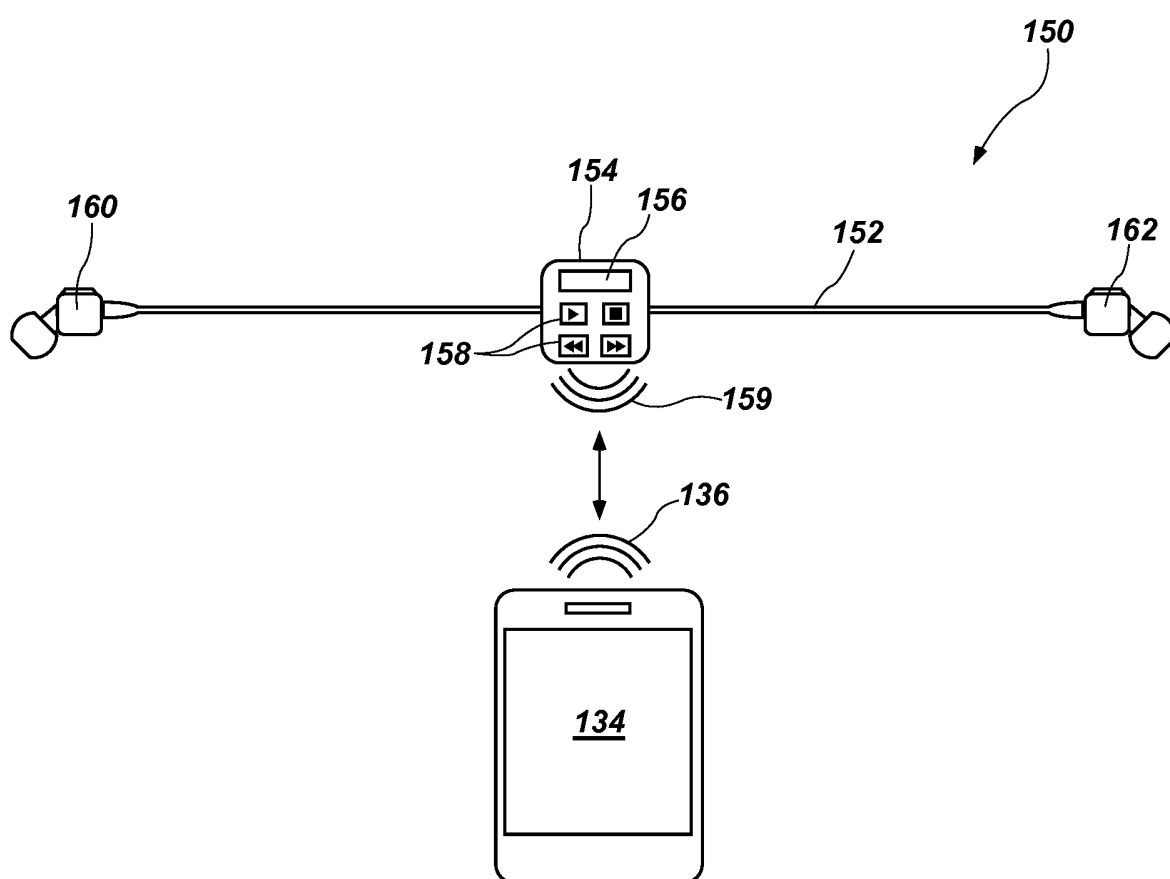


FIG. 6

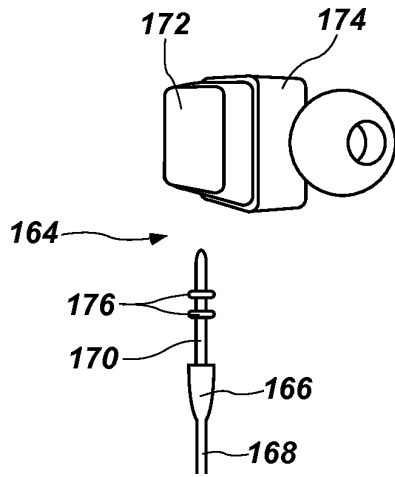


FIG. 7A

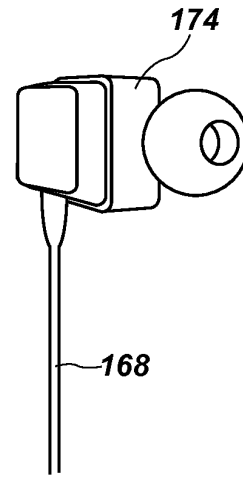


FIG. 7B

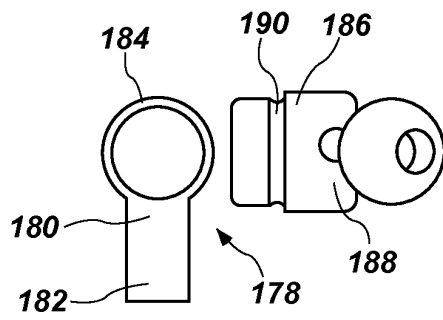


FIG. 8A




FIG. 8B

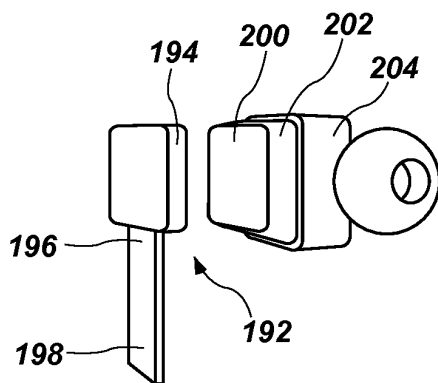


FIG. 9A




FIG. 9B

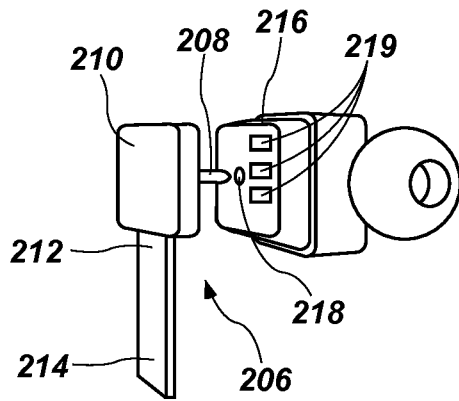


FIG. 10A

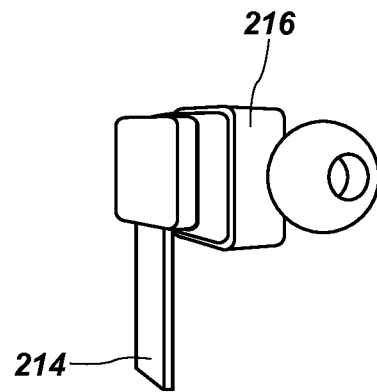


FIG. 10B

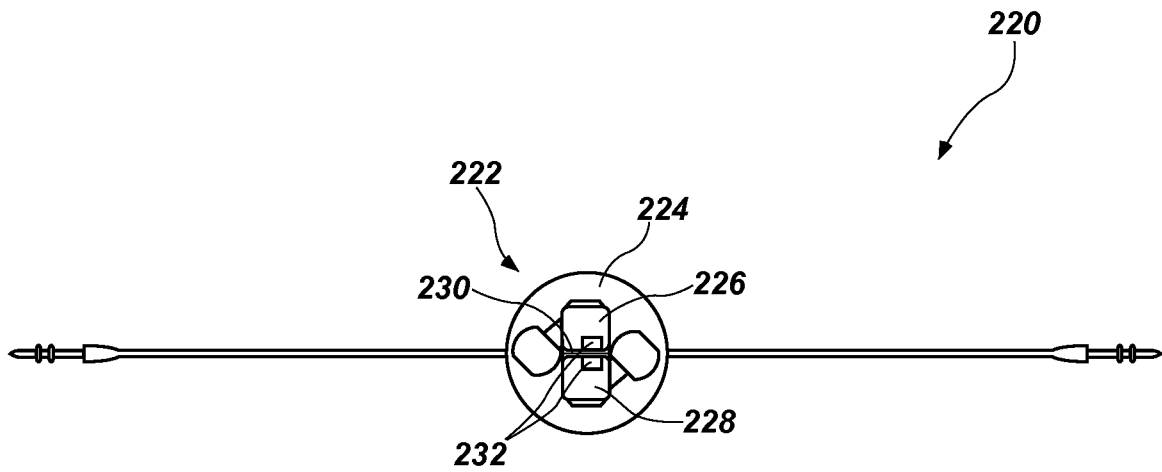


FIG. 11

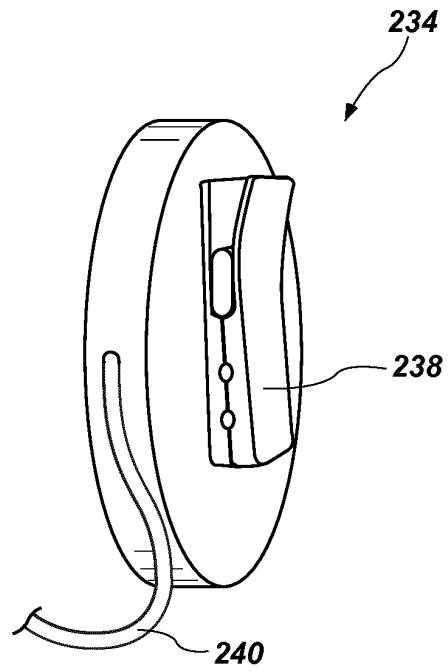


FIG. 12A

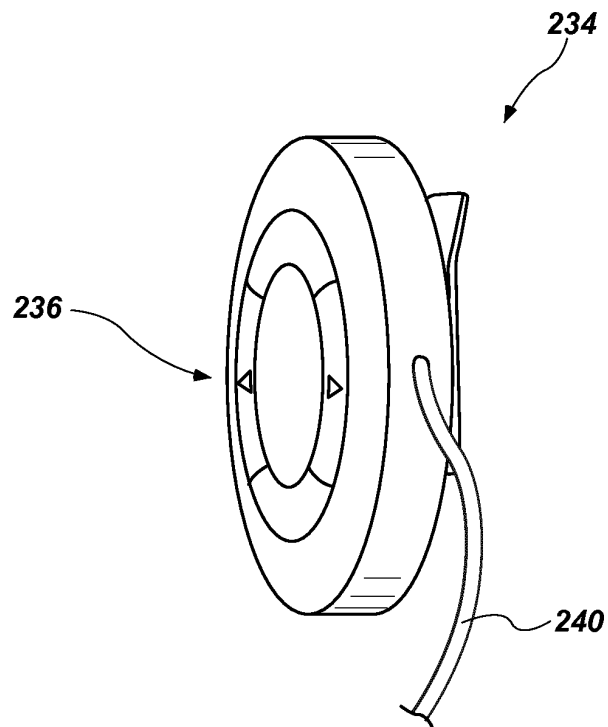


FIG. 12B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20150230019 A1 **[0005]**
- US 20050136839 A1 **[0006]**
- WO 2016032011 A1 **[0007]**
- EP 2506597 A1 **[0008]**
- WO 2012024656 A2 **[0009]**

专利名称(译)	无线耳塞及相关方法		
公开(公告)号	EP3169081B1	公开(公告)日	2019-07-10
申请号	EP2016197949	申请日	2016-11-09
[标]申请(专利权)人(译)	骷髅头有限公司		
申请(专利权)人(译)	SKULLCANDY INC.		
当前申请(专利权)人(译)	SKULLCANDY INC.		
[标]发明人	MILAM JAMES KELLY PETER M VOGT DAVID G JR PAGE STEVE JUNG RYAN		
发明人	MILAM, JAMES KELLY, PETER M. VOGT, DAVID G. JR. PAGE, STEVE JUNG, RYAN		
IPC分类号	H04R1/10 A61B5/00		
CPC分类号	H04R1/1041 A61B5/0015 A61B5/486 A61B5/6803 H04R1/1016 H04R1/1025 H04R1/1033 H04R1/1058 H04R2420/05 H04R2420/07		
优先权	62/253250 2015-11-10 US		
其他公开文献	EP3169081A2 EP3169081A3		
外部链接	Espacenet		

摘要(译)

无线耳塞系统包括第一耳塞组件和第二耳塞组件。第一耳塞组件和第二耳塞组件中的每一个包括壳体，设置在壳体内部的音频驱动器，以及可操作地耦合到音频驱动器的无线接收单元。无线接收单元被配置为接收无线数据信号并基于在无线数据信号中发送的音频数据来驱动音频驱动器。无线耳塞系统还可包括具有第一端和第二端的系绳。系绳的第一端构造成通过第一可拆卸连接器可拆卸地连接到第一耳塞组件，并且系绳的第二端配置成通过第二可拆卸连接器可拆卸地连接到第二耳塞组件。方法还涉及无线耳塞系统。

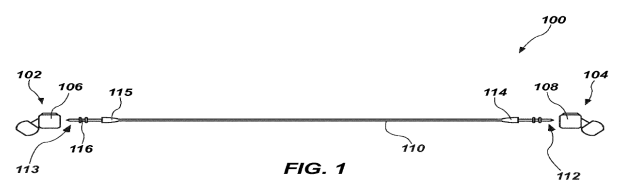


FIG. 1

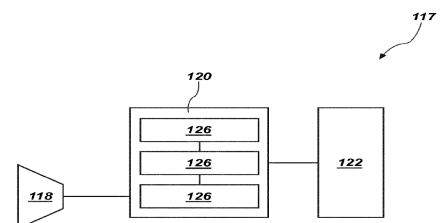


FIG. 2