

(19)



(11)

EP 1 527 422 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
22.05.2019 Bulletin 2019/21

(51) Int Cl.:
G06T 19/00^(2011.01) G06T 11/20^(2006.01)

(21) Application number: **03732929.9**

(86) International application number:
PCT/IB2003/002643

(22) Date of filing: **24.06.2003**

(87) International publication number:
WO 2004/003851 (08.01.2004 Gazette 2004/02)

(54) **IMAGE PROCESSING METHOD FOR DISPLAYING INFORMATION RELATING TO WALL MOTIONS OF A DEFORMABLE 3-D OBJECT**

BILDVERARBEITUNGSMETHODE ZUR DARSTELLUNG VON INFORMATIONEN VON WANDBEWEGUNGEN EINES DEFORMIERBAREN 3D OBJEKTS

PROCEDE DE TRAITEMENT D'IMAGES POUR AFFICHER DES INFORMATIONS RELATIVES AUX MOUVEMENTS DES PAROIS D'UN OBJET 3-D DEFORMABLE

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR

(30) Priority: **28.06.2002 EP 02291622**

(43) Date of publication of application:
04.05.2005 Bulletin 2005/18

(73) Proprietor: **Koninklijke Philips N.V. 5656 AE Eindhoven (NL)**

(72) Inventors:
 • **JACOB, Marie 75008 Paris (FR)**
 • **GERARD, Olivier 75008 Paris (FR)**
 • **COLLET-BILLON, Antoine 75008 Paris (FR)**

(74) Representative: **Roche, Denis et al Société Civile SPID 33, rue de Verdun 92150 Suresnes (FR)**

(56) References cited:
US-A- 6 053 869 US-A1- 2003 006 984

- **GRAF G ET AL: "RECONSTRUCTION OF FOURIER COEFFICIENTS: A FAST METHOD TO GET POLAR AMPLITUDE AND PHASE IMAGES OF GATED SPECT" JOURNAL OF NUCLEAR MEDICINE, SOCIETY OF NUCLEAR MEDICINE. NEW YORK, US, vol. 31, no. 11, 1 November 1990 (1990-11-01), pages 1856-1861, XP000160881 ISSN: 0161-5505**
- **O. GÉRARD ET AL.: "Automatic Analysis of the Left Ventricle in the Time Sequences of 3D Echo-Cardiographic Images" PROCEEDINGS OF MEDICAL IMAGE COMPUTING AND COMPUTER-ASSISTED INTERVENTION (MICCAI'01), LNCS 2208, SPRINGER-VERLAG, HEIDELBERG, 2001, pages 1224-1225, XP008028130**
- **BARTLETT M L ET AL: "SPECT gated blood pool imaging-potentials and problems" COMPUTERS IN CARDIOLOGY 1994 BETHESDA, MD, USA 25-28 SEPT. 1994, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 25 September 1994 (1994-09-25), pages 197-200, XP010147907 ISBN: 0-8186-6570-X**
- **ANDREW M L ET AL: "A decision support system for gated blood pool studies" IEE COLLOQUIUM ON 'AI IN MEDICAL DECISION MAKING' (DIGEST NO.062), LONDON, UK, 10 APRIL 1990, pages 3/1-3, XP001187551 1990, London, UK, IEE, UK**

EP 1 527 422 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

- CERQUEIRA M D ET AL: "STANDARDIZED MYOCARDIAL SEGMENTATION AND NOMENCLATURE FOR TOMOGRAPHIC IMAGING OF THE HEART A STATEMENT OF HEALTHCARE PROFESSIONALS FROM THE CARDIAC IMAGING COMMITTEE OF THE COUNCIL ON CLINICAL CARDIOLOGY OF THE AMERICAN HEART ASSOCIATION" CIRCULATION, AMERICAN HEART ASSOCIATION, DALLAS, TX, US, vol. 105, no. 4, 29 January 2002 (2002-01-29), pages 539-542, XP001164153 ISSN: 0009-7322 cited in the application

Description

[0001] The invention relates to an image processing system for displaying information relating to parietal motions of a deformable 3-D object under study. In particular, the invention relates to an image processing system for displaying information relating to body organ wall motions, for example the heart, that occur during an image sequence, together with indications of the instant of the sequence at which said motions occur. The invention particularly finds applications in the field of medical examination apparatus, for processing and displaying processed medical images using processing systems connected to viewing systems.

[0002] In order to optimize and facilitate communication between cardiac imaging modalities for research and clinical application, the American Heart Association (AHA) makes consensus recommendations for the following: orientation of the heart, names of the cardiac planes, number of myocardial segments, selection and thickness of cardiac slices for display and analysis, nomenclature and location of segments, and assignment of segments to coronary arterial territories. These recommendations are applicable for imaging heart wall motion as exposed in the publication entitled "Standardized Myocardial Segmentation and Nomenclature for Tomographic Imaging of the heart" by the American Heart Writing Group on Myocardial Segmentation and Registration for Cardiac Imaging: Manuel D. Cerqueira, et alii, Standardized Myocardial Segmentation and Nomenclature for Tomographic Imaging of the Heart, *Circulation* 2002; 105:539-542, whose circulation is available at "<http://www.circulationaha.org>". According to these recommendations, the heart imaging modalities should define, orient and display the heart using the long axis of the left ventricle and selected planes oriented at 90° angles relative to the long axis. The names of the 90°-oriented cardiac planes used in all modalities should be short axis, vertical long axis and horizontal long axis. The heart should be divided into 17 segments for assessment of the myocardium and the left ventricle. The heart should further be divided into equal thirds perpendicular to the long axis. In the publication in reference, the heart is represented in FIG.4 using a bull's eye technique. Using this technique, the 17 predefined segments are projected along the long vertical axis, in a circle. The apex forms a small central circle numbered 17, the other segments are represented on three concentric zones, which are divided into sectors, each being attributed a number corresponding to one segment of the heart. According to the AHA recommendations, the names of the myocardial segments should define the location relative to the long axis of the heart and the circumferential location.

[0003] Graf G. et al.: "Reconstruction of Fourier coefficients: a fast method to get polar amplitude and phase images of gated SPECT", *J. of Nuclear Medicine, Society of Nuclear Medicine, New York, US, vol. 31, no. 11, 1990*, pp. 1856-1861 discloses a method of Gated SPECT dur-

ing radionuclide ventriculography, involving calculating bull's-eye plots of the amplitude and phase of the left ventricle using short-axis slices. Marked left ventricular regions of interest (ROIs) are divided into 64 sectors. The maximum amplitudes in all sectors together with their according phases are extracted and stored in a rectangular buffer's row corresponding to the slice number. The rectangular buffers for amplitude and phase build the interface to the construction algorithm for the polar bull's-eye display or the hemispheric display of left ventricular amplitudes and phases.

[0004] O. Gérard et al.: "Automatic analysis of the left ventricle in the time sequences of 3D echo-cardiographic images", *Proc. of Medical image computing and computer-assisted intervention (MICCAI'01), LNCS 2208, Springer-Verlag, Heidelberg, 2001*, pp. 1224-1225 discloses automatic analysis of the left ventricle in the time sequences of 3D echo-cardiographic images. Local wall motion of the heart is quantified. Wall motion magnitude of systolic phase are coded with gray levels.

[0005] It is an object of the present invention to propose an image processing system for processing an image sequence of a deformable object of interest and for displaying information relating to the amplitude values of motions of predefined regions of said object in a coded manner, together with an indication of the instant of the image sequence at which a given amplitude value is reached in a given predefined region.

[0006] According to the invention, this system has processing means to perform the following operations. The motions of the walls of the 3-D object of interest are registered in a sequence of 3-D images, wherein each 3-D image corresponds to a given instant. An analysis of the motions of predetermined regions during the sequence permits of calculating the amplitudes of motions of the regions for each image of the sequence. The different regions may be color-coded in function of their amplitude of motion so that, while looking at the unrolling of the sequence, the physician may see the evolution of the amplitudes of motions of the regions in function of time. However, a problem is that such a presentation of the results of this analysis is difficult to understand and to use by the physician, because the variations of the amplitudes of motions of the regions are too numerous and too rapid during the unrolling of the sequence.

[0007] Hence, it is an object of the invention to propose a system wherein these results are further processed and presented in only one displayed image, wherein the organ is shown in a schematic representation of specific values of the amplitudes of motion of the regions: for example the maximal values or the minimal values. According to the invention, this system has means to propose another similar schematic representation shown in the same displayed image, in order to allow the detection of the instant at which said specific value of amplitude is reached in a given region. Preferably both schematic representations are color-coded. The construction of such a display image permits of transforming the study of the

complex and numerous results of the object motion analysis into precise, compact and complete representations, easy to interpret and to use by the physician.

[0008] To this end, the invention proposes an image processing system as claimed in claim 1. It is a particular object of the invention to apply this system to cardiac ventricle wall motion display and especially to the left ventricle wall motion display. In this case, the walls of the heart are divided into segments, which are disposed and numbered as recommended by the AHA in a bull's eye representation. So, it is also an object of the present invention to propose an image processing system for displaying, in an image, a first 2-D schematic representation of predefined regions of the heart, each region showing an indication of the maximum amplitude values of dilation or contraction in a coded manner, together with a second similar 2-D schematic representation of the same predefined regions of the heart showing an indication of the instant at which said maximum amplitude value is reached in a given region in a coded manner. It is a particular object of the invention to provide this information in bull's eye representations such as the one recommended by the AHA. The segment motions are attributed a color according to a code of colors in order to permit of quantifying each segment displacement. This provides, in only one image, the values of amplitude of motion of each segment given in the first schematic representation, preferably a bull's eye representation. However, there still remains the problem that one such bull's eye representation only indicates given amplitude of motion for each segment without indication of the instant when said amplitude of motion is reached. Thus, according to the invention, the second similar schematic representation, preferably a second similar bull's eye, in relation with the first bull's eye representation, indicates in a color coded form, at which instant of the sequence said amplitude of motion is reached in a given segment.

[0009] The invention also relates to an ultrasound medical examination apparatus having such a system with image processing means, to a method having steps for operating the system and to a program product having instructions for carrying out the method.

[0010] The invention is described hereafter in detail in reference to the following diagrammatic drawings, wherein:

FIG.1A represents a spherical deformable Mesh Model for segmenting the walls of the heart left ventricle using the Simplex Mesh technique; FIG.1B represents an ultrasound image of the heart left ventricle, with a trace of the spherical deformable Mesh Model positioned in the left ventricle cavity; FIG.1C represents the associated ECG; and FIG.1D represents the segmented left ventricle;

FIG.2 illustrates the determination of the distance variation of a given part of the object wall between two instants;

FIG.3 is a chart representing on the left a corre-

spondence setting between wall regions of a segmented left ventricle and wall regions of three schematic cross-sections of the left ventricle; and representing on the right a correspondence setting between said regions of the three cross-sections and regions of three rings of a bull's eye representation; FIG.4A is an image of a segmented left ventricle (represented in different shades of black and white in place of colors), at an instant of a color-coded image sequence; FIG.4B is a double bull's eye representation of the heart left ventricle that is displayed according to the invention; and FIG.4C is an ECG with a marker indicating the instant of FIG.4A;

FIG.5 shows a diagram of an examination apparatus with an image processing system.

[0011] The quantitative estimation of regional cardiac deformation has important clinical implications for the assessment of the function of the cardiac muscle and the assessment of the viability of cardiac muscle cells. This deformation is a complex spatio-temporal phenomenon. Contraction/relaxation phases are complicated by a twist effect, and all the regions of the muscle do not necessarily contract or relax at the same time. Hence, a good spatial resolution is required when studying the contraction or the relaxation. Moreover, not only the amplitude of the contraction should be studied, but also the phase, which indicates locally the time when contraction/relaxation happens, and the way it is propagating. Several cardiopathologies are due to arrhythmias or have for consequence to disturb the heart kinetics, such as myocardial infarction, ischaemia, tachycardia and atrial or ventricular fibrillation. Nuclear imaging provides information of the cardiac contraction/relaxation. This technique shows several problems: the spatial and temporal resolutions are very poor, and the technique is carried out by an irradiating exam. Moreover, the analysis relies on the hypothesis that the cardiac contraction/relaxation is a periodic sinusoidal-like motion. Another technique using ultrasound imaging is much more precise than nuclear imaging and is not irradiating. A method called "Color Kinesis" is available, but it is limited to 2D images.

[0012] Now, 3D ultrasound systems allow the acquisition of 3D cardiac time sequences, which can be used in cardiology, in order to analyze the contraction and the relaxation of the myocardium. The heart wall motion has to be computed first, for instance by extracting the contour of the endocardium in each image of a sequence recorded during the cardiac cycle. Then, the distance between two successive contours, or the distance relative to a reference contour has to be estimated. The resulting measures may be color-coded and displayed as colored regions of the extracted heart wall in a sequence of images over a cardiac cycle. Now, the colors of each region change continuously in the sequence over the period of time, so that the physician has some difficulty to follow up the measures. Hence, the problem consists in transforming the complex and various results of this anal-

ysis into a precise, compact and complete representation, useful for the physician.

[0013] Hereafter, the object under study is the heart left ventricle and the object of interest is the internal boundary of the left ventricle wall. According to the invention, a new way of representing the deformation of the heart muscle during a cardiac cycle is proposed, the information being derived from 3D-ultrasound imaging. The acquisition system can be reconstructed 3D echocardiography system or real-time 3D echocardiography system. The problem of computation and analysis of the amplitude of the cardiac wall motion is first solved: the amplitude can be computed from a sequence of 3D simplified models of the left ventricular volume, obtained from the segmentation of 3D ultrasound images of the heart.

[0014] Then, the bull's eye technique, which is described in the AHA publication in reference, is used for displaying the results. The bull's eye is a simplified representation of a planar projection of the left ventricle, with defined regions that correspond to precise left ventricular wall regions, called segments. Hence, the classical bull's eye is only a representation of the locations of the different regions of the heart wall. An indication of a value (or a color) corresponding to the information measured for a given wall region is associated to a corresponding given region of the bull's eye.

[0015] According to the invention, a first bull's eye representation gives the information of the amplitude of the maximal (or minimal) displacement of each region during the cardiac cycle. The values of maximal (or minimal) amplitude of motion are preferably color-coded. This first bull's eye representation does not allow to distinguishing two regions having the same maximal amplitude of motion, but at different times, which may occur in the cases of post-systolic shortening or asynchronism in the cardiac insufficiency. That is why, according to the invention, two bull's eye representations are preferably displayed simultaneously in a same image of a display system: the first one represents the information of maximal (or minimal) amplitude of displacement of the heart wall regions and the second one shows the information of the instant of time, in the cardiac cycle, when this maximal (or minimal) displacement occurs in said heart wall regions. The values of the instants of time are preferably color-coded.

[0016] The system of the invention can process and display sequences of 3-D images of other parts of the heart or other organs, which can be formed by ultrasound systems or by other systems known of those skilled in the art. Generally this system can process and display sequences of 3D images of any object under study having wall motions. The wall of the object under study is called object of interest. The wall has one or several regions submitted to motions. In these cases, when the object under study is other than the heart, the regions of the wall are first segmented or extracted, and their maximal or minimal amplitudes of motion are determined. Then, two 2D schematic representations of the object wall are

constructed and the corresponding regions of the segmented wall are reported on the two 2D schematic representations, which are further displayed in one image comprising a first schematic 2D representation of said wall region(s), each region bearing the information of its maximal or minimal amplitude of displacement, over a time period; and a second similar schematic 2D representation of said region(s) bearing the information of the instant of the time period, when this maximal or minimal displacement occurs. The 2D representations can have the shape of the bull's eyes used for the heart wall representation. Only the number of rings and of their regions may differ. The information may be color-coded in both representations.

[0017] In the following example, the object of interest is the internal boundary of the left ventricle wall. The present image processing system has processing means and display means for performing operations comprising:

1) Acquisition of a sequence of 3-D images of the object under study.

[0018] In the present example, a sequence of 3-D images of the heart left ventricle is acquired over a cardiac cycle, using an ultrasound examination apparatus. FIG. 1B represents one image of such a sequence.

2) Segmentation of the 3-D images of the sequence.

[0019] The image data of the sequence are further processed to determine the wall of the heart left ventricle by a segmentation technique. Any technique of segmentation, which is able to segment the 3-D images of the sequence, may be used. The result of the segmentation operation permits of locating the voxels of wall of the heart left ventricle.

[0020] Referring to FIG. 1A, preferably, the segmentation technique of "Simplex Mesh" is used because it is robust and gives excellent results. This Simplex Mesh Technique is described in a publication by H. Delingette entitled "Simplex Meshes: a General Representation for 3D shape Reconstruction" in the "processing of the International Conference on Computer Vision and Pattern Recognition (CVPR'94), 20-24 June 1994, Seattle, USA". In this paper, a physically based approach for recovering three-dimensional objects is presented. This approach is based on the geometry of "Simplex Meshes". Elastic behavior of the meshes is modeled by local stabilizing functions controlling the mean curvature through the simplex angle extracted at each vertex (node of the mesh). Those functions are viewpoint-invariant, intrinsic and scale-sensitive. The contour on a Simplex Mesh is defined as a closed polygonal chain consisting in neighboring vertices on the Simplex Mesh. The contour is restricted to not intersect itself. The cited publication provides a simple model for representing a given 3-D object. It defines the forces to be applied in order to reshape and adjust the model onto the 3-D object of interest.

[0021] The spherical Mesh Model illustrated by FIG. 1A is used as a "Simplex Mesh Model" to segment the internal boundary of the left ventricle wall shown in FIG. 1B. The ring represents the positioning of the spherical Mesh Model of FIG.1A in the cavity of the left ventricle. The segmentation step consists in mapping the Simplex Mesh Model onto said wall internal boundary of the left ventricle by reshaping the spherical Mesh Model. This operation gives the segmented internal wall of the left ventricle as the wall of a simplified mesh volume. This wall of the simplified volume has faces and edges, as shown in FIG.1D relating to an instant of the sequence corresponding to the marker of the ECG curve of FIG. 1C. This segmentation operation is performed for each image of the sequence of images of the heart left ventricle, for example over a time period of a cardiac pulse, so that a sequence of segmented 3-D simplified mesh volumes whose walls represent the internal wall boundary of the left ventricle is formed. The internal wall boundary is further called "wall" for simplicity.

3) Estimation of the displacement of the wall between two images of the sequence.

[0022] Now, an image of the sequence of the 3D segmented wall of the heart left ventricle is chosen as reference. The other 3D images of the sequence, where the segmented wall of the left ventricle varies in shape and dimension over a cardiac cycle are further considered one by one.

[0023] Referring to FIG.2, the segmented wall of the image of reference is denoted by **RO**, and called Object of Reference. The second image in time of the segmented sequence is compared with respect to this first segmented image. The image of reference is processed in order to transform the 3-D segmented Object of Reference into a binary 3-D Object of Reference. It is however still denoted by **RO** for simplicity. For instance, the voxels inside the 3-D Object of Reference are attributed the value 1, the voxels outside the 3-D object of reference are attributed the value 0. The boundary of the 3-D object is located between the 0 and 1 regions and represents the location of the segmented wall. Other possibility for attributing a boundary to a binary object may be used as known of those skilled in the art. The 3-D object of reference **RO** in the first image of the segmented sequence is now a binary 3-D object of reference. The wall of the heart left ventricle is a 3D simplified volume denoted by **SO** in the second image of the segmented sequence. When the wall has been segmented using the Simplex Mesh model, the simplified volume has faces denoted by **Z**. The center of gravity, denoted by **ZC**, is considered in one face **Z**. The center of gravity **C1** of the binary 3-D Object of Reference **RO** of the first image and the center of gravity **C2** of the 3-D simplified volume **SO** of the second image are also considered.

[0024] Referring to FIG.2, in an example, the centers of gravity of the 3-D Object of Reference **RO** and of the

simplified volume **SO** may be found to be located in coincidence or not in said two images. If they are not located in coincidence, an operation of translation may be performed to superimpose those points **C1**, **C2**. The displacement of the wall at the location of the voxel of the center **ZC** of the face can be defined as the distance denoted by **D** between the boundary of the binary 3-D Object of Reference **RO** of the first image and the center **ZC** of the face of the 3-D simplified volume of the second image measured along a line joining the center **ZC** of the face to the common center of gravity **C1**, **C2** of the first and second 3-D objects **RO**, **SO**.

[0025] Other numerous different definitions of said distance **D** are possible. When the image sequence of 3-D objects under study is not segmented using the Simplex Mesh technique, however, the segmentation operation gives a sequence of simplified volumes. Zones **Z** can be delimited on the segmented second 3-D simplified volume **SO** and the same methods as above-described can be applied to one zone instead of on one face. In another possible method of segmentation, only the voxels of the segmented object under study are located for supplying a sequence of simplified volumes. In that last case, a first binary Object is computed from the first simplified volume and the distance **D** is defined between the boundaries of the binary Object and the second simplified volume. Then, the operations are repeated between the first binary 3-D Object **RO** and the second 3-D simplified volume **SO** for all the faces or all the zones or for boundary voxels or for voxels of wall parts as above-described in order to determine the amplitude **D** of the displacement between segmented images. The operations are also performed between the other images of the sequence in order to determine the amplitude of displacements of the wall faces or zones between the images of the segmented sequence. The results permit of constructing a sequence of the simplified volumes, with faces or zones showing a color-coded indication of the amplitude of displacement at each instant. Hereafter this sequence is called 3D sequence of the simplified volumes with indication of the amplitudes of displacement of wall zones or simply "3D sequence of amplitudes of displacement".

5) Definition of Regions of Interest of the wall.

[0026] According to the invention it is proposed to construct a 2D simplified representation giving the information of the amplitudes of the maximal (or minimal) displacements of regions of the wall during the cardiac cycle, instead of or associated to the above-described 3D sequence of amplitudes of displacement.

[0027] First, Regions of Interest are defined on the wall of the segmented left ventricle, denoted by **SLV**, for instance as described in relation to FIG.4 of the AHA publication or according to the desire of the medical practitioner. The AHA publication defines a vertical axis for the left ventricle and three superposed rings, each having several Regions of Interest for the medical practitioner.

The cited Regions of Interest are seventeen.

6) Constructing an amplitude bull's eye representation of the Regions of Interest.

[0028] FIG.3 is a chart that represents on the left a correspondence setting between the three rings of Regions of Interest of the wall of the segmented left ventricle SLV and three schematic cross-sections of the left ventricle where said Regions of Interest are reported. These cross-sections are shaped like rings. The upper ring is denoted by BASE and comprises segments 1 to 6 corresponding to the upper Regions of Interest of the segmented left ventricle SLV. The upper ring also comprises two points 24 of insertion of the right ventricle RV to the left ventricle LV, and a valve point 26. The middle ring is denoted by MID and comprises segments 7 to 12 corresponding to the middle regions of the segmented left ventricle SLV. The middle ring also comprises two valve points 25. The lower ring is denoted by APEX and comprises segments 13 to 16 corresponding to the lower regions of the segmented left ventricle SLV. The lower ring also comprises a point 17 for the apex. The chart of FIG. 3 also represents on the right a correspondence setting between said segments of the three rings and segments of three rings of a bull's eye representation. This bull's eye representation 20.A, which is a 2D representation of the locations of the different regions of the wall, is constructed as described in the AHA publication in reference. The three valve points are used to estimate the location of the BASE plane. The apex point is used to estimate the distance to the BASE, and thus to estimate the location of the MID plane. The insertion points are used to define the start of segment 1 of the BASE and segment 7 of MID.

[0029] The system of the invention has processing and display means that use this bull's eye representation 20.A for displaying the information of the amplitudes of the maximal (or minimal) displacements of the previously defined Regions of Interest of the wall during the cardiac cycle. The information of the amplitudes of the maximal (or minimal) displacements of said Regions of Interest is computed from the data of the "3D sequence of amplitudes of displacement". This operation can include the computation of the amplitudes of the maximal (or minimal) displacements for each face or zone of the simplified volume, and then the averaging of found amplitude values for determining the amplitudes of the maximal (or minimal) displacements for each Region of Interest. The indications of said amplitude values corresponding to the information computed for Regions of Interest are associated to corresponding segments 1A to 16A of the bull's eye representation 20.A. The segments of this bull's eye representation 20.A give the information of the amplitudes of maximal (or minimal) displacements of the Regions of Interest during the cardiac cycle. The values of maximal amplitude of motion are preferably color-coded.

7) Constructing a phase bull's eye representation of the Regions of Interest.

[0030] However, this first bull's eye representation 20.A does not allow to distinguishing two regions having the same maximal (or minimal) amplitude of motion, but at different times, which may occur in the cases of post-systolic shortening or asynchronism in the cardiac insufficiency. That is the reason why, the system of the invention preferably has means to display two bull's eye representations 20.A and 20.B simultaneously in a same image, as illustrated by FIG.4B. This image comprises:

the first bull's eye representation 20.A, which displays the information of maximal (or minimal) amplitudes of displacement of the wall Regions of Interest 1 to 17.; the values of the amplitudes are preferably color-coded. This first bull's eye is called amplitude bull's eye representation.

and a second bull's eye representation 20.B, which displays the information of the instant of time, in the cardiac cycle, when a given maximal (or minimal) displacement occurs in a wall Regions of Interest; the segments are numbered 1B to 16B and correspond exactly to the segments 1A to 16A of the bull's eye representation 20.A; the values of the instants of time are preferably color-coded. This second bull's eye is called phase bull's eye representation.

8) Displaying the bull's eye representations.

[0031] Referring to FIG.4A, 4B and 4C, the system of the invention has means for displaying the amplitude bull's eye 20.A in an image in order to provide the amplitudes of maximal (or minimal) displacement of the Regions of Interest. Preferably the phase bull's eye 20.B is displayed in the same image to give the instant of time, in the cardiac cycle, when a given maximal (or minimal) displacement occurs in a Region of Interest.

[0032] It may be also interesting for the practitioner to dispose of the "3D sequence of amplitudes of displacement". Such a sequence is represented on FIG.4A together with the ECG curve of FIG.4C for giving the instant of the sequence. This sequence is an animated simplified Mesh Volume whose faces display the information of their displacements. (FIG.4A represent the color-coded simplified Mesh Volume in shades of coded gray scale). The system of the invention may have processing means and display means to display all these representations in the same image.

[0033] The system of the invention may have processing means to construct an animated bull's eye representation. For this representation, the displacement amplitude values corresponding to the faces or zones of the "3D sequence of amplitudes of displacement" are averaged for determining the means displacement amplitude values to attribute to the segments of the bull's eye. The amplitudes are preferably color-coded. The indications

of amplitudes of displacement, or the color coded amplitudes, of the region(s) of interest of the 3D segmented object wall are displayed in the respective projection(s) of the region(s) of interest, called segments, in one constructed 2D simplified representation, preferably one bull's eye representation. The indications (colors) corresponding to the amplitudes of displacement change in the segments at the rate of the images of the sequence, so that the 2D simplified representation is animated in function of time. Then this animated bull's eye representation is displayed together with an ECG curve. This bull's eye is called "animated bull's eye of amplitudes of displacement". This animated bull's eye may be displayed with other representations according to the choice of the practitioner.

[0034] The system of the invention has means to display the color-coded representations on a screen. This system can have further means for these representations to be stored, recorded or memorized. This permits a doctor of estimating the presence or absence of pathology related to the organ whose walls have moved or changed shape along a period of time during which the representation(s) has (have) been acquired. Preferably a color-coded scale is associated to the time bull's eye and is displayed together with a color-coded scale associated to the amplitude bull's eye.

[0035] Referring to FIG.5, a medical examination apparatus 150 comprises means for acquiring a digital image sequence, and is associated to a digital processing system 120 for processing these data as above-described. The medical examination apparatus comprises means for providing image data to the processing system 120, which has at least one output 106 to provide image data to display and/or storage means 130, 140. The display and storage means may respectively be the screen 140 and the memory 130 of a workstation 110. Said storage means may be alternately external storage means. This image processing system 120 may be a suitably programmed computer of the workstation 110, or a special purpose processor having circuit means such as LUTs, Memories, Filters, Logic Operators, that are arranged to perform the functions of the method steps according to the invention. The workstation 110 may also comprise a keyboard 131 and a mouse 132.

[0036] This medical examination apparatus 150 may be a standard ultrasonic apparatus.

[0037] The processing system 120 may use a computer program product having program instructions to be executed by the computing means of said processing system in order to carry out the above-described processing steps or method steps.

Claims

1. An image processing system for constructing and displaying information relating to an amplitude of displacement of wall regions of a deformable 3D object

under study, said image processing system comprising

- processing means (120) for segmenting 3D object data in a sequence of 3D ultrasound images for locating a 3D object wall (SLV), defining a region of interest on the 3D object wall, processing the image data of the 3D object wall to determine an amplitude of displacement of said region of interest as a function of time, constructing a first 2D simplified representation (20.A) of the 3D object wall by projection of the 3D object wall (SLV), said first 2D simplified representation (20.A) comprising a projection (1A) of the region of interest, and constructing a second 2D simplified representation (20.B) of the 3D object wall, similar to the first 2D simplified representation of the 3D object wall, and with a similar projection of the region of interest; and
- display means for displaying an indication of the maximal or minimal amplitude of displacement of the region of interest of the 3D object wall over a period of time in the projection (1A) of said region of interest in said first 2D simplified representation (20.A), displaying an indication of the instant of time, at which the maximum or minimum of amplitude of displacement occurs in the region of interest over said period of time, in said second 2D simplified representation (20.B), and displaying said first 2D simplified representation (20.A) and said second 2D simplified representation (20.B) together in the same image.

2. The image processing system of Claim 1, wherein the processing means (120) is further arranged for:

- determining the amplitude of displacement of the 3D object wall at the location of different zones or faces, wherein multiple zones or faces form the region of interest; and
- averaging, at various instants of time over the period of time, the amplitudes of displacement determined for the multiple zones or faces forming the region of interest for determining the amplitude of the maximal or minimal displacement for the region of interest within the period of time.

3. The image processing system of one of Claims 1 to 2, comprising means to display the values of amplitude and of time in the respective first 2D simplified representation and the second 2D simplified representation indicated in a color-coded manner.

4. The system of Claim 1, comprising means to display

indications of amplitudes of displacement of the region of interest of the 3D object wall in the respective projection of the region of interest in said first 2D simplified representation, in a color-coded manner, the indications of the amplitudes of displacement

5. The image processing system of one of Claims 1 to 4, comprising means to display the 2D simplified representation of the 3D object wall as 2D bull's eye representation.

6. The image processing system of any one of the previous Claims, wherein the object under study is the heart left ventricle and the 3D object wall is the internal boundary of the left ventricle wall.

7. The image processing system of any one of the previous Claims, wherein the processing means for locating the 3D object wall comprises a segmentation means for operating a segmentation technique applied to the 3D object under study, which includes using a mesh model technique, and reshaping the mesh model for mapping said mesh model onto the wall of the 3D object under study, so as to provide a simplified volume with a wall, referred to hereinafter as object wall, that is the object of interest.

8. A system comprising a suitably programmed computer or a special purpose processor having circuit means, the system comprising an image processing system as claimed in any of Claims 1 to 7.

9. An image processing method of constructing and displaying information relating to an amplitude of displacement of wall regions of a deformable 3D object under study, comprising:

segmenting 3D object data in a sequence of 3D ultrasound images for locating a 3D object wall (SLV),
 defining a region of interest on the 3D object wall, processing the image data of the 3D object wall to determine an amplitude of displacement of said region of interest as a function of time,
 constructing a first 2D simplified representation (20.A) of the 3D object wall by projection of the 3D object wall (SLV), said first 2D simplified representation (20.A) comprising a projection (1A) of the region of interest,
 constructing a second 2D simplified representation (20.B) of the 3D object wall, similar to the first 2D simplified representation of the 3D object wall, and with a similar projection of the region of interest,
 displaying an indication of the maximal or mini-

mal amplitude of displacement of the region of interest of the 3D object wall over a period of time in the projection (1A) of said region of interest in said first 2D simplified representation (20.A),

displaying an indication of the instant of time, at which the maximum or minimum of amplitude of displacement occurs in the region of interest over said period of time, in said second 2D simplified representation (20.B), and
 displaying said first 2D simplified representation (20.A) and said second 2D simplified representation (20.B) together in the same image.

10. The method of claim 9, the method being configured for processing ultrasound image data and for displaying an ultrasound image of a deformable 3D organ, as deformable 3D object, with indications of the organ wall motions, the method further comprising steps of
 acquiring 3D ultrasound image data of an image sequence of the organ under study, and
 displaying an indication of the maximal or minimal amplitude of displacement of the region of interest of the 3D segmented organ wall over a period of time in the respective projection of the region of interest in said first 2D simplified representation in a color coded manner.

11. A computer program product comprising a set of instructions for carrying out a method as claimed in Claim 9.

35 Patentansprüche

1. Bildverarbeitungssystem zum Konstruieren und Anzeigen von Informationen in Bezug auf eine Wegamplitude von Wandregionen eines untersuchten verformbaren 3D-Objekts, wobei das genannte Bildverarbeitungssystem Folgendes umfasst:

- Verarbeitungsmittel (120) zum Segmentieren von 3D-Objektdaten in einer Sequenz von 3D-Ultraschallbildern zum Lokalisieren einer 3D-Objektwand (SLV),
 Definieren einer interessierenden Region auf der 3D-Objektwand, Verarbeiten der Bilddaten der 3D-Objektwand, um eine Wegamplitude der genannten interessierenden Region als eine Funktion der Zeit zu bestimmen,
 Konstruieren einer ersten vereinfachten 2D-Darstellung (20.A) der 3D-Objektwand durch Projektion der 3D-Objektwand (SLV), wobei die genannte erste vereinfachte 2D-Darstellung (20.A) eine Projektion (1A) der interessierenden Region umfasst, und
 Konstruieren einer zweiten vereinfachten 2D-

- Darstellung (20.B) der 3D-Objektwand ähnlich der ersten vereinfachten 2D-Darstellung der 3D-Objektwand, und mit einer ähnlichen Projektion der interessierenden Region; und
- Anzeigemittel zum
- Anzeigen einer Angabe der maximalen oder minimalen Wegamplitude der interessierenden Region der 3D-Objektwand über eine Zeitdauer in der Projektion (1A) der genannten interessierenden Region in der genannten ersten vereinfachten 2D-Darstellung (20.A),
Anzeigen einer Angabe eines Zeitpunkts, zu dem die maximale oder minimale Wegamplitude in der interessierenden Region über die genannte Zeitdauer auftritt, in der genannten zweiten vereinfachten 2D-Darstellung (20.B), und
Anzeigen der genannten ersten vereinfachten 2D-Darstellung (20.A) und der genannten zweiten vereinfachten 2D-Darstellung (20.B) zusammen in dem gleichen Bild.
2. Bildverarbeitungssystem nach Anspruch 1, wobei das Verarbeitungsmittel (120) ferner eingerichtet ist zum:
- Bestimmen der Wegamplitude der 3D-Objektwand an dem Ort von verschiedenen Zonen oder Seiten, wobei mehrere Zonen oder Seiten die interessierende Region bilden; und
Mitteln, zu verschiedenen Zeitpunkten über die Zeitdauer, der für die mehreren Zonen oder Seiten, welche die interessierende Region bilden, bestimmten Wegamplituden, um die maximale oder minimale Wegamplitude für die interessierende Region innerhalb der Zeitdauer zu bestimmen.
3. Bildverarbeitungssystem nach einem der Ansprüche 1 bis 2, umfassend Mittel zum Anzeigen der Werte von Amplitude und Zeit in der ersten vereinfachten 2D-Darstellung bzw. der zweiten vereinfachten 2D-Darstellung auf farbcodierte Weise.
4. System nach Anspruch 1, umfassend Mittel zum Anzeigen von Angaben von Wegamplituden der interessierenden Region der 3D-Objektwand in der jeweiligen Projektion der interessierenden Region in der genannten ersten vereinfachten 2D-Darstellung auf farbcodierte Weise, wobei sich die Angaben der Wegamplituden in dem Segment mit der Rate der Bilder der Sequenz ändern, um so eine animierte vereinfachte 2D-Darstellung als Funktion der Zeit zu bilden.
5. Bildverarbeitungssystem nach einem der Ansprüche 1 bis 4, umfassend Mittel zum Anzeigen der vereinfachten 2D-Darstellung der 3D-Objektwand als eine 2D-Zielscheibendarstellung.
6. Bildverarbeitungssystem nach einem der vorhergehenden Ansprüche, wobei das untersuchte Objekt die linke Herzkammer ist und die 3D-Objektwand die interne Grenze der linken Herzkammerwand ist.
7. Bildverarbeitungssystem nach einem der vorhergehenden Ansprüche, wobei das Verarbeitungsmittel zum Lokalisieren der 3D-Objektwand ein Segmentierungsmittel zum Ausführen einer auf das untersuchte 3D-Objekt angewendeten Segmentierungstechnik umfasst, welche das Verwenden einer Maschenmodelltechnik und das Neugestalten des Maschenmodells zum Abbilden des genannten Maschenmodells auf die Wand des untersuchten 3D-Objekts einschließt, um so ein vereinfachtes Volumen mit einer Wand, im Folgenden als Objektwand bezeichnet, bereitzustellen, das das interessierende Objekt ist.
8. System umfassend einen in geeigneter Weise programmierten Computer oder einen Spezialprozessor mit Schaltungsmitteln, wobei das System ein Bildverarbeitungssystem nach einem der Ansprüche 1 bis 7 umfasst.
9. Bildverarbeitungsverfahren zum Konstruieren und Anzeigen von Informationen in Bezug auf eine Wegamplitude von Wandregionen eines untersuchten verformbaren 3D-Objekts, umfassend:
- Segmentieren von 3D-Objektdateien in einer Sequenz von 3D-Ultraschallbildern zum Lokalisieren einer 3D-Objektwand (SLV),
Definieren einer interessierenden Region auf der 3D-Objektwand,
Verarbeiten der Bilddaten der 3D-Objektwand, um eine Wegamplitude der genannten interessierenden Region als eine Funktion der Zeit zu bestimmen,
Konstruieren einer ersten vereinfachten 2D-Darstellung (20.A) der 3D-Objektwand durch Projektion der 3D-Objektwand (SLV), wobei die genannte erste vereinfachte 2D-Darstellung (20.A) eine Projektion (1A) der interessierenden Region umfasst,
Konstruieren einer zweiten vereinfachten 2D-Darstellung (20.B) der 3D-Objektwand ähnlich der ersten vereinfachten 2D-Darstellung der 3D-Objektwand, und mit einer ähnlichen Projektion der interessierenden Region,
Anzeigen einer Angabe der maximalen oder minimalen Wegamplitude der interessierenden Region der 3D-Objektwand über eine Zeitdauer in der Projektion (1A) der genannten interessierenden Region in der genannten ersten vereinfachten 2D-Darstellung (20.A),
Anzeigen einer Angabe eines Zeitpunkts, zu dem die maximale oder minimale Wegamplitude

in der interessierenden Region über die genannte Zeitdauer auftritt, in der genannten zweiten vereinfachten 2D-Darstellung (20.B), und Anzeigen der genannten ersten vereinfachten 2D-Darstellung (20.A) und der genannten zweiten vereinfachten 2D-Darstellung (20.B) zusammen in dem gleichen Bild.

10. Verfahren nach Anspruch 9, wobei das Verfahren konfiguriert ist zum Verarbeiten von Ultraschallbilddaten und zum Anzeigen eines Ultraschallbilds eines verformbaren 3D-Organ als verformbares 3D-Objekt mit Angaben der Organwandbewegungen, wobei das Verfahren ferner die folgenden Schritte umfasst:

Erfassen von 3D-Ultraschallbilddaten einer Bildsequenz des untersuchten Organs, und Anzeigen einer Angabe der maximalen oder minimalen Wegamplitude der interessierenden Region der segmentierten 3D-Organwand über eine Zeitdauer in der jeweiligen Projektion der interessierenden Region in der genannten ersten vereinfachten 2D-Darstellung auf farbcodierte Weise.

11. Computerprogrammprodukt umfassend einen Satz von Anweisungen zum Durchführen eines Verfahrens nach Anspruch 9.

Revendications

1. Système de traitement d'images permettant de construire et d'afficher des informations concernant une amplitude de déplacement de régions de paroi d'un objet 3D déformable à l'étude, ledit système de traitement d'images comprenant

- un moyen de traitement (120) pour segmenter des données d'objet 3D dans une séquence d'images ultrasonores 3D permettant de localiser une paroi d'objet 3D (SLV), définir une région d'intérêt sur la paroi d'objet 3D, traiter les données d'image de la paroi d'objet 3D pour déterminer une amplitude de déplacement de ladite région d'intérêt en fonction du temps, construire une première représentation simplifiée 2D (20.A) de la paroi d'objet 3D par projection de la paroi d'objet 3D (SLV), ladite première représentation simplifiée 2D (20.A) comprenant une projection (1A) de la région d'intérêt, et construire une seconde représentation simplifiée 2D (20.B) de la paroi d'objet 3D, similaire à la première représentation simplifiée 2D de la paroi d'objet 3D, et avec une projection similaire

de la région d'intérêt ; et

- un moyen d'affichage pour afficher une indication de l'amplitude maximale ou minimale de déplacement de la région d'intérêt de la paroi d'objet 3D au cours d'une période de temps dans la projection (1A) de ladite région d'intérêt dans ladite première représentation simplifiée 2D (20.A), afficher une indication de l'instant dans le temps, auquel le maximum ou le minimum d'amplitude de déplacement se produisent dans la région d'intérêt au cours de ladite période de temps, dans ladite seconde représentation simplifiée 2D (20.B), et afficher ladite première représentation simplifiée 2D (20.A) et ladite seconde représentation simplifiée 2D (20.B) ensemble dans la même image.

2. Système de traitement d'images selon la revendication 1, dans lequel le moyen de traitement (120) est en outre agencé pour :

déterminer l'amplitude de déplacement de la paroi d'objet 3D à l'emplacement de différentes zones ou faces, dans lequel de multiples zones ou faces forment la région d'intérêt ; et calculer la moyenne, à divers instants dans le temps au cours de la période de temps, des amplitudes de déplacement déterminées pour les multiples zones ou faces formant la région d'intérêt afin de déterminer l'amplitude du déplacement maximal ou minimal pour la région d'intérêt au cours de la période de temps.

3. Système de traitement d'images selon l'une des revendications 1 à 2, comprenant un moyen pour afficher les valeurs d'amplitude et de temps dans la première représentation simplifiée 2D et la seconde représentation simplifiée 2D respectives indiquées d'une manière codée par couleurs.

4. Système selon la revendication 1, comprenant un moyen pour afficher des indications d'amplitudes de déplacement de la région d'intérêt de la paroi d'objet 3D dans la projection respective de la région d'intérêt dans ladite première représentation simplifiée 2D, d'une manière codée par couleurs, les indications des amplitudes de déplacement changeant dans le segment au rythme des images de la séquence, de façon à former une représentation simplifiée 2D animée en fonction du temps.

5. Système de traitement d'images selon l'une des revendications 1 à 4, comprenant un moyen pour afficher la représentation simplifiée 2D de la paroi d'objet 3D comme une représentation de cible 2D.

6. Système de traitement d'images selon l'une quelconque des revendications précédentes, dans lequel l'objet à l'étude est le ventricule cardiaque gauche et la paroi d'objet 3D est la limite interne de la paroi du ventricule gauche.
7. Système de traitement d'images selon l'une quelconque des revendications précédentes, dans lequel le moyen de traitement permettant de localiser la paroi d'objet 3D comprend un moyen de segmentation permettant d'exécuter une technique de segmentation appliquée à l'objet 3D à l'étude, qui comprend l'utilisation d'une technique de modèle maillé, et la remise en forme du modèle maillé afin de mapper ledit modèle maillé sur la paroi de l'objet 3D à l'étude, de façon à fournir un volume simplifié avec une paroi, appelée ci-après paroi d'objet, qui est l'objet d'intérêt.
8. Système comprenant un ordinateur convenablement programmé ou un processeur spécialisé ayant un moyen circuit, le système comprenant un système de traitement d'images selon l'une quelconque des revendications 1 à 7.
9. Procédé de traitement d'images consistant à construire et afficher des informations concernant une amplitude de déplacement de régions de paroi d'un objet 3D déformable à l'étude, comprenant :
- la segmentation de données d'objet 3D dans une séquence d'images ultrasonores 3D permettant de localiser une paroi d'objet 3D (SLV), la définition d'une région d'intérêt sur la paroi d'objet 3D,
- le traitement des données d'images de la paroi d'objet 3D pour déterminer une amplitude de déplacement de ladite région d'intérêt en fonction du temps,
- la construction d'une première représentation simplifiée 2D (20.A) de la paroi d'objet 3D par projection de la paroi d'objet 3D (SLV), ladite première représentation simplifiée 2D (20.A) comprenant une projection (1A) de la région d'intérêt,
- la construction d'une seconde représentation simplifiée 2D (20.B) de la paroi d'objet 3D, similaire à la première représentation simplifiée 2D de la paroi d'objet 3D, et avec une projection similaire de la région d'intérêt,
- l'affichage d'une indication de l'amplitude maximale ou minimale de déplacement de la région d'intérêt de la paroi d'objet 3D au cours d'une période de temps dans la projection (1A) de ladite région d'intérêt dans ladite première représentation simplifiée 2D (20.A),
- l'affichage d'une indication de l'instant dans le temps, auquel le maximum ou le minimum d'amplitude de déplacement se produisent dans la région d'intérêt au cours de ladite période de temps, dans ladite seconde représentation simplifiée 2D (20.B), et
- l'affichage de ladite première représentation simplifiée 2D (20.A) et ladite seconde représentation simplifiée 2D (20.B) ensemble dans la même image.
10. Procédé selon la revendication 9, le procédé étant configuré pour traiter des données d'images ultrasonores et pour afficher une image ultrasonore d'un organe 3D déformable, en tant qu'objet 3D déformable, avec des indications des mouvements de paroi d'organe, le procédé comprenant en outre des étapes consistant à
- acquérir des données d'images ultrasonores 3D d'une séquence d'images de l'organe à l'étude, et afficher une indication de l'amplitude maximale ou minimale de déplacement de la région d'intérêt de la paroi d'organe segmentée 3D au cours d'une période de temps dans la projection respective de la région d'intérêt dans ladite première représentation simplifiée 2D d'une manière codée par couleurs.
11. Produit programme d'ordinateur comprenant un jeu d'instructions permettant de mettre en oeuvre un procédé selon la revendication 9.

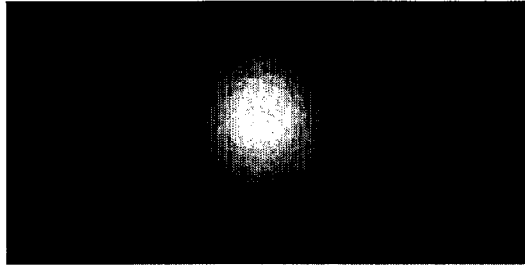


FIG.1A



FIG.1B

FIG.1C

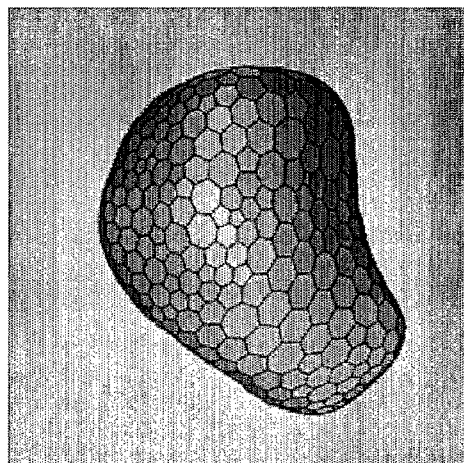


FIG.1D

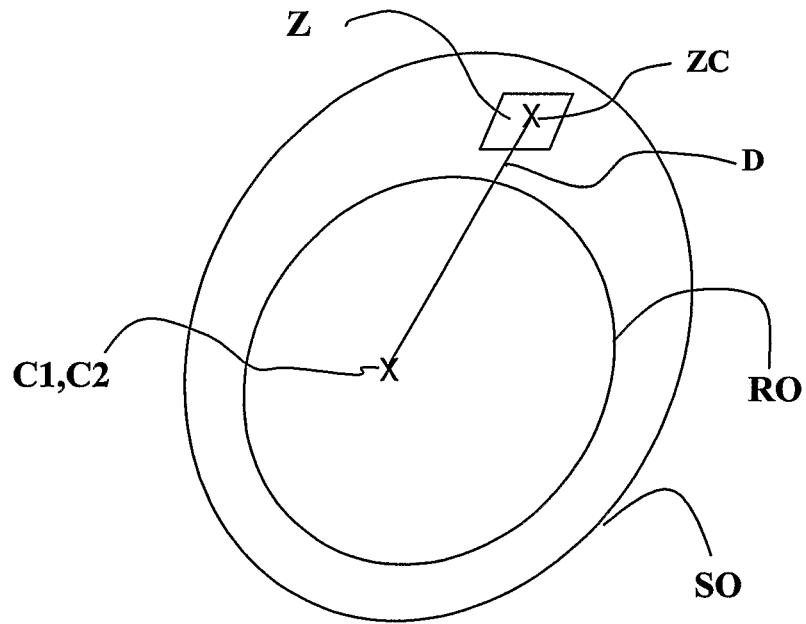


FIG. 2

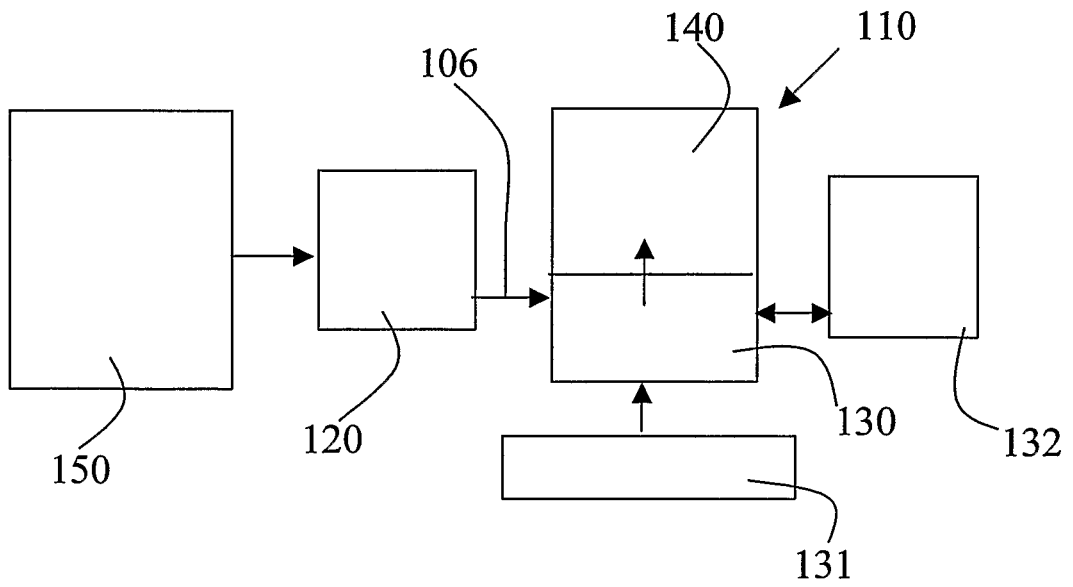


FIG. 5

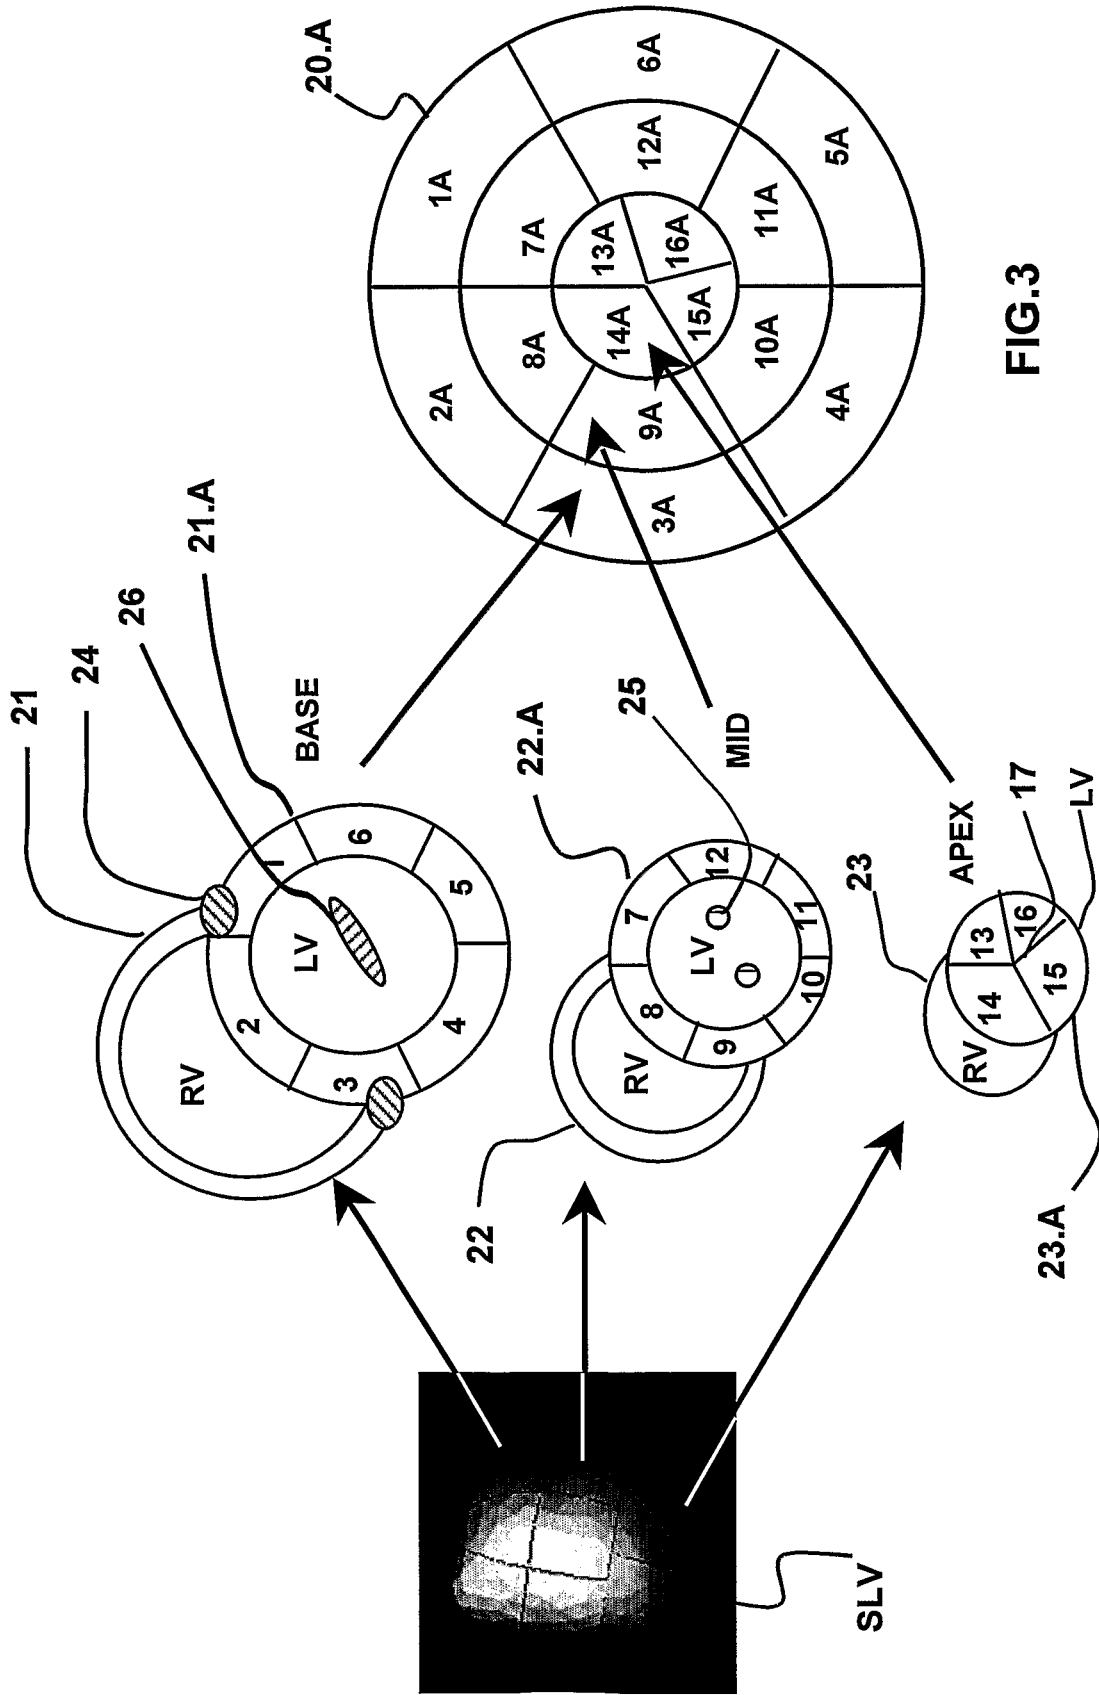


FIG. 3

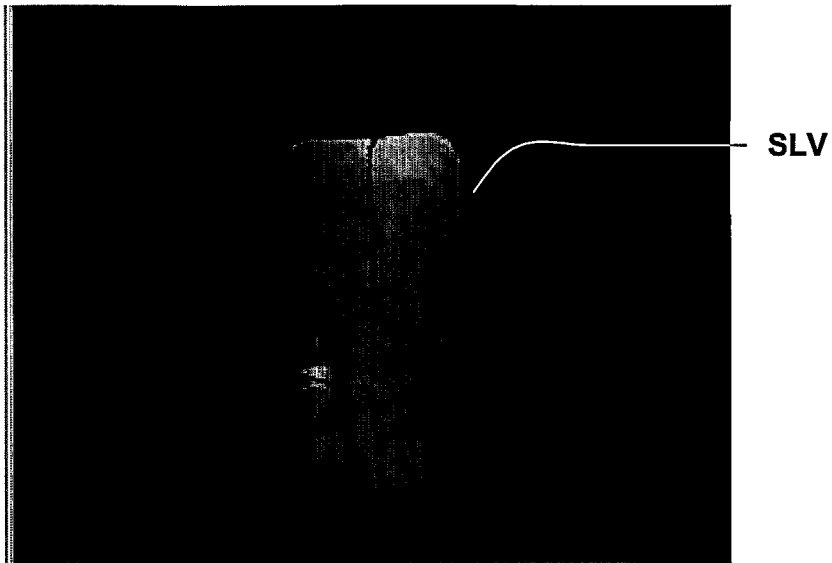


FIG.4A

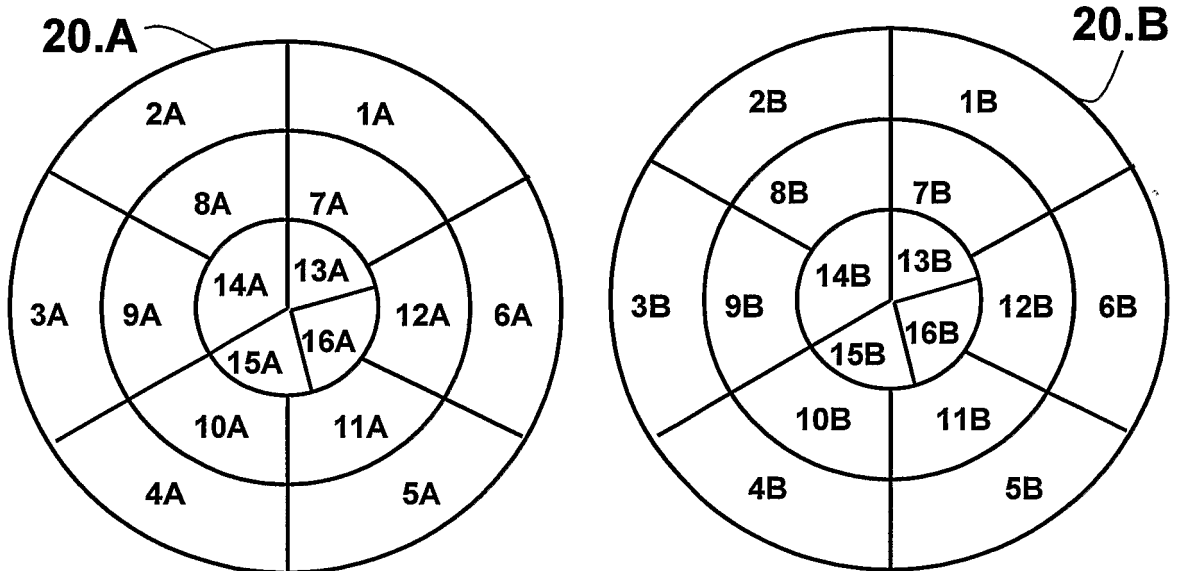


FIG.4B

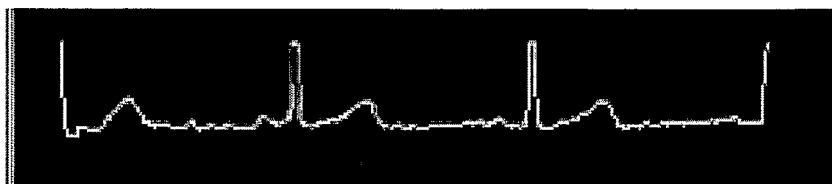


FIG.4C

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- Standardized Myocardial Segmentation and Nomenclature for Tomographic Imaging of the heart. **MANUEL D. CERQUEIRA et al.** Circulation. American Heart Writing Group on Myocardial Segmentation and Registration for Cardiac Imaging, 2002, vol. 105, 539-542 [0002]
- Reconstruction of Fourier coefficients: a fast method to get polar amplitude and phase images of gated SPECT. **GRAF G. et al.** J. of Nuclear Medicine. Society of Nuclear Medicine, 1990, vol. 31, 1856-1861 [0003]
- Automatic analysis of the left ventricle in the time sequences of 3D echo-cardiographic images. **O. GÉRARD et al.** Proc. of Medical image computing and computer-assisted intervention (MICCAI'01), LNCS 2208. Springer-Verlag, 2001, 1224-1225 [0004]
- **H. DELINGETTE.** Simplex Meshes: a General Representation for 3D shape Reconstruction. *processing of the International Conference on Computer Vision and Pattern Recognition (CVPR'94)*, 20 June 1994 [0020]

专利名称(译)	用于显示与可变形3-d物体的壁运动有关的信息的图像处理方法		
公开(公告)号	EP1527422B1	公开(公告)日	2019-05-22
申请号	EP2003732929	申请日	2003-06-24
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦N.V.		
[标]发明人	JACOB MARIE GERARD OLIVIER COLLET BILLON ANTOINE		
发明人	JACOB, MARIE GERARD, OLIVIER COLLET-BILLON, ANTOINE		
IPC分类号	G06T19/00 G06T11/20 A61B5/00 A61B8/08 G06T1/00 G06T17/00		
CPC分类号	G06T11/206 G06T19/00 G06T2210/41		
代理机构(译)	ROCHE , DENIS		
优先权	2002291622 2002-06-28 EP		
其他公开文献	EP1527422A2		
外部链接	Espacenet		

摘要(译)

图像处理系统，用于显示与所研究的可变形3-D物体的壁区域的位移幅度有关的信息，包括获取装置，用于获取简化3D物体墙壁的图像序列；处理装置处理图像数据，用于在简化的3D物体壁上定义感兴趣的区域，并计算一段时间内所述感兴趣的区域的最大位移幅度；构建3D简化对象墙的两个2D简化表示（牛眼表示），其中所述2D简化表示的各个片段中的感兴趣区域的投影分别由2D简化幅度和相位表示来表示；进一步包括显示装置，用于在2D简化幅度表示的各个段中显示一段时间内感兴趣区域的位移的最大幅度的颜色编码指示；以及在2D简化相位表示的各个段中，在所述时间段内在感兴趣区域中发生最大位移幅度的时间瞬间的颜色编码指示的显示。2D简化的幅度和相位表示优选地一起显示在同一图像中。研究对象可以是心脏左心室。可以通过超声系统提供和处理图像序列。




FIG. 1A

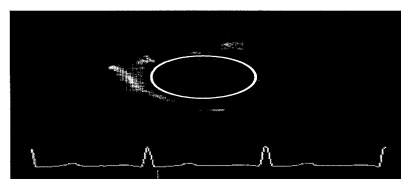


FIG. 1B

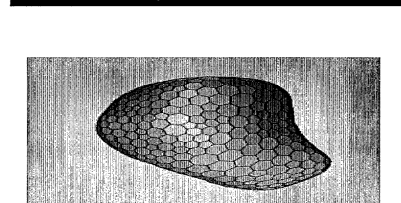


FIG. 1C

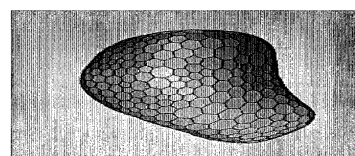


FIG. 1D