

(19)



(11)

EP 2 861 150 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

07.12.2016 Bulletin 2016/49

(51) Int Cl.:

A61B 5/02 (2006.01)

A61B 5/024 (2006.01)

A61B 7/04 (2006.01)

A61B 5/00 (2006.01)

A61B 5/0404 (2006.01)

(21) Application number: **13732394.5**

(86) International application number:

PCT/EP2013/062467

(22) Date of filing: **17.06.2013**

(87) International publication number:

WO 2013/189866 (27.12.2013 Gazette 2013/52)

(54) **A MONITORING SYSTEM FOR MONITORING OF HEART SIGNALS**

ÜBERWACHUNGSSYSTEM ZUR ÜBERWACHUNG VON HERZSIGNALEN

SYSTÈME DE SURVEILLANCE DE SIGNAUX CARDIAQUES

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(72) Inventors:

- **CHRISTENSEN, Claus Bo Vöge**
DK-3070 Snekkersten (DK)
- **RONG, Weimin**
DK-2880 Bagsvaerd (DK)

(30) Priority: **18.06.2012 SE 1250640**

18.06.2012 US 201261660883 P

(74) Representative: **Brann AB**

P.O. Box 3690

Drottninggatan 27

103 59 Stockholm (SE)

(43) Date of publication of application:

22.04.2015 Bulletin 2015/17

(56) References cited:

WO-A1-2009/080040

US-A- 5 737 429

US-A1- 2009 099 479

(73) Proprietor: **Acarix A/S**

2800 KGS Lyngby (DK)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 861 150 B1

Description

Field of the invention

[0001] The present invention relates to the field of recording of heart sounds, and in particular to a monitoring system for monitoring of heart signals according to the preamble of the independent claim.

Background of the invention

[0002] A widely used tool used by medical professionals for performing relative simple diagnostic tasks is the stethoscope, which is used to listen to a variety of internal body functions through the skin of a human. The conventional stethoscope is to some extent nowadays substituted by an electronic digital stethoscope which amplifies the sound captured.

[0003] The discovery of murmurs or low level noise from the coronary arteries with stenotic plaque of the beating heart was done in the 1970'ies. The plaque leads to change of the circulating blood from a laminar situation to turbulent streaming. The turbulence will lead to vibrations that may be picked up at the skin surface as sounds. In spite of the early discovery, the use of the level of intensity of the murmurs has never gained commercial impact, probably due to major challenges to make effective algorithms for the management of the sound recordings. The intensity is 100 to 1000 times less than the normal heart beat and cannot be heard by the normal ear with the stethoscope and the requirements to proper recordings are extreme. This means that any detail associated to the recording and the data management must be reconsidered for optimization or finding new solutions.

[0004] In WO-2009/080040-A1 and in WO-2010/078168-A2 a number of such aspects have been addressed. WO-2009/080040-A1 describes adhesive patches used for monitoring of acoustic signals. To enhance the quality of the recordings, the acoustic conductivity, transmission and contact between conducting means and skin surface is optimized by maintaining the pressure between the converting means and the skin surface as stable as possible. WO-2010/078168-A2 discloses an acoustic sensor assembly comprising an acoustic sensor intended to provide accurate and robust measurements of bodily sound under a variety of conditions.

[0005] In addition the following documents related topics are addressed.

US-2009/0099479 relates to an apparatus and method for determining proper endotracheal placement.

US-2008/0228095 relates to a portable viewable and audible stethoscope for visually and audibly monitoring the vital life signs of a patient.

And in US-5737429 is disclosed a multi-functional, hand-held medical device for measuring bodily functions and physiological parameters and for medical screening and diagnosis by dual sound detection.

[0006] From this point of view there is still a need for

further development in the field to reach a full solution for the delicate recording of acoustic heart sounds. New equipment and methods should be developed to overcome still important issues for acquiring best possible high quality recordings and following appropriate subsequent management thereof.

[0007] The object of the present invention is thus to provide an improved system for the recording of acoustic heart sounds.

Summary of the invention

[0008] The above-mentioned object is achieved by a monitoring system for monitoring acoustic heart signals according to the independent claim. The monitoring system comprises a sensor housing comprising a heart sound sensing element adapted to be arranged in connection to a patient's heart to sense heart sounds and to generate a heart sound signal related to the heart sounds. The system further comprises a monitoring unit housing comprising a processing unit adapted to receive the heart sound signal, wherein said monitoring unit housing is separated from said sensor housing and is adapted to be arranged in relation to the patient's upper sternum. The monitoring system further comprises a flexible elongated connector connecting the sensor housing to the monitoring unit housing, the connector having a longitudinal extension along a longitudinal axis. The connector is connected to the monitoring unit housing in an angular relationship, and the angle α between the longitudinal axis and a main axis of the monitoring unit housing is within a predetermined interval.

[0009] By separating the sensor housing from the monitoring unit housing and connecting the housings with the described flexible elongated connector, an ideal fixation of the monitoring system is achieved which to a great extent removes stresses to the sensing element derived from the monitoring unit housing. Stress between the sensor housing and monitoring housing will lead to impairment of the recording of the heart murmurs due to less precise positioning of the sensor housing and further potentially introduce external noise arising from the monitoring unit housing or due to impaired skin contact of the sensor housing.

[0010] The angular relationship between the connector and the monitoring unit housing provides a guide for a correct placement of the monitoring system on a patient. As can be seen in Figure 1, the monitoring unit housing 4 is preferably placed fixed to the upper sternum, or breastbone, of a patient, as the upper sternum normally is relatively flat and an area of the chest mostly independent of gender, age and obesity. This area provides for a stable placement of the monitoring unit housing. The sensor housing should now be placed such as it stretches for the IC 4 position (4th intercostal position) on the chest above the heart. This placement enables a reliable recording of the patient's heart sounds. The IC 4 position may vary especially due to gender, age, size and obesity.

The flexible and angular connection allows positioning of the sensor housing without stress induced from the monitoring unit housing. The connector ensures a stable and relatively fixed relationship between the components of the system, but at the same time provides flexibility to the monitoring system such as it can adapt to different patients with different body sizes. This design of the monitoring system provides for a high quality recording and appropriate management of the recordings and handling of the device.

[0011] Further, with appropriate selection of materials for the connector, stresses emanating from the monitoring unit housing which may introduce acoustic noise to the sensor element can be reduced. The present application thus reveals new designs of equipment to overcome still important issues for acquiring best possible high quality recordings.

[0012] Preferred embodiments are set forth in the dependent claims and in the detailed description.

Short description of the appended drawings

[0013] Below the invention will be described in detail with reference to the appended figures, of which:

Figure 1 illustrates a placement of a monitoring system on a patient's chest according to one embodiment of the invention.

Figure 2 shows a monitoring system according to a further embodiment of the invention.

Figure 3 shows a block diagram of the monitoring system according to a still further embodiment of the invention.

Figure 4 shows a monitoring system according to another embodiment of the invention.

Detailed description of preferred embodiments of the invention

[0014] The monitoring system 1 will now be explained with reference to Figure 2 and 3. Figure 2 shows the monitoring system for monitoring acoustic heart signals according to one embodiment, and Figure 3 illustrates a block diagram of the monitoring system 1. The monitoring system 1 comprises a sensor housing 2 comprising a heart sound sensing element 3 adapted to be arranged in connection to a patient's heart to sense heart sound data and to generate a heart sound signal related to the heart sound data. The recordings by the heart sound sensing element 3 are preferably in the frequency field of 1-2000 Hz. The monitoring system 1 also comprises a monitoring unit housing 4 comprising a processing unit 5 adapted to receive the heart sound signal, wherein the monitoring unit housing 4 is separated from the sensor housing 2. The processing unit 5 is according to one embodiment accommodated in a monitoring unit (not shown). The monitoring unit is then accommodated in the monitoring unit housing 4 and further comprising at

least one AD-converter to convert analogue recorded signals into digital signals, memory means and preferably a power supply such as a battery or power connection facilities to run the data management. The monitoring unit housing 4 is further adapted to be arranged in relation to the patient's upper sternum. The monitoring unit housing 4 may have a display 11 for display of data and/or a wireless communication solution for further transfer of analog or digital signals to an external unit. The external unit may e.g. be a smartphone or a computer. The digital signals are according to one embodiment processed by algorithms to make a read out value at the display showing a condition of the patient. In Figure 2 an ON/OFF button is shown, denoted 9.

[0015] The monitoring system 1 further comprises a flexible elongated connector 6 connecting the sensor housing 2 to the monitoring unit housing 4. The connector 6 has a longitudinal extension along a longitudinal axis 7. The connector 6 is connected to the monitoring unit housing 4 in an angular relationship, and wherein the angle α between the longitudinal axis 7 and a main axis 8 of the monitoring unit housing 4 is within a predetermined interval. According to one embodiment the predetermined interval is 20-90 degrees. The main axis 8 is an axis of the monitoring housing 4 intended to be located directly over and essentially parallel with the longitudinal extension of the breastbone of a patient when the monitoring system 1 is in use and correctly placed on a patient's chest. In the figures the monitoring unit housing 4 has a rectangular shape, and the main axis 8 is in this embodiment a centrally placed axis along the longitudinal extension of the monitoring unit housing 4. If the monitoring unit housing 4 has another shape, for example a circular shape, the monitoring unit housing 4 will in this context still have a main axis 8 which when the monitoring system 1 is in use and correctly placed, is located directly over and essentially parallel with the longitudinal extension of the breastbone of the patient. The main axis 8 is according to one embodiment denoted on the monitoring housing 4 to guide a user to a correct placement of the monitoring housing 4.

[0016] The connector 6 is preferably soft and resilient. The connector 6 is according to one embodiment characterized by connecting the monitoring unit housing 4 and the sensor housing 2 in a predetermined angle α and due to its flexible properties still allowing the positioning of the monitoring unit housing 4 and the sensor housing 2 in positions with other angles than the predetermined angle α without introducing disturbing and noise creating stresses between the monitoring unit housing 4 and the sensor housing 2.

[0017] The connector 6 is preferably easy to bend in all directions and/or to twist up to ± 45 degrees to facilitate a correct placement. To maintain the shape, the connector 6 is according to one embodiment adapted to be resiliently twisted and/or bent. Thus, the connector 6 will then return to its original shape after the recording or deformation. The connector 6 has according to one em-

bodiment limited stretchability, to avoid major change of the distance between the housings 2, 4. The connector 6 is according to one embodiment dimensionally stable and displays shape integrity, thus the connector will essentially keep its shape. According to one embodiment, the flexible elongated connector 6 is adapted to connect the housings 2, 4 in a stable or semi-rigid but still flexible manner, such that the housings 2, 4 are constantly separated by the longitudinal extension. The expression "semi-rigid" means in this context partly or moderately rigid.

[0018] The longitudinal extension of the flexible elongated connector 6 is according to one embodiment between 10-100 mm, more preferably 25-50 mm. This length of the connector 6 is preferred as it enables a placement of the monitoring system in which good recordings of heart sounds can be achieved. The longitudinal extension of the flexible elongated connector 6 depends according to one embodiment on the chosen angle α between the monitoring unit housing 4 and the sensor housing 2. The flexible elongated connector 6 has according to one embodiment a width d of 5-50 mm, more preferably 5-20 mm. The width d of the connector 6 is shown in Figure 2 as a distance perpendicular to the longitudinal axis 7 of the connector 6. The required flexibility of the connector 6 between the monitoring unit housing 4 and the sensor housing 2 is achieved by proper choice of dimensions and materials. For example, a connector 6 with very soft and flexible material may require larger dimensions than a connector 6 with more stiff and inflexible materials, to achieve the same stability. Preferred materials will have a low torsion modulus and have some degree of elasticity. Various types of elastomers and rubbers may be appropriate like materials having a shore A hardness preferably below 70, especially when construction thickness is more than 10-20 mm in the connection. However, preferred hardness will be shore A's below 50 and even more preferred below 40, and still even more preferred below 30. Kraton TR 1602 and TR 1101, Object Tango Black™ and Kraiburg TF 4 FMS are specific examples of suitable elastomers of the invention.

[0019] The flexibility of the connector 6 is according to one embodiment characterized by the ability to easy torsion. In clinical practice the required torsion for obtaining optimal sound recordings will be low and in general considerably lower than 45 degrees. As illustrated in example 1 below, the torque for a clinically common twisting of 15 degrees of the connector 6 in a preferred embodiment will be around 0.002 Nm. With twisting torques above 0.04 Nm at torsions of 15 degrees acting on the connector 6, the connector 6 will be too stiff to serve the purpose of applying low twisting force to the sensor housing 2 when recording the sound of the heart. Preferred embodiments of the connector 6 should thus need below 0.01 Nm in torque for twisting the connector 6 about 15 degrees.

Example 1

[0020] The force of torsion for a preferred embodiment of the connector 6 connecting the sensor housing 2 with the monitoring unit housing 4 is described below:

[0021] The torsion is the twisting of the given object due to an applied torque measured in Nm. The torque of the connector 6 with a length of 40 mm in a preferred embodiment was determined with the equipment "Tornado bottle tester, JKM Systems" manufactured by Mecmesin. The torque is depending on angular torsion and the determinations from torsions of 15 to 90 degrees are shown in the Table 1 below.

Table 1

Degree	Force/ Nm
15	0.002
30	0.005
45	0.009
90	0.030

[0022] To transfer signals between the parts of the monitoring system 1, the connector 6 comprises according to one embodiment electrical means such as leads adapted to transfer electrical signals between the sensor housing 2 and the monitoring unit housing 4. Electrical connection may also or instead be achieved with a narrow flex print circuit board with printed leads, thus an interface for transferring of a plurality of electrical signals.

[0023] According to one embodiment shown in Figure 4, the monitoring system comprises an adhesive patch 10 adapted to attach the sensor housing 2 and monitoring unit housing 4 to the skin of a patient. The adhesive patch 10 for the monitoring system preferably has the same angle α as between the sensor housing 2 and monitoring unit housing 4 between the intended position for the sensor housing 2 and the intended position for the monitoring unit housing 4. The patch 10 is preferably constructed from materials with high elasticity and flexibility characterized by allowing strain and twists with extremely low forces. According to one embodiment, the adhesive patch 10 comprises slits to allow non-stress movements and stretching. The construction is then cut with slits in the part which corresponds to the connector 6, to allow movement and stretching of the patch 10 without stress. Thus, when the connector 6 is twisted or bent, the patch 10 is designed such that it can follow the movement of the connector 6. Thus, attachment of the monitoring system 1 to the skin of the patient can be achieved, and still allow for flexible movement of the monitoring system 1. The patch 10 will thus not prevent movement of the monitoring system.

[0024] The present invention is not limited to the above-described preferred embodiments. Various alternatives, modifications and equivalents may be used.

Therefore, the above embodiments should not be taken as limiting the scope of the invention, which is defined by the appending claims.

Claims

1. Monitoring system (1) for monitoring acoustic heart signals, comprising
a sensor housing (2) comprising a heart sound sensing element (3) adapted to be arranged in connection to a patient's heart to sense heart sounds and to generate a heart sound signal related to the heart sounds;
a monitoring unit housing (4) comprising a processing unit (5) adapted to receive said heart sound signal, wherein said monitoring unit housing (4) is separated from said sensor housing (2) and is adapted to be arranged in relation to the patient's upper sternum
wherein said system (1) further comprises a flexible elongated connector (6) connecting said sensor housing (2) to said monitoring unit housing (4), said connector (6) having a longitudinal extension along a longitudinal axis (7), wherein said connector (6) is connected to said monitoring unit housing (4) in an angular relationship, the angle α between said longitudinal axis (7) and a main axis (8) of said monitoring unit housing (4) is within a predetermined interval, and **characterized in that** said flexible elongated connector (6) is adapted to be resiliently twisted and/or bent.
2. System according to claim 1, wherein said predetermined interval is 20-90 degrees.
3. System according to claim 1 or 2, wherein said longitudinal extension is between 10-100 mm.
4. System according to any of the preceding claims, wherein said flexible elongated connector (6) has a width of 5-50 mm.
5. System according to any of the preceding claims 1 to 4, wherein said flexible elongated connector (6) comprises a material having a shore A hardness below 70, more preferred below 50 and even more preferably below 40.
6. System according to any of the preceding claims, wherein said flexible elongated connector (6) is dimensionally stable and displays shape integrity.
7. System according to any of the preceding claims, wherein said flexible elongated connector (6) comprises electrical means adapted to transfer electrical signals between said sensor housing (2) and said monitoring unit housing (4).

8. System according to any of the preceding claims, wherein said flexible elongated connector (6) is adapted to connect said housings (2, 4) in a stable, semi-rigid but still flexible manner, such that said housings (2, 4) are constantly separated by said longitudinal extension.
9. System according to any of the preceding claims, comprising an adhesive patch (10) adapted to attach said sensor housing (2) and monitoring unit housing (4) housing to the skin of a patient.
10. System according to claim 10, wherein said adhesive patch (10) comprises slits to allow non-stress movements and stretching.

Patentansprüche

1. Überwachungssystem (1) zum Überwachen von akustischen Herzsignalen, umfassend:

ein Sensorgehäuse (2), umfassend ein Herztonerfassungselement (3), das zum Anordnen in Verbindung mit dem Herzen des Patienten angepasst ist, um Herzöne zu erfassen und ein mit den Herzönen verbundenes Herztonsignal zu erzeugen;
ein Überwachungseinheitsgehäuse (4), umfassend eine Verarbeitungseinheit (5), die zum Empfangen des Herztonsignals angepasst ist, wobei das Überwachungseinheitsgehäuse (4) von dem Sensorgehäuse (2) getrennt ist und zum Anordnen in Bezug auf das obere Brustbein des Patienten angepasst ist, wobei das System (1) ferner ein flexibles längliches Verbindungsglied (6) umfasst, das das Sensorgehäuse (2) mit dem Überwachungseinheitsgehäuse (4) verbindet, wobei das Verbindungsglied (6) eine Längserweiterung entlang einer Längsachse (7) aufweist, wobei das Verbindungsglied (6) in Winkelbeziehung mit dem Überwachungseinheitsgehäuse (4) verbunden ist, wobei der Winkel α zwischen der Längsachse (7) und einer Hauptachse (8) des Überwachungseinheitsgehäuses (4) in einer vorbestimmten Spanne liegt, und **dadurch gekennzeichnet, dass** das flexible längliche Verbindungsglied (6) dazu zur elastischen Verdrehung und/oder Biegung angepasst ist.
2. System nach Anspruch 1, wobei die vorbestimmte Spanne 20 bis 90 Grad beträgt.
3. System nach Anspruch 1 oder 2, wobei die Längserweiterung zwischen 10 bis 100 mm liegt.
4. System nach einem der vorhergehenden Ansprü-

che, wobei das flexible längliche Verbindungsglied (6) eine Breite von 5 - 50 mm aufweist.

5. System nach einem der vorhergehenden Ansprüche 1 bis 4, wobei das flexible längliche Verbindungsglied (6) ein Material mit einer Shore-A-Härte unter 70, stärker bevorzugt unter 50 und noch stärker bevorzugt unter 40 umfasst.
6. System nach einem der vorhergehenden Ansprüche, wobei das flexible längliche Verbindungsglied (6) formstabil ist und Formintegrität aufweist.
7. System nach einem der vorhergehenden Ansprüche, wobei das flexible längliche Verbindungsglied (6) elektrische Mittel umfasst, die zum Übertragen von elektrischen Signalen zwischen dem Sensorgehäuse (2) und dem Überwachungseinheitsgehäuse (4) angepasst sind.
8. System nach einem der vorhergehenden Ansprüche, wobei das flexible längliche Verbindungsglied (6) zum derartigen Verbinden der Gehäuse (2, 4) in stabiler, halbstarrer aber immer noch flexibler Weise angepasst ist, dass die Gehäuse (2, 4) durch die Längserweiterung dauerhaft getrennt sind.
9. System nach einem der vorhergehenden Ansprüche, umfassend ein Klebepflaster (10) das zum Anbringen des Sensorgehäuses (2) und des Überwachungseinheitsgehäuses (4) auf der Haut eines Patienten angepasst ist.
10. System nach Anspruch 10, wobei das Klebepflaster (10) Schlitze zum Ermöglichen von spannungsfreien Bewegungen und Dehnungen umfasst.

Revendications

1. Système de surveillance (1) pour surveiller des signaux cardiaques acoustiques, comprenant un boîtier de capteur (2) comprenant un élément de détection de son cardiaque (3) adapté pour être agencé en connexion avec le coeur d'un patient afin de détecter des sons cardiaques et de générer un signal sonore cardiaque lié aux sons cardiaques ; un boîtier d'unité de surveillance (4) comprenant une unité de traitement (5) adaptée pour recevoir ledit signal de son cardiaque, dans lequel ledit boîtier d'unité de surveillance (4) est séparé dudit boîtier de capteur (2) et est adapté pour être agencé par rapport au sternum supérieur du patient, dans lequel ledit système (1) comprend en outre un connecteur allongé flexible (6) connectant ledit boîtier de capteur (2) audit boîtier d'unité de surveillance (4), ledit connecteur (6) ayant une extension longitudinale le long d'un axe longitudinal (7), dans lequel ledit connecteur (6) est connecté audit boîtier d'unité de surveillance (4) selon une relation angulaire, l'angle α entre ledit axe longitudinal (7) et un axe principal (8) dudit boîtier d'unité de surveillance (4) se trouve dans un intervalle prédéterminé, et **caractérisé en ce que** ledit connecteur allongé flexible (6) est adapté pour être tordu et/ou courbé de manière élastique.

teur (6) est connecté audit boîtier d'unité de surveillance (4) selon une relation angulaire, l'angle α entre ledit axe longitudinal (7) et un axe principal (8) dudit boîtier d'unité de surveillance (4) se trouve dans un intervalle prédéterminé, et **caractérisé en ce que** ledit connecteur allongé flexible (6) est adapté pour être tordu et/ou courbé de manière élastique.

2. Système selon la revendication 1, dans lequel ledit intervalle prédéterminé est de 20-90 degrés.
3. Système selon la revendication 1 ou 2, dans lequel ladite extension longitudinale se trouve entre 10-100 mm.
4. Système selon l'une quelconque des revendications précédentes, dans lequel ledit connecteur allongé flexible (6) a une largeur de 5-50 mm.
5. Système selon l'une quelconque des revendications précédentes 1 à 4, dans lequel ledit connecteur allongé flexible (6) comprend un matériau ayant une dureté Shore A inférieure à 70, de préférence inférieure à 70 et de manière encore davantage préférée inférieure à 40.
6. Système selon l'une quelconque des revendications précédentes, dans lequel ledit connecteur allongé flexible (6) est dimensionnellement stable et présente une intégrité de forme.
7. Système selon l'une quelconque des revendications précédentes, dans lequel ledit connecteur allongé flexible (6) comprend un moyen électrique adapté pour transférer des signaux électriques entre ledit boîtier de capteur (2) et ledit boîtier d'unité de surveillance (4).
8. Système selon l'une quelconque des revendications précédentes, dans lequel ledit connecteur allongé flexible (6) est adapté pour connecter lesdits boîtiers (2, 4) d'une manière stable, semi-rigide mais toujours flexible, de telle sorte que lesdits boîtiers (2, 4) sont constamment séparés par ladite extension longitudinale.
9. Système selon l'une quelconque des revendications précédentes, comprenant un patch adhésif (10) adapté pour attacher ledit boîtier de capteur (2) et ledit boîtier d'unité de surveillance (4) à la peau d'un patient.
10. Système selon la revendication 10, dans lequel ledit patch adhésif (10) comprend des fentes pour permettre un étirement et des déplacements sans contrainte.

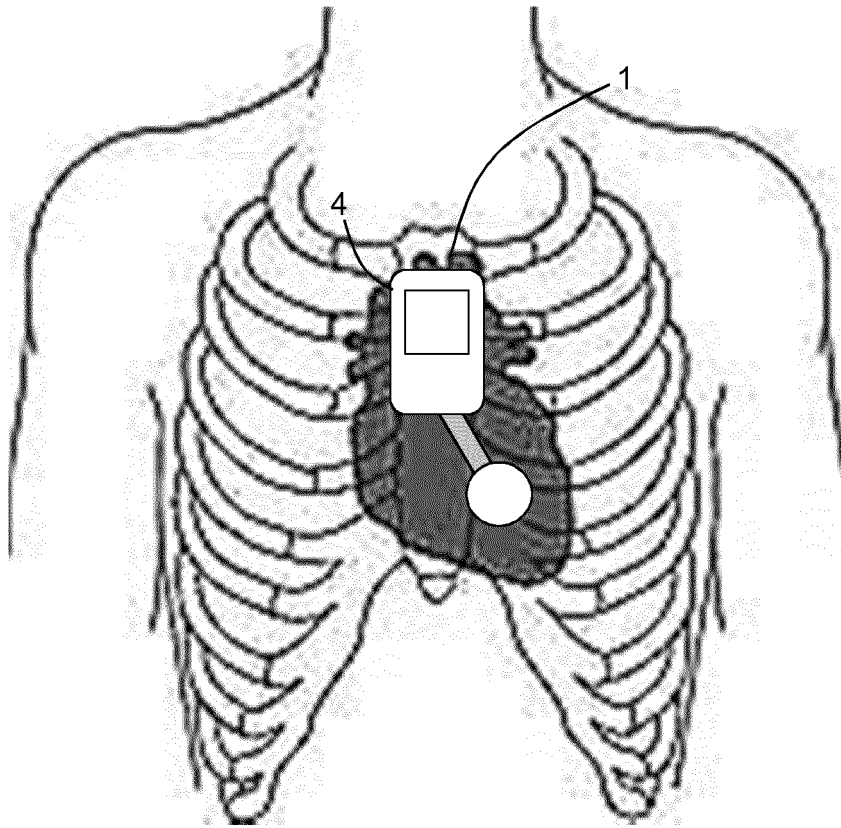


FIG. 1

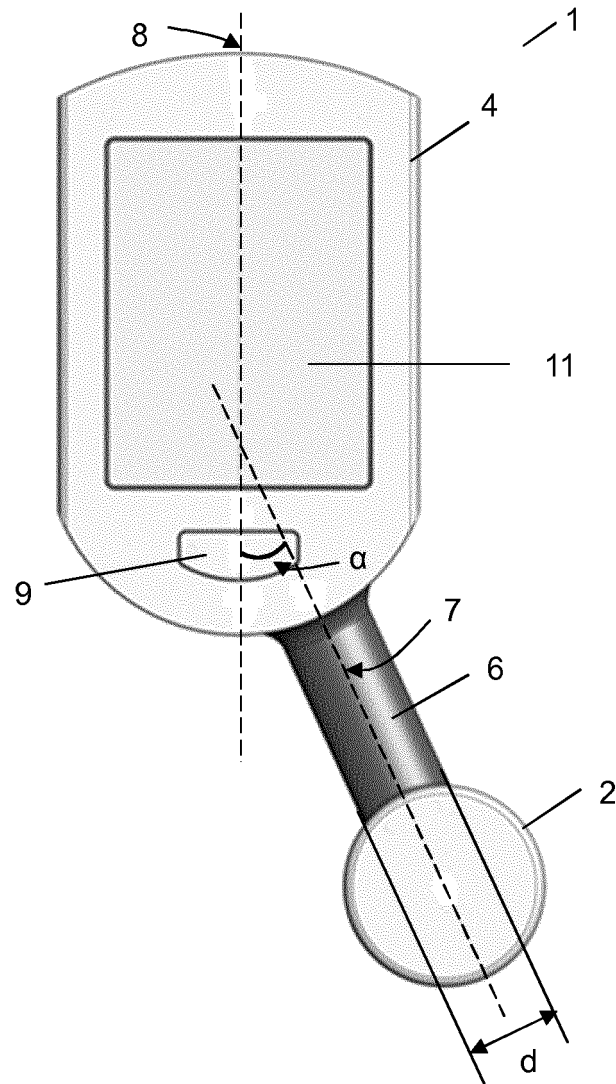


FIG. 2

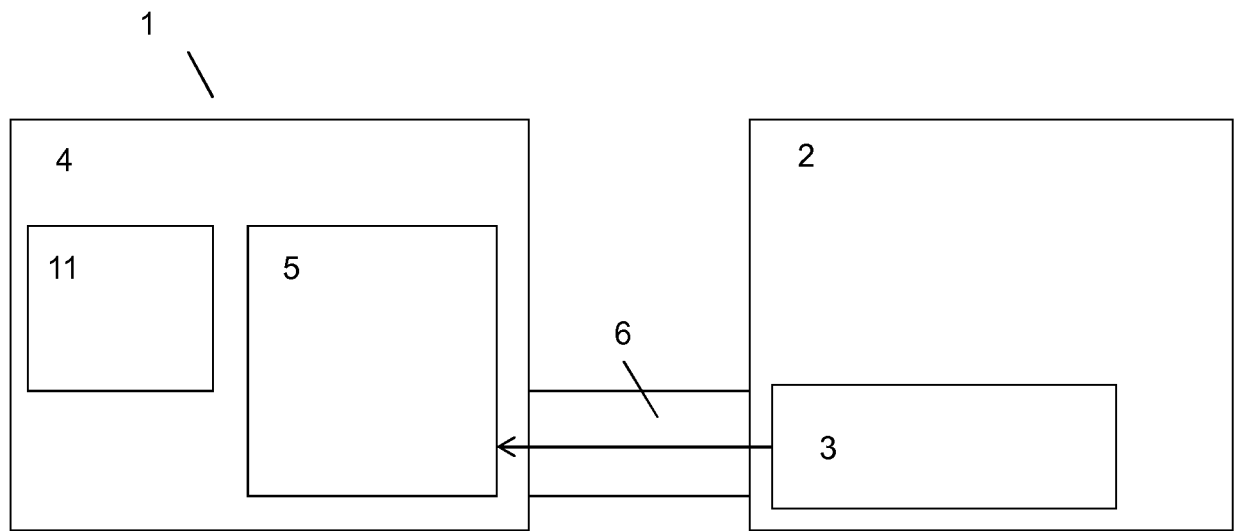


FIG. 3

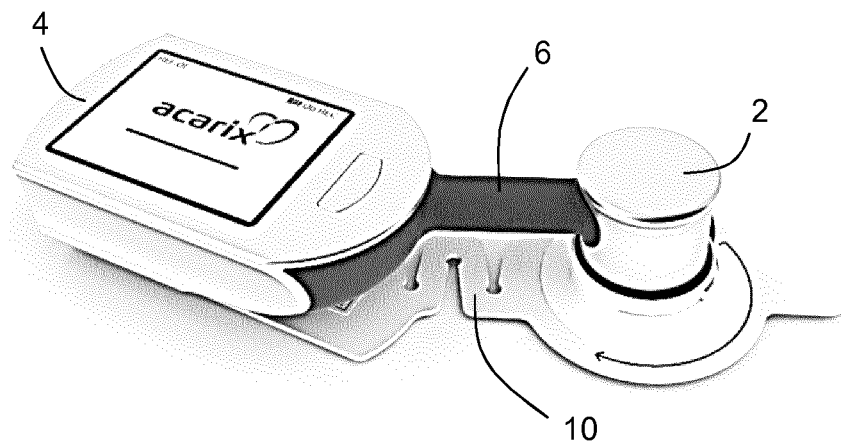


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2009080040 A1 [0004]
- WO 2010078168 A2 [0004]
- US 20090099479 A [0005]
- US 20080228095 A [0005]
- US 5737429 A [0005]

专利名称(译)	用于监测心脏信号的监测系统		
公开(公告)号	EP2861150A1	公开(公告)日	2015-04-22
申请号	EP2013732394	申请日	2013-06-17
[标]申请(专利权)人(译)	ACARIX		
申请(专利权)人(译)	ACARIX A / S		
当前申请(专利权)人(译)	ACARIX A / S		
[标]发明人	CHRISTENSEN CLAUS BO VOG RONG WEIMIN		
发明人	CHRISTENSEN, CLAUS BO VÖGE RONG, WEIMIN		
IPC分类号	A61B7/04 A61B5/00 A61B5/02 A61B5/024 A61B5/0404		
CPC分类号	A61B5/02438 A61B5/0404 A61B5/6801 A61B7/04 A61B2562/0204 A61B5/0004 A61B5/02028 A61B5/0255 A61B5/6823 A61B5/6833 A61B5/6835 A61B5/72 A61B5/742 A61B2560/0412 A61B2562/164		
优先权	1250640 2012-06-18 SE 61/660883 2012-06-18 US		
其他公开文献	EP2861150B1		
外部链接	Espacenet		

摘要(译)

本发明涉及一种用于监视心音信号的监视系统 (1) , 其包括传感器外壳 (2) , 该传感器外壳包括心音感测元件 (3) , 该心音感测元件适于连接到患者的心脏以感测心音并产生心音。 与心音有关的心音信号 ; 监视单元壳体 (4) , 其包括适于接收所述心音信号的处理单元 (5) , 其中 , 所述监视单元壳体 (4) 与所述传感器壳体 (2) 分离并且适于相对于患者的身体进行布置 上胸骨 , 其中监视系统 (1) 进一步包括将所述传感器外壳 (2) 连接到所述监视单元外壳 (4) 的柔性细长连接器 (6) , 所述连接器 (6) 沿纵轴 (7) 具有纵向延伸) , 其中所述连接器 (6) 以一定的角度关系连接到所述监视单元壳体 (4) , 并且其中 , 所述纵向轴线 (7) 与所述监视单元壳体 (4) 的主轴线 (8) 之间的角度 α 在预定间隔内。