



US 20030162414A1

(19) **United States**(12) **Patent Application Publication**
Schulz et al.(10) **Pub. No.: US 2003/0162414 A1**(43) **Pub. Date: Aug. 28, 2003**(54) **SHIELDED OPTICAL PROBE HAVING AN ELECTRICAL CONNECTOR**(76) Inventors: **Christian E. Schulz**, Rancho Santa Margarita, CA (US); **Ammar Al-Ali**, Tustin, CA (US); **Eugene E. Mason**, La Mirada, CA (US); **Mike A. Mills**, Golden, CO (US)

Correspondence Address:

KNOBBE MARTENS OLSON & BEAR LLP
2040 MAIN STREET
FOURTEENTH FLOOR
IRVINE, CA 92614 (US)(21) Appl. No.: **10/404,961**(22) Filed: **Mar. 31, 2003****Related U.S. Application Data**

(63) Continuation of application No. 09/770,757, filed on Jan. 25, 2001, now Pat. No. 6,541,756, which is a continuation-in-part of application No. 09/420,544, filed on Oct. 19, 1999, now Pat. No. 6,580,086. Continuation-in-part of application No. 09/094,202, filed on Jun. 9, 1998, now Pat. No. 6,256,523, which is a continuation of application No. 08/543,789, filed on Oct. 16, 1995, now Pat. No. 5,782,757, which is a continuation-in-part of application No. 08/333,132, filed on Nov. 1, 1994, now Pat. No. 5,638,818, which


is a continuation-in-part of application No. 07/672,890, filed on Mar. 21, 1991, now abandoned.

Continuation-in-part of application No. 09/404,060, filed on Sep. 23, 1999, now Pat. No. 6,349,228, which is a continuation of application No. 09/021,957, filed on Feb. 11, 1998, now Pat. No. 5,995,855.

Continuation-in-part of application No. 09/708,251, filed on Nov. 7, 2000, now Pat. No. 6,280,213, which is a continuation of application No. 09/318,563, filed on May 26, 1999, now abandoned, which is a continuation of application No. 08/838,392, filed on Apr. 9, 1997, now Pat. No. 5,934,925, which is a continuation of application No. 08/543,297, filed on Oct. 16, 1995, now Pat. No. 5,645,440.

Publication Classification(51) **Int. Cl.⁷** **H01R 39/00; H01J 40/14**(52) **U.S. Cl.** **439/11; 250/221**(57) **ABSTRACT**

A noninvasive optical probe has an electrical connector for connecting the optical probe to a cable connector. According to one embodiment, the electrical connector includes a durable flexible tab suspended between the housing of the optical probe and a protective cover. The electrical connector also advantageously forms, according to various embodiments, a flexible, plugable, lockable, removable, and sealable electrical connection.

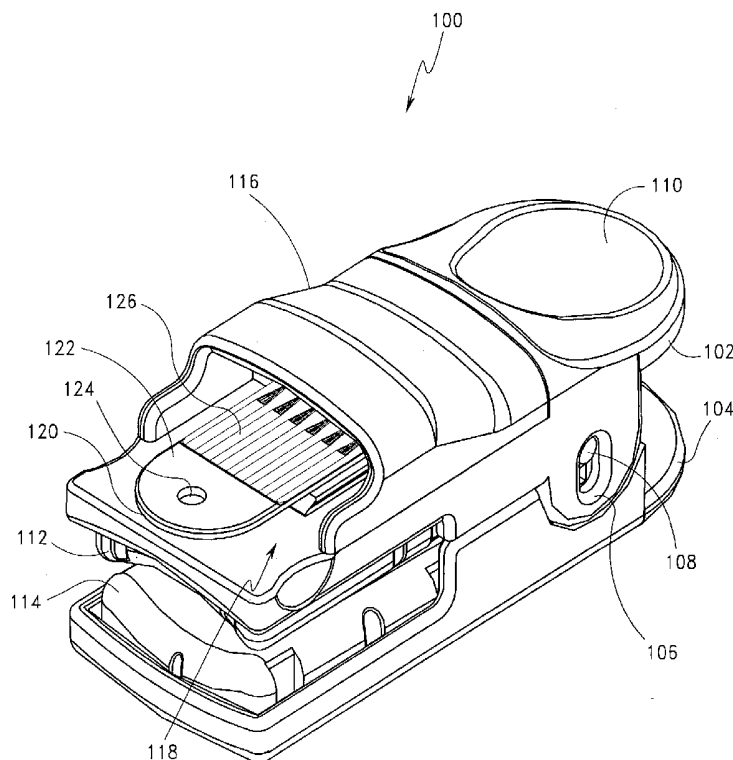

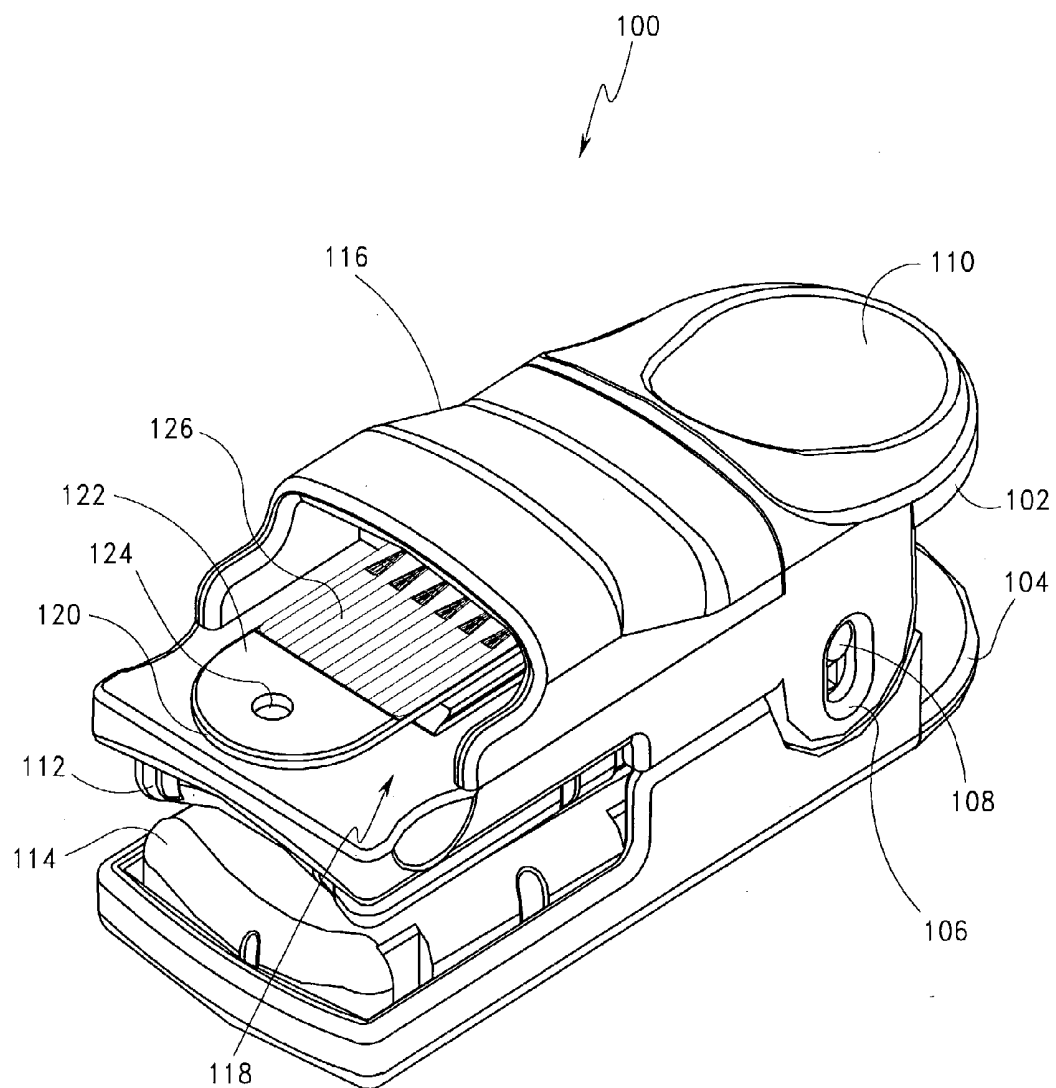


Fig. 1

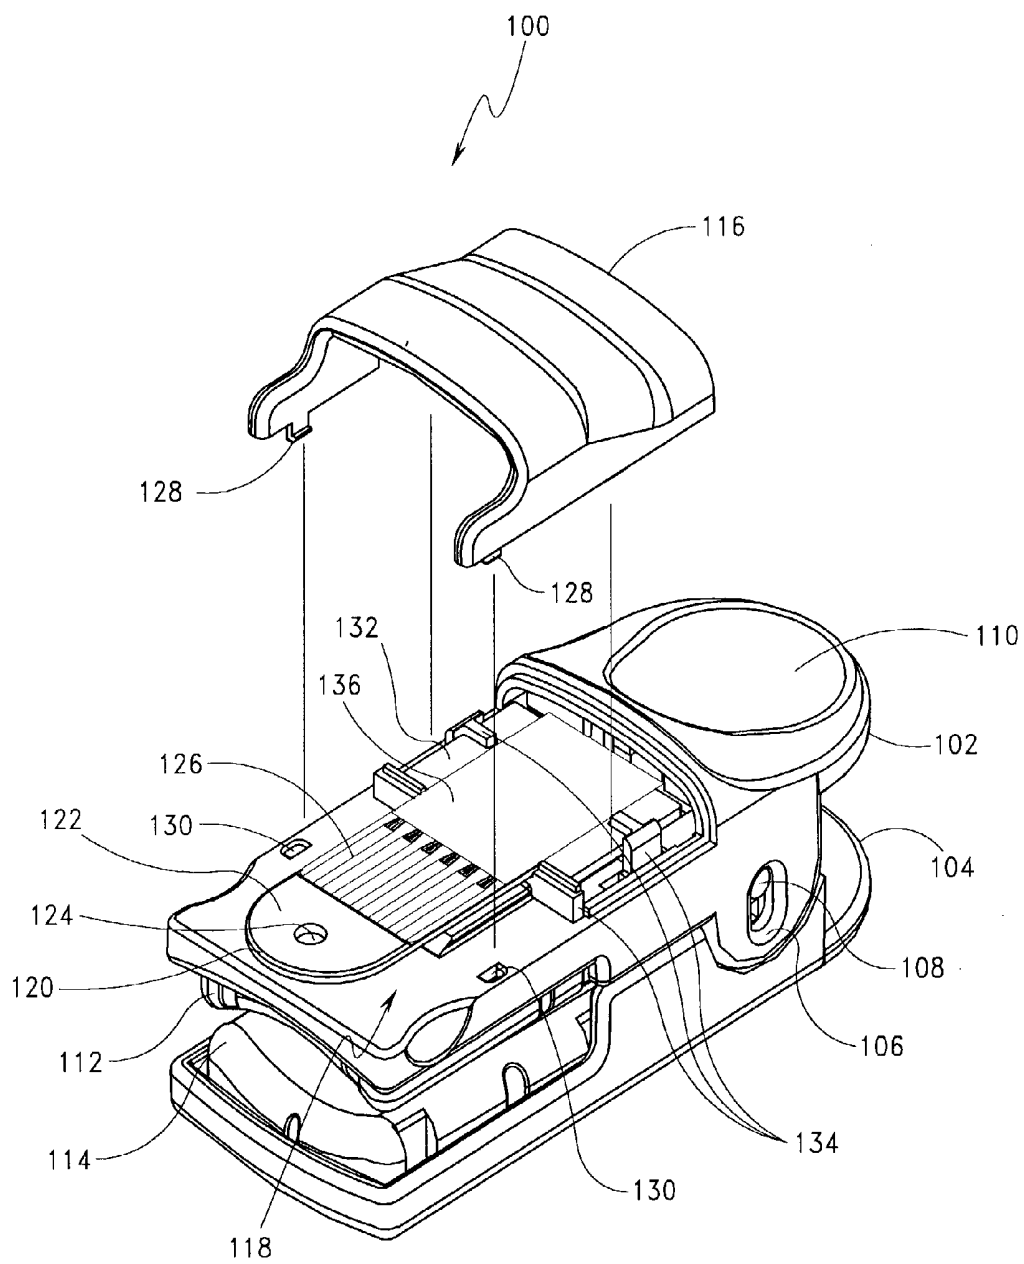
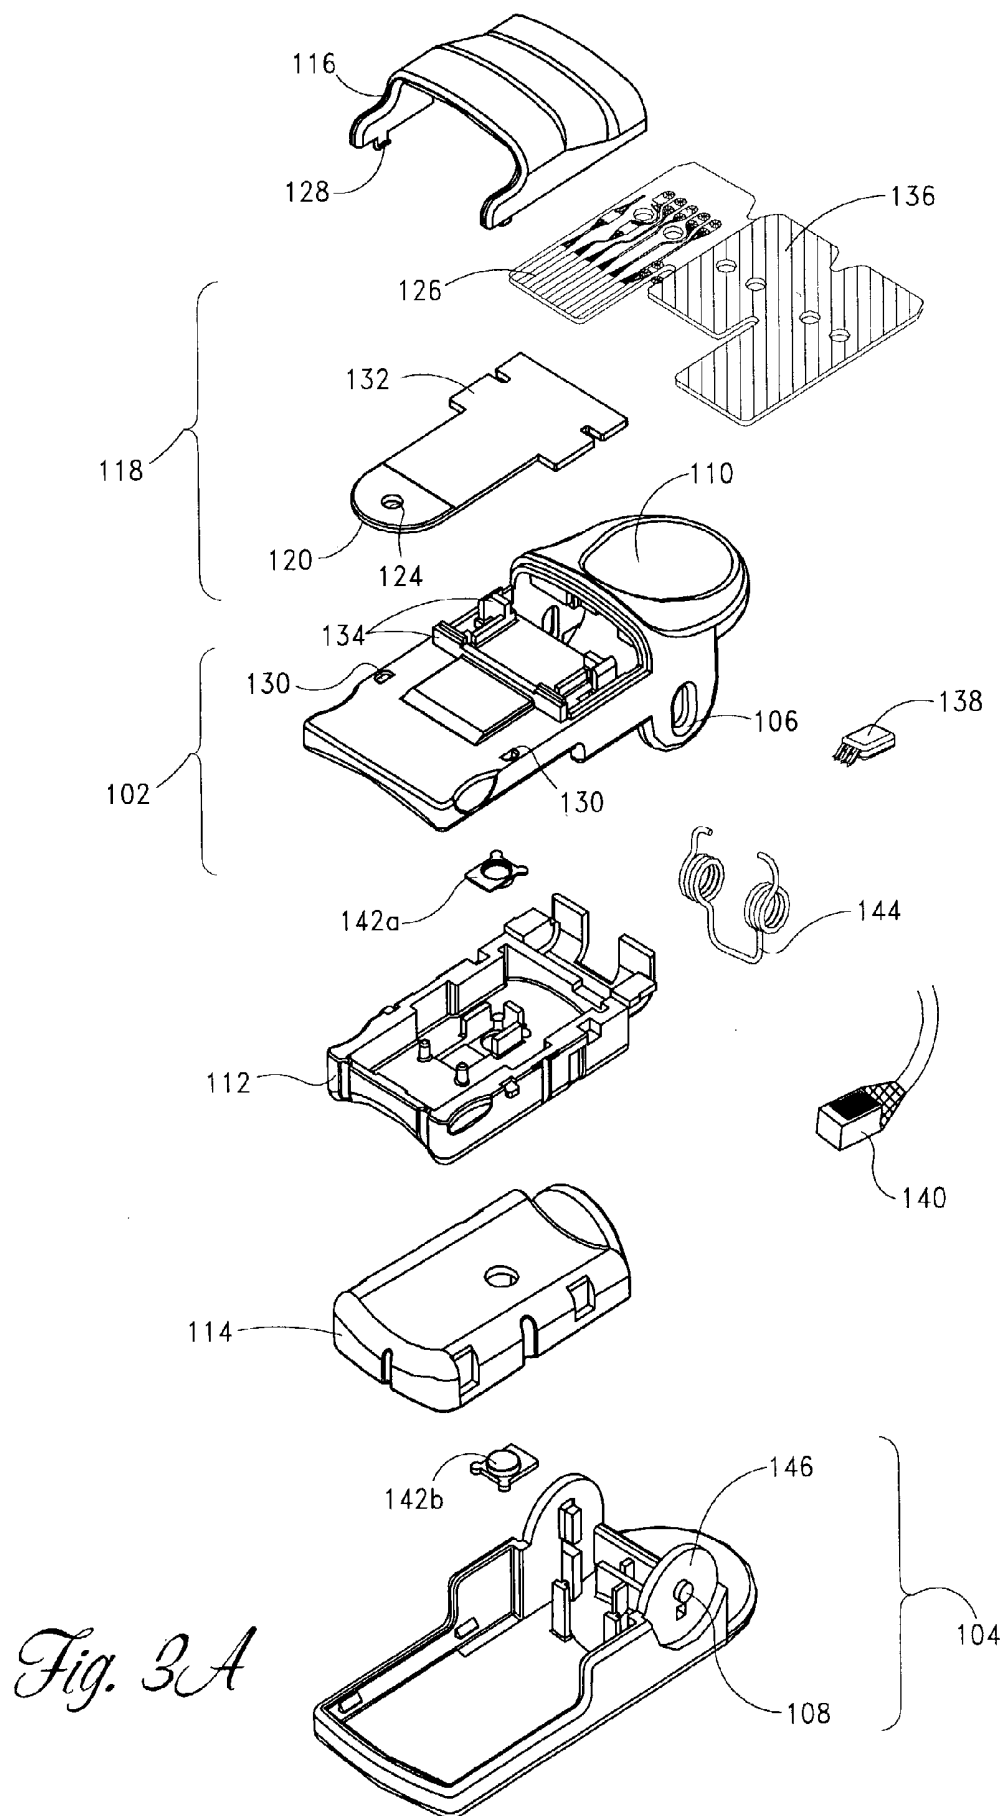


Fig. 2



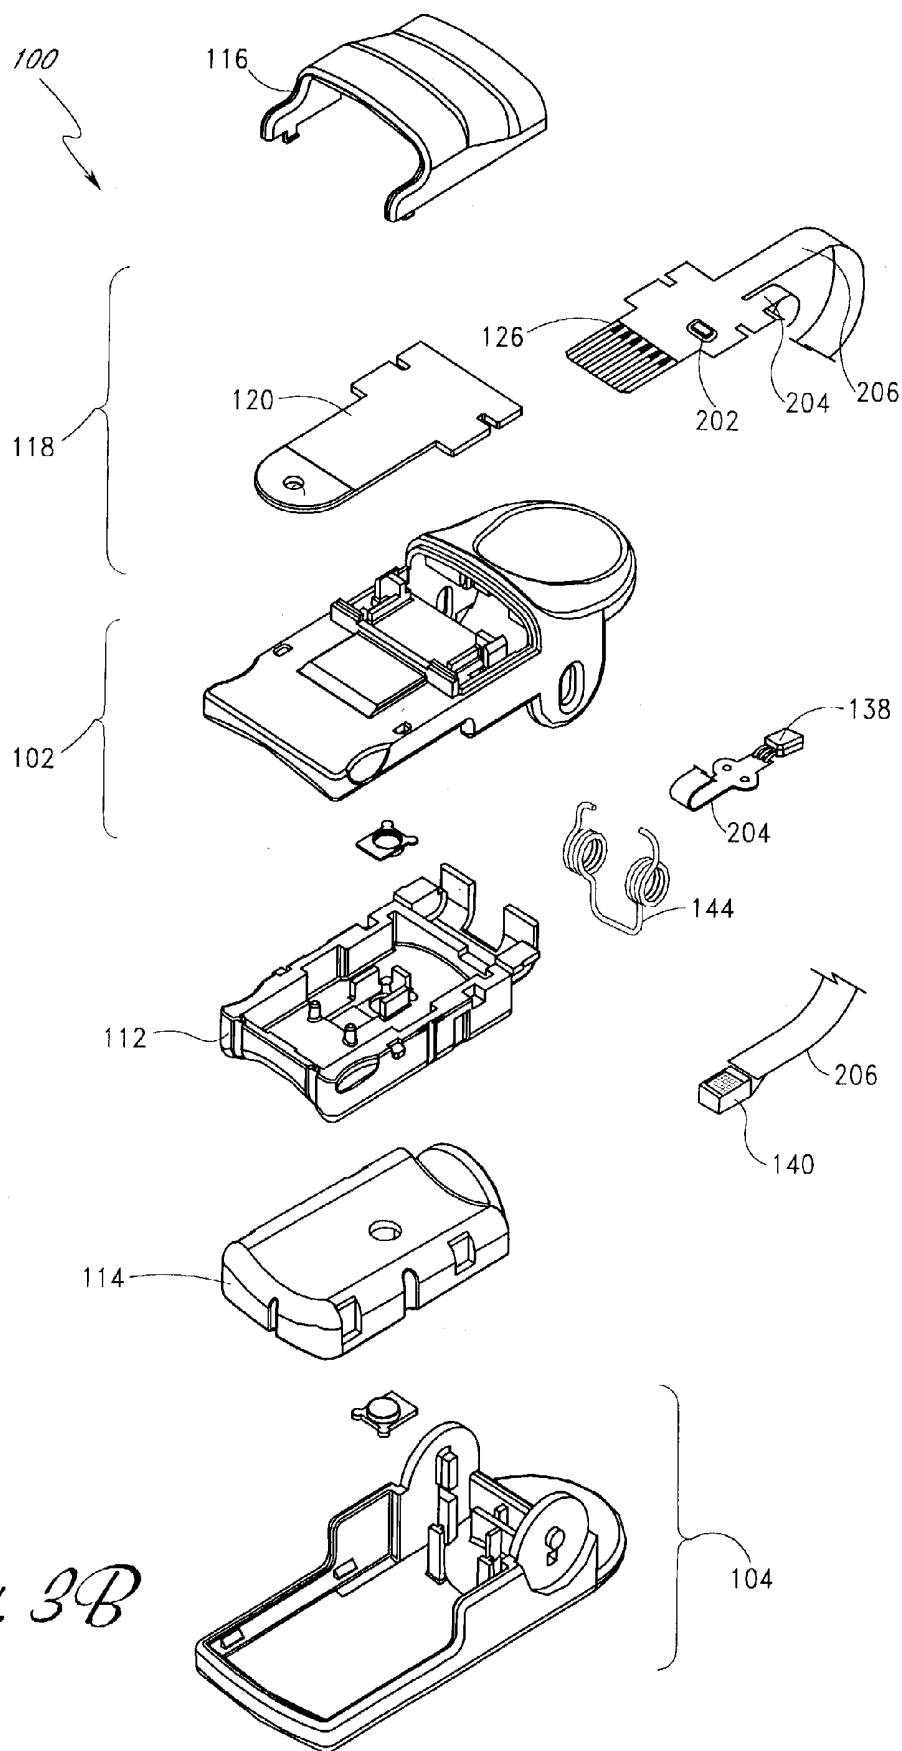


Fig. 3B

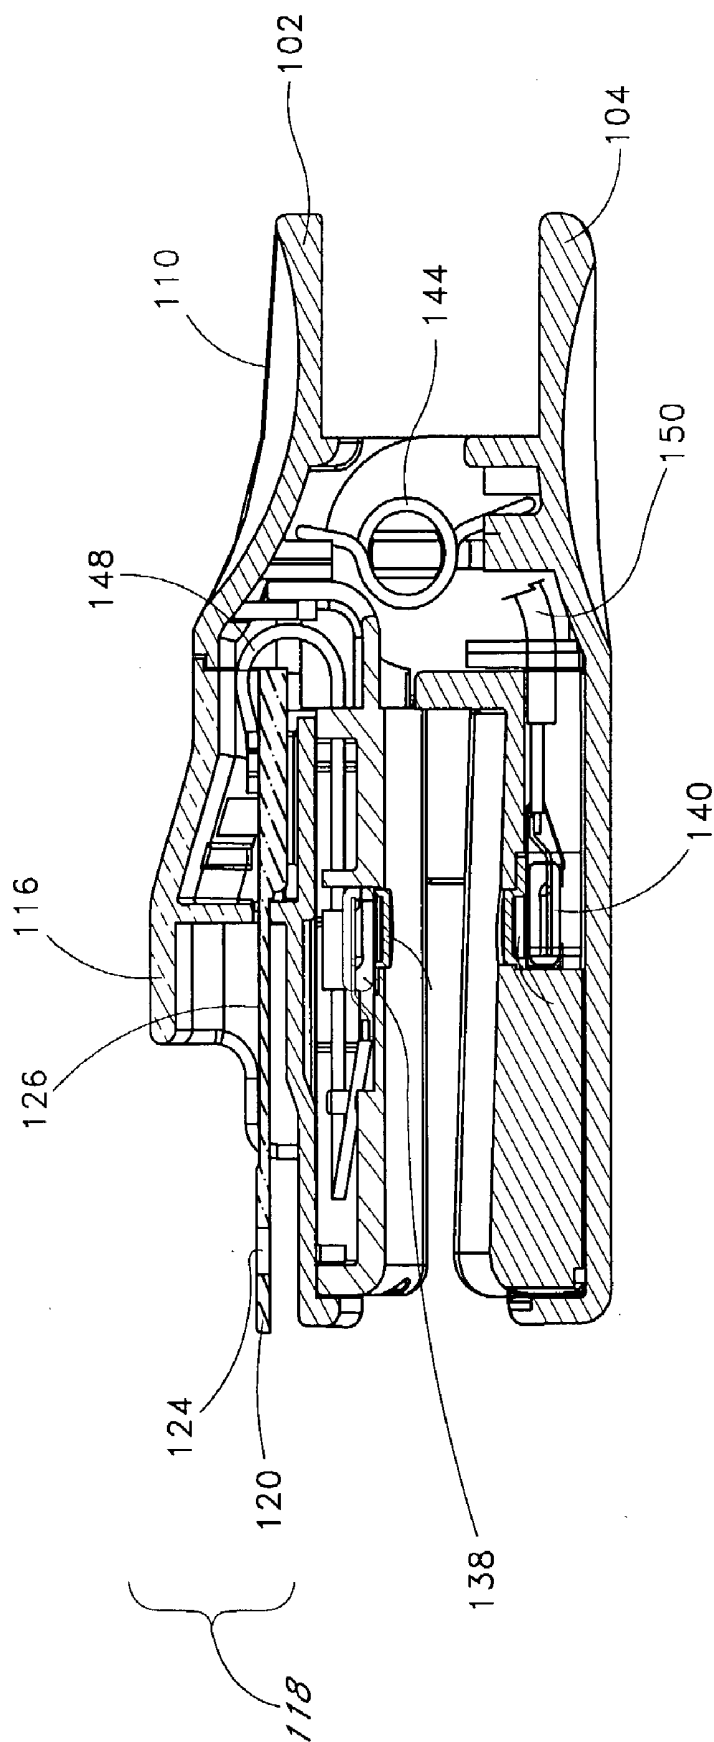


Fig. 4

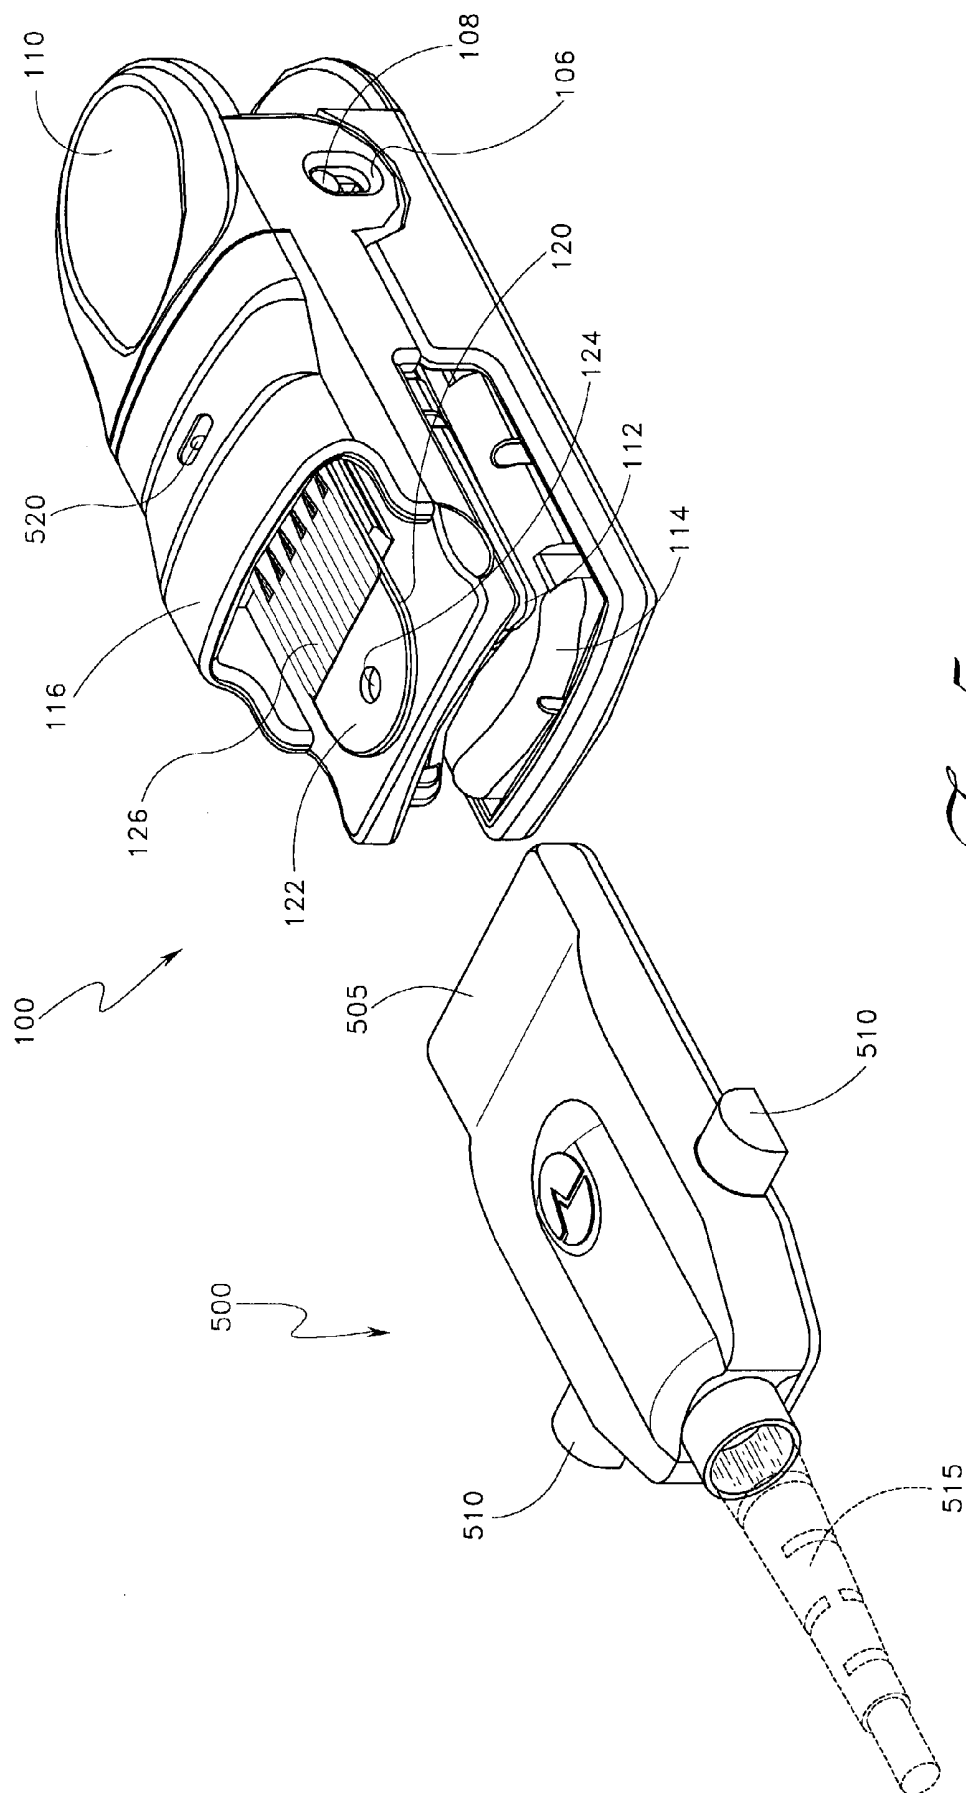


Fig. 5

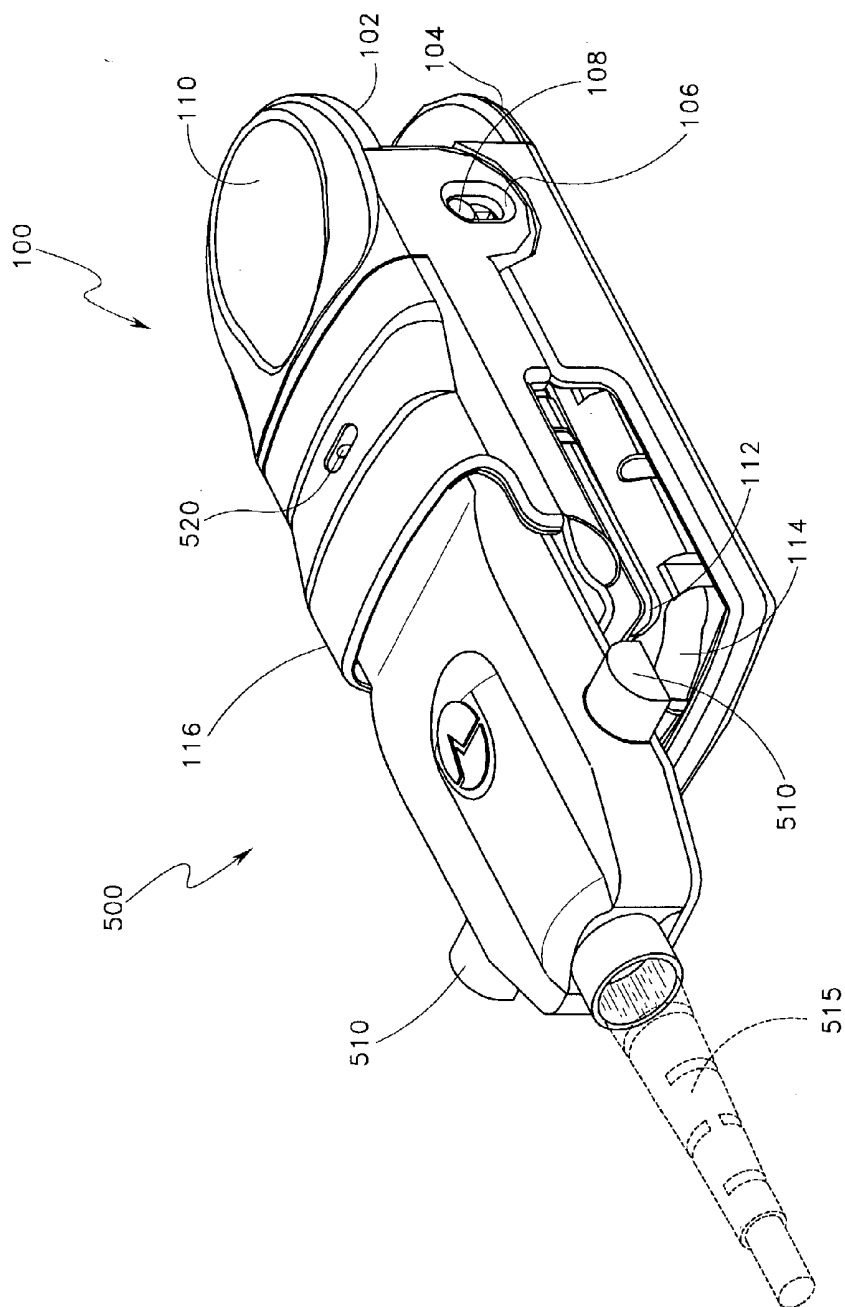


Fig. 6

SHIELDED OPTICAL PROBE HAVING AN ELECTRICAL CONNECTOR

REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority under 35 U.S.C. § 122 to the following patent applications, all of which are incorporated herein by reference. The present application is a continuation of U.S. patent application Ser. No. 09/770,757, filed Jan. 25, 2001, entitled "SHIELDED OPTICAL PROBE HAVING AN ELECTRICAL CONNECTOR," which is a continuation-in-part of U.S. patent application Ser. No. 09/420,544, filed Oct. 19, 1999, entitled "SHIELDED OPTICAL PROBE AND METHOD." The present application is also continuation-in-part of U.S. patent application Ser. No. 09/094,202, filed Jun. 9, 1998, entitled "LOW-NOISE OPTICAL PROBES," now U.S. Pat. No. 6,256,523, which is a continuation of U.S. patent application Ser. No. 08/543,789, filed Oct. 16, 1995, entitled "LOW-NOISE OPTICAL PROBES," now U.S. Pat. No. 5,782,757, which is a continuation-in-part of U.S. patent application Ser. No. 08/333,132, filed Nov. 1, 1994, entitled "LOW-NOISE OPTICAL PROBE," now U.S. Pat. No. 5,638,818, which is a continuation-in-part of U.S. patent application Ser. No. 07/672,890, filed Mar. 21, 1991, entitled "LOW NOISE OPTICAL PROBE," now abandoned. Further, the present application is a continuation-in-part of U.S. patent application Ser. No. 09/404,060, filed Sep. 23, 1999, entitled "PULSE OXIMETRY SENSOR ADAPTER," now U.S. Pat. No. 6,349,228, which is a continuation of U.S. patent application Ser. No. 09/021,957, filed Feb. 11, 1998, entitled "PULSE OXIMETRY SENSOR ADAPTER," now U.S. Pat. No. 5,995,855. In addition, the present application is a continuation-in-part of U.S. patent application Ser. No. 09/708,251, filed Nov. 7, 2000, entitled "PATIENT CABLE CONNECTOR," now U.S. Pat. No. 6,280,213, which is a continuation of U.S. patent application Ser. No. 09/318,563, filed May 26, 1999, entitled "PATIENT CABLE CONNECTOR," now abandoned, which is a continuation of U.S. patent application Ser. No. 08/838,392, filed Apr. 9, 1997, entitled "PATIENT CABLE CONNECTOR," now U.S. Pat. No. 5,934,925, which is a continuation of U.S. patent application Ser. No. 08/543,297, filed Oct. 16, 1995, entitled "PATIENT CABLE CONNECTOR," now U.S. Pat. No. 5,645,440.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates in general to low-noise optical probes which use optical energy to determine the characteristics of a medium, and in particular to optical probes having flexible, secure connectors for communicating signals to and from the probe.

[0004] 2. Description of the Related Art

[0005] Electromagnetic, light or acoustic signals with known characteristics, when transmitted through or reflected in a medium, may reveal important information about that medium. In the field of medical testing and diagnosis, for example, light, heat or sound signals may be directed at a patient, transmitted or reflected through the patient's body, and received and compared with the original signal or wave. As a result, information about the patient's condition can be deduced without invasive testing, and information can be

gathered continuously with minimal patient discomfort. For example, during surgery, blood oxygen saturation can non-invasively be deduced and continuously monitored.

[0006] Typically, reusable and disposable optical probes are employed to measure an amount of transmitted or reflected light through an accessible part of the body, such as a finger, an earlobe, loose skin, a forehead, or the like. For example, reusable and disposable optical probes or sensors having the foregoing characteristics are disclosed and described in U.S. Pat. No. 5,782,757.

[0007] The foregoing sensors typically incorporate a light source such as a light-emitting diode (LED) placed on one side of the body part, and a photodetector placed on an opposite side of the body part. The sensor may also connect to external monitoring equipment through a wire or cable. For example, reusable sensors often connect to external monitoring equipment through a permanent, plastic molded connection between the sensor and the cable.

[0008] The foregoing sensors suffer from at least several drawbacks. For example, the sensor is often limited to the useful life of the permanent plastic molded wire in that when the wire fails, the sensor is rendered inoperable despite its continuing functionality. Likewise, when the sensor fails, the wire or cable, the cost of which may not be trivial, is also rendered useless. In addition, existing reusable sensors do not have the capability to connect to monitoring equipment in a secure, reusable, yet flexible manner.

SUMMARY OF THE INVENTION

[0009] Based on at least the foregoing, there is a present need for an optical probe having an electrical connector designed to connect the sensor to external monitoring equipment in a secure, reusable, yet flexible manner. According to one embodiment, the optical probe is usable with a patient cable connector designed to engage disposable or reusable/disposable optical probes.

[0010] In one aspect of the invention, an improved optical probe assembly is disclosed which incorporates an electrical connector. The electrical connector includes a flexible plastic tab, on which is placed a flexible circuit. The plastic tab and circuit are typically at least partially enclosed in a protective housing. A separate patient cable connector attaches to the electrical connector via the flexible plastic tab, and a wire or other communications link connects the patient cable connector to external monitoring equipment. According to one embodiment, the electrical connector mates the patient cable connector in a manner that prevents incorrect engagement that may damage portions of the optical probe or patient cable connector.

[0011] In another aspect of the invention, an improved optical probe is disclosed having an electrical connector. According to one embodiment, once the patient cable connector has been connected to the electrical connector, the flexible plastic tab is locked into place within the patient cable connector via a locking aperture on the flexible plastic tab. The resulting connection is flexible, but electrically secure.

[0012] In another aspect of the invention, an improved optical probe assembly is disclosed with an electrical connector designed to accept connections to various external monitoring equipment and may accept connections using

various types of wires. Thus, the patient cable connector may be connected to, for example, a wireless transmitter and/or battery, eliminating the need for a wire at all. Additionally, the type of wire may be varied based on patient needs, and the replacement of wires and patient cable connectors may take place separately as needed from the replacement of optical probes.

[0013] In another aspect of the invention, an improved optical probe assembly is disclosed having an electrical connector adaptable for use with patient cable connectors designed for disposable, reusable, durable, and combination reusable/disposable sensors. Through the use of a standardized or universal patient cable connectors, optical sensors are advantageously used interchangeably and easily adapted to different monitoring equipment and patient conditions.

[0014] In another aspect of the invention, an improved optical probe assembly is disclosed with an electrical connector which is protected from fluids and the environment surrounding the sensor. Additionally, both a patient cable connector and protective housing over the electrical connector include shielding to prevent leakage of electromagnetic radiation which otherwise might interfere with operation of the optical probe.

[0015] In yet another aspect of the invention, an improved optical probe is disclosed with an electrical connector. The optical probe includes an improved pivoting mechanism around the finger such that the internal geometry of the light source, finger material, and photodetector are subject to less variation from finger movement. In addition, the optical probe provides more consistent pressure on the finger throughout the mechanism, uses fewer parts, includes a more straightforward assembly, and is less expensive to achieve appropriate geometry and pressure results.

[0016] Therefore, an aspect of the invention is an optical probe for irradiating tissue and producing a signal indicative of a physiological parameter of the tissue. The optical probe comprises a housing substantially securing a light source and a detector to tissue at a measurement site, thereby allowing the detector to produce a signal indicative of at least one physiological parameter of the tissue. The optical probe also comprises a plugable electrical connector forming a releasable connection with a cable connector, wherein the electrical connector includes a plurality of conductive paths electrically communicating with the light source and the detector. The cable connector electrically communicates with external monitoring equipment.

[0017] Another aspect of the invention is a reusable pulse oximetry sensor for producing a signal indicative of at least one physiological parameter of tissue. The sensor comprises an upper housing having a first circuit element comprising one of a light source and a detector, and a first wire connected to the first circuit element. The sensor also comprises a lower housing having a second circuit element comprising the other of the light source and the detector, and a second wire connected to the second circuit element. The sensor also comprises a hinge-like joint adjustably coupling the upper housing and lower housing and an electrical connector having a tab and a flexible circuit mounted on the tab and comprising a plurality of conductive paths. One of the conductive paths electrically connects to the first wire while another of the conductive paths electrically connects to the second wire, thereby providing an electrical connec-

tion from the conductive paths of the electrical connector to the light source and the detector.

[0018] Another aspect of the invention is a reusable pulse oximetry sensor for producing a signal indicative of at least one physiological parameter of tissue. The sensor comprises an upper housing having a first circuit element comprising one of a light source and a detector, and a lower housing having a second circuit element comprising the other of the light source and the detector. The sensor also comprises a hinge-like joint adjustably coupling the upper housing and lower housing, and an electrical connector having a tab, and a flexible circuit mounted on the tab and comprising a plurality of conductive paths. One of the conductive paths electrically connects to the detector while another of the conductive paths electrically connects to the light source.

[0019] Another aspect of the invention is an optical probe for non-invasively collecting a signal indicative of a physiological parameter of tissue. The optical probe comprises a light source, a detector, a connector having a flexible circuit mounted on a durable tab, and a protective housing at least partially covering the flexible circuit mounted on the durable tab.

[0020] Another aspect of the invention is a method of determining a physiological parameter of tissue using a non-invasive optical probe. The method comprises positioning a light source of a non-invasive optical probe to irradiate a measurement site with light, and positioning a detector of the probe to detect light which interacts with the measurement site. The method also comprises releasably connecting an external monitoring equipment cable to the probe through a flexible circuit mounted on a durable tab having a protective cover. Also, at least one the conductive paths electrically communicates with the light source and at least one of the conductive paths electrically communicates with the detector.

[0021] Another aspect of the invention is an electrical connector, comprising a flexible durable tab configured to guide a cable connector around the tab, thereby engaging the electrical connector to the cable connector. The connector also comprises a flexible circuit mounted on the flexible tab and electrically communicating with electrical contacts of the cable connector. The connector also comprises a locking mechanism releasably locking the electrical connector to the cable connector, and a protective cover covering at least a portion of the flexible circuit.

[0022] For purposes of summarizing the invention, certain aspects, advantages and novel features of the invention have been described herein. It is to be understood that not necessarily all such aspects, advantages or features will be embodied in any particular embodiment of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] FIG. 1 is a perspective view of an optical probe with an electrical connector according to aspects of one embodiment of the present invention.

[0024] FIG. 2 is a perspective view of the optical probe of FIG. 1 with a protective housing raised above the probe housing, according to aspects of an embodiment of the present invention.

[0025] FIG. 3A is an exploded view of the optical probe of FIG. 1, according to aspects of an embodiment of the present invention.

[0026] FIG. 3B is an exploded view of the optical probe of FIG. 1, according to aspects of another embodiment of the present invention.

[0027] FIG. 4 is a cross-sectional view of the optical probe of FIG. 1, according to aspects of an embodiment of the present invention.

[0028] FIG. 5 is a perspective view of the optical probe of FIG. 1 with a patient cable connector, according to aspects of an embodiment of the present invention.

[0029] FIG. 6 is a perspective view of the optical probe of FIG. 1 engaged to the patient cable connector of FIG. 5, according to aspects of an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0030] The invention is described in detail below with references to the figures, where like elements are referenced with like numerals throughout. The term probe and sensor are used interchangeably herein.

[0031] FIG. 1 illustrates an optical probe 100 according to one embodiment of the invention. As shown in FIG. 1, the optical probe 100 comprises an upper housing 102 and a lower housing 104. According to this embodiment, the upper housing 102 and the lower housing 104 oppose one another and are configured to include components designed to accept a measurement site for the tissue of a patient. For example, according to the embodiment shown in FIG. 1, the optical probe 100 is configured to accept a digit of a patient as a measurement site.

[0032] According to one embodiment, the upper and lower housings, 102 and 104, comprise injection moldable thermoplastic material or other suitable medium. As further illustrated in FIG. 1, the upper housing 102 comprises an aperture 106 while the lower housing 104 further comprises a pivoting element 108. According to one embodiment, the aperture 106 and the pivoting element 108 combine to form a hinge-like joint where the hinge-like joint allows the upper housing 102 to pivot from the lower housing 104 through a central axis defined, for example, by the pivoting element 108. Thus, according to this embodiment, an open end of optical probe 100 opens as the upper housing 102 pivots away from the lower housing 104, thereby providing an area designed to accept tissue to be measured. According to one embodiment, the upper housing 102 and the lower housing 104 may each advantageously include a finger recess surface 110 formed to provide a comfortable, securing edge where, for example, medical staff or the user may advantageously squeeze a pivoting end of the optical probe 100, thereby opening the open end thereof.

[0033] Although the foregoing is described with reference to preferred and alternative embodiments, a skilled artisan will recognize from the disclosure herein that the optical probe 100 may comprise a wide number of mechanical devices designed to substantially secure the upper housing 102 and the lower housing 104 to a measurement site in a manner sufficient for the optical probe 100 to perform reliable measurements. Such mechanical devices may replace or work in conjunction with the foregoing hinge-like joint.

[0034] According to yet another embodiment of the invention, the upper housing 102 further comprises an upper support surface 112, while the lower housing 104 further comprises a lower support surface 114. According to this embodiment, the upper support surface 112 and the lower support surface 114 provide additional supporting structure for tissue when the tissue is placed in the optical probe 100. For example, as shown in FIG. 1, the upper and lower support surfaces, 112 and 114, are configured to accept a digit in a manner that is comfortable for the patient, advantageously helps substantially secure the optical probe 100 to a measurement site on the digit, provides at least a partial seal against ambient light, and provides for relatively straightforward replacement, sterilization, or both.

[0035] According to one embodiment, the upper and lower support surfaces, 112 and 114, comprise injection moldable thermoplastic elastomer material or other suitable medium. FIG. 1 also illustrates the optical probe 100 having a protective housing 116 and an electrical connector 118, according to aspects of yet another embodiment of the invention. As shown in FIG. 1, the protective housing 116 comprises a raised surface at least partially covering the electrical connector 118. According to yet another embodiment, the protective housing 116 may advantageously protect a cable connector, which connects the optical probe 100 to external monitoring equipment. The foregoing cable connector is further disclosed with reference to FIGS. 5 and 6.

[0036] According to an embodiment of the invention, the protective housing 116 advantageously protects the electrical connector 118 from environmental conditions external to the sensor. For example, according to one embodiment, the protective housing 116 may advantageously substantially seal the electrical connector 118 to the foregoing cable connector, thereby protecting the engaged connectors from fluids, dirt, ordinary wear and tear, or the like.

[0037] According to yet another embodiment, when the protective housing 116 is formed at least partially to fit the shape of a known external connector, such as the patient cable connector described with reference to FIGS. 5 and 6, the protective housing 116 may advantageously assist in creating a secure but removable electrical connection, through, for example, a substantially sealable or friction fit relationship.

[0038] Although disclosed with respect to preferred and alternative embodiments, a skilled artisan will recognize from the disclosure herein that the protective housing 116 may advantageously be mounted in a reverse direction from that shown in FIG. 1, or placed on the lower housing 104. Moreover, a skilled artisan will recognize from the disclosure herein that the functions performed by the protective housing 116 may be performed by the upper housing 102 or lower housing 104, when the foregoing housings are appropriately shaped to carry the electrical connector 118. Thus, it is foreseen that the functions of the protective housing 116 may advantageously be performed by any of the housings of the optical probe 100 in a wide number of configurations.

[0039] According to one embodiment, the protective housing 116 generally comprises the same or similar material and is formed in the same or similar manner as that of the upper housing 102 or the lower housing 104.

[0040] According to one embodiment, the electrical connector 118 comprises a flexible plastic tab 120 having a

connection tab protrusion 122 with a locking aperture 124 and a flexible circuit 126. According to one embodiment, the flexible plastic tab 120 is rectangular in shape with the elongated portion of the rectangle being aligned with an elongated axis of the optical probe 100. According to one embodiment, one end of the tab 120 terminates in a semi-circular tongue, thereby forming the connection tab protrusion 122. The connection tab protrusion 122 includes the locking aperture 124.

[0041] According to another embodiment, the tab 120 provides a durable yet flexible mounting surface for at least a portion of the flexible circuit 126. By using flexible materials, the tab 120 serves a shock absorbing function for movement, for pushes and pulls on the optical probe 100, and for connections made to the electrical connector 118. In addition, the connection tab protrusion 122 and locking aperture 124 may advantageously serve as a tongue to substantially secure an electrical connection made between the electrical connector 118, and, for example, a patient cable connector. In addition, the locking aperture 124 provides a catch to prevent accidental unplugging of the electrical connector 118.

[0042] The foregoing tab 120 also advantageously guides a mating cable connector, such as those cables connectors connecting the optical probe 100 to external monitoring equipment, into secure, removable, electrical contact with the electrical connector 118. Through such connection, the tab 120 provides electrical communication between the external monitoring equipment and the light source or photodetector of the optical probe 100. Accordingly, the tab 120 advantageously provides a secure, plugable, connection between the electrical components of the sensor and external monitoring equipment. Furthermore, the tab 120 provides a shock absorbing connection between the optical probe 100 and an external connection. At the same time, the locking aperture 124 and the connection tab protrusion 122 provide a latch opening for a secure but removable locking mechanism securing the electrical connector 118 of the optical probe 100 to an external patient cable connector. According to one embodiment, the tab 120 comprises injection moldable thermoplastic material or other suitable medium.

[0043] FIG. 2 illustrates the optical probe 100 with the protective housing 116 lifted from the upper housing 102. The protective housing 116 is, in one embodiment, attached to the upper housing 102 through a tab and aperture mechanism. For example, as shown in FIG. 2, the protective housing 116 may include securing tabs 128, such as detents or latches, which lock into apertures 130 on the upper housing 102. However, it is foreseen that the protective housing 116 may be attached by any commonly used means including plastic molding, locking components, screws, and the like. It is further foreseen that, in the absence of the protective housing 116, the flexible plastic tab 120 may advantageously directly connect to the upper housing 102.

[0044] FIG. 2 also shows one embodiment of the attachment of the electrical connector 118 to the optical probe 100. For example, in one embodiment of the electrical connector 118, the flexible plastic tab 120 comprises locking protrusions 132 protruding perpendicularly to the general elongated shape of the tab 120. In addition, the upper housing 102 includes locking slots 134 designed to mate with the locking protrusions 132, thereby substantially securing the

tab 120 to the upper housing 102. According to one embodiment, optical probe 100 includes multiple locking protrusions 132 and multiple corresponding locking slots 134, thereby decreasing potential lateral movement of the plastic tab 120 during electrical connection of electrical connector 118 to external monitoring equipment. A skilled artisan will recognize from the disclosure herein that the locking slots 134 may comprise a wide number of connection mechanisms, including, for example, plastic molding, locking components, screws, adhesive, staples, and the like.

[0045] According to yet another embodiment, the electrical connector 118, including the flexible plastic tab 120, may advantageously be at least partially raised or suspended between the upper housing 102 and the protective housing 116. Thus, the upper housing 102 and the protective housing 116 may advantageously together form a pocket or guide, within which the tab 120 protrudes to connect to appropriately shaped electrical mating devices. A skilled artisan will recognize that the electrical connector 118 may also be suspended within the upper housing 102 when the upper housing 102 is altered to perform the function of the protective housing 116.

[0046] Advantageously, the attachment of the electrical connector 118 to the upper housing 102 (or another housing) of the optical probe 100 allows the electrical connector 118 to serve as a secure but removable electrical connection between the optical probe 100 and external monitoring devices, while at the same time allowing the electrical connector 118 to include a shock absorbing function against patient movement or other agitation of the optical probe 100.

[0047] Advantageously, the electrical connector 118 of FIG. 2 is connectable to cables provided, for example, for use with disposable optical probes. Thus, the electrical connector 118 allows users to choose the optical probe most suitable for a specific condition. For example, when a patient may have a particularly fluid or soiled condition, such as, for example, a burn victim, a health care provider may wish to use typically more expensive disposable optical probes. Once the patient has recovered to a less infecting or electronically damaging environment, the health care provider may advantageously change to the typically less expensive reusable probes without changing the cables connected to the external monitoring equipment.

[0048] FIG. 2 also shows the electrical connector 118, and in particular, the flexible circuit 126 partially covered by one or more protective flaps 136. According to one embodiment of the invention, the flexible circuit 126 includes a number of conductive paths, each conductive path electrically connected to one or more electrical components, such as a light source or a detector. The conductive paths of the circuit may be made from any known conductor, such as silver, copper, and the like. As the conductive paths change from the pattern represented in the portion mating with an external monitoring equipment connector, to patterns designed to provide contacts with the various electrical components, the conductive paths, and therefore, the flexible circuit 126, are covered by the protective flaps 136. Accordingly, the protective flaps 136 advantageously guard against damage or electrical shorts in the conductive paths.

[0049] FIG. 3A shows an exploded view of the optical probe 100 including the electrical connector 118. For example, FIG. 3A emphasizes an embodiment of the pro-

protective flaps 136 and how, according to that embodiment, the protective flaps 136 may be folded to create a faraday shield for the flexible circuit 126, thus protecting it from electromagnetic interference.

[0050] Advantageously, electrical power and signals can be transmitted between the optical probe 100 and external monitoring devices via the electrical connector 118 in a secure, interchangeable, replaceable, shock absorbing, and universal manner. For example, the optical probe 100, an external cable connector or another compatible connector, and in one embodiment the electrical connector 118, may advantageously be independently replaceable, such that failure or wear of one component does not require replacement of other related components.

[0051] FIG. 3A also shows the optical probe 100, and in particular, the upper housing 102, comprising one or more light emitting diodes (LEDs) 138, although it will be appreciated that other light generating devices may be used. The LEDs 138 provide a light source for the optical probe 100 and are electrically connected to the flexible circuit 126 through the conductive path and one or more wires. The construction and operation of the LEDs 138 and their drive circuitry is described in U.S. Pat. No. 5,758,644, which is incorporated herein by reference.

[0052] FIG. 3A also shows the optical probe 100, and in particular, the lower housing 104, comprising a detector 140, such as a photodetector, designed to detect an amount of light energy passed from the LEDs 138, through the tissue at the measurement site. For example, the LEDs 138 may shine light energy through an aperture in the upper housing 102, through the patient tissue, through an aperture in the lower housing 104 and onto the detector 140. Alternatively, a skilled artisan will recognize from the disclosure herein that the optical probe 100 may incorporate housing adapted for a reflective detector. However, the detector 140 shown in FIG. 3A, is attached to internal wiring eventually electrically communicating with one or more of the conductive paths on the flexible circuit 126.

[0053] FIG. 3A also illustrates the optical probe 100 having multiple transparent covers 142A and 142B, preferably comprising transparent polymer, which act as protection for the LEDs 138 and for the detector 140. The construction and operation of the covers 142, including the potential of including physical and optical properties or characteristics therein, is described in U.S. patent application Ser. No. 09/420,544, which is incorporated herein by reference.

[0054] According to yet another embodiment, the optical probe 100 includes a biasing spring 144 preloaded or partially wound so as to bias the upper housing 102 against the lower housing 104, thereby biasing the open end of the optical probe 100 into a closed position around the tissue at the measurement site, for example, around the digit of a patient. In this manner, the finger recesses 110 allow a user to grasp the optical probe 100 between their fingers and apply force counter to the biasing spring 144, thereby opening the open end of the optical probe 100 for insertion of, for example, the distal end of a digit.

[0055] According to yet another embodiment, the lower housing 104 also comprises opposing vertical risers 146, each including at least one of the pivoting elements 108. As

discussed above when the lower housing 104 and the upper housing 102 are coupled, the pivoting element 108 and the aperture 106 form a pivoting hinge-like joint, which allows the optical sensor to comfortably adjust position while maintaining the proper geometry between the patient tissue, the light source, and the photodetector.

[0056] FIG. 3B shows an exploded view of another embodiment of the optical probe 100 including the electrical connector 118. In one embodiment of the optical probe 100 illustrated in FIG. 3B, the flexible circuit 126 includes flexible circuit extensions 204 and 206. The first flexible circuit extension 204 extends the flexible circuit 126 to the LED 138. Similarly, the second flexible circuit extension 206 extends the flexible circuit 126 to the detector 140. The flexible circuit extensions 204 and 206 are part of the flexible circuit 126, and are constructed from the same or similar materials.

[0057] Advantageously, the flexible circuit extensions 204 and 206 reduce the construction cost of the optical probe 100 by removing the need for any number of wires to be added and connected to any number of sensor elements. In addition, the substantially flat flexible circuit extensions 204 and 206 do not hinder the flexibility of the optical sensor at the hinge-like joint.

[0058] Furthermore, the flexible circuit 126 in one embodiment includes a coding resistor 202 in parallel with the LED 138. The coding resistor 202 can be used, for example, to indicate the type of optical probe 100. In other words, the value of the coding resistor 202 can be selected to indicate that the optical probe 100 is an adult probe, a pediatric probe, a neonatal probe, a disposable probe, a reusable probe, or the like. The coding resistor 202 can also be utilized for security purposes. In other words, the value of the coding resistor 202 can be used to indicate that the optical probe 100 is from an authorized sensor supplier. This permits control over safety, quality, and performance concerns which can arise with unauthorized sensors. In addition, the coding resistor 202 can be used to indicate physical or operating characteristics of the optical probe 100, such as the wavelengths of the LEDs 138. Additional disclosure related to uses and specific embodiments of the coding resistor 202 can be found in U.S. patent application Ser. No. 09/404,060, filed Sep. 23, 1999, entitled "PULE OXIMETRY SENSOR ADAPTER," now U.S. Pat. No. 6,349,228, which is incorporated herein by reference. The coding resistor 202 can be read by an external monitoring system, such as that described in U.S. patent application Ser. No. 08/478,493, filed Jun. 7, 1995, entitled "MANUAL AND AUTOMATIC PROBE CALIBRATION," now U.S. Pat. No. 5,758,644, which is incorporated herein by reference.

[0059] FIG. 4 shows a cross sectional view of one embodiment of the optical probe 100 with the electrical connector 118. As shown in FIG. 4, the flexible plastic tab 120 is housed between the protective housing 116 and the upper housing 102. According to this embodiment, the connection tab protrusion 122 and the locking aperture 124 of the flexible plastic tab 120 are advantageously accessible to the environment outside of the optical probe 100.

[0060] As illustrated in FIG. 4, one or more of the conductive paths on the flexible circuit 126 are connected by a first internal wire 148 to the LEDs 138 housed within the upper housing 102. In addition, FIG. 4 shows one or more

of the conductive paths on the flexible circuit 126 being connected by a second internal wire 150 to the detector 140 housed within the lower housing 104. Moreover, the cross sectional view of FIG. 4 illustrates the biasing spring 144 being positioned and biased between the upper housing 102 and the lower housing 104 to provide resistance and tension as discussed above.

[0061] FIG. 4 also illustrates the protective housing 116, in one embodiment, partially protecting the electrical connector 118 as the electrical connector 118 is at least partially suspended between the protective housing 116 and upper housing 102, thereby providing ease of connectability, along with 360 degrees of support for the connection. For example, the connection is supported from beneath by the cable connector being in contact with the upper housing 102, from the sides and from above by contact with the protective housing 116, and from the center by the electrical connector 118. In addition to the foregoing, skilled artisans can foresee from the disclosure herein alternative embodiments such as alternative orientations or placements of the electrical connector 118, such as, for example, in the lower housing 104.

[0062] FIG. 5 shows the optical probe 100 including the electrical connector 118 in one embodiment where an external plug, such as, for example, a patient cable connector 500 is adapted to securely and releasably form a plugable electrical connection. For example, FIG. 5 shows the patient cable connector 500 having a receptor end 505, a releasing mechanism 510, and external wire 515. According to one embodiment, the receptor end 505 is designed to electrically mate with the electrical connector 118. For example, the receptor end 505 may advantageously include electrical contacts that, when the patient cable connector 500 engages the optical probe 100, the electrical contacts line up and electrically communicate with conductive paths on the flexible circuit 126. The electrical contacts in the patient cable connector 500 then communicate with the external wire 515 to communicate signals to and from external monitoring equipment (not shown). The construction and operation of the patient cable connector 500, its electrical contacts and circuitry, as well as the release mechanism 510, are described in U.S. Pat. Nos. 5,645,440, 5,934,925, and 6,280,213, which are incorporated herein by reference.

[0063] According to one embodiment, the shape of the connection tab protrusion 122 is adjusted to fit snugly with the patient cable connector 500, and the internal shape (in this case, concave) of the protective housing 116 is adapted to snugly fit the external surface of the patient cable connector 500. According to one embodiment, the protective housing 116, the tab 120, and the contacts of the patient cable connector 500 work together to form a friction fit relationship firmly securing the connector 500 to the optical probe 100.

[0064] According to one embodiment, once the patient cable connector 500 has been connected to the electrical connector 118, the flexible plastic tab 120 is locked into place within the connector 500 via the locking aperture 124 on the tab 120. The resulting connection is advantageously flexible, but electrically secure. For example, the foregoing connection prohibits accidental pulls or patient agitation from dislodging the electrical connection while maintaining relatively easy release of the connection through the locking mechanism. Thus, the foregoing connection provides a

flexible but secure connection, thereby ensuring jolts, accidental pulls, or patient agitation have a reduced impact on the secure operation of the optical probe 100.

[0065] FIG. 5 also shows a sensor life indicator 520, according to additional embodiments of the invention. For example, the indicator 520 may advantageously comprise one or more LEDs designed to indicate to the user that the useful life of the optical probe 100 has expired, due to wear, overuse, malfunction, or the like. According to one embodiment, the determination of the useful life is made within circuitry of the optical probe 100. For example, the optical probe 100 may advantageously include one or more memory registers or counters for storing an indication of the use of the optical probe 100. For example, the memory registers may count the number of drive pulses received by the optical probe 100, the number of return signals generated by the detector 140, or the like. In addition, the optical probe 100 may use any number of known oscillators or oscillating circuits to generate a measure of time or use. According to this embodiment, once the data stored in the memory registers reaches a predetermined threshold, the sensor life indicator 520 is activated, such as, for example, the emission of a constant or blinking light, such as, for example, a red light.

[0066] According to one embodiment, the determination of the useful life of the optical probe 100 may advantageously be made using the external monitoring equipment, or a combination of the optical probe 100 and the external monitoring equipment. In such embodiments, a signal may advantageously be passed from the external monitoring equipment to the sensor life indicator 520 for activation thereof. Additional disclosure and specific embodiments of the sensor life indicator 520 may advantageously be found in U.S. patent application Ser. No. 09/502,032 filed Feb. 10, 2000, entitled "SENSOR LIFE MONITOR SYSTEM," which is incorporated herein by reference.

[0067] A skilled artisan will recognize from the disclosure herein that the sensor life indicator 520 can be implemented in a number of alternative embodiments. For example, the sensor life indicator 520 can be visible through an aperture on the patient cable connector 500 or can be integrated with the flexible circuit 126. In addition, the sensor life indicator 520 may advantageously be placed on virtually any housing or extension of the optical probe 100. Moreover, the sensor life indicator 520 may advantageously provide an indication of proper use, continued usefulness, proper application, or the like, through the use of another signal, such as, for example, a green light.

[0068] As discussed above, the sensor life indicator 520 advantageously permits a user of the optical probe 100 to recognize when the useful life of the probe's components is near an end due to wear, overuse, or the like. Without the sensor life indicator 520, the user can only approximate or guess when the optical probe 100 should be replaced, or wait until the optical probe 100 ceases to function properly.

[0069] FIG. 6 shows the patient cable connector 500 engaged with or attached to the optical probe 100, according to one embodiment of the invention. The optical probe 100, in one embodiment, includes the sensor life indicator 520. According to one embodiment, the patient cable connector 500 may advantageously be locked in an engaged position through the locking aperture 124. According to yet another

embodiment of the invention, the patient cable connector **500** and the optical probe **100** form a substantially secure, yet releasable, seal. According to one embodiment, the seal may be resistant to fluids or the like.

[0070] The probe **100** may be employed in any circumstance where a measurement of transmitted or reflected energies is to be made, including but not limited to, measurements taken on a finger, an earlobe, a lip or a forehead and the like. Similarly, a skilled artisan will recognize from the disclosure herein that the electrical connector **118** may be adjusted to any number of embodiments. For example, a skilled artisan will recognize from the disclosure herein that the electrical connector **118** may be attached to the lower housing **104**, may be secured in an opposite or rotatable manner via a wide number of securement mechanisms, including those disclosed herein, hook-and-loop material, releasable or other latches, rotating securement mechanisms, or the like. Moreover, a skilled artisan will recognize from the disclosure herein the option of reversing components, for example, placing various components of the electrical connector **118** on the patient cable connector **500** and vice versa. In addition, the locking mechanism may include any number of a wide variety of known devices, such as, for example, thumb screws, hook-and-latch materials, straps, press or friction fit mechanisms, or the like.

[0071] In addition, a skilled artisan will recognize a wide number of other embodiments from the disclosure herein, including but not limited to, changes in the shape of the optical probe **100** and its components, changes in the shape of the flexible circuit **126**, or the like. In addition, different placement of the flexible circuit **126** upon the device and different shapes or positions of the protective housing **116**, when the protective housing **116** is used at all, are foreseen. Moreover, the described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention therefore is indicated by the appended claims rather than by the foregoing description.

What is claimed is:

1. A pulse oximetry system comprising:

a reusable optical probe comprising:

a first housing having a light source capable of producing light of at least first and second wavelengths for transmission through body tissue carrying pulsing blood;

a second housing having a light-sensitive detector capable of detecting said light of at least first and second wavelengths; and

a first connector coupled to said light source and said light-sensitive detector, wherein said first connector forms a part of said first housing or said second housing; and

a second connector for transmission of electrical signals between said reusable optical probe and a patient monitoring apparatus,

wherein said first connector and said second connector are configured to releasably form a plugable electrical connection with one another.

2. The pulse oximetry system of claim 1, wherein said first and second housings are coupled together at a hinge-like joint.

3. The pulse oximetry system of claim 2, wherein said first and second housings comprise an injection moldable thermoplastic material.

4. The pulse oximetry system of claim 1, wherein said first connector comprises a durable tab having a flexible circuit mounted thereon.

5. The pulse oximetry system of claim 4, wherein said flexible circuit comprises a plurality of conductive paths comprising silver or copper.

6. The pulse oximetry system of claim 1, wherein said first connector comprises a locking mechanism configured to releasably secure a temporary connection between said first connector and said second connector.

7. The pulse oximetry system of claim 6, wherein said first connector comprises a durable tab and said locking mechanism comprises an aperture in said durable tab.

8. The pulse oximetry system of claim 6, wherein said locking mechanism comprises a protective housing configured to form a friction fit relationship between said first connector and said second connector.

9. The pulse oximetry system of claim 1, wherein said reusable optical probe comprises a protective housing at least partially covering said first connector.

10. The pulse oximetry system of claim 9, wherein said protective housing at least partially covers said second connector when a temporary connection is made between said first connector and said second connector.

11. The pulse oximetry system of claim 10, wherein said protective housing is configured to substantially seal a temporary connection between said first connector and said second connector against external environmental conditions.

12. The pulse oximetry system of claim 1, wherein said reusable optical probe comprises a sensor life indicator.

13. The pulse oximetry system of claim 1, wherein said reusable optical probe comprises a coding resistor.

14. The pulse oximetry system of claim 1, wherein said electrical signals are transmitted between said reusable optical probe and said patient monitoring apparatus via a wire.

15. The pulse oximetry system of claim 1, wherein said electrical signals are transmitted between said reusable optical probe and said patient monitoring apparatus via a wireless communication path.

16. A cableless reusable pulse oximetry sensor comprising:

a light source capable of producing light of at least first and second wavelengths for transmission through body tissue carrying pulsing blood;

a light-sensitive detector capable of detecting said light of at least first and second wavelengths; and

a first connector having conductive paths in electrical communication with said light source and said light-sensitive detector,

wherein said first connector is configured to be releasably coupled to a second connector which enables electrical signals to be transmitted between said cableless reusable pulse oximetry sensor and patient monitoring equipment.

17. The cableless reusable pulse oximetry sensor of claim 16, further comprising an upper housing and a lower housing coupled together at a hinge-like joint.

18. The cableless reusable pulse oximetry sensor of claim 17, wherein said upper and lower housings comprise an injection moldable thermoplastic material.

19. The cableless reusable pulse oximetry sensor of claim 16, wherein said first connector comprises a durable tab having a flexible circuit mounted thereon.

20. The cableless reusable pulse oximetry sensor of claim 19, wherein said flexible circuit comprises a plurality of conductive paths comprising silver or copper.

21. The cableless reusable pulse oximetry sensor of claim 16, wherein said first connector comprises a locking mechanism configured to releasably secure a temporary connection between said first connector and said second connector.

22. The cableless reusable pulse oximetry sensor of claim 21, wherein said first connector comprises a durable tab and said locking mechanism comprises an aperture in said durable tab.

23. The cableless reusable pulse oximetry sensor of claim 21, wherein said locking mechanism comprises a protective housing configured to form a friction fit relationship between said first connector and said second connector.

24. The cableless reusable pulse oximetry sensor of claim 16, further comprising a protective housing at least partially covering said first connector.

25. The cableless reusable pulse oximetry sensor of claim 24, wherein said protective housing at least partially covers said second connector when a temporary connection is made between said first connector and said second connector.

26. The cableless reusable pulse oximetry sensor of claim 25, wherein said protective housing is configured to substantially seal a temporary connection between said first connector and said second connector against external environmental conditions.

27. The cableless reusable pulse oximetry sensor of claim 16, further comprising a sensor life indicator.

28. The cableless reusable pulse oximetry sensor of claim 16, further comprising a coding resistor.

29. The cableless reusable pulse oximetry sensor of claim 16, wherein said electrical signals are transmitted between said cableless reusable pulse oximetry sensor and said patient monitoring equipment via a wire.

30. The cableless reusable pulse oximetry sensor of claim 16, wherein said electrical signals are transmitted between said cableless reusable pulse oximetry sensor and said patient monitoring equipment via a wireless communication path.

* * * * *

专利名称(译)	具有电连接器的屏蔽光学探针		
公开(公告)号	US20030162414A1	公开(公告)日	2003-08-28
申请号	US10/404961	申请日	2003-03-31
[标]申请(专利权)人(译)	舒尔茨CHRISTIANê AL ALI AMMAR MASON EUGENEê MILLS迈克		
申请(专利权)人(译)	基督教舒尔茨E. AL-ALI AMMAR MASON EUGENE E. MILLS MIKE A.		
当前申请(专利权)人(译)	基督教舒尔茨E. AL-ALI AMMAR MASON EUGENE E. MILLS MIKE A.		
[标]发明人	SCHULZ CHRISTIAN E AL ALI AMMAR MASON EUGENE E MILLS MIKE A		
发明人	SCHULZ, CHRISTIAN E. AL-ALI, AMMAR MASON, EUGENE E. MILLS, MIKE A.		
IPC分类号	A61B5/00 A61B5/024 G01N21/86 H01R13/26 H01R13/627 H05K1/18 H01R39/00 H01J40/14		
CPC分类号	A61B5/02427 A61B5/14552 A61B5/6826 A61B5/6829 A61B5/6838 H05K1/189 H01R13/26 H01R13/6275 H01R23/10 H01R2201/12 A61B2562/08 H01R12/62		
其他公开文献	US7132641		
外部链接	Espacenet USPTO		

摘要(译)

非侵入式光学探针具有用于将光学探针连接到电缆连接器的电连接器。根据一个实施例，电连接器包括悬挂在光学探针的壳体和保护盖之间的耐用柔性凸片。根据各种实施例，电连接器还有利地形成柔性，可插拔，可锁定，可移除和可密封的电连接。

