



US 20090048495A1

(19) **United States**(12) **Patent Application Publication****Al-Ali et al.**(10) **Pub. No.: US 2009/0048495 A1**(43) **Pub. Date: Feb. 19, 2009**(54) **APPLICATION IDENTIFICATION SENSOR**

(75) Inventors: **Ammar Al-Ali**, Tustin, CA (US);
Massi E. Kiani, Laguna Niguel, CA (US);
Walter M. Weber, Laguna Hills, CA (US)

Correspondence Address:

KNOBBE MARTENS OLSON & BEAR LLP
2040 MAIN STREET, FOURTEENTH FLOOR
IRVINE, CA 92614 (US)

(73) Assignee: **Masimo Corporation**, Irvine, CA (US)

(21) Appl. No.: **12/254,748**

(22) Filed: **Oct. 20, 2008**

Related U.S. Application Data

(63) Continuation of application No. 11/071,875, filed on Mar. 3, 2005, now Pat. No. 7,438,683.

(60) Provisional application No. 60/549,996, filed on Mar. 4, 2004.


Publication Classification

(51) **Int. Cl.**
A61B 5/00 (2006.01)

(52) **U.S. Cl.** **600/300**

(57) **ABSTRACT**

An application identification sensor comprises a plurality of emitters configured to transmit light into a tissue site and a detector configured to receive the light after tissue absorption. The detector generates a signal responsive to the intensity of the light and communicates the signal to a monitor. An information element is readable by the monitor so as to identify a sensor application. The monitor presets at least one user-selectable operational parameter in response to the information element.

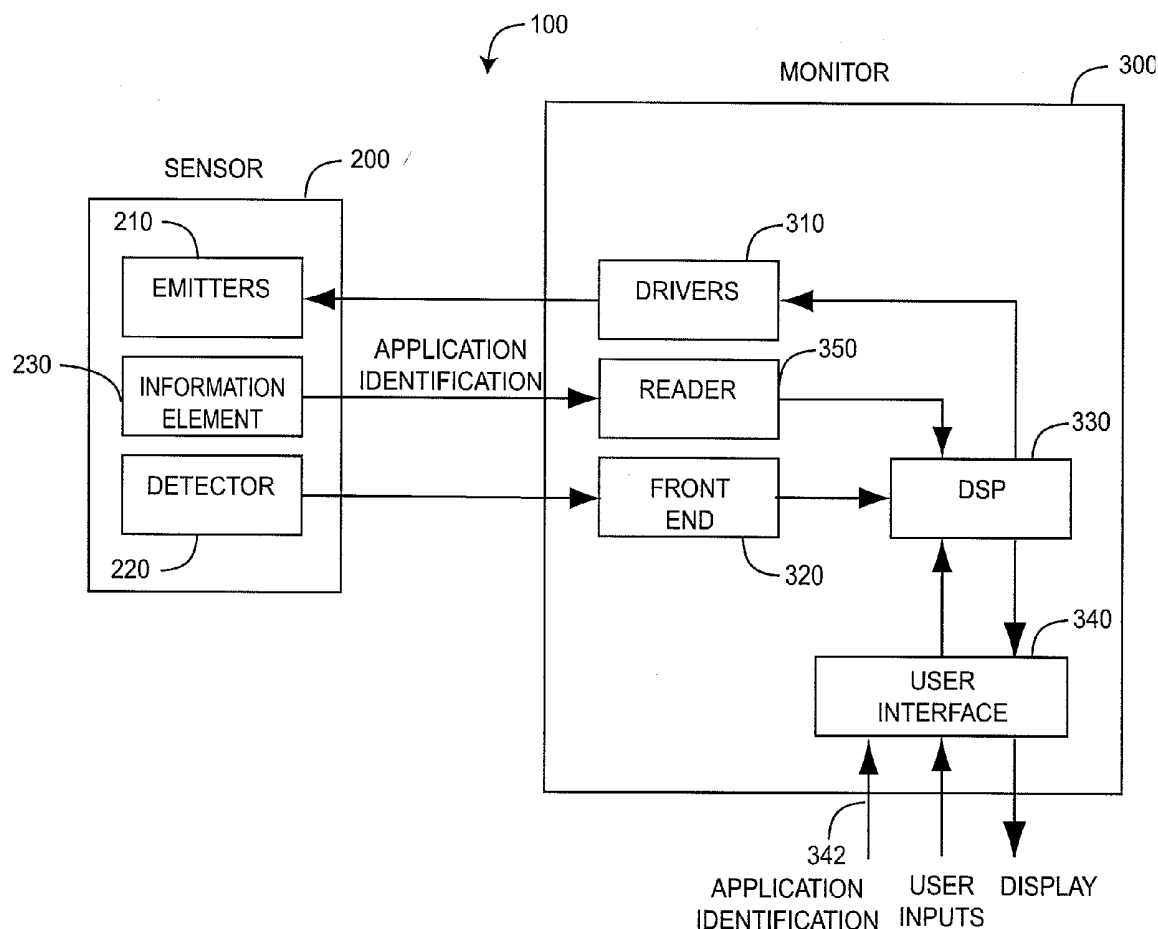

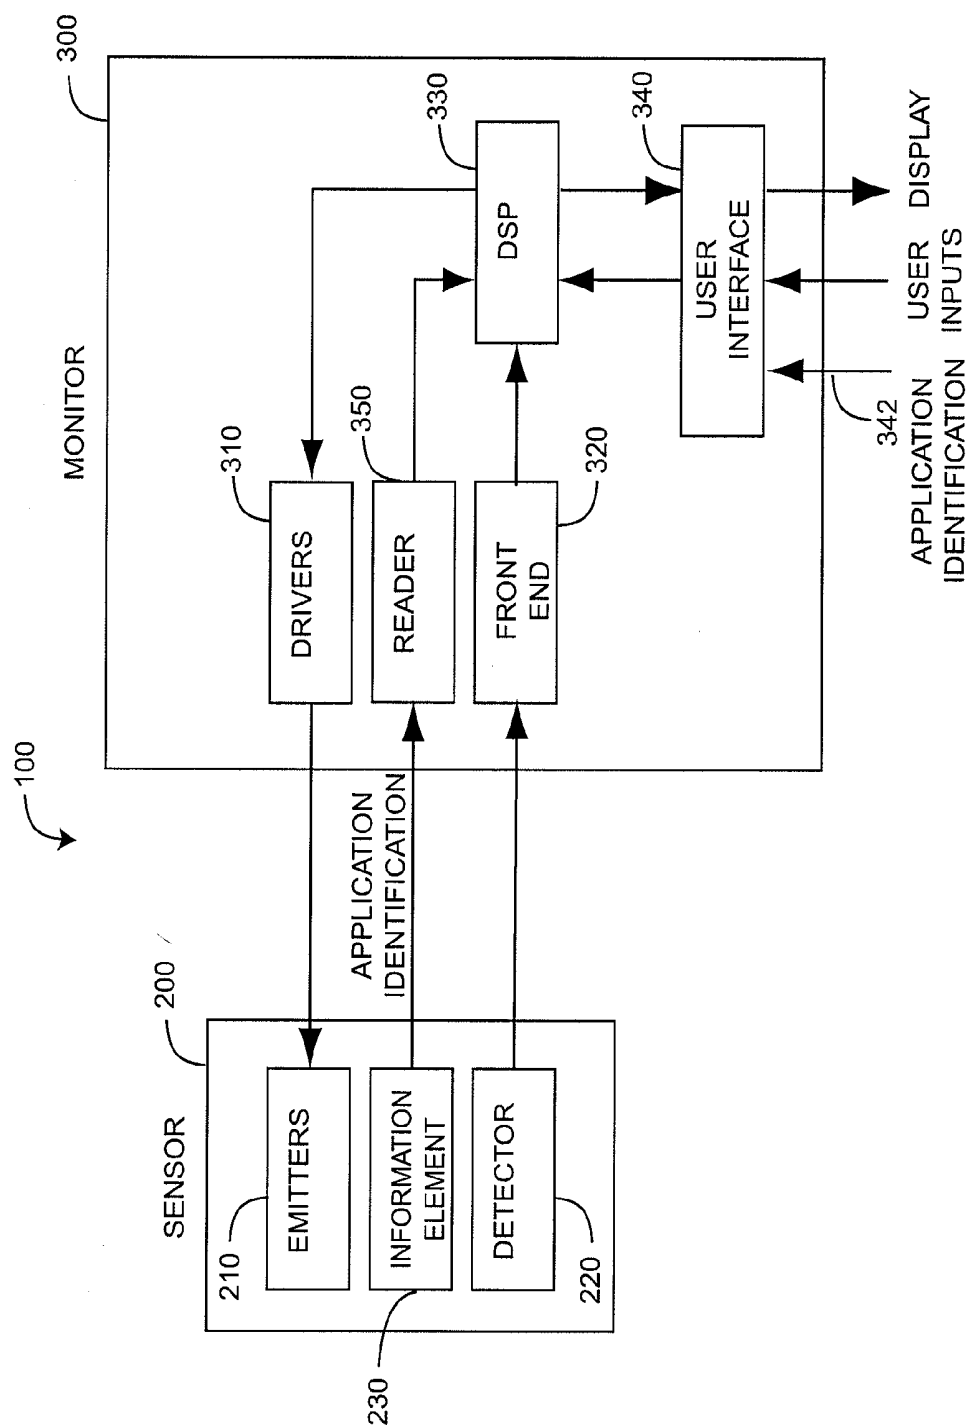


FIG. 1

APPLICATION IDENTIFICATION SENSOR

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 11/071,875, entitled "Application Identification Sensor," filed Mar. 3, 2005, which will issue as U.S. Pat. No. 7,438,683 on Oct. 21, 2008, which, claims a priority benefit under 35 U.S.C. §119(e) from U.S. Provisional Patent Application No. 60/549,996, entitled "Application Identification Sensor," filed Mar. 4, 2004. The present application incorporates the entirety of the aforementioned priority documents herein by reference.

BACKGROUND OF THE INVENTION

[0002] Pulse oximetry is a widely accepted noninvasive procedure for measuring the oxygen saturation level of arterial blood, an indicator of a person's oxygen supply. A typical pulse oximetry system has a sensor, a monitor and a patient cable providing a communication path between the sensor and monitor. The sensor is adapted to attach to a tissue site, such as a patient's finger, and respond to hemoglobin constituents of pulsatile blood. The monitor is adapted to receive a physiological signal from the sensor and provide a numeric readout of the patient's oxygen saturation and pulse rate.

SUMMARY OF THE INVENTION

[0003] A conventional pulse oximetry monitor processes the physiological signal from the sensor based upon sensor calibration data, internal algorithm parameters and user-selectable operational parameters. The sensor may have an information element that is readable by the monitor and that identifies one or more characteristics of the sensor. These characteristics may relate to sensor components, such as emitter wavelength, or the sensor type, such as adult, pediatric or neo-natal. The monitor may select calibration data and internal parameters accordingly. An information element may be a passive device, such as a resistor, or an active device, such as a transistor network, a logic device or a memory chip. An information element is described in U.S. Pat. No. 5,758,644 entitled Manual and Automatic Probe Calibration, which is assigned to Masimo Corporation, Irvine, Calif. and incorporated by reference herein.

[0004] One aspect of an application identification sensor comprises a plurality of emitters configured to transmit light into a tissue site and a detector configured to receive the light after tissue absorption. The detector generates a signal responsive to the intensity of the light and communicates the signal to a monitor. An information element is readable by the monitor so as to identify a sensor application. The monitor presets at least one user-selectable operational parameter in response to the information element. In one embodiment, the application relates to emergency care and the user-selectable operational parameter is selected from the set of sensitivity and averaging time.

[0005] Another aspect of an application identification sensor is a method where a sensor is attached to a monitor and an information element is read. Data from the information element is associated with an application, and user-selectable parameters corresponding to the application are preset. In one embodiment, the application is identified as emergency

related. In a particular embodiment, maximum sensitivity and minimum averaging time are selected for processing a signal from the sensor.

[0006] An aspect of an application identification apparatus comprises a sensor configured to generate a physiological signal and a monitor capable of processing the physiological signal so as to measure a physiological parameter responsive to a constituent of pulsatile blood. The monitor has an application identification input. User-selectable operational parameters for said monitor have values responsive to the application identification input. In one embodiment, the application identification input is provided by an information element associated with the sensor and readable by the monitor. In another embodiment, the application identification input is provided by a user-actuated button associated with the monitor.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a block diagram a pulse oximetry system utilizing an application identification sensor or an application identification user input or both.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0008] FIG. 1 illustrates a pulse oximetry system 100 incorporating an application identification sensor 200 and a monitor 300 adapted to recognize the sensor 200 accordingly. The sensor 200 has emitters 210 adapted to transmit light into a tissue site and a detector 220 adapted to receive light after absorption by the tissue site and to generate a detector signal in response, as is well known in the art. The monitor 300 has drivers 310 that activate the emitters 210 and a front-end 320 that conditions and digitizes the detector signal for input into a digital signal processor (DSP) 330, as is also well known in the art. The DSP 330 computes oxygen saturation and pulse rate and provides the results on a display. A user interface 340 allows a user to input selected operational parameters for the DSP 330. A pulse oximeter monitor is described in U.S. Pat. No. 6,699,194 entitled Signal Processing Apparatus and Method and U.S. Pat. No. 6,650,917 entitled Signal Processing Apparatus, which are assigned to Masimo Corporation, Irvine, Calif. and incorporated by reference herein. A user interface is described in U.S. Pat. No. 6,658,276 entitled Pulse Oximeter User Interface, which is assigned to Masimo Corporation, Irvine, Calif. and incorporated by reference herein.

[0009] Also shown in FIG. 1, the application identification sensor 200 also has an information element 230, and the monitor has a corresponding information element reader 350. Advantageously, the sensor 200 is manufactured with an information element 230 that identifies a particular application to the monitor 300. The monitor 300 presets one or more user-selectable operational parameters accordingly. This reduces or eliminates the need for user input of operational parameters specific to a particular application. In an alternative embodiment, the monitor 300 has an application identification button, switch or other user-actuated device 342 that causes the monitor 300 to preset one or more user-selectable operational parameters.

[0010] In one particularly advantageous embodiment, the application identification sensor 200 is manufactured, packaged and/or labeled for use in a trauma or emergency care situation, and the information element 230 is configured to

identify that application or use to the monitor 300 accordingly. For example, when such a sensor 200 is connected to the monitor 300, the monitor 300 may select maximum sensitivity and minimum averaging time, providing hands-off optimum settings for these user-selectable operational parameters for a trauma care application. In an alternative embodiment, the monitor 300 has an application identification button 342 that is labeled for use in trauma or emergency care situations and that, when actuated, causes the monitor 300 to set user-selectable operational parameters accordingly. [0011] For various applications, an application identification sensor 200 may indicate other user-selectable operational parameters relating to monitor alarms, displays, outputs and general characteristics to name a few. Alarm parameters may include alarm limits, delay and volume, for example. Display parameters may regard numeric, plethysmograph and trend formats to name a few. Output parameters may include, for instance, the analog output and alarm output types and digital output data formats. General characteristics may include operational modes such as maximum sensitivity and minimum averaging time cited above. General characteristics may also include averaging mode, such as described in U.S. Pat. No. 6,430,525 entitled Variable Mode Averager, which is assigned to Masimo Corporation, Irvine, Calif. and incorporated by reference herein. General characteristics may further include, for example, user key lock-out and password entry to enable user keys and other monitor functions. [0012] An application identification sensor has been disclosed in detail in connection with various embodiments. These embodiments are disclosed by way of examples only and are not to limit the scope of the claims that follow. For example, although an application identification sensor has been described with respect to a pulse oximetry system, a sensor having an information element that identifies an application to a monitor can be utilized in systems capable of measuring physiological parameters other than or in addition to oxygen saturation and pulse rate. One of ordinary skill in art will appreciate many other variations and modifications.

What is claimed is:

1. A patient monitoring device capable of configuring itself for differing operational conditions comprising:

- a physiological signal input configured to receive a physiological signal from a noninvasive optical sensor, said physiological signal indicative of one or more physiological parameters of a patient being monitored;
- a signal processing device configured to process said physiological signal and to determine values of said one or more physiological parameters, said processing of said physiological signal including accessing a plurality of configurable processing parameters, at least some of said configurable processing parameters affecting a sensitivity of said processing to changes in said physiological signal; and
- a caregiver-actuated emergency care input, wherein actuation of said caregiver-actuated emergency care input electronically adjusts one or more of said at least some configurable processing parameters to increase said sensitivity for emergency care situations.

2. The patient monitoring device of claim 1, wherein said caregiver-actuated emergency care input comprises an input key.

3. The patient monitoring device of claim 1, wherein said caregiver-actuated emergency care input comprises an input switch.

4. The patient monitoring device of claim 1, wherein upon actuation of said caregiver-actuated emergency care input, said electronic adjustment adjusts said at least some configurable processing parameters to substantially maximize said sensitivity.

5. The patient monitoring device of claim 1, wherein upon actuation of said caregiver-actuated emergency care input, said electronic adjustment adjusts said at least some configurable processing parameters to substantially minimize averaging times.

6. An oximeter system including a noninvasive optical sensor configured to be applied to a measurement site on a patient and to output a sensor signal indicative of light attenuated by tissue at said measurement site, and including an oximeter processing device comprising:

- a plurality of user-selectable configurations, at least some of said user-selectable configurations affecting a sensitivity of said oximeter processing device;
- a signal processing device configured to receive data indicative of said sensor signal, to process said sensor signal according to said user-selectable configurations, and to determine output measurement of one or more physiological parameters; and
- an application input selectable by a user to adjust said user-selectable configurations in response to use of said oximeter processing device in one or more environments, said application input including a high sensitivity setting that adjusts said user-selectable configurations to increase said sensitivity.

7. The oximeter system of claim 6, wherein said high sensitivity setting corresponds to use of said oximeter processing device in an emergency environment.

8. The oximeter system of claim 6, wherein said high sensitivity setting determines how closely a measurement output from said oximeter processing device follows a most recent measurement calculation by said oximeter processing device.

9. The oximeter system of claim 6, wherein said application input comprises a single actuation input.

10. The oximeter system of claim 6, wherein said application input comprises an input key.

11. The oximeter system of claim 6, wherein said application input comprises an input switch.

12. The oximeter system of claim 6, comprising one or more display items indicating said oximeter processing device is configured with said high sensitivity setting.

13. A method of configuring a patient monitor based at least in part on an environment of use of said patient monitor, the method comprising:

receiving electronic signals indicative of one or more physiological parameters of a monitored patient, said electronic signals indicative of light attenuated by body tissue of a monitored patient;

receiving a caregiver input indicative of a current patient monitoring environment; and

processing with a signal processor said electronic signals according to said caregiver input to determine output measurements for one or more physiological parameters of said monitored patient.

14. The method of claim 13, wherein said current patient monitoring environment comprises a critical care environment.

15. The method of claim **13**, wherein said current patient monitoring environment comprises an emergency environment.

16. The method of claim **13**, wherein said current patient monitoring environment comprises a non-emergency environment.

17. The method of claim **13**, wherein said caregiver input adjusts a sensitivity of the output measurements to the sensor signal.

18. The method of claim **13**, wherein said caregiver input comprises a single actuation.

* * * * *

专利名称(译)	应用识别传感器		
公开(公告)号	US20090048495A1	公开(公告)日	2009-02-19
申请号	US12/254748	申请日	2008-10-20
[标]申请(专利权)人(译)	梅西莫股份有限公司		
申请(专利权)人(译)	Masimo公司		
当前申请(专利权)人(译)	Masimo公司		
[标]发明人	AL ALI AMMAR KIANI MASSI E WEBER WALTER M		
发明人	AL-ALI, AMMAR KIANI, MASSI E. WEBER, WALTER M.		
IPC分类号	A61B5/00		
CPC分类号	A61B2562/08 A61B5/14551 A61B2505/01 A61B2560/02 A61B2560/0487 G06F3/002 G16H40/40 G16H40/63		
优先权	60/549996 2004-03-04 US		
其他公开文献	US8337403		
外部链接	Espacenet USPTO		

摘要(译)

应用识别传感器包括：多个发射器，被配置为将光传输到组织部位；以及检测器，被配置为在组织吸收之后接收光。检测器产生响应光强度的信号并将信号发送给监视器。监视器可读取信息元素以识别传感器应用程序。监视器响应于信息元素预设至少一个用户可选择的操作参数。

