




US 20180301224A1

(19) **United States**(12) **Patent Application Publication**
Matichuk et al.(10) **Pub. No.: US 2018/0301224 A1**(43) **Pub. Date: Oct. 18, 2018**(54) **WEARABLE HEALTH MONITORS AND
METHODS OF MONITORING HEALTH***G16H 40/63* (2006.01)*G06K 19/077* (2006.01)*A61B 5/0205* (2006.01)*A61B 5/16* (2006.01)*A61B 5/00* (2006.01)(71) Applicant: **Salu Design Group Inc.**, Edmonton
(CA)(72) Inventors: **Bruce Matichuk**, Edmonton (CA);
Randy Duguay, Edmonton (CA);
William Parker, Edmonton (CA);
Mathew Moore, Edmonton (CA); **Tim
Antoniuk**, Edmonton (CA)(52) **U.S. Cl.**CPC *G16H 50/20* (2018.01); *G06N 99/005*
(2013.01); *G16H 40/63* (2018.01); *G06K*
19/07762 (2013.01); *A61B 5/0205* (2013.01);
A61B 5/02108 (2013.01); *A61B 5/4806*
(2013.01); *A61B 5/4866* (2013.01); *A61B*
5/681 (2013.01); *A61B 5/7267* (2013.01);
A61B 5/7282 (2013.01); *A61B 5/165*
(2013.01)(73) Assignee: **Salu Design Group Inc.**, Edmonton,
AB (CA)(21) Appl. No.: **15/768,363**(22) PCT Filed: **Oct. 13, 2016**(86) PCT No.: **PCT/CA2016/051195**

§ 371 (c)(1),

(2) Date: **Apr. 13, 2018****Related U.S. Application Data**(60) Provisional application No. 62/240,607, filed on Oct.
13, 2015.**Publication Classification**(51) **Int. Cl.***G16H 50/20* (2006.01)*G06N 99/00* (2006.01)(57) **ABSTRACT**

Wearable technologies, such as wearable health monitors, and methods of use are provided. In some embodiments, the wearable technology can be worn at the wrist of an individual and can use an accelerometer, pulse oximeter, and electrocardiogram to measure heart rate, oxygen saturation, blood pressure, pulse wave velocity, and activity. This information can then be provided to the individual. The individual can alter their behaviors and relationships with their own health by using features such as notifications and auto-tagging to better understand their own stress, diet, sleep, and exercise levels over various time periods and subsequently make appropriate behavioral changes.

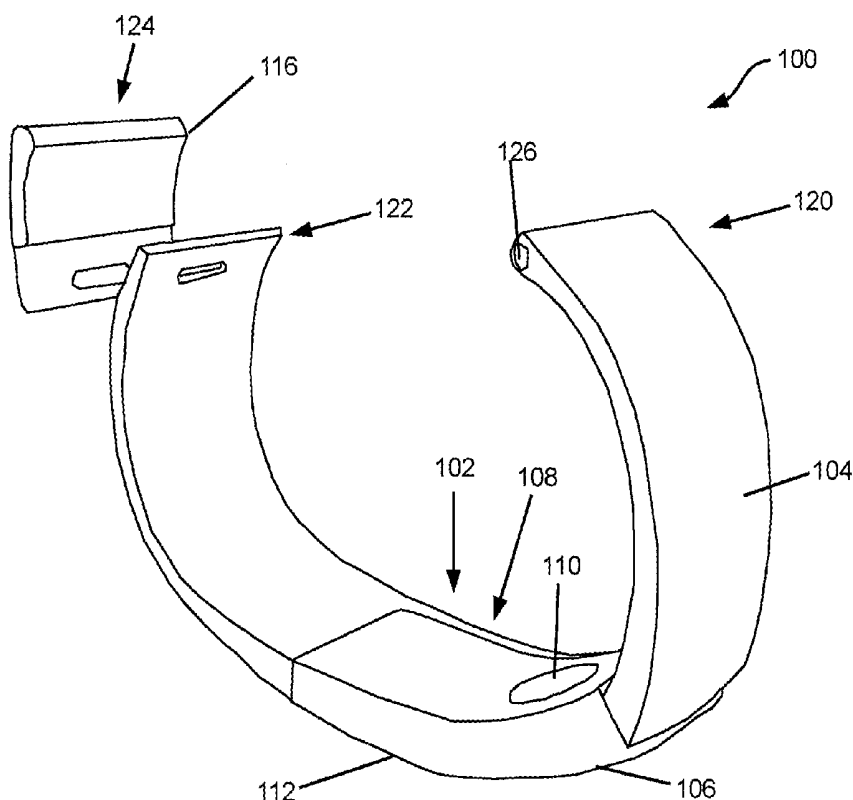

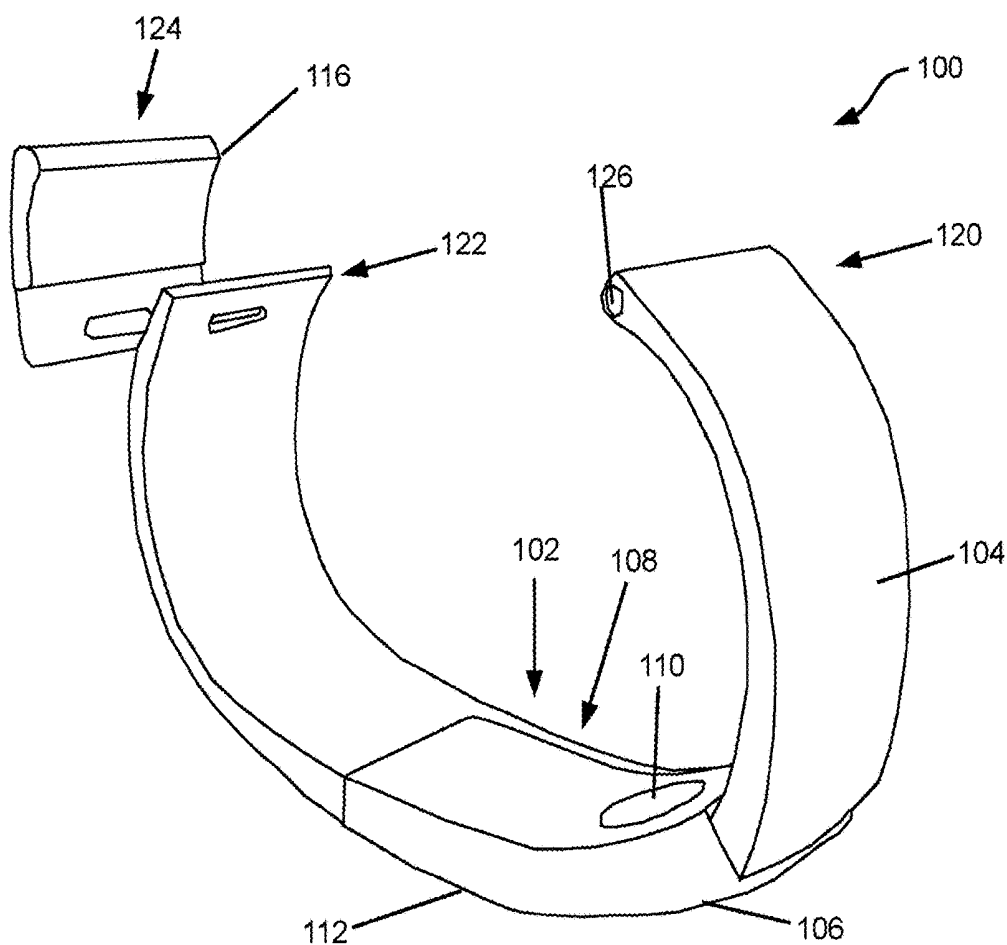


FIG. 1

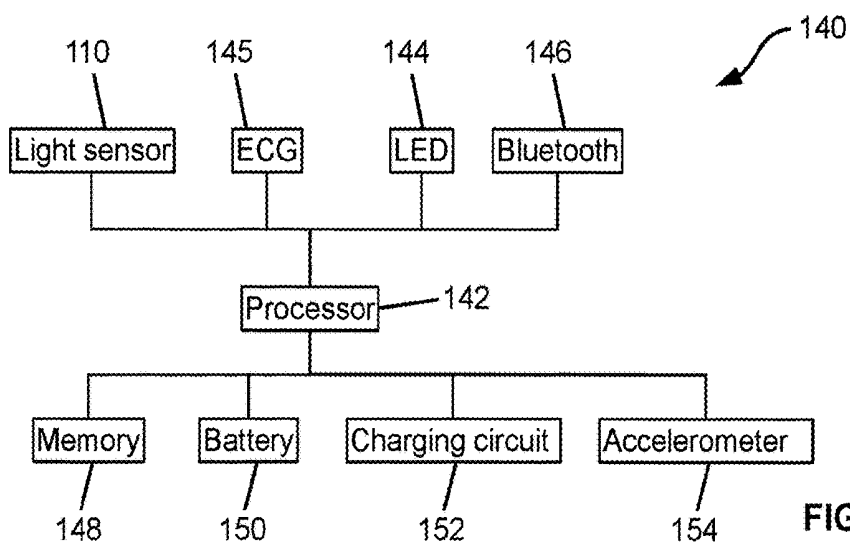


FIG. 2

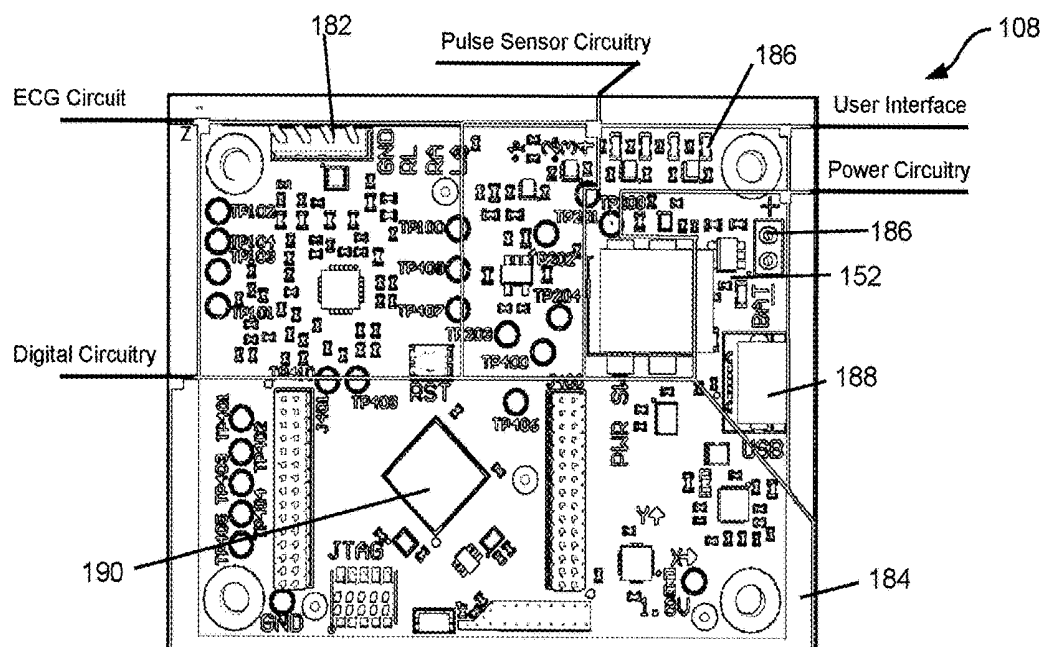


FIG. 3A

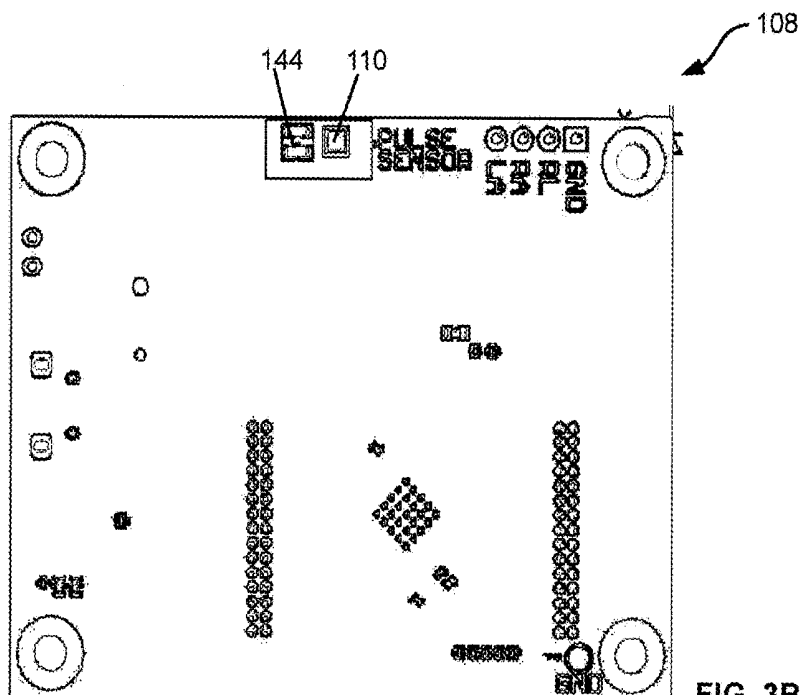
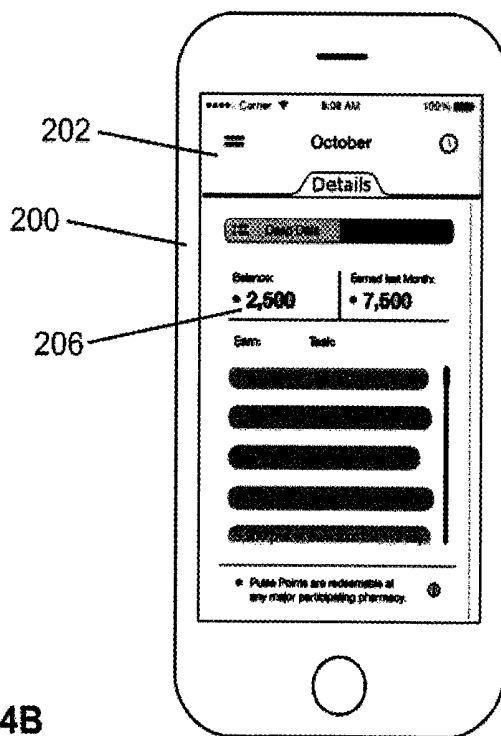
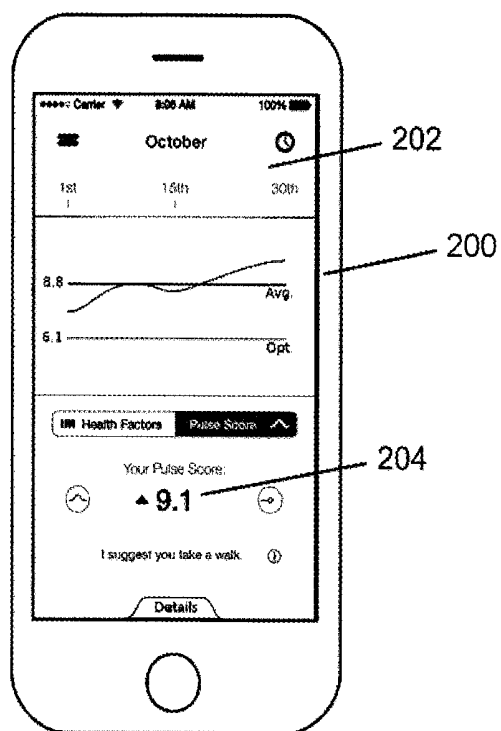


FIG. 3B



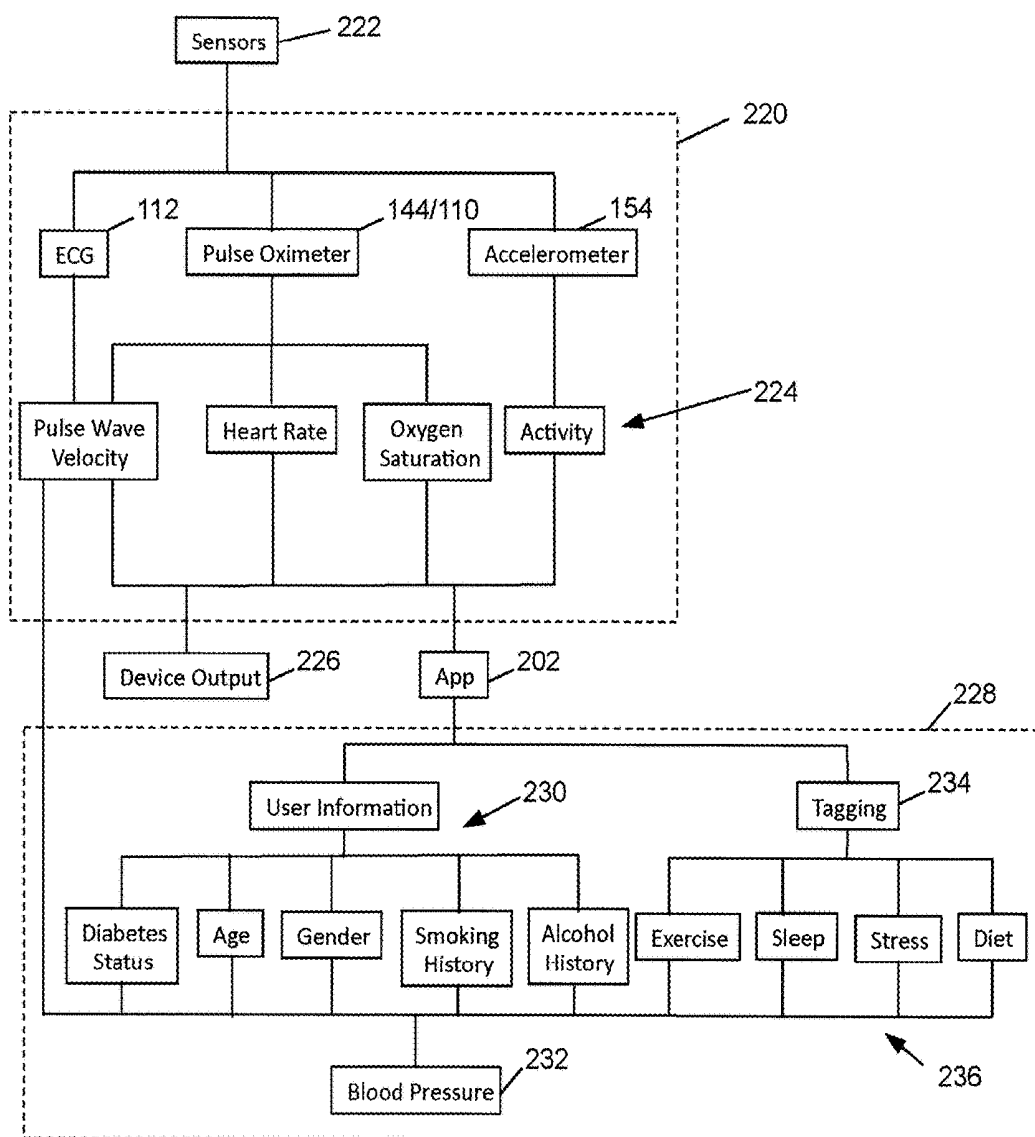


FIG. 5

WEARABLE HEALTH MONITORS AND METHODS OF MONITORING HEALTH

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Patent Application Ser. No. 62/240,607, filed Oct. 13, 2015, the entirety of which is incorporated herein by reference.

FIELD OF THE DISCLOSURE

[0002] The present disclosure is related to wearable technologies and, more particularly, to wearable health monitors and methods of monitoring health.

BACKGROUND

[0003] There has been a decline in the overall health status of the general population. Metabolic syndrome (i.e. the combined effects of obesity, diabetes, hypertension, and dyslipidemia) and its components have been increasing throughout the past twenty years, mostly due to worsening diets, poor exercise levels, personal stress, and reduced or poor sleep patterns. Additionally, individuals have poor relationships with their own health.

[0004] There have been attempts to address these issues by providing the health monitoring of an individual. Existing attempts, however, have their shortcomings and the behavior of the monitored individuals remain unchanged. In most cases, insufficient information is provided to the individual, the information is not communicated to the individual in an appropriate/efficient way, the individual may not easily relate or understand how the information impacts them personally, and/or the individual is not able to provide input into the system in order to customize the information. As such, the individual's behavior remains unchanged and without behavioral change, the health and/or well-being of the individual does not improve or, in many cases, worsens.

[0005] Accordingly, there remains a need to provide health monitors and methods of monitoring health and wellness that can overcome the shortcomings of the prior art.

SUMMARY

[0006] Wearable technologies, such as wearable health monitors, and methods of use are provided. In some embodiments, the wearable technology can be worn at the wrist of an individual and can use an accelerometer, pulse oximeter, and electrocardiogram to measure heart rate, oxygen saturation, blood pressure, pulse wave velocity, and activity. This information can then be provided to the individual. The individual can alter their behaviors and relationships with their own health by using features such as notifications and auto-tagging to better understand their own stress, diet, and exercise levels over various time periods and subsequently make appropriate behavioral changes.

[0007] In some embodiments, a wearable electronic apparatus is provided, the apparatus to be worn around an individual's wrist in order to monitor and assess the individual's cardiovascular health, the apparatus comprising: a band comprising an electronics module configured to position the electronics module proximate a distal radial artery portion of the individual's wrist, the electronics module an accelerometer for taking accelerometer readings from the wrist to be converted into an activity rating; and an electro-

cardiogram (ECG) and a pulse oximeter sensor with photoplethysmography (PPG) for taking heart rate, pulse wave velocity (PWV), and oxygen saturation readings from the wrist to be converted into blood pressure ratings; a processor module in communication with the electronics module to implement an algorithm to convert the PWV readings into estimated blood pressure measurements and for converting the readings and ratings into outputs (health assessments and/or health recommendations); and an output/display module in communication with the processor module for reflecting any of the readings, ratings, and/or outputs to the individual.

[0008] In some embodiments, the apparatus can be retrofit to existing wearable technologies, for example, the apparatus can comprise a wristband peripheral, to be retrofit to a watch, a smartwatch, or other complimentary wrist-worn wearable technology.

[0009] In some embodiments, the apparatus can be activated or deactivated by the individual contacting the electronics module with one finger from the opposite hand that the wrist is being worn on. The contact of the finger on one side of the apparatus in combination with the contact of the wrist with the other side of the apparatus can complete an electronic circuit.

[0010] In some embodiments, the output of the data readings and analysis can provide a health trajectory for the individual to predict a future state of health, as well as review the historical health trajectory from past states.

[0011] In some embodiments, the output of the data readings and analysis can be subject to an "autotagging" program where the apparatus can determine the individual's behavior (such as eating, sleeping, exercising, or a state of stress) at a time point and attaching an electronic tag to that event. The auto-tagging program can also include a means whereby manual data can also augment and increase the individual's ability to capture additional details of personal relevance.

[0012] In some embodiments, the data collected and amalgamated through the apparatus can be subject to "machine learning" methodologies to provide for predictive analysis for the individual to assist the individual in achieving personal health and wellness objectives.

[0013] In some embodiments, the data collected by the apparatus can apply psychometrics data analysis to assist the individual in achieving personal health and wellness objectives.

[0014] Broadly stated, in some embodiments, a wearable electronic apparatus is provided, the apparatus to be worn around an individual's wrist in order to monitor and assess the individual's cardiovascular health, the apparatus comprising: a band comprising an electronics module, the band configured to position the electronics module proximate a distal radial artery portion of the individual's wrist, the electronics module comprising, an accelerometer for taking accelerometer readings from the wrist to be converted into an activity rating; and an electrocardiogram (ECG) and a pulse oximeter sensor with photoplethysmography (PPG) for taking heart rate, pulse wave velocity (PWV), pulse transit time (PTT), and oxygen saturation readings from the wrist to be converted into blood pressure ratings; a processor module in communication with the electronics module to implement an algorithm to convert the ECG and PWV readings into blood pressure and for converting the readings and ratings into outputs (health assessments and/or health

recommendations); and an output/display module in communication with the processor module for reflecting any of the readings, ratings, and/or outputs to the individual.

[0015] In some embodiments, the output/display module is integral with the electronics module. In some embodiments, the output/display module is remote, but in communication with the electronics module. In some embodiments, the output/display module is a multi-color LED for providing individual interaction with device. In some embodiments, the multi-color LED is configured to let the individual know if ECG, pulse oximeter, and accelerometer are ready to obtain the readings, if the apparatus is converting the readings to the outputs, and if the apparatus has successfully completed each measurement. In some embodiments, the band further comprises a connection to receive a smartwatch. In some embodiments, the connection is a smartwatch pin connection.

[0016] Broadly stated, in some embodiments, a method is provided for monitoring and assessing an individual's cardiovascular health, the steps of the method comprising providing a wearable electronic apparatus as described herein; positioning the electronics module proximate the distal radial artery portion of a wrist of an individual; taking simultaneous measurements of activity, heart rate, PWV, and oxygen saturation; using the processor to convert the heart rate and PWV measurements into a blood pressure reading; and reflecting any of the readings, ratings, and/or outputs to the individual through the output/display module.

[0017] In some embodiments, the taking of the simultaneous measurements step is accomplished by using a finger of one hand of the individual to touch the wearable electronic apparatus on wrist of other hand to complete the ECG circuit and record the simultaneous measurements. In some embodiments, the output of the data readings and analysis can be subject to an auto-tagging and/or tagging program where the apparatus can determine the individual's behavior as an event (such as eating, sleeping, working out, or stress) at a time point and attach an electronic/digital tag to that event. In some embodiments, the output of the data readings and further analysis can provide a health trajectory for the individual to predict a future state of health.

[0018] According to one aspect of this disclosure, there is provided a wearable electronic apparatus for monitoring a user's cardiovascular health. The apparatus comprises: an attachment structure for attaching the wearable apparatus to a predefined body location of the user; and an electronics module coupled to the attachment structure. The electronics module comprises: a plurality of sensors comprising at least an electrocardiogram (ECG) sensor for measuring data including at least one of the heart rate, pulse wave velocity (PWV), pulse transit time (PTT), and a pulse oximeter sensor with photoplethysmography (PPG) for measuring oxygen saturation of the user; a processor module coupled to the plurality of sensors for collecting data therefrom and for calculating blood pressure using a machine learning method based at least one collected data; and an output module coupled to the processor module outputting at least one of the calculated blood pressure and the collected data.

[0019] In some embodiments, the pulse oximeter sensor comprises a Pulse LED and a light sensor.

[0020] In some embodiments, the Pulse LED is configured to emit a first light at a first wavelength and a second light at a second wavelength, and wherein the light sensor is configured to receive at least a portion of the first light

reflected from a skin of the user and at least a portion of the second light reflected from a skin of the user.

[0021] In some embodiments, the first wavelength is about 660 nm and the second wavelength is about 940 nm.

[0022] In some embodiments, the electronics module further comprises an accelerometer for collecting the movement data of the user.

[0023] In some embodiments, the processor module calculates blood pressure using the machine learning method based on collected data and the user's historical health data.

[0024] In some embodiments, the machine learning method is a polynomial regression analysis method, a neural network, a Bayesian network, a decision tree, an adaptive logic network, or a support vector machines.

[0025] In some embodiments, the attachment structure is a band.

[0026] In some embodiments, the band is configured to position the wearable electronic apparatus on a wrist of the user.

[0027] In some embodiments, the band is configured to position the electronics module in proximity with a blood vessel of the user.

[0028] In some embodiments, the blood vessel is a distal radial artery.

[0029] In some embodiments, the output module is a display on the wearable electronic apparatus.

[0030] In some embodiments, the display is a multi-color LED.

[0031] In some embodiments, the display is configured to notify the user if the plurality of sensors are ready to obtain readings, if the wearable electronic apparatus is converting the readings to output data, and if the wearable electronic apparatus has successfully completed collection of data from the sensors.

[0032] In some embodiments, the output module comprises a communication component for transmitting at least one of the calculated blood pressure and the collected data to a device external to the wearable electronic apparatus.

[0033] In some embodiments, the communication component is a wireless communication module.

[0034] In some embodiments, the wireless communication module is a Bluetooth module.

[0035] In some embodiments, the attachment structure further comprises a connection for receiving a smartwatch.

[0036] In some embodiments, the connection is a pin connection.

[0037] In some embodiments, the electronics module further comprises at least one circuit board, a battery and a battery charging circuit.

[0038] According to another aspect of this disclosure, there is provided a method for monitoring a user's cardiovascular health. The method comprises: collecting data of the user using at least one sensor, said data comprising at least one of the heart rate, pulse wave velocity (PWV), pulse transit time (PTT), and oxygen saturation; calculating blood pressure of the user using a machine learning method based at least one collected data; and outputting at least one of the calculated blood pressure and the collected data.

[0039] In some embodiments, the collecting data step comprises: collecting at least one of the heart rate, pulse wave velocity (PWV), pulse transit time (PTT) of the user using at least an electrocardiogram (ECG) sensor; and collecting oxygen saturation of the user using a pulse oximeter sensor with photoplethysmography (PPG).

[0040] In some embodiments, collecting oxygen saturation of the user using a pulse oximeter sensor comprises: emitting a first light at a first wavelength and a second light at a second wavelength; receiving at least a portion of the first light reflected from a skin of the user and at least a portion of the second light reflected from a skin of the user; determining a first reading corresponding to the amount of the first light being absorbed by the blood under the skin and a second reading corresponding to the amount of the second light being absorbed by the skin; and calculating the oxygen saturation of the user using the ratio between the first and second readings.

[0041] In some embodiments, the first wavelength is about 660 nm and the second wavelength is about 940 nm.

[0042] In some embodiments, the above method further comprises: collecting the movement data of the user using an accelerometer.

[0043] In some embodiments, the calculating blood pressure step comprises: calculating blood pressure using the machine learning method based on collected data and the user's historical health data.

[0044] In some embodiments, the machine learning method is a polynomial regression analysis method, a neural network, a Bayesian network, a decision tree, an adaptive logic network, or a support vector machines.

[0045] In some embodiments, the above method further comprises: attaching the at least one sensor on a wrist of the user.

[0046] In some embodiments, the attaching step comprises: attaching the at least one sensor on the wrist of the user using a band.

[0047] In some embodiments, the attaching step comprises: attaching the at least one sensor on the wrist of the user in proximity with a blood vessel of the user.

[0048] In some embodiments, the blood vessel is a distal radial artery.

[0049] In some embodiments, the outputting step comprises: displaying at least one of the calculated blood pressure and the collected data.

[0050] In some embodiments, the displaying step comprises: displaying at least one of the calculated blood pressure and the collected data using a multi-color LED.

[0051] In some embodiments, the displaying step comprises: notifying the user if the at least one sensor is ready to obtain readings, if the readings are being converted to output data, and if collection of data from the sensors has been successfully completed.

[0052] In some embodiments, the outputting step comprises: transmitting at least one of the calculated blood pressure and the collected data to a remote device. In some embodiments, the transmitting step comprises: wirelessly transmitting at least one of the calculated blood pressure and the collected data to the remote device.

[0053] In some embodiments, the transmitting step comprises: transmitting at least one of the calculated blood pressure and the collected data to the remote device using Bluetooth.

[0054] In some embodiments, the above method further comprises: attaching the at least one sensor about a smartwatch.

[0055] In some embodiments, attaching the at least one sensor about the smartwatch comprises: attaching the at least one sensor about the smartwatch using a pin connection.

[0056] According to another aspect of this disclosure, there is provided a system for monitoring a user's cardiovascular health. The system comprises: an attachment structure for attaching the wearable apparatus to a predefined body location of the user; an electronics module coupled to the attachment structure; and a device external to the attachment structure. The electronics module comprises: a plurality of sensors comprising at least an electrocardiogram (ECG) sensor for measuring data including at least one of the heart rate, pulse wave velocity (PWV), pulse transit time (PTT), and a pulse oximeter sensor with photoplethysmography (PPG) for measuring oxygen saturation of the user; a processor module coupled to the plurality of sensors for collecting data therefrom and; and an output module coupled to the processor module outputting at least one of collected data to the external device. The external device calculates blood pressure using a machine learning method based at least one data received from the output module.

[0057] In some embodiments, the pulse oximeter sensor comprises a Pulse LED and a light sensor.

[0058] In some embodiments, the Pulse LED is configured to emit a first light at a first wavelength and a second light at a second wavelength, and wherein the light sensor is configured to receive at least a portion of the first light reflected from a skin of the user and at least a portion of the second light reflected from a skin of the user.

[0059] In some embodiments, the first wavelength is about 660 nm and the second wavelength is about 940 nm.

[0060] In some embodiments, the electronics module further comprises an accelerometer for collecting the movement data of the user.

[0061] In some embodiments, the processor module calculates blood pressure using the machine learning method based on collected data and the user's historical health data.

[0062] In some embodiments, the machine learning method is a polynomial regression analysis method, a neural network, a Bayesian network, a decision tree, an adaptive logic network, or a support vector machines.

[0063] In some embodiments, the attachment structure is a band.

[0064] In some embodiments, the band is configured to position the wearable electronic apparatus on a wrist of the user.

[0065] In some embodiments, the band is configured to position the electronics module in proximity with a blood vessel of the user.

[0066] In some embodiments, the blood vessel is a distal radial artery.

[0067] In some embodiments, the output module is a display on the wearable electronic apparatus.

[0068] In some embodiments, the display is a multi-color LED.

[0069] In some embodiments, the display is configured to notify the user if the plurality of sensors are ready to obtain readings, if the wearable electronic apparatus is converting the readings to output data, and if the wearable electronic apparatus has successfully completed collection of data from the sensors.

[0070] In some embodiments, wherein the output module comprises a communication component for transmitting at least one of the calculated blood pressure and the collected data to a device external to the wearable electronic apparatus.

[0071] In some embodiments, the communication component is a wireless communication module.

[0072] In some embodiments, the wireless communication module is a Bluetooth module.

[0073] In some embodiments, the attachment structure further comprises a connection for receiving a smartwatch.

[0074] In some embodiments, the connection is a pin connection.

[0075] In some embodiments, the electronics module further comprises at least one circuit board, a battery and a battery charging circuit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0076] FIG. 1 is a perspective view of an embodiment of a wearable electronic apparatus for monitoring and assessing an individual's cardiovascular health;

[0077] FIG. 2 is a schematic diagram 140 showing the structure of the electrical components of the wearable apparatus;

[0078] FIG. 3A is a front perspective view of an embodiment of an electronics module for a wearable electronic apparatus for monitoring and assessing an individual's cardiovascular health;

[0079] FIG. 3B is a rear perspective view of the embodiment of the electronics module shown in FIG. 2;

[0080] FIGS. 4A and 4B show a front elevation view of embodiments of an electronic App for monitoring and assessing an individual's cardiovascular health, as depicted on an embodiment of a smartphone or other display device; and

[0081] FIG. 5 is a diagram representation of embodiments of algorithms that can be used in association with a wearable electronic apparatus for monitoring and assessing an individual's cardiovascular health.

DETAILED DESCRIPTION

[0082] Wearable technologies, such as wearable health monitors, and methods of use are provided.

[0083] In some embodiments, the wearable technology can be worn at the wrist of an individual and can use an accelerometer, pulse oximeter, and electrocardiogram to measure heart rate, oxygen saturation, blood pressure, pulse wave velocity, and activity. This information can then be provided to the individual. The individual can alter their behaviors and relationships with their own health by using features such as notifications and auto-tagging and/or manual tagging, machine learning, artificial intelligence, psychometric analysis, and predictive analytics, to better understand their own stress, diet, and exercise levels over various time periods and subsequently make appropriate behavioral changes.

[0084] Referring now to FIG. 1, an embodiment of a wearable apparatus is shown and generally referred using the numeral 100. The wearable apparatus comprises an electronics module 102 and an attachment structure 104 such as a band for attaching the wearable apparatus 100 to a user's wrist. In this embodiment, the electronics module 102 is housed within a hard case 106, and comprises a circuit board, for example a printed circuit board (PCB) 108 for collecting data from a plurality of sensors (described later) for monitoring a user's health metrics.

[0085] The band 104 in this embodiment is soft or flexible case, and may house other components of apparatus 100. For

example, in this embodiment, the band 104 comprises openings for a light sensor 110 housed therein, and one or more sensors such as an electrocardiogram (ECG) electrodes 112 for acquiring a signal of electrical activity through the user's heart. In this embodiment, the band 104 comprises two ECG electrodes 112, one touching an anterior portion of the user's wrist, and the other to be touched by the user's opposing hand's finger to complete a circuit across the heart for make a reading.

[0086] For example, the user can use a finger of one hand to touch the apparatus 100 that is attached to the wrist of the opposite arm in order to record an ECG signal, and simultaneously initiate a complete set of biometrics as described later. As band 104 can be configured to be positioned on a user's wrist, simultaneous quality measurements of blood pressure, pulse wave velocity, pulse transit time, and oxygen saturation can also be provided.

[0087] The band 104 is configured and sized to position electronics module 102 proximate the distal portion of a user's radial artery in order to achieve increased accuracy in electronic readings. In some embodiments, the band 104 is an expandable band for adapting to different sizes of wrists. For example, one or more link pieces 116 may be added to the band 104 to extend the band 104 for larger size wrist.

[0088] In some embodiments, the two ends 120 and 122 of the band 104, or the end 120 of the band 104 and the end 124 of the link piece 116, may be coupled to each other wearable apparatus 100 for attaching the wearable apparatus 100 to a user's wrist. In some other embodiments, the band 104 may be configured to receive a smartwatch (not shown) through a connection 126, for example, but not limited to a smartwatch pin connection to connect to the smartwatch. In some embodiments, connection 126 can be configured to attach to a pre-existing smartwatch female pin connection. In some embodiments, connection 126 can be integrally built into band 104. Accordingly, the wearable apparatus 100 and smartwatch can be worn as a single wearable device, wherein the apparatus 100 acts as a smartband, namely a band comprising smart electronics or a connection to communication with a smart technology, or acts as a peripheral to a smartwatch that can be configured to tie-in with existing smartwatches for the purpose of adding key health metrics that do not currently exist on such smartwatches. Where a health metric, such as the heart rate and pulse measurements, can be provided by the smartwatch, the wearable apparatus 100 can provide an additional measurement to compare to the smartwatch measurement.

[0089] FIG. 2 is a schematic diagram 140 showing the structure of the electrical components of the wearable apparatus 100. As shown, in this embodiment, the wearable apparatus 100 comprises a processor 142, a light sensor 110, an ECG module 145 connecting to the ECG electrodes 112, pulse LED 144, a wireless communication module 146 such as a Bluetooth module, a memory 148, a battery 150, a charging circuit 152 for charging the battery 150, an accelerometer 154, and necessary circuitry such as a digital circuitry on the PCB 108. The process 142 is in communication with the components 110, and 144 through 154, and controls the operation thereof. The wearable apparatus 100 may also comprise a Bluetooth antenna (not shown) for transmitting and receiving Bluetooth signals.

[0090] Referring now to FIGS. 3A and 3B, an embodiment of the PCB 108 is shown from the front and rear respectively. As shown, the PCB 108 comprises ECG inputs 182 to

attach ECG electrodes **112** to the digital circuitry **184**. The PCB **108** also comprises LED Indicators **186** to attach one or more LEDs, e.g., four (4) LEDs **186** in the example, for informing the user regarding the status or states of the apparatus **100**, such as charging, measurement acquisition, transfer to app processes, and the like. In some embodiments, multi-color LEDs can be used for facilitating user interaction with the apparatus **100**. The LEDs **186** are used for indicating to the user if ECG, pulse oximeter, and accelerometer sensors are able to get readings and if the device is converting those reading measurements to the appropriate outputs. Accordingly, feedback on adequacy of the measurements can be provided to the user.

[0091] In this embodiment, the PCB **108** comprises, on its front side, a primary energy input **186** for connecting to a power source (not shown), e.g., a battery such as a Lithium battery, for powering the components **110**, and **142** through **154** of the apparatus **100**. In this embodiment, the PCB **108** further comprises a secondary energy input, such as a charging circuitry **152** and a USB charger input **188**, connecting to a secondary power source (not shown) as needed, for charging the battery. In another embodiment, the wearable apparatus **100** may also be powered by the secondary power source via the secondary energy input such that the wearable apparatus **100** is still operable when the battery is being charged.

[0092] In this embodiment, the processor **142**, the Bluetooth module **146** and memory **148** are integrated into one central chip **190** such as a microcontroller, also mounted to the front side of the PCB **108**.

[0093] On its rear side, the PCB **108** comprises a Pulse LED **144** to provide two different light sources, with one at a wavelength of about 660 nm (red light) and the other at a wavelength of about 940 nm (infrared light), and a light sensor **110** to acquire the light emitted from the Pulse LED **144** and reflected off of a peripheral artery. In this embodiment, light sensor **110** also comprises two separate light sensing components corresponding to the two light sources of the Pulse LED **144**, including one light sensing component at about 660 nm and another light sensing component at about 940 nm. Alternatively, the light sensor **110** may be a single sensor capable of acquiring both 660 nm and 940 nm wavelengths. The Pulse LED **144** and light sensor **110** can be used for pulse oximetry, forming a pulse oximeter with photoplethysmography (PPG). Pulse oximetry works by comparing a first reading corresponding to the amount of light absorbed by the blood under the skin at one wavelength, for example about 660 nm, corresponding to oxygenated blood, and a second reading corresponding to the amount of light absorbed by the blood under the skin at a second wavelength, for example about 940 nm, corresponding to deoxygenated blood. The ratio between the two readings can determine how much oxygen is present in the user's blood and can also called oxygen saturation.

[0094] In this embodiment, the Pulse LED **144** and light sensor **110** are adjacent to each other on the PCB **108**, and are located in the wearable apparatus **100** such that, when a user wears the wearable apparatus **100** on a wrist thereof, the Pulse LED **144** and light sensor **110** are in proximity with the radial artery. In this manner, the light emitted from the Pulse LED **144** is reflected by the skin close to the radial artery and received by the light sensor **110**. The light received by the light sensor **110** then contains more detailed information about the user's health metrics, compared to

that when the Pulse LED **144** and light sensor **110** are at other locations of the wearable apparatus **100**.

[0095] In some embodiments, the PCB **108** can also include an accelerometer **154** for activity tracking by assessing the movement that the apparatus **100** experiences. In some embodiments, the accelerometer **154** can be incorporated into the central chip **190**. In some embodiments, an accelerometer measurement can be acquired from an external accelerometer such as from a connected smartwatch that has a built-in accelerometer.

[0096] In this embodiment, the processor **142** executes machine executable code implementing a built-in device algorithm for computing basic health metrics such as heart rate. In some embodiments, the code of the device algorithm is stored in the memory **148**. The memory **148** also stores basic data collected from the above described sensors.

[0097] As described above, the central chip **190** integrates a Bluetooth component **146**. The Bluetooth component **146** transmits data to and from external devices such as smartphones, tablets, laptops, desktops and the like.

[0098] In operation, the wearable apparatus **100** can be configured to provide a user with feedback regarding their health metrics and health behaviors. In particular, the wearable apparatus **100** collects data or measurements from the pulse oximeter, ECG, and accelerometer to provide heart rate, oxygen saturation, pulse wave velocity, blood pressure, and activity measurements.

[0099] In some embodiments, the sensor measurements can be inputted into the circuitry on the PCB **108** via the ECG inputs **182** from the ECG electrodes **112**, from the light sensor **110** receiving reflected light from the Pulse LED **144**, and the accelerometer **154** (or an external accelerometer as described above). Such sensor measures may be stored in the memory **148**, and may be used by the processor **142** for basic computing using the device algorithm to obtain basic health metrics such as heart rate.

[0100] In some embodiments, ECG and pulse oximetry readings are combined to obtain the pulse wave velocity (PWV), which can then be used to calculate a blood pressure value. In order to do this the R-wave of the ECG signal can be compared with the onset of the blood pulse sensed by the pulse oximeter. In some embodiments, a portion of the device algorithm can help to find these two points differentiated in time. Known estimates of distances between a person's heart and wrist from anthropometric data can help determine the distance between these two positions. By dividing the distance over the time, the PWV can be calculated. Then, various factors including, but not limited to, age, gender, smoking history, alcohol history, blood sugar control, activity, sleep, heart rate, and diet can be factored into an estimate of the user's blood pressure.

[0101] In one embodiment, the processor **142** uses an algorithm implementing a method described in the academic paper "Continuous blood pressure measurement by using the pulse transit time: comparison to a cuff-based method" to Heiko Gesche, Detlef Grosskurth, Gert Küchler and Andreas Patzak, published on Eur J Appl Physiol. 2012 January; 112(1):309-15, the content of which is incorporated herein by reference in its entirety. The method uses Pulse transit time (PTT) and pulse wave velocity (PWV) for monitoring blood pressure.

[0102] In some embodiments, the wearable apparatus **100** uses machine learning to process the data collected from

various sensors to provide for predictive analysis for the user to assist the user in achieving personal health and wellness objectives.

[0103] For example, the wearable apparatus **100** uses a supervised learning method for calculating and predicting blood pressure as follows.

[0104] In this method, data is in sets of PTT and Other Markers. The method uses a suitable machine learning method, such as machine learning method may be a polynomial regression analysis method, a neural network, a Bayesian network, a decision tree, an adaptive logic network, a support vector machines or the like, for function learning. Training output for each recording includes a value for Systolic blood pressure and a value for Diastolic blood pressure.

[0105] In predicting blood pressure using PTT and other markers, the vascular system follows a physical model of a pump that pumps a fluid of a particular viscosity into a tube of a particular length and width with a specific wall elasticity, the amount of time it takes for a fluid pressure wave to travel through the tube can be calculated by the Moens-Korteweg equation:

$$PWV = \sqrt{((E_{inc} * h) / 2\rho)}$$

where $\sqrt{x}$ representing the square root of x , E_{inc} is the incremental modulus of stiffness, h is vessel wall thickness, r is the vessel radius, ρ is the density of blood, and PWV is the pulse wave velocity.

[0106] Based on the Moens-Korteweg equation, a probabilistic model may be established using PTT and Other Markers as probabilistic predictors of Systolic blood pressure (SBP) and diastolic blood pressure (DBP). SBP and DBP are random variables, the values of which are determined by other variables include PTT, height, weight, ethnicity, age, gender, Pulse Wave Characteristics and the like. Herein, PTT is the amount of time it takes for the heart to start pumping and for the pump pulse to reach the radial artery. Ethnicity is a number or index used to distinguish different data sets. Pulse Wave Characteristics include a variety of values derived from standard PPG pulse wave analysis.

[0107] Pulse wave analysis is known, for example, the academic paper “On the Analysis of Fingertip Photoplethysmogram Signals”, to Mohamed Elgendi, published on Current Cardiology Reviews, 2012, 8, 14-25, the content of which is incorporated herein by reference in its entirety, provides a detailed description of pulse wave analysis.

[0108] By using pulse wave analysis, basic pulse wave characteristics may be obtained, including the systolic peak, diastolic peak, peak difference, dicrotic notch, and pulse width. In this embodiment, the supervised learning method uses these characteristics along with Pulse Transit Time, Heart Rate, Heart Rate Variability, and optionally other recorded values to generate SBP vs DBP values based on a machine learned mapping function. Using more data increases the accuracy and reliability of the blood pressure calculation.

[0109] The method uses ECG to detect the start of the heart beat and PPG to detect the point at which the pulse reaches the radial artery. While the ECG or PPG measuring location in the method disclosed herein is relatively far from the heart, Applicant's test results show that, the method is insensitive to the specific distance between the ECG or PPG measuring location and the heart, or the specific point at

which the ECG or PPG is measured, as long as the measurement is consistent, the measurement results or readings are about the same for the same person at about the same body conditions during different measurements.

[0110] In one embodiment, the polynomial regression analysis may be used to generate a mapping function. As is known in the art and described in Wikipedia, polynomial regression is a statistic method with a form of linear regression in which the relationship between the independent variable x and the dependent variable y is modelled as an n -th degree polynomial. Polynomial regression fits a non-linear relationship between the value of x and the corresponding conditional mean of y , denoted $E(y|x)$, and has been used to describe nonlinear phenomena. The regression function $E(y|x)$ is linear in the unknown parameters that are estimated from the data.

[0111] Those skilled in the art appreciate that, in various embodiments, any machine learning technique will work to produce a viable function map.

[0112] The supervised learning method assumes a particular polynomial degree and attempts to learn an equation by considering multiple examples.

[0113] For example, for EBP using 3 unknowns,

$$EBP = A * PTT^2 + B * PTT + C,$$

where A , B and C are unknowns. Given 3 examples that include an EBP value and a PTT value, the values of A , B and C are then solved.

[0114] The supervised learning method uses multiple training points to find a closer fit. In order to make the function more reliable regression can be used to consider multiple points along the curve.

[0115] As those skilled in the art appreciate, polynomial regression analysis is one form of function fitting, and other machine learning algorithms can be alternatively used to generate alternative function maps. For example, in another embodiment, neural network analysis may be used.

[0116] As defined by Dr. Robert Hecht-Nielsen in “Neural Network Primer: Part I” by Maureen Caudill, AI Expert, February 1989, a neural network is a computing system made up of a number of simple, highly interconnected processing elements, which process information by their dynamic state response to external inputs. Neural networks are typically organized in layers. Layers are made up of a number of interconnected “nodes” containing an “activation function”.

[0117] In the neural network analysis disclosed herein, the retinal layer is represented by the inputs. The function map is then modeled using multiple hidden layers. The final layer may be modeled as a collection of neurons representing the range of output. Alternatively, the final layer may be a single neuron with an output intensity that maps to a particular DBP or SBP value.

[0118] In some embodiments, the wearable apparatus **100** may be configured to send the sensor readings/measurements and processor-calculated data through the Bluetooth **146** to external devices such as smartphones, tablets, laptops, desktops and the like. As shown in FIGS. 4A and 4B, an App **202** or a software application is executed on a display device **200** to provide an interactive user experience. The App **202** receives the sensor measurements and processor-calculated data from the wearable apparatus **100** using Bluetooth paired to the Bluetooth **146** of the wearable apparatus **100**, and display some or all of the received sensor

measurements and processor-calculated data on the display. The App 202 may further calculate extended data, e.g., a Pulse Score 204 and Pulse Points 206, related to body conditions, health, activity targets and the like, and display the calculated data 206 on the display.

[0119] A Pulse Score 204 can be a scoring method to provide an indication to the user as a sense of the general state of their health, as an example, of where their health is compared relative to others. Pulse Score 204 can also allow the user to see how their behavior changes impact their own health. In some embodiments, improvements (for example, an increase) in Pulse Score 204, reflecting an improvement in health, are a way users can attain Pulse Points 206. Pulse Points 206 are a rewards system where an individual can use Pulse Score 204 to accumulate Pulse Points 206, which in turn, can provide, or be exchanged for, rewards for meeting goals. Accordingly, as the user improves/increases their Pulse Score 204 through making more sound health decisions, they can receive Pulse Points 206 that can be redeemed for prizes or discounts on purchases, e.g., purchases of health related items.

[0120] In some embodiments, the App 202 implements a portable algorithm, for providing the user a reflection of total health status by taking the basic outputs from the wearable apparatus 100 and converting that data into heart rate, oxygen saturation, pulse wave velocity, blood pressure, and activity.

[0121] FIG. 5 shows the device algorithm 220, the portable algorithm 228 and the interaction therewith. As shown, the sensors 222 of the wearable apparatus 100, such as the ECG module 145, the Pulse Oximeter (Pulse LED 144 and light sensor 110) and the accelerometer 154, collects data of the user. The processor 142 uses the collected data to calculate the user's body and activity data 224 such as pulse wave velocity, heart rate, oxygen saturation and activity. The calculated body and activity data 224 may be output, e.g., displayed, at the output 226 of the apparatus 100. The output 226 may be an LCD/LED display on or integrated with the wearable apparatus 100 for displaying the output data in text or graphic form, or one or more LEDs (which may be considered as a simple display) on or integrated with the wearable apparatus 100 for displaying the output data using different combination of LED lights. In this embodiment, the wearable apparatus may not comprise a Bluetooth module 146.

[0122] Alternatively, the output data may be transmitted to the App 202 of a device 200 external or remote to the wearable apparatus 100 via, e.g., Bluetooth. The App 202 executes the portable algorithm 228, and uses the user's information 230 such as the user's historical health data, e.g., diabetes status, age, gender, smoking history, alcohol history and the like, to calculate blood pressure 232.

[0123] In some embodiments, the App 202 also comprises a tagging function 234 allowing automatically tagging (Auto-tagging) and/or manually tagging, where the output of the data readings and analysis can be subject to a tagging program where apparatus 100 can determine the user's behavior 236, such as eating, sleeping, working out, or is stressed, at a time point and attaching an electronic tag to that event.

[0124] Tagging 234 can be understood to be the taking of core health metrics from apparatus 100 and using analytics to determine if the user is involved in such behaviors 236 as

eating, sleeping, resting, working out, or is stressed at a specific time and attaching a digital tag to that event.

[0125] Auto-tagging can be understood to be the automatic tagging of these events by the App 202. In some embodiments, the measures of heart rate, activity, pulse wave velocity, oxygen saturation, and/or blood pressure in combination with prior- or post-tagging can be used to accomplish auto-tagging, or to provide additional personal input or information. In order to adequately provide auto-tagging options heart rate and activity tracking can be used to be able to tell resting, exercising, and sleeping states. In some embodiments, the use of pulse wave velocity can allow for determination of fatty meals the user may have had and this information can be used for tagging/auto-tagging. An indication of stress can be found through changes in blood pressure and heart rate with minimal movement and this information can be used for tagging/auto-tagging.

[0126] In some embodiments, auto-tagging functions can be combined with a health trajectory output for the individual to predict a future state of health. These two features can provide the user with the reflection and foresight to start making better health decisions such as increased exercise, a better diet, improved sleeping habits, or increased awareness and response to stressors.

[0127] Accordingly, apparatus 100 and the methods of using the same can provide for the acquisition of more useful health metrics, a more convenient and user-friendly way to acquire measurements, and a mechanism to provide feedback to the user to generate thought and behavior change of the user with respect to their own health. The user can be provided with pertinent information that will help them make more informed health decisions. In some embodiments, these health metrics can be captured as real-time information, at regular or pre-set intervals over the course of time, or at any time that the user wishes to apply.

[0128] In above embodiments, the wearable apparatus 100 collects data of the radial artery for calculating health metrics. However, in some alternative embodiments, the wearable apparatus 100 does not require data of the radial artery. Rather, the wearable apparatus 100 may locate its sensor(s) at any suitable body location along an artery where a pulse is detectable. For example, in various embodiments, the wearable apparatus 100 may locate its sensor(s) at a thumb, finger, ankle, toe, forehead and the like. For example, in one embodiment, the wearable apparatus 100 may be in the form of a headband.

[0129] In above embodiments, the wearable apparatus 100 comprises a single PCB 108. In some alternative embodiments, the wearable apparatus 100 comprises a plurality of rigid circuit boards 108 electrically coupled via suitable flexible electrical cables or wires. For example, in one embodiment, the wearable apparatus 100 comprises three rigid PCBs, with a first PCB receiving the charging circuit 152 and the accelerometer 154, a second PCB receiving the central chip 190 and the Bluetooth antenna, and a third PCB receiving the sensors and/or connectors of sensors, such as the ECG input 182 and the Pulse LED 144 and light sensor 110. In this embodiment, the second PCB is intermediate of the first and third PCBs.

[0130] Compared to the use of a single flexible circuit board, using multiple rigid circuit boards provides several advantages. For example, the rigid circuit boards provide sufficient protection to the components thereon. Further, by using above-described multiple PCBs 108, the electronic

circuitry, including the PCBs **108** and components thereon, can be made with a small size and/or thickness for easily fitting into a rigid case **106**.

[0131] In another embodiment, the wearable apparatus **100** is designed in a modularized manner for the ease of installing and replacing sensors. For example, the Pulse LED **144** and light sensor **110** in this embodiment are on a separate circuit board, which is connected to the PCB **108** via respective connectors on the circuit boards, and a flexible cable therebetween. The connectors are also modularized with standardized pins for connecting to different Pulse LEDs and light sensors.

[0132] In above embodiments, a suitable machine learning method is used to calculate blood pressure based some or all of the collected data and the user's historical health data. In an alternative embodiment, the blood pressure is calculated using the machine learning method based only on some or all of the collected data. No historical health data of the user is used. While the resulting blood pressure may not be as accurate as that calculated based on both the collected data and the user's historical health data, the resulting blood pressure may still have sufficient accuracy for the user to use.

[0133] In above embodiments, the sensors are arranged about an artery such as a distal radial artery. In some alternative embodiments, the sensors are arranged about a blood vessel, which may be a vein or an artery, depending on the implementation.

[0134] In above embodiments, the pulse oximeter comprises a pulse LED as a light emitter. In some other embodiments, any suitable light emitters may be alternatively used.

[0135] In above embodiments, the pulse LED or light emitter is used for detecting blood pulse wave and for detecting oxygen saturation, and the ECG sensor is used for detecting the start of pulse. In some alternative embodiments, a sonic sensor is used for detecting blood pulse wave. In some of these embodiments, no light emitter is used. However, a drawback of these embodiments is that the oxygen saturation may be undetectable.

[0136] Although a few embodiments have been shown and described, it will be appreciated by those skilled in the art that various changes and modifications might be made without departing from the scope of the invention. The terms and expressions used in the preceding specification have been used herein as terms of description and not of limitation, and there is no intention in the use of such terms and expressions of excluding equivalents of the features shown and described or portions thereof, it being recognized that the invention is defined and limited only by the claims that follow.

[0137] While the above description details certain embodiments of the invention and describes certain embodiments, no matter how detailed the above appears in text, the invention can be practiced in many ways. Details of the apparatuses and methods may vary considerably in their implementation details, while still being encompassed by the invention disclosed herein. These and other changes can be made to the invention in light of the above description.

[0138] Particular terminology used when describing certain features or aspects of the invention should not be taken to imply that the terminology is being redefined herein to be restricted to any specific characteristics, features, or aspects of the invention with which that terminology is associated. In general, the terms used in the following claims should not

be construed to limit the invention to the specific embodiments disclosed in the specification. Accordingly, the actual scope of the invention encompasses not only the disclosed embodiments, but also all equivalent ways of practicing or implementing the invention.

[0139] The above description of the embodiments of the invention is not intended to be exhaustive or to limit the invention to the precise form disclosed above or to the particular field of usage mentioned in this disclosure. While specific embodiments of, and examples for, the invention are described above for illustrative purposes, various equivalent modifications are possible within the scope of the invention, as those skilled in the relevant art will recognize. The elements and acts of the various embodiments described above can be combined to provide further embodiments.

[0140] While certain aspects of the invention are presented below in certain claim forms, the inventors contemplate the various aspects of the invention in any number of claim forms. Accordingly, the inventors reserve the right to add additional claims after filing the application to pursue such additional claim forms for other aspects of the invention.

REFERENCES

[0141] The following references are hereby incorporated by reference into this application in their entirety:

[0142] 1. The Reference Values for Arterial Stiffness Collaboration, "Determinants of pulse wave velocity in healthy people and in the presence of cardiovascular risk factors: 'establishing normal and reference values'". *European Heart Journal* (2010) 31, 2338-2350 doi: 10.1093/eurheart/ehq165.

[0143] 2. Augustine et al., "Effect of a Single Bout of Resistance Exercise on Arterial Stiffness Following a High-Fat Meal", *Int J Sports Med*; DOI: <http://dx.doi.org/10.1055/s-0033-1363266> Copyright Georg Thieme Verlag, Stuttgart, New York (2014); ISSN 0172-4622.

[0144] 3. Millasseau et al., "Determination of age-related increases in large artery stiffness by digital pulse contour analysis", *Clinical Science* (2002) 103, 371-377.

[0145] 4. Firstbeat Technologies Ltd., "Stress and Recovery Analysis Method Based on 24-hour Heart Rate Variability", Published Sep. 16, 2014, updated Nov. 4, 2014.

[0146] 5. Contini, R., "Body Segment Parameters, Part II", *Artificial Limbs* (1972), 16(1) 1-19.

1.-59. (canceled)

60. An electronic apparatus for monitoring a user's cardiovascular health, the apparatus comprising:

an electronics module comprising:

a plurality of sensors for collecting at least electrocardiogram (ECG) data and photoplethysmography (PPG) data;

an output module; and

a processor module coupled to the plurality of sensors and the output module for:

receiving data collected by the plurality of sensors;

determining health metrics of the user using the collected data; and

outputting at least one of the health metrics and the collected data via the output module;

wherein the health metrics comprises at least blood pressure of the user; and wherein said determining the health metrics of the user comprises calculating the

blood pressure using a machine learning method based at least one collected data and the user's historical health data.

61. The electronic apparatus of claim 60, wherein the electronics module further comprises an accelerometer for collecting the movement data of the user.

62. The electronic apparatus of claim 60 further comprising:

an attachment structure coupled to the electronics module and for positioning the electronic apparatus on a wrist of the user.

63. The electronic apparatus of claim 60, wherein the attachment structure is configured for positioning the electronics module in proximity with a distal radial artery of the user.

64. The electronic apparatus of claim 60, wherein the output module is a display on the electronic apparatus.

65. The electronic apparatus of claim 64, wherein the display is configured for notifying the user if the plurality of sensors are ready to obtain readings, if the electronic apparatus is converting the readings to output data, and if the electronic apparatus has successfully completed collection of data from the sensors.

66. The electronic apparatus of claim 60, wherein the output module comprises a wireless communication component for transmitting at least one of the health metrics and the collected data to a device external to the electronic apparatus.

67. The electronic apparatus of claim 60, wherein the health metrics further comprises at least one of heart rate, pulse measurements, oxygen saturation, PWV, PTT, and activity measurements of the user; and wherein the processor module is further configured for:

automatically determining one or more events of the user based on the collected data; and

automatically attaching an electronic tag to said event.

68. The electronic apparatus of claim 67, wherein said automatically determining the one or more events of the user comprises:

automatically determining the one or more events of the user by analyzing the heart rate and activity measurements of the user, wherein said one or more events comprises at least one of resting, exercising, and sleeping.

69. The electronic apparatus of claim 67, wherein said automatically determining the one or more events of the user comprises:

automatically determining an eating event with fatty meals the user have had by analyzing the health metrics; and

automatically attaching an electronic tag to said event with the determined information of the fatty meals.

70. The electronic apparatus of claim 67, wherein said automatically determining the one or more events of the user comprises:

automatically determining a stress event of the user by analyzing changes in the blood pressure and the heart rate with minimal movement.

71. The electronic apparatus of claim 67, wherein the processor module is further configured for:

automatically predicting a future health state of the user by combining the tagged events and a health trajectory output of the user.

72. A method for monitoring a user's cardiovascular health, the method comprising:

collecting at least ECG data and PPG data of the user from a plurality of sensors;

determining health metrics of the user using the collected data; and

outputting at least one of the health metrics and the collected data;

wherein the health metrics comprises at least blood pressure of the user; and wherein said determining the health metrics of the user comprises calculating the blood pressure using a machine learning method based at least one collected data and the user's historical health data.

73. The method of claim 72, wherein the attaching step comprises:

attaching the at least one sensor on the wrist of the user in proximity with a distal radial artery of the user.

74. The method of claim 72, wherein the outputting step comprises:

notifying the user if the at least one sensor is ready to obtain readings, if the readings are being converted to output data, and if collection of data from the sensors has been successfully completed.

75. The method of claim 72, wherein the outputting step comprises:

wirelessly transmitting at least one of the health metrics and the collected data to a remote device.

76. The method of claim 72, wherein the health metrics further comprises at least one of heart rate, pulse measurements, oxygen saturation, PWV, PTT, and activity measurements of the user; the method further comprising:

automatically determining one or more events of the user based on the collected data; and

automatically attaching an electronic tag to said event.

77. The method of claim 76, wherein said automatically determining the one or more events of the user comprises:

automatically determining the one or more events of the user by analyzing the heart rate and activity measurements of the user, wherein said one or more events comprises at least one of resting, exercising, and sleeping.

78. The method of claim 76, wherein said automatically determining the one or more events of the user comprises:

automatically determining an eating event with fatty meals the user have had by analyzing the health metrics; and

automatically attaching an electronic tag to said event with the determined information of the fatty meals.

79. The method of claim 76, wherein said automatically determining the one or more events of the user comprises:

automatically determining a stress event of the user by analyzing changes in the blood pressure and the heart rate with minimal movement.

80. The method of claim 76 further comprising:

automatically predicting a future health state of the user by combining the tagged events and a health trajectory output of the user.

81. A system for monitoring a user's cardiovascular health, the system comprising:

an electronics module; and

an external device configured for coupling to the electronics module;

wherein the electronics module comprises:
 a plurality of sensors for collecting ECG data and PPG data;
 a processor module coupled to the plurality of sensors for receiving data therefrom and
 an output module coupled to the processor module for outputting at least one of collected data to the external device; and

wherein the external device is configured for determining health metrics of the user using the collected data; and wherein said determining the health metrics of the user comprises calculating the blood pressure using a machine learning method based on at least one data received from the output module and the user's historical health data.

82. The system of claim **81** further comprising:

an attachment structure coupled to the electronics module and for positioning the electronics module in proximity with a distal radial artery of the user.

83. The system of claim **81**, wherein the health metrics further comprises at least one of heart rate, pulse measurements, oxygen saturation, PWV, PTT, and activity measurements of the user; and wherein the external device is further configured for:

automatically determining one or more events of the user based on the collected data; and

automatically attaching an electronic tag to said event.

84. The system of claim **81**, wherein said automatically determining the one or more events of the user comprises:
 automatically determining the one or more events of the user by analyzing the heart rate and activity measurements of the user, wherein said one or more events comprises at least one of resting, exercising, and sleeping.

85. One or more non-transitory storage media comprising machine-executable code for monitoring a user's cardiovascular health, wherein the code, when executed, causes a processor of a device to perform actions comprising:

collecting ECG and PPG data of the user from a plurality of sensors;

determining health metrics of the user using the collected data; and

outputting at least one of the health metrics and the collected data;

wherein the health metrics comprises at least blood pressure of the user; and wherein said determining the health metrics of the user comprises calculating the blood pressure using a machine learning method based at least one collected data and the user's historical health data.

86. The one or more non-transitory storage media of claim **85**, wherein said collecting the at least ECG data and PPG data of the user comprises:

collecting at least one of the heart rate, the PWV, and the PTT of the user using at least an ECG sensor; and

collecting oxygen saturation of the user using a pulse oximeter sensor with PPG.

87. The one or more non-transitory storage media of claim **85**, wherein the code, when executed, causes the processor to perform further actions comprising:

collecting the movement data of the user using an accelerometer.

88. The one or more non-transitory storage media of claim **85**, wherein the health metrics further comprises at least one of heart rate, pulse measurements, oxygen saturation, PWV, PTT, and activity measurements of the user; and wherein the code, when executed, causes the processor to perform further actions comprising:

automatically determining one or more events of the user based on the collected data; and

automatically attaching an electronic tag to said event.

89. The one or more non-transitory storage media of claim **88**, wherein said automatically determining the one or more events of the user comprises:

automatically determining the one or more events of the user by analyzing the heart rate and activity measurements of the user, wherein said one or more events comprises at least one of resting, exercising, and sleeping.

* * * * *

专利名称(译)	可穿戴健康监测器和监测健康的方法		
公开(公告)号	US20180301224A1	公开(公告)日	2018-10-18
申请号	US15/768363	申请日	2016-10-13
申请(专利权)人(译)	塑料设计集团有限公司		
当前申请(专利权)人(译)	塑料设计集团有限公司		
[标]发明人	MATICHUK BRUCE DUGUAY RANDY PARKER WILLIAM MOORE MATHEW ANTONIUK TIM		
发明人	MATICHUK, BRUCE DUGUAY, RANDY PARKER, WILLIAM MOORE, MATHEW ANTONIUK, TIM		
IPC分类号	G16H50/20 G06N99/00 G16H40/63 G06K19/077 A61B5/0205 A61B5/16 A61B5/00		
CPC分类号	G16H50/20 G06N99/005 G16H40/63 G06K19/07762 A61B5/0205 A61B5/165 A61B5/4806 A61B5/4866 A61B5/681 A61B5/7267 A61B5/7282 A61B5/02108 A61B5/02416 A61B5/02438 A61B5/026 A61B5/0404 A61B5/1118 A61B5/14542 A61B2562/0219 A61B5/0059 A61B5/021 A61B5/0295 A61B5/0402 A61B5/1455 A61B5/14551 A61B5/6814 A61B5/6826 A61B5/6829 A61B5/6831 A61B5/7221 A61B5/7264 G06N20/00		
优先权	62/240607 2015-10-13 US		
外部链接	Espacenet USPTO		

摘要(译)

提供可穿戴技术，例如可穿戴健康监视器和使用方法。在一些实施例中，可穿戴技术可以佩戴在个人的手腕上并且可以使用加速计，脉搏血氧计和心电图来测量心率，氧饱和度，血压，脉搏波速度和活动。然后将该信息提供给个人。个人可以通过使用通知和自动标记等功能改变他们的行为与自身健康的关系，以更好地了解他们自己在不同时期的压力，饮食，睡眠和运动水平，并随后进行适当的行为改变。

