


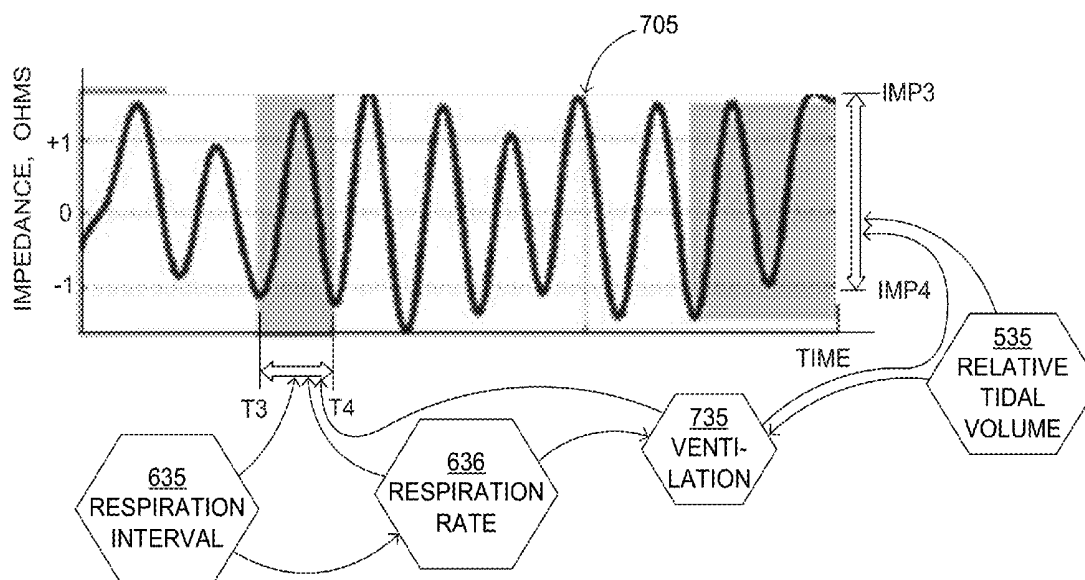


US 20180117299A1

(19) **United States**(12) **Patent Application Publication**  
**Gustavson et al.**(10) **Pub. No.: US 2018/0117299 A1**(43) **Pub. Date: May 3, 2018**(54) **WEARABLE CARDIOVERTER  
DEFIBRILLATOR (WCD) SYSTEM  
MEASURING PATIENT'S RESPIRATION**(52) **U.S. Cl.**  
CPC ..... *A61N 1/046* (2013.01); *A61B 5/0295*  
(2013.01); *A61B 5/002* (2013.01); *A61B*  
*5/0205* (2013.01)(71) Applicant: **West Affum Holdings Corp.**, Grand  
Cayman (KY)(72) Inventors: **Laura M. Gustavson**, Redmond, WA  
(US); **Kenneth Frederick Cowan**,  
Redmond, WA (US)(21) Appl. No.: **15/792,860**(22) Filed: **Oct. 25, 2017****Related U.S. Application Data**(60) Provisional application No. 62/417,147, filed on Nov.  
3, 2016.**Publication Classification**(51) **Int. Cl.**  
*A61N 1/04* (2006.01)  
*A61B 5/0205* (2006.01)  
*A61B 5/00* (2006.01)(57) **ABSTRACT**

A wearable cardioverter defibrillator ("WCD") system may include an impedance detector configured to render an impedance signal of the patient. The WCD system may determine, from the impedance signal, a characteristic of breathing by the patient that can be used as a vital sign. The WCD system may determine, from at least the breathing characteristic, whether or not a shock criterion is met. If the shock criterion is met, the WCD system may control a discharge circuit to discharge a stored electrical charge through the patient. An advantage can be that the breathing characteristic may be used to determine whether or not a patient is experiencing a condition that requires defibrillation therapy, such as sudden cardiac arrest. Even more advantages can be had in discerning the state of the patient when the breathing characteristic is combined with other data, such as from a motion detector.


703

SAMPLE BREATHING CHARACTERISTIC  
(VENTILATION)  
DETERMINED FROM  
SAMPLE IMPEDANCE SIGNAL

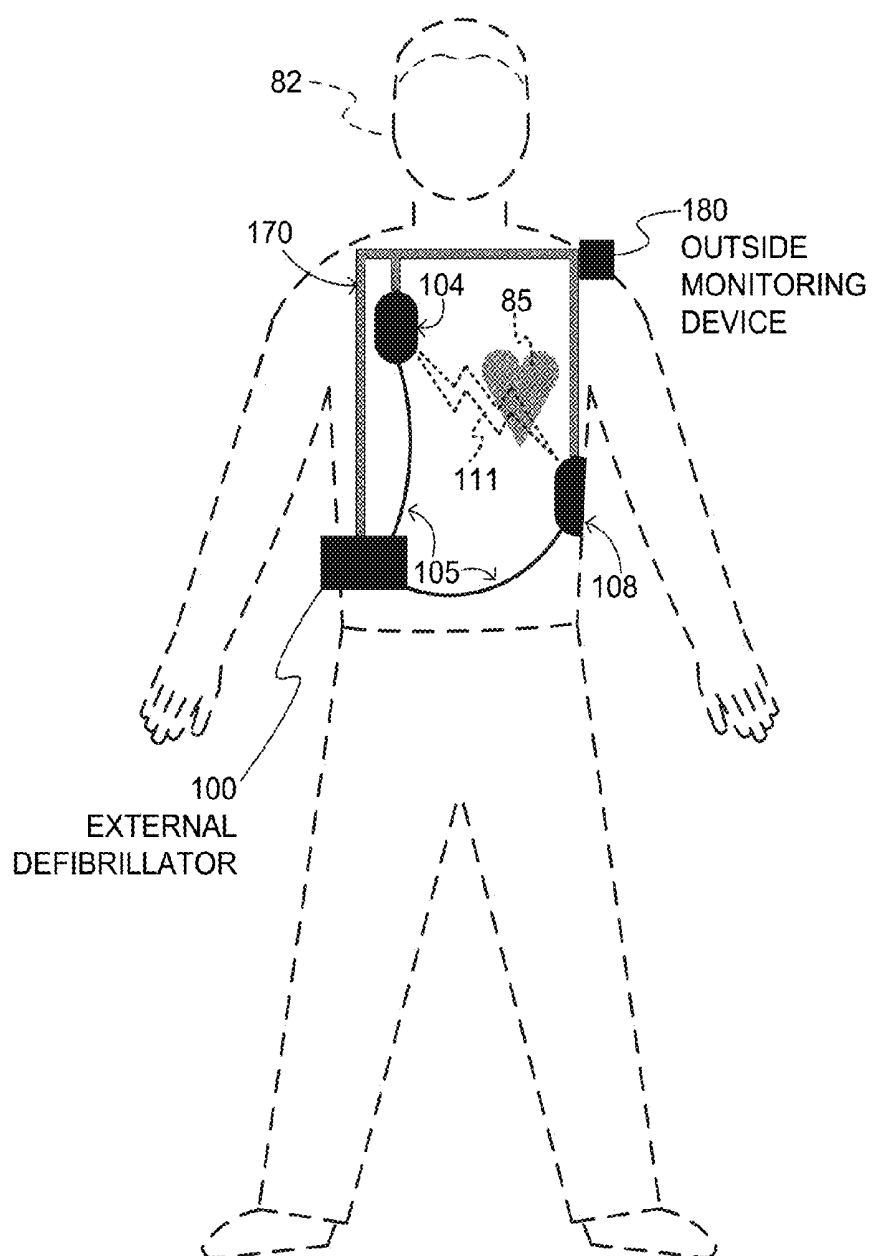


SAMPLE COMPONENTS OF WEARABLE  
CARDIOVERTER DEFIBRILLATOR (WCD)  
SYSTEM


**FIG. 1**

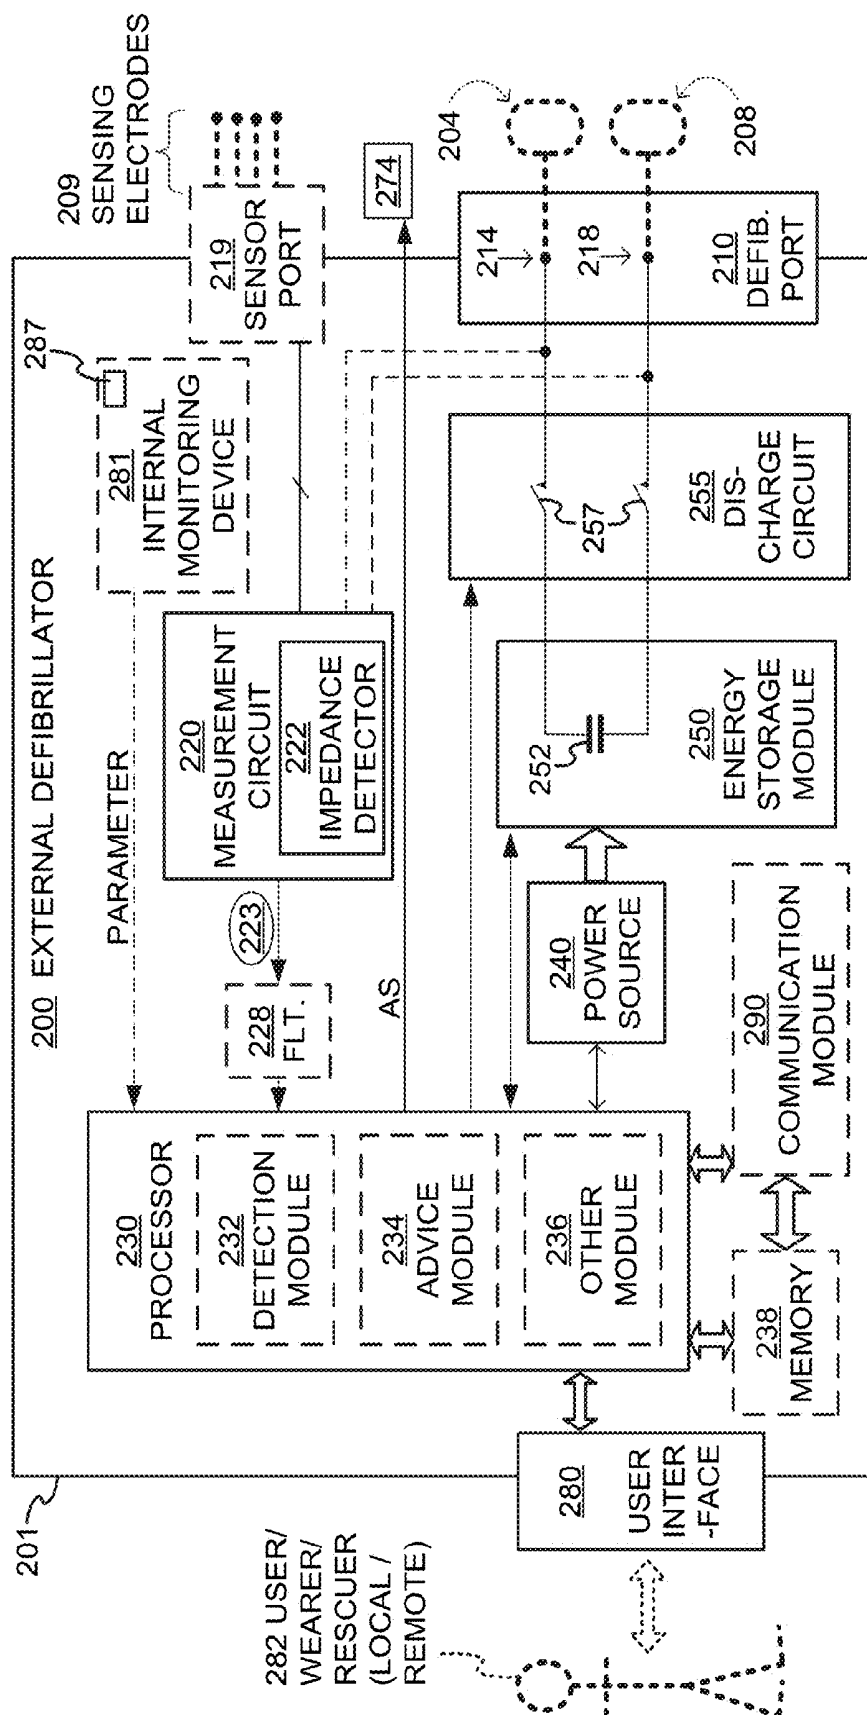


## SAMPLE COMPONENTS OF EXTERNAL DEFIBRILLATOR

**FIG. 2**

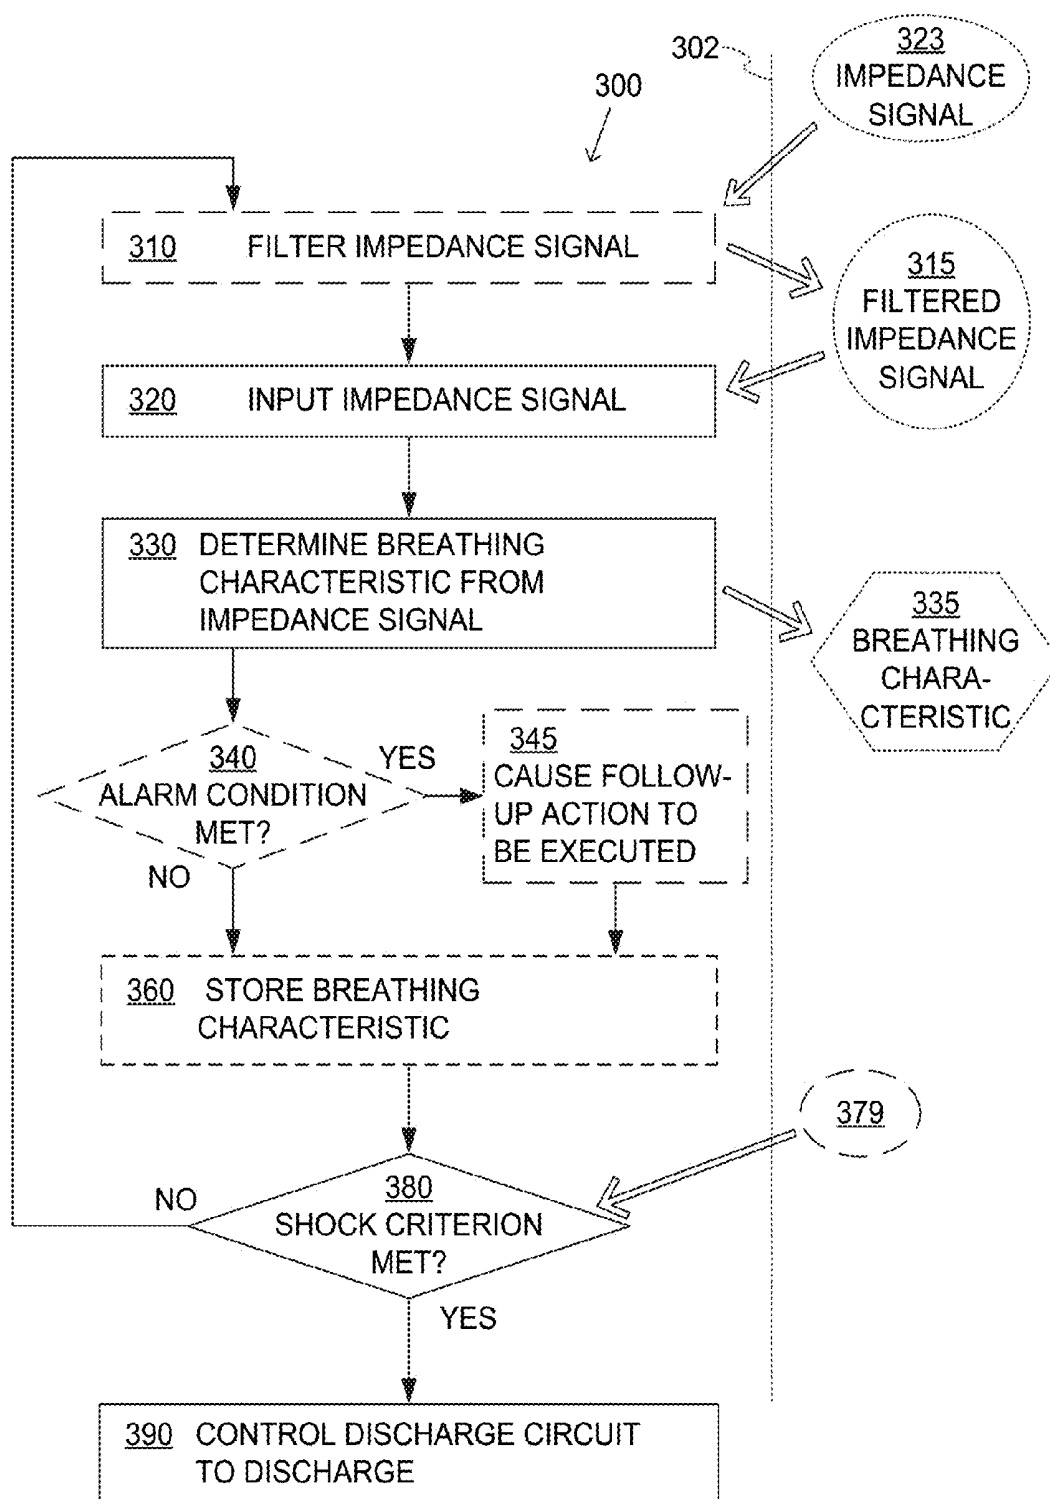
METHODS**FIG. 3**

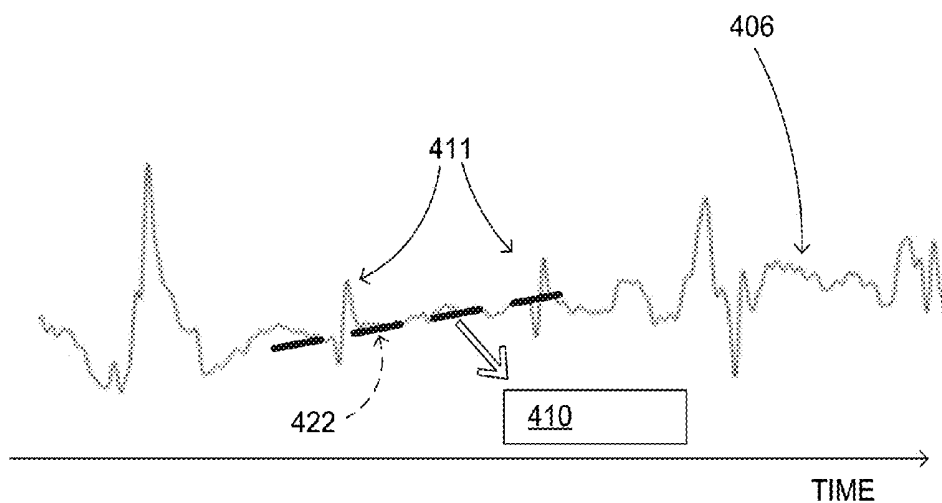

**FIG. 4A** IDENTIFIED SHIFTING BASELINE OF  
SAMPLE RENDERED ECG SIGNAL  
USED IN FILTERING OPERATION

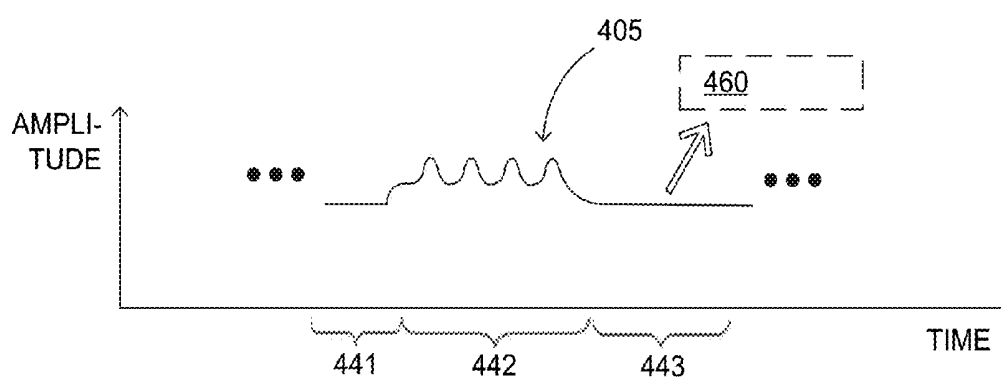


**FIG. 4B** SAMPLE MOTION DETECTION  
SIGNAL OR INPUT

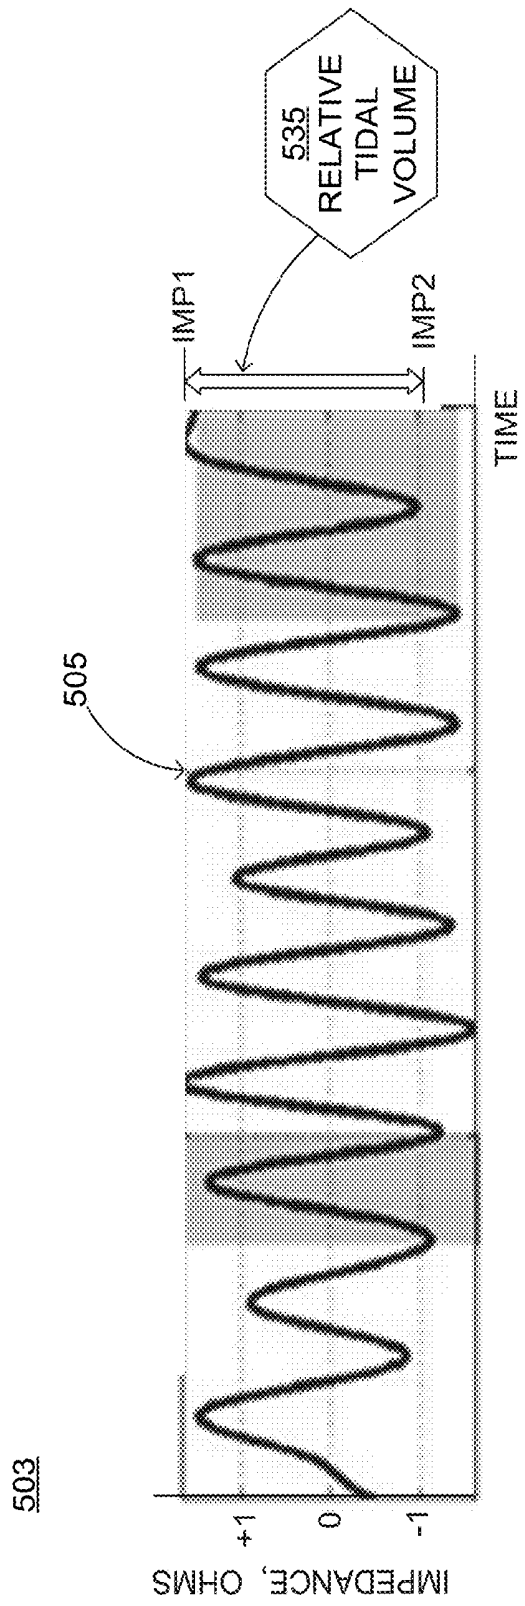


SAMPLE BREATHING CHARACTERISTIC  
(RELATIVE TIDAL VOLUME)  
DETERMINED FROM  
SAMPLE IMPEDANCE SIGNAL

**FIG. 5**

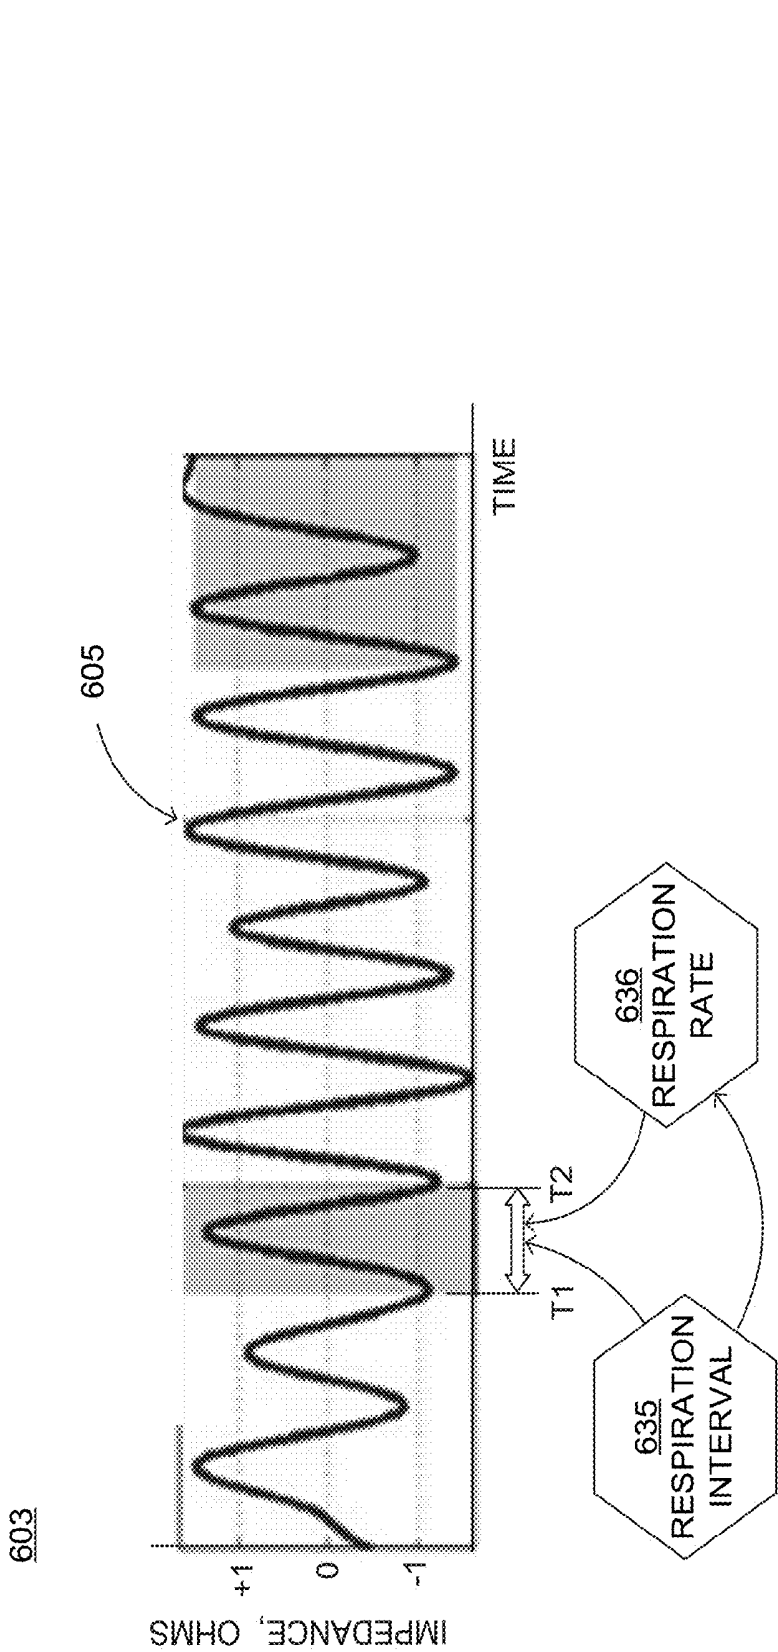

SAMPLE BREATHING CHARACTERISTICS  
(RESPIRATION INTERVAL, RESPIRATION RATE)  
DETERMINED FROM  
SAMPLE IMPEDANCE SIGNAL


**FIG. 6**

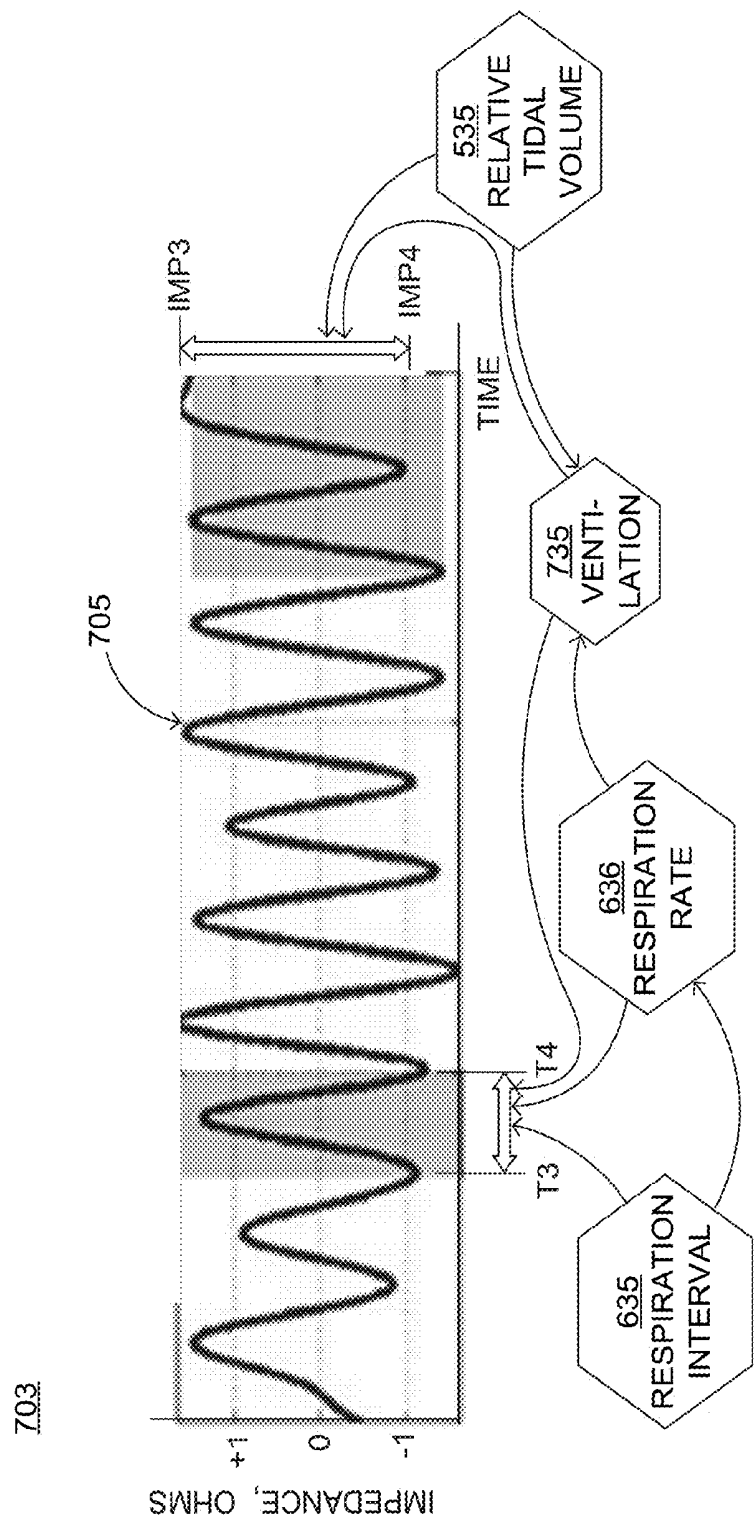

SAMPLE BREATHING CHARACTERISTIC  
(VENTILATION)  
DETERMINED FROM  
SAMPLE IMPEDANCE SIGNAL


**FIG. 7**



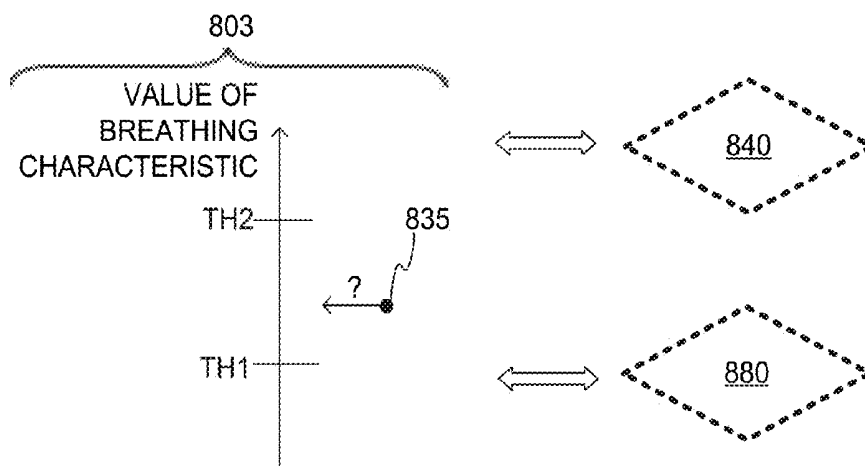

**FIG. 8**

BREATHING CHARACTERISTIC  
VALUE RELATIVE TO  
THRESHOLDS AND RANGES

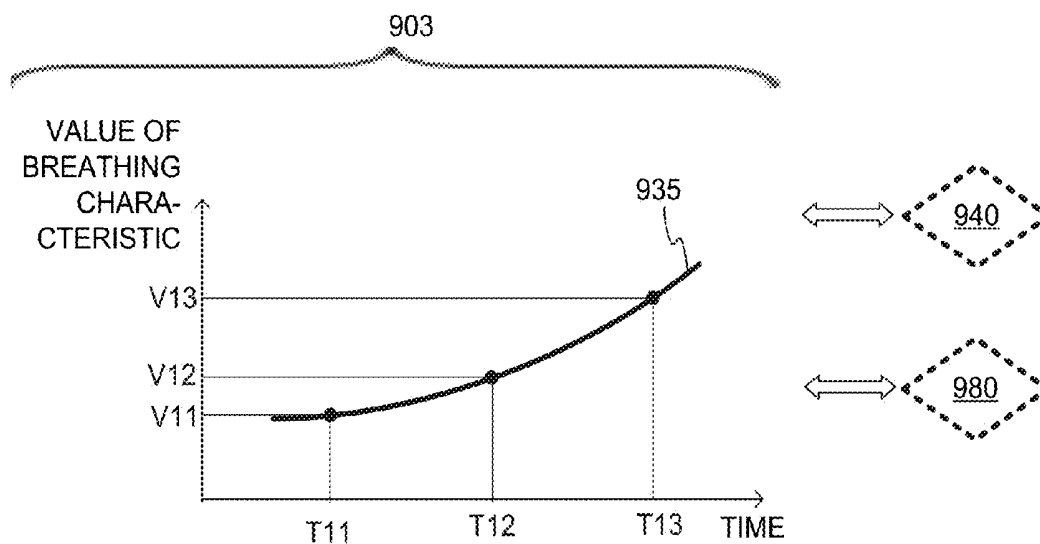

**FIG. 9**

BREATHING CHARACTERISTIC  
CHANGING VALUE OVER TIME

**WEARABLE CARDIOVERTER  
DEFIBRILLATOR (WCD) SYSTEM  
MEASURING PATIENT'S RESPIRATION**

**CROSS REFERENCE TO RELATED PATENT  
APPLICATIONS**

[0001] This patent application claims priority from U.S. Provisional patent application Ser. No. 62/417,147, filed on Nov. 3, 2016, the disclosure of which, as initially made, is hereby incorporated by reference.

**BACKGROUND**

[0002] When people suffer from some types of heart arrhythmias, the result may be that blood flow to various parts of the body is reduced. Some arrhythmias may even result in a Sudden Cardiac Arrest (SCA). SCA can lead to death very quickly, e.g. within 10 minutes, unless treated in the interim.

[0003] Some people have an increased risk of SCA. People at a higher risk include patients who have had a heart attack, or a prior SCA episode. A frequent recommendation is for these people to receive an Implantable Cardioverter Defibrillator (ICD). The ICD is surgically implanted in the chest, and continuously monitors the patient's electrocardiogram (ECG) signal, which is sometimes simply called ECG. If certain types of heart arrhythmias are detected, then the ICD delivers an electric shock through the heart.

[0004] After being identified as having an increased risk of an SCA, and before receiving an ICD, these people are sometimes given a Wearable Cardioverter Defibrillator (WCD) system. (Early versions of such systems were called wearable cardiac defibrillator systems.) A WCD system typically includes a harness, vest, or other garment that the patient is to wear. The WCD system further includes electronic components, such as a defibrillator and electrodes, coupled to the harness, vest, or other garment. When the patient wears the WCD system, the external electrodes may then make good electrical contact with the patient's skin, and therefore can help determine the patient's ECG. If a shockable heart arrhythmia is detected, then the defibrillator delivers the appropriate electric shock through the patient's body, and thus through the heart.

[0005] One of the challenges in developing a WCD system is to determine accurately what patient is experiencing, and therefore to determine whether or not they require defibrillation therapy. With ambulatory patients, there are many sources of noise that can make this difficult by analyzing the ECG waveform alone.

[0006] All subject matter discussed in this Background section of this document is not necessarily prior art, and may not be presumed to be prior art, simply because it is presented in this Background section. Plus, any reference to any prior art in this description is not, and should not be taken as, an acknowledgement or any form of suggestion that such prior art forms parts of the common general knowledge in any country or any art. Along these lines, any recognition of problems in the prior art discussed in this Background section or associated with such subject matter should not be treated as prior art, unless expressly stated to be prior art. Rather, the discussion of any subject matter in this Background section should be treated as part of the approach taken towards the particular problem by the inventors. This approach in and of itself may also be inventive.

**BRIEF SUMMARY**

[0007] The present description gives instances of Wearable Cardioverter Defibrillator (WCD) systems, storage media that store programs, and methods, the use of which may help overcome problems and limitations of the prior art.

[0008] In embodiments, a wearable cardioverter defibrillator ("WCD") system includes an impedance detector configured to render an impedance signal of the patient. The WCD system may determine, from the impedance signal, a characteristic of breathing by the patient that can be used as a vital sign. The WCD system may determine, from at least the breathing characteristic, whether or not a shock criterion is met. If the shock criterion is met, the WCD system may control a discharge circuit to discharge a stored electrical charge through the patient.

[0009] An advantage can be that the breathing characteristic may be used to determine whether or not a patient is experiencing a condition that requires defibrillation therapy, such as sudden cardiac arrest. Even more advantages can be had in discerning the state of the patient when the breathing characteristic is combined with other data, such as from a motion detector.

[0010] These and other features and advantages of the claimed invention will become more readily apparent in view of the embodiments described and illustrated in the present disclosure, namely from the present written specification and the drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0011] FIG. 1 is a diagram of components of a sample wearable cardioverter defibrillator (WCD) system, made according to embodiments.

[0012] FIG. 2 is a diagram showing sample components of an external defibrillator, such as the one belonging in the system of FIG. 1, and which is made according to embodiments.

[0013] FIG. 3 shows a flowchart for illustrating methods according to embodiments, the flowchart annotated with icons of elements that can be related to individual operations of the flowchart.

[0014] FIG. 4A is a time diagram of a sample rendered ECG signal, further annotated to indicate a shifting baseline that may be identified and used in filtering operations according to embodiments.

[0015] FIG. 4B is a time diagram of a sample rendered motion detection signal or input, further annotated to indicate an identified motionless time period, during which a baseline value of a breathing characteristic may be determined according to embodiments.

[0016] FIG. 5 is a time diagram of a sample impedance signal, annotated to illustrate how a breathing characteristic is determined according to embodiments.

[0017] FIG. 6 is a time diagram of a sample impedance signal, annotated to illustrate how another breathing characteristic is determined according to embodiments.

[0018] FIG. 7 is a time diagram of a sample impedance signal, annotated to illustrate how one more breathing characteristic is determined according to embodiments.

[0019] FIG. 8 illustrates how a sample value of a determined breathing characteristic may be used for performing operations according to embodiments.

[0020] FIG. 9 illustrates how changes in a sample value of a determined breathing characteristic may be used for performing operations according to embodiments.

#### DETAILED DESCRIPTION

[0021] As has been mentioned, the present description is about Wearable Cardioverter Defibrillator (WCD) systems, storage media that store programs, and methods. Embodiments are now described in more detail.

[0022] A wearable cardioverter defibrillator (WCD) system made according to embodiments has a number of components. These components can be provided separately as modules that can be interconnected, or can be combined with other components, etc.

[0023] FIG. 1 depicts a patient 82. Patient 82 may also be referred to as a person and/or wearer, since that patient wears components of the WCD system. Patient 82 is ambulatory, which means patient 82 can walk around, and is not necessarily bed-ridden.

[0024] FIG. 1 also depicts components of a WCD system made according to embodiments. One such component is a support structure 170 that is wearable by patient 82. It will be understood that support structure 170 is shown only generically in FIG. 1, and in fact partly conceptually. FIG. 1 is provided merely to illustrate concepts about support structure 170, and is not to be construed as limiting how support structure 170 is implemented, or how it is worn.

[0025] Support structure 170 can be implemented in many different ways. For example, it can be implemented in a single component or a combination of multiple components. In embodiments, support structure 170 could include a vest, a half-vest, a garment, etc. In such embodiments such items can be worn similarly to parallel articles of clothing. In embodiments, support structure 170 could include a harness, one or more belts or straps, etc. In such embodiments, such items can be worn by the patient around the torso, hips, over the shoulder, etc. In embodiments, support structure 170 can include a container or housing, which can even be waterproof. In such embodiments, the support structure can be worn by being attached to the patient by adhesive material, for example as shown in U.S. Pat. No. 8,024,037. Support structure 170 can even be implemented as described for the support structure of U.S. Pat. App. No. US 2017/0056682 A1, which is incorporated herein by reference. Of course, in such embodiments, the person skilled in the art will recognize that additional components of the WCD system can be in the housing of a support structure instead of being attached externally to the support structure, for example as described in the 2017/0056682 document. There can be other examples.

[0026] A WCD system according to embodiments is configured to defibrillate a patient who is wearing it, by delivering an electrical charge to the patient's body in the form of an electric shock delivered in one or more pulses. FIG. 1 shows a sample external defibrillator 100, and sample defibrillation electrodes 104, 108, which are coupled to external defibrillator 100 via electrode leads 105. Defibrillator 100 and defibrillation electrodes 104, 108 can be coupled to support structure 170. As such, many of the components of defibrillator 100 could be therefore coupled to support structure 170. When defibrillation electrodes 104, 108 make good electrical contact with the body of patient 82, defibrillator 100 can administer, via electrodes 104, 108, a brief, strong electric pulse 111 through the body. Pulse 111, also

known as shock, defibrillation shock, therapy or therapy shock, is intended to go through and restart heart 85, in an effort to save the life of patient 82. Pulse 111 can further include one or more pacing pulses, and so on.

[0027] A prior art defibrillator typically decides whether to defibrillate or not based on an ECG signal of the patient. However, external defibrillator 100 may initiate defibrillation (or hold-off defibrillation) based on a variety of inputs, with ECG merely being one of them.

[0028] Accordingly, it will be appreciated that signals such as physiological signals containing physiological data can be obtained from patient 82. While the patient may be considered also a "user" of the WCD system, this is not a requirement. That is, for example, a user of the wearable cardioverter defibrillator (WCD) may include a clinician such as a doctor, nurse, emergency medical technician (EMT) or other similarly situated individual (or group of individuals). The particular context of these and other related terms within this description should be interpreted accordingly.

[0029] The WCD system may optionally include an outside monitoring device 180. Device 180 is called an "outside" device because it could be provided as a standalone device, for example not within the housing of defibrillator 100. Device 180 can be configured to sense or monitor at least one local parameter. A local parameter can be a parameter of patient 82, or a parameter of the WCD system, or a parameter of the environment, as will be described later in this document. Device 180 may include one or more transducers or sensors that are configured to render one or more physiological inputs or signals from one or more patient parameters that they sense.

[0030] Optionally, device 180 is physically coupled to support structure 170. In addition, device 180 can be communicatively coupled with other components, which are coupled to support structure 170. Such communication can be implemented by a communication module, as will be deemed applicable by a person skilled in the art in view of this description.

[0031] FIG. 2 is a diagram showing components of an external defibrillator 200, made according to embodiments. These components can be, for example, included in external defibrillator 100 of FIG. 1. The components shown in FIG. 2 can be provided in a housing 201, which may also be referred to as casing 201.

[0032] External defibrillator 200 is intended for a patient who would be wearing it, such as patient 82 of FIG. 1. Defibrillator 200 may further include a user interface 280 for a user 282. User 282 can be patient 82, also known as wearer 82. Or, user 282 can be a local rescuer at the scene, such as a bystander who might offer assistance, or a trained person. Or, user 282 might be a remotely located trained caregiver in communication with the WCD system.

[0033] User interface 280 can be made in a number of ways. User interface 280 may include output devices, which can be visual, audible or tactile, for communicating to a user by outputting images, sounds or vibrations. Images, sounds, vibrations, and anything that can be perceived by user 282 can also be called human-perceptible indications. There are many examples of output devices. For example, an output device can be a light, or a screen to display what is sensed, detected and/or measured, and provide visual feedback to rescuer 282 for their resuscitation attempts, and so on. Another output device can be a speaker, which can be

configured to issue voice prompts, beeps, loud alarm sounds and/or words to warn bystanders, etc.

**[0034]** User interface **280** may further include input devices for receiving inputs from users. Such input devices may additionally include various controls, such as pushbuttons, keyboards, touchscreens, one or more microphones, and so on. An input device can be a cancel switch, which is sometimes called an “I am alive” switch or “live man” switch. In some embodiments, actuating the cancel switch can prevent the impending delivery of a shock.

**[0035]** Defibrillator **200** may include an internal monitoring device **281**. Device **281** is called an “internal” device because it is incorporated within housing **201**. Monitoring device **281** can sense or monitor patient parameters such as patient physiological parameters, system parameters and/or environmental parameters, all of which can be called patient data. In other words, internal monitoring device **281** can be complementary or an alternative to outside monitoring device **180** of FIG. 1. Allocating which of the parameters are to be monitored by which of monitoring devices **180**, **281** can be done according to design considerations. Device **281** may include one or more transducers or sensors that are configured to render one or more physiological inputs from one or more patient parameters that it senses.

**[0036]** Patient parameters may include patient physiological parameters. Patient physiological parameters may include, for example and without limitation, those physiological parameters that can be of any help in detecting by the wearable defibrillation system whether the patient is in need of a shock, plus optionally their medical history and/or event history. Examples of such parameters include the patient’s ECG, blood oxygen level, blood flow, blood pressure, blood perfusion, pulsatile change in light transmission or reflection properties of perfused tissue, heart sounds, heart wall motion, breathing sounds and pulse. Accordingly, monitoring devices **180**, **281** may include one or more sensors configured to acquire patient physiological signals. Examples of such sensors or transducers include electrodes to detect ECG data, a perfusion sensor, a pulse oximeter, a device for detecting blood flow (e.g. a Doppler device), a sensor for detecting blood pressure (e.g. a cuff), an optical sensor, illumination detectors and sensors perhaps working together with light sources for detecting color change in tissue, a motion sensor, a device that can detect heart wall movement, a sound sensor, a device with a microphone, an SpO<sub>2</sub> sensor, and so on. In view of this disclosure, it will be appreciated that such sensors can help detect the patient’s pulse, and can therefore also be called pulse detection sensors, pulse sensors, and pulse rate sensors. Pulse detection is also taught at least in Physio-Control’s U.S. Pat. No. 8,135,462, which is hereby incorporated by reference in its entirety. In addition, a person skilled in the art may implement other ways of performing pulse detection. In such cases, the transducer includes an appropriate sensor, and the physiological input is a measurement by the sensor of that patient parameter. For example, the appropriate sensor for a heart sound may include a microphone, etc.

**[0037]** In some embodiments, the local parameter is a trend that can be detected in a monitored physiological parameter of patient **282**. A trend can be detected by comparing values of parameters at different times. Parameters whose detected trends can particularly help a cardiac rehabilitation program include: a) cardiac function (e.g. ejection fraction, stroke volume, cardiac output, etc.); b)

heart rate variability at rest or during exercise; c) heart rate profile during exercise and measurement of activity vigor, such as from the profile of an accelerometer signal and informed from adaptive rate pacemaker technology; d) heart rate trending; e) perfusion, such as from SpO<sub>2</sub> or CO<sub>2</sub>; f) respiratory function, respiration rate, etc.; g) motion, level of activity; and so on. Once a trend is detected, it can be stored and/or reported via a communication link, along perhaps with a warning. From the report, a physician monitoring the progress of patient **282** will know about a condition that is either not improving or deteriorating.

**[0038]** Patient state parameters include recorded aspects of patient **282**, such as motion, posture, whether they have spoken recently plus maybe also what they said, and so on, plus optionally the history of these parameters. Or, one of these monitoring devices could include a location sensor such as a Global Positioning System (GPS) location sensor. Such a sensor can detect the location, plus a speed can be detected as a rate of change of location over time. Many motion detectors output a motion signal that is indicative of the motion of the detector, and thus of the patient’s body. Patient state parameters can be very helpful in narrowing down the determination of whether SCA is indeed taking place.

**[0039]** A WCD system made according to embodiments may include a motion detector. In embodiments, a motion detector can be implemented within monitoring device **180** or monitoring device **281**. Such a motion detector can be made in many ways as is known in the art, for example by using an accelerometer. In this example, a motion detector **287** is implemented within monitoring device **281**.

**[0040]** A motion detector of a WCD system according to embodiments can be configured to detect a motion event, or motion in general. In response, the motion detector may render or generate, from the detected motion event or motion, a motion detection input or signal that can be received by a subsequent device or functionality. A motion event can be defined as is convenient, for example a change in motion from a baseline motion or rest, etc. In such cases, the patient parameter is a motion.

**[0041]** System parameters of a WCD system can include system identification, battery status, system date and time, reports of self-testing, records of data entered, records of episodes and intervention, and so on.

**[0042]** Environmental parameters can include ambient temperature and pressure. Moreover, a humidity sensor may provide information as to whether it is likely raining. Presumed patient location could also be considered an environmental parameter. The patient location could be presumed, if monitoring device **180** or **281** includes a GPS location sensor as per the above, and if it is presumed that the patient is wearing the WCD system.

**[0043]** Defibrillator **200** typically includes a defibrillation port **210**, such as a socket in housing **201**. Defibrillation port **210** includes electrical nodes **214**, **218**. Leads of defibrillation electrodes **204**, **208**, such as leads **105** of FIG. 1, can be plugged into defibrillation port **210**, so as to make electrical contact with nodes **214**, **218**, respectively. It is also possible that defibrillation electrodes **204**, **208** are connected continuously to defibrillation port **210**, instead. Either way, defibrillation port **210** can be used for guiding, via electrodes, to the wearer the electrical charge that has been stored in an energy storage module **250** that is described

more fully later in this document. The electric charge will be the shock for defibrillation, pacing, and so on.

**[0044]** Defibrillator **200** may optionally also have a sensor port **219** in housing **201**, which is also sometimes known as an ECG port. Sensor port **219** can be adapted for plugging in sensing electrodes **209**, which are also known as ECG electrodes and ECG leads. It is also possible that sensing electrodes **209** can be connected continuously to sensor port **219**, instead. Sensing electrodes **209** are types of transducers that can help sense an ECG signal or an impedance signal. The ECG signal may be, for example, a 12-lead signal, or a signal from a different number of leads, especially if they make good electrical contact with the body of the patient. Sensing electrodes **209** can be attached to the inside of support structure **170** for making good electrical contact with the patient, similarly with defibrillation electrodes **204**, **208**.

**[0045]** Optionally a WCD system according to embodiments also includes a fluid that it can deploy automatically between the electrodes and the patient's skin. The fluid can be conductive, such as by including an electrolyte, for establishing a better electrical contact between the electrode and the skin. Electrically speaking, when the fluid is deployed, the electrical impedance between the electrode and the skin is reduced. Mechanically speaking, the fluid may be in the form of a low-viscosity gel, so that it does not flow away from the electrode, after it has been deployed. The fluid can be used for both defibrillation electrodes **204**, **208**, and for sensing electrodes **209**.

**[0046]** The fluid may be initially stored in a fluid reservoir, not shown in FIG. 2, which can be coupled to the support structure. In addition, a WCD system according to embodiments further includes a fluid deploying mechanism **274**. Fluid deploying mechanism **274** can be configured to cause at least some of the fluid to be released from the reservoir, and be deployed near one or both of the patient locations, to which the electrodes are configured to be attached to the patient. In some embodiments, fluid deploying mechanism **274** is activated prior to the electrical discharge responsive to receiving activation signal AS from a processor **230**, which is described more fully later in this document.

**[0047]** In some embodiments, defibrillator **200** also includes a measurement circuit **220**, as one or more of its sensors or transducers. Measurement circuit **220** senses one or more electrical physiological signals of the patient from sensor port **219**, if provided. Even if defibrillator **200** lacks sensor port **219**, measurement circuit **220** may optionally obtain physiological signals through nodes **214**, **218** instead, when defibrillation electrodes **204**, **208** are attached to the patient. In these cases, the physiological input may reflect an ECG measurement. The patient parameter can be an ECG, which can be sensed as a voltage difference between electrodes **204**, **208**.

**[0048]** Measurement circuit **220** may also include an impedance detector **222**. As such, the patient parameter can be an impedance, which can be sensed between electrodes **204**, **208** and/or the connections of sensor port **219**. Sensing the impedance can be useful for detecting, among other things, whether these electrodes **204**, **208** and/or sensing electrodes **209** are not making good electrical contact with the patient's body. In embodiments, impedance detector **222** is configured to render an impedance signal **223** of the patient. The impedance signal can be rendered as a modulation to a carrier signal, as a stream of values, and so on.

**[0049]** These patient physiological signals can be sensed, when available. Measurement circuit **220** can then render or generate information about them as physiological inputs, data, other signals, etc. More strictly speaking, the information rendered by measurement circuit **220** is output from it, but this information can be called an input because it is received by a subsequent device or functionality as an input.

**[0050]** In some embodiments, defibrillator **200** also includes a stand-alone filter **228**. Filter **228** can be configured to receive signals rendered by measurement circuit **220**, such as the ECG signal, impedance signal **223**, and so on. Filter **228** can be configured to derive a filtered impedance signal from the rendered impedance signal. The filtered impedance signal may correspond to the rendered impedance signal, with at least a portion of the rendered impedance signal changed. Alternately, filtering signals may be accomplished by processing numbers within a processor, such as is described below.

**[0051]** Defibrillator **200** also includes a processor **230**. Processor **230** may be implemented in a number of ways. Such ways include, by way of example and not of limitation, digital and/or analog processors such as microprocessors and Digital Signal Processors (DSPs); controllers such as microcontrollers; software running in a machine; programmable circuits such as Field Programmable Gate Arrays (FPGAs), Field-Programmable Analog Arrays (FPAAs), Programmable Logic Devices (PLDs), Application Specific Integrated Circuits (ASICs), any combination of one or more of these, and so on.

**[0052]** Processor **230** may include, or have access to, a non-transitory storage medium, such as memory **238** that is described more fully later in this document. Such a memory can have a non-volatile component for storage of machine-readable and machine-executable instructions. A set of such instructions can also be called a program. The instructions, which may also be referred to as "software," generally provide functionality by performing methods as may be disclosed herein or understood by one skilled in the art in view of the disclosed embodiments. In some embodiments, and as a matter of convention used herein, instances of the software may be referred to as a "module" and by other similar terms. Generally, a module includes a set of the instructions so as to offer or fulfill a particular functionality. Embodiments of modules and the functionality delivered are not limited by the embodiments described in this document.

**[0053]** Processor **230** can be considered to have a number of modules. One such module can be a detection module **232**. Detection module **232** can include a Ventricular Fibrillation (VF) detector. The patient's sensed ECG from measurement circuit **220**, which can be available as physiological inputs, data, or other signals, may be used by the VF detector to determine whether the patient is experiencing VF. Detecting VF is useful, because VF typically results in SCA. Detection module **232** can also include a Ventricular Tachycardia (VT) detector, and so on.

**[0054]** Another such module in processor **230** can be an advice module **234**, which generates advice for what to do. The advice can be based on outputs of detection module **232**. There can be many types of advice according to embodiments. In some embodiments, the advice is a shock/no shock determination that processor **230** can make, for example via advice module **234**. The shock/no shock determination can be made by executing a stored Shock Advisory Algorithm. A Shock Advisory Algorithm can make a shock/no shock

determination from one or more ECG signals that are captured according to embodiments, and determining whether a shock criterion is met. The determination can be made from a rhythm analysis of the captured ECG signal or otherwise.

**[0055]** In some embodiments, when the determination is to shock, an electrical charge is delivered to the patient. Delivering the electrical charge is also known as discharging. Shocking can be for defibrillation, pacing, and so on.

**[0056]** Processor **230** can include additional modules, such as other module **236**, for other functions. In addition, if internal monitoring device **281** is indeed provided, it may be operated in part by processor **230**, etc.

**[0057]** Defibrillator **200** optionally further includes a memory **238**, which can work together with processor **230**. Memory **238** may be implemented in a number of ways. Such ways include, by way of example and not of limitation, volatile memories, Nonvolatile Memories (NVM), Read-Only Memories (ROM), Random Access Memories (RAM), magnetic disk storage media, optical storage media, smart cards, flash memory devices, any combination of these, and so on. Memory **238** is thus a non-transitory storage medium. Memory **238**, if provided, can include programs for processor **230**, which processor **230** may be able to read and execute. More particularly, the programs can include sets of instructions in the form of code, which processor **230** may be able to execute upon reading. Executing is performed by physical manipulations of physical quantities, and may result in functions, operations, processes, actions and/or methods to be performed, and/or the processor to cause other devices or components or blocks to perform such functions, operations, processes, actions and/or methods. The programs can be operational for the inherent needs of processor **230**, and can also include protocols and ways that decisions can be made by advice module **234**. In addition, memory **238** can store prompts for user **282**, if this user is a local rescuer. Moreover, memory **238** can store data. This data can include patient data, system data and environmental data, for example as learned by internal monitoring device **281** and outside monitoring device **180**. The data can be stored in memory **238** before it is transmitted out of defibrillator **200**, or stored there after it is received by defibrillator **200**.

**[0058]** Defibrillator **200** may also include a power source **240**. To enable portability of defibrillator **200**, power source **240** typically includes a battery. Such a battery is typically implemented as a battery pack, which can be rechargeable or not. Sometimes a combination is used of rechargeable and non-rechargeable battery packs. Other embodiments of power source **240** can include an AC power override, for where AC power will be available, an energy-storing capacitor, and so on. In some embodiments, power source **240** is controlled by processor **230**. Appropriate components may be included to provide for charging or replacing power source **240**.

**[0059]** Defibrillator **200** may additionally include an energy storage module **250**. Energy storage module **250** can be coupled to the support structure of the WCD system, for example either directly or via the electrodes and their leads. Module **250** is where some electrical energy can be stored temporarily in the form of an electrical charge, when preparing it for discharge to administer a shock. In embodiments, module **250** can be charged from power source **240** to the desired amount of energy, as controlled by processor **230**. In typical implementations, module **250** includes a

capacitor **252**, which can be a single capacitor or a system of capacitors, and so on. In some embodiments, energy storage module **250** includes a device that exhibits high power density, such as an ultracapacitor. As described above, capacitor **252** can store the energy in the form of an electrical charge, for delivering to the patient.

**[0060]** Defibrillator **200** moreover includes a discharge circuit **255**. When the decision is to shock, processor **230** can be configured to control discharge circuit **255** to discharge through the patient the electrical charge stored in energy storage module **250**. When so controlled, circuit **255** can permit the energy stored in module **250** to be discharged to nodes **214**, **218**, and from there also to defibrillation electrodes **204**, **208**, so as to cause a shock to be delivered to the patient. Circuit **255** can include one or more switches **257**. Switches **257** can be made in a number of ways, such as by an H-bridge, and so on. Circuit **255** can also be controlled via user interface **280**.

**[0061]** Defibrillator **200** can optionally include a communication module **290**, for establishing one or more wired or wireless communication links with other devices of other entities, such as a remote assistance center, Emergency Medical Services (EMS), and so on. The data can include patient data, event information, therapy attempted, CPR performance, system data, environmental data, and so on. For example, communication module **290** may transmit wirelessly, on a daily basis, heart rate, respiratory rate, and other vital signs data to a server accessible over the internet, for instance as described in US 20140043149. This data can be analyzed directly by the patient's physician and can also be analyzed automatically by algorithms designed to detect a developing illness and then notify medical personnel via text, email, phone, etc. In addition, communication module **290** may also have the capability to contact emergency services when an episode of sudden cardiac death is detected or other critical illnesses are detected. Module **290** may also include such interconnected sub-components as may be deemed necessary by a person skilled in the art, for example an antenna, portions of a processor, supporting electronics, outlet for a telephone or a network cable, etc. This way, data, commands, etc. can be communicated.

**[0062]** Defibrillator **200** can optionally include other components.

**[0063]** Returning to FIG. 1, in embodiments, one or more of the components of the shown WCD system have been customized for patient **82**. This customization may include a number of aspects. For instance, support structure **170** can be fitted to the body of patient **82**. For another instance, baseline physiological parameters of patient **82** can be measured, such as the heart rate of patient **82** while resting, while walking, motion detector outputs while walking, etc. Such baseline physiological parameters can be used to customize the WCD system, in order to make its diagnoses more accurate, since the patients' bodies differ from one another. Of course, such parameters can be stored in a memory of the WCD system, and so on.

**[0064]** A programming interface can be made according to embodiments, which receives such measured baseline physiological parameters. Such a programming interface may input automatically in the WCD system the baseline physiological parameters, along with other data.

**[0065]** The devices and/or systems mentioned in this document perform functions, processes and/or methods. These functions, processes and/or methods may be imple-

mented by one or more devices that include logic circuitry. Such a device can be alternately called a computer, and so on. It may be a standalone device or computer, such as a general purpose computer, or part of a device that has one or more additional functions. The logic circuitry may include a processor and non-transitory computer-readable storage media, such as memories, of the type described elsewhere in this document. Often, for the sake of convenience only, it is preferred to implement and describe a program as various interconnected distinct software modules or features. These, along with data are individually and also collectively known as software. In some instances, software is combined with hardware, in a mix called firmware.

[0066] Moreover, methods and algorithms are described below. These methods and algorithms are not necessarily inherently associated with any particular logic device or other apparatus. Rather, they are advantageously implemented by programs for use by a computing machine, such as a general-purpose computer, a special purpose computer, a microprocessor, a processor such as described elsewhere in this document, and so on.

[0067] This detailed description includes flowcharts, display images, algorithms, and symbolic representations of program operations within at least one computer readable medium. An economy is achieved in that a single set of flowcharts is used to describe both programs, and also methods. So, while flowcharts described methods in terms of boxes, they also concurrently describe programs.

[0068] Methods are now described.

[0069] FIG. 3 shows a flowchart 300 for illustrating methods according to embodiments. Flowchart 300 includes operations that are linked by arrows. A vertical line 302 is at the right side of flowchart 300. Further to the right of vertical line 302 are shown icons of elements that can be related to individual operations of flowchart 300. These icons are indicated as linked with their respective operations by using wider arrows that cross line 302. These wider arrows, however, do not form part of flowchart 300.

[0070] FIG. 3 starts with an optional operation 310, according to which a rendered impedance signal 323 may be filtered, to derive a filtered impedance signal 315. Rendered impedance signal 323 may be the impedance signal rendered by an impedance detector, such as impedance signal 223.

[0071] The filtering of operation 310 may be performed in a number of ways. For example, filtered impedance signal 315 may be derived by removing from rendered impedance signal 323 variations that have a frequency greater than a threshold frequency, such as 10 Hz. Or, filtered impedance signal 315 may be derived by removing from rendered impedance 323 signal variations that repeat over a period of at least 30 seconds.

[0072] In some embodiments, filtering is informed by another, concurrent signal from another transducer. Two examples are developed in this document, although more are possible.

[0073] First, referring tentatively to FIG. 4A, a WCD system may further include a transducer configured to render an electrocardiogram (ECG) signal 406 of the patient, such as sensing electrodes 209 in combination with measurement circuit 220, etc. In signal 406, QRS complexes 411 may be identified. In addition, variations in a baseline of ECG signal 406 may be identified. For example, a line segment 422 shows an instance where the baseline of signal 406 is shifting. In this instance, line segment 422 is largely defined

between the two identified QRS complexes 411, but that is coincidental; in fact, such line segments may be defined at other times of signal 406. The filtered impedance signal, then, may be derived by removing from the rendered impedance signal variations that are concurrent with the identified variations of ECG signal 406, variations such as indicated by line segment 422. In other words, the slope of line segment 422 may inform a filtering operation 410, which may be performed as operation 310.

[0074] For a second example, a WCD system may further include a motion detector, such as was described above. Variations may be identified in the motion detection signal. The filtered impedance signal may be derived by removing from the rendered impedance signal variations that are concurrent with the identified variations in the motion detection signal.

[0075] Returning to FIG. 3, after optional operation 310, according to another operation 320, an impedance signal of the patient may be input. The impedance signal input at operation 320 may be rendered impedance signal 323, if optional operation 310 is not performed. Alternately, the impedance signal input at operation 320 may be filtered impedance signal 315, instead of rendered impedance signal 323.

[0076] According to another operation 330, a characteristic of breathing 335 by the patient may be determined from the impedance signal input at operation 320. If operation 310 has been performed, characteristic 335 is determined from filtered impedance signal 315, instead of from rendered impedance signal 323.

[0077] According to another, optional operation 340, it may be determined whether or not breathing characteristic 335 meets an alarm condition. If the answer at operation 340 is YES then, according to another, optional operation 345, a follow-up action may be caused to be executed. In other words, the follow-up action may be caused to be executed responsive to determining that the alarm condition is thus met at operation 340. Examples are given later in this document.

[0078] After operation 345, or if the answer at operation 340 is NO then, according to another, optional operation 360, a value of breathing characteristic 335 may be stored in a memory, such as memory 238. Note that this operation 360 may store values as a matter of record. In some instances, some of these stored values may be used to form a baseline for comparison.

[0079] According to another operation 380, it may be determined whether or not a shock criterion is met. If at operation 380 the answer is NO, then execution may return to a previous operation, such as operation 310. Else, if at operation 380 the answer is YES, then according to another operation 390, a discharge circuit such as discharge circuit 255 may be controlled to discharge stored electrical charge through the patient, while the support structure is worn by the patient. This would deliver electrical therapy.

[0080] The determination of operation 380 may be further performed in a number of ways. Examples are now described.

[0081] In some embodiments, the determination of operation 380 is performed from at least breathing characteristic 335. For instance, a baseline value for breathing characteristic 335 may be stored in a memory, such as memory 238. Then a difference may be computed of a current value of the breathing characteristic and the stored baseline value. Then

it may be determined at least in part that the shock criterion is met, responsive to the computed difference being larger than a threshold.

[0082] A baseline value for breathing characteristic 335 may be a set value, or a value customized to the patient by training the WCD system or by separately evaluating the patient. For example, referring now to FIG. 4B, a time diagram is shown of a sample rendered motion detection signal 405, which is also called motion detection input 405. Three time domains 441, 442, 443 are identified. A motion event is detected in time domain 442. Signal 405 could indicate that the patient rose from a chair, walked four steps to another chair, and then sat down again. Motionlessness is detected in time domains 441 & 443. In such embodiments, a baseline value for breathing characteristic 335 may be determined from a portion of an impedance signal, to be discussed later, in view of a portion of motion detection signal 405 relative to the portion of the impedance signal. For example, time domain 443 of motionlessness may be used to inform when a storing operation 460 may be performed for purposes of developing a baseline. Otherwise, operation 460 may be performed as described for operation 360. As such, the above-mentioned portion of the impedance signal may be concurrent with a portion of motion detection signal 405 that is motionless, such as during time periods 441 & 443, or presumed walking, such as during time period 442, and so on. Different baseline values may be stored for different activities.

[0083] In some embodiments, the determination of operation 380 is performed from also another input 379. Input 379 may be derived from a transducer configured to render an input from a sensed parameter of the patient, the input being distinct from the impedance signal. The processor may be able to determine from at least input 379 and breathing characteristic 335 whether or not the shock criterion is met. Two particular examples are now described, although more are possible.

[0084] As a first example, input 379 can be an input of the motion detector mentioned above. The processor can be configured to determine from at least the motion detection signal and breathing characteristic 335 whether or not the shock criterion is met. For instance, a motion detection input 379 that includes a sudden motion of large amplitude during the day or while walking, followed by lack of any motion thereafter, may indicate SCA, where the patient dropped and has remained motionless. In such an instance, motion detection input 379 may also be used for performing operation 380.

[0085] The combination of motion detection signal 405 may resolve ambiguities, especially given that the ECG signal is often hampered by electrical noise. For example, motion detection signal 405 may be used to qualify an abnormally high detected heart rate, to determine if it is being caused by strenuous physical exercise or an emerging illness. Variations of the raw impedance signal can be analyzed to look for correlated variation on the ECG signal to indicate noise caused by electrode movement. Moreover, the raw, rendered impedance signal used to determine the respiration rate can be used by the processor's algorithm to help determine if a fast rate detected on the ECG signal is an actual cardiac signal, or noise that is being caused by movement of the electrodes. Movement of the electrodes may also cause variations in impedance, and if the impedance variation can be correlated to the fast rate seen on the

ECG then that is an indicator the fast rate is actually noise caused by motion and not a VT or VF rhythm. An abnormal respiration rate can be used by the defibrillation therapy algorithm to trigger more processor intensive analysis of the ECG waveforms and other sensor data that would not normally be used in order to conserve battery power.

[0086] As a second example, input 379 can be an ECG signal of the patient, which is the input used to determine whether or not the shock criterion is met. For example, a rhythm analysis of the ECG signal may be performed to determine whether or not the shock criterion is met. The rhythm analysis can be performed in a first manner if it is determined that breathing characteristic 335 meets an alert criterion, while the rhythm analysis can be performed in a second manner different than the first manner otherwise. The alert criterion may be that breathing characteristic 335 has a value that is within a safe range, exceeds a threshold, etc. Moreover, the first manner can be different from the second manner in a number of ways. For example, the first manner may include a first set of analyses of the ECG signal, while the second manner may include the first set of analyses plus at least one more analysis that is not included in the first set of analyses.

[0087] Examples of different breathing characteristics are now described.

[0088] For one example, the breathing characteristic can be a relative tidal volume. For instance, FIG. 5 is a time diagram 503 of a sample impedance signal 505. Impedance signal 505 may be as rendered from impedance detector 222, with or without the aforementioned filtering.

[0089] In diagram 503, signal 505 is annotated to illustrate how a breathing characteristic 535 may be determined. In particular, a relative amplitude of impedance signal 505 can be detected, such as the difference between impedance values IMP1 and IMP2. Then the relative tidal volume can be determined from the detected relative amplitude.

[0090] Further variations are possible, for computing a more accurate value of relative tidal volume 535. For example, a plurality of relative amplitudes of the impedance signal may be detected for a predetermined period of time, or for predetermined number of cycles. Then an average relative tidal volume may be determined from the plurality of detected relative amplitudes, and so on.

[0091] For another example, the breathing characteristic can be a respiration interval or a respiration rate (RR). For instance, FIG. 6 is a time diagram 603 of a sample impedance signal 605. Impedance signal 605 may be as rendered from impedance detector 222, with or without the aforementioned filtering.

[0092] In diagram 603, signal 605 is annotated to illustrate how a breathing characteristic 635 may be determined. In particular, a period of impedance signal 605 can be detected, such as the difference between time values T1 and T2. Then the detected period can be treated as the respiration interval 635. Or, a respiration rate 636 may be determined from the detected period, or from respiration interval 635.

[0093] Further variations are possible, for computing a more accurate value for respiration rate 636. For example, a plurality of periods may be detected, an average may be taken, and so on as above. In some versions, it may not be possible to detect the respiration rate. Processor 230 may be further configured to determine whether or not the respira-



tion rate is detectable, and determine that the shock criterion of operation **380** is met responsive to the respiration rate not being detectable.

**[0094]** The respiration rate (RR) may be used in combination with other sensors such as an accelerometer in the WCD system. For example, in combination with activity monitoring from an accelerometer, minimum RR variability may be considered a surrogate of ventilation at rest and maximum RR variability may be considered a measure of exercise ventilation. Orthopnea or orthopnoea is shortness of breath (dyspnea) that occurs when lying flat, causing the person to have to sleep propped up in bed or sitting in a chair. Orthopnea or paroxysmal nocturnal dyspnea (PND) may also be assessed from respiration rate assessment in combination with night time elevation angle as determined by an accelerometer.

**[0095]** For one more example, the breathing characteristic can be a ventilation that the patient is receiving. For instance, FIG. 7 is a time diagram **703** of a sample impedance signal **705**. Impedance signal **705** may be as rendered from impedance detector **222**, with or without the aforementioned filtering.

**[0096]** In diagram **703**, signal **705** is annotated to illustrate how a ventilation **735** may be determined. In particular, a relative amplitude of impedance signal **705** can be detected, such as the difference between impedance values IMP3 and IMP4. Moreover, a period of impedance signal **705** can be detected, such as the difference between time values T3 and T4. Then ventilation **735** can be determined from the detected relative amplitude and from the detected period.

**[0097]** It will be further recognized, also thanks to further annotations in FIG. 7, that ventilation **735** can alternately become known from relative tidal volume **535**, respiration interval **635** and respiration rate **636**. Moreover, all written above for improvements in computing these breathing characteristics may be applied similarly for computing ventilation **735**.

**[0098]** Additional statistics may be computed for breathing characteristic **335**, with or without the added information about motion events that can be contributed by motion detection signal **405**. For example, the processor may be further configured to determine a range of acceptable respiration rates of the patient, a minimum respiration rate, a maximum respiration, a median respiration rate, and so on. Trends of these can also be detected and stored. For example, when these are tracked over a day, week or even longer, they may be used as an indicator of important physiologic changes such as dyspnea (a clinical manifestation of heart failure), or as a predictor for worsening heart failure decompensation.

**[0099]** Alveolar ventilation (a product of respiratory rate and tidal volume) is normally carefully controlled by the actions of central and peripheral chemoreceptors and lung receptors. Ventilation is driven by both the arterial partial pressure of oxygen (PaO<sub>2</sub>) and the arterial partial pressure of carbon dioxide (PaCO<sub>2</sub>), with PaCO<sub>2</sub> being the more important driver of the two. The body attempts to correct hypoxaemia and hypercarbia by increasing both tidal volume and respiratory rate. Thus, these conditions can be detected by measuring the respiratory rate.

**[0100]** Any condition that causes metabolic acidosis, such as abdominal pathology or sepsis, will also precipitate an increase in tidal volume and respiratory rate through an increased concentration of hydrogen ions, which leads to

increased CO<sub>2</sub> production. In addition, other conditions that could cause hypercarbia or hypoxia may also increase alveolar ventilation. In effect, the respiratory rate can be an important indicator of a severe derangement in many body systems, not just the respiratory system, and can therefore be a key predictor of adverse events.

**[0101]** Of course, not all causes of hypoxia and hypercarbia necessarily result in an increase in tidal volume and respiratory rate. Medications such as opiates, which are commonly used in hospitals, depress the respiratory drive and the respiratory response to hypoxia and hypercarbia. In these circumstances the respiratory rate can still be a useful tool to monitor for an adverse event, as the respiratory rate may be lowered, often in association with a reduced level of consciousness.

**[0102]** Returning briefly to FIG. 3, as already mentioned above, at operation **340** it is optionally determined whether or not breathing characteristic **335** meets an alarm condition. Furthermore, at operation **380** it is determined whether or not a shock criterion is met. For either one or both operations **340**, **380**, in a number of embodiments or versions it can be determined whether or not breathing characteristic **335** meets an alarm condition, and the determination of operations **340**, **380** can be performed based at least in part responsive to breathing characteristic **335** meeting the alarm condition.

**[0103]** In a number of embodiments or versions, breathing characteristic **335** has a value, and it can be determined that the breathing characteristic meets the alarm condition if that value meets a numerical condition. Examples are now described.

**[0104]** FIG. 8 shows how operations **840**, **880** may be performed in terms of a diagram **803**. Otherwise, operations **840**, **880** may be performed as operations **340**, **380** of FIG. 3 respectively.

**[0105]** Diagram **803** shows a single vertical axis with two sample thresholds, TH1 and TH2. The breathing characteristic has a value **835** that can be plotted at an appropriate location on the vertical axis, relative to thresholds TH1 and TH2. In other words, the determination of operations **840**, **880** may be performed by answering the question-mark of dot **835**. Accordingly, possible numerical conditions that can be used as a criterion for operations **840**, **880** may include that a) value **835** is above threshold TH1, b) value **835** is within a range defined by thresholds TH1 and TH2, c) value **835** has a value that is below a threshold TH2, d) etc. For example, for respiration rate measurement, such thresholds TH1, TH2 etc. may be set in isolation or in combination with other sensors as also described elsewhere in this document.

**[0106]** Returning briefly to FIG. 3, if at operation **340** the answer is YES then, according to operation **345**, a follow-up action may be caused to be executed. Examples include that executing the follow-up action includes a) that a record of the alarm condition being met is stored in a memory such as memory **238**, b) a user interface such as user interface **280** outputs a communication to prompt the patient to react as instructed, c) a communication module such as communication module **290** transmits an alarm message wirelessly to alert medical personnel or other caregivers, and so on. Indeed, an abnormal respiratory rate has been shown to be an important predictor of serious events such as cardiac arrest.

**[0107]** In some embodiments, operations **340**, **380** are performed responsive to a change in the value of breathing

characteristic 335, or in a rate of change in the value of breathing characteristic 335. Examples are now described.

[0108] FIG. 9 shows how operations 940, 980 may be performed in terms of a diagram 903. Otherwise, operations 940, 980 may be performed as operations 340, 380 of FIG. 3 respectively.

[0109] Diagram 903 shows a graph 935 that indicates a sample evolution of a value of the breathing characteristic. At times T11, T12, T13, the breathing characteristic has values V11, V12, V13 respectively.

[0110] In some embodiments, the processor can be configured to determine whether or not a change in a value of the breathing characteristic meets a change condition, i.e. whether V12-V11 or V13-V12 meets the change condition, for example by being larger than a threshold difference. If the change condition is met, the processor may cause a follow-up action to be executed (operation 940)—the follow-up action can be as above. And/or, if the change condition is met, the determination of whether or not the shock criterion is met (operation 980) can be performed based at least in part responsive to the change condition being thus met.

[0111] In some embodiments, the processor can be configured to determine whether or not a rate of change in a value of the breathing characteristic meets a rate-of-change condition. In other words, assuming that  $T12-T11=T13-T12$ , it can be determined whether or not the contrast of V13-V12 and V12-V11 meets a rate-of-change condition. An example of meeting such a condition is if V13-V12 is larger than V12-V11 by a threshold. If the rate-of-change condition is met, the processor may cause a follow-up action to be executed (operation 940)—the follow-up action can be as above. And/or, if the rate-of-change condition is met, the determination of whether or not the shock criterion is met (operation 980) can be performed based at least in part responsive to the rate-of-change condition being thus met.

[0112] In the methods described above, each operation can be performed as an affirmative step of doing, or causing to happen, what is written that can take place. Such doing or causing to happen can be by the whole system or device, or just one or more components of it. It will be recognized that the methods and the operations may be implemented in a number of ways, including using systems, devices and implementations described above. In addition, the order of operations is not constrained to what is shown, and different orders may be possible according to different embodiments. Examples of such alternate orderings may include overlapping, interleaved, interrupted, reordered, incremental, preparatory, supplemental, simultaneous, reverse, or other variant orderings, unless context dictates otherwise. Moreover, in certain embodiments, new operations may be added, or individual operations may be modified or deleted. The added operations can be, for example, from what is mentioned while primarily describing a different system, apparatus, device or method.

[0113] A person skilled in the art will be able to practice the present invention in view of this description, which is to be taken as a whole. Details have been included to provide a thorough understanding. In other instances, well-known aspects have not been described, in order to not obscure unnecessarily this description.

[0114] This description includes one or more examples, but this fact does not limit how the invention may be practiced. Indeed, examples, instances, versions or embodi-

ments of the invention may be practiced according to what is described, or yet differently, and also in conjunction with other present or future technologies. Other such embodiments include combinations and sub-combinations of features described herein, including for example, embodiments that are equivalent to the following: providing or applying a feature in a different order than in a described embodiment; extracting an individual feature from one embodiment and inserting such feature into another embodiment; removing one or more features from an embodiment; or both removing a feature from an embodiment and adding a feature extracted from another embodiment, while providing the features incorporated in such combinations and sub-combinations.

[0115] In general, the present disclosure reflects preferred embodiments of the invention. The attentive reader will note, however, that some aspects of the disclosed embodiments extend beyond the scope of the claims. To the respect that the disclosed embodiments indeed extend beyond the scope of the claims, the disclosed embodiments are to be considered supplementary background information and do not constitute definitions of the claimed invention.

[0116] In this document, the phrases “constructed to” and/or “configured to” denote one or more actual states of construction and/or configuration that is fundamentally tied to physical characteristics of the element or feature preceding these phrases and, as such, reach well beyond merely describing an intended use. Any such elements or features can be implemented in a number of ways, as will be apparent to a person skilled in the art after reviewing the present disclosure, beyond any examples shown in this document.

[0117] Any and all parent, grandparent, great-grandparent, etc. patent applications, whether mentioned in this document or in an Application Data Sheet (“ADS”) of this patent application, are hereby incorporated by reference herein as originally disclosed, including any priority claims made in those applications and any material incorporated by reference, to the extent such subject matter is not inconsistent herewith.

[0118] In this description a single reference numeral may be used consistently to denote a single item, aspect, component, or process. Moreover, a further effort may have been made in the drafting of this description to use similar though not identical reference numerals to denote other versions or embodiments of an item, aspect, component or process that are identical or at least similar or related. Where made, such a further effort was not required, but was nevertheless made gratuitously so as to accelerate comprehension by the reader. Even where made in this document, such a further effort might not have been made completely consistently for all of the versions or embodiments that are made possible by this description. Accordingly, the description controls in defining an item, aspect, component or process, rather than its reference numeral. Any similarity in reference numerals may be used to infer a similarity in the text, but not to confuse aspects where the text or other context indicates otherwise.

[0119] The claims of this document define certain combinations and subcombinations of elements, features and steps or operations, which are regarded as novel and non-obvious. Additional claims for other such combinations and subcombinations may be presented in this or a related document. These claims are intended to encompass within their scope all changes and modifications that are within the true spirit and scope of the subject matter described herein. The terms

used herein, including in the claims, are generally intended as “open” terms. For example, the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” etc. If a specific number is ascribed to a claim recitation, this number is a minimum but not a maximum unless stated otherwise. For example, where a claim recites “a” component or “an” item, it means that it can have one or more of this component or item.

1. A wearable cardioverter defibrillator (WCD) system, comprising:

- a support structure configured to be worn by a patient;
- a power source;
- an energy storage module configured to receive an electrical charge from the power source, and to store the received electrical charge;
- a discharge circuit coupled to the energy storage module;
- an impedance detector configured to render an impedance signal of the patient; and
- a processor configured to:
  - input the impedance signal,
  - determine, from the input impedance signal, a characteristic of breathing by the patient,
  - determine, from at least the breathing characteristic, whether or not a shock criterion is met, and
  - control, responsive to the shock criterion being met, the discharge circuit to discharge the stored electrical charge through the patient while the support structure is worn by the patient.

2. The WCD system of claim 1, further comprising:

- a filter configured to derive a filtered impedance signal from the rendered impedance signal, the filtered impedance signal corresponding to the rendered impedance signal with at least a portion of the rendered impedance signal changed, and

in which the processor is further configured to:

- input the filtered impedance signal instead of the rendered impedance signal.

3. The WCD system of claim 2, in which

the filtered impedance signal is derived by removing from the rendered impedance signal variations that have a frequency greater than a threshold.

4. The WCD system of claim 2, in which

the filtered impedance signal is derived by removing from the rendered impedance signal variations that repeat over a period of at least 30 seconds.

5. The WCD system of claim 2, further comprising:

- a transducer configured to render an electrocardiogram (ECG) signal of the patient, and

in which variations in a baseline of the ECG signal are identified, and

the filtered impedance signal is derived by removing from the rendered impedance signal variations that are concurrent with the identified variations of the ECG signal.

6. The WCD system of claim 2, further comprising:

- a motion detector configured to detect motion and to render a motion detection signal responsive thereto, and

in which variations are identified in the motion detection signal, and

the filtered impedance signal is derived by removing from the rendered impedance signal variations that are concurrent with the identified variations in the motion detection signal.

7. The WCD system of claim 1, further comprising:

- a memory operatively coupled to the processor, and

in which the processor is further configured to:

- store a value of the breathing characteristic in the memory.

8. The WCD system of claim 1, further comprising:

- a memory operatively coupled to the processor, and

in which the processor is further configured to:

- store a baseline value for the breathing characteristic in the memory,
- compute a difference of a current value of the breathing characteristic and the stored baseline value, and
- determine at least in part that the shock criterion is met responsive to the computed difference being larger than a threshold.

9. The WCD system of claim 8, further comprising:

- a motion detector configured to detect motion and to render a motion detection signal responsive thereto, and in which

the baseline value is determined from a portion of the impedance signal in view of a portion of the motion detection signal relative to the portion of the impedance signal.

10. The WCD system of claim 1, further comprising:

- a motion detector configured to detect motion and to render a motion detection signal responsive thereto, and

in which the processor is further configured to:

- determine from at least the motion detection signal and the breathing characteristic whether or not the shock criterion is met.

11. The WCD system of claim 1, further comprising:

- a transducer configured to render an input from a sensed patient parameter, the input being distinct from the impedance signal; and

in which the processor is further configured to:

- determine from at least the input and the breathing characteristic whether or not the shock criterion is met.

12. The WCD system of claim 11, in which

the physiological input is an electrocardiogram (ECG) signal of the patient.

13. The WCD system of claim 12, in which

a rhythm analysis of the ECG signal is performed to determine whether or not the shock criterion is met, and the rhythm analysis is performed in a first manner if it is determined that the breathing characteristic meets an alert criterion, while

the rhythm analysis is performed in a second manner different than the first manner otherwise.

14. The WCD system of claim 1, in which

the breathing characteristic is a relative tidal volume, and the processor is further configured to:

- detect a relative amplitude of the impedance signal, and
- determine the relative tidal volume from the detected relative amplitude.

15. The WCD system of claim 1, in which

the breathing characteristic is a respiration interval, and the processor is further configured to:

- detect a period of the impedance signal, and
- treat the detected period as the respiration interval.

16. The WCD system of claim 1, in which the breathing characteristic is a respiration rate, and the processor is further configured to:  
 detect a period of the impedance signal, and  
 determine the respiration rate from the detected period.
17. The WCD system of claim 16, in which the processor is further configured to:  
 determine whether or not the respiration rate is detectable, and  
 determine that the shock criterion is met responsive to the respiration rate not being detectable.
18. The WCD system of claim 1, in which the breathing characteristic is a ventilation, and the processor is further configured to:  
 detect a relative amplitude of the impedance signal,  
 detect a period of the impedance signal; and  
 determine the ventilation from the detected relative amplitude and from the detected period.
19. The WCD system of claim 1, in which the processor is further configured to:  
 determine whether or not the breathing characteristic meets an alarm condition, and  
 cause a follow-up action to be executed responsive to determining that the alarm condition is thus met.
20. The WCD system of claim 19, in which the breathing characteristic meets the alarm condition if the breathing characteristic has a value that meets a numerical condition.
21. The WCD system of claim 19, further comprising:  
 a memory, and  
 in which executing the follow-up action includes that a record of the alarm condition being met is stored in the memory.
22. The WCD system of claim 19, further comprising:  
 a user interface, and  
 in which executing the follow-up action includes that the user interface outputs a communication.
23. The WCD system of claim 19, further comprising:  
 a communication module, and  
 in which executing the follow-up action includes that the communication module transmits an alarm message.
24. The WCD system of claim 1, in which the processor is further configured to:  
 determine whether or not the breathing characteristic meets an alarm condition, and  
 in which the determination of whether or not the shock criterion is met is performed based at least in part responsive to the breathing characteristic meeting the alarm condition.
25. The WCD system of claim 24, in which the breathing characteristic meets the alarm condition if the breathing characteristic has a value that meets a numerical condition.
26. The WCD system of claim 1, in which the processor is further configured to:  
 determine whether or not a change in a value of the breathing characteristic meets  
 a change condition, and  
 cause a follow-up action to be executed responsive to determining that the change condition is thus met.
27. The WCD system of claim 1, in which the processor is further configured to:  
 determine whether or not a rate of change in a value of the breathing characteristic meets a rate-of-change condition, and  
 cause a follow-up action to be executed responsive to determining that the rate-of-change condition is thus met.
28. The WCD system of claim 1, in which the processor is further configured to:  
 determine whether or not a change in a value of the breathing characteristic meets a change condition, and  
 in which the determination of whether or not the shock criterion is met is performed based at least in part responsive to the change condition being thus met.
29. The WCD system of claim 1, in which the processor is further configured to:  
 determine whether or not a rate of change in a value of the breathing characteristic meets a rate-of-change condition, and  
 in which the determination of whether or not the shock criterion is met is performed based at least in part responsive to the rate-of-change condition being thus met.
- 30-87. (canceled)
- \* \* \* \* \*

专利名称(译)	可穿戴式心律转复除颤器 ( WCD ) 系统测量患者的呼吸		
公开(公告)号	<a href="#">US20180117299A1</a>	公开(公告)日	2018-05-03
申请号	US15/792860	申请日	2017-10-25
申请(专利权)人(译)	WEST HOLDINGS AFFUM CORP.		
当前申请(专利权)人(译)	WEST HOLDINGS AFFUM CORP.		
[标]发明人	GUSTAVSON LAURA M COWAN KENNETH FREDERICK		
发明人	GUSTAVSON, LAURA M. COWAN, KENNETH FREDERICK		
IPC分类号	A61N1/04 A61B5/0205 A61B5/00		
CPC分类号	A61B5/0402 A61B5/04012 A61N1/046 A61B5/0205 A61B5/002 A61B5/0295 A61B5/02405 A61N1/3968 A61B5/053 A61B5/1112 A61B5/14542 A61N1/0484 A61N1/3904 A61N1/3925		
优先权	62/417147 2016-11-03 US		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

可穿戴心律转复除颤器 ( “WCD” ) 系统可包括阻抗检测器，其配置成呈现患者的阻抗信号。WCD系统可以根据阻抗信号确定患者可以用作生命体征的呼吸特征。WCD系统可以至少从呼吸特征确定是否满足冲击标准。如果满足冲击标准，则WCD系统可以控制放电电路以通过患者释放存储的电荷。优点可以是呼吸特性可以用于确定患者是否正在经历需要除颤治疗的病症，例如心脏骤停。当呼吸特征与其他数据 ( 例如来自运动检测器 ) 组合时，可以在辨别患者状态方面具有更多优点。

