



US 20140031705A1

(19) **United States**(12) **Patent Application Publication**  
**Kurzweil et al.**(10) **Pub. No.: US 2014/0031705 A1**(43) **Pub. Date: Jan. 30, 2014**(54) **HARNESS WITH SENSORS***A61B 5/08* (2006.01)(71) Applicant: **Medicomp, Inc.**, Melbourne, FL (US)*A61B 5/0402* (2006.01)*A61B 5/01* (2006.01)(72) Inventors: **Raymond C. Kurzweil**, Newton, MA (US); **Paul Albrecht**, Bedford, MA (US); **Brandon Craft**, Reisterstown, MD (US); **Lucy Gibson**, Belmont, MA (US); **Mark Lutwyche**, Reisterstown, MD (US); **Vishal Dua**, Columbia, MD (US); **Aaron Kleiner**, West Newton, MA (US); **Michelle Daniels**, Raleigh, NC (US)(52) **U.S. Cl.**CPC ..... *A61B 5/6831* (2013.01); *A61B 5/0402* (2013.01); *A61B 5/01* (2013.01); *A61B 5/08* (2013.01); *A61B 5/0295* (2013.01)USPC ..... **600/506**; 600/300; 600/509; 600/595; 600/549; 600/529(73) Assignee: **Medicomp, Inc.**, Melbourne, FL (US)


(57)


**ABSTRACT**(21) Appl. No.: **13/952,332**(22) Filed: **Jul. 26, 2013****Related U.S. Application Data**


(63) Continuation of application No. 11/749,253, filed on May 16, 2007, now Pat. No. 8,527,028.

**Publication Classification**(51) **Int. Cl.***A61B 5/00* (2006.01)*A61B 5/0295* (2006.01)

A garment for ambulatory, physiological monitoring of a patient includes a belt, having first and second end portion with closures at the end portions to wrap around a user's chest, a strap having a first end coupled to a portion of the belt with the strap having a second end, a pair of shoulder strap portions each shoulder strap portion having a first end coupled together at the second end of the strap and a second end, and a back portion that joins the second ends of the pair of shoulder strap portions, with at least one of the belt, strap portions and back portion having an accommodation for carrying a sensor. Other embodiments are described.

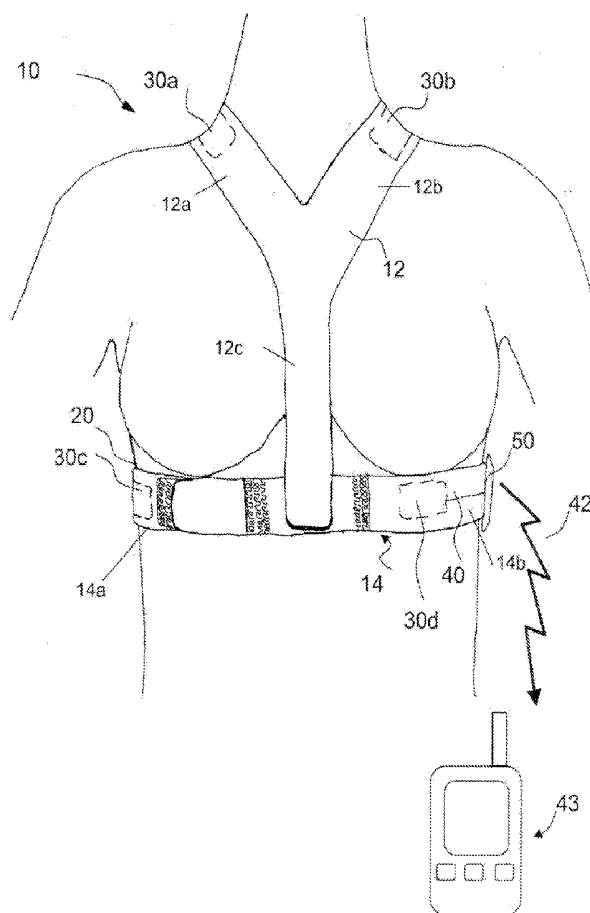

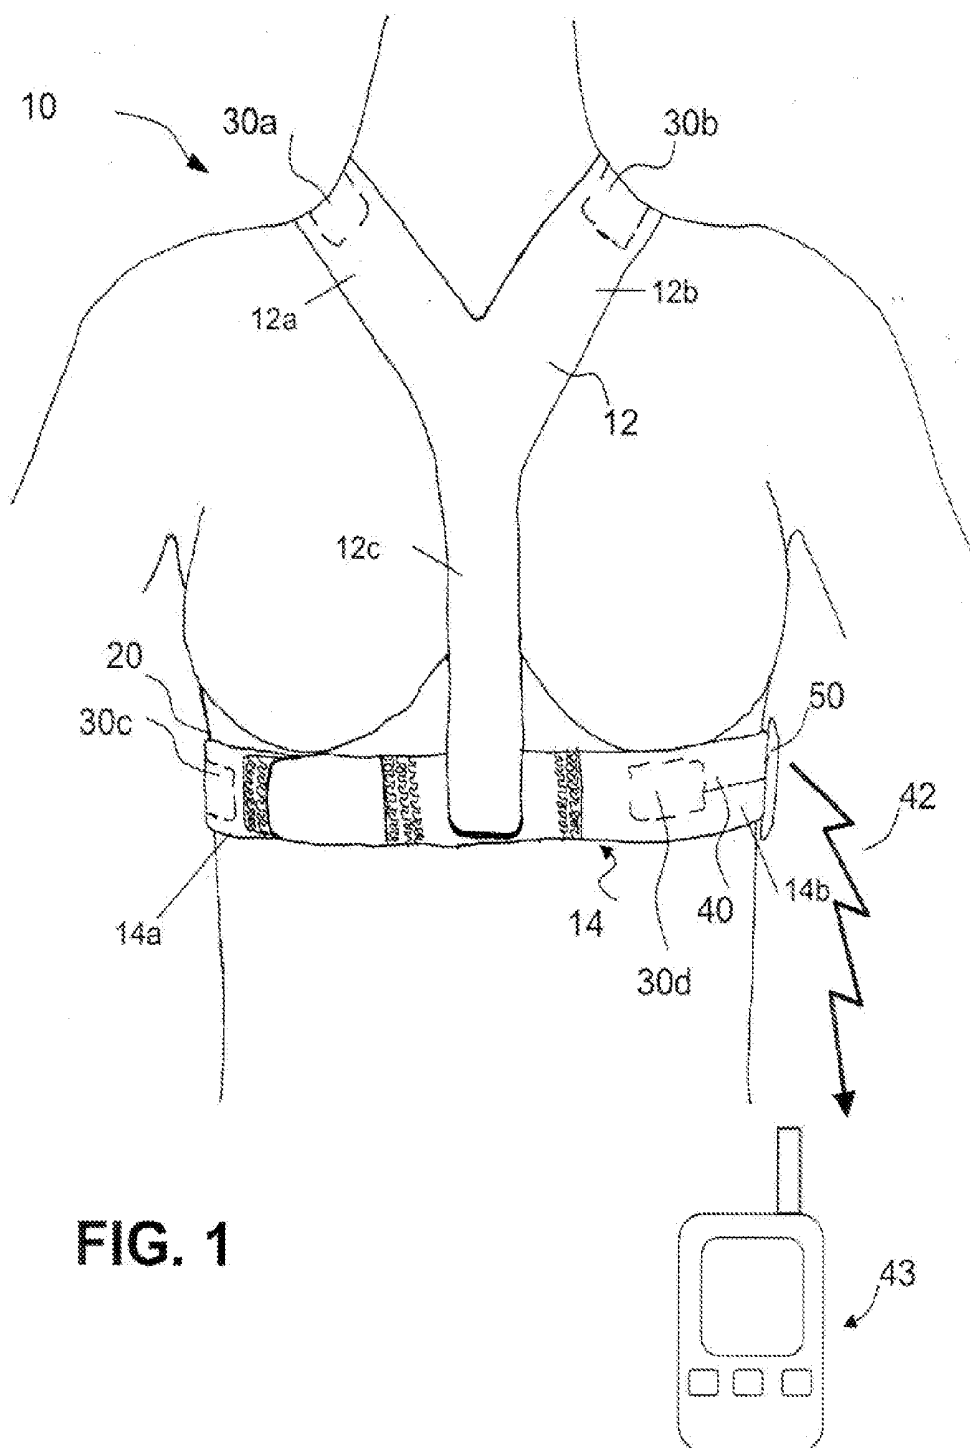

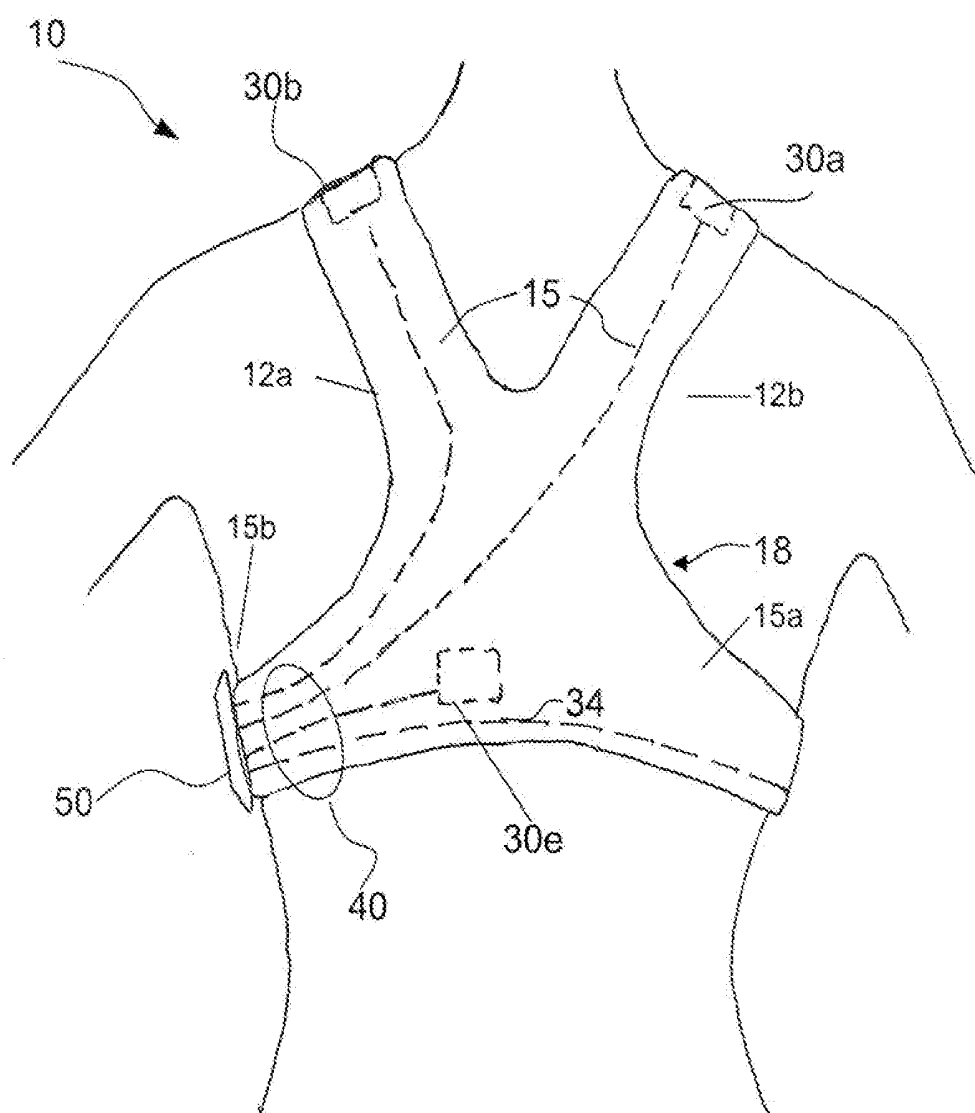

**FIG. 2**

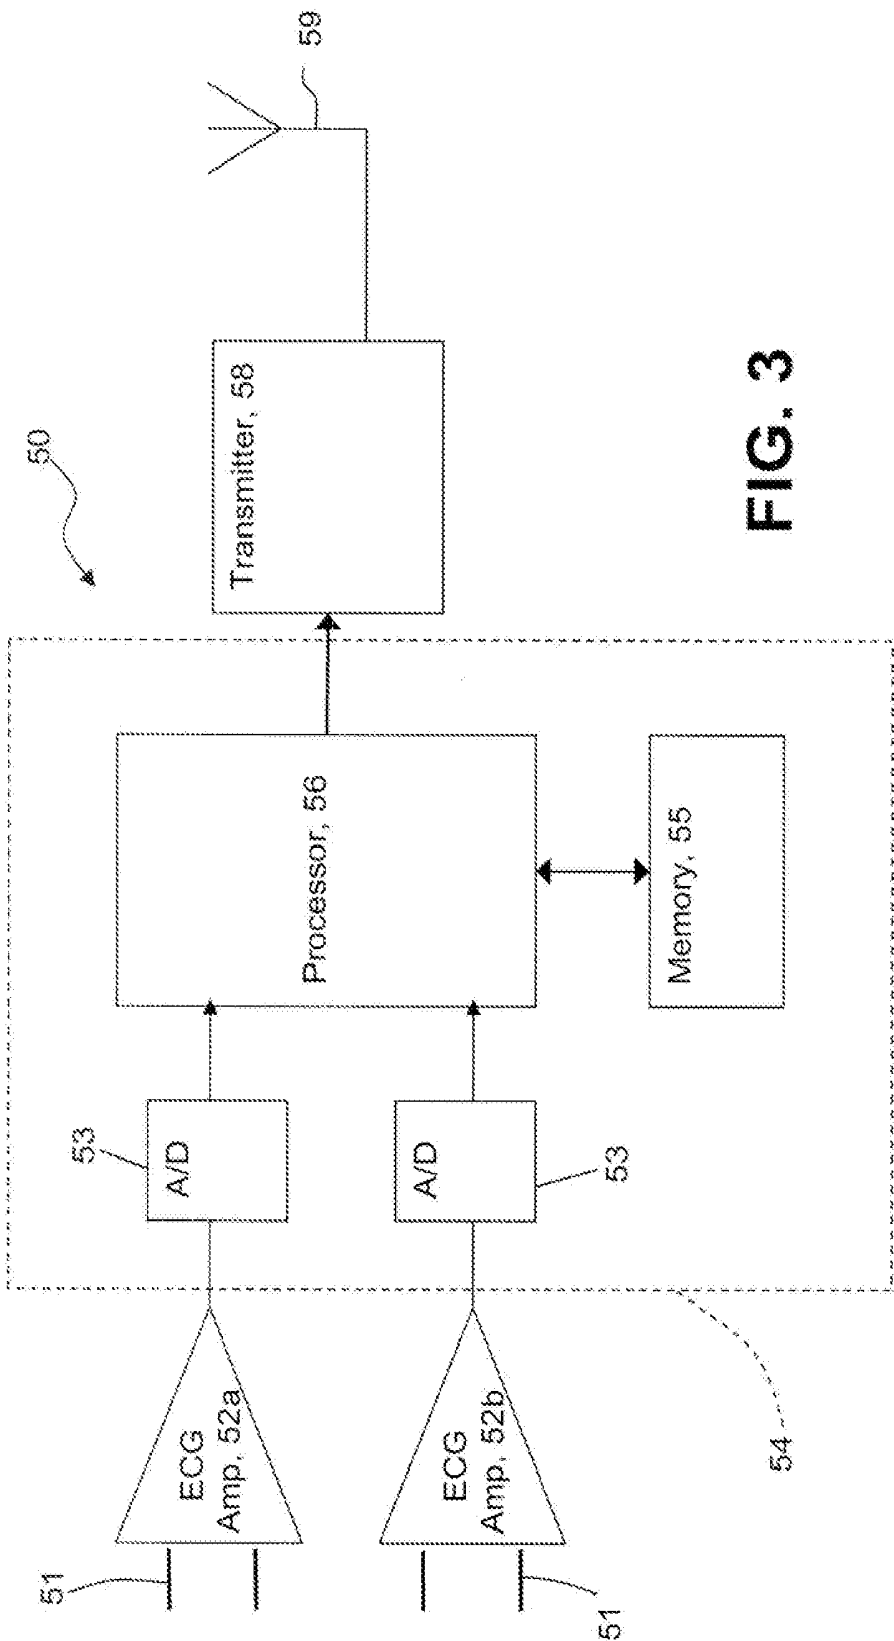


FIG. 3



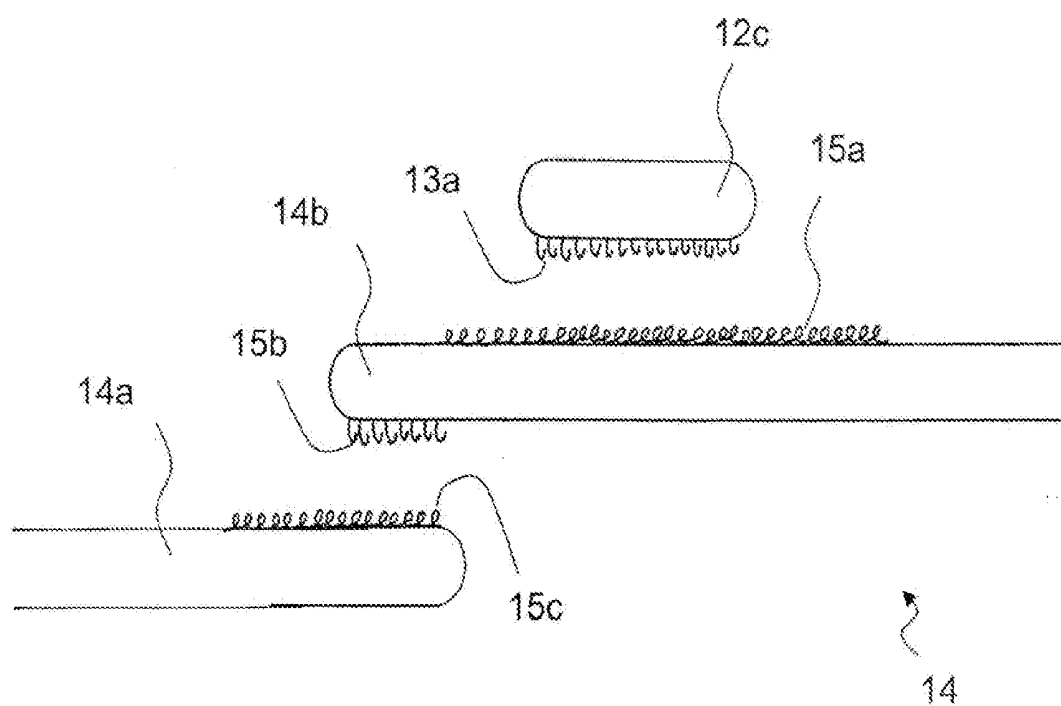



FIG. 4

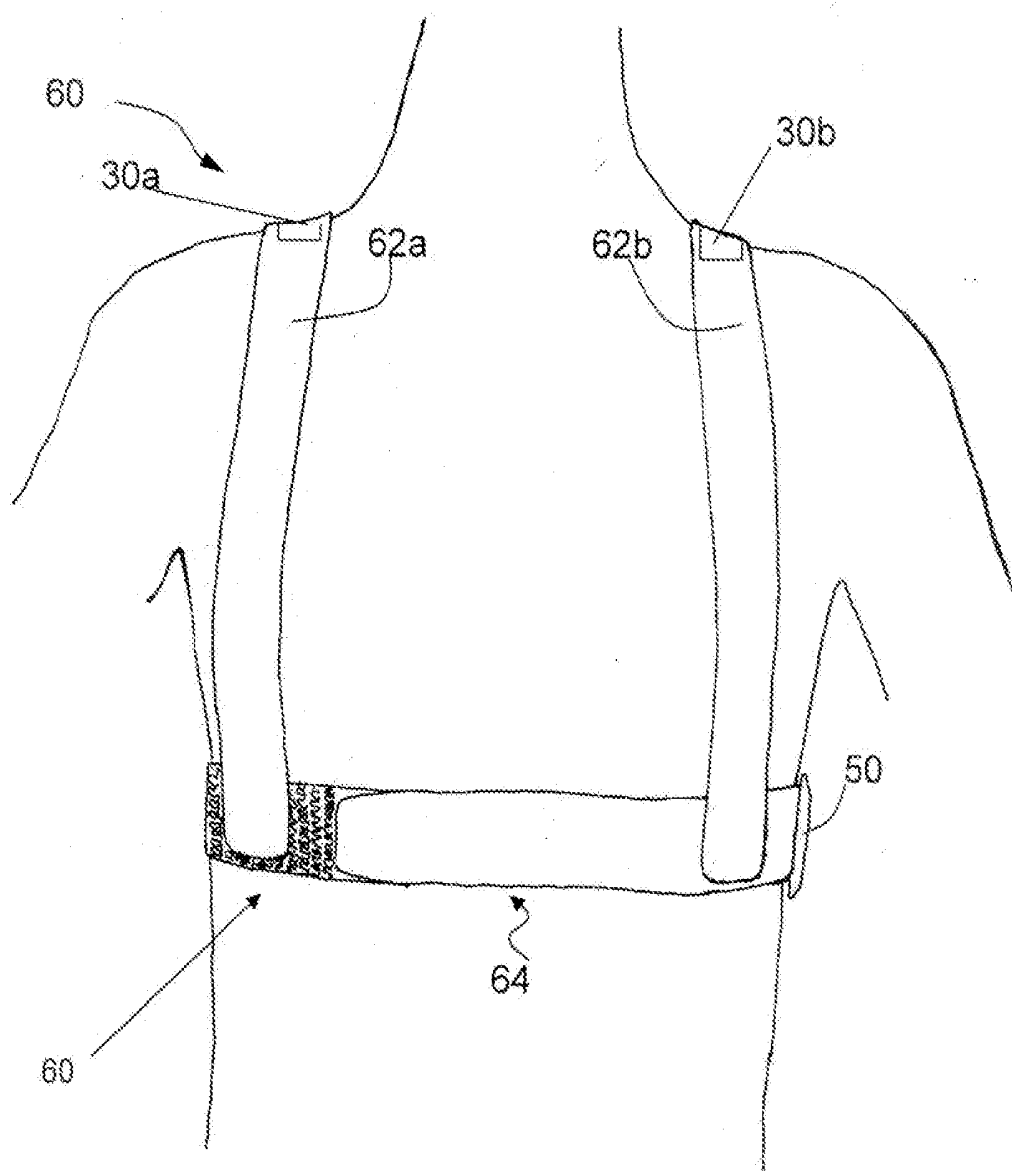

**FIG. 5**

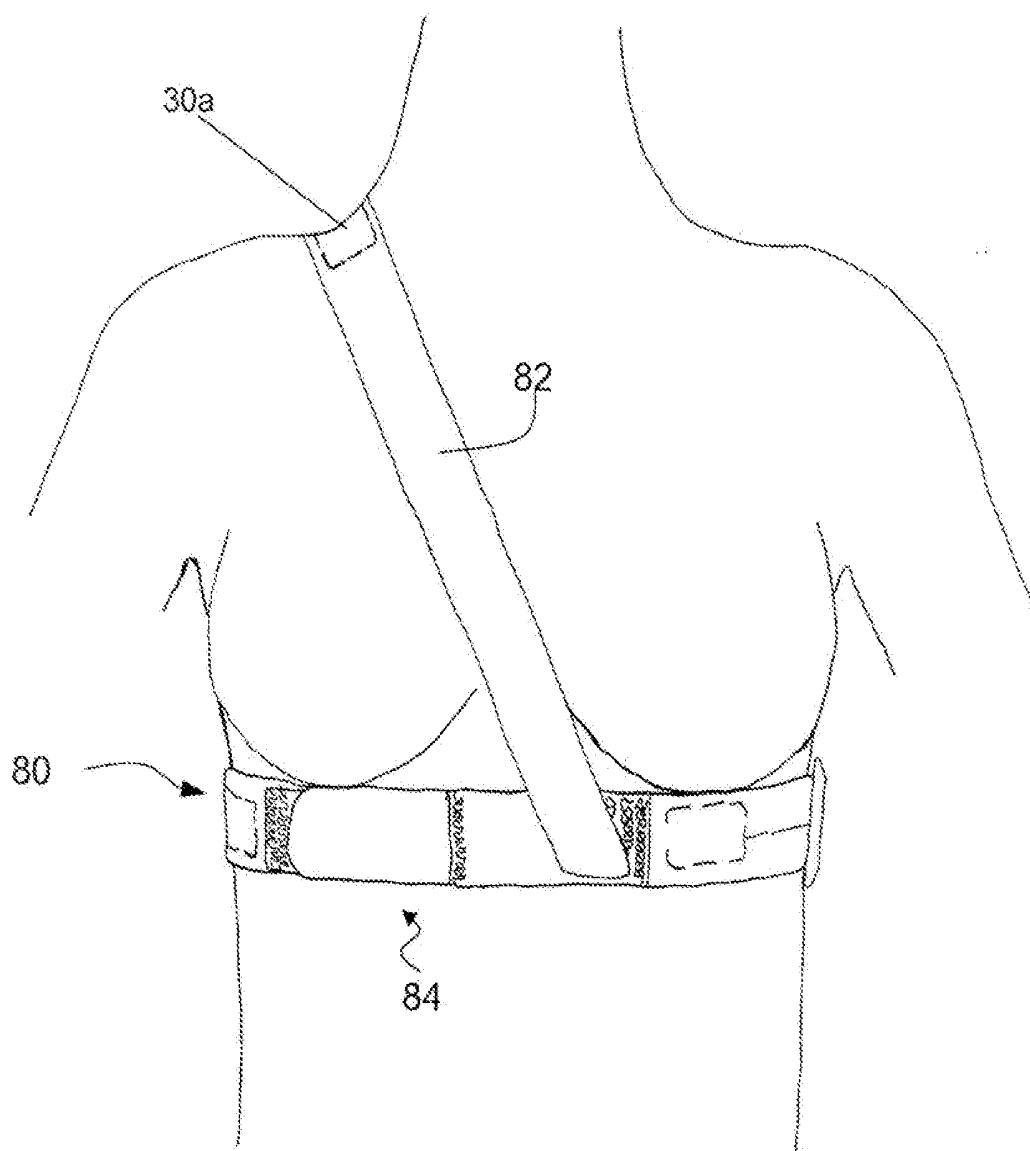

**FIG. 6**

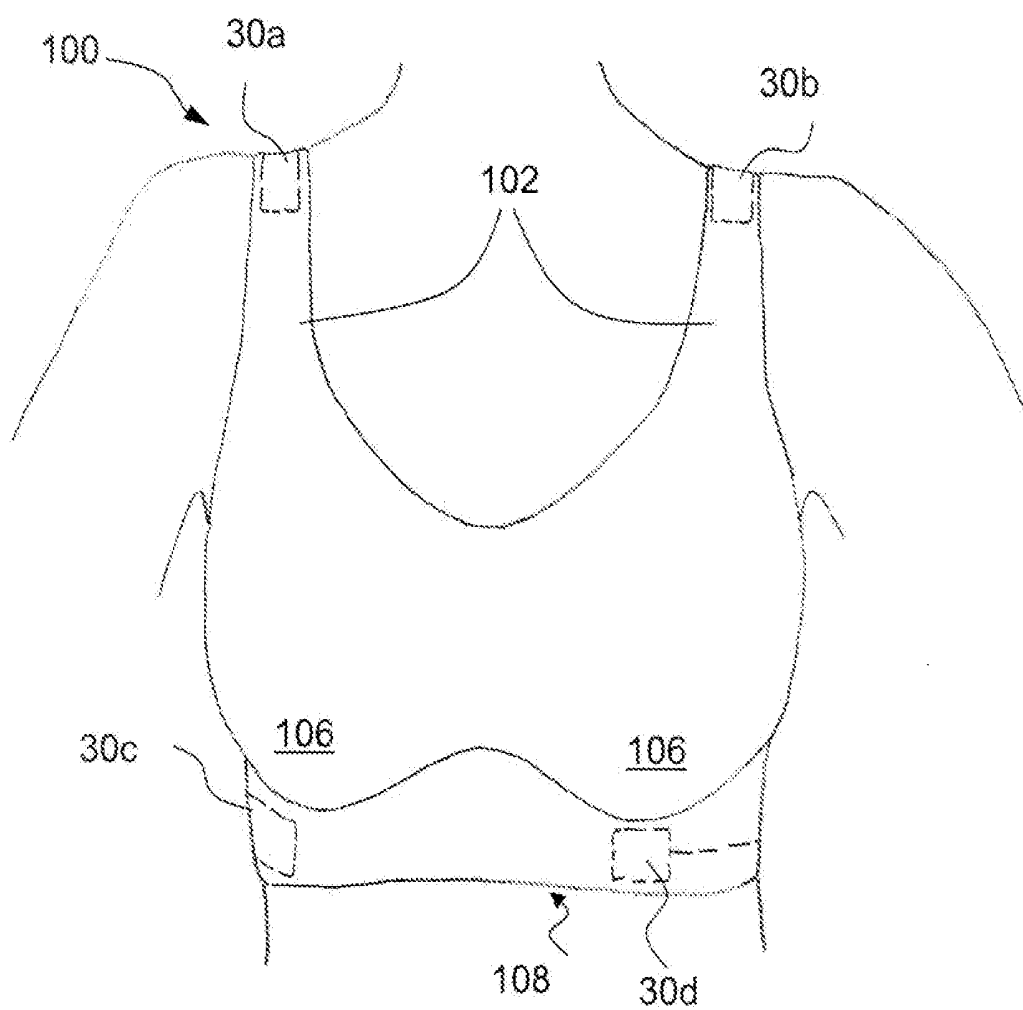

**FIG. 7**

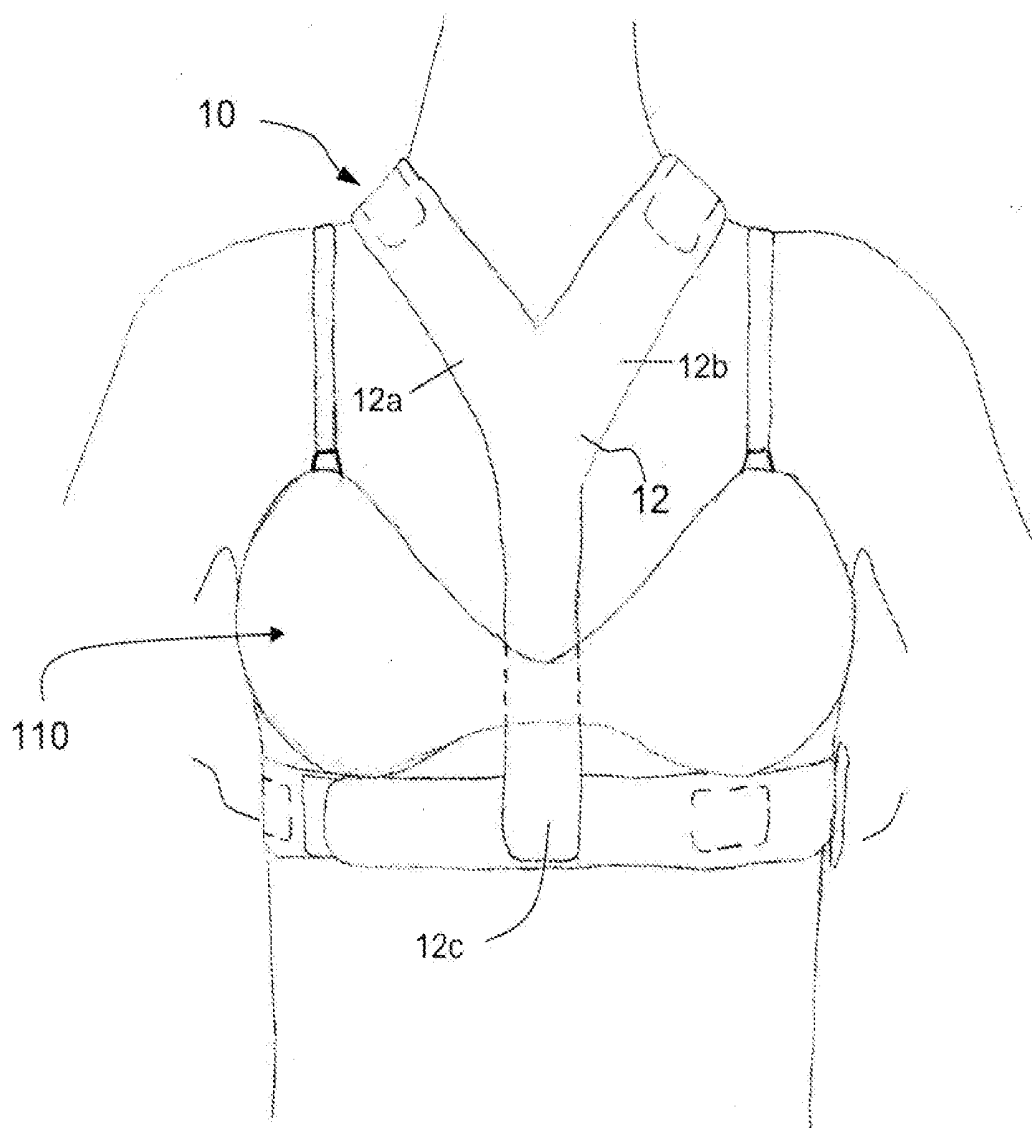


FIG. 8



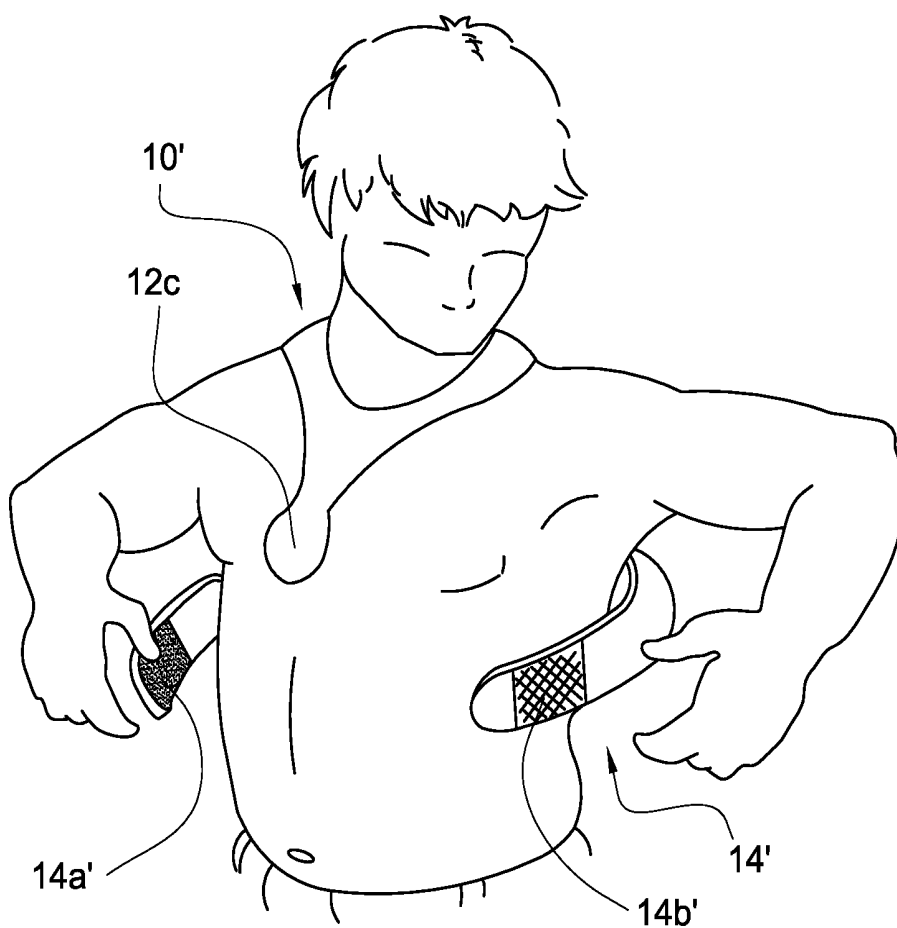



FIG. 9

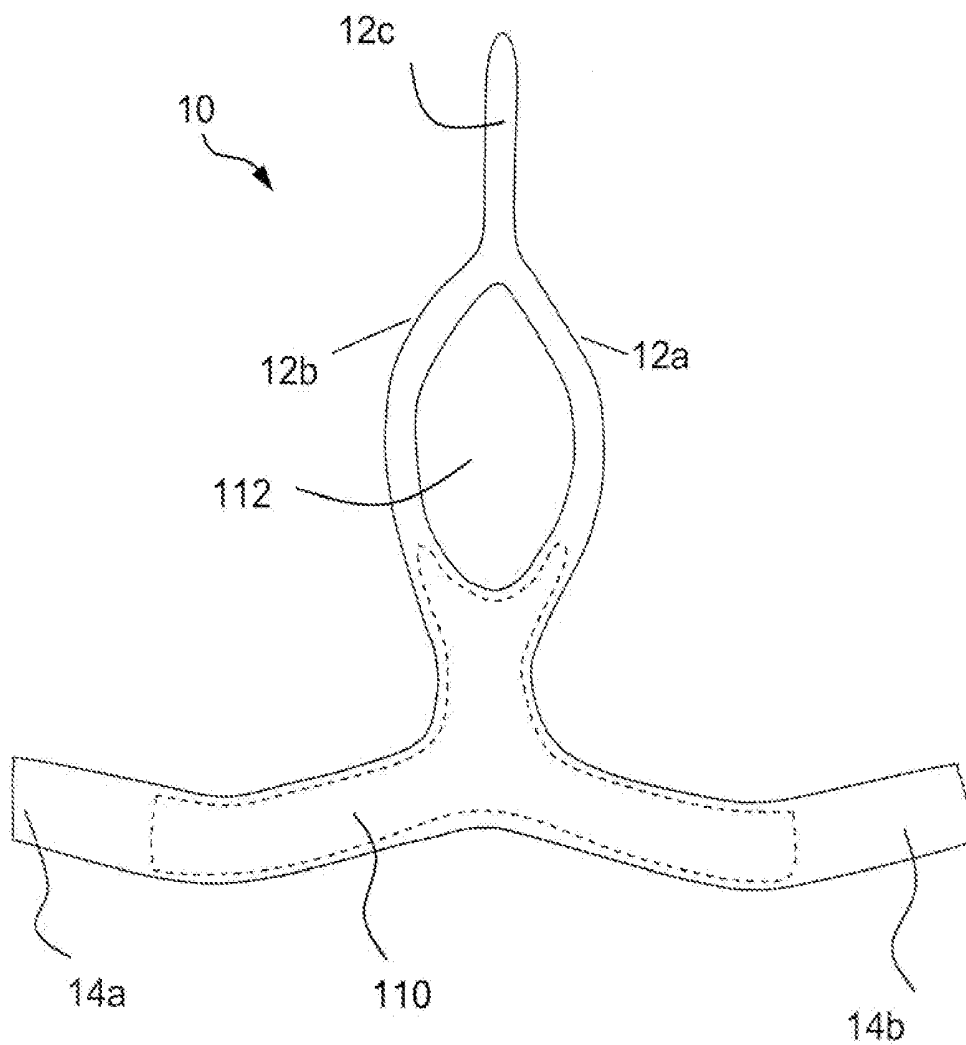





**FIG. 10**

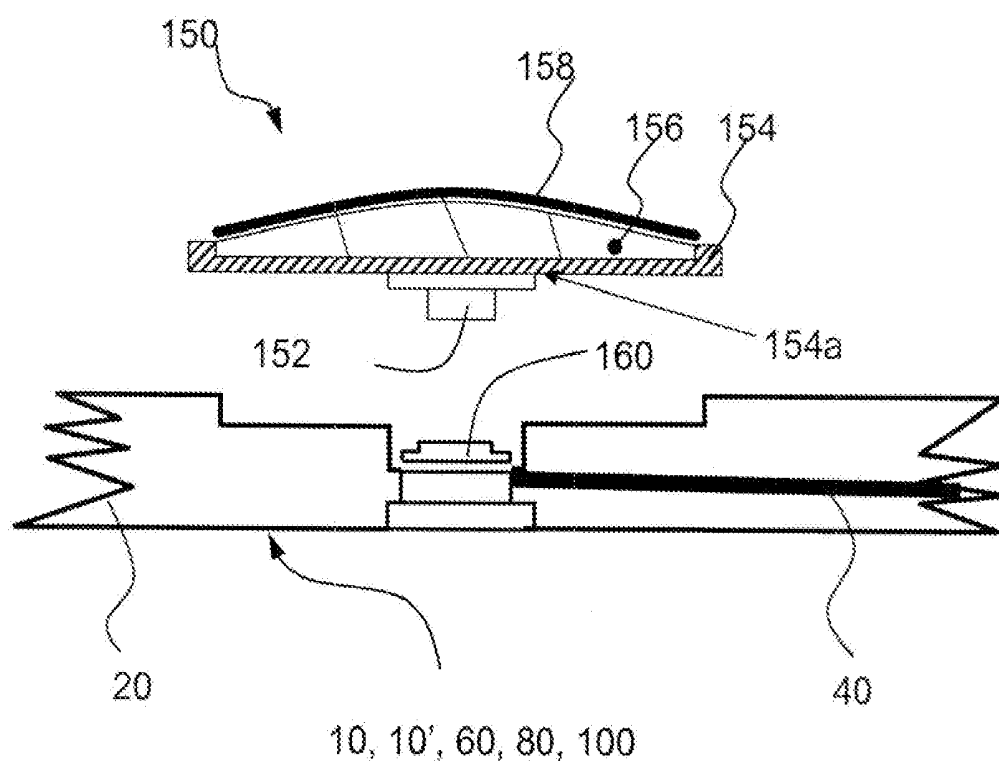


**FIG. 11**

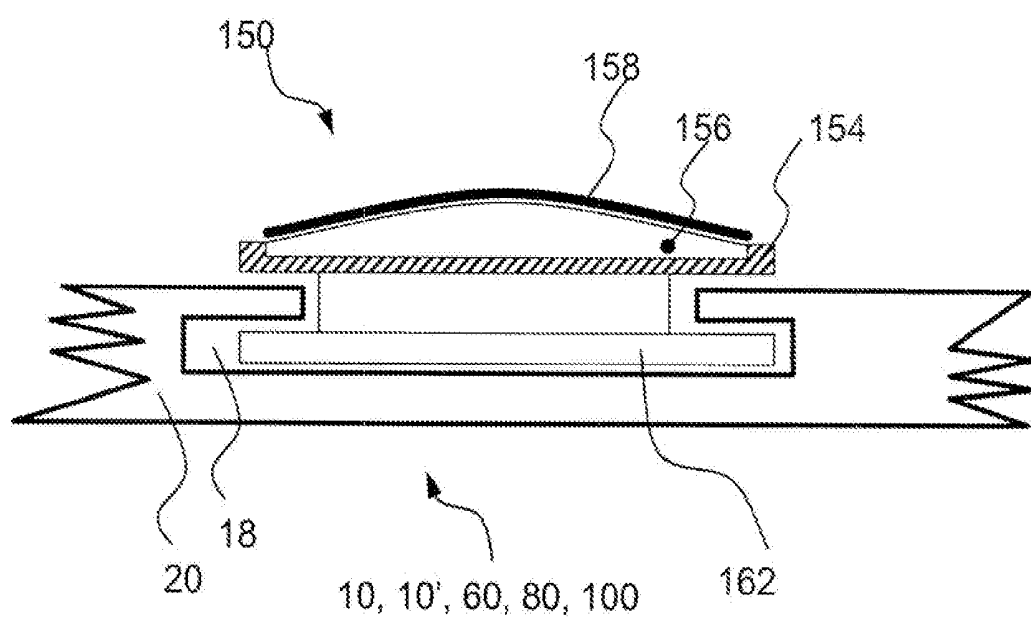


**FIG. 12**

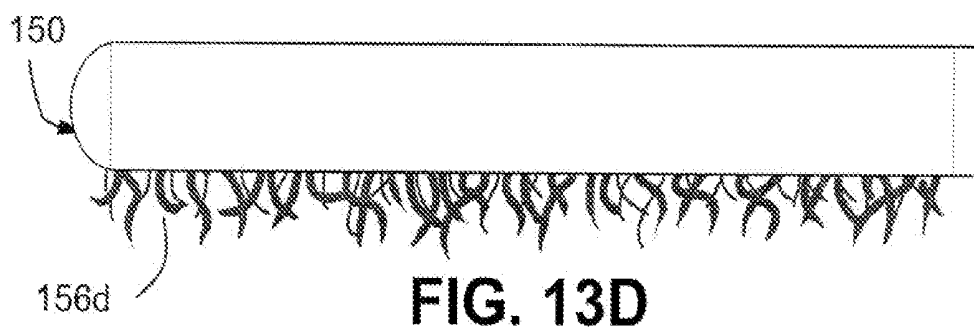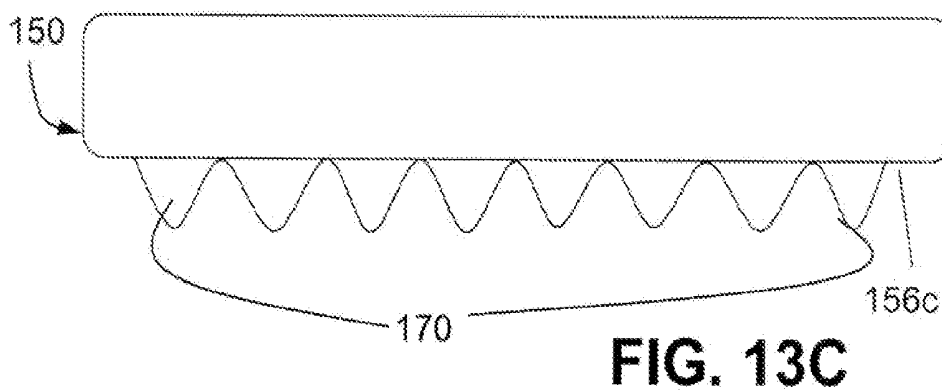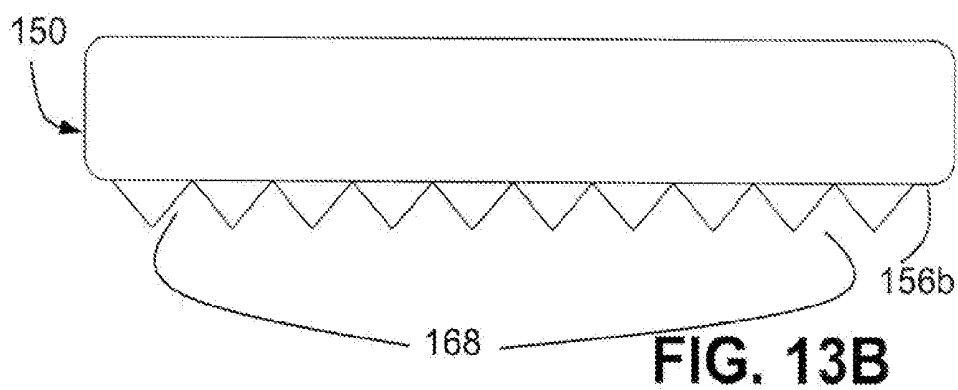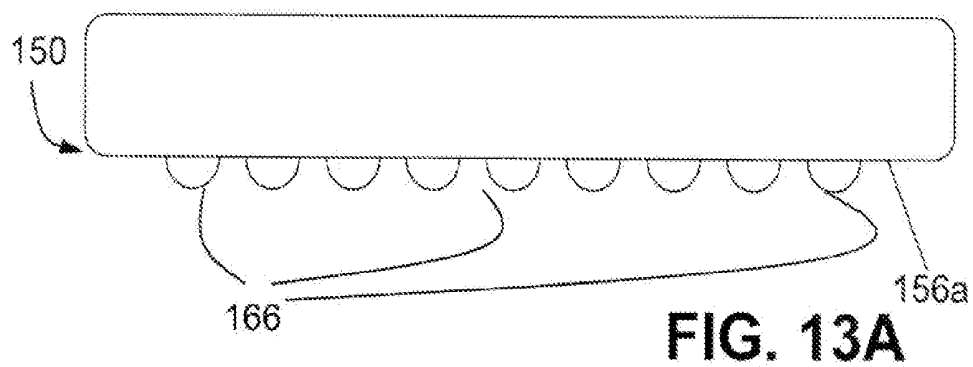

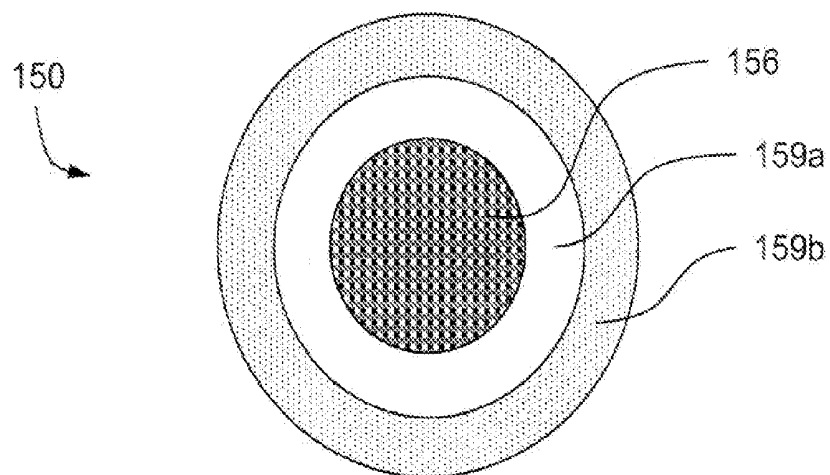

**FIG. 14A**

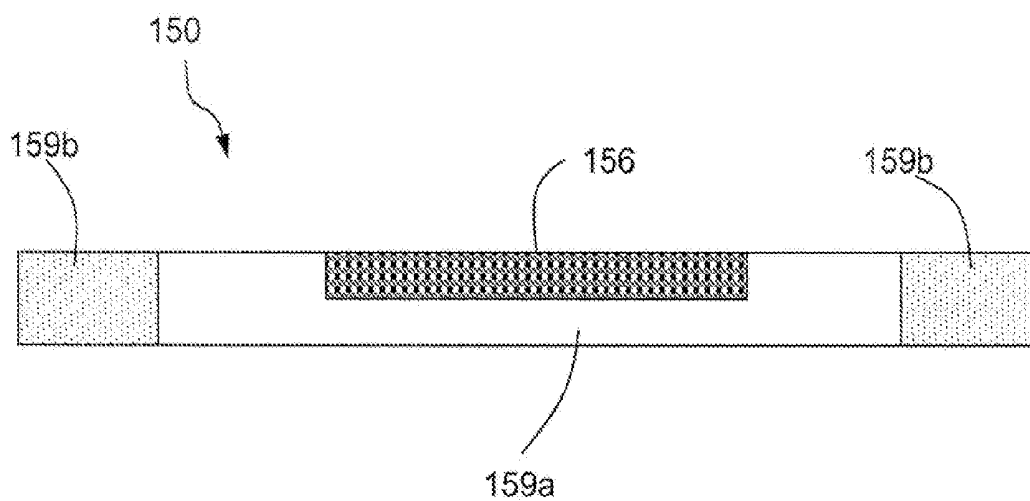

**FIG. 14B**

FIG. 15

## HARNESS WITH SENSORS

### RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. patent application Ser. No. 11/749,253 titled Harness with Sensors and filed on the 16<sup>th</sup> of May, 2007, the entire contents of which are incorporated herein by reference.

### BACKGROUND

[0002] The present invention relates to physiological monitoring and in particular to ambulatory physiological monitoring.

[0003] Heart disease is a leading cause of death in the United States. Some patients would benefit from long-term, e.g., ECG monitoring outside of a clinical setting for many heart conditions, including, for example, atrial fibrillation and myocardial ischemia, which may occur episodically. Some episodes may occur without patient symptoms. Myocardial ischemia, if persistent and serious, can lead to myocardial infarction (heart attack). During a myocardial infarction, electrophysiological changes are usually seen on the ECG. For accurate diagnosis and effective treatment of many episodic heart conditions it is useful to know the frequency and duration of such episodes, in a timely manner.

[0004] In conventional long-term ECG monitoring, such as with continuous Holter monitors or event monitors, the skin is prepared by a technician. Chest hair may be shaved or clipped from men. The skin is abraded to remove dead skin cells, and cleaned. Abrading often leaves the skin irritated. A technician trained in electrode placement applies the electrodes to the skin with an adhesive. The monitor can be worn for up to a month.

[0005] Each electrode of such conventional monitors is attached to an insulated wire that is routed to an amplifier to amplify the ECG signal. The patient has to take care not to pull on the wires connected to the electrode, because the electrode could be pulled off the skin.

[0006] Removing the electrode with its strong adhesive may be painful. Many electrodes also use a gel next to the skin to improve conductivity of connection of the metal electrode to the skin. Prolonged exposure to the gel can irritate the skin.

[0007] In ECG monitoring, there are several types of signal noise, called an "artifact." One kind of noise is caused by pulling on or rubbing over the wires which can deform the electrode. Noise can also be caused by the movement of clothing over the wires, movement of the electrode over the skin, noise generated by the electrical activities of muscles, and electromagnetic interference. Because of the various noise problems and loose wires, ECG signal quality is often compromised.

### SUMMARY

[0008] Aspects of the present invention include a garment that includes a belt, having first and second end portion with closures at the end portions to wrap around a user's chest, a strap having a first end coupled to a portion of the belt with the strap having a second end, a pair of shoulder strap portions each shoulder strap portion having a first end coupled together at the second end of the strap and a second end and a back portion that joins the second ends of the pair of shoulder strap portions, with at least one of the belt, strap portions and back portion having an accommodation for carrying a sensor.

[0009] The following embodiments are within the scope of the invention.

[0010] The second end of the strap and the first ends of the pair of shoulder strap portions are unitary in construction. The second end of the strap and the first ends of the pair of shoulder strap portions are coupled together by fasteners. The back portion is unitary in construction with the pair of shoulder strap portions. The back portion is coupled to the pair of shoulder strap portions by a fastener. The back portion, the strap, and the pair of shoulder strap portions are comprised of synthetic rubbers based on polychloroprene material.

[0011] The accommodation for the sensor is disposed in the back portion of the garment, and the garment further comprises second and third accommodations disposed in each of strap portions and a fourth accommodation disposed in the belt of the garment. The accommodation is a pouch provided in the garment. The accommodation is a snap that mates with a corresponding snap on the sensor. The accommodation is provided in one of the belt, strap portions and back and the garment further includes at least one conductor to deliver a signal from the sensor to a processing circuit. The fasteners are selected from snaps, hook and loop fasteners. The accommodation is provided on a first one of the strap portions, in a portion of the strap portion that rests against a shoulder of a user. The sensor is permanently attached to the garment, for example with sewn stitches or with glue.

[0012] The garment further includes a sensor supported by the accommodation in the harness. The sensor includes a sensor membrane comprised of an electrically conductive, flexible material. The sensor membrane has a major surface thereof that is exposed to make contact with the skin of a subject, with the major, exposed surface that contacts the skin being a curved surface. The sensor membrane has a major surface thereof that is exposed to make contact with the skin of a subject, with the major, exposed surface that contacts the skin being a flat surface. The sensor membrane has the major surface covered with a conductive gel film. The sensor includes a snap member comprised of an electrically conductive material and is disposed in intimate contact with the backside of the sensing membrane to provide an electrical path for a signal from the sensing membrane. The garment further includes a sensor frame comprised of a firm, flexible material supporting the sensor membrane. The garment further includes a layer of material surrounding the sensor membrane to absorb sweat. The garment further includes a stiffener member to hold the sides and front of the belt forward of a user's body, when the belt is being put on and before it is fastened by the user.

[0013] Aspects of the present invention include a garment that includes a belt that is configured to be worn around a user's chest, the belt having a pair of ends with closures disposed at the pair of ends of the belt, at least one strap having a first end coupled to the belt and a second end, with at least one of the belt and strap having an accommodation for carrying a sensor and with portions of the garment that are on the skin side being comprised a high friction material.

[0014] The following embodiments are within the scope of the invention.

[0015] The garment further includes a back portion that connects to the belt and joins the second end of the strap. The first end of the strap is removably coupled to the belt. The strap couples between the belt and the back portion in a manner that the strap traverses the chest of a user. The strap couples between the belt and the back portion in a manner that

the strap traverses the chest of a user and with the accommodation for carrying a sensor being a first accommodation disposed on the belt and the garment further comprising a second accommodation for carrying a second sensor, the second accommodation disposed on the strap in a region of the strap that contacts a shoulder of the user.

[0016] The sensor carried by the strap is attached in a region of the strap that contacts a shoulder of the user. The belt and the back portion are configured to secure the belt about the chest of the user. The garment further includes conductors attached to the sensors, the conductors being integrated into the garment. The garment further includes a sensor that is selected from an ECG sensor, motion sensor, body temperature sensor, respiration sensor or impedance plethysmography sensor. The sensor has an uneven surface having at least one of the features of nubs, bumps, ridges, grooves or conductive threads to maintain contact with the skin of a user when sliding over the surface of the skin and/or in the presence of hair, sweat, or uneven surfaces.

[0017] The shoulder strap is a first shoulder strap and the garment further includes a second shoulder strap, with the first and second shoulder straps coupled to the belt and with the shoulder straps configured to lie across shoulders of the user, in proximity to the sides of the neck of the user. The garment further includes a pair of brassiere cups and a second shoulder strap with the first and second shoulder straps coupled to the belt through the brassiere cups and with the shoulder straps configured to carry sensors. The garment is comprised of synthetic rubbers based on polychloroprene material. The garment further includes a stiffener to hold the sides and front of the belt forward of a user's body, when the belt is being put on and before it is fastened by the user.

[0018] One or more aspects of the present invention may provide one or more of the following advantages.

[0019] The wearable harness with integrated ECG sensors is suitable for long-term heart monitoring since the harness will likely be relatively comfortable and thus suitable to wear all day or while sleeping. The harness provides adequate contact of the sensors to the skin during exercise thus allowing the sensors to provide adequate ECG signal quality. Some embodiments can be worn comfortably by both men and women, whereas others are gender specific. The harness is thin, lightweight and inconspicuous.

[0020] The harness has integrated wiring thus avoiding entanglement or accidental removal of the wiring from the sensors. Thus, artifact suppression and patient comfort may be improved by integrating wiring into the harness, such that the connecting wires do not become tangled or pulled on by the sensors as in conventional Holter and event monitors. The wiring and sensors are shielded to reduce electromagnetic interference.

[0021] The sensors are made from comfortable materials that require little or no skin preparation or adhesive, unlike conventional ECG electrodes. The sensors may include high-friction materials to keep the sensors from sliding against the skin. The sensors are held tightly to the user's skin by tension from the harness, which is made out of a material (for example, Neoprene), that generally stays in place against the skin. Thin Neoprene as used in the harness acts like a second skin, stretching when the body stretches but not sliding over the surface of the skin, and keeping the sensors in a fixed position with respect to the body, instead of pulling the sensors and dragging them across the skin as some conventional approaches.

[0022] The harness holds the sensors at fixed and desirable positions on the body that are suitable for obtaining quality ECG signals. Because the harness tends to keep the sensors in place and the sensors themselves tend to resist sliding over the skin, and being located in areas with reduced muscle noise, the harness with integrated sensors achieves good quality ECG during exercise.

[0023] Aspects of the invention are directed to a wearable, thin and inconspicuous, harness with integrated ECG sensors and wiring for long-term heart monitoring, that is comfortable enough to wear all day and while sleeping. Some embodiments are suitable for both men and women, while other gender-specific embodiments are also described. By integrating, e.g., ECG sensors into the harness it is possible to eliminate adhesive between the sensor and the skin thus contributing to comfort for the user when using the sensors.

[0024] The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

#### DESCRIPTION OF DRAWINGS

[0025] FIG. 1 is a front view of a harness on a female torso.

[0026] FIG. 2 is the back view of the harness of FIG. 1.

[0027] FIG. 3 is a block diagram of a typical electronics module.

[0028] FIG. 4 is a cross-sectional view of a portion of FIG. 1 showing details of connection of the harness of FIG. 1.

[0029] FIG. 5 is a front view of an alternative harness.

[0030] FIG. 6 is a front view of another alternative harness.

[0031] FIG. 7 is a front view of an example of a harness configured as a brassiere.

[0032] FIG. 8 is a front view of a female torso wearing the harness of FIG. 1 with a brassiere.

[0033] FIG. 9 is a diagram depicting movements to secure the harness of FIG. 1.

[0034] FIG. 10 is a plan view of the harness of FIG. 1 having a stiffener member, the harness laid-out on a surface.

[0035] FIG. 11 is a cross-sectional view of a removable sensor.

[0036] FIG. 12 is a cross-sectional view of an alternative removable sensor.

[0037] FIGS. 13A-13D are cross-sectional views showing possible surface preparation for sensor membranes.

[0038] FIGS. 14A and 14B are plan views of a sensor.

[0039] FIG. 15 is a cross-sectional view depicting wiring coupled to a sensor.

#### DETAILED DESCRIPTION

[0040] Referring to FIGS. 1 and 2, a harness 10 carrying physiological sensors is shown. The harness 10 is shown being worn on a female subject, but the harness can be comfortably worn by men also. The harness 10 is comprised of a thin, elastic material. Exemplary materials include synthetic materials such as synthetic rubbers such as Neoprene® (DuPont Performance Elastomers), other synthetic rubbers based on polychloroprene (polymer form of Chloroprene). Other materials could be used. Ideally, the material is one that can be worn comfortably next to the skin of the subject and has some resistance to movement or sliding against the skin of the subject.

[0041] The harness 10 includes a generally “Y” shaped front portion 12 (FIG. 1) having a pair of strap portions 12a, 12b that rest over shoulders of the subject and meet at a vertical portion 12c below the breast forming a generally “Y” shape in the front of the harness 10. The strap portions 12a, 12b extend over the shoulders and meet at a broad region 18 that rests against the back of the subject, as shown in FIG. 2. The harness 10 also has a chest belt portion 14 comprised of two straps 14a, 14b each of which emanates from the broad region 18 in the back and are disposed around the torso. The straps 14a, 14b overlap each other in the front under the breast and are secured together via a hook and loop fastener configuration such as Velcro® (Velcro, Inc. Nashua N.H.), as depicted in FIG. 4 below.

[0042] The shoulder straps 12a, 12b hold or carry shoulder sensors 30a and 30b that are placed close to the neck of the subject. The sensors are carried by or in accommodations for the sensors, which can be attachment mechanisms, pockets and so forth as will be discussed below. The straps 12a, 12b surround the neck, a placement that minimizes stretch in the shoulder straps 12a, 12b. If a strap stretches too far, the strap can pull on the sensor, causing noise in the electrical potential sensed by the sensor from the skin.

[0043] This configuration of the harness 10 allows for comfortable placement of a plurality of sensors. As illustrated in FIGS. 1 and 2, five sensors, 30a-30e are supported against the skin of the subject and disposed to place sensors 30a-30e at places on the body that are useful for ECG. Described below are examples of particular placement locations for the sensors for ECG monitoring. Sensors 30a-30e are connected by wires 40 to an electronics module 50. The wires 40 are integrated into the harness material.

[0044] The components, e.g., straps 12a, 12b, vertical member 12c, chest band straps 14a, 14b, and broad region 18 of the harness can be constructed as individual pieces that are secured together, either being sewn, solvent welded, using a hook and loop fastener configuration and so forth, depending on material and other construction considerations. Alternatively, the harness 10 can be molded or otherwise constructed in a more unitary manner, as shown in FIGS. 1 and 2.

[0045] The harness 10 can be sized to fit men or women, as well as children. The harness 10 can come in various sizes or component construction can be employed to fit various components of the harness to the individual using various fastener schemes as mentioned above.

[0046] The shoulder straps 12a and 12b together with the vertical strap 12c provide a Y-shaped harness. The shoulder sensors 30a and 30b are placed close to the neck on straps that surround the neck. This placement minimizes stretch in the shoulder straps. If a strap stretches too much, it can pull on the sensor, imparting noise in the electronic signal provided from the sensor. The sensors 30a and 30b are placed near the top of the shoulder where they are pulled onto the skin by the shoulder straps 12a, 12b, regardless of the position of the user.

[0047] The harness 10 comfortably attaches to the user around the chest with the chest band 14 positioned just under the pectoral muscles in the front. The chest band 14 can be adjusted to be snug around the chest with an adjustable closure, for example, the hook and loop type of fastener mentioned above.

[0048] The harness also carries an electronics module 50 that can wireless transmit signals from the sensors to a nearby computer, PDA or wireless phone. A PDA 43, as shown, may be carried by the person wearing the harness 10.

[0049] Referring to FIG. 3, the electronics module 50 typically includes input connectors 51 that are connected to signal amplifiers 52a-52b. Typically, two sensors which are in positions on the subject to pick up a differential signal across the subject's heart are input to each differential amplifier. For example in FIG. 3, four individual sensors (for example 30a-30d) could be connected to the four inputs 51. Any number of sensors and amplifiers could be used.

[0050] The two amplifiers receive signals from two sensors via an integrated wiring system. The signals from the sensors are amplified, and the amplified signals from these amplifiers are fed into pre-processing circuitry 54 that prepares the signals for transmission and subsequent processing. The pre-processing circuitry 54 can include one or more A/D converters 53 to digitize the signals from the amplifiers, and may optionally include filters to filter the signals or perform signal processing and identification of physiological conditions. The pre-processing circuitry 54 includes a memory 55 (and/or storage) and a processor 56 to implement filtering and processing functions to provide intermediate results and to store information before transmission. Other circuitry is not shown for instance, timing, interface circuitry and so forth.

[0051] The pre-processing circuitry 54 couples the pre-processed signals to a transmitter 58 and antenna 59 that transmits the signal to a base station 43 (FIG. 1). The signal may be transmitted using, for example, Zigbee or Bluetooth protocols, to a base station that can be a computer, PDA (as in FIG. 1) or wireless phone and so forth. An example of an electronics module 50 is the Alive heart monitor by Alive Technologies Pty. Ltd., (International publication No. WO2005/048830). The Alive heart monitor receives an ECG signal from 2 sensors, amplifies the signals, digitizes the signals, and transmits the signals, via the Bluetooth protocol.

[0052] Typically, the electronics module 50 is enclosed in a case that can be removed from the harness 10 for washing, and reattached using connectors 51. An alternative is to enclose the electronics module 50 and its battery in a water-proof container and permanently attach the electronics module 50 to the harness 10.

[0053] In some configurations, the sensors are coupled to an analog multiplexer and the output of the multiplexer is coupled to an amplifier. In that configuration a circuit (not shown) selects which sensor to couple through the analog multiplexer.

[0054] There are several scenarios for how the sensor harness might be used including, for example, that signals might be analyzed by the PDA/phone and transmitted to a monitoring center for review by a physician. Alternatively, instead of attaching an electronics module 50, the harness could be hard-wired to a hospital ECG monitoring machine, and used to comfortably monitor ECG on a sleeping patient, for example.

[0055] Referring to FIG. 4, the chest band 14 (FIG. 1) is secured around the chest of the subject and the vertical member 12c is attached to the chest band 14, as shown. A portion of the underside of the vertical member 12c is covered with hook members, e.g., Velcro® hooks 13a, which mate with Velcro® loops 15a on a top layer of chest strap 14b. The underside of chest strap 14b is covered with Velcro® hooks 15b that mate with the loops 15c on the chest strap 14a. Other fastening mechanisms are possible, such as snaps, zippers, hooks, etc.

[0056] The “Y-configuration” 10 of the harness is acceptable to both men and women and provides specific sensor

locations to sense voltages for ECG monitoring. However, there are other strap arrangements that embody the basic idea of the harness, that is, a thin and comfortable ECG sensor garment with chest and shoulder straps that can be worn by men and women.

[0057] The shoulder straps **12a**, **12b** of the harness **10** hold or carry shoulder sensors **30** and **31** close to the neck of the subject. By surrounding the neck that placement of the shoulder straps minimizes stretch in the shoulder straps and concomitant movement of the sensors. Other arrangements are possible.

[0058] Referring now to FIG. 5, an alternative suspender harness **60** includes a pair of generally vertical shoulder straps **62a**, **62b** that are attached to and hold a chest belt **64** in position in a similar manner as would a pair of suspenders hold a pair of pants. When worn by a subject, the shoulder straps **62a**, **62b** are disposed towards the middle of the shoulders, as compared to the Y-harness **10**. The shoulder straps **62a**, **62b** may tend to stretch more when the arm is lifted. Sensors **30a-30b** are placed near the top of the shoulder straps **62a**, **62b** where they are pulled onto the skin by the shoulder straps **62a**, **62b**.

[0059] The shoulder straps **62a**, **62b** connect to the chest belt **64** towards the sides of the chest belt (not the middle as in the Y model). The harness **60** can also be worn on a woman because the shoulder straps **62a**, **62b** are towards the sides of the chest.

[0060] In the harness **60**, e.g., five sensors (**30a** and **30b** being shown) can be provided in the same general locations as in the Y harness **10**. In addition the harness **60** also has a back region that can be similar to **16** in FIG. 1 or they can be connected directly to the chest belt **64**. However, because the shoulder straps **62a**, **62b** are not as close to the neck, as in the Y harness **10**, the shoulder sensors **30a**, **30b** may be prone to more electrical noise in the sensed signal due to muscle movements and sensor movement from the straps being stretched than would likely occur with the Y harness **10**. While the harness **60** may be less desirable to use when performing vigorous arm movements, it may be more comfortable to put on because it does not involve pulling the garment over the head and it is not tight around the neck as the harness **10**.

[0061] Referring to FIG. 6, another variation of the sensor harness is the single shoulder strap embodiment **80**. The single shoulder strap **80** has one shoulder strap **82** with a sensor **30a** that drapes over one of the shoulders of the subject, e.g., the right shoulder as shown and is attached to the chest belt **84** on the opposing side, e.g., the left side of the chest belt **84**.

[0062] The chest belt **84** is in the same position as the other designs, under the pectoral muscles. The shoulder strap crosses between the breasts and so is comfortable for women.

[0063] The Y-shaped design **10**, the suspender harness **60** and the single strap design **80** can all have the garment cut or formed in a style acceptable to both genders, as well as children. Generally, women may accept clothing with some prototypically masculine cues, while men are less willing to accept feminine features. For example, very thin shoulder straps such as those typically found on a bra might be seen as feminine. For this reason, the harness can have shoulder straps **15** (FIG. 2) that are at least, e.g., one inch in width. Other widths are possible. The shoulder straps are also wide to help distribute the pressure from the tight harness. The harness **10** features a broad back area **18** that comes up high towards the neck, a feature often encountered with both male

chest harnesses and some female sports bras, and so would likely be acceptable to both men and women.

[0064] Referring now to FIG. 7, an alternative embodiment **100** particularly suited for women is shown. This embodiment is as a bra or brassiere **100** having a pair of straps **102** carrying sensors **30a**, **30b** and a pair of bra cups **106**. The straps **102** are coupled to the pair of cups **106** at one end and at the other end are coupled to the back of the bra (not shown, but similar to **18** of FIG. 2 or alternatively of more conventional brassiere construction). A belt **108** is fitted or coupled to or is an extension of the underside of the cups of the bra **100**, and holds sensors **30c**, **30d** flat against the chest just under the breasts. A sensor (not shown) can be provided at the back portion of the harness **100**.

[0065] The variations of the sensor harness described above may work on adult or child body types (thin or fat, large or small), when suitably sized. The harness (Y shaped, single strap, and suspenders) can all be worn comfortably with a conventional bra **110**, as illustrated in FIG. 8. Because the strap **12a**, **12b** material can be made thin (e.g., 3 mm or less), the harness **10** may comfortably and easily fit under most bras in the front, where the center of the bra lies on top of the bottom of the Y strap **12c**. Because the shoulder straps **12** of the harness are close to the neck, they do not, in general, overlap the bra shoulder straps.

[0066] The harness approach **10**, **60** and **80** or the variation **100** can provide good quality contact with the skin of the patient for good quality ECG voltage signal sensing during rest, exercise and sleep. The harness **10** provides tension to hold the sensors tightly against the body during rest and exercise. During rest, the harness **10** provides tension and positions the sensors in place against the body. During exercise, some sweat may build up under the sensors, which is beneficial to the function of many types of sensors, providing reduced resistance between the sensor and the skin.

[0067] The harness **10**, **60** and **80** or the variation **100** can be made from a material that is thin, strong, and somewhat elastic, making it comfortable to wear. Ideally, the material used would be comfortable against the skin, when first put on, when worn and even when sweating. Ideally, the material will act like a "second skin" by stretching when the skin stretches, but not sliding over the surface of the skin. The material can be washable. The material can be a synthetic rubber such as Neoprene® (DuPont). Neoprene has a tendency to stay in the place where it has been put on the skin. When the user sweats, Neoprene retains a non-slip quality to some degree. However, large amounts of sweat between skin and Neoprene may allow the Neoprene to slip against the skin. For high-sweat applications, the harness material can be manufactured with holes to allow sweat to evaporate more quickly. The Neoprene material can have a thickness of 1.5 mm or so, although a double layer might be preferable, which would be approximately 3 mm or so in thickness.

[0068] Referring back to FIGS. 1 and 2, several specific sensor locations are shown for the Y harness **10**. The Y harness **10** has two shoulder sensors **30a** and **30b**, two sensors on the chest band **30c** and **30d**, and a sensor on the back **30d**. For the Y harness **10**, the shoulder sensors **30a** and **30b** are placed close to the neck, on a part of the shoulder that does not experience much movement, in order to reduce the amount of muscle movement and thus noise imparted to signals sensed by the sensors **30a**, **30b**. The shoulder sensors **30a**, **30b** can be placed on top on the shoulders or on the clavicles. The location of the harness on the body (all models) performs very

well at keeping the sensors in place, because the harness does not cover much skin area and lies in places that do not experience much skin movement or stretching.

**[0069]** The sensor **30d** is located in the chest band on the subject's left side, in the vicinity of ECG electrode locations **V4** and **V5**, very close to the heart. Sensor **30c**, located on the subject's right side, is near the **V6R** position, whereas sensor **30e** is positioned in the middle of the subject's back. These five sensor locations can be used in a variety of ECG lead configurations. A differential or bipolar ECG lead from sensor **30a** to **30b** produces a signal similar to the standard ECG lead I; sensor **30b** to **30d** is similar to Lead II; sensor **30a** to **30d** is similar to Lead III. Sensor **30c** could be used as a reference electrode, like conventional electrode location **RL**. Lead II is well-known as the best lead for detecting P waves in the ECG, which are useful for diagnosing particular heart conditions like atrial fibrillation.

**[0070]** Wearable sensors may not provide as reliable a signal as conventional ECG electrodes with adhesive. Therefore, it may be desirable to set up 2 or 3 independent bipolar leads, such as a lead from sensor **30b** to **30d** (Lead II), and another lead from sensor **30a** to **30c**, for example. With independent leads, even if one sensor loses contact and become unusable, the other lead still provides a signal for an ECG. The back sensor **30e** (see FIG. 2) is well-positioned for picking up ST segment changes in the ECG, which can indicate ischemia.

**[0071]** For each user, the harness will place the sensors in the same position every time the harness is put on, because its shape tends to put it on the same place on the body. Therefore, sensors remain in substantially the same position, and changes in ECG can be measured over time, which is useful for detecting conditions like the onset of ischemia, in which changes in ECG morphology occur over a period of time.

**[0072]** Referring to FIG. 9, another alternative **10'** to the harness **10** (FIG. 1) has a stiff but flexible chest strap **14'** that when put on, holds its shape to present the side straps **14a'** and **14b'** in a position forward of the body so the user can easily grasp them. The chest strap is flexible enough for the user to pull the strap tightly around the chest and secure the chest strap **14'** by touching the ends of the side straps together, which are held fast by, for example, Velcro. The bottom of the Y, **12c**, is pulled down and attached to the chest strap **14'**. To take the harness off, the process is reversed. Any wearable physiological monitor should be easy to put on and take off, because many of the people who need monitoring for cardiac diseases are sick or elderly and have limited mobility.

**[0073]** Referring now to FIG. 10, one way to provide a harness with the desired affect of presenting the sides **14a'** and **14b'** in front of the body is to attach or embed a stiff plastic material **110** to the harness, to maintain curvature in the harness as shown in FIG. 9. The stiffener **110** can be placed in between two layers of Neoprene that make up the material of the harness **10**. The stiffener **110** is curved in a U shape (not shown, but as would be viewed into the page) causing the chest belt ends **14a'** and **14b'** to be oriented as shown in FIG. 9.

**[0074]** When the Y harness **10** of FIGS. 1, 2, and 9 is laid on a flat surface, it looks as in FIG. 10, with the end of vertical portion **12c** at the top of the figure, and the left and right ends of the chest strap **14a** and **14b** at the left and right ends of the figure. The shoulder straps **12a**, **12b** form a neck-hole **112**. The Y harness **10** is put on by first placing the head-hole **112** over the head, with the vertical portion **12c** in front.

**[0075]** The harness **10**, **10'**, **60**, and **80** or the variation **100** are configured to place ECG sensors at physiologically interesting and useful places on the subject. However, the harness can hold other types of sensors, some of which can be of use in interpreting or processing the ECG signal. The harness could incorporate motion sensors to detect motion that can be used, for example, to invalidate portions of time in the ECG signal from a nearby ECG sensor when a large amount of motion is detected and the signal was thus presumably corrupted by noise caused by the motion of the sensors relative to the skin. A respiration sensor can be provided by placing a sensor in the chest band **11** which can measure stretch of the chest band. This signal can be used in ECG processing, for example to remove respiration artifact. ECG sensors can be used in conjunction with impedance plethysmography sensors to measure cardiac output. Sensors to measure surface skin temperature may add to the overall measure of user health.

**[0076]** Sensors could be permanently integrated into the harness **10**, **10'**, **60**, and **80** or the variation **100**. Several wearable sensor materials, discussed in more detail below, are robust enough to be washed along with the harness **10**, **10'**, **60**, and **80** or the variation **100**. Another option is to have some portion or all of the sensors removable and/or disposable. This would allow different types of sensors to be used for different activities. For example, exercise generates significantly more sweat than sedentary activity, so different sensor designs could be used depending on the anticipated level of perspiration.

**[0077]** Referring to FIG. 11, a removable sensor **150** for sensing voltages from the skin to provide a signal for ECG monitoring is shown in cross section, disposed in a portion of a harness, e.g., harness **10** (FIG. 1). The removable sensor **150** has a snap **152**. The snap **152** is attached to a sensor frame or housing **154** that is comprised of a firm but flexible material (e.g., rubber). The housing **154** is used to support a more flimsy, e.g. compliant lower Young's modulus material that provides a sensor membrane **156**. The sensing membrane **156** is comprised of an electrically conductive and flexible material, e.g., a conductive rubber or conductive silicone and is disposed inside the housing **154** and has a major surface thereof that is exposed so that the sensing membrane **156** can make contact with the skin. The sensing membrane **156** can be flat or can be curved as shown, to insure secure and adequate contact with the skin.

**[0078]** The sensing membrane **156** may be temporarily covered with a conductive gel or a hydrogel film **158**. A thin hydrogel film could be cut to size, and would provide excellent skin conduction to a wearable sensor material such as conductive silicone. Hydrogel, however, is not very durable and so the hydrogel might be used for, e.g., a day and then discarded and replaced.

**[0079]** The snap **152** is comprised of an electrically conductive material, e.g., a metal, conductive plastic, or hard conductive rubber and is disposed in intimate contact with the backside of the sensing membrane **156** to provide an electrical path for a signal from the sensing membrane **156** to a mating snap **160** on the harness. This contact can be provided either by having the membrane in intimate contact with a back portion **154a** of housing **154** or through an aperture (not shown) in the back portion **154** to allow the snap **152** to be directly connected to the membrane.

**[0080]** The harness in this example would have an accommodation for the sensor **150**. Here the accommodation is a

mating snap **160**. The removable sensor **150** thus attaches to the harness by mating the snap **152** on the sensor **150** with the corresponding mating snap **160** on the harness. In this configuration a wire **40** would be coupled to the mating snap **160** to carry the electrical signal to the electrical circuitry (FIG. 3). The garment's snap **160** attaches to the harness by being disposed through an aperture in the material and crimped to surrounding material of the harness to hold the snap **160** to the harness.

[0081] Referring to FIG. 12, another example of a removably attachable sensor for use with the harnesses or other garments is shown. This sensor is configured to fit into an accommodation that is a pocket **18** or opening in the harness or other types of garments. The pocket could be formed by fabricating the garment from two layers of material **20**. The sensor **150** is shaped so that the bottom of the sensor **162** fits in the pocket **18**. The sensor **150** may fit snugly in the pocket **18**, in which case the harness would provide the function of holding the sensor in place, as previously discussed. Alternatively, the sensor **150** could fit loosely in the pocket **18**, allowing the garment or harness to move and stretch. The face of the sensor **150** would preferably be a high friction material to hold the sensor against the skin.

[0082] There are sensors that do not need direct skin contact, such as capacitively coupled sensors for measuring ECG. These types of sensors could slip into a pocket in the garment and would not need to be in direct contact with the skin of the subject.

[0083] Thus, sensor attachment could be a permanent attachment to the garment or could be removable. Parts or all of a removable sensor could be disposable (e.g. the hydrogel membrane). Other examples of mechanisms for removable sensors include conductive Velcro or other hook and loop type fastener mechanisms, a buttonhole in garment (with the sensor configured as a round button-like object), and sensor prongs that fit in holes in the garment.

[0084] The ECG sensors can be provided with electrodes comprised of metal such as a conventional silver/silver chloride compound. While this metal material could be used, the metal material is somewhat inflexible, does not naturally stick to the skin, and can become slippery in the presence of perspiration. Other materials can be used such as conductive silicone, a wearable material commonly used for shock therapy electrodes, or conductive rubber provided by adding conductive, skin-friendly materials such as silver, gold or carbon to liquid rubber and molding the composition into the desired shape of a sensor. Other conductive materials can be used such as a conductive fabric provided by weaving fine threads of silver together with conventional fabric threads; or coating fabric threads with metal. Hydrogels can be used as a thin layer between any of these wearable sensor materials and the skin as previously mentioned. These materials are suitable for sensing ECG signals from the skin without any skin preparation. The shape of the sensor can help maintain contact with the skin.

[0085] Referring now to FIGS. 11 and 12, a smooth rounded sensor that would gently push against the skin to make contact is shown. FIGS. 13A-13D shows cross sections of sensor faces showing different textures. In FIG. 13A, the sensor **150** has a sensor face **156a** with nubs or bumps **166** shaped like gumdrops on the surface of the sensor that touches the skin. This configuration of the surface would be suitable for working around body hair, as the nubs would have

a good chance of pressing in between the hairs to reach the skin. Excessive sweat could also be channeled between the nubs **166**.

[0086] FIG. 13B shows a sensor face **156b** having sharp ridges **168** which may be more suitable for reaching the skin through hair, than the nubs **166** of FIG. 13A. Sweat could also be channeled through the grooves in between the ridges **168**.

[0087] FIG. 13C shows another variation with grooves cut into the sensor face **156c** forming softer ridges **170**. In FIG. 13D conductive threads **172** are provided in the sensor face **158d** and help maintain contact with the skin even when the sensor is sliding across the surface of the skin.

[0088] Referring to FIGS. 14A, 14B, a ring of material **159a** could be placed around the sensing material **156** to provide one or two functions: to prevent the sensor from sliding by providing a high-friction material, and to induce sweat for better sensor conductivity by providing a water resistant material. Common wearable materials such as rubber and soft silicone provide both functions: they are high-friction and waterproof, which induces sweat.

[0089] Sweat is a good conductor for ECG sensors, and inducing a little sweat can help maintain skin contact and conductivity. However, if there is too much sweat, the sensor may slide against the skin, inducing noise in the signal, and the excess sweat may be uncomfortable. For this reason it may be beneficial to have a sweat absorbing ring **159b** that surrounds the rest of the sensor. The sweat-absorbing material **159b** can be made of cotton, for example.

[0090] The sensing material may be in the shape of a flat disk, as shown in FIG. 14A, and made of a conductive fabric which can absorb some sweat. These fabrics can tend to dry out when the user is not perspiring, which may drastically reduce the sensor's conductivity. One solution is to apply a waterproof or water resistant backing **159a** to the sensing material **156**, to help keep the sensing material **156** damp by sweat. The material **159a** extends beyond the edges of the sensing material **156** to make contact with the skin and provide the high-friction function, while also providing a water resistant barrier around the sensing material **156** to induce sweat. For applications where large amounts of sweat are anticipated, the sweat disk **159a** could be constructed of water resistant material that allows some evaporation. The sweat-absorbing ring **159b** shown in FIG. 14B does not overlap any other part of the sensor, but is a separate ring to ensure direct skin contact and prevent sweat from dripping down from the sensor.

[0091] The sensing material **156**, friction ring **159a** and sweat-absorbing ring **159b** are shown as circular shapes. However, other shapes such as rectangular can be used or the rings can be provided in alternating strips and so forth.

[0092] The ideal physiological sensor would be able to induce enough sweat for good conduction, but wick away excess sweat. In the absence of the ideal, users may desire to have different sensors for different activities, different amounts of sweat, and differences in comfort. Users may differ in how dry their skin is, how much body hair they have, or how much they sweat, requiring different sensors. To work in the presence of sweat or hair, an uneven surface will allow parts of the sensor to reach the skin and make good contact.

[0093] Referring now to FIG. 15, construction details of a garment with a sensor **150** in the process of being permanently attached, and an example of the associated integrated sensor wiring is shown. The garment, e.g., harness **10**, **10'**, **60**, and **80** is made up in this example of two layers of material **20**.

Sandwiched between the two layers of material **20** is a wire **180** which, in addition to being insulated, may optionally be shielded. Shielding can be useful because wires in a garment can pick up electromagnetic interference (EMI) such as 60 Hertz line noise or radio interference. Shielding also extends over the outside of the garment over the area of the sensors (not shown) to protect the sensors from picking up EMI. Sensor shielding consists of a thin metal material, possibly fabric, which is electrically wired to the wire shielding.

[0094] The wire **180** includes metal conductors **184**. The insulation and shielding (if any) are stripped from the end of the wire **180**, leaving the bare conductors **184** exposed. These bare conductors **184** are threaded through an aperture **186** in the garment to attach to the sensor **150**. One way to attach the sensor **150** is with conductive epoxy **188** which may first be applied to the back of the sensor **150**. To construct the garment, the sensor **150** with epoxy **188** is pressed down upon the exposed conductors **184** and permanently attached to the material **20**. The wire **180** can be laid in the material **20** in an S shape to allow for the stretching of the garment.

[0095] The garments or harness **10**, **10'**, **60** and **80** are wearable and may be relatively comfortable for wearing all day or while sleeping, for extended periods of time. The harness material, being flexible and somewhat elastic, imparts some comfort in the wearing of the harness. The sensors are comprised of skin-friendly materials, e.g., materials that generally do not irritate the skin and are flexible next to the skin, increasing the sense of comfort. The wiring from each sensor would be integrated into the garment, e.g., harness. Besides its comfortable tactile properties, comfort of the garment is enhanced by its thin and lightweight construction. It is wearable in everyday use because it is non-bulky and therefore inconspicuous under most clothes.

[0096] The garments or harness **10**, **10'**, **60** and **80** have comfortable sensors that do not use adhesive against the skin and yet can stay in place against the skin. The mechanisms that make this possible include a tensile force imparted to the sensors to hold the sensors against the body by the garments or harness **10**, **10'**, **60** and **80**, and also in some embodiments a high-friction material that tends to stay in place against the body. The garments or harness **10**, **10'**, **60** and **80** allow sensors to be placed at physiologically useful places on the body, but also allow body movement that results in minimal stretch of the garment (for example, shoulder straps are close to the neck, so that arm movements result in minimal stretching of the shoulder straps). The sensors may also have a slightly sticky or tacky surface to help hold them in place.

[0097] The harnesses **10**, **10'**, **60** and **80** have a minimal amount of fabric (as compared to a T shirt with integrated sensors, for example), so there is minimal force on sensors as a response to body movement. If a sensor should become unusable during exercise because of noise problems, the garments have the capability of providing multiple independent ECG leads.

[0098] For user convenience, the garments are washable, e.g., Neoprene is commonly used in wetsuits and is washable. The wearable sensor materials (with the exception of the hydrogel which absorbs water) including conductive rubber, conductive silicone and metallized fabric are all washable. Wiring can be covered with a waterproof sheath of, e.g., a plastic. The electronics can be "potted" in an RTV or the potting material and permanently integrated into the garment, or can be made removable from the garment. If removable,

the garment's connector to the electronics could be covered with a waterproof cover to allow washing.

[0099] A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention.

What is claimed is:

1. A garment comprising:

a belt that is configured to be worn around a user's chest, the belt having a pair of ends with closures disposed at the pair of ends of the belt;

at least one strap of unitary construction having a first end connected to the belt at a first front side of the belt and a second end, with at least one of the belt and the at least one strap having an accommodation for carrying a sensor and with material that comprise both the belt and the at least one strap being a polychloroprene synthetic rubber to provide the garment for those portions that rest against the skin of a person wearing the garment with a high level of adherence against the skin, stretching, but not sliding over the surface of the skin.

wherein the strap couples between the belt and a back portion in a manner that the strap diagonally traverses the chest of a user and with the accommodation for carrying a sensor being a first accommodation disposed on the belt and the garment further comprising a second accommodation for carrying a second sensor, the second accommodation disposed on the strap in a region of the strap that contacts a shoulder of the user and the lower back portion integrally joins with the belt.

2. The garment of claim 1 further comprising:

a back portion that connects to the belt and joins the second end of the strap.

3. The garment of claim 1 wherein the first end of the strap is removably coupled to the belt.

4. The garment of claim 1 wherein the at least one strap connects between the belt and the back portion in a manner that the strap diagonally traverses the chest of a user, connecting to the back portion on a second, opposite side of the belt.

5. The garment of claim 1 wherein the accommodation for the sensor carried by the strap is attached in a region of the strap that contacts the shoulder of the user.

6. The garment of claim 2 wherein the belt and the back portion are configured to secure the belt about the chest of the user.

7. The garment of claim 1 further comprising:

conductors to attach to the sensors, the conductors being integrated into the garment.

8. The garment of claim 2 wherein the garment further comprises:

a sensor that is selected from the group consisting of an ECG sensor, motion sensor, body temperature sensor, respiration sensor and impedance plethysmography sensor.

9. The garment of claim 8 wherein the sensor has an uneven surface having at least one of the features of nubs, bumps, ridges, grooves or conductive threads to maintain contact with the skin of a user when sliding over the surface of the skin.

10. The garment of claim 1 wherein the strap is a first shoulder strap and the garment further comprises:

a second shoulder strap, with the first and second shoulder straps coupled to the belt and with the shoulder straps

configured to lie across shoulders of the user, in proximity to the sides of the neck of the user.

**11.** The garment of claim 1 wherein the strap is a first shoulder strap, the garment further comprising:

a pair of brassiere cups; and

a second shoulder strap with the first and second shoulder straps coupled to the belt through the brassiere cups and with the shoulder straps configured to carry sensors.

**12.** The garment of claim 1 wherein the garment is comprised of synthetic rubbers based on polychloroprene material.

**13.** The garment of claim 1 wherein the garment further comprises:

a stiffener member to hold the sides and front of the belt forward of a user's body, when the belt is being put on and before it is fastened by the user.

\* \* \* \* \*

|                |                                                                                                                                                  |         |            |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 带传感器的线束                                                                                                                                          |         |            |
| 公开(公告)号        | <a href="#">US20140031705A1</a>                                                                                                                  | 公开(公告)日 | 2014-01-30 |
| 申请号            | US13/952332                                                                                                                                      | 申请日     | 2013-07-26 |
| [标]申请(专利权)人(译) | MEDICOMP                                                                                                                                         |         |            |
| 申请(专利权)人(译)    | MEDICOMP INC.                                                                                                                                    |         |            |
| 当前申请(专利权)人(译)  | MEDICOMP INC.                                                                                                                                    |         |            |
| [标]发明人         | KURZWEIL RAYMOND C<br>ALBRECHT PAUL<br>CRAFT BRANDON<br>GIBSON LUCY<br>LUTWYCHE MARK<br>DUA VISHAL<br>KLEINER AARON<br>DANIELS MICHELLE          |         |            |
| 发明人            | KURZWEIL, RAYMOND C.<br>ALBRECHT, PAUL<br>CRAFT, BRANDON<br>GIBSON, LUCY<br>LUTWYCHE, MARK<br>DUA, VISHAL<br>KLEINER, AARON<br>DANIELS, MICHELLE |         |            |
| IPC分类号         | A61B5/00 A61B5/0295 A61B5/08 A61B5/0402 A61B5/01                                                                                                 |         |            |
| CPC分类号         | A61B5/6831 A61B5/0402 A61B5/0295 A61B5/08 A61B5/01 A61B5/0408 A61B5/6804                                                                         |         |            |
| 其他公开文献         | US9198617                                                                                                                                        |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>                                                                                                  |         |            |

# 摘要(译)

用于对患者进行动态，生理监测的衣服包括带，其具有第一和第二端部，在端部处具有闭合物以包裹使用者的胸部，带具有第一端，该第一端连接到带的一部分，带具有第二端，一对肩带部分，每个肩带部分具有在带子的第二端和第二端连接在一起的第一端，以及连接该对肩带部分的第二端的后部，带，带部分和后部中的至少一个具有用于承载传感器的容纳部。描述了其他实施例。

