




US 20200187878A1

(19) **United States**(12) **Patent Application Publication**
Edwards(10) **Pub. No.: US 2020/0187878 A1**(43) **Pub. Date: Jun. 18, 2020**(54) **METHODS, APPARATUSES AND SYSTEMS
USEFUL IN CONDUCTING IMAGE GUIDED
INTERVENTIONS****Publication Classification**(51) **Int. Cl.***A61B 6/12* (2006.01)*A61B 6/00* (2006.01)*A61B 5/00* (2006.01)*A61B 90/00* (2006.01)*A61B 34/20* (2006.01)*A61B 5/055* (2006.01)(52) **U.S. Cl.**CPC *A61B 6/12* (2013.01); *A61B 6/541*(2013.01); *A61B 5/7289* (2013.01); *A61B**34/10* (2016.02); *A61B 34/20* (2016.02); *A61B**5/055* (2013.01); *A61B 2034/2072* (2016.02);*A61B 90/36* (2016.02)(71) Applicant: **Veran Medical Technologies, Inc.**, St.
Louis, MO (US)(72) Inventor: **Jerome R. Edwards**, Nashville, TN
(US)(73) Assignee: **Veran Medical Technologies, Inc.**, St.
Louis, MO (US)(21) Appl. No.: **16/653,158**(22) Filed: **Oct. 15, 2019****Related U.S. Application Data**(63) Continuation of application No. 14/989,671, filed on
Jan. 6, 2016, now Pat. No. 10,470,725, which is a
continuation of application No. 13/932,428, filed on
Jul. 1, 2013, now abandoned, which is a continuation
of application No. 12/941,555, filed on Nov. 8, 2010,
now Pat. No. 8,483,801, which is a continuation of
application No. 12/146,738, filed on Jun. 26, 2008,
now Pat. No. 7,853,307, which is a continuation of
application No. 10/649,600, filed on Aug. 26, 2003,
now Pat. No. 7,398,116.(60) Provisional application No. 60/494,268, filed on Aug.
11, 2003.

(57)

ABSTRACT

Methods, apparatuses, and systems relating to image guided interventions on dynamic tissue. One embodiment is a method that includes creating a dataset that includes images, one of the images depicting a non-tissue internal reference marker, being linked to non-tissue internal reference marker positional information, and being at least 2-dimensional. Another embodiment is a method that includes receiving a position of an instrument reference marker coupled to an instrument; transforming the position into image space using a position of a non-tissue internal reference marker implanted in a patient; and superimposing a representation of the instrument on an image in which the non-tissue internal reference marker appears. Computer readable media that include machine readable instructions for carrying out the steps of the disclosed methods. Apparatuses, such as integrated circuits, configured to carry out the steps of the disclosed methods. Systems that include devices configured to carry out steps of the disclosed methods.

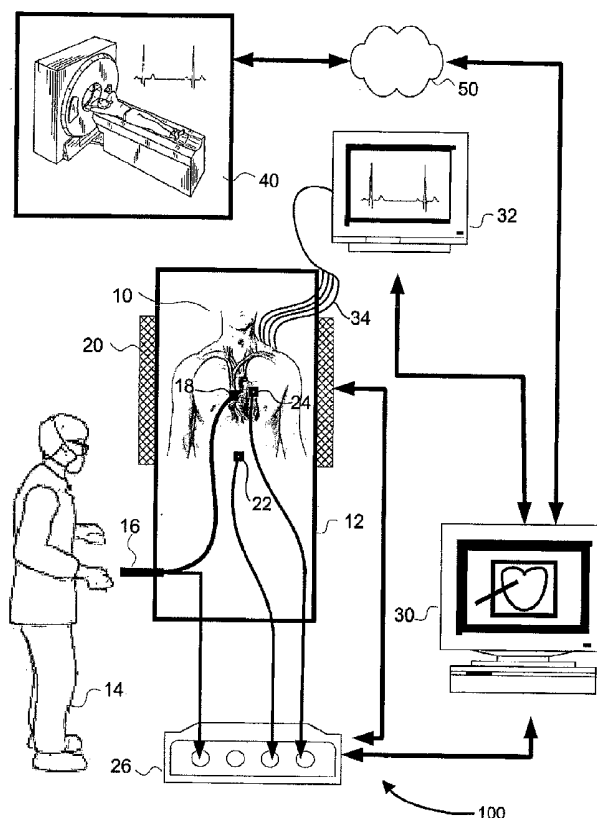

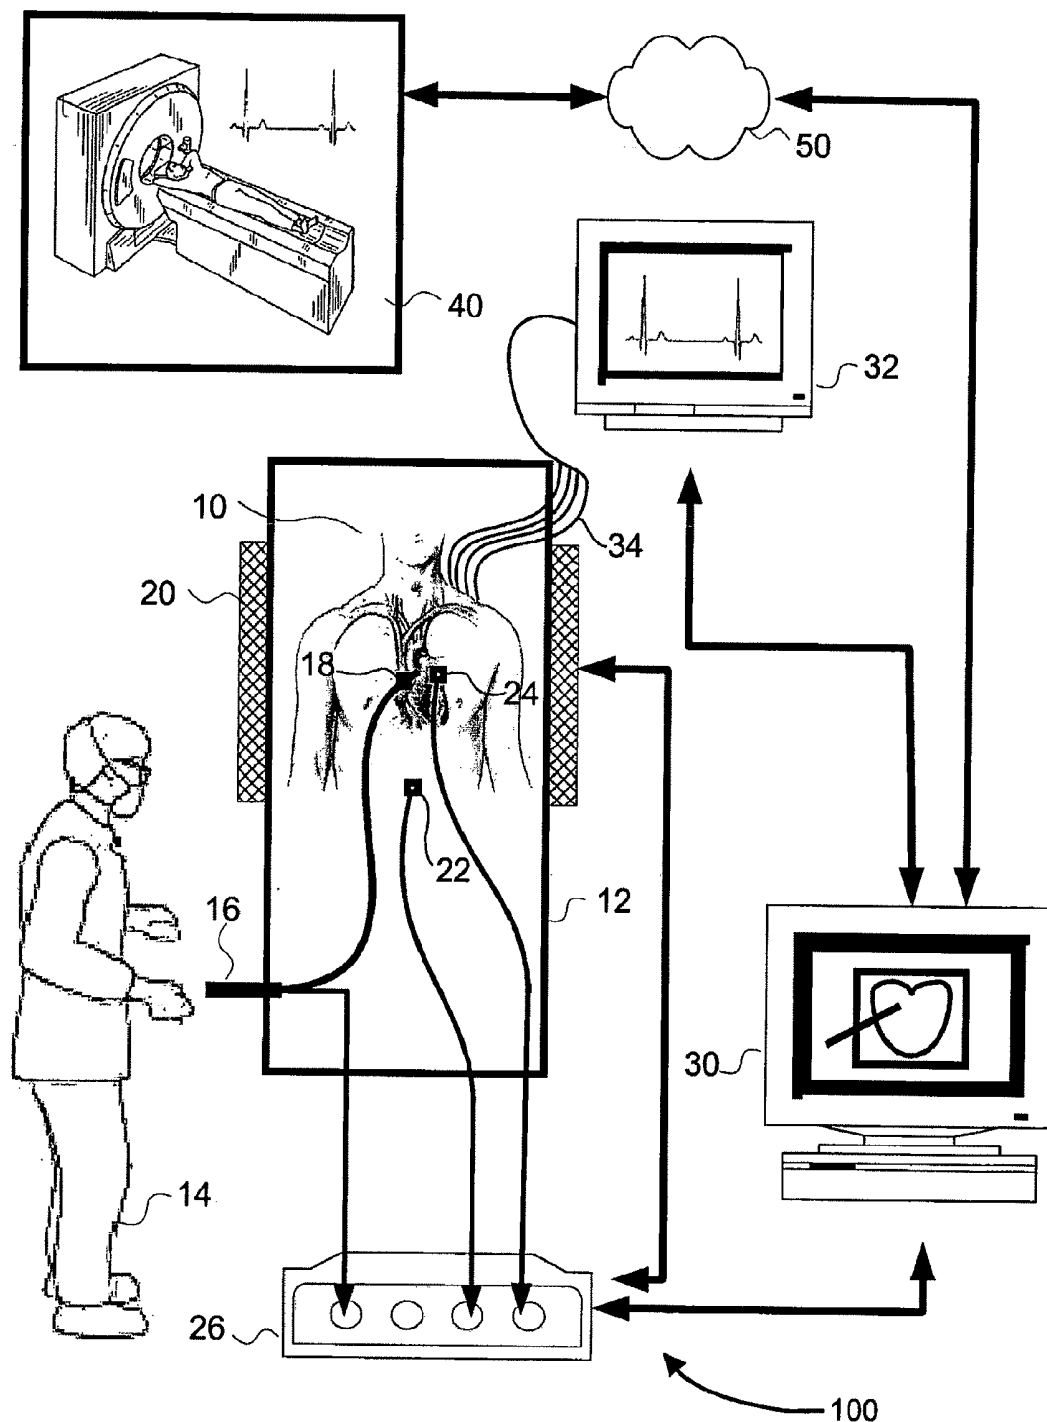
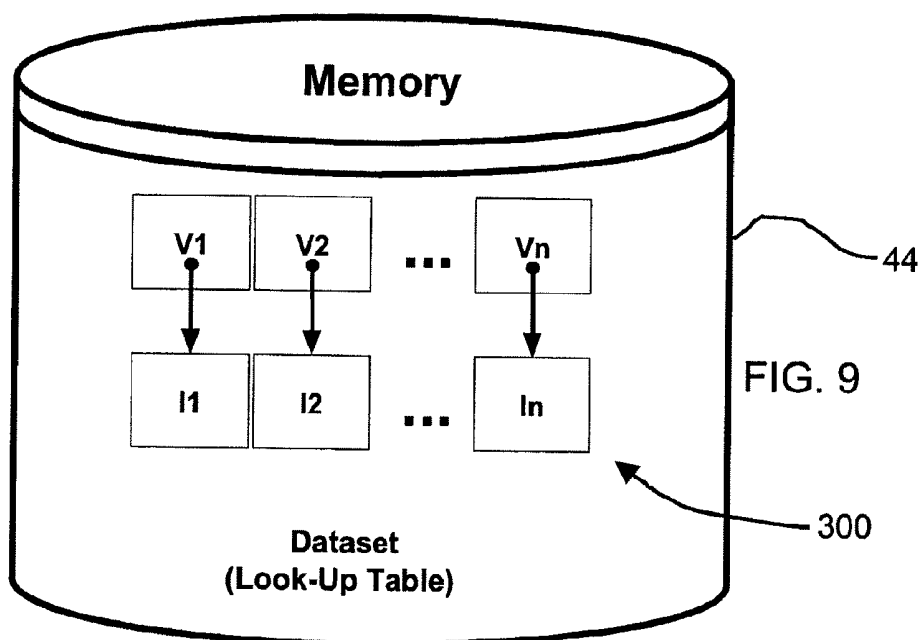
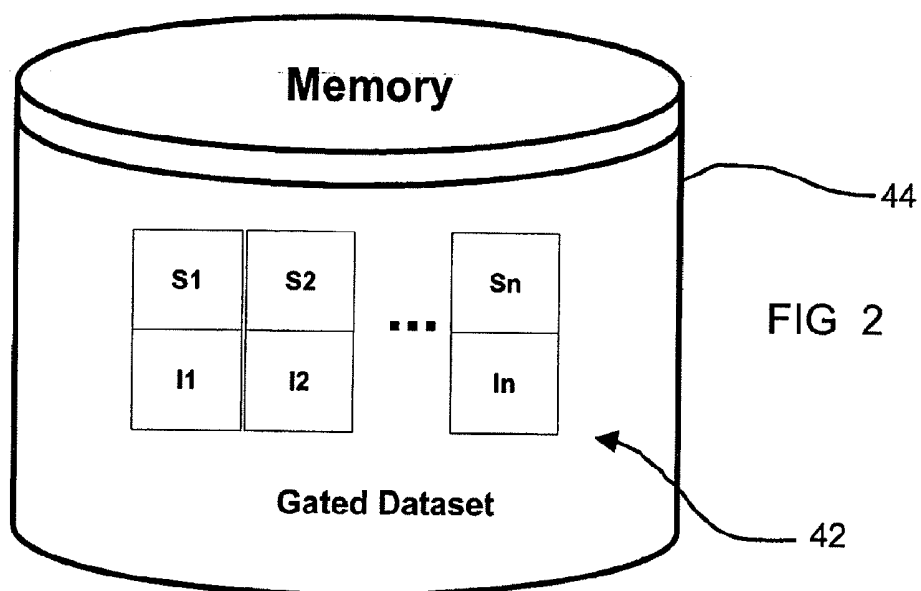


FIG. 1



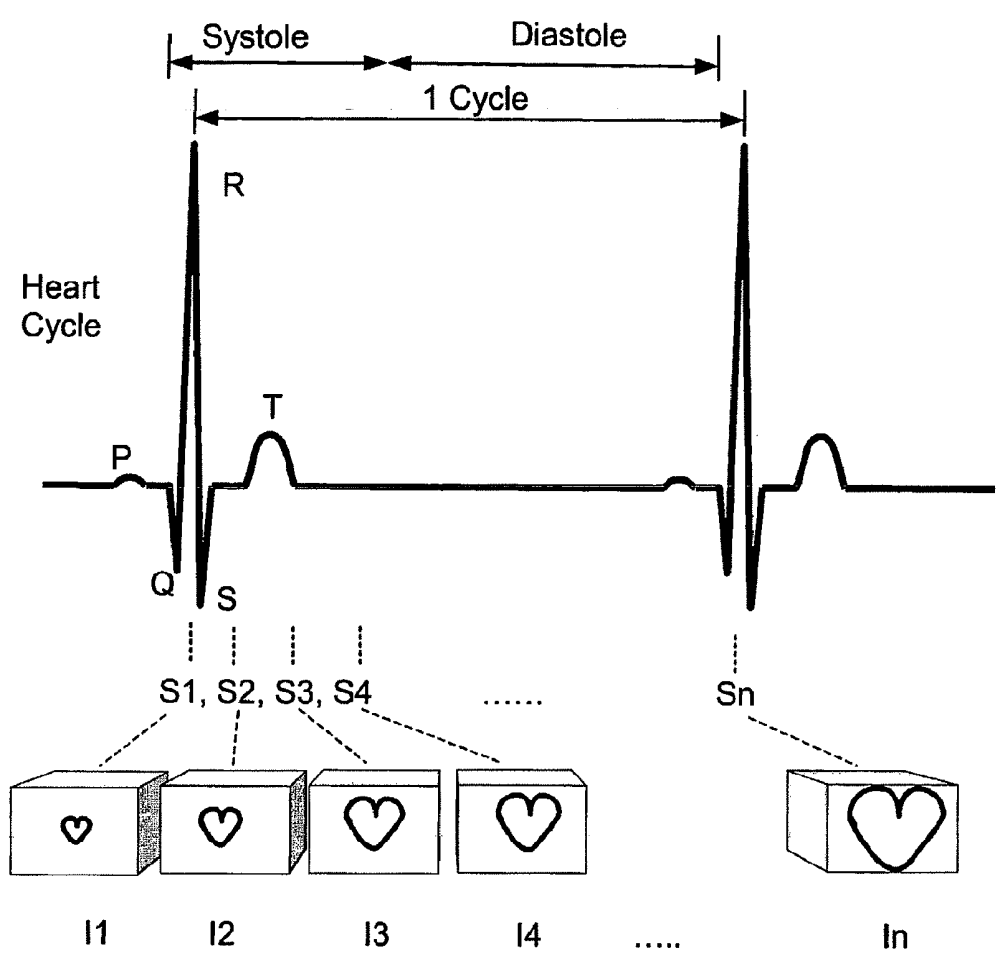


FIG. 3

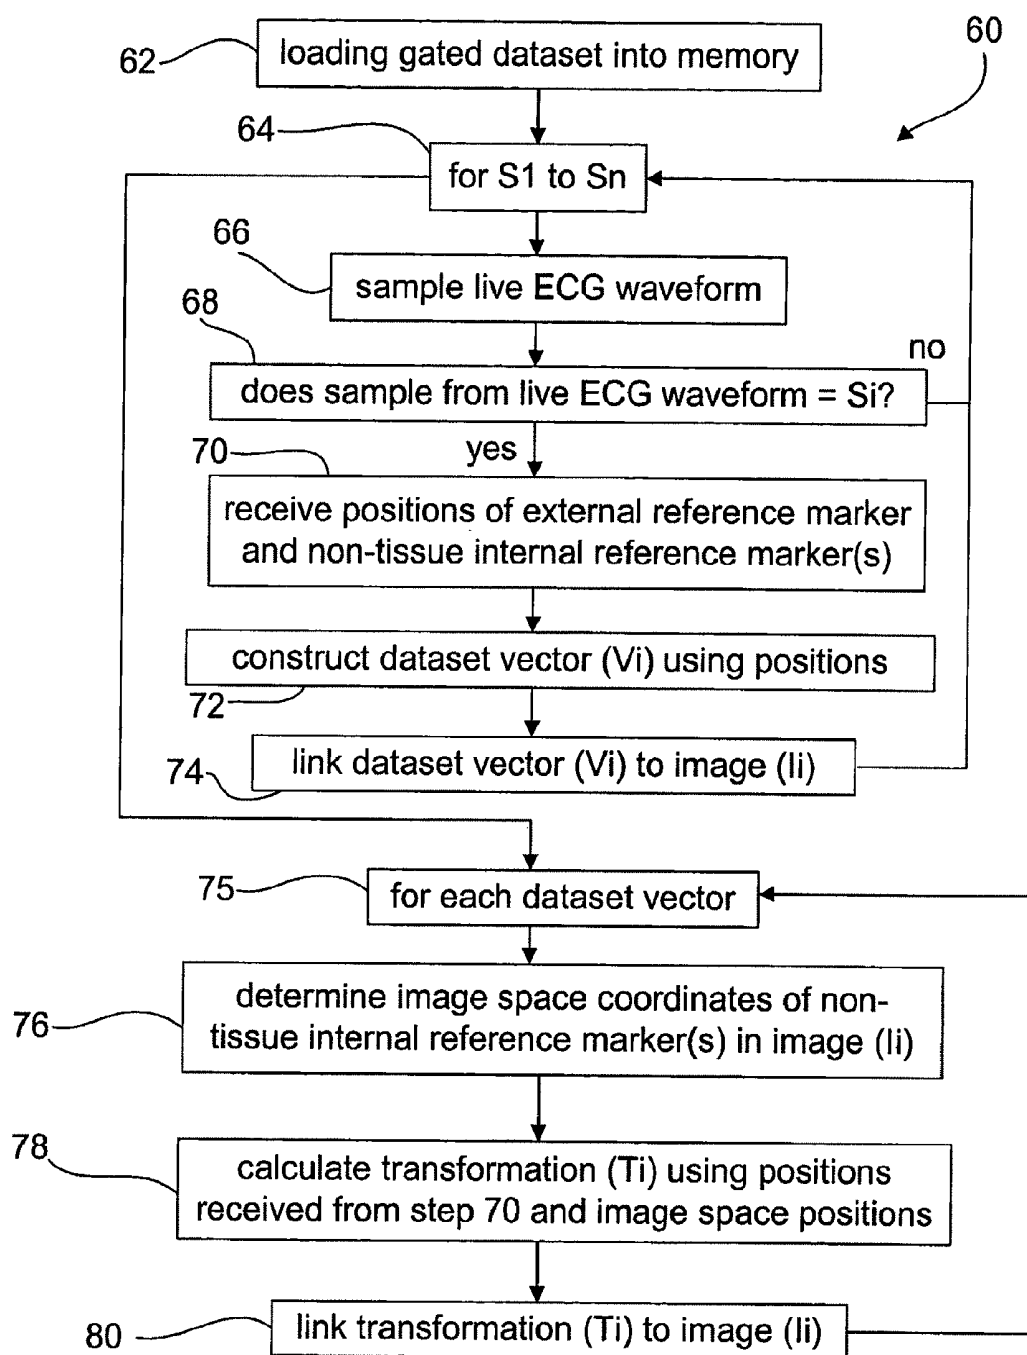


FIG. 4

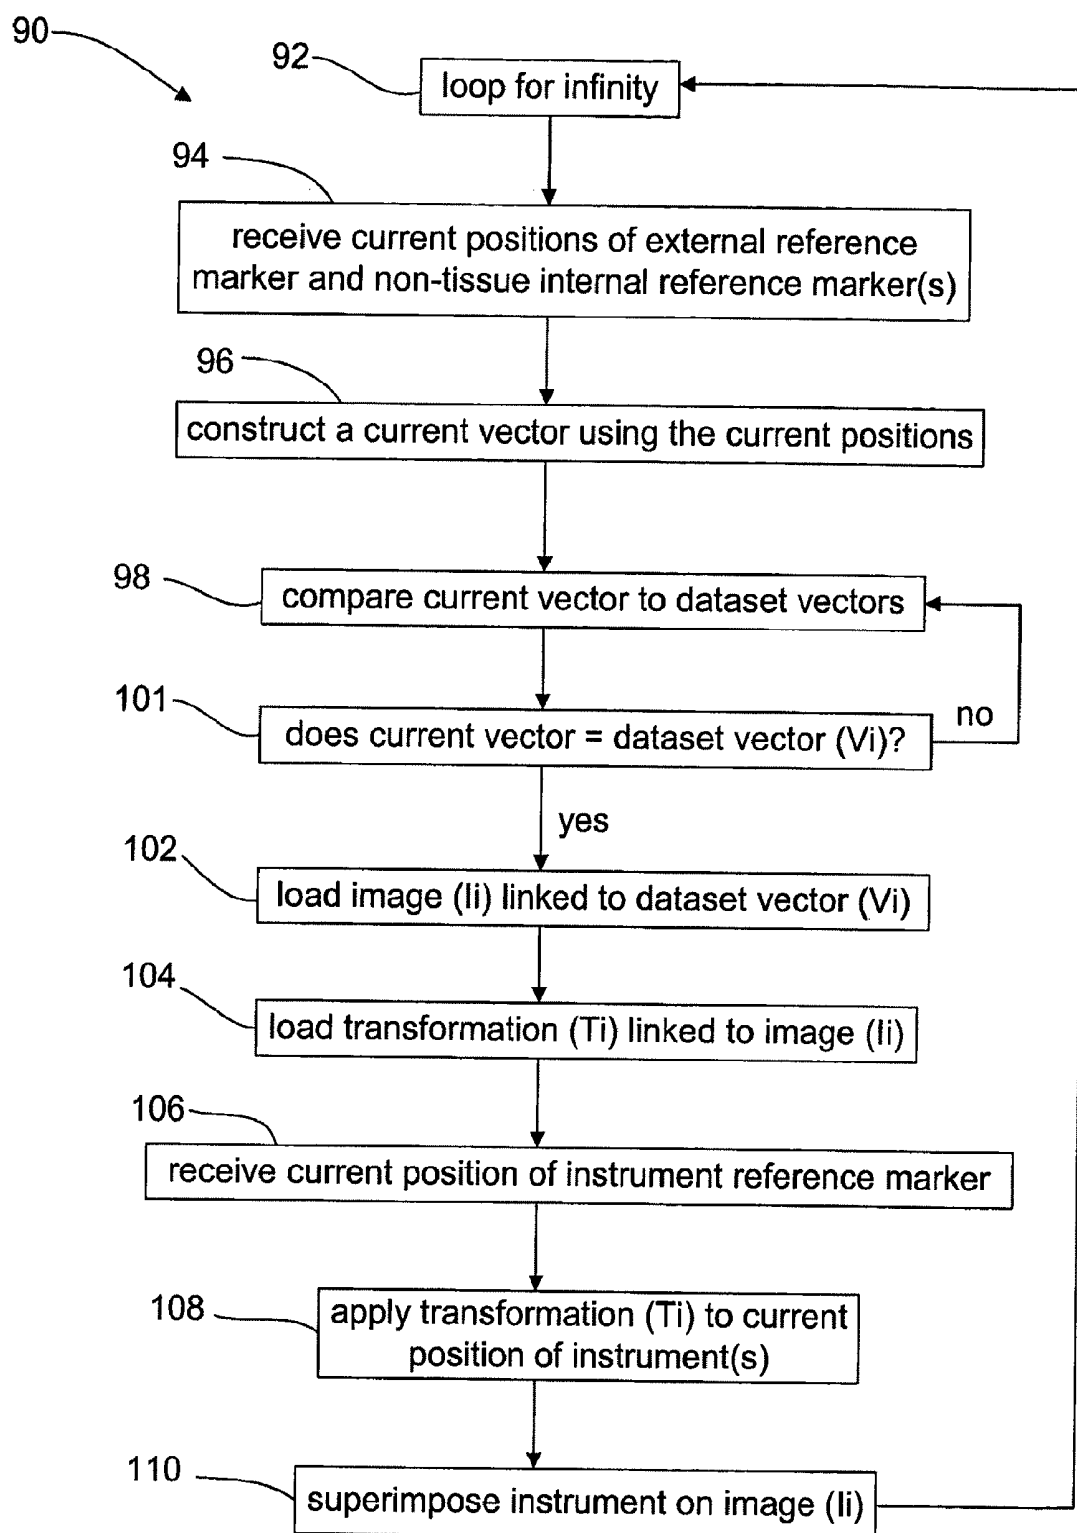


FIG. 5

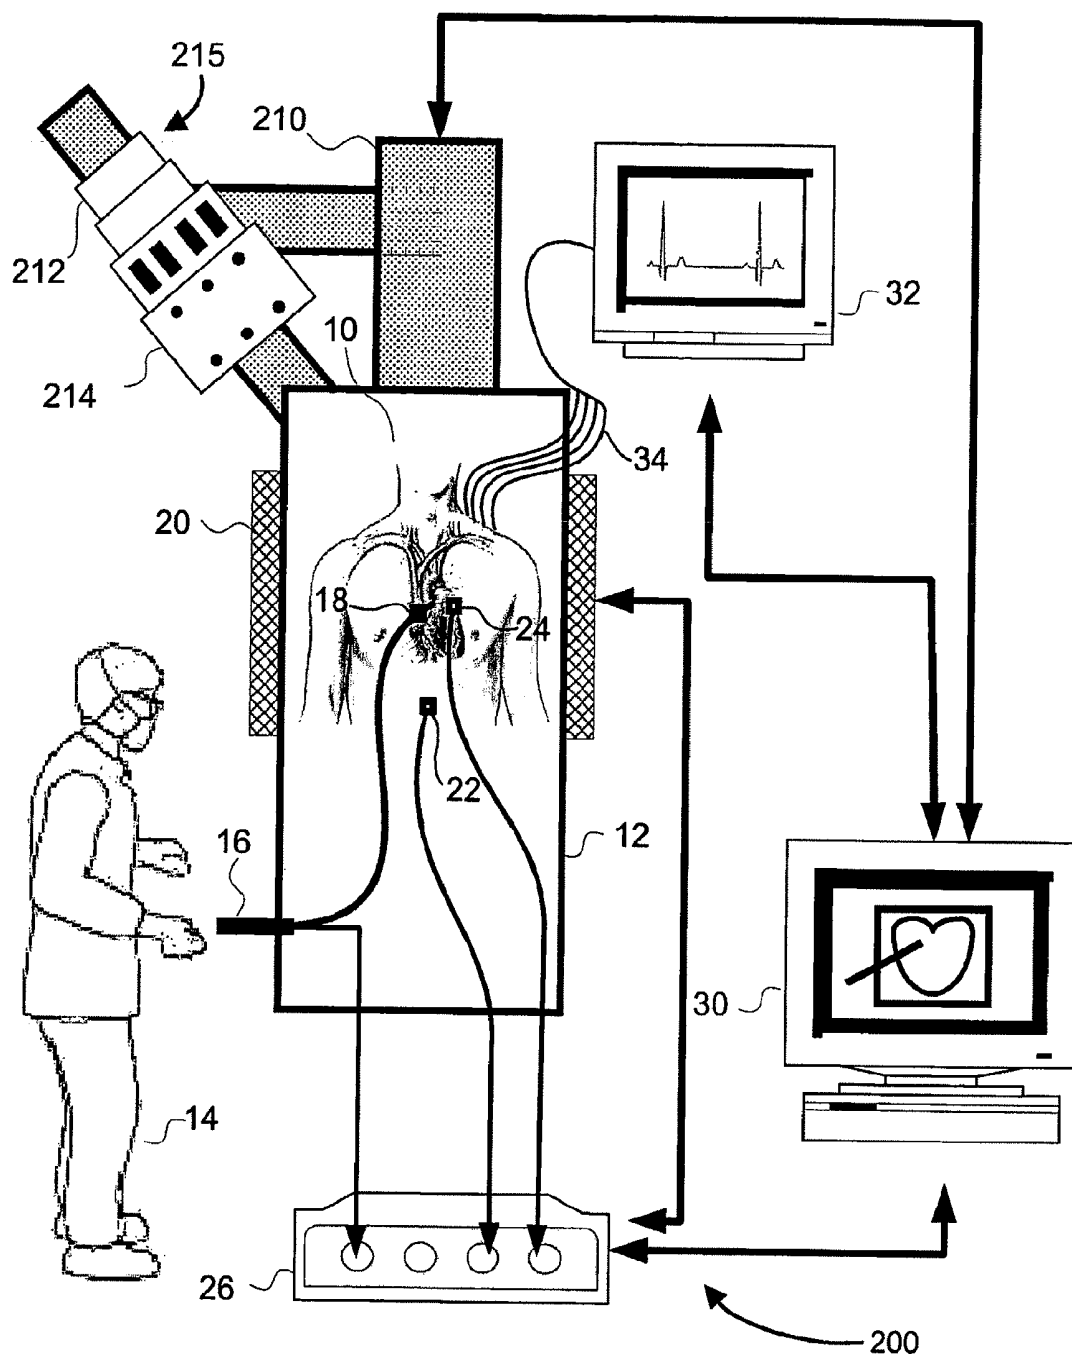


FIG. 6

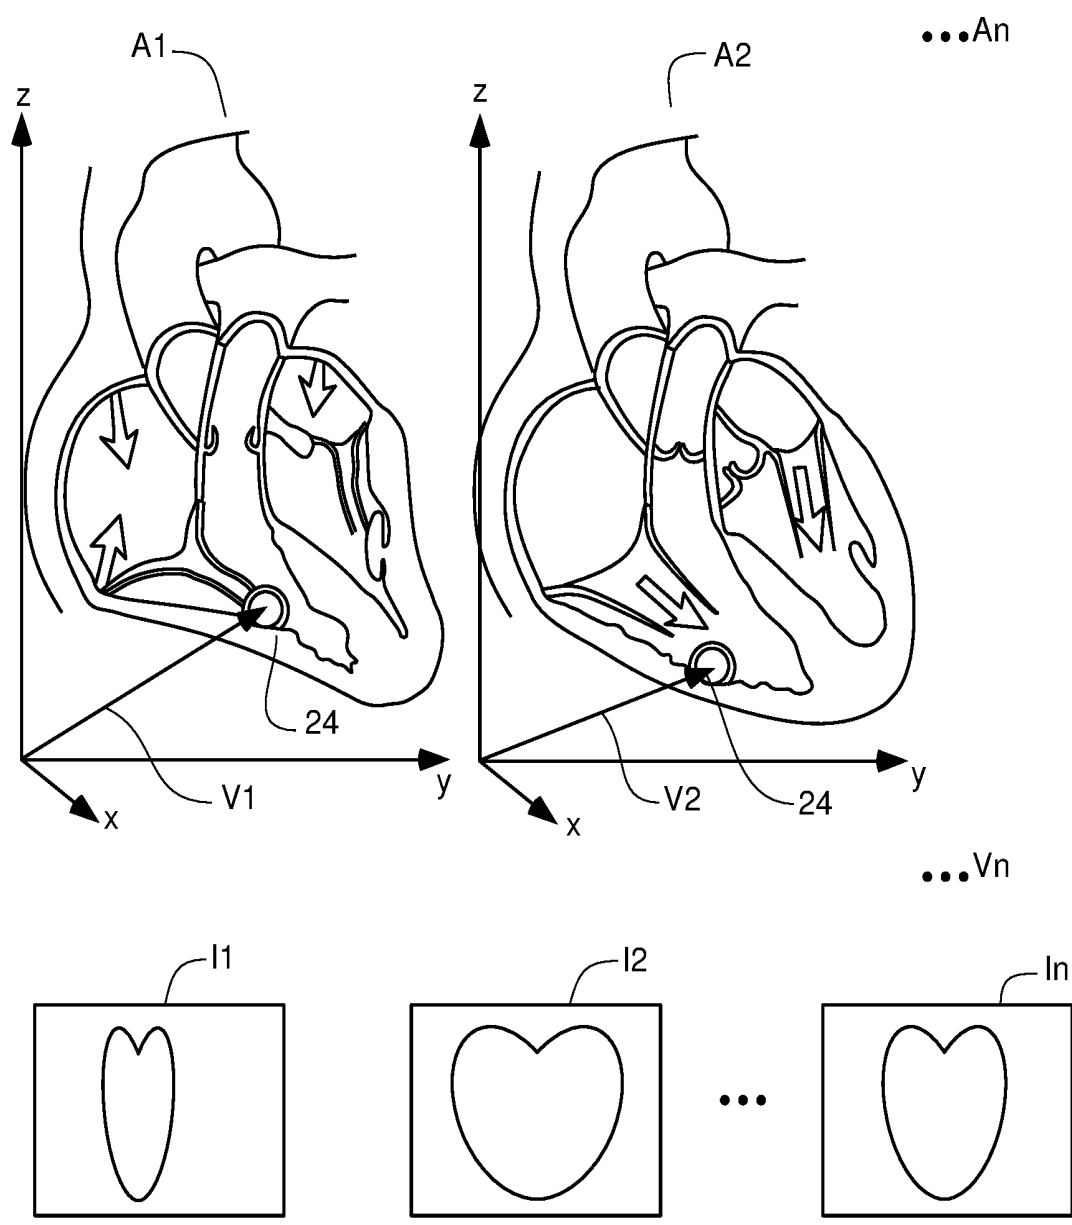


FIG. 7

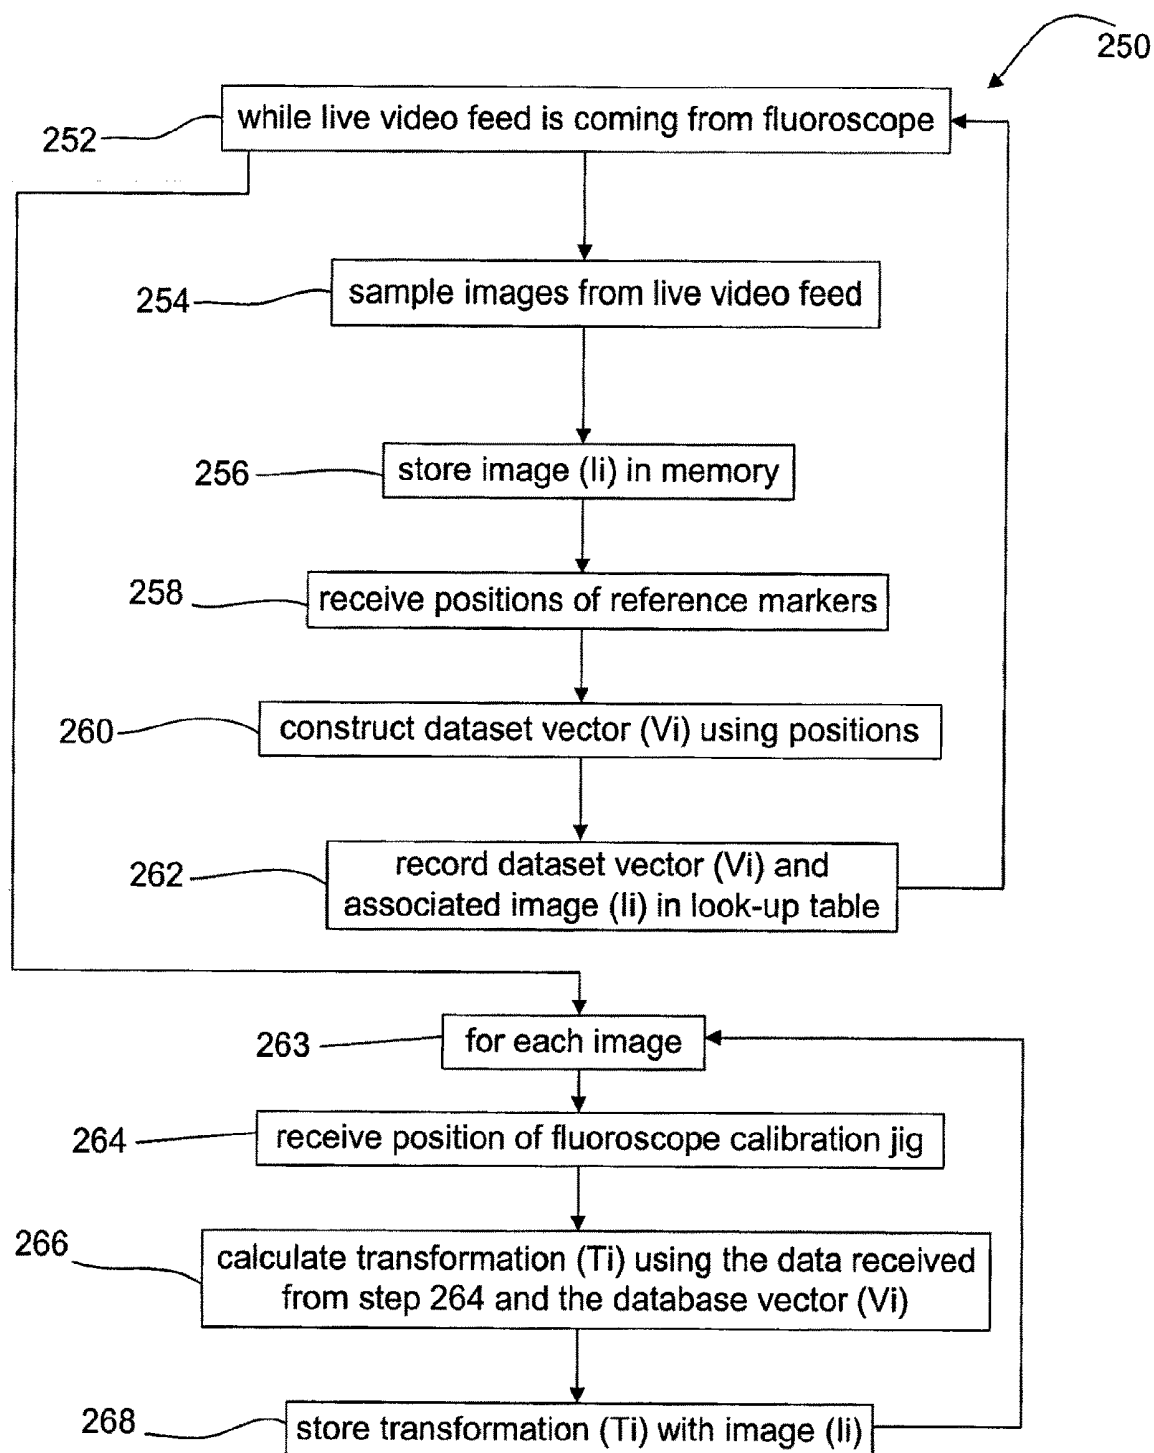


FIG. 8

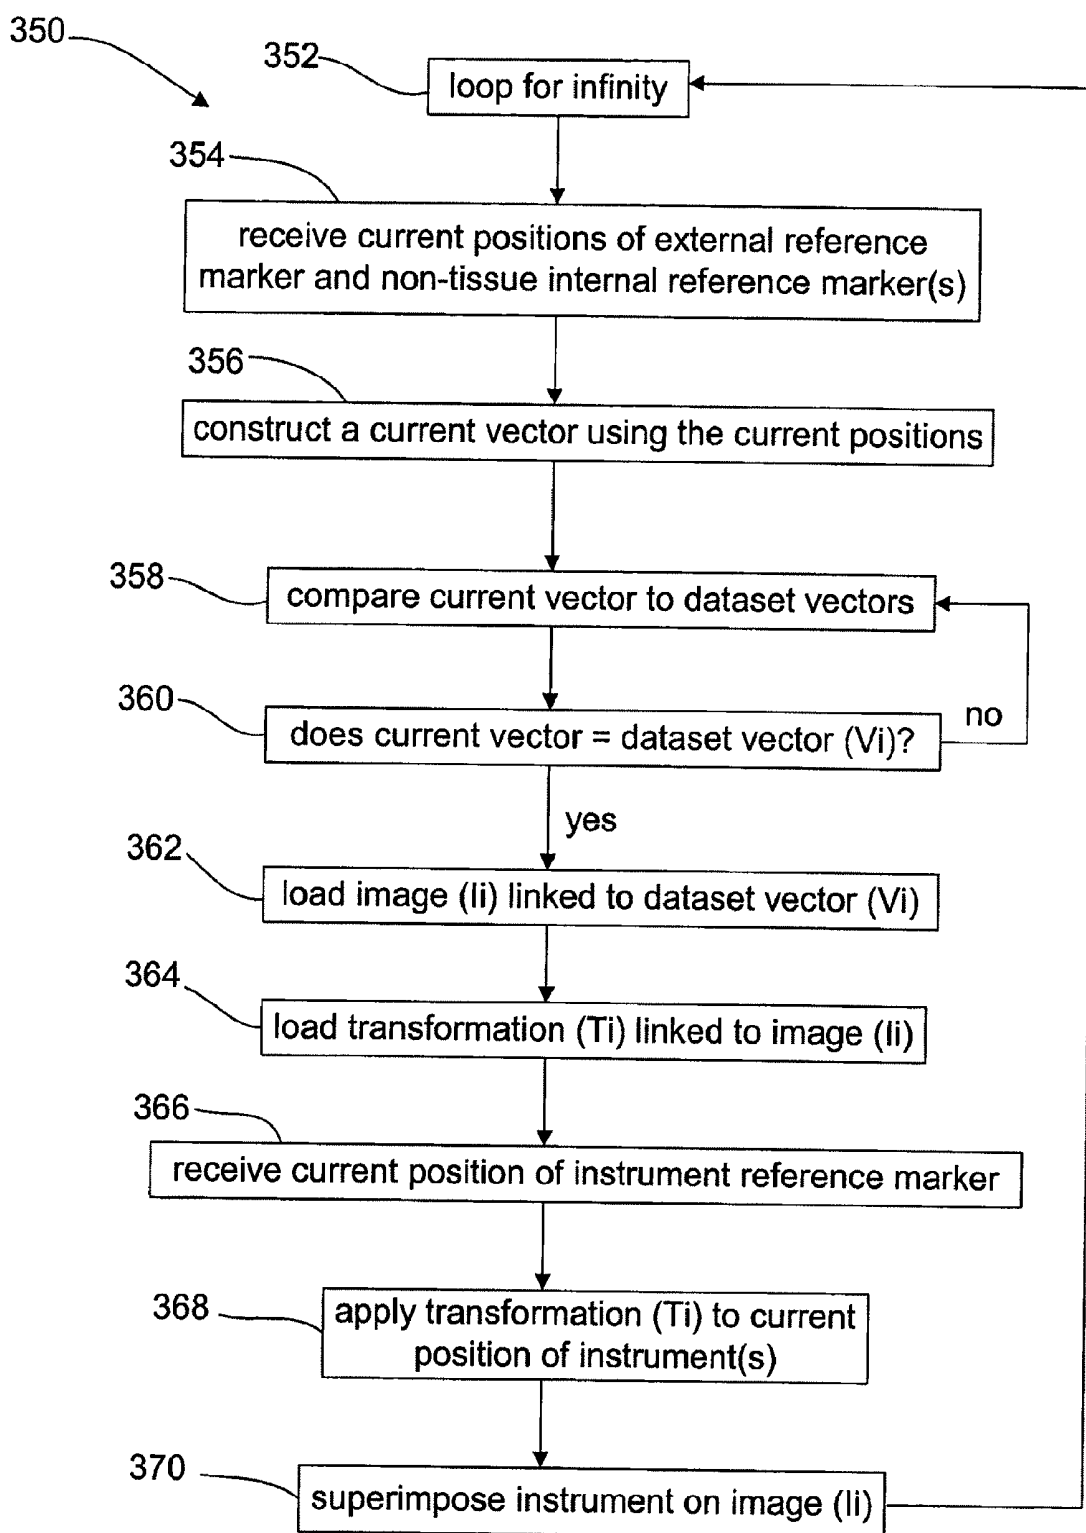


FIG. 10

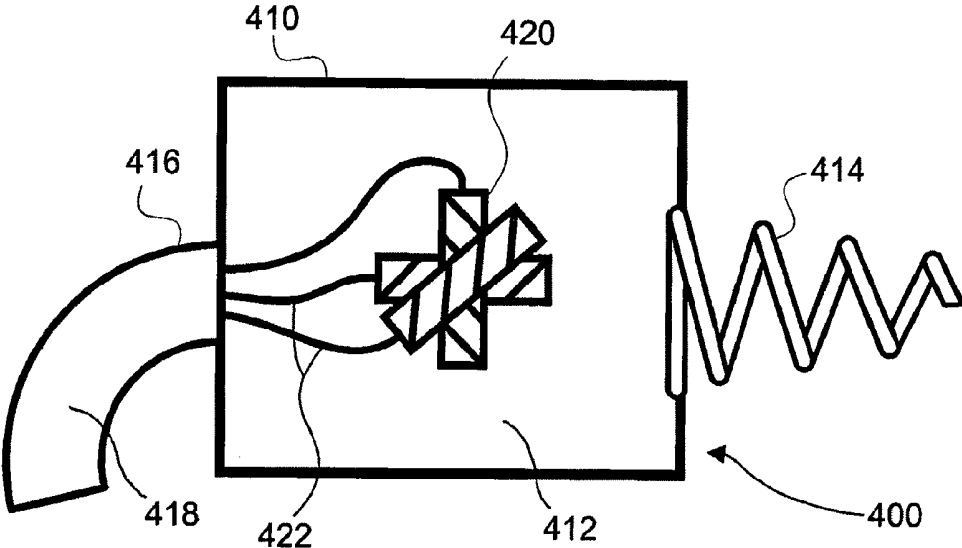


FIG. 11

METHODS, APPARATUSES AND SYSTEMS USEFUL IN CONDUCTING IMAGE GUIDED INTERVENTIONS

CROSS-REFERENCE(S) TO RELATED APPLICATION(S)

[0001] This application claims priority to U.S. Provisional Patent Application Ser. No. _____, filed Aug. 11, 2003 by Jerome R. Edwards, entitled "METHODS, APPARATUSES, AND SYSTEMS USEFUL IN CONDUCTING IMAGE GUIDED INTERVENTIONS," the entire contents of which are expressly incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The present invention is directed generally to computer readable media, apparatuses, systems, and methods that concern image guided medical procedures.

2. Description of Related Art

[0003] Image guided surgery (IGS), also known as image guided intervention (IGI), has become an established and proven technology field that enhances a physician's understanding of the location of his instruments within anatomy during therapy delivery. IGI has grown to include 2-dimensional (2-D) and 3-dimensional (3-D) applications. Virtual fluoroscopy as described in U.S. Pat. No. 6,470,207, *Navigational Guidance via Computer Assisted Fluoroscopic Imaging*, Simon et al., which is expressly incorporated by reference, discloses how to register the coordinate system of anatomy in a live operating theatre to that of a 2-D fluoroscopic image and then superimpose the real-time movements of instruments on that image as icons. U.S. Pat. No. 6,490,467, *Surgical Navigation Systems Including Reference and Localization Frames*, Bucholz et al., which is also expressly incorporated by reference, discloses how to register the coordinate system of anatomy in a live operating theatre to that of a 3-D magnetic resonance imaging (MRI) or computed tomography (CT) image volume and then superimpose the real-time movements of instruments on that image volume as icons. The techniques disclosed in these patents combined with other state of the art technologies have worked well in procedures involving static anatomy. Static anatomy is anatomy that does not move or has very minimal movement with respect to heart beat and respiration, such as the sinuses, long bones, brain, and individual vertebral bodies of the spine. The use of image guidance is fast approaching the standard of care in neurosurgical tumor resection, spinal implant placement, ear-nose-and-throat (ENT) surgery, and orthopedics.

[0004] However, IGI has not made significant inroads into medical procedures involving dynamic anatomy. Dynamic anatomy is anatomy that moves significantly with respect to heart beat and respiration, such as the heart, lungs, kidneys, liver, and blood vessels. IGI to date is limited mostly to use in static anatomy medical procedures primarily due to its usage of static imaging modalities such as single frame fluoroscopy, and single volume MRI and CT.

[0005] Imaging modalities do exist to capture dynamic anatomy. Modalities such as electrocardiogram (ECG)-gated MRI, ECG-gated CT and cinematography (CINE) fluoroscopy (e.g., looped CINE fluoroscopy) are readily

available in hospitals worldwide. These dynamic imaging modalities can capture anatomy over an entire periodic cycle of movement by sampling the anatomy at several instances during its characteristic movement and then creating a set of image frames or volumes. The use of dynamic imaging modalities in IGI will allow IGI to transcend the boundaries of static anatomy and administer efficacy benefits to even more medical procedures.

[0006] U.S. Pat. No. 6,473,635, *A Method of and Device for Determining the Position of A Medical Instrument*, Rasche, which is expressly incorporated by reference, proposes using the ECG waveform emanating from a live patient in the operating theatre to continuously select from a set of images that were gated to ECG data. However, Rasche's proposal will not work when the patient exhibits an irregular ECG pattern due to the medical therapies that are being applied to him. Examples of induced ECG irregularity would occur during pacemaker and implantable cardioverter defibrillator lead placement and radiofrequency ablation of myocytes to cure tachycardia.

SUMMARY OF THE INVENTION

[0007] One embodiment is a method that includes creating a dataset that includes images, at least one of those images depicting a non-tissue internal reference marker, being linked to non-tissue internal reference marker positional information, and being at least 2-dimensional.

[0008] Another embodiment is a method that includes receiving a position of an instrument reference marker coupled to an instrument; transforming the position into image space using a position of a non-tissue internal reference marker implanted in a patient; and superimposing a representation of the instrument on an image in which the non-tissue internal reference marker appears.

[0009] Other embodiments of the present methods are disclosed below.

[0010] Other embodiments include computer readable media that include machine readable instructions for carrying out the steps of any of the present methods. Still other embodiments include apparatuses, such as integrated circuits, configured to carry out the steps of any of the present methods. Other embodiments include systems that include devices configured to carry out steps of the present methods.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The following drawings demonstrate aspects of some of the present methods, apparatuses, and systems. They illustrate by way of example and not limitation. Like reference numbers refer to similar elements.

[0012] FIG. 1 shows the layout of a system that may be used to carry out image guided interventions using certain of the present methods that involve gated datasets.

[0013] FIG. 2 is a representation of one of the present gated datasets stored in memory.

[0014] FIG. 3 illustrates one example of samples of a periodic human characteristic signal (specifically, an ECG waveform) associated, or gated, with images of dynamic anatomy.

[0015] FIG. 4 is a flowchart showing an embodiment of a state through which the present software may run to perform certain embodiments of the present methods.

[0016] FIG. 5 is a flowchart showing another embodiment of a state through which the present software may run to perform certain embodiments of the present methods.

[0017] FIG. 6 shows the layout of a system that may be used to carry out image guided interventions using certain of the present methods that do not involve gated datasets.

[0018] FIG. 7 illustrates one example of the link between reference marker positional information and images of dynamic anatomy.

[0019] FIG. 8 is a flowchart showing another embodiment of a state through which the present software may run to perform certain embodiments of the present methods.

[0020] FIG. 9 is a representation of one of the present datasets stored in memory.

[0021] FIG. 10 is a flowchart showing another embodiment of a state through which the present software may run to perform certain embodiments of the present methods.

[0022] FIG. 11 illustrates an embodiment of one of the present non-tissue internal reference markers.

DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0023] The terms “comprise” (and any form of comprise, such as “comprises” and “comprising”), “have” (and any form of have, such as “has” and “having”), “contain” (and any form of contain, such as “contains” and “containing”), and “include” (and any form of include, such as “includes” and “including”) are open-ended linking verbs. Thus, a method, an apparatus, or a system that “comprises,” “has,” “contains,” or “includes” one or more items possesses at least those one or more items, but is not limited to possessing only those one or more items. For example, a method that comprises receiving a position of an instrument reference marker coupled to an instrument; transforming the position into image space using a position of a non-tissue internal reference marker implanted in a patient; and superimposing a representation of the instrument on an image in which the non-tissue internal reference marker appears possesses at least the receiving, transforming, and superimposing steps, but is not limited to possessing only those steps. Accordingly, the method also covers instances where the transforming includes transforming the position into image space using a transformation that is based, in part, on the position of the non-tissue internal reference marker implanted in the patient, and calculating the transformation using image space coordinates of the internal reference marker in the image. The term “use” should be interpreted the same way. Thus, a calculation that uses certain items uses at least those items, but also covers the use of additional items.

[0024] Individuals elements or steps of the present methods, apparatuses, and systems are to be treated in the same manner. Thus, a step that calls for creating a dataset that includes images, one of the images (a) depicting a non-tissue internal reference marker, (b) being linked to non-tissue internal reference marker positional information, and (c) being at least 2-dimensional covers the creation of at least such a dataset, but also covers the creation of a dataset that includes images, where each image (a) depicts the non tissue internal reference marker, and (b) is linked to non-tissue internal reference marker positional information.

[0025] The terms “a” and “an” are defined as one or more than one. The term “another” is defined as at least a second

or more. The term “coupled” encompasses both direct and indirect connections, and is not limited to mechanical connections.

[0026] Those of skill in the art will appreciate that in the detailed description below, certain well known components and assembly techniques have been omitted so that the present methods, apparatuses, and systems are not obscured in unnecessary detail.

[0027] Broadly, embodiments of the present methods, apparatuses, and systems enable the use of dynamic imaging modalities in 2-D and 3-D IGI. Specifically, the various embodiments of the present embodiments of the present methods, apparatuses, and systems are useful for allowing a particular image from a set of images depicting dynamic anatomy to be selected, such that the selected image is the most accurate representation of the instantaneous position and orientation of the live anatomy in the operating theatre. The locations of the present reference markers (in the form of vectors, for example) may be synchronized to each image in the set of images, and the positional information of the markers allows a transformation to be calculated between the real world coordinate space and the image space for the purpose of superimposing the live position of one or more instruments onto the selected image. Dynamic anatomy is anatomy that moves significantly with respect to heart beat and/or respiration, such as the heart, lungs, kidneys, liver, and blood vessels.

[0028] More specifically, embodiments of the present methods, apparatuses, and systems are useful for the placing and tracking one or more non-tissue internal reference markers within a gross anatomic region of interest that moves periodically with heart beat and respiration, synchronizing the location or locations of those marker locations with images that best describe the specific anatomy of interest in a particular orientation, selecting the image that best describes the anatomy of interest at any given moment in the operating or procedure room, and superimposing iconic representation of one or more instruments on the most accurate image selected after making the appropriate transformation from the tracking space of the instrument to image space. A “non-tissue internal reference marker” is a reference marker, which is sometimes referred to in the art as a “fiducial,” that is positioned inside of a patient (e.g., any living being, human or otherwise) and that is not made from the patient’s tissue or other living matter. Embodiments of the present methods, apparatuses, and systems may be used in the delivery of various medical therapies including, but not limited to, pacemaker lead placement, coronary stent placement, cardiac radio frequency ablation, lung biopsy, renal stent placement, transjugular intrahepatic porto-systemic shunting, and percutaneous radio frequency ablation of renal masses.

[0029] IGI has not made significant inroads into medical procedures involving dynamic anatomy. IGI is suited to, and has been used primarily in, static anatomy medical procedures due to its usage of static imaging modalities such as single frame fluoroscopy, and single volume MRI and CT. While Rasche (i.e., U.S. Pat. No. 6,473,635) discloses certain IGI with dynamic anatomy, his proposed method depends on the patient’s ECG data during the operation. That is, Rasche’s method involves collecting ECG data as the operation is taking place and, based on a given phase of that ECG data, displaying an image for viewing by the physician. Such an approach will not work if the patient

exhibits an irregular ECG pattern due to the medical therapies that are being applied to him. Examples of induced ECG irregularity would occur during pacemaker and implantable cardioverter defibrillator lead placement and radiofrequency ablation of myocytes to cure tachycardia. The present methods, apparatuses, and systems do not rely on ECG data that is taken as an operation takes place in order to select the appropriate pre-operative image to display for the physician.

[0030] Further, Rasche requires the use of an external reference probe in calculating “a simple co-ordinate transformation” between actual spatial and image coordinate systems. An external reference marker will never produce the transformation accuracy of an internal reference marker positioned close to the anatomy of interest—as used by the present methods, apparatuses, and systems—due to a moment arm escalation of error. 1. Use of a Gated Image Dataset

[0031] FIG. 1 shows one embodiment of a system (system 100) that includes components that can be used to perform image guided interventions using a gated imaging modality, such as ECG-gated MRI, or ECG-gated CT. The figure depicts a patient 10 positioned on an operating table 12 with a physician 14 performing a medical procedure on him.

[0032] Specifically, FIG. 1 depicts physician 14 steering a medical instrument 16 through the patient’s internal anatomy in order to deliver therapy. In this particular instance, instrument 16 is depicted as a catheter entering the right atrium by way of the inferior vena cava preceded by a femoral artery access point; however, the present systems are not limited to catheter use indications. The position of virtually any instrument may be tracked as discussed below and a representation of it superimposed on the proper image, consistent with the present methods, apparatuses, and systems. An “instrument” is any device controlled by physician 10 for the purpose of delivering therapy, and includes needles, guidewires, stents, filters, occluders, retrieval devices, and leads. Instrument 16 is fitted with one or more instrument reference markers 18. A tracker 20 (which is sometimes referred to in the art as a “tracking system”) is configured to track the type of reference marker or markers coupled to instrument 16. Tracker 20 can be any type of tracking system, including but not limited to an electromagnetic tracking system. An example of a suitable electromagnetic tracking system is the AURORA electromagnetic tracking system, commercially available from Northern Digital Inc. in Waterloo, Ontario Canada. If tracker 20 is an electromagnetic tracking system, element 20 would represent an electromagnetic field generator that emits a series of electromagnetic fields designed to engulf patient 10, and reference marker or markers 18 coupled to medical instrument 16 could be coils that would receive an induced voltage that could be monitored and translated into a coordinate position of the marker(s).

[0033] An external reference marker 22 can be placed in a location close to the region of the patient where the procedure is to be performed, yet in a stable location that will not move (or that will move a negligible amount) with the patient’s heart beat and respiration. If patient 10 is securely fixed to table 12 for the procedure, external reference marker 22 (which may be described as “static”) can be affixed to table 12. If patient 10 is not completely secured to table 12, external reference marker 22 can be placed on

region of the back of patient 10 exhibiting the least amount of movement. Tracker 20 can be configured to track external reference marker 22.

[0034] One or more non-tissue internal reference markers 24 can be placed in the gross region where the image guided navigation will be carried out. Non-tissue internal reference marker(s) 24 should be placed in an anatomic location that exhibits movement that is correlated with the movement of the anatomy intended for image guided navigation. This location will be internal to the patient, in the gross location of the anatomy of interest.

[0035] Medical instrument 16, instrument reference marker(s) 18, external reference marker 22, and non-tissue internal reference marker(s) 24 can be coupled to converter 26 of system 100. Converter 26, one example of which may be referred to in the art as a break-out box, can be configured to convert analog measurements received from the reference markers and tracker 20 into digital data understandable by image guidance computing platform 30, and relay that data to image guidance computing platform 30 to which converter 26 can be coupled. Image guidance computing platform 30 can take the form of a computer, and may include a monitor on which a representation of one or more instruments used during the IGI can be displayed over an image of the anatomy of interest.

[0036] System 100 also includes a periodic human characteristic signal monitor, such as ECG monitor 32, which can be configured to receive a periodic human characteristic signal. For example, ECG monitor 32 can be configured to receive an ECG signal in the form of the ECG data transmitted to it by ECG leads 34 coupled to patient 10. The periodic human characteristic signal monitor (e.g., ECG monitor 32) can also be configured to relay a periodic human characteristic signal (e.g., ECG data) to image guidance computing platform 30, to which it can be coupled.

[0037] Prior to the start of the image guided intervention, non-tissue internal reference marker(s) 24—but not necessarily static external reference marker 22—should be placed in the gross region of interest for the procedure. After placement of non-tissue internal reference marker(s) 24, patient 10 is to be scanned with an imaging device, such as gated scanner 40, and the resulting gated image dataset transferred to image guidance computing platform 30, to which the imaging device is coupled and which can reside in the operating or procedure theatre. Examples of suitable imaging devices, and more specifically suitable gated scanners, include ECG-gated MRI scanners and ECG-gated CT scanners. A hospital network 50 may be used to couple gated scanner 40 to image guidance computing platform 30.

[0038] The imaging device (e.g., gated scanner 40) can be configured to create a gated dataset that includes pre-operative images, one or more of which (up to all) are taken using the imaging device and are linked to a sample of a periodic human characteristic signal (e.g., a sample, or a phase, of an ECG signal). Once patient 10 is scanned using the imaging device and the gated dataset is transferred to and received by image guidance computing platform 30, patient 10 can be secured to operating table 12 and the equipment making up system 100 (e.g., tracker 20, converter 26, image guidance computing platform 30, ECG monitor 32, and gated scanner 40) set up as shown in FIG. 1. Information can then flow among the system 100 components.

[0039] At this point, a gated dataset created by gated scanner 40 resides on image guidance computing platform

30. FIG. 2 shows gated dataset 42 residing in memory 44, which can reside in image guidance computing platform 30. Gated dataset 42 is organized as a set of images (I1, I2, I3, I4 . . . In) that are correlated with periodic human characteristic signal samples (S1, S2, S3 . . . Sn). In the embodiment shown, the periodic human characteristic signal is taken to be an ECG signal, or waveform. FIG. 3 highlights the relationship between the samples (S1 . . . Sn) and the images (I1 . . . In) that were captured by gated scanner 40. Designations P, Q, R, S, and T are designations well known in the art; they designate depolarizations and re-polarizations of the heart. Gated scanner 40 essentially creates an image of the anatomy of interest at a particular instant in time during the anatomy's periodic movement. Image I1 corresponds to the image that was captured at the S1 moment of patient 10's ECG cycle. Similarly, I2 is correlated with S2, and In with Sn.

[0040] After the gated scanning has occurred and the system 100 components are coupled to each other as shown in FIG. 1, software running on image guidance computing platform 30 can begin its operation sequence. The software first enters a Calibration State as depicted in FIG. 4. The goal of the software during the Calibration State is to construct a dataset (which, in at least one embodiment, may be described as a look-up table) with dataset vectors linked to the pre-operative images collected by the gating scanner 40. In later states of operation, the look-up table will allow the software to choose the image that best describes the actual instantaneous orientation of the live anatomy. Each dataset vector is a magnitude and direction constructed by examining the location of static external reference marker 22 and non-tissue internal reference marker(s) 24. In this regard, static external reference marker 22 can act as an origin for a dataset vector that begins at origin and ends at the internal reference marker(s) 24 location. (Multiple vectors may be used if there are multiple non-tissue internal reference markers.)

[0041] FIG. 4 shows the flow of the Calibration State 60. At step 62, the software can load gated dataset 42 into memory 44 (as depicted in FIG. 4). Next, the software can loop through each gated signal sample (S1, S2 . . . Sn) while sampling the live periodic human characteristic signal coming from patient 10 by way of the periodic human characteristic signal monitor (e.g., ECG monitor 32). In the example shown in the figures, that signal is, like the first periodic human characteristic signal used in constructing the gated dataset, an ECG signal or waveform. Thus, element 64 represents each gated signal sample for which step 66—sampling of the live ECG waveform—occurs. At step 68, the software compares the sample from patient 10's live ECG waveform and compares it to the gated signal sample in question (Si). When the software gets a match (e.g., when the sample from the live ECG waveform matches gated signal sample Si), it can, at step 70, poll tracker 20 to obtain the positions of static external reference marker 22 and non-tissue internal reference marker(s) 24 in order to, at step 72, construct, or calculate, a dataset vector (Vi). A match can be ascertained using signal processing techniques that, in the case of the ECG waveform, examine historical waveform amplitudes. Once the dataset vector is constructed, at step 74, the dataset vector can be stored in the look-up table with a pointer to the image (Ii) that corresponded with the gated signal sample (Si) of gated dataset 42. That is, the dataset vector can be linked to, or associated with, that particular

image (Ii). After the software has looped through all the gated signal samples (S1 . . . Sn) of gated dataset 42, constructed a dataset vector (V1 . . . Vn) for each sample, and linked that dataset vector with the appropriate image (I1 . . . In), the software is ready to move on. At this time, the periodic human characteristic signal monitor (e.g., ECG monitor 32) may be turned off or otherwise removed from system 100—it is no longer needed. In at least one embodiment, the dataset vectors described above may comprise nothing more than the tracking space coordinates of the external reference marker 22 and non-tissue internal reference marker(s) 24; as a result, step 72 is not needed, and the linking of the dataset vectors to the various images of gated dataset 42 will comprise linking the tracking space coordinates of the relevant reference markers to those images.

[0042] The final step of Calibration State 60 is a transformation calculation step. The software will file through each dataset vector in the look-up table, as noted by element 75, and examine each mapped image. At step 76, the image space coordinates of non-tissue internal reference marker(s) 24 in each image (Ii) will be determined. For example, each image (Ii) can undergo a thresholding segmentation that will allow the software to find the image space coordinates of non-tissue internal reference marker(s) 24 in that image. Once the image space coordinates (e.g., voxel, volumetric pixel, coordinates) of non-tissue internal reference marker(s) 24 are known, the positions (e.g., the tracking space positions) of the external reference marker 22 and the non-tissue internal reference marker(s) 24 received at step 70 can be used to calculate a transformation (using a least squares method) between the tracking space and the image space. Step 78 is the calculation of such a transformation (Ti), and step 80 is the linking of the transformation (Ti) to the image (Ii) in question. As a result of that linking, the look-up table will comprise a dataset that includes pre-operative images, at least one the images (and, moreover, each image) depicting non-tissue internal reference marker(s) 24, being linked to a dataset vector and a transformation, and being at least 2-dimensional.

[0043] After completion of Calibration State 60, the software moves the system into Navigate State 90 as depicted in FIG. 5. In this state, the software can enter an infinite loop of events, as designated by element 92. The first step in the loop, step 94, image guidance computing platform 30 can poll the tracker 20 via converter 26 in order to obtain the current position of external reference marker 22 and the current position of non-tissue internal reference marker(s) 24. (It should be understood that “current” in this context is not limiting, and does not mean “instantaneous” or the like; instead, “current” is simply an adjective used to differentiate between the positions received at this step in the present methods from the positions received earlier, for example.) The software can then, at step 96, construct a current vector (here, again, “current” is non-limiting) using the current positions received at step 94. At step 98, the software can compare the current vector to the dataset vectors (V1 . . . Vn) (or will compare just the current positions to the tracking space coordinates) in search of the dataset vector closest to the current vector in question. Upon finding, at step 101, a match dataset vector—defined as the dataset vector (Vi) (or tracking space coordinates) most similar to the current vector (or current positions, or coordinates)—the software can, at step 102, load (e.g., into memory) the image (Ii) from gated dataset 42 pointed to by the matching look-up table

dataset vector (Vi). At step **104**, the software can also load (e.g., into memory) the transformation (Ti) associated with the dataset vector (Vi) and the correlated image (Ii). At step **106**, the system can poll tracker **20** to obtain, via converter **26**, the position of instrument reference marker(s) **18**. The software can, at step **108**, apply the transformation (Ti) to the position of the instrument reference marker(s) **18** to transform that position into image space. At step **110**, the software can superimpose (e.g., render, draw, etc.) a representation (e.g., an iconic representation) of instrument **16** (or instruments, as the case may be) on the selected image (Ii) to be displayed on a monitor of image guidance computing platform **30**.

[0044] The Navigation State **90** steps can be repeated continuously and their performance will provide physician **14** with a live representation of his instruments with respect to the instantaneous position and orientation of the anatomy in question as he image guides those instruments to their correct locations to deliver medical therapy.

[0045] A basic embodiment of the present methods that may be achieved using the system **100** software described above is a method that includes creating a dataset that includes images, at least one of the images: depicting a non-tissue internal reference marker, being linked to non-tissue internal reference marker positional information (such as a dataset vector), and being at least 2-D. In another embodiment, and as described above, each image in the dataset depicts a non-tissue internal reference marker (e.g., marker(s) **24**), and is linked to non-tissue internal reference marker positional information. The non-tissue internal reference marker positional information may, for example, take the form of positional coordinates or a dataset vector. The images may be 3-D CT images or 3-D MRI images. Other embodiments of the present methods include taking one or more additional steps from among those steps described above. Thus, and by way of example, another embodiment of the present methods includes loading a gated dataset into memory that includes the images, at least one of the images depicting the non-tissue internal reference marker and being linked to a sample of a periodic human characteristic signal. In still another embodiment, each image in the gated dataset depicts the non-tissue internal reference marker and is linked to a sample of the periodic human characteristic signal.

[0046] Another basic embodiment of the present methods that may be achieved using the system **100** software described above is a method that includes receiving a position of an instrument reference marker coupled to an instrument (e.g., a medical instrument); transforming the position into image space using a position of a non-tissue internal reference marker implanted in a patient; and superimposing a representation of the instrument on an image in which the non-tissue internal reference marker appears. In another embodiment, the transforming includes transforming the position into image space using a transformation that is based, in part, on the position of the non-tissue internal reference marker implanted in the patient. And in yet another embodiment, the method also includes calculating the transformation using image space coordinates of the internal reference marker in the image. Other embodiments of the present methods include taking one or more additional steps from among those steps described above.

[0047] Periodic human characteristic signals other than ECG signals may be used consistently with the steps described above. For example, respiration or hemodynamic

characteristics of patient **10** could just as easily be used as periodic human characteristic signals. If such signals are used, appropriate periodic human characteristic signal monitors should be used as well. Furthermore, any imaging modality (not just CT or MRI) that can be gated to a periodic human characteristic signal may be used consistently with the steps described above, including positron emission tomography (PET), ultrasound, and functional MRI (fMRI).

[0048] 2. Use of CINE Fluoroscopy

[0049] FIG. **6** depicts one embodiment of a system (system **200**) that includes components (many of which are the same, and are coupled in the same fashion, as those in system **100**) that can be used to perform image guided interventions using ONE 2-D fluoroscopy as an imaging modality. Gated scanner **40** and hospital network **50** in system **100** are replaced with fluoroscope **215**, which, as shown, can include fluoroscope stand **210**, fluoroscope receiver unit **212** (e.g., a fluoroscope radiation receiver unit), and fluoroscope calibration jig **214**. Fluoroscope **215** is coupled to image guidance computing platform **30**.

[0050] One advantage of using CINE fluoroscopy as an image guidance modality is that it can be captured during the procedure in the operating or procedure theatre. As a result, the physician may dispense with the gating of a periodic human characteristic signal to pre-operative images. Generally speaking, FIG. **7** captures what will happen using CINE fluoroscopy; a non-tissue internal reference marker(s) **24** will be placed as described above and tracked as each image (I1, I2 . . . In) is captured using fluoroscope **215**, and more specifically fluoroscope receiver unit **212**. The placement of such internal reference markers is shown in FIG. **7** with respect to the heart, and more specifically, with respect to various stages of the heart's function (A1, A2 . . . An). Vectors (V1, V2 . . . Vn) that are based on the positions of an external reference marker (not shown) and non-tissue internal reference marker **24** (shown) are depicted in FIG. **7** in terms of the X, Y, and Z axis information. Those vectors will be discussed in more detail below. After the image capture process is complete, the particular image most accurately depicting the anatomy at a particular instant can be ascertained by examining the position of the non-tissue internal reference marker(s), and selecting the image that was captured when the marker was last in that particular location and orientation.

[0051] To begin the image guided intervention, patient **10** will be placed upon operating table **12** and an ECG monitor **32** will likely be connected to patient **10** for diagnostic purposes unrelated to performing image guidance. Fluoroscope **215** can be positioned to allow images to be captured of patient **10** (likely in an orientation that physician **14** is most comfortable with, such as a Right Anterior Oblique (RAO) view). Physician **14** can place an external reference marker **22** as discussed above (e.g., in the procedural field on a location that does not move with respect to heartbeat and respiration). One or more non-tissue internal reference marker(s) **24** can be placed in the gross region of the anatomy intended for image guidance. Fluoroscope calibration jig **214** can be coupled to fluoroscope receiver unit **212**. All connections between fluoroscope **215**, reference markers **22** and **24**, converter **26**, and image guidance computing platform **30** can be fulfilled as depicted in FIG. **6**, and information can then flow among the system **200** components.

[0052] At this time, system **200** is ready to enter the Calibration State **250** as depicted in FIG. 8. First, physician **14** can trigger fluoroscope **215** to begin acquiring an image signal (e.g., a CINE fluoroscopy loop). As fluoroscope **215** begins to acquire the image signal, the live video feed can be sent to, and received by, image guidance computing platform **30**.

[0053] While fluoroscope **215** is acquiring the CINE loop, as noted with element **252**, the software can, at step **254** notes, sample the live video feed. Sampling consistent with step **254** can occur at a rate greater than 30 Hz so as capture enough images (e.g., image frames) such that they will, when pieced together, appear to be real time to the human eye. As computing power makes faster sampling rates for more feasible, a sampling rate greater than 60 Hz can be implemented in accordance with Nyquist's Law.

[0054] The software can create an image (e.g., an image frame) (Ii) as denoted in FIG. 7 and, at step **256**, store that image into memory. The software can also poll the tracker **20** and receive, at step **258**, positional information for (e.g., the positions of) the reference markers (e.g., static external reference marker **22** and non-tissue internal reference marker(s) **24**). The system can then, at step **260**, construct, or calculate, a dataset vector (see $V_1 \dots V_n$ in FIG. 7) defining the orientation of the reference markers during the instantaneous acquisition of this particular image (Ii). The software can, at step **262**, record the dataset vector (Vi) (or at least the positional information) and the associated image (Ii) in a dataset (e.g., dataset **300**, which can, in at least one embodiment, take the form of a look-up table) as depicted in FIG. 9. Step **262** may also be described as creating a dataset that includes at least one image that depicts a non-tissue internal reference marker, is linked to positional information about the non-tissue internal reference marker, and is at least 2-D. FIG. 9 shows dataset **300** residing in memory **44**, which can reside in image guidance computing platform **30**. After a sufficient number of images have been collected and stored, the software begin the transformation calculation process. For example, for each image (Ii), as noted by element **263**, the software can, at step **264**, poll tracker **20** for, and can receive, the position of the fluoroscope calibration jig **214**. With this positional information, the software can, at step **266**, calculate a transformation (Ti) from tracking space (e.g., the tracker field coordinate space) to image space (e.g., the fluoroscope image space) using the methods disclosed in U.S. Pat. No. 6,470,207. At step **268**, the transformation (Ti) can be stored in association with (e.g., linked to) the image (Ii) in the look-up table associated with, or keyed by, database vector (Vi). This step may also be described as associating the transformation (Ti) with image (Ii). The software can repeat this process until a complete set of images necessary to characterize the anatomy over its entire periodic cycle of movement have been captured and characterized.

[0055] After completion of Calibration State **250**, the software moves the system into Navigate State **350**. In this state, the software can enter an infinite loop of events, as designated by element **352**. In the first step in the loop, step **354**, image guidance computing platform **30** polls the tracker **20** via converter **26** in order to obtain the current position of external reference marker **22** and the current position of non-tissue internal reference marker(s) **24**. (It should be understood that "current" in this context is not limiting, and does not mean "instantaneous" or the like;

instead, "current" is simply an adjective used to differentiate between the positions received at this step in the present methods from the positions received earlier, for example.) The software can then, at step **356**, construct a current vector (here, again, "current" is non-limiting) using the current positions received at step **354**. At step **358**, the software can compare the current vector to the dataset vectors ($V_1 \dots V_n$) (or will compare just the current positions to the tracking space coordinates) in search of the dataset vector closest to the current vector in question. Upon finding, at step **360**, a match dataset vector—defined as the dataset vector (Vi) (or tracking space coordinates) most similar to the current vector (or current positions, or coordinates)—the software can, at step **362**, load (e.g., into memory) the image (Ii) from dataset **300** pointed to by the matching look-up table dataset vector (Vi). At step **364**, the software can also load (e.g., into memory) the transformation (Ti) associated with the dataset vector (Vi) and the correlated image (Ii). At step **366**, the system can poll tracker **20** to obtain, via converter **26**, the position of instrument reference marker(s) **18**. The software can, at step **368**, apply the transformation (Ti) to the position of the instrument reference marker(s) **18** to transform that position into image space. At step **370**, the software can superimpose (e.g., render, draw, etc.) a representation (e.g., an iconic representation) of instrument **16** (or instruments, as the case may be) on the selected image (Ii) to be displayed on a monitor of image guidance computing platform **30**.

[0056] The Navigation State **350** steps can be repeated continuously and their performance will provide physician **14** with a live representation of his instruments with respect to the instantaneous position and orientation of the anatomy in question as he image guides those instruments to their correct locations to deliver medical therapy.

[0057] A basic embodiment of the present methods that may be achieved using the system **200** software described above is a method that includes creating a dataset that includes images, at least one of the images: depicting a non-tissue internal reference marker, being linked to non-tissue internal reference marker positional information (such as a vector), and being at least 2-D. In another embodiment, and as described above, each image in the dataset depicts a non-tissue internal reference marker (e.g., marker(s) **24**), and is linked to non-tissue internal reference marker positional information. The non-tissue internal reference marker positional information may, for example, take the form of positional coordinates or a dataset vector. The images may be 2-D fluoroscopy images (e.g., CINE fluoroscopy images). Other embodiments of the present methods include taking one or more additional steps from among those steps described above. Thus, and by way of example, another embodiment of the present methods includes calculating a dataset vector using a position of an external reference marker and a position of a non-tissue internal reference marker.

[0058] Another basic embodiment of the present methods that may be achieved using the system **200** software described above is a method that includes receiving a position of an instrument reference marker coupled to an instrument (e.g., a medical instrument); transforming the position into image space using a position of a non-tissue internal reference marker implanted in a patient; and superimposing a representation of the instrument on an image in which the non-tissue internal reference marker appears. In another embodiment, the transforming includes transform-

ing the position into image space using a transformation that is based, in part, on the position of the non-tissue internal reference marker implanted in the patient. And in yet another embodiment, the method also includes calculating the transformation using image space coordinates of the internal reference marker in the image. Other embodiments of the present methods include taking one or more additional steps from among those steps described above.

[0059] 3. Non-Tissue Internal Reference Marker

[0060] An example of a non-tissue internal reference marker suitable for use as non-tissue internal reference marker **24** for use with system **100** is shown in FIG. **11**. In the case where the imaging modality used for the purposes of image guided intervention is MRI, the non-tissue internal reference marker(s) **24** placed into the patient can be non-ferrous to meet safety requirements of the imaging device (e.g., gated scanner **40**). FIG. **11** depicts such an apparatus. Apparatus **400** includes a non-ferrous body (i.e., a body that is not made of any iron) **410** that defines a chamber **412**. Body **410** can be made of a material that makes it opaque to the imaging modality such that it shows up as a blank (white) spot on the image. Such materials include platinum and titanium. A non-ferrous tissue fixation member **414** is coupled (e.g., through attachment) to body **410** at an end of body **410** to allow apparatus **400** to be implanted in the gross region of interest for a procedure. Member **414**, as shown, can have a pig-tail shape. As a result, member **414** can be unscrewed to release the apparatus after completion of the procedure. Such pig-tail designs are common among temporary pacing leads in the field of cardiac electrophysiology. The embodiment of apparatus **400** shown in FIG. **11** also includes a segment **416** (such as a sheath, or a portion of a sheath) coupled to body **410**. Segment **416** includes a passageway **418** that is in communication with chamber **412**. The segment can be plastic. Any portion of segment **418** that extends outside of a patient is not considered to be a part of any of the present non-tissue internal reference markers.

[0061] When apparatus **400**—as a non-tissue internal reference marker—is implanted prior to imaging, chamber **412** can remain empty. The patient into which the apparatus is implanted can be scanned with apparatus **400** implanted and segment **418** in place, which can extend outside of the patient (e.g., outside of the patient's skin). Upon successful completion of the scan, one or more ferrous tracking sensors **420** that are configured for placement in chamber **412** and their ferrous connecting leads **422** (e.g., wires) can be introduced into chamber **412** via segment **416** and locked into place. This apparatus, therefore, alleviates the need for the tracking sensors to be non-ferrous.

[0062] As will be understood by those having skill in the art and the benefit of this disclosure, the steps disclosed above, and the techniques for carrying them out, may be implemented in any number of various media or devices. While described above in terms of software, it should be understood that the referenced software may take the form of machine (e.g., computer) readable instructions on computer readable media. The computer-readable, or machine-readable media, may take many forms, including any data storage device that can store data that can afterwards be read by a computer or a computer system, including a disk, such as a floppy disk, a zip disk, or the like; a server, read-only memory; random access memory; CD-ROMs; a memory card; magnetic tape; optical data storage devices, SMART-

MEDIA® cards; flash memory; compact flash memory; and the like. The computer readable medium can also be distributed over network-coupled computer systems so that the computer readable instructions are stored and executed in a distributed fashion. For example, the computer readable medium may take the form of a carrier wave such as, for example, signals on a wire (e.g., signals downloaded from the Internet) or those that are transmitted electromagnetically or through infra red means. Furthermore, when the machine readable instructions in question have been loaded onto a given machine, that machine can be described as configured to take whatever actions are defined by the instructions.

[0063] In another embodiment, any of the present methods may be embodied in an integrated circuit, such as application specific integrated circuit (ASIC), or in a field programmable gate array (FPGA). In another embodiment, any of the present methods may be embodied by a combination of hardware and software; for instance, certain instructions may be executed by a chip running appropriate firmware. In another embodiment, any of the present methods may be embodied by a kit, such as a software developer's kit. Such a kit may include not only software, but also any corresponding hardware to execute the software. For instance, a kit may include a computer board along with drivers and software to be run by that board. Those having skill in the art will recognize that the present methods may be implemented by other means known in the art to achieve an identical or similar result. All such means are considered to be within the scope of the present methods and systems that include devices configured to carry out the present methods.

[0064] The claims are not to be interpreted as including means-plus- or step-plus-function limitations, unless such a limitation is explicitly recited in a given claim using the phrase(s) “means for” or “step for,” respectively.

1-40. (canceled)

41. A method comprising:

receiving, from an imaging device, an image signal that includes a plurality of images, each image depicting a non-tissue internal reference marker;

calculating a transformation from tracking space to image space for each image based on a position of the non-tissue internal reference marker and linking the transformation for each image to the corresponding image, and calculating a dataset vector using a position of the non-tissue internal reference marker and a position of an external reference marker;

receiving, from a tracker, a current position of the non-tissue internal reference marker;

selecting one of the plurality of images based on the current position of the non-tissue internal reference marker;

linking the dataset vector with the one of the plurality of images;

receiving, from the tracker, a current position of an instrument reference marker coupled to an instrument; applying the transformation linked to the selected image to the current position of the instrument reference marker;

linking the transformation from tracking space to image space with the selected image; and

superimposing a representation of the instrument on the selected image.

- 42.** The method of claim **41**, further comprising:
loading a gated dataset into memory, the gated data set including the plurality of images, one of the images being linked to a sample of a first periodic human characteristic signal.
- 43.** The method of claim **42**, further comprising:
receiving a second periodic human characteristic signal;
and
comparing a sample of the second periodic human characteristic signal to the sample of the first periodic human characteristic signal.
- 44.** The method of claim **43**, where the first and second periodic human characteristic signals are electrocardiogram (ECG) signals.
- 45.** The method of claim **43**, further comprising:
recognizing a sample of the second periodic human characteristic signal that matches the sample of the first periodic human characteristic signal; and
receiving (a) the position of the external reference marker and (b) the position of the non-tissue internal reference marker.
- 46.** The method of claim **41**, wherein the plurality of images are taken using fluoroscopy.
- 47.** The method of claim **41**, wherein the plurality of images are taken using computed tomography (CT).
- 48.** The method of claim **41**, wherein the plurality of images are taken using magnetic resonance imaging (MRI).
- 49.** The method of claim **41** further comprising:
providing a non-transitory computer readable medium comprising machine readable instructions for carrying out the steps of claim **1**.

* * * * *

专利名称(译)	进行图像引导干预的有用方法，设备和系统		
公开(公告)号	US20200187878A1	公开(公告)日	2020-06-18
申请号	US16/653158	申请日	2019-10-15
[标]申请(专利权)人(译)	VERAN医疗TECH		
申请(专利权)人(译)	佛兰医疗技术有限公司		
当前申请(专利权)人(译)	佛兰医疗技术有限公司		
[标]发明人	EDWARDS JEROME R		
发明人	EDWARDS, JEROME R.		
IPC分类号	A61B6/12 A61B6/00 A61B5/00 A61B90/00 A61B34/20 A61B5/055 A61B19/00		
CPC分类号	A61B2090/3954 A61B5/055 A61B2576/00 A61B2034/2072 A61B34/20 A61B6/12 A61B90/36 A61B34/10 A61B2017/00694 A61B6/541 A61B5/7289 A61B2034/2051 A61B2090/3958		
优先权	60/494268 2003-08-11 US		
外部链接	Espacenet USPTO		

摘要(译)

与对动态组织的图像引导的干预有关的方法，装置和系统。一个实施例是一种方法，其包括创建包括图像的数据集，所述图像之一描绘了非组织内部参考标记，被链接到非组织内部参考标记的位置信息，并且至少是二维的。另一个实施例是一种方法，该方法包括：接收与仪器耦合的仪器参考标记的位置；以及使用植入患者体内的非组织内部参考标记将位置转换为图像空间；将仪器的表示叠加在出现非组织内部参考标记的图像上。计算机可读介质，其包括用于执行所公开的方法的步骤的机器可读指令。诸如集成电路之类的设备被配置为执行所公开的方法的步骤。系统包括被配置为执行所公开的方法的步骤的设备。

