




US 20180078216A1

(19) **United States**(12) **Patent Application Publication**
Baker et al.(10) **Pub. No.: US 2018/0078216 A1**(43) **Pub. Date: Mar. 22, 2018**(54) **NON-INVASIVE DETERMINATION OF
DISEASE STATES****Publication Classification**(51) **Int. Cl.***A61B 5/00* (2006.01)*A61B 5/0205* (2006.01)*A61B 3/11* (2006.01)*A61B 3/14* (2006.01)*A61B 3/00* (2006.01)(52) **U.S. Cl.**CPC *A61B 5/7278* (2013.01); *A61B 5/0205*(2013.01); *A61B 3/112* (2013.01); *A61B**5/02416* (2013.01); *A61B 3/0025* (2013.01);*A61B 5/7282* (2013.01); *A61B 5/0077*(2013.01); *A61B 3/14* (2013.01)(71) Applicant: **Welch Allyn, Inc.**, Skaneateles Falls,
NY (US)(72) Inventors: **Steven D. Baker**, Beaverton, OR (US);
Chau Chong Ye, Singapore (MY); **Yue**
Wang, Singapore (MY); **Aye Aung**,
Singapore (MY)(21) Appl. No.: **15/705,986**(22) Filed: **Sep. 15, 2017****Related U.S. Application Data**(60) Provisional application No. 62/395,427, filed on Sep.
16, 2016, provisional application No. 62/440,967,
filed on Dec. 30, 2016.

(57)

ABSTRACT

An example method for estimating a disease state for a patient can include: capturing physiological data including images from the patient over time; processing the physiological data to detect a variability; comparing the variability to a baseline or a range; and estimating the disease state for the patient based upon the comparing of the variability to the baseline or the limit.

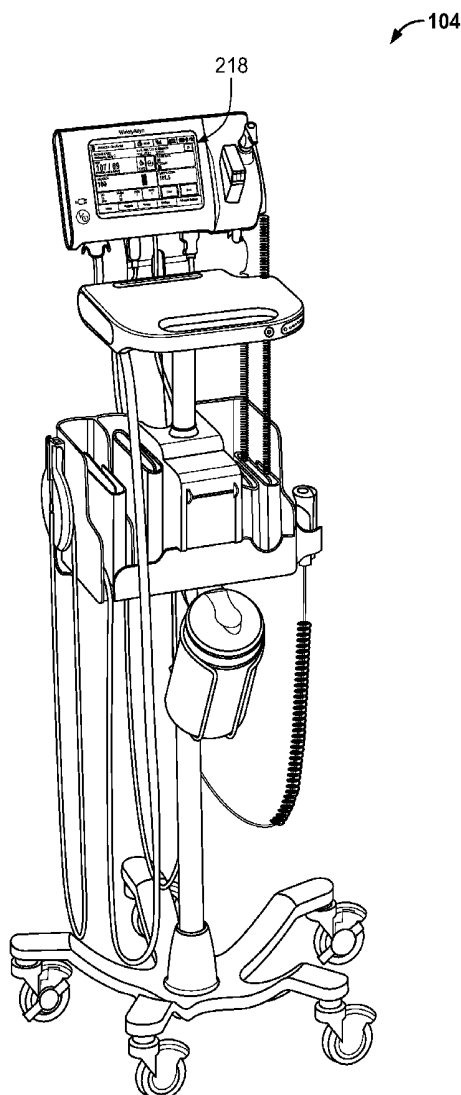

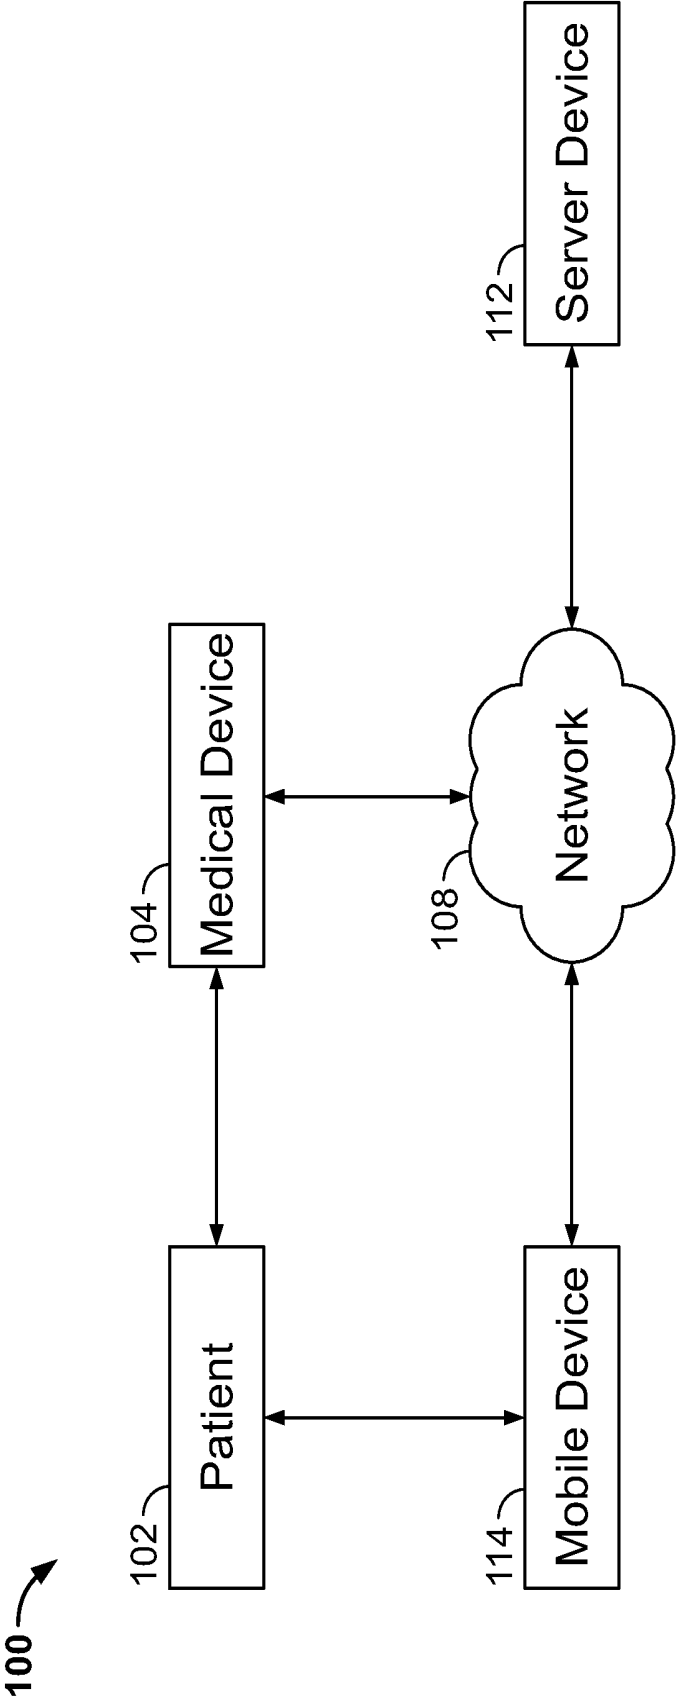


FIG. 1

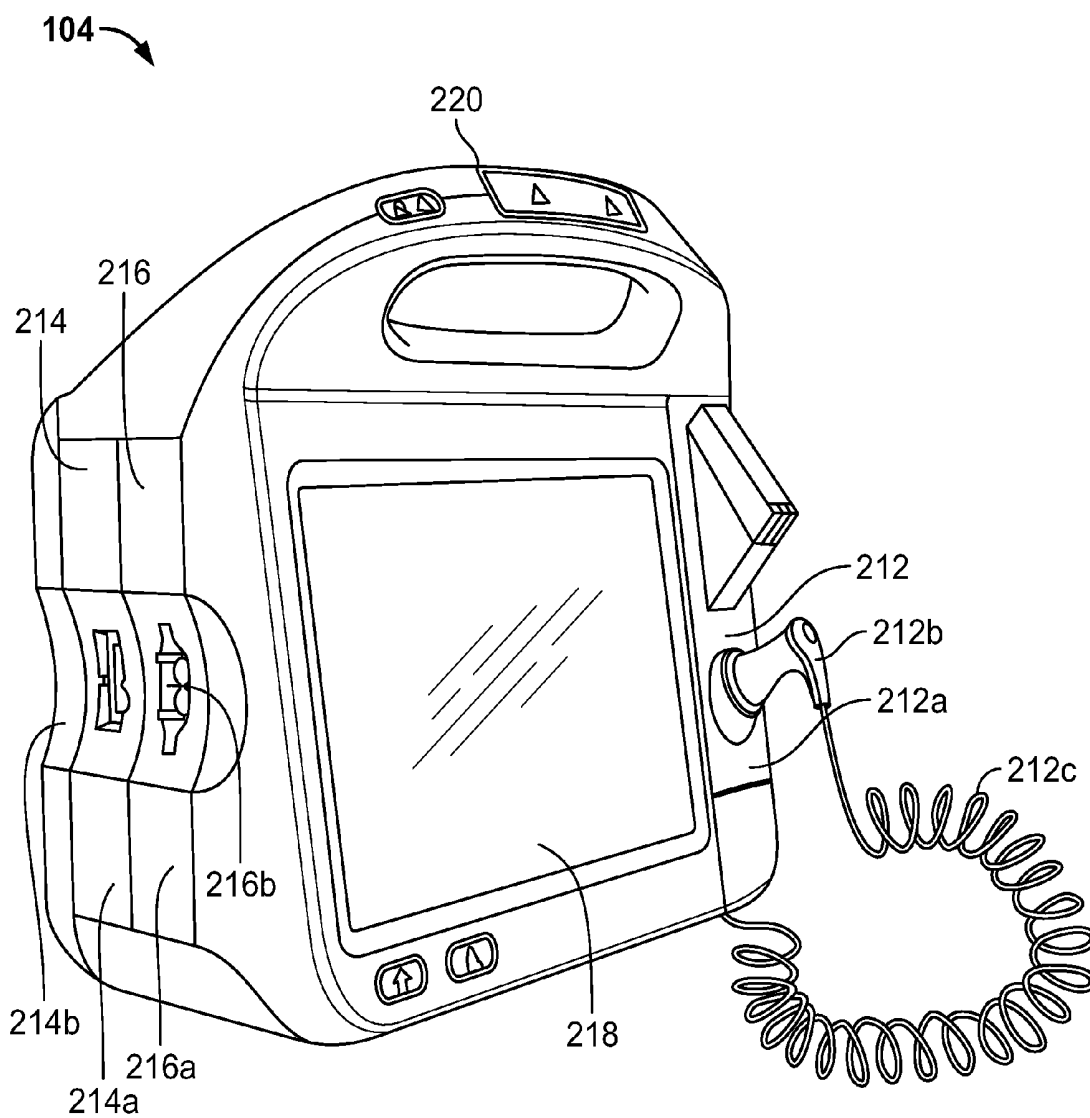


FIG. 2

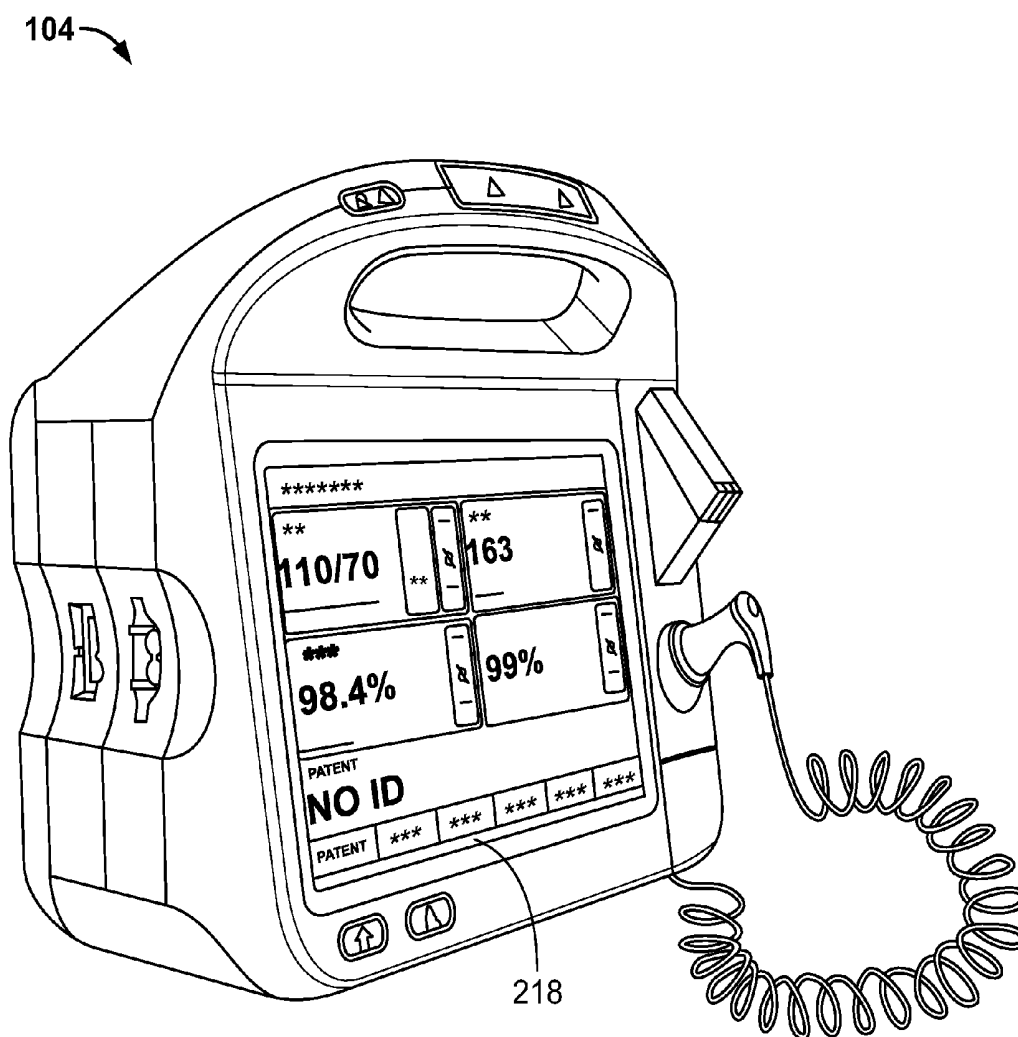


FIG. 3

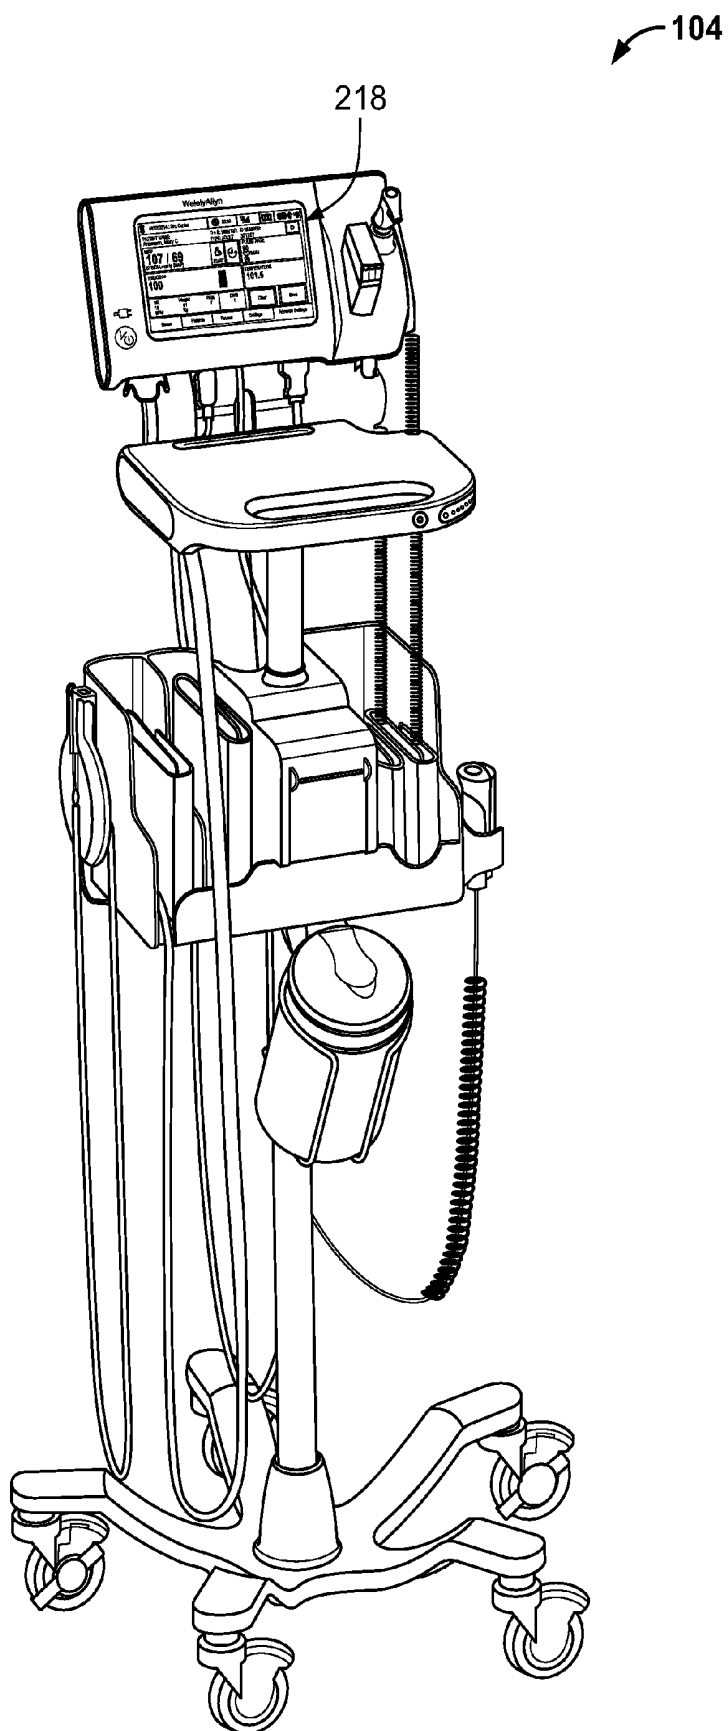


FIG. 4

104

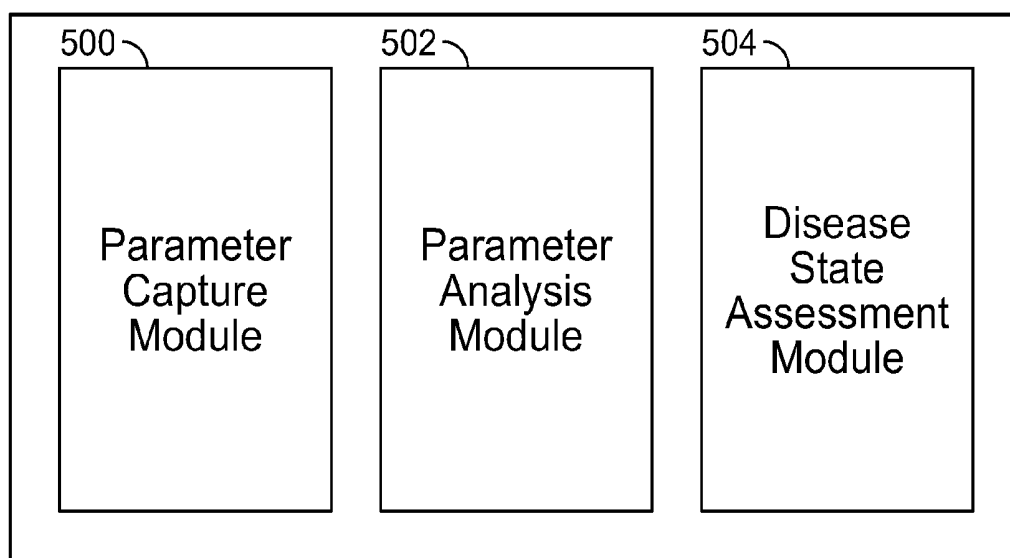


FIG. 5

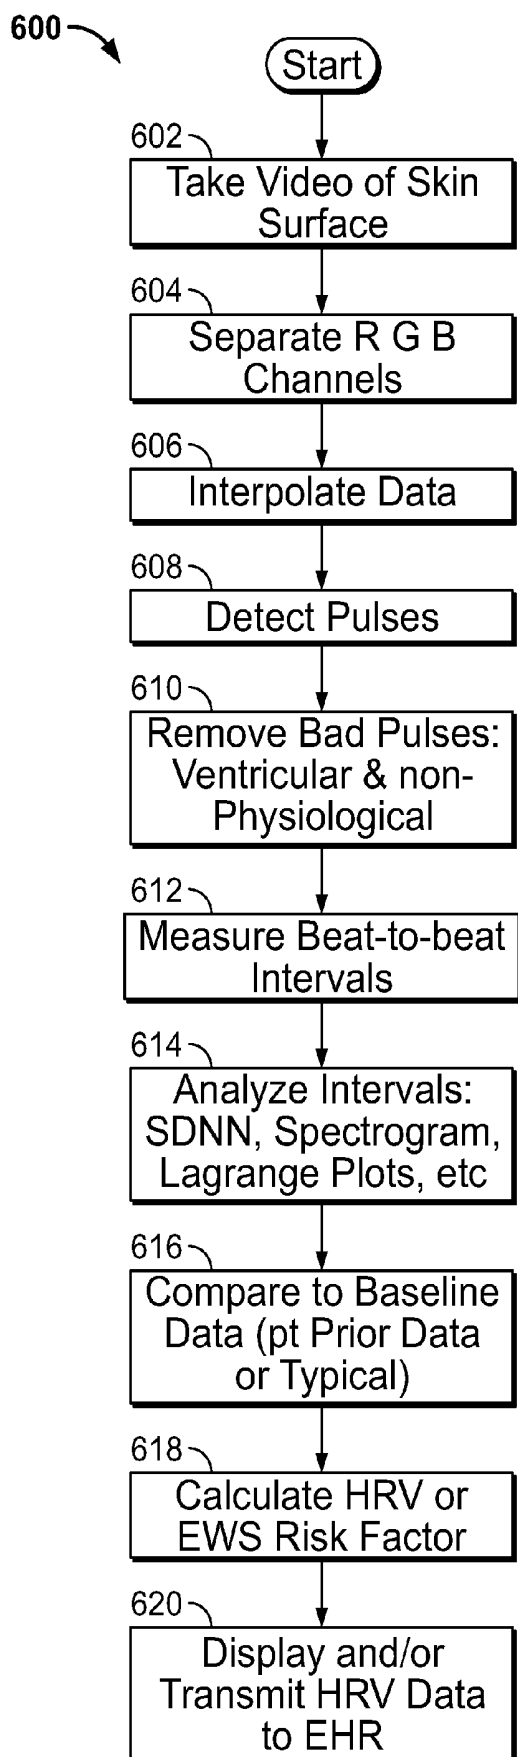


FIG. 6

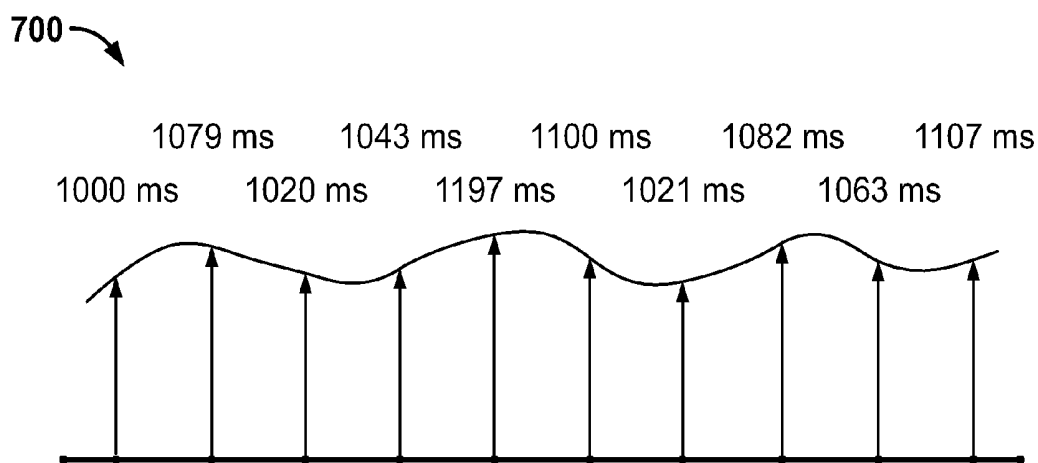


FIG. 7

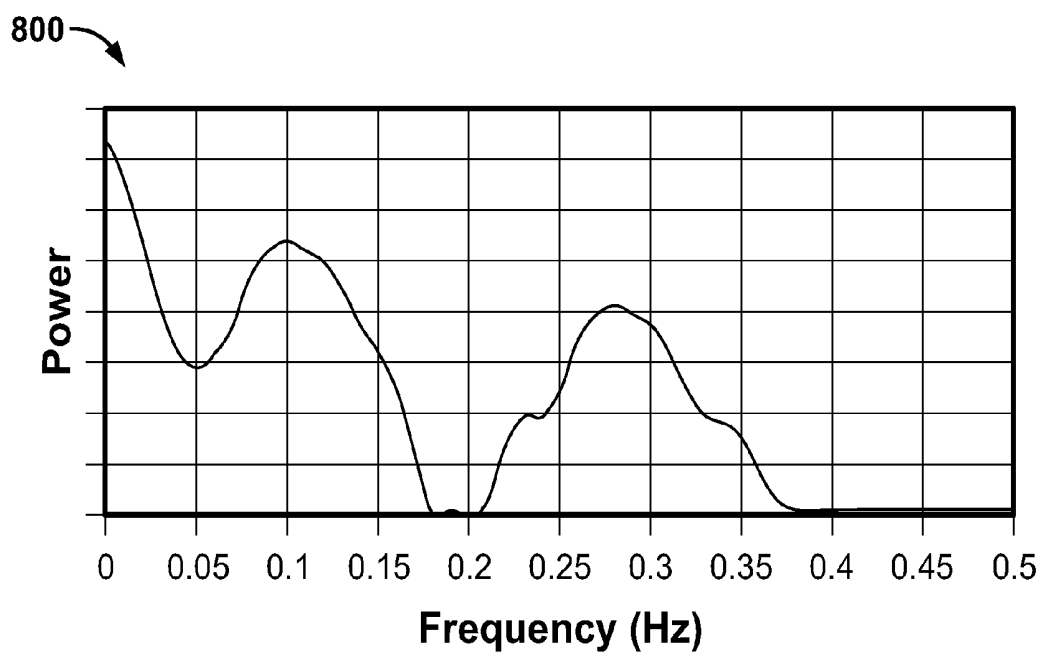


FIG. 8

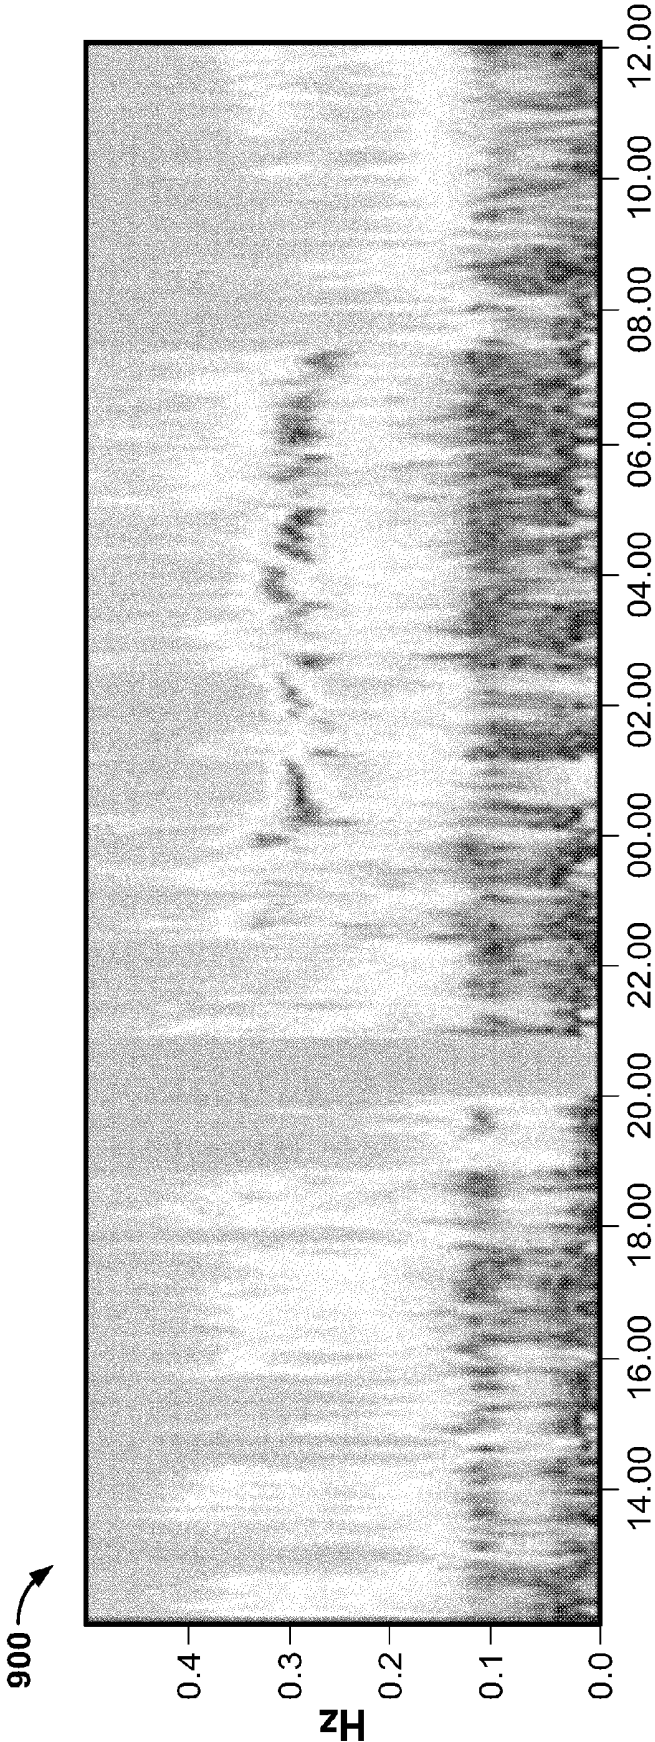


FIG. 9

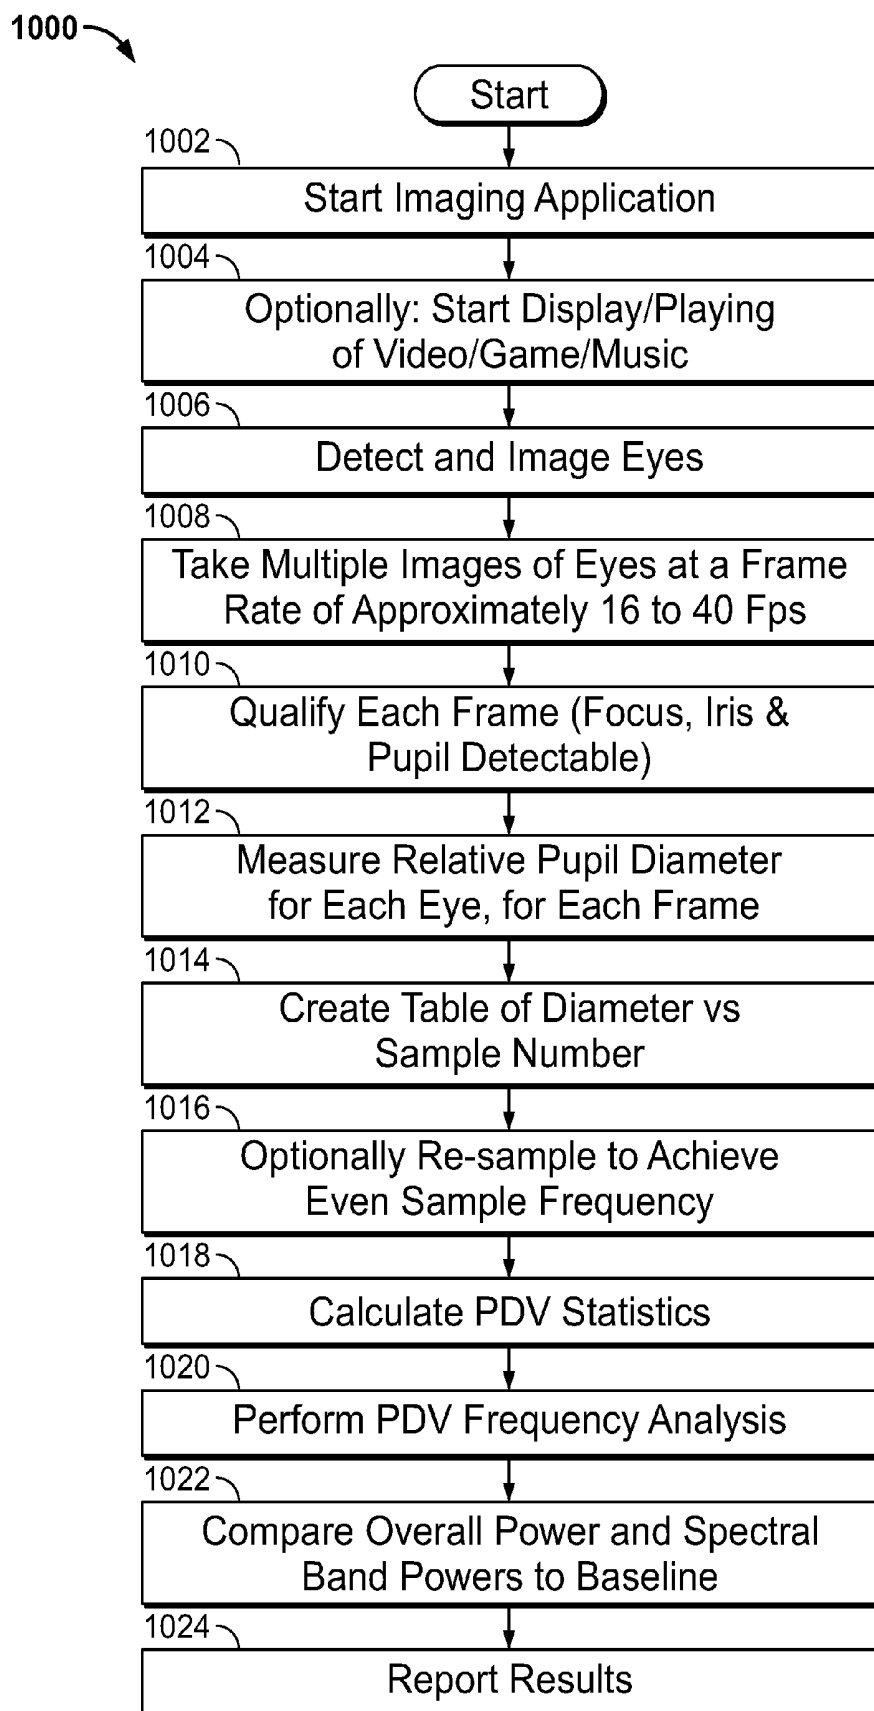
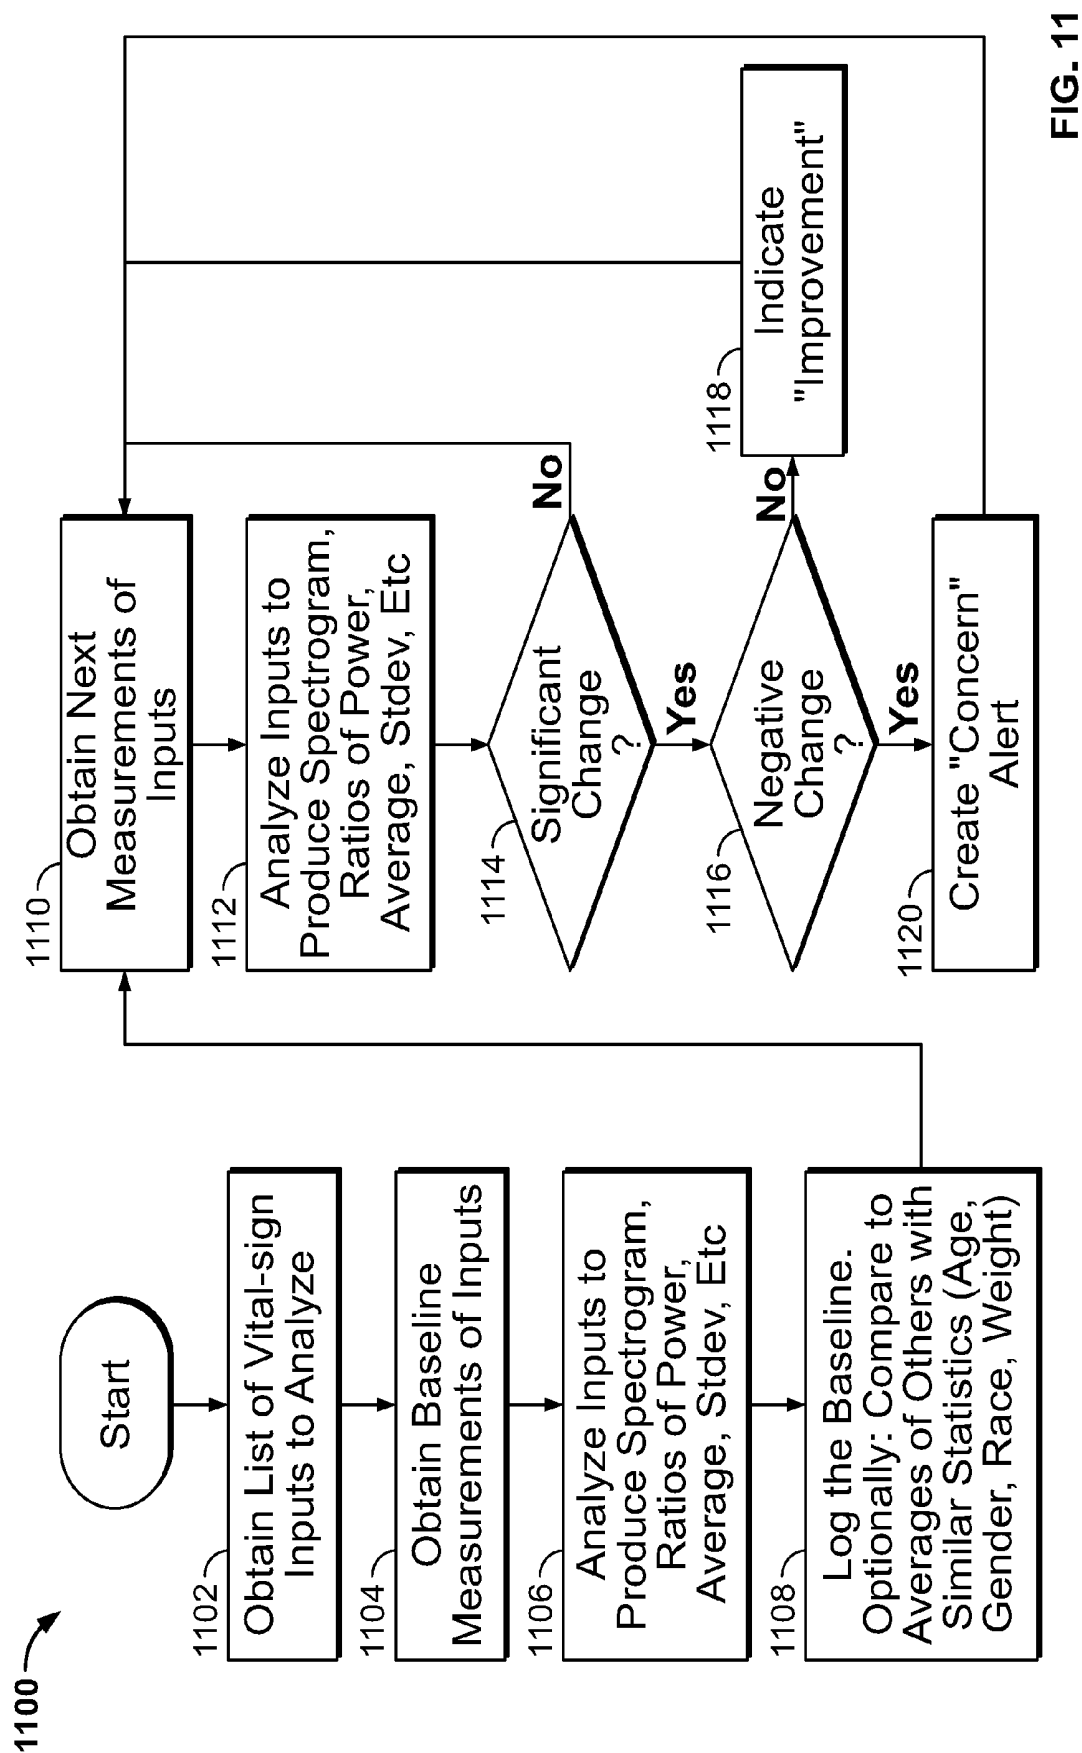


FIG. 10



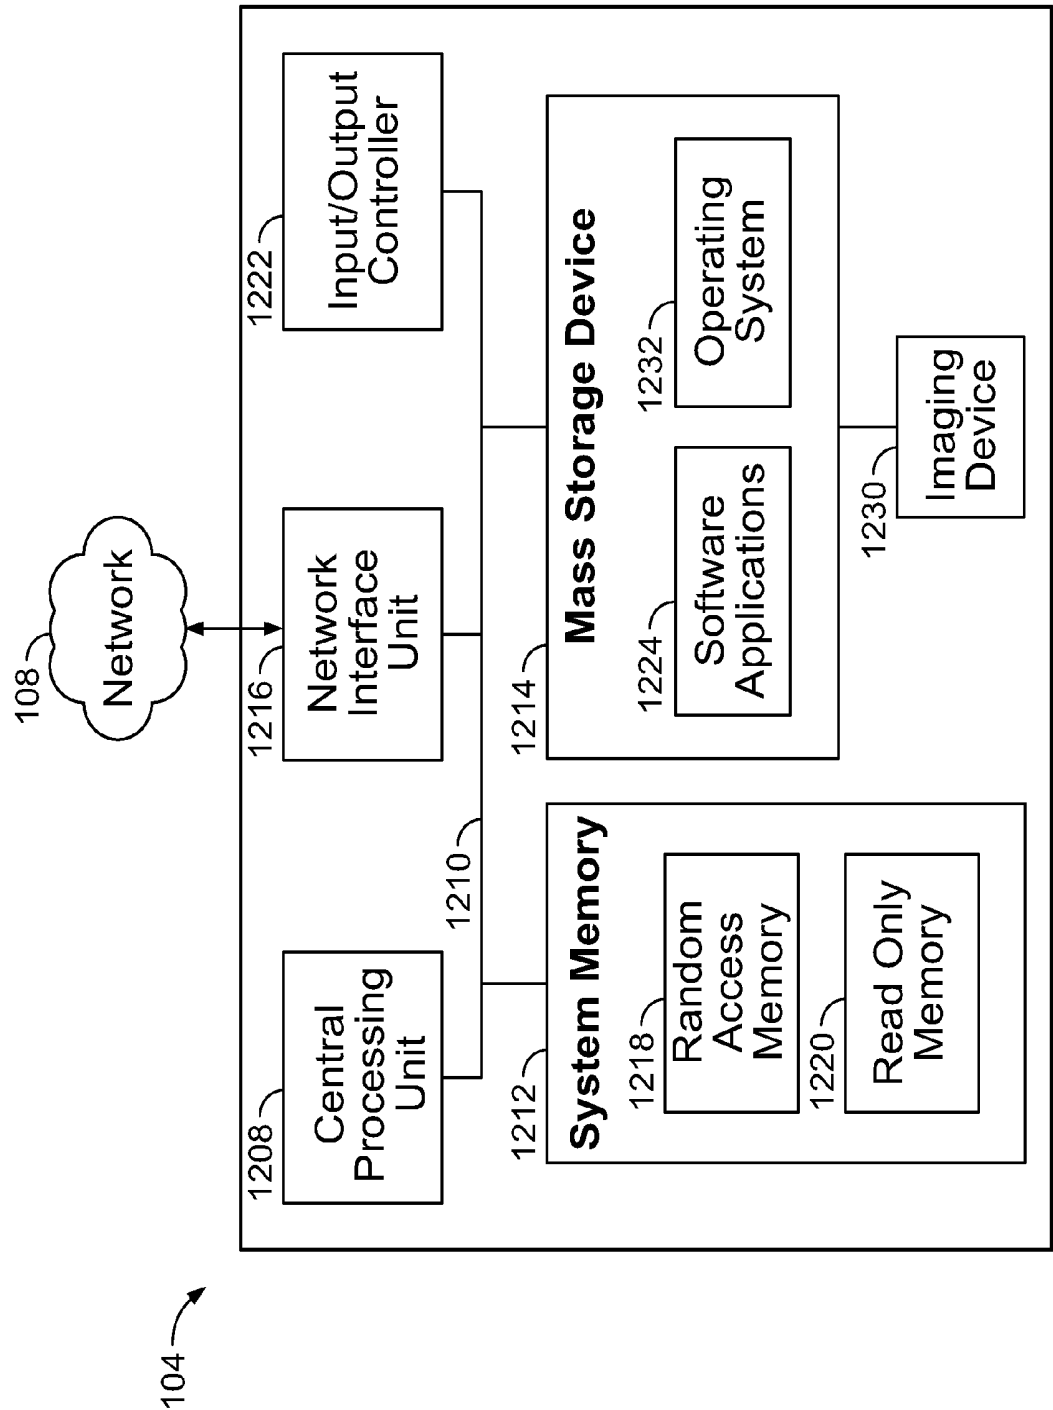


FIG. 12

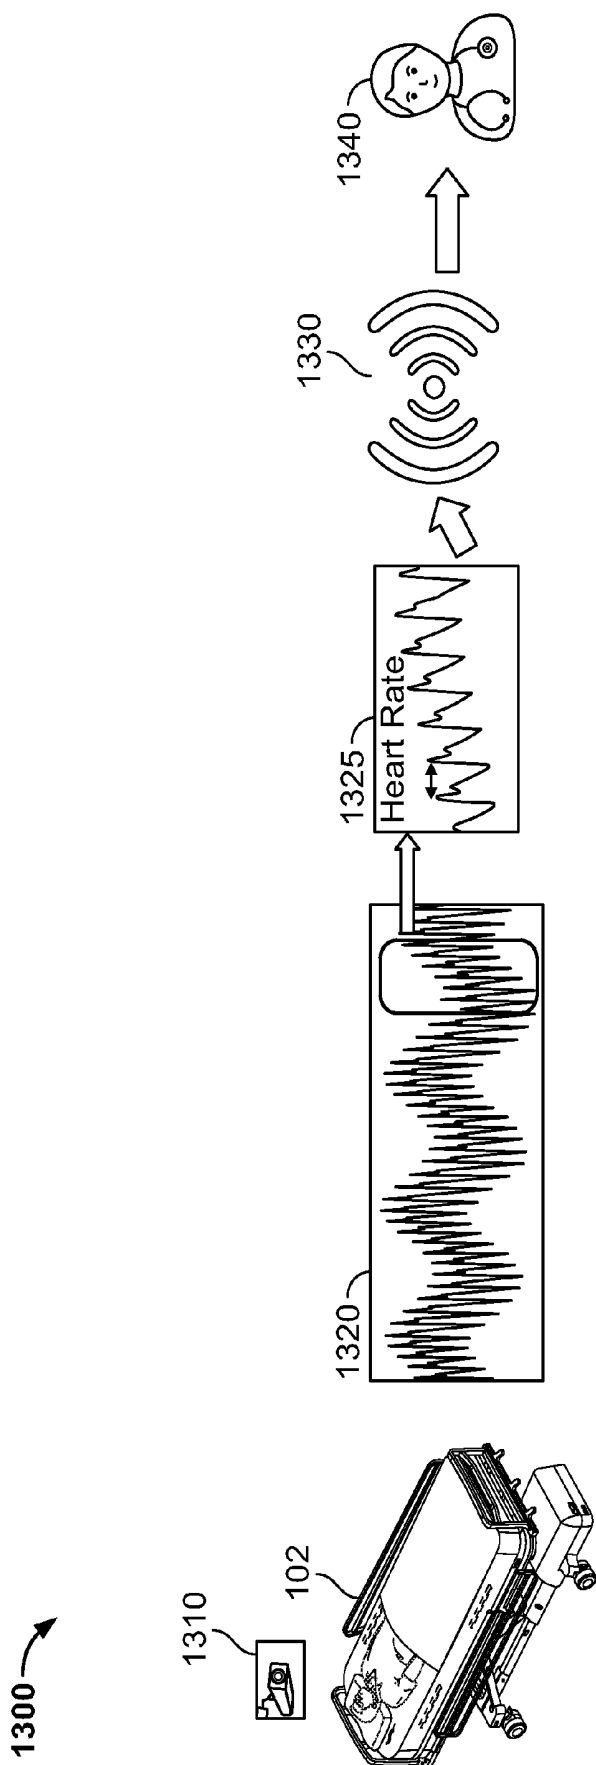


FIG. 13

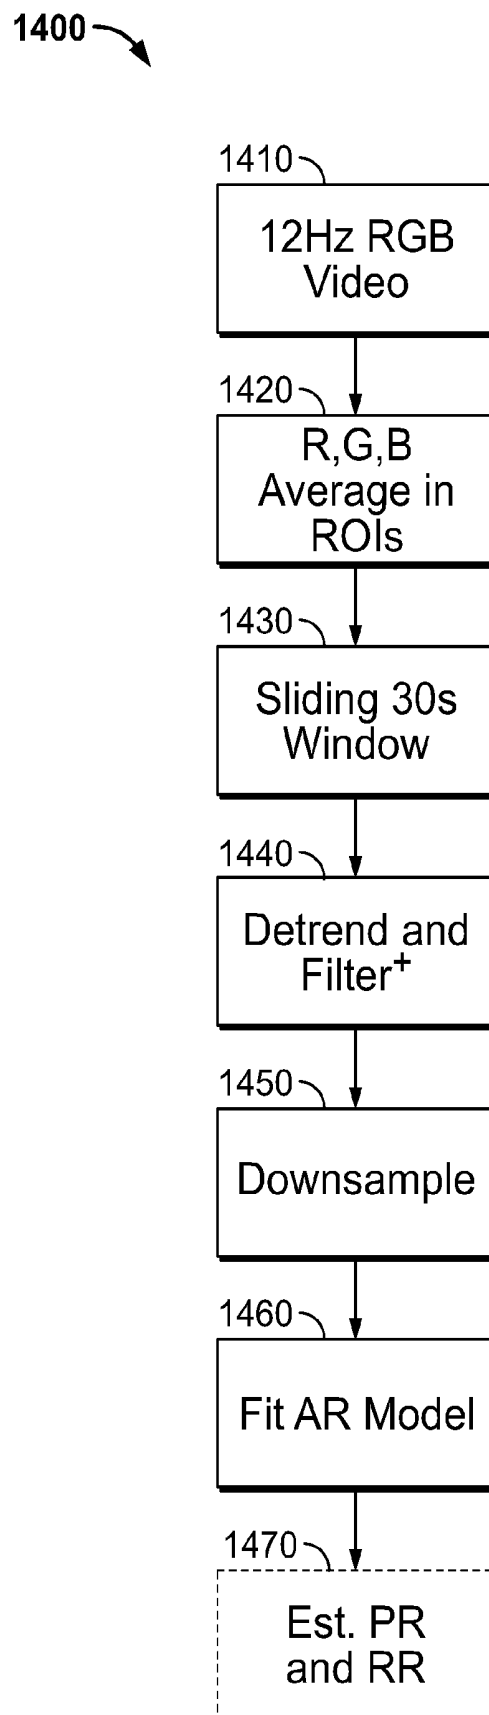


FIG. 14

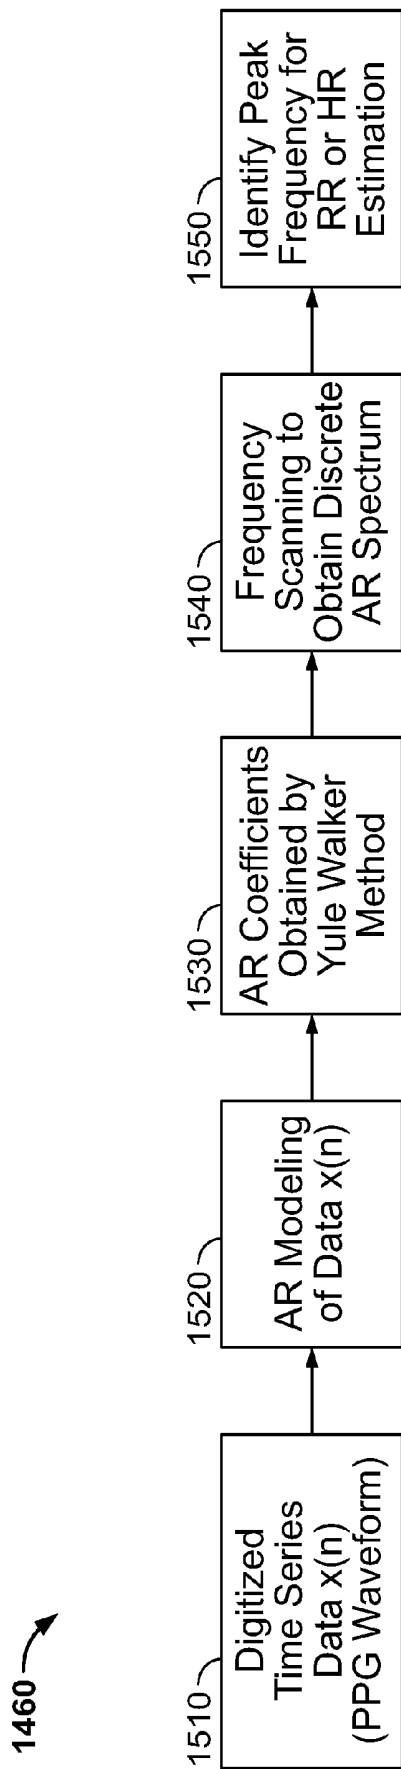


FIG. 15

NON-INVASIVE DETERMINATION OF DISEASE STATES

BACKGROUND

[0001] Various procedures can be used to assess the health state of a patient. These procedures typically involve invasive tactics (e.g., gathering of blood, biopsies, etc.) or, at a minimum, potentially unpleasant processes (e.g., assessment of cardiac performance over time using an ECG machine with multiple leads connected to the patient) in order to determine disease states. Patients sometimes avoid seeking medical treatment because of these unpleasant experiences.

SUMMARY

[0002] In one aspect, an example method for estimating a disease state for a patient can include: capturing physiological data including images from the patient over time; processing the physiological data to detect a variability; comparing the variability to a baseline or a range; and estimating the disease state for the patient based upon the comparing of the variability to the baseline or the limit.

DESCRIPTION OF THE FIGURES

[0003] FIG. 1 shows an example system for estimating a disease state of a patient using non-invasive procedures.

[0004] FIG. 2 shows an example medical device of the system of FIG. 1.

[0005] FIG. 3 shows another view of the medical device of FIG. 2.

[0006] FIG. 4 shows another example medical device of the system of FIG. 1.

[0007] FIG. 5 shows example logical components of the medical device of the system of FIG. 1.

[0008] FIG. 6 shows an example method for estimating a disease state of a patient using pulse rate variability.

[0009] FIG. 7 shows an example graph of pulse rate variability data captured using the method illustrated in FIG. 6.

[0010] FIG. 8 shows an example power/frequency plot of the pulse rate variability data captured using the method illustrated in FIG. 6.

[0011] FIG. 9 shows an example spectrogram plot of the pulse rate variability data captured using the method illustrated in FIG. 6.

[0012] FIG. 10 shows an example method for estimating a disease state of a patient using pupil diameter variability.

[0013] FIG. 11 shows an example method for estimating a disease state of a patient using physiological data captured over time.

[0014] FIG. 12 shows example components of a device of the system of FIG. 1.

[0015] FIG. 13 shows another example system for estimating vital signs from facial images.

[0016] FIG. 14 shows an example method for estimating pulse rate and/or respiratory rate from video using the system of FIG. 13.

[0017] FIG. 15 shows additional example details on the application of an autoregressive model from the method of FIG. 14.

DETAILED DESCRIPTION

[0018] The present disclosure relates to medical devices that are used to collect physiological data from patients. In

the examples described herein, the medical devices use non-invasive methods for assessing various disease states for a patient.

[0019] FIG. 1 is a block diagram illustrating an example system **100** for assessing the disease state of a patient **102** using non-invasive procedures. Disease includes any condition that causes pain, dysfunction, distress, social problems, or death to the afflicted. This may also include injuries, disabilities, disorders, syndromes, infections, isolated symptoms, deviant behaviors and atypical variations of structure and function.

[0020] An example medical device **104** and/or mobile device **114** are used to assess the patient **102** using the non-invasive procedures. The results of the procedures can be analyzed by the medical device **104**/mobile device **114** and/or communicated through a network **108** to a server device **112** for analysis and/or storage.

[0021] The analysis can result in the assessment of a disease state for the patient **102**, including a probability of having or contracting a particular disease. Although only a single patient, medical/mobile device, and server device are shown, the number of each can be increased or decreased as needed to scale the system **100**. For example, multiple medical or mobile devices can be used to process multiple patients, and the data from the procedures can be analyzed by a server farm or cloud-based system to provide the disease state assessments.

[0022] The medical device **104** can be positioned in a facility, such as a hospital or clinic, at which the patient **102** is located. In another example, the medical device **104** can be located at a facility that is remote geographically from the position of the patient **102** and/or caregiver.

[0023] As noted, the medical device **104** communicates with the network **108**. In one example, the medical device **104** and the network **108** are part of a CONNEX™ system from Welch Allyn of Skaneateles Falls, N.Y., although other systems can be used. In such an example, the medical devices communicate through known protocols, such as the Welch Allyn Communications Protocol (WACP). WACP uses a taxonomy as a mechanism to define information and messaging. Taxonomy can be defined as description, identification, and classification of a semantic model. Taxonomy as applied to a classification scheme may be extensible. Semantic class-based modeling utilizing taxonomy can minimize the complexity of data description management by limiting, categorizing, and logically grouping information management and operational functions into families that contain both static and dynamic elements.

[0024] The network **108** is an electronic communication network that facilitates communication between the medical device **104**, the mobile device **114**, and the server device **112**. An electronic communication network is a set of computing devices and links between the computing devices. The computing devices in the network use the links to enable communication among the computing devices in the network. The network **108** can include routers, switches, mobile access points, bridges, hubs, intrusion detection devices, storage devices, standalone server devices, blade server devices, sensors, desktop computers, firewall devices, laptop computers, handheld computers, mobile telephones, medical devices, and other types of computing devices.

[0025] In various embodiments, the network **108** includes various types of links. For example, the network **108** can include wired and/or wireless links. Furthermore, in various

embodiments, the network **108** is implemented at various scales. For example, the network **108** can be implemented as one or more local area networks (LANs), metropolitan area networks, subnets, wide area networks (such as the Internet), or can be implemented at another scale, such as a wide area network (WAN), body area network (BAN) and may include Internet of Things (IoT)/Internet of Healthcare (IoH) devices.

[0026] In this example, the medical device **104** and the network **108** are all part of the same network. In other words, the medical device **104** and the network **108** communicate with one another over a LAN behind a firewall safeguarding the devices from outside influences on the Internet, such as a firewall. The mobile device **114** may or may not be configured to communicate within the network **108**. Alternatively, the medical device **104** may communicate via the mobile device **114**, for example using a WAN connection available on a cellular phone to reach the network **108**. In some instances, the medical device **104** may be instantiated as part of the mobile device **114**.

[0027] As noted, the medical device **104** can provide various types of functionality, including measuring or monitoring patient physiological parameters. The medical device **104** can include one or more physiological monitor devices configured to measure and possibly display representations of one or more physiological parameters of a patient. In addition, the medical device **104** can include one or more desktop, laptop, or wall-mounted devices. In some embodiments, the medical device **104** is configured to be used by a clinician to monitor the physiological parameters of multiple patients at one time. Such monitor devices are typically not wall mounted.

[0028] In this example, the server device **112** is located “in the cloud.” In other words, the server device **112** is located outside of the internal network associated with the medical device **104**, **104**, **105**. Typically, the server device **112** does not communicate directly with the medical device **104**, but instead communicates with a central server located within the same network as the medical device **104**, such as the CONNEX™ system from Welch Allyn of Skaneateles Falls, N.Y. Intermediary servers in the CONNEX™ system, in turn, communicate with the medical device **104**. Other configurations are possible.

[0029] The medical device **104** and the server device **112** are computing systems. As used herein, a computing system is a system of one or more computing devices. A computing device is a physical, tangible device that processes data. Example types of computing devices include personal computers, standalone server computers, blade server computers, mainframe computers, handheld computers, smart phones, special purpose computing devices, and other types of devices that process data.

[0030] The mobile device **114** can be any computing device, such as a smartphone, smart watch, tablet, convertible, laptop, etc. that can be used to interact with and capture data from the patient **102**. In one example, the mobile device **114** is a smartphone of the patient **102**. Similar to that noted above, the mobile device **114** can communicate with the network **108** to provide data captured from the patient **102** to the server device **112**.

[0031] The mobile device **114** can be programmed to execute one or more applications, such as an application downloaded from the server device **112** and installed on the mobile device **114**. These one or more applications can be

used to capture data from the patient **102**, such as pulse rate, activity level, and/or images of the patient’s skin or pupils. The applications can also be programmed to analyze that data, report the data to the server device **112**, and/or alert the patient **102** to various indicators, such as possible oncoming disease states. Other configurations are possible. In addition to full-color images, images may be monochromatic and associated with any wavelength, such as images derived from waves received in the range from 3-m to 300 nm. Images may cover any amount of the patient and surrounding area. Unobstructed view is defined to be unobstructed at the wavelength of interest. For example, an instrument operation at 26 GHz would have an unobstructed view through bedding to image chest movement, even though at optical frequencies, the view is obstructed. View to inner ear, retina, etc., may be achieved through optics familiar to those skilled in the art.

[0032] FIG. 2 illustrates one example of the medical device **104**. The medical device **104** is portable. The medical device **104** includes multiple health care equipment (HCE) modules. Each of the HCE modules is configured to measure one or more physiological parameters of a health-care recipient, also referred to herein as a patient. Other embodiments can include more or fewer components than those shown in FIG. 2, or can include different components that accomplish the same or similar functions.

[0033] A temperature measurement module **212** is accessible from the front side of the medical device **104**. A SpO2 module **214** and a non-invasive blood pressure (NIBP) module **216** are accessible from a left hand side of the medical device **104**. An upper handle portion **220** enables the medical device **104** to be carried by hand.

[0034] A front side of the medical device **104** includes a display screen **218** and an outer surface of the temperature measurement module **212**. The temperature measurement module **212** is designed to measure the body temperature of a patient. As used in this document, a “module” is a combination of a physical module structure which typically resides within the medical device **104** and optional peripheral components (not shown) that typically attach to and reside outside of the medical device **104**.

[0035] The temperature measurement module **212** includes a front panel **212a**. The front panel **212a** has an outer surface that is accessible from the front side of the medical device **104**. The front panel **212a** provides access to a wall (not shown) storing a removable probe (not shown), also referred to as a temperature probe, that is attached to a probe handle **212b**. The probe and its attached probe handle **212b** are tethered to the temperature measurement module **212** via an insulated conductor **212c**. The probe is designed to make physical contact with a patient in order to sense a body temperature of the patient.

[0036] A left hand side of the medical device **104** includes an outer surface of the SpO2 module **214** and an outer surface of the NIBP module **216**. The SpO2 module **214** is a HCE module designed to measure oxygen content within the blood of a patient. The NIBP module **216** is a HCE module designed to measure blood pressure of a patient.

[0037] As shown, the SpO2 module **214** includes a front panel **214a**. The front panel **214a** includes an outer surface that is accessible from the left side of the medical device **104**. The front panel **214a** includes a connector **214b** that enables a connection between one or more peripheral SpO2 components (not shown) and a portion of the SpO2 module

214 residing inside the medical device **104**. The peripheral SpO2 components reside external to the medical device **104**. The peripheral SpO2 components are configured to interoperate with the SpO2 module **214** when connected to the SpO2 module **214** via the connector **214b**. In some embodiments, the peripheral SpO2 components include a clip that attaches to an appendage of a patient, such as a finger. The clip is designed to detect and measure a pulse and an oxygen content of blood flowing within the patient.

[0038] As shown, the NIBP module **216** includes a front panel **216a** having an outer surface that is accessible from the left side of the medical device **104**. The front panel **216a** includes a connector **216b** that enables a connection between one or more peripheral NIBP components (not shown) and a portion of the NIBP module **216** residing inside the medical device **104**. The peripheral NIBP components reside external to the medical device **104**. The peripheral NIBP components are configured to interoperate with the NIBP module **216** when connected to the NIBP module **216** via the connector **216b**. In some embodiments, the peripheral NIBP components include an inflatable cuff that attaches to an appendage of a patient, such as an upper arm of the patient. The inflatable cuff is designed to measure the systolic and diastolic blood pressure of the patient, the mean arterial pressure (MAP) of the patient, and the pulse rate of blood flowing within the patient.

[0039] The medical device **104** is able to operate within one or more workflows (or profiles). A workflow is a series of one or more tasks that a user of the medical device **104** performs. When the medical device **104** operates within a workflow, the medical device **104** provides functionality suitable for assisting the user in performing the workflow. When the medical device **104** operates within different workflows, the medical device **104** provides different functionality.

[0040] When the medical device **104** is manufactured, the medical device **104** is configured to be able to operate within one or more workflows. After the medical device **104** is manufactured, the medical device **104** can be reconfigured to operate within one or more additional workflows. In this way, a user can adapt the medical device **104** for use in different workflows as needed.

[0041] In various embodiments, the medical device **104** operates within various workflows. For example, in some embodiments, the medical device **104** can operate within a monitoring workflow or a non-monitoring workflow. Example types of non-monitoring workflows include, but are not limited to, a spot check workflow, an office workflow, and a triage workflow. A non-limiting example of a monitoring workflow is an intervals workflow.

[0042] FIG. 3 illustrates an example user interface displayed on the display screen **218** of FIG. 2. The medical device **104** outputs and displays user interfaces discussed in this document on the display screen **218**.

[0043] In some examples described herein, the physiological monitor device is a portable device. In other examples, the physiological monitor device is a non-portable device, such as a computing device like a workstation. Many configurations are possible.

[0044] The medical device **104** shown in FIGS. 2-3 is only one example of a medical device. All different types of medical devices used to collect patient data can be used.

[0045] For example, another embodiment of the medical device **104** is shown in FIG. 4 on a mobile cart. In some

examples, the medical device **104** can be a more compact device that includes a touch screen (e.g., 7 inches) and the ability to execute multiple workflows.

[0046] The medical device **104** can be a portable device. In other examples, the medical device **104** can be a stationary device, such as computing devices like workstations. All different types of medical devices used to collect patient data can be used. Many configurations are possible.

[0047] Referring now to FIG. 5, example logical components of the medical device **104** are shown. The medical device **104** is programmed to include a parameter capture module **500**, a parameter analysis module **502**, and a disease state assessment module **504**. The medical device **104** can be programmed to execute one or more of these modules **500**, **502**, **504** to perform a non-invasive assessment of a disease state of the patient **102**, as described further herein. The parameter analysis module **502** and the disease state assessment module **504** may be physically located on a different, external device, e.g., a cloud-based server. In another embodiment, some functions of the parameter analysis module **502** and the disease state assessment module **504** may be present on the medical device **104** and other functions on a remote device. For example, the modules on the medical device **104** might be designed for low processing load, high sensitivity and low selectivity. When the output of these detects a possible disease state, the data are forwarded to the external device for additional analysis that is more selective.

[0048] In this example, the medical device **104** includes a parameter capture module **500**. In further examples described below, the parameter capture module **500** is programmed to capture one or more parameters associated with the patient **102**. In these examples, the parameter capture module **500** captures these parameters in a non-invasive manner.

[0049] For example, the parameter capture module **500** can be programmed to capture pulse rate and/or pupil dilation data over time using an imaging device. The first step in analysis is typically creation of a table or plot showing how the pulse rate or pupil diameter changes over time. Details on how this can be accomplished are provided below.

[0050] Once the one or more parameters are captured by the parameter capture module **500**, the parameter analysis module **502** analyzes the captured data. This analysis can take various forms. For example, the data can be filtered, extrapolated, and compared to baseline data to determine whether changes have occurred.

[0051] Once the analysis of the captured data is complete, the disease state assessment module **504** is programmed to estimate a disease state for the patient **102**. For example, the disease state assessment module **504** can analyze the comparison of pulse rate variability data to a prior data set and/or to typical data. Typical data may be focused based on patient health factors, and can include: patient's diagnosis, medical history, prescriptions, substance abuse, allergies, genetic data, fluids, and ethnographic background such as age, gender, race and other data that provide a detailed, in-depth description of the patient's everyday life and practice. Typical data depends on the analysis type. For example, for the standard deviation of NN intervals (SDNN), the result is a single number and comparison may be as simple as a Boolean expression. In contrast, a spectrogram is a picture where comparison requires image analysis. The comparison may be a scale where a number or range of numbers is

compared to baseline values. For example, a deceleration capacity of less than 2.5 milliseconds indicates a patient with a poor prognosis for cardiac recovery and a deceleration capacity greater than 5 milliseconds indicates a patient with an excellent prognosis. A sliding scale might be used where 2.5-3.75 milliseconds indicates a fair prognosis and 3.75-5 milliseconds indicates a good prognosis. Medical history and ethnography may be entered as parameters into the assessment module 504 or retrieved from an external device, such as cloud server device 112. Medical device 104 and Mobile Device 114 are anticipated to have read/write access to the patient's medical record. Disease state may be assessed in the cloud.

[0052] Through annotation of the data with patient outcomes such as morbidity, mortality, length of stay, transfers and other parameters that provide measures of recovery, the data may be used to analyze algorithm performance and provide a way to test new algorithms while minimizing a need for clinical trials. Annotation may be achieved through review of medical records, clinician entry, EMR access or the like.

[0053] Referring now to FIG. 6, in one example embodiment, the medical device 104 is configured to estimate a patient's pulse rate variability using non-invasive procedures. In this example, the medical device 104 estimates the pulse rate variability using imaging and an estimated time of the blood volume pulse.

[0054] Pulse rate is typically measured in beats per minute. The average duration of time between heart beats is the inverse of the pulse rate. For example, the average duration of time between beats is one second for a pulse rate of sixty beats per minute (i.e., 60 seconds/60 beats). In reality, however, the duration of time between beats is not uniform.

[0055] Instead, pulse rate changes continuously in response to the body's ever-changing need for circulation. Pulse rate variability refers to the variation in duration between beats of a person's heart. Within an age group, higher levels of pulse rate variability are typically associated with better health, perhaps indicating that the ability of the autonomic nervous system to respond to internal and external stimuli.

[0056] In this embodiment, the medical device 104 is configured (using for example, a camera or other imaging device) to detect pulse rate variability by imaging the skin of the patient 102. In this example, the medical device 104 images the skin at a high frame rate (e.g., 100-200 fps) and uses the captured video/images to detect the patient's heart beat and calculate pulse rate variability. Using a photodetector such as a photodiode illuminated by an LED, for example a 530 nm green LED, allows sampling of the green component of the skin color at sample rates of at least 1 kHz using an SFH 7050 optical sensor from OSRAM Opto Semiconductors of Sunnyvale, Calif. and an AFE4044 integrated analog front end from Texas Instruments of Dallas, Tex.

[0057] This information can then be presented to the caregiver in various forms, such as trends, spectrograms, LaGrange plots, histograms, SDNN, root mean square of successive differences (RMSSD), low frequency/high frequency (LF/HF) ratio, pulse rate variability triangular index, triangular interpolation of NN interval (TINN), differential index, logarithmic index, standard deviation of the averages of NN intervals (SDANN), SDNN index, standard deviation of successive differences (SDSD), number of pairs of suc-

cessive NNs that differ by more than 50 ms (NN50) count, proportion of NN50 divided by total number of NNs (pNN50), total power, very low frequency (VLF power), LF power, HF power, LF/HF ratio, α , etc. Analogous measures may be used for other measures of the parasympathetic nervous system, such as pupil diameter variability. In addition, the estimated pulse rate variability can be further informed using other physiological data from the patient 102, such as oxygen saturation from an SPO2 sensor, from RADAR, from pressure sensors using ballistocardiography, from blood pressure measurements, video analysis and measurement of minute movements in the body due to pulsatile blood flow, video analysis of skin color changes due to pulsatile blood flow, to or any other means by which heart beats or heart beat pulses are detected.

[0058] Specifically, the imaging capability of the medical device 104 includes a camera that captures images that can be separated into the Red, Green, Blue (RGB) channels. By separating out the three color components, it is possible to detect the pulse due to each heartbeat. Other color spaces such as HSV may be used. The interval between pulses is measured and then various algorithms are used to analyze the energy content and statistical distribution of beat intervals. Pulse rate variability indices may be stored locally and/or transmitted to an electronic health record. In either case, pulse rate indices may be used as an input to an early warning score, as described further below.

[0059] Early warning scores are used to provide more timely assessments and predictions to changes in patient acuity. SAPSII, APACHE, MEWS, PEWS, MEDS, REMS, ASSIST, and SCS are some of the many scoring systems that have been adopted in emergency department (ED), medical/surgical, general care, and ICU environments.

[0060] The National Early Warning Score (NEWS) is based on a simple scoring system in which a score is allocated to physiological parameters that are already recorded for patients in general care settings. Six physiological parameters form the basis of the scoring system:

- [0061]** Respiratory rate
- [0062]** Oxygen saturation
- [0063]** Temperature
- [0064]** Systolic blood pressure
- [0065]** Pulse rate
- [0066]** Level of consciousness (AVPU)

[0067] BTF is another Early Warning Score program focused on early recognition of patient deterioration. This program builds on operational processes that are in place and is not intended to take clinical assessment away from the nurses. Nursing staff is expected to be able to have access to clinical data and to aggregate and analyze it to form a clinical assessment. To help with this effort, the program established standards outlining what observations should be recorded and what thresholds should trigger a response. Instead of a numbering system, the protocol focuses on human factors and the use of color.

[0068] These parameters form the basis of the scoring system:

- [0069]** Respiratory rate
- [0070]** Oxygen saturation
- [0071]** Temperature
- [0072]** Systolic blood pressure
- [0073]** Pulse rate

[0074] In example embodiments, the medical device 104, mobile device 114, and/or server device 112 are pro-

grammed to calculate early warning scores using one or more of the protocols described above. When doing so, the pulse rate variability information can be used to inform and/or modify the early warning score. For example, if the pulse rate variability information indicates a deterioration in the health of the patient 102, the score can be modified as appropriate to indicate this information. Alternately, the early warning score may be based purely on pulse rate variability or on pulse rate variability and a different combination of inputs than existing early warning scoring systems.

[0075] The devices 104, 114 also are programmed to communicate those scores, both visually to the caregiver, as well as possibly to a central server, such as server device 112 to be stored in an electronic medical records (EMR) system. Further, the devices 104, 114 are programmed to provide configurable alert messages based upon the calculated early warning scores. Medical device 104 and mobile device 114 are anticipated to have read/write access to the patient's medical record.

[0076] Pulse rate variability indices may be used in conjunction with information other than early warning scores. For example, pre-term neonatal patients are susceptible to sepsis. Knowing this, the pulse rate variability for the patient 102 is compared against a baseline for a healthy individual with similar demographics (e.g., neonatal) and, if a significant variance is detected, a warning is provided to the caregiver via the local display of the medical device 104, via the electronic health record system, or a clinical alarm system.

[0077] An example method 600 for estimating the pulse rate variability of the patient 102 is shown in FIG. 6. In this example, an image (e.g., video imaging data) is captured of the skin of the patient 102 at operation 602. Next, at operation 604, the imaging data is extracted into the respective RGB channels. Some devices, such as those with HDMI outputs and analog RGB outputs provide RGB as separate channels. In the former case, software written to decode the communication protocol can separate out the various color streams. In the latter case, hardware such as the AD9983A from analog devices may be used to convert analog RGB into digital streams. Color space convertors may be used to convert image processing techniques from one color space to another, such as from a color space convertor may be used to convert between different color spaces such as, YCbCr, HSV, CMYK, sRGB, Adobe RGB and the like. The system might make a pulse rate analysis using multiple color spaces or might determine which color space provide the optimum results and analyze in that optimum color space.

[0078] At operation 606, interpolation is used on the extracted data to determine the peaks of each pulse. The heart beat pulses are detected at operation 608. This can be accomplished by multiple means, e.g., such as using a matched filter that aligns with each pulse to determine a best fit, familiar to those skilled in the art.

[0079] At operation 610, the data is smoothed to remove undesired aberrations, such as bad pulses caused by ventricular and non-physiological phenomenon. In one example, pulses have a variability greater than 10 percent are excluded as being aberrant. Pulses determined as pre-ventricular contractions (PVCs) may be separated for a separate analysis.

[0080] Next, at operation 612, the beat-to-beat intervals are measured, and these intervals are analyzed at operation

614 using various techniques like SDNN (i.e., the standard deviation of NN interval, calculated for a given period of time), spectrograms (as shown in FIG. 8 and FIG. 9, for example), LaGrange plots, etc. At operation 616, the result is compared to a baseline (either prior data from the patient 102 and/or data for similarly situated individuals). At operation 618, the information is used to calculate an early warning score. Finally, at operation 620, the results are presented to the patient 102 and caregiver and/or saved in the electronic health record.

[0081] In yet another example, other schemes are used to detect pulse rate other than visual procedures. For example, microwave and/or ultra-wideband radio technologies can be used to detect pulse rate and thereupon variability. For example, a radar device can be incorporated into the medical device 104. The radar can be used to scan the chest proximal to the heart of the patient 102 and in-phase with the heart beat to optimize detection of the atrial contraction and the ventricular contraction. That is, the beam scans for and detects the location to maximize the atrial response and it scans for and detects the location to maximize the ventricular response.

[0082] Then, the system scans the radar beam toward the atria when an atrial contraction is expected and follows it down to the ventricles when a ventricular contraction is expected. The radar beam interacts with the patient and some of the radiated electromagnetic signal is backscattered. This backscattered signal is received by an antenna and the sensor then demodulates data from the transmitted radar signal and tags the data so that it can be correctly associated with the patient 102. This data can thereupon be used to calculate pulse rates and thereupon pulse rate variability. A radar may measure distance by subtracting the pulse reception time from the pulse transmission time, e.g., $\text{distance}_i = c / (\text{Rx_time}_i - \text{Tx_time}_i)$, where Rx_time_i is the time the system received the i^{th} pulse, Tx_time_i is the time the system transmitted the i^{th} pulse, and c is the speed of light. A radar may transmit and receive a series of pulses and measure changes in distance, e.g. $\text{distance_change} = \text{distance}_{i+1} - \text{distance}_i$. A radar may also compare the phase of the transmitted signal to the phase of the returned signal.

[0083] The phase difference, σ , between the transmitted and received signals is directly proportional to the distance, d , between the radar to the chest. $\sigma = 2\pi d / \lambda$, where λ is the wavelength of the radar transmission. As the heart beats, the chest cavity presents a small deflection, on the order of 0.1 mm, and this deflection can be detected as a change in the phase difference between the transmitted and received signal. As examples, continuous wave (CW) radar, pulsed radar, chirped radar, pulsed-CW, pulsed-chirped radar may all be used to detect the heartbeat. Detection of motion of the body, as a result of contraction of gross muscles, may be done as a noise-detection-and-elimination step of detecting heart beats. For example, when a patient sits forward, there is a large position change in the chest cavity compared to the sub-millimeter motion from a heartbeat. Detection of motion of the body may be used as a factor for estimating the likelihood that a patient will contract pressure ulcers. Analysis of backscatter at optical wavelengths may also be used to detect heart beat pulses, for example, by examination of video, one can detect minute head movements that are due

to pulsatile blood flow and also by examination of video, one can detect color changes in the skin due to pulsatile blood flow.

[0084] One may apply multiple measures of pulsatile inputs to improve the system sensitivity and specificity for correctly identifying when a pulse occurs. Backscatter of pressure waves may be used to detect respiration, heart-beat pulses, bladder state (full/empty) and the like. Reduced urine output may be the result of kidney failure, which in turn may be due to sepsis, cholera, dehydration, etc. Pressure ulcers are more likely for patients with soiled sheets; measures of urination and defecation can be factors in the prediction of pressure ulcers. They system may alert a clinician to detection of urination and/or defecation.

[0085] Detection of body movement may also be used to detect a patient who may attempt a bed-exit. For example, if the patient sits up and then moves toward the edge of the bed, the system may alert a clinician or modify the bed settings.

[0086] Other optical methods may be used, such as a single or small number of photo detectors. The photodetector(s) may use back-scattered background light or light provided by a sensor. The light source may be broadband, e.g., white light, or it may be from a narrow-band optical source, such as a 535 nm green light. The photodetector may be broadband, or filtered to preferentially detect light at the wavelength of a narrow-band optical source.

[0087] Referring now to FIGS. 7-9, the medical device 104 and/or the mobile device 114 are configured to illustrate aspects of the pulse rate variability as measured per the method 600. The analysis methods described, including those for producing a spectrogram from pulse rate variability, may be applied to other input sources, such as pupil diameter variability, respiration rate variability, temperature variability, blood pressure variability, and the like.

[0088] For pupil diameter variability, a graph similar to that shown in FIG. 7 (for pulse rate variability) can be used, where the units are in millimeters (as opposed to milliseconds for pulse rate variability). For example, the medical device 104 is configured to measure pupil size over time and compare the size to a baseline, either of the patient 102 and/or a similarly situated individual. This can be accomplished using an imaging device (e.g., camera) of the medical device 104 and/or the mobile device 114.

[0089] For example, a front facing camera of the mobile device 114 can be programmed to periodically capture images of the pupil(s) as the patient 102 uses the mobile device 114 over time. A pupilometer may also be used. A pupilometer is a medical device that measures the diameter of a pupil, typically in response to external stimulus, such as a light turning on and off. Pupilometers such as the NeuroOptics NPi-200 measure the response time to an externally forced light stimulus and measures size, latency, constriction velocity and dilation velocity. There is no measure of how the pupil diameter varies in response to the autonomic body regulation, such as respiration modulation; however, this could be done as a source of data in this disclosure.

[0090] In some examples, the medical device 104 and/or mobile device 114 provide a stimulus (e.g., various lighting configurations and/or video content) to impact the focus and dilation of the pupils. Once captured, the image data can be processed, and a spectrogram of the dilation over time can be created. In the context of the mobile device 114, an

application can be executed by the mobile device to periodically stimulate, capture pupil images, and/or analyze/forward the images.

[0091] In some examples, a camera with a moderately high frame rate (≥ 16 fps) and algorithms to track and focus on the eye takes multiple images of the eye and measures the relative change in the pupil diameter over time. The relative size of the pupil matters and other facial features / landmarks such as the overall size of the eye can be used to re-scale if the distance to the camera changes. Images are taken, pupil diameters are measured, and a plot of pupil diameter versus time is created. From this plot, statistics such as mean and standard deviation can be made. Groups of data, for example 128 points, can be transformed into the frequency domain and then put together to create a spectrogram.

[0092] As with changes in beat-to-beat interval, the changes in pupil diameter, or pupil diameter variability, are reflective of the state of the autonomic nervous system. These changes can be due to varied factors in addition to ambient light including: increased/decreased attention, surprise, seeing images, hearing sounds, etc. It is noted that the minute changes in pupil diameter are “rich” in healthy patients and relatively plain in unhealthy patients. Respiration modulates the pupil diameter. For example, for a person breathing every 8 seconds, there is an 8-second periodicity in the pupil diameter.

[0093] In general terms, the process for calculating the pupil diameter variability involves multiple images of the eye, either using high-speed still image capture or video imaging methods. Each image frame can be verified for quality (e.g., focus, lighting, ability to detect pupil & iris, etc.). The pupil diameter for each eye is measured for each frame. Heuristics are used to discard invalid data, e.g., pupil diameter changes of over 50% from prior reading, pupil size > 8 mm, etc. The pupil size detector may use an infrared light and/or infrared detector as a way to increase the contrast of the pupil compared to the iris.

[0094] A table of diameter versus sample size can be created. The tabular data may be plotted on a graph similar to the graph 700, as shown in FIG. 7 for pulse rate variability. Further calculations, such as statistics of the data (mean, standard deviation, histogram, etc.) are optionally calculated. Frequency content of the tabular data is calculated, and frequency content can be displayed graphically for a single group (part of all of the tabular data).

[0095] For example, FIG. 8 shows power being displayed both in color and in the amplitude on the y-axis of the plot 800. Multiple groups of data from any physiological variability analysis can be displayed to show the trend in frequency over time, as illustrated in the plot 900 of FIG. 9. Power can be compared to a previous baseline or to a general baseline for patients with similar demographics as an indicator of health. Note in the plot 900 three general bands of power at about 0.03, 0.1, and 0.3 Hz that are typical for pulse rate variability. Relative power in different bands can also be compared as indicators of some disease states. Different spectral bands and analysis methods may be used for pupil diameter variability and any other physiological inputs.

[0096] Alerts can be provided if the measured attribute (e.g., pulse rate variability, pupil diameter variability, etc.) indicates high probability of health issue, giving the caregiver an indicator that perhaps a more detailed patient assessment is warranted, perhaps including an office visit.

[0097] Referring now to FIG. 10, an example method 1000 for measuring pupil diameter variability is shown. At operation 1002, imaging is initiated. In the context of a mobile device like a smartphone or tablet, optional operation 1004 can include displaying various images on the mobile device to orient and manipulate the pupil, such as video, video games, etc.

[0098] Next, at operation 1006, the pupils of the patient 102 are detected. This can be accomplished, for example, by using one or more automated methods for capturing the pupils of the patient 102. One such method for identifying the pupil is described in U.S. Pat. No. 9,237,846 to Mowrey.

[0099] Next, at operation 1008, the one or both pupils are imaged at a given rate, such as at 16 to 40 fps. For a human's typical maximum pupil diameter rate of change, sampling at 40 fps supports a sample for approximately every 0.1 mm of diameter change. Higher frame rates of up to 600 fps would support measurement of diameter changes at a resolution of 0.01 mm at the typical, fastest contraction rates of 6 mm/second. Each image can be qualified at operation 1010, such as for focus, pupil/iris detection, etc. At operation 1012, the relative pupil diameter is measured for each eye for each qualified frame.

[0100] Next, at operation 1014, the data is tabulated, such as in a table for each eye. As needed, resampling can be done at operation 1016 depending on the data captured. Next, at operation 1018, various statistics are calculated using the data, and a frequency analysis can be performed at operation 1020 analogous to methods for evaluating pulse rate variability. As with pulse rate variability, the power and spectral bands can be analyzed at operation 1022, such as by using the plots 800 and 900 shown in FIGS. 8 and 9. The results can be presented and/or stored locally or in the electronic health record at operation 1024.

[0101] For pulse rate, the sympathetic nervous system increases (accelerates) cardiac activity while the parasympathetic nervous system decreases (decelerates) cardiac activity. In comparison, dilation of the pupil is controlled by the sympathetic nervous system while contraction of the pupil is controlled by the parasympathetic nervous system. As such, analysis of the pupillary dilation/contraction provides a measure of the autonomic nervous system analogous to analysis of increases and decrease in pulse rate.

[0102] Referring now to FIG. 11, as noted, various physiological responses, such as pulse rate and/or pupil diameter variability, can be used over time to predict disease states. Other physiological data, including but not limited to, blood pressure variability, oxygen saturation variability, blood glucose variability, temperature variability, respiration rate variability, respiration depth variability, tympanic membrane motion variability, EEG variability, reflexive response variability, weight variability, urination/bladder-state, defecation, or any measure of variability in chemical content of the blood, urine, saliva or other bodily fluid, can also be used to estimate disease states.

[0103] For example, the medical device 104 and/or the mobile device 114 can be used to capture various physiological data of the patient 102 over time. Such data, like the variability of clinical parameters such as pulse rate, respiration rate, SPO2 levels, temperature, pupil response and/or blood pressure can be used as early indicators of disease onset. This data can be collected over time and analyzed to determine variability that indicates a disease state.

[0104] As noted, pulse rate variability can be a strong predictor of disease. For example, research shows that pulse rate variability indicators precede the onset of sepsis in adults by several (e.g., typically 1.5) days. A vital-sign variability algorithm can be implemented in a device (e.g., the medical device 104 and/or mobile device 114) that measures a vital sign and provides an alert to the user or health-care worker both when the variability decreases from baseline (indicating diseased state) and when the variability returns to the baseline. Variability may also be used as a health-check for home-health as being tired, stressed, over-exerted decreases the pulse rate variability baseline.

[0105] In FIG. 11, an example method 1100 shows how these variabilities can be used to estimate and/or predict disease states for the individual. At operation 1102, vital signs are captured using the medical device 104 and/or the mobile device 114. For example, as noted, physiological information such as pulse rate variability (see FIGS. 6-9) and/or pupil diameter variability (see FIG. 10) can be captured using the camera of the medical device 104/mobile device 114.

[0106] Next, at operation 1104, baseline data is obtained. This data can include historic measurements for the patient 102. Or, the baseline data can be obtained from a central repository (e.g., on the server device 112) for an individual who is similarly situated (e.g., same gender, age, race, nationality, geographic origin, diagnosis, etc.).

[0107] At operation 1106, a spectrogram and other variability measures are produced based upon the data, such as that shown in FIG. 9. Other statistics can also be used. At operation 1108, the results are compared to the baseline data (either specific to the patient 102 and/or demographic).

[0108] Next, at operation 1110, the physiological data is captured over time, and the new data is again analyzed at operation 1112. At operation 1114, significant changes are noted. If no significant changes are noted, control is passed back to operation 1110 for further capture of data. Trends in the changes may be noted and considered as part of the analysis.

[0109] If, however, a significant change to the variability is noted, control is instead passed to operation 1116, where a determination is made as to whether the change is positive or negative. If the change is positive, then control is passed to operation 1118 for an optional indication that the disease state is improving, and then control is passed to operation 1110 for further capture of data. If, instead, the change is negative, control is passed to operation 1120, and some type of alert can be generated for the patient 102 and/or the caregiver. Various methods of indicating improvement or decline may be implemented, such as a Likert scale, color coding, audible alerts, and the like.

[0110] FIG. 12 illustrates example physical components of a computing device, such as the medical device 104, server device 112, and/or mobile device 114. As illustrated, the device includes at least one processor or central processing unit ("CPU") 1208, a system memory 1212, and a system bus 1210 that couples the system memory 1212 to the CPU 1208. The system memory 1212 includes a random access memory ("RAM") 1218 and a read-only memory ("ROM") 1220. A basic input/output system containing the basic routines that help to transfer information between elements within the device, such as during startup, is stored in the ROM 1220. The device further includes a mass storage device 1214. The mass storage device 1214 is able to store

software instructions and data. The central processing unit **1208** is an example of a processing device.

[0111] The mass storage device **1214** is connected to the CPU **1208** through a mass storage controller (not shown) connected to the bus **1210**. The mass storage device **1214** and its associated computer-readable data storage media provide non-volatile, non-transitory storage for the device. Although the description of computer-readable data storage media contained herein refers to a mass storage device, such as a hard disk or CD-ROM drive, it should be appreciated by those skilled in the art that computer-readable data storage media can be any available non-transitory, physical device or article of manufacture from which the device can read data and/or instructions. The mass storage device **1214** is an example of a computer-readable storage device.

[0112] Computer-readable data storage media include volatile and non-volatile, removable and non-removable media implemented in any method or technology for storage of information such as computer-readable software instructions, data structures, program modules or other data. Example types of computer-readable data storage media include, but are not limited to, RAM, ROM, EPROM, EEPROM, flash memory or other solid-state memory technology, CD-ROMs, digital versatile discs ("DVDs"), other optical storage media, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the device.

[0113] According to various embodiments of the invention, the device may operate in a networked environment using logical connections to remote network devices through the network **108**, such as a local network, the Internet, or another type of network. The device connects to the network **108** through a network interface unit **1216** connected to the bus **1210**. The network interface unit **1216** may also be utilized to connect to other types of networks and remote computing systems. The device also includes an input/output controller **1222** for receiving and processing input from a number of other devices, including a camera, a keyboard, a mouse, a touch user interface display screen, or another type of input device. Similarly, the input/output controller **1222** may provide output to a touch user interface display screen, a printer, or other type of output device.

[0114] The device also includes an imaging device **1230**, such as a camera that is configured to capture still or moving images (i.e., video). The camera can be configured to capture high resolution images or video (e.g., 100-200+fps) that can be used to conduct the analyses described herein.

[0115] As mentioned above, the mass storage device **1214** and the RAM **1218** of the device can store software instructions and data. The software instructions include an operating system **1232** suitable for controlling the operation of the device. The mass storage device **1214** and/or the RAM **1218** also store software instructions, that when executed by the CPU **1208**, cause the device to provide the functionality of the device discussed in this document. For example, the mass storage device **1214** and/or the RAM **1218** can store software instructions that, when executed by the CPU **1208**, cause the medical and/or mobile device to capture images and determine variability of one or more physiological measurements.

[0116] Referring now to FIGS. **13-15**, another embodiment of a system is illustrated for estimating vital signs, like blood volume changes associated with the cardiac cycle,

from facial images of human subjects. Patients' vital signs, like pulse rate and respiratory rate, can be monitored continuously by caregivers, which can be useful for patients suffering respiratory disorder diseases and heart problems. This example provides a low-cost and non-contact solution for patients who have a difficulty using contact and wearable devices.

[0117] In this example shown in FIG. **13**, a system **1300** includes a camera **1310** that is placed to capture a sequence of images of the patient **102**. The images are segmented into various regions (e.g., face, upper body and background). The camera **1310** may be a still camera that acquires images at suitable frame rate (e.g., 10-16 images per second) or a video camera.

[0118] Subtle changes in pixel values of the facial region (e.g., forehead and cheek) are used to estimate pulse rate **1325**, as depicted in the waveform **1320**. In addition, low frequency amplitude variation of the camera reflectance signal can be used for estimating respiratory rate. The pulse and/or respiratory rates can be estimated and recorded continuously. If abnormal rates are detected, an alert **1330** is triggered and sent to a caregiver **1340** in order to take proper action, if needed. The trends of pulse and respiratory rates will also be available for the caregiver **1340** to analyze. The system may use combine multiple analysis methods, such as the changes in pixel values and the minute motions of the head occur with each pulse to achieve a higher fidelity system than one that uses just one of the methods.

[0119] Referring now to FIG. **14**, an example method **1400** for estimating pulse rate and/or respiratory rate from video is shown. In this example, the video is captured at operation **1410** as a 12 Hz RGB video feed, although other configurations can be used.

[0120] Next at operation **1420**, the captured video feed is broken into red, green, and blue components and an average region of interest (ROI) is calculated. At operation **1430**, a sliding window of a defined size (e.g., a 30 second window in this example) is used to analyze the data.

[0121] At operation **1440**, the data is filtered (e.g., detrended and filtered). The filtering can be altered depending on the desired data, such as different filtering for pulse rate and respiratory rate.

[0122] Next, at operation **1450**, the data can be down-sampled. At operation **1460**, an autoregressive (AR) model is applied, as described further below. Finally, at operation **1470**, an estimate of pulse rate and/or respiratory rate are provided. This estimate can be captured over time to provide trending for the caregiver. In addition, acute alerting can be provided if significant changes are captured.

[0123] Referring now to FIG. **15**, additional details on the application of the AR model in operation **1460** of the method **1400** for spectrum estimation of pulse rate and/or respiratory rate are provided.

[0124] Generally, in this example, the time series of data collected by the camera is digitized at operation **1510** to form a photoplethysmogram (PPG) waveform. Next, the data is modeled to form the AR model at operation **1520**.

[0125] At operation **1530**, the AR coefficients are calculated using an equation such as the Yule-Walker equations. Next, at operation **1540**, frequency scanning is used to obtain the discrete AR spectrum. Finally, at operation **1550**, the peak frequency for pulse rate or respiratory rate is estimated.

[0126] More specifically, the AR model of the digitized time series data (PPG waveform) can be expressed as follows.

$$x(n) + \sum_{i=1}^m a_i x(n-i) = e(n)$$

where m is the order of the AR process, $\{a_i\}_{i=1}^m$ represents the AR coefficients, $e(n)$ is assumed to be the white noise with zero mean and variance σ^2 . In the domain of the z -transform, the transfer function $H(z)$ relating the output to the input can be written as follows.

$$H(z) = \frac{1}{A(z)}$$

where

$$A(z) = \sum_{k=0}^m a_k z^{-k}$$

and z^{-1} is the unit delay operator, that is, $z^{-k}x(n) = x(n-k)$. Then, the power spectral density (PSD) of the AR model can be expressed as follows.

$$P(\omega) = \sigma^2 \left| \frac{1}{A(\omega)} \right|^2$$

and $A(\omega)$ is obtained by substituting $z = e^{j\omega}$ in $A(z)$. As noted, the AR coefficients can be obtained by the Yule-Walker equations.

[0127] After obtaining the AR coefficients, the frequency scanning process can be performed to find the peak frequency locations for a range of frequencies of interest. As such, the AR frequency spectrum is obtained in order to estimate the frequency components of the given digitized time series data. The frequency f of each peak can be obtained from the angular frequency $\omega = 2\pi f$. Measurements over time may be presented to the clinician through various means including display of current data and/or trends on the medical device 104, mobile device 114, or via server device 112, which allows clinicians to view medical data via an EHR interface.

[0128] Although various embodiments are described herein, those of ordinary skill in the art will understand that many modifications may be made thereto within the scope of the present disclosure. Accordingly, it is not intended that the scope of the disclosure in any way be limited by the examples provided.

What is claimed is:

1. A method for estimating a disease state for a patient, the method comprising:
capturing images of an unobstructed portion of the patient;
processing the images to detect pulse rate; and
determining a pulse rate variability based upon the pulse rate.

2. The method of claim 1, further comprising:
comparing the pulse rate variability to a baseline or a range; and
estimating the disease state for the patient based upon the comparing of the pulse rate variability to the baseline or range.

3. The method of claim 2, further comprising transmitting pulse rate variability to an electronic medical record.

4. The method of claim 3, further comprising annotating data with at least one patient outcome metric.

5. The method of claim 4, further comprising using one or more annotations to measure algorithm performance.

6. The method of claim 2, wherein estimating the disease state further comprises analyzing patient health factors.

7. The method of claim 1, further comprising processing the images to detect a respiratory rate for the patient.

8. The method of claim 1, further comprising forming an autoregressive model using data from the images to estimate the pulse rate of the patient.

9. The method of claim 8, further comprising combining the autoregressive model estimate of the pulse rate and pulse-rate estimates derived from analysis of motion data.

10. The method of claim 1, further comprising providing a trend of the pulse rate variability for the patient over time.

11. A method for estimating a disease state for a patient, the method comprising:

detecting a pupil of the patient;
capturing images of the pupil; and
processing the images to estimate a pupil diameter variability.

12. The method of claim 11, further comprising:
comparing the pupil diameter variability to a baseline; and
estimating the disease state for the patient based upon the comparing of the pupil diameter variability to the baseline.

13. The method of claim 11, further comprising transmitting the pupil diameter variability to an electronic medical record.

14. The method of claim 11, further comprising annotating data with at least one patient outcome metric.

15. A method for estimating a disease state for a patient, the method comprising:

capturing physiological data including images from the patient over time;
processing the physiological data to detect a variability; comparing the variability to a baseline or a range; and
estimating the disease state for the patient based upon the comparing of the variability to the baseline or the limit.

16. The method of claim 15, wherein capturing the images includes capturing images of a pupil of the patient.

17. The method of claim 15, wherein capturing the physiological data includes using detection of backscatter to capture the physiological data.

18. The method of claim 15, further comprising:
detecting a change in position as a result of a physiological process;
comparing a phase of the transmitted and backscattered radiation; and
using the phase to detect pulses or respiration cycles.

19. The method of claim 15, wherein the physiological process includes gross muscle contraction.

20. The method of claim 15, further comprising detecting urination or defecation.

* * * * *

专利名称(译)	疾病状态的非侵入性确定		
公开(公告)号	US20180078216A1	公开(公告)日	2018-03-22
申请号	US15/705986	申请日	2017-09-15
[标]申请(专利权)人(译)	伟伦公司		
申请(专利权)人(译)	伟伦 , INC.		
当前申请(专利权)人(译)	伟伦 , INC.		
[标]发明人	BAKER STEVEN D YE CHAU CHONG WANG YUE AUNG AYE		
发明人	BAKER, STEVEN D. YE, CHAU CHONG WANG, YUE AUNG, AYE		
IPC分类号	A61B5/00 A61B5/0205 A61B3/11 A61B3/14 A61B3/00		
CPC分类号	A61B5/7278 A61B5/0205 A61B3/112 A61B3/14 A61B3/0025 A61B5/7282 A61B5/0077 A61B5/02416 A61B5/0816 A61B5/1107 A61B5/1128 A61B2576/00 A61B5/021 A61B5/02405 A61B5/02444 A61B5/ /1079 A61B5/1116 A61B5/1118		
优先权	62/395427 2016-09-16 US 62/440967 2016-12-30 US		
其他公开文献	US10624587		
外部链接	Espacenet USPTO		

摘要(译)

用于估计患者的疾病状态的示例方法可以包括：随时间捕获包括来自患者的图像的生理数据;处理生理数据以检测变异性;将可变性与基线或范围进行比较;并且基于可变性与基线或极限的比较来估计患者的疾病状态。

