



US 20160346056A1

(19) **United States**(12) **Patent Application Publication**
Demers et al.(10) **Pub. No.: US 2016/0346056 A1**(43) **Pub. Date: Dec. 1, 2016**(54) **SYSTEM, METHOD, AND APPARATUS FOR
REMOTE PATIENT CARE**(71) Applicant: **DEKA Products Limited Partnership,**
Manchester, NH (US)(72) Inventors: **Jason A. Demers,** Manchester, NH
(US); **Frederick Morgan,** Canton, MA
(US); **George W. Marchant, JR.,**
Goffstown, NH (US); **David E. Collins,**
Merrimac, MA (US); **Katie A.**
DeLaurentis, Manchester, NH (US);
Dean Kamen, Bedford, NH (US)(21) Appl. No.: **15/163,906**(22) Filed: **May 25, 2016****Related U.S. Application Data**(60) Provisional application No. 62/168,343, filed on May
29, 2015.**Publication Classification**(51) **Int. Cl.**

<i>A61B 50/31</i>	(2006.01)
<i>A61B 5/022</i>	(2006.01)
<i>A61B 5/1455</i>	(2006.01)
<i>A61B 5/01</i>	(2006.01)
<i>A61B 5/0402</i>	(2006.01)
<i>A61B 5/145</i>	(2006.01)
<i>A61B 5/15</i>	(2006.01)
<i>A61B 10/00</i>	(2006.01)


A61B 5/00 (2006.01)*A61B 90/30* (2006.01)*A61B 90/98* (2006.01)*A61M 16/10* (2006.01)*B65D 5/00* (2006.01)*A61F 17/00* (2006.01)*A61B 34/00* (2006.01)(52) **U.S. Cl.**

CPC *A61B 50/31* (2016.02); *A61B 34/25*
(2016.02); *A61B 5/022* (2013.01); *A61B*
5/14552 (2013.01); *A61B 5/01* (2013.01);
A61B 5/0402 (2013.01); *A61B 5/14532*
(2013.01); *A61B 5/150343* (2013.01); *A61B*
10/007 (2013.01); *A61B 5/0022* (2013.01);
A61B 5/6898 (2013.01); *A61B 90/30*
(2016.02); *A61B 90/98* (2016.02); *A61B 5/746*
(2013.01); *A61M 16/101* (2014.02); *B65D*
5/0085 (2013.01); *A61F 17/00* (2013.01);
A61B 2050/3008 (2016.02)

(57)

ABSTRACT

A portable patient-care kit is disclosed. The kit includes two-housing portions, a plurality of compartments, a touch-screen user interface device, and a light bar. The two-housing portions pivotally coupled together to form a container space. The plurality of compartments is disposed within at least one of the housing portions such that each compartment is configured to retain at least one medical apparatus. The touch-screen user interface device has a transceiver that can communicate via a mobile data network. The light bar is disposed along an exterior of one of the two-housing portions configured provide light.

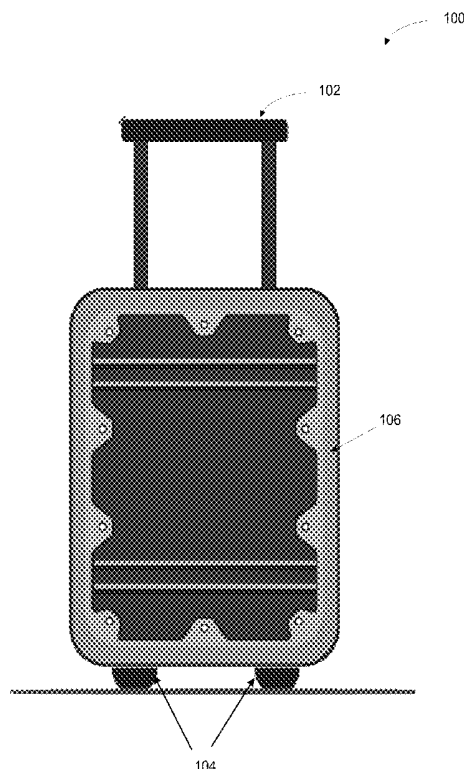

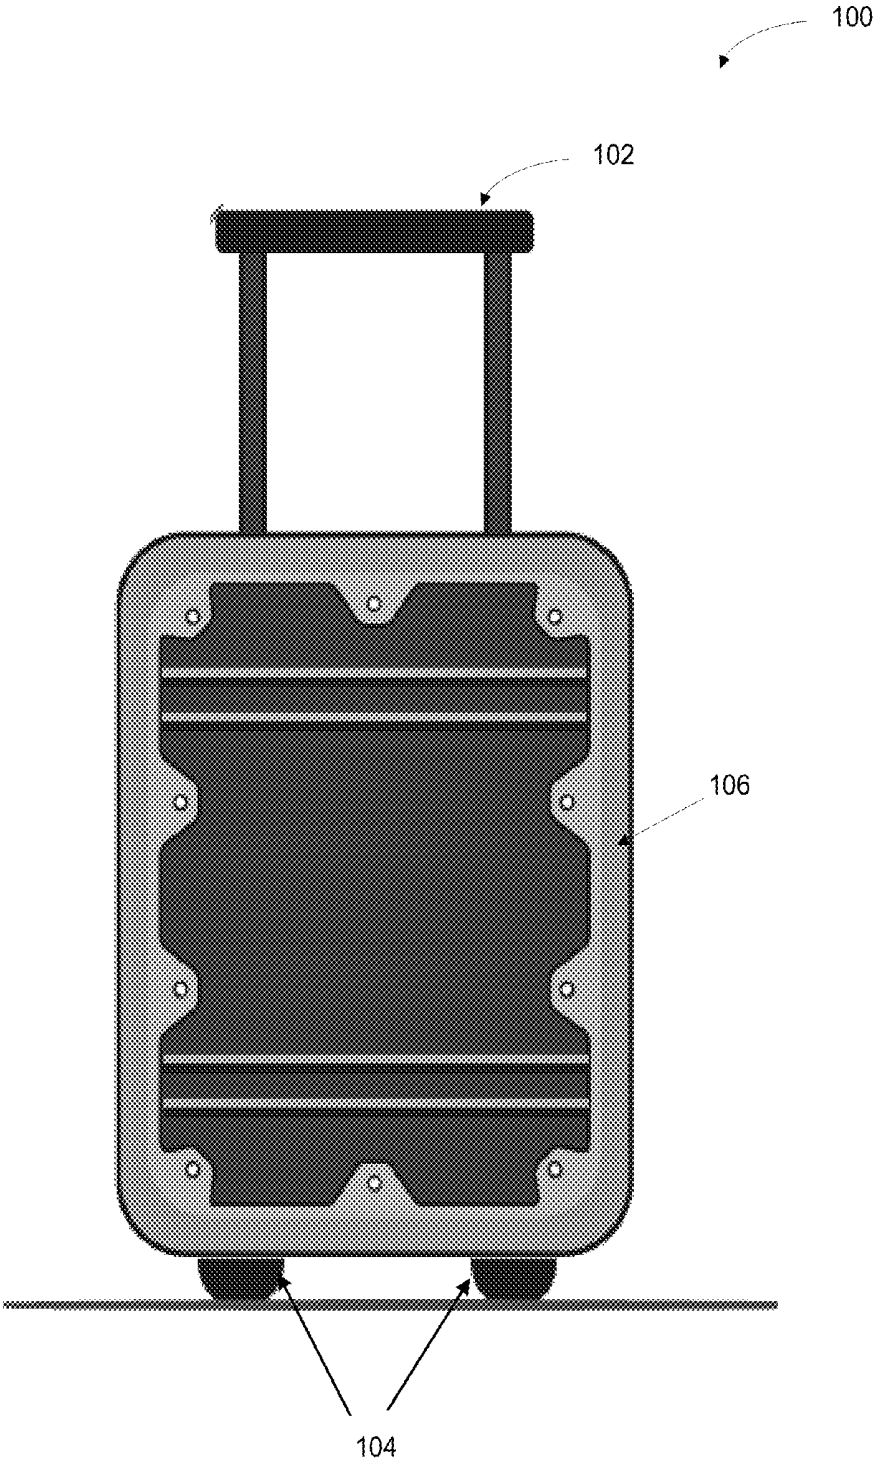


Fig. 1

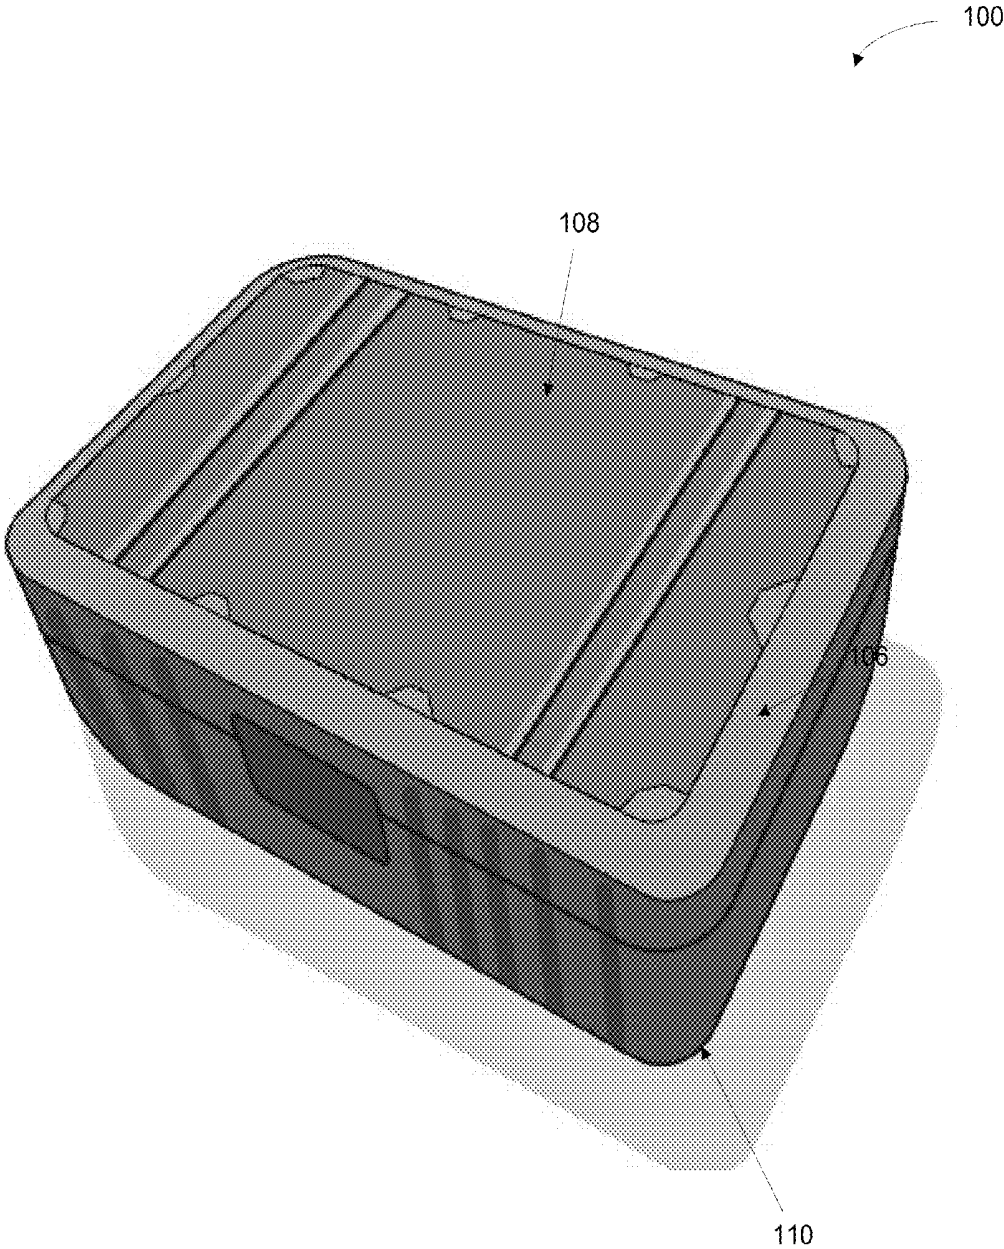


Fig. 2

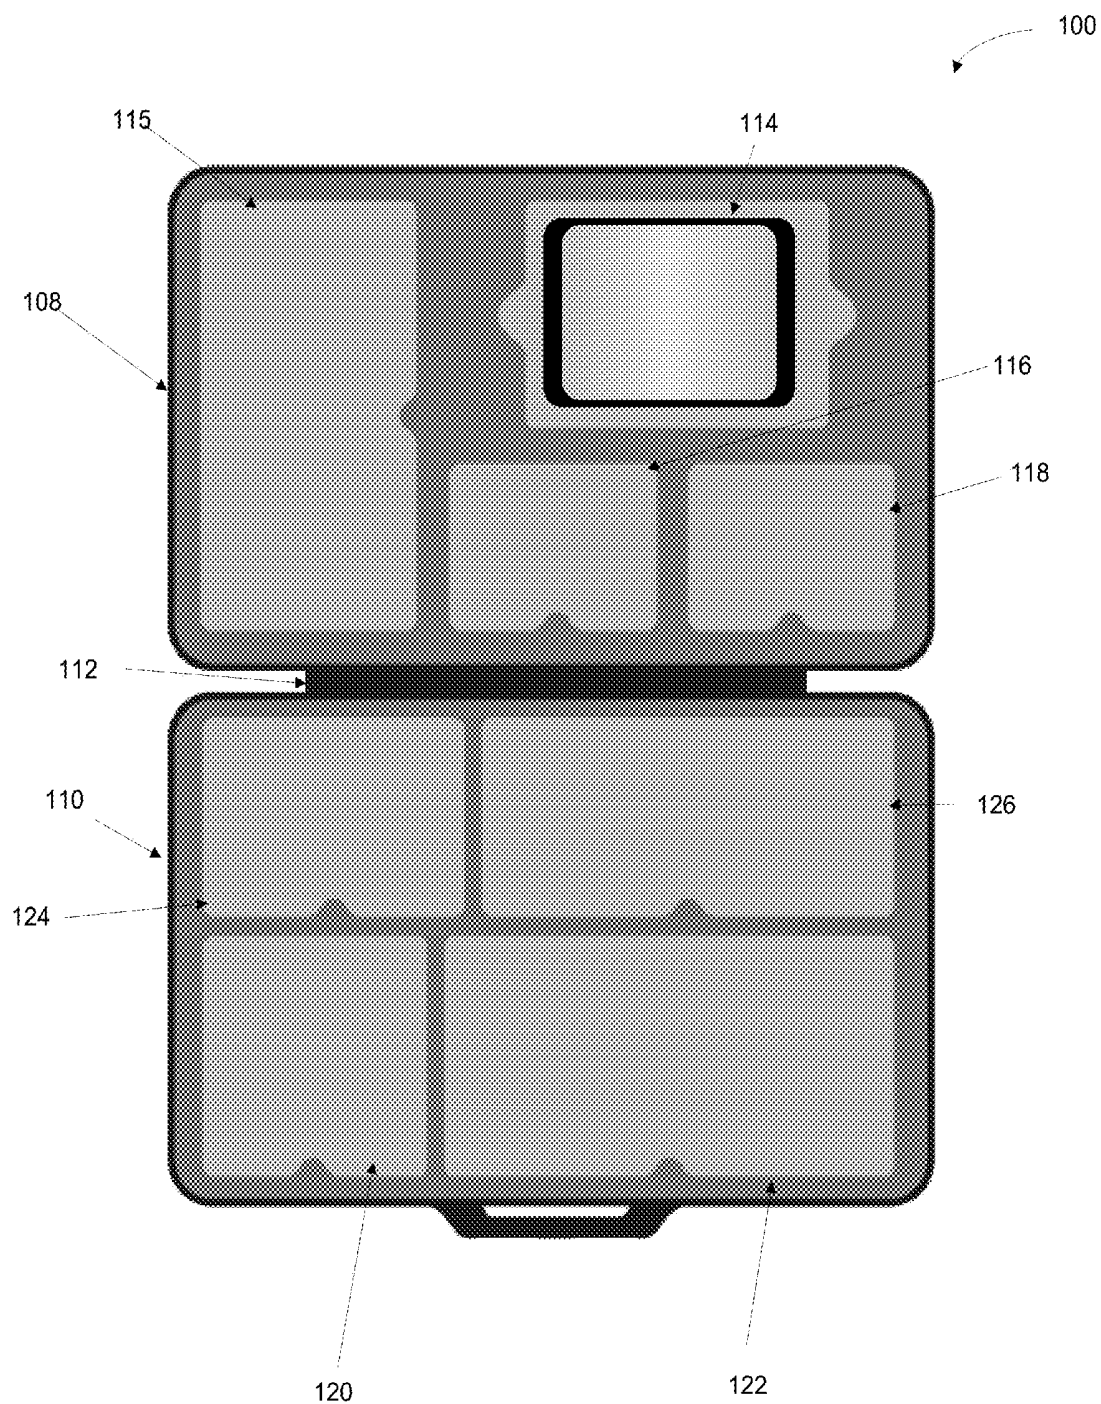


Fig. 3

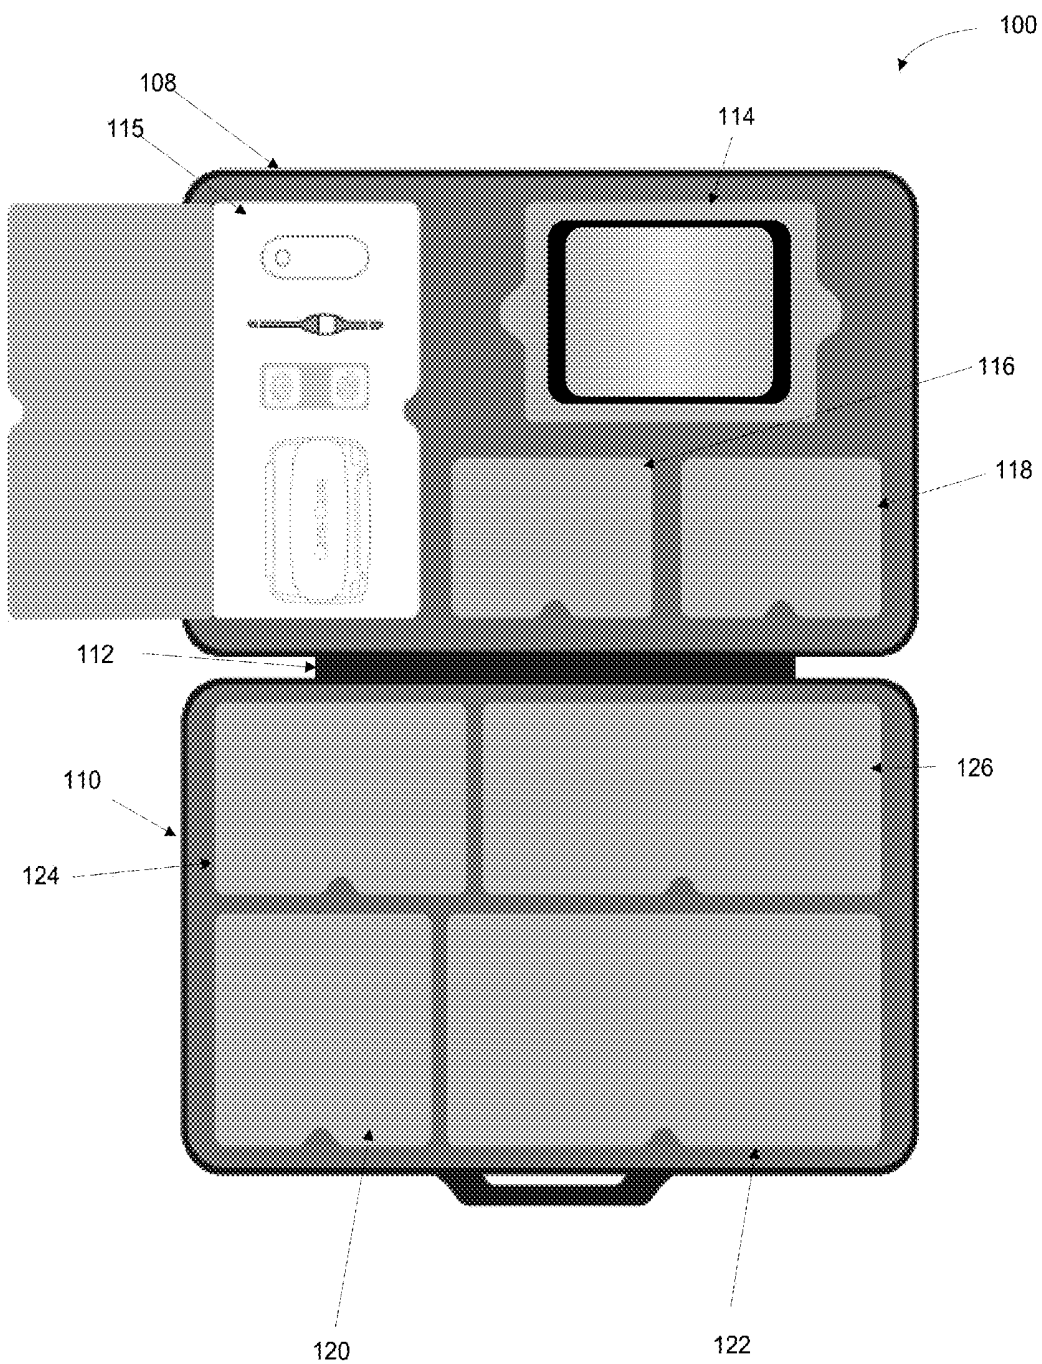


Fig. 4

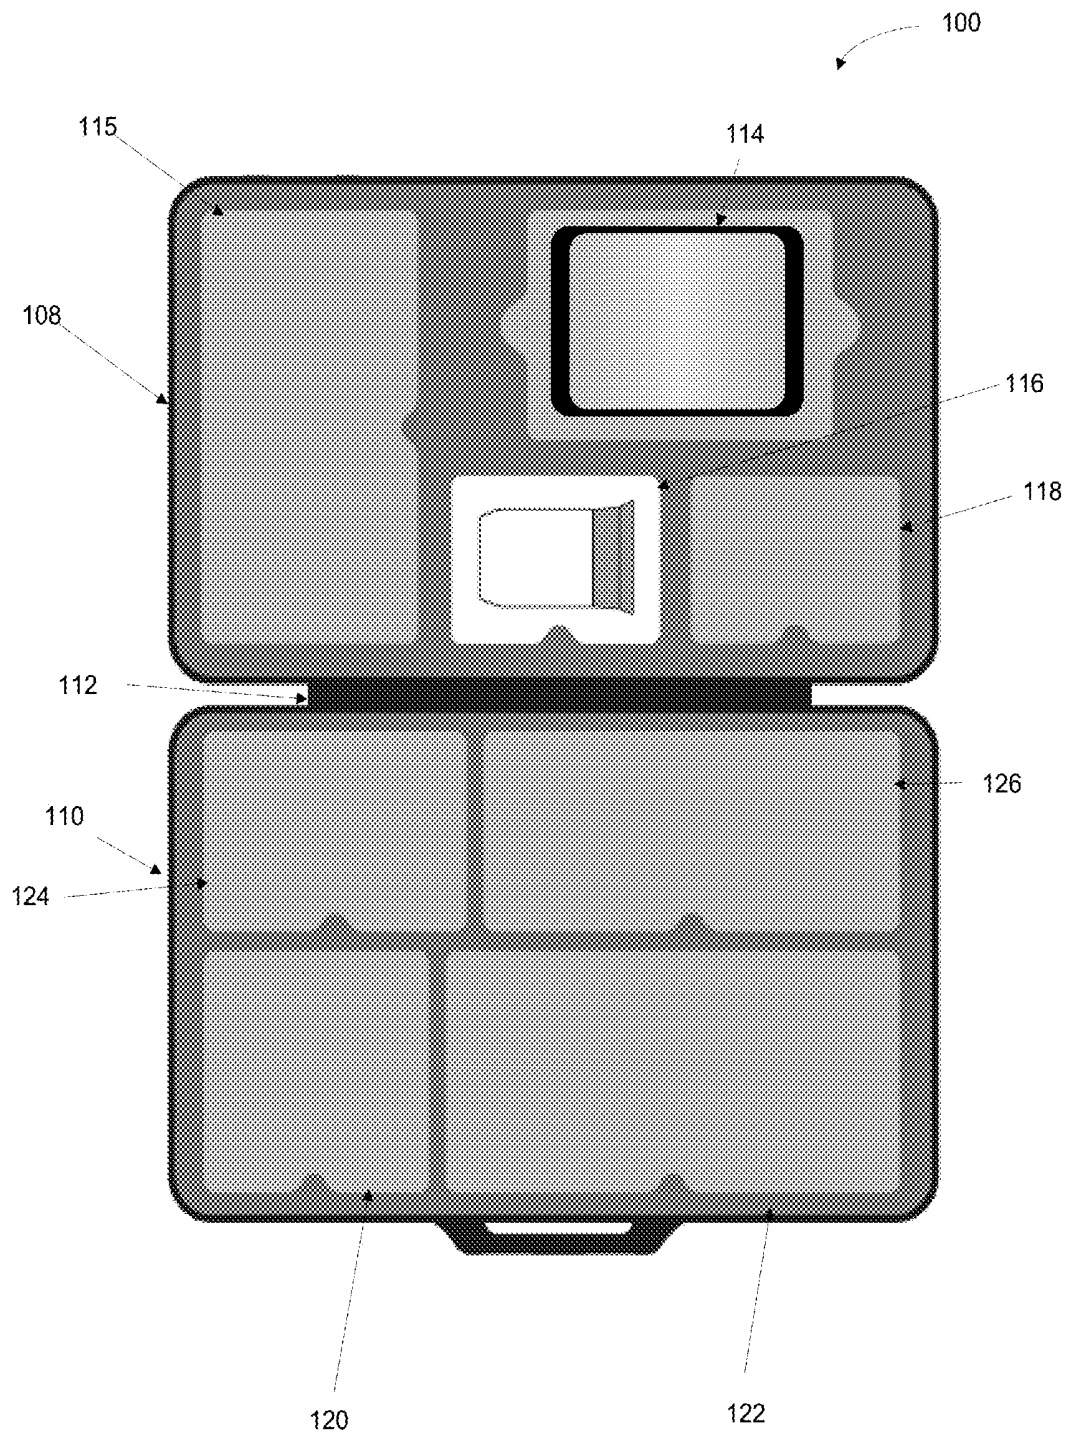


Fig. 5

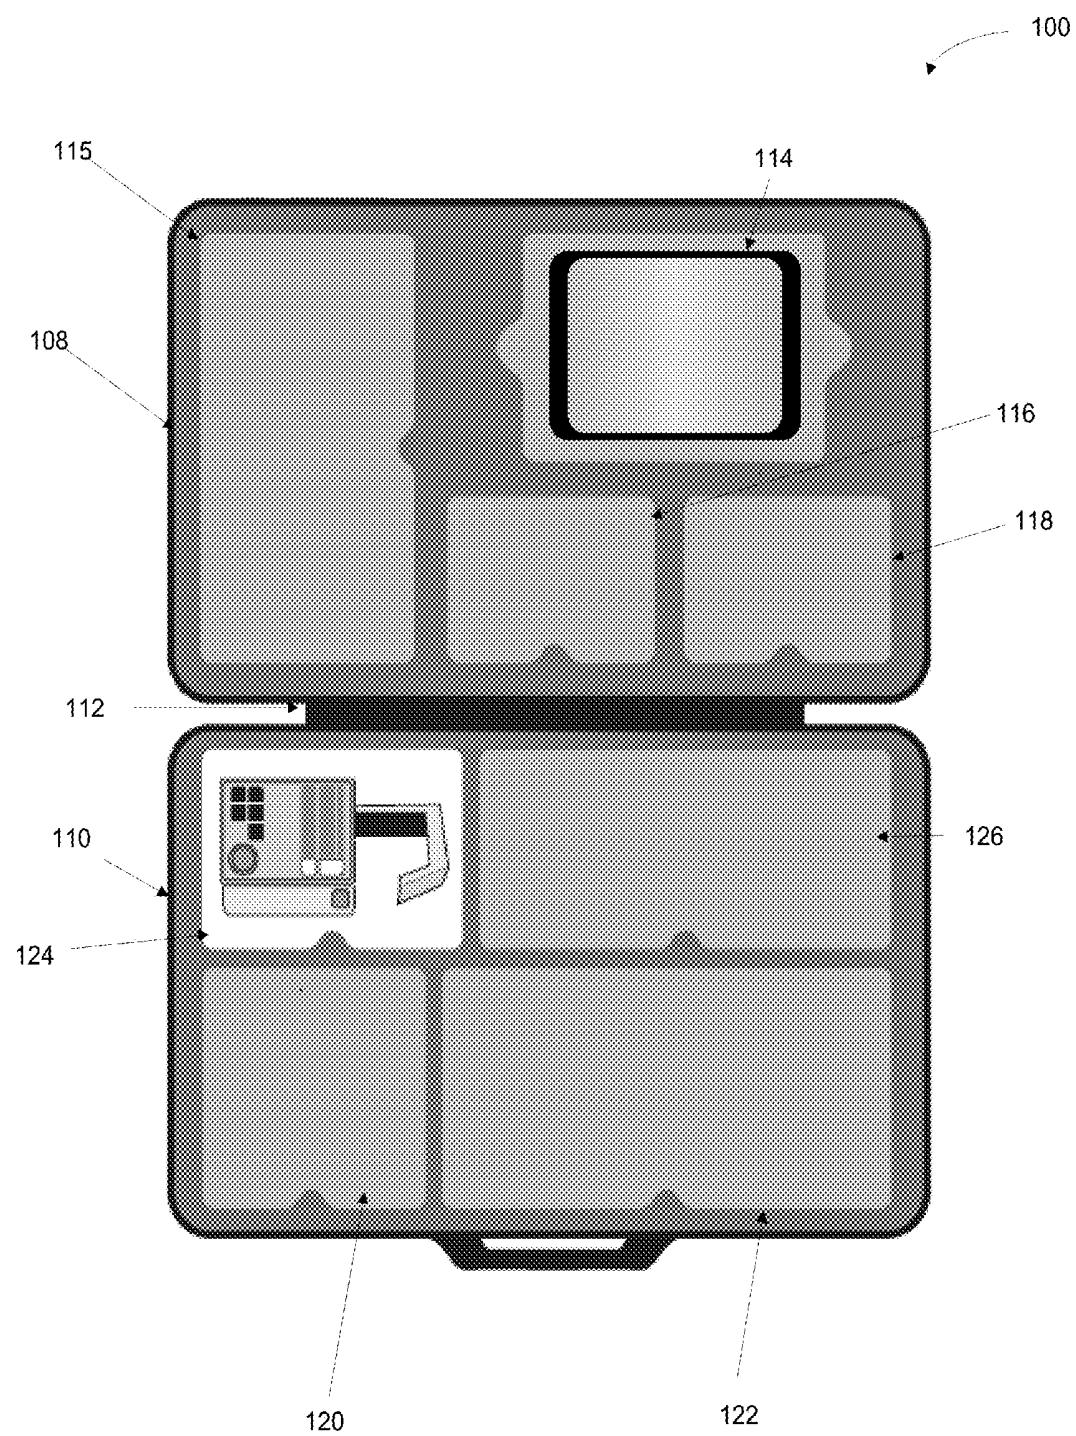


Fig. 6

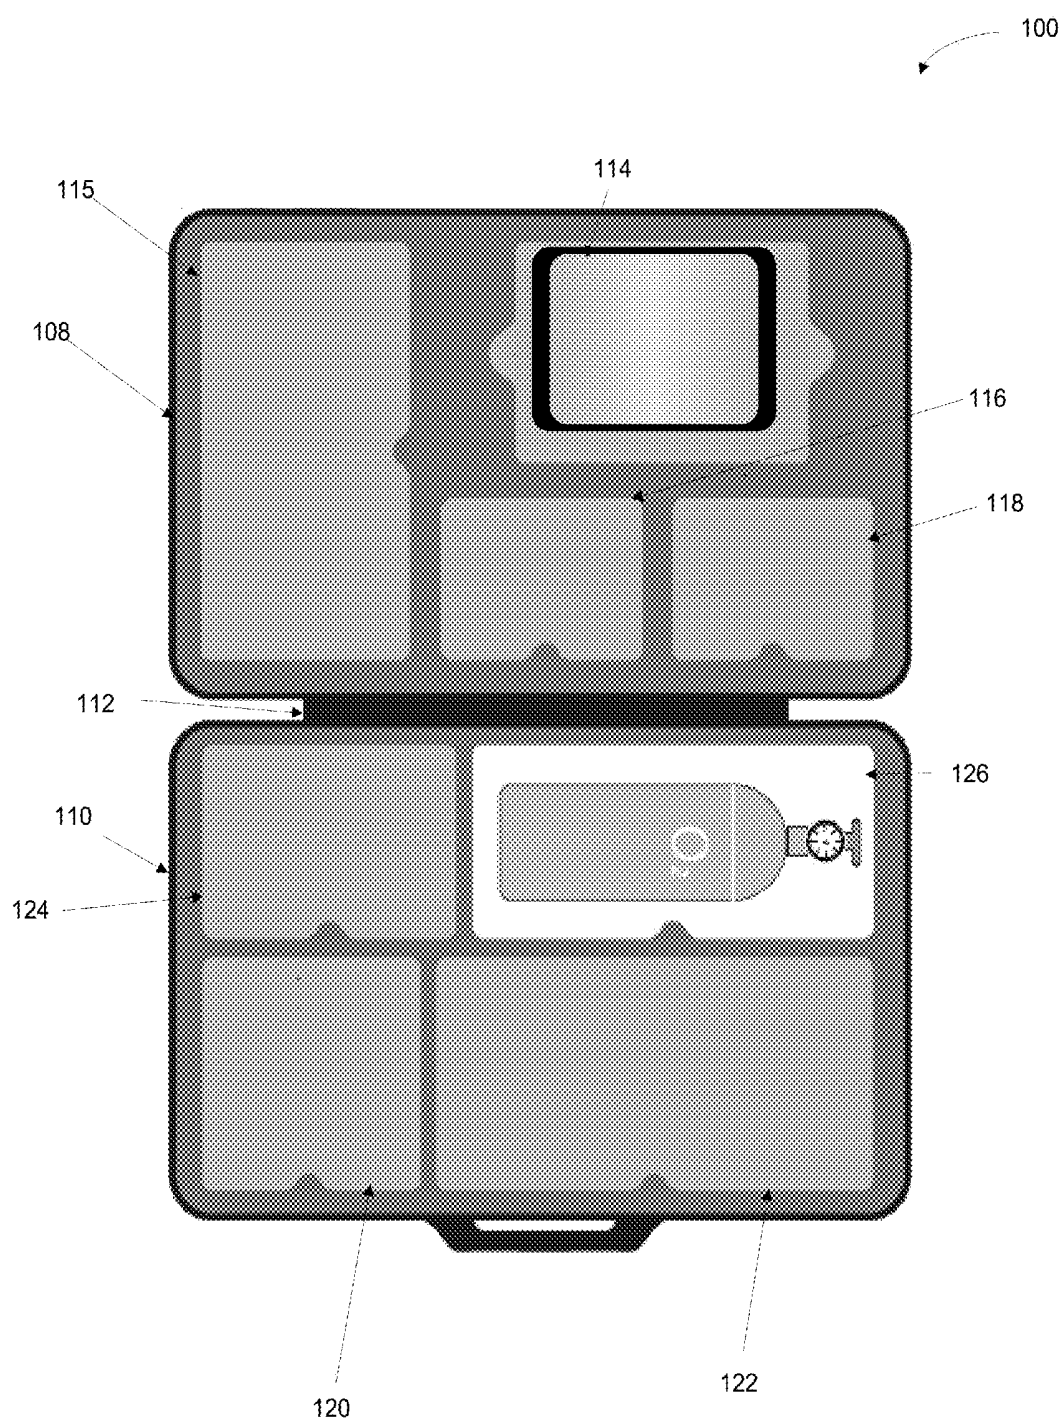


Fig. 7

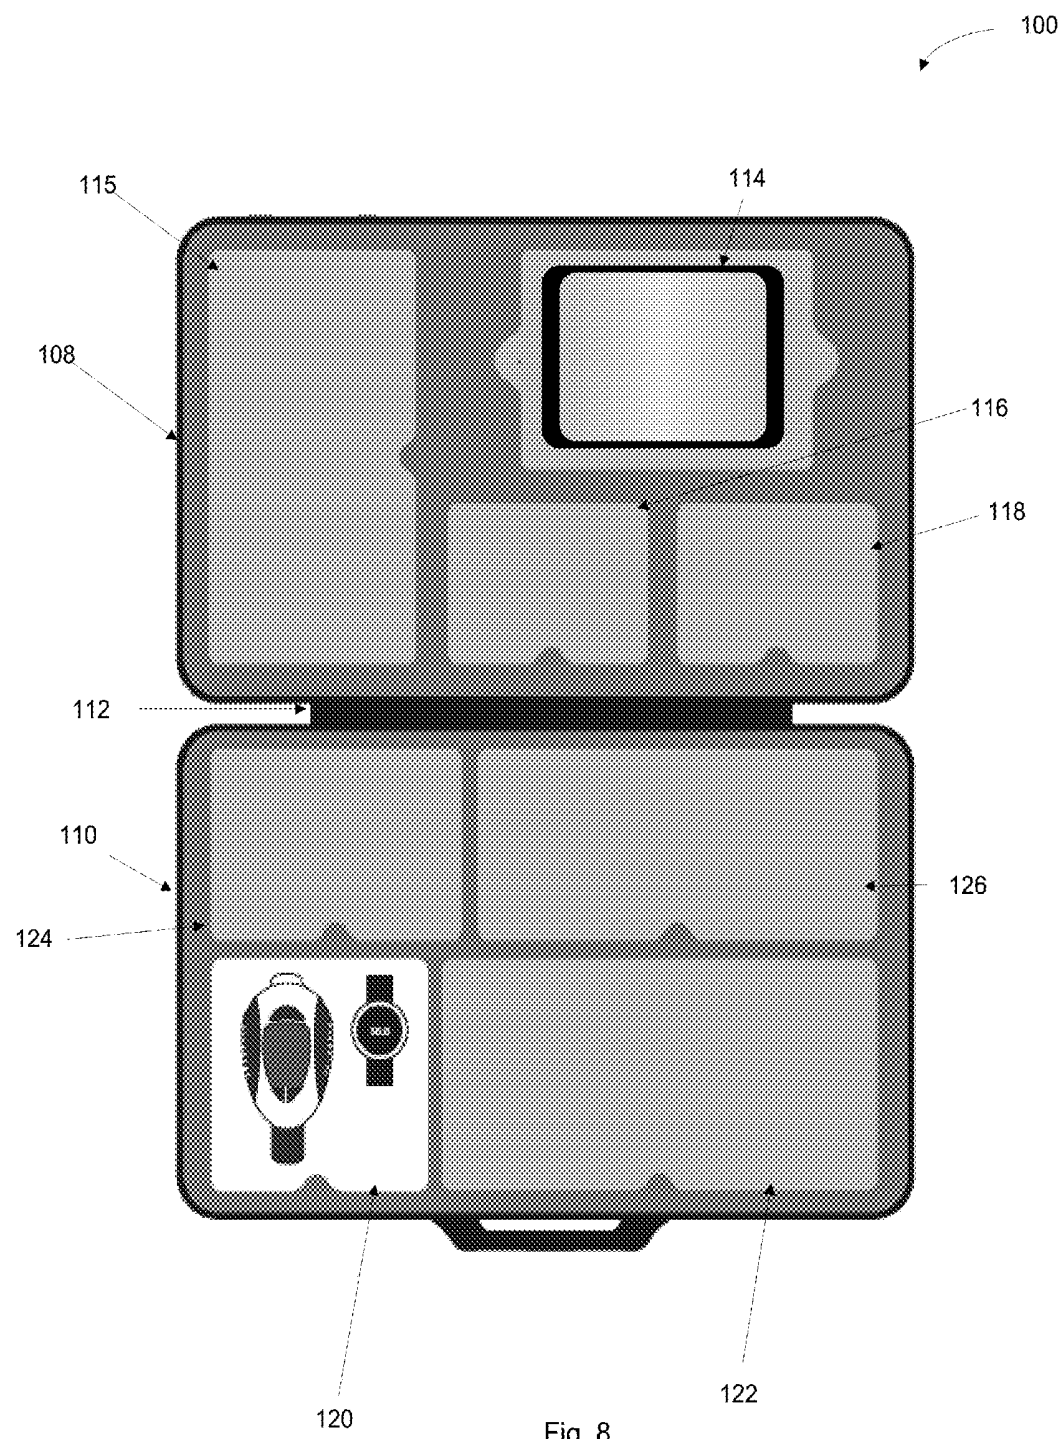


Fig. 8

SYSTEM, METHOD, AND APPARATUS FOR REMOTE PATIENT CARE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a Non-Provisional Application which claims the benefit of U.S. Provisional Patent Application Ser. No. 62/168,343, filed May 29, 2015 and entitled System, Method, and Apparatus for Remote Patient Care, which is hereby incorporated herein by reference in its entirety.

BACKGROUND

[0002] 1. Relevant Field

[0003] The present disclosure relates to patient care. More particularly, the present disclosure relates to a system, method and apparatus for using a kit for providing patient care.

[0004] 2. Description of Related Art

[0005] Healthcare may be delivered in a centralized, decentralized or hybrid mode of care. For example, healthcare may be performed by a centralized institution or by smaller, localized care (e.g., in-home care). As care networks look to improve the value of every dollar spent they are learning that alternate care models, and hence environments, have the potential to both decrease expenditures and increase results. One of the key ingredients in this future ecosystem is the interplay between home care and retail medicine.

[0006] Some patients may be admitted to a healthcare institution that could potentially receive the same, or better, care at home using a leaner, more agile care model. To facilitate this type of care, patients will need access to the appropriate medical supplies and monitoring the patient would typically receive in a hospital bed with the aid of professional caregivers. Further, the professional caregiver will need an easy and predictable way to transform the patient's residence into a recovery area outfitted with the appropriate technology to meet both the patient and the caregiver's needs.

SUMMARY

[0007] In accordance with one aspect of the present disclosure, a portable patient-care kit is provided. The kit includes two-housing portions, a plurality of compartments, a touch-screen user interface device, and a light bar. The two-housing portions pivotally coupled together to form a container space. The plurality of compartments is disposed within at least one of the housing portions such that each compartment is configured to retain at least one medical apparatus. The touch-screen user interface device has a transceiver that can communicate via a mobile data network. The light bar is disposed along an exterior of one of the two-housing portions configured provide light. The claims describe exemplary aspects and embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] These and other aspects will become more apparent from the following detailed description of the various embodiments of the present disclosure with reference to the drawings wherein:

[0009] FIG. 1 shows a portable kit for patient care in a transportation configuration in accordance with an embodiment of the present disclosure;

[0010] FIG. 2 shows the portable kit to illustrate the light bar that indicates a communicable status of the portable kit in accordance with an embodiment of the present disclosure;

[0011] FIG. 3 shows an open portable kit to show the various compartments and a user interface in accordance with an embodiment of the present disclosure;

[0012] FIG. 4 shows an open portable kit with an open compartment having several physiological measuring devices in accordance with an embodiment of the present disclosure;

[0013] FIG. 5 shows an open portable kit with an open compartment having a pill dispenser in accordance with an embodiment of the present disclosure;

[0014] FIG. 6 shows an open portable kit with an open compartment having a gravity-based intravenous infusion pump in accordance with an embodiment of the present disclosure;

[0015] FIG. 7 shows an open portable kit with an open compartment having an oxygen tank in accordance with an embodiment of the present disclosure; and

[0016] FIG. 8 shows an open portable kit with an open compartment having an activity monitor and a spirometer in accordance with an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0017] FIG. 1 shows a portable kit **100** for patient care in a transportation configuration in accordance with an embodiment of the present disclosure. The kit includes wheels **104** and a handle **102** to facilitate portability.

[0018] FIG. 2 shows the portable kit to illustrate the light bar **106** that indicates a communicable status of the portable kit **100** in accordance with an embodiment of the present disclosure. A light bar **106** surrounds a portion of the kit. The light bar **106** may be formed by one or more LEDs having various colors or intensities with a light diffuser to give the appearance of a solidly lit bar **106**. The light bar **106** may be illuminated with a variety of colors and intensities. The light bar **106** may also be illuminated with repeating or periodic patterns of color and/or intensities. For example, the light bar **106** may blink. In some embodiments of the present disclosure, one or more foldable legs may be pivotally connected to the kit **100** such that it may be stood on its side to form a table-like structure.

[0019] FIG. 3 shows an open portable kit **100** to show the various compartments and a user interface in accordance with an embodiment of the present disclosure. The kit **100** may be a "Universal" home kit. The "Universal" home kit may be a pre-packaged home care ecosystem that can be sent home with a patient as a result of a medical appointment and/or a caregiver-order prescription. For example, the kit **100** may be provided by a prescribing physician, institutional hospital, or retail healthcare clinic. The kit **100** may contain a set of integrated and easy to use medical equipment (i.e., medical apparatuses) appropriate for use in the home setting by a patient, family members and/or a licensed home caregiver.

[0020] The kit **100** may contain an integrated array of what is typically standalone equipment. The kit **100** may be sized to be about the size of a mid-sized travel suitcase as is typically used in air travel as a carry-on. The kit **100** has handles **102** and wheels **104** for ease of transport home by

the patient (refer again to FIG. 1). As shown in FIG. 3, the kit 100 includes various compartments 115, 116, 118, 120, 122, 124, 126. The kit 100 also includes a user interface 114, e.g., a tablet. The kit 100 may include housing portions 108, 110 that are pivotable along a pivot (e.g., hinge) 112.

[0021] The kit includes a tablet 114 that may be a central control unit or may have a separate central control unit embedded within a housing portion 108, 110. The central control unit may incorporate a user interface, likely a touch screen graphical user interface, a cellular modem or other connectivity platform, Blue-tooth or other technology short-range interface radio(s). All of the medical apparatus found in the kit 100 may be pre-paired to the central control unit (e.g., tablet 114). Various medical apparatuses may be included within the kit 100, including, but not limited to, a weight scale, a pulse oximeter, a blood pressure meter, a thermometer, a blood glucose meter, a bioimpedance meter, and/or a spirometer. The tablet 114 may be pre-paired to all of the apparatuses over Bluetooth (e.g., Bluetooth LE).

[0022] The central control unit may provide a means for the kit to stream time-sequence data from the home directly into the electronic medical record. In some embodiments, the tablet 114 user interface provides “how-to” video support on demand, prompts users to perform care activities (such as changing dressings and taking medications), and serves as a channel for two-way communication between the patient and the licensed caregiver (telemedicine).

[0023] The medical apparatuses in the kit 100 may be an integrated platform. The kit 100 may limit the number of user interfaces the patient must learn by tight integration. By integrating the home care environment in the kit 100, the patient, in some embodiments, only needs to know how to use the tablet 114 and follow instructions provided on the tablet’s 114 user interface based on the scenario at hand (e.g. taking a blood sugar reading when it is required).

[0024] The doors on the compartments various compartments 115, 116, 118, 120, 122, 124, 126 may open automatically. The doors may be transparent such that internal illumination can indicate to a user which compartment of the compartments various compartments 115, 116, 118, 120, 122, 124, 126 to open. In some embodiments, the doors of the compartments various compartments 115, 116, 118, 120, 122, 124, 126 are side illuminated.

[0025] In some embodiments, a power supply within the kit can power the medical apparatuses. The power supply may be connected to an AC outlet to provide inductive energy to the medical apparatus therein (or may power the devices directly through a wired connection). The power supply may include or be connected to a battery.

[0026] The tablet 114 or a central control unit may communicate data to a cloud server, which is accessible by a hospital, patient, and/or physician to retrieve data from a medical apparatus of any part of the kit 100.

[0027] In some embodiments, the kit includes an internal communications component, which may be an access point or hotspot for the tablet 114 and/or the medical apparatuses. The tablet 114 may be an access point or hotspot for the medical apparatuses and/or the communications components. The communication component and/or tablet 114 may include a secure link (e.g., encrypted and/or HIPPA compliant link) and/or an unsecured link.

[0028] In some embodiments, an environmental monitor component is disposed within the kit 100, which can monitor least one of temperature, humidity, location, vibration,

shocks, and atmospheric pressure and communicate the measured parameter(s) to a cloud sever.

[0029] In some embodiments, an RFID reader is disposed within the kit 100. The RFID reader may communicate with the tablet 114 and/or the internal communications component. The RFID may be used to read RFID tags on the medical devices for inventory control purposes and/or to read RFID sensor values. An antenna may be in each compartment 115, 116, 118, 120, 122, 124, 126 such that the RFID reader can determine which of the compartments 115, 116, 118, 120, 122, 124, 126 the tag is located within. The RFID reader may determine when supplies are low and communicate that data to the tablet 114 (or internal communications device) which then orders new supplies.

[0030] In some embodiments, access control of the kit 100 may be implemented, including fingerprint, password, voice, or other access control. In yet additional embodiments, an audible and/or visual alarm system may be included within the kit 100 which can alarm if an external signal from the cloud is received, an excessive number of failed access attempts have been initiated, and/or the tablet 114 determines that the alarm should be sounded (e.g., the kit 100 is taken outside of a specific geographic position, also referred to as a virtual fence determined by a geolocation module).

[0031] In some embodiments, the compartment will be illuminated to show the user which compartment should be used. The tablet 114 may automatically illuminate the next compartment when it determines that the medical apparatus has made its measurement to help the patient continue in the proper sequence of operation.

[0032] FIG. 4 shows an open portable kit 100 with an open compartment 115 having several physiological measuring devices in accordance with an embodiment of the present disclosure. Shown in the compartment 115 are a pulse oximeter, a thermometer, an EKG, and a blood pressure cuff.

[0033] FIG. 5 shows an open portable kit 100 to a compartment 116 having a pill dispenser in accordance with an embodiment of the present disclosure. A physician may dispense a prescription that is received by the tablet 114 which in turn allows the pill dispenser to dispense a pill. The oral medicine dispensing device may be inserted into the kit 100 by a pharmacy where appropriately limited quantities of prescribed medications are included therewithin. The dispensing rules of the oral medicine dispensing device 116 can be set (and changed) by a clinician through the central control unit remotely (e.g., the tablet 114).

[0034] FIG. 6 shows an open portable kit 100 to a compartment having a mobile infusion pump (e.g., a gravity-based intravenous infusion pump) in the compartment 124. The mobile infusion device allows the patient or home caregiver to administer appropriate fluids (e.g. antibiotics) intravenously.

[0035] FIG. 7 shows an open portable kit 100 to the compartment 126 having an oxygen tank. FIG. 8 shows an open portable kit 100 to a compartment 120 having an activity monitor and a spirometer in accordance with an embodiment of the present disclosure.

[0036] Various alternatives and modifications can be devised by those skilled in the art without departing from the disclosure. Accordingly, the present disclosure is intended to embrace all such alternatives, modifications and variances. Additionally, while several embodiments of the present disclosure have been shown in the drawings and/or dis-

cussed herein, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as exemplifications of particular embodiments. And, those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto. Other elements, steps, methods and techniques that are insubstantially different from those described above and/or in the appended claims are also intended to be within the scope of the disclosure.

[0037] The embodiments shown in the drawings are presented only to demonstrate certain examples of the disclosure. And, the drawings described are only illustrative and are non-limiting. In the drawings, for illustrative purposes, the size of some of the elements may be exaggerated and not drawn to a particular scale. Additionally, elements shown within the drawings that have the same numbers may be identical elements or may be similar elements, depending on the context.

[0038] Where the term “comprising” is used in the present description and claims, it does not exclude other elements or steps. Where an indefinite or definite article is used when referring to a singular noun, e.g., “a,” “an,” or “the,” this includes a plural of that noun unless something otherwise is specifically stated. Hence, the term “comprising” should not be interpreted as being restricted to the items listed thereafter; it does not exclude other elements or steps, and so the scope of the expression “a device comprising items A and B” should not be limited to devices consisting only of components A and B. This expression signifies that, with respect to the present disclosure, the only relevant components of the device are A and B.

[0039] Furthermore, the terms “first,” “second,” “third,” and the like, whether used in the description or in the claims, are provided for distinguishing between similar elements and not necessarily for describing a sequential or chronological order. It is to be understood that the terms so used are interchangeable under appropriate circumstances (unless clearly disclosed otherwise) and that the embodiments of the disclosure described herein are capable of operation in other sequences and/or arrangements than are described or illustrated herein.

What is claimed is:

1. A portable patient-care kit, comprising:
two-housing portions pivotally coupled together to form a container space;
a plurality of compartments disposed within at least one of the housing portions, each compartment configured to retain at least one medical apparatus;
a touch-screen user interface device having a transceiver configured to communicate via a mobile data network; and
a light bar disposed along an exterior of one of the two-housing portions configured provide light.
2. The kit according to claim 1, wherein a compartment of the plurality of compartments includes an automatically opening door, wherein the user interface device is in operative communication with the door to instruct the door to automatically open.
3. The kit according to claim 1, wherein a plurality of medical devices are stored at least one of the plurality of compartments, wherein the user interface is pre-paired with

the plurality of medical devices, the plurality of medical devices including the at least one medical apparatus.

4. The kit according to claim 3, wherein the user interface is pre-paired via a Bluetooth LE pairing schema.

5. The kit according to claim 1, wherein a housing portion of the two-housing portions includes a battery and a power supply configured to supply power to the at least one medical apparatus using the battery.

6. The kit according to claim 1, wherein a housing portion of the two-housing portions includes AC-to-DC Converter and a power supply configured to supply power to the at least one medical apparatus using DC power from the AC-to-DC battery.

7. The kit according to claim 5, further comprising:

an AC-to-DC converter;

a battery;

a battery charger configured to charge the battery using DC power from the AC-to-DC converter; and

a medical-device charger configured to charge the at least one medical apparatus using at least one of the battery and the DC power from the AC-to-DC charger.

8. The kit according to claim 1, wherein the touch-screen user interface device is a tablet computer.

9. The kit according to claim 6, wherein the tablet is configured to teleconference with a physician having a computer device selected from the group of a PC, a tablet, a smart phone, a terminal and a phablet.

10. The kit according to claim 7, wherein any measurement of a person using one or more of the at least one medical apparatus is at least one of stored in a cloud server or communicated to the physician.

11. The kit according to claim 8, wherein the at least one medical apparatus is at least one of a sphygmomanometers, a pulse oximeter, a photoplethysmogram, a thermometer, an electro cardiogram sensor, a blood glucose meter, a blood-based diagnostic meter, a urine sample container, and a blood collector container.

12. The kit according to claim 1, wherein a housing portion of the two-housing portions includes a communications component.

13. The kit according to claim 10, wherein the communications component is a hotspot.

14. The kit according to claim 11, wherein the touch-screen user interface device is a tablet computer, and the tablet uses the hotspot to communicate with a cloud server.

15. The kit according to claim 12, wherein the tablet communicates with the at least one medical apparatus and relays data therefrom to the cloud server.

16. The kit according to claim 13, wherein the tablet communicates the relayed data to the cloud server through the communications component.

17. The kit according to claim 10, wherein the at least one medical device communicates with the hotspot to transmit data to a cloud server.

18. The kit according to claim 1, wherein the touch-screen user interface device is a tablet computer and is configured to act as a hot spot.

19. The kit according to claim 16, wherein the at least one medical device uses the tablet to communicate with the cloud.

20. The kit according to claim 1, wherein at least one medical device communicates a measured physiological parameter to a data analytics server.

21. The kit according to claim 18, wherein the data analytics server is a NoSQL server.

22. The kit according to claim 1, further comprising an environmental monitor component.

23. The kit according to claim 20, wherein the environmental monitor component monitors at least one of temperature, humidity, location, vibration, shocks, and atmospheric pressure.

24. The kit according to claim 21, wherein the environmental monitor component communicates a monitored parameter to the tablet.

25. The kit according to claim 21, wherein the environmental monitor component communicates a monitored parameter to a cloud server.

26. The kit according to claim 23, wherein the environmental monitor component communicates a monitored parameter to the cloud server through an internal hot spot of the kit.

27. The kit according to claim 23, wherein the environmental monitor component communicates a monitored parameter to the cloud server through the tablet.

28. The kit according to claim 1, wherein at least one of the two-housing portions includes a communications component having a secure communications link and an unsecure communications link.

29. The kit according to claim 26, wherein the secure communications link communicate identifiable patient data.

30. The kit according to claim 26, wherein the unsecure communications link is an internet link.

31. The kit according to claim 26, wherein the communications component is a hotspot.

32. The kit according to claim 29, wherein the hotspot is for at least one of the touch-screen user interface device and at least one medical apparatus.

33. The kit according to claim 1, further comprising an RFID reader configured to record an inventory of the at least one medical apparatus.

34. The kit according to claim 1, further comprising an RFID reader configured to read a sensor-based RFID tag.

35. The kit according to claim 1, further comprising an RFID reader configured to record an inventory of the at least one medical apparatus, wherein each compartment includes a different antenna in which the RFID reader can determine which antenna of the plurality of antennas an RFID is in close proximity with to thereby determine which compartment the at least one medical apparatus is located.

36. The kit according to claim 1, further comprising an RFID reader configured to identify a user to allow a lock to unlock to gain access to a compartment of the plurality of compartments.

37. The kit according to claim 1, in which an RFID reader communicates with a touch-screen user interface.

38. The kit according to claim 1, in which an RFID reader communicates with a communications component.

39. The kit according to claim 1, wherein a cover of a compartment is configured to be side illuminated.

40. The kit according to claim 1, where a cover of a compartment is automatically actuateable.

41. The kit according to claim 1, wherein a letter or number identifier is affixed to a cover of each compartment.

42. The kit according to claim 1, wherein the kit includes a locking device to prevent unauthorized access, wherein authorized access may be obtained via 2-factor authentication, a usb key, voice authentication, or fingerprint authentication.

43. The kit according to claim 1, wherein a payment terminal is available including at least one of a debit card reader, a credit card reader, a health insurance card reader, or a money acceptor.

44. The kit according to claim 1, wherein there are four foldable legs to turn the opened kit into a table-like structure.

45. The kit according to claim 1, wherein the touch-screen user interface is configured to receive a prescription from a physician via a communication link, the touch-screen user interface is configured to authorize a pill dispenser within a compartment to dispense the prescription.

46. The kit according to claim 1, further comprising an RFID reader configured to record an inventory of the at least one medical apparatus, wherein the touch-screen user interface is configured to communicate a demand for new supplies to be delivered with a supply is below a predetermined threshold.

47. The kit according to claim 1, wherein an outer surface of the two-housing components is at least one of magnetically shielding, electrostatically shielding, or electromagnetic shielding.

48. The kit according to claim 1, wherein the touch-screen user interface is in operative communication with the light bar to at least one of control the color of the light bar and control the brightness of the lightbar.

49. The kit according to claim 1, further comprising an audible alarm, wherein the touch-screen user interface is configured to alarm the audible alarm is a signal is wirelessly communicated to the touch-screen user interface indicating that the kit should alarm.

50. The kit according to claim 1, wherein the touch-screen user interface is a tablet, wherein the tablet is configured to provide instructions to a patient how to use at least one medical apparatus.

51. The kit according to claim 1, wherein at least one of the plurality of compartments is an environmentally controlled compartment configured to control at least one of temperature, humidity, pressure, or atmospheric composition.

52. The kit according to claim 1, wherein the touch-screen user interface is a tablet, wherein the tablet is configured to teleconferencing with a physician.

53. The kit according to claim 1, further comprising an oxygen leak sensor.

54. The kit according to claim 1, further comprising an oxygen generator.

55. The kit according to claim 1, further comprising a communications component configured to connect to a wireless access point.

56. The kit according to claim 1, further comprising a communications component configured to interface with external medical apparatuses.

* * * * *

专利名称(译)	用于远程患者护理的系统，方法和设备		
公开(公告)号	US20160346056A1	公开(公告)日	2016-12-01
申请号	US15/163906	申请日	2016-05-25
[标]申请(专利权)人(译)	德卡产品有限公司		
申请(专利权)人(译)	DEKA PRODUCTS LIMITED PARTNERSHIP		
当前申请(专利权)人(译)	DEKA PRODUCTS LIMITED PARTNERSHIP		
[标]发明人	DEMERS JASON A MORGAN FREDERICK MARCHANT JR GEORGE W COLLINS DAVID E DELAURENTIS KATIE A KAMEN DEAN		
发明人	DEMERS, JASON A. MORGAN, FREDERICK MARCHANT, JR., GEORGE W. COLLINS, DAVID E. DELAURENTIS, KATIE A. KAMEN, DEAN		
IPC分类号	A61B50/31 A61B5/022 A61B5/1455 A61B5/01 A61B5/0402 A61B5/145 A61B5/15 A61B10/00 A61B5/00 A61B90/30 A61B90/98 A61M16/10 B65D5/00 A61F17/00 A61B34/00		
CPC分类号	A61B50/31 A61M2205/15 A61B5/022 A61B5/14552 A61B5/01 A61B5/0402 A61B5/14532 A61B5/150343 A61B10/007 A61B5/0022 A61B5/6898 A61B90/30 A61B90/98 A61B5/746 A61M16/101 B65D5/0085 A61F17/00 A61B2050/3008 A61B2050/311 A61B2050/0056 A61B2017/00734 A61B2017/00221 A61B2017/00199 A61B2560/0252 A61B2560/0257 A61B2562/029 A61B2562/182 A61B34/25 A61B5/150022 A61B5/150305 A61B5/157 A61M16/0051 A61M16/021 A61M16/10 A61M2202/0208 A61M2205/18 A61M2205/3569 A61M2205/3592 A61M2205/581 A61M2205/583 A61M2205/6054 A61M2209/06 A61M2209/084 A61M2230/04 A61M2230/205 A61M2230/30 A61M2230/50 G16H10/65 G16H40/60 G16H40/63 G16H40/67 G16H80/00 A61M2202/0007 G06F19/34 G16H20/00		
优先权	62/168343 2015-05-29 US		
其他公开文献	US10478261		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种便携式病人护理套件。套件包括两个外壳部分，多个隔室，触摸屏用户接口装置和灯条。两个壳体部分枢转地联接在一起以形成容器空间。多个隔室设置在至少一个壳体部分内，使得每个隔室构造成保持至少一个医疗装置。触摸屏用户接口设备具有可以经由移动数据网络进行通信的收发器。灯条沿着被配置为提供光的两个壳体部分中的一个的外部设置。

